




# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctest.com>



## MEASUREMENT REPORT WCDMA

**Applicant Name:**  
LG Electronics USA, Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States


**Date of Testing:**  
7/8 - 7/23/2019  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M1907050112-02.ZNF

<b>FCC ID:</b>	<b>ZNFT600US</b>
<b>APPLICANT:</b>	<b>LG Electronics USA, Inc.</b>

**Application Type:** Certification  
**Model:** LM-T600US  
**Additional Model(s):** LMT600US, T600US, LM-T600QS, LMT600QS, T600QS  
**EUT Type:** Portable Tablet  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** 22, 24 & 27  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President




<b>FCC ID:</b> ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 1 of 60	


# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location .....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Cellular - Base Frequency Blocks .....	6
3.3	Cellular - Mobile Frequency Blocks .....	6
3.4	PCS - Base Frequency Blocks .....	6
3.5	PCS - Mobile Frequency Blocks .....	7
3.6	AWS - Base Frequency Blocks .....	7
3.7	AWS - Mobile Frequency Blocks .....	7
3.8	Radiated Measurements .....	8
4.0	MEASUREMENT UNCERTAINTY .....	9
5.0	TEST EQUIPMENT CALIBRATION DATA .....	10
6.0	SAMPLE CALCULATIONS .....	11
7.0	TEST RESULTS .....	12
7.1	Summary .....	12
7.2	Occupied Bandwidth .....	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	16
7.4	Band Edge Emissions at Antenna Terminal .....	32
7.5	Peak-Average Ratio .....	38
7.6	Radiated Power (ERP/EIRP) .....	40
7.7	Radiated Spurious Emissions Measurements .....	44
7.8	Frequency Stability / Temperature Variation .....	53
8.0	CONCLUSION .....	60

<b>FCC ID:</b> ZNFT600US	 <small>ENGINEERING LABORATORY, INC.</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 2 of 60	



## MEASUREMENT REPORT WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
WCDMA850	22H	826.4 - 846.6	0.112	20.48	0.183	22.63	4M15F9W
WCDMA1700	27	1712.4 - 1752.6			0.236	23.72	4M16F9W
WCDMA1900	24E	1852.4 - 1907.6			0.389	25.90	4M18F9W

### EUT Overview

FCC ID: ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 3 of 60

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 4 of 60	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Tablet FCC ID: ZNFT600US**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** 00574, 00566

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 5 of 60	


### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

#### 3.2 Cellular - Base Frequency Blocks

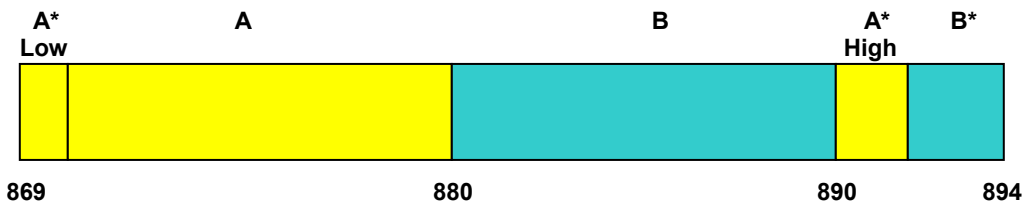


**BLOCK 1:** 869 – 880 MHz (A\* Low + A)

**BLOCK 3:** 890 – 891.5 MHz (A\* High)

**BLOCK 2:** 880 – 890 MHz (B)

**BLOCK 4:** 891.5 – 894 MHz (B\*)

#### 3.3 Cellular - Mobile Frequency Blocks

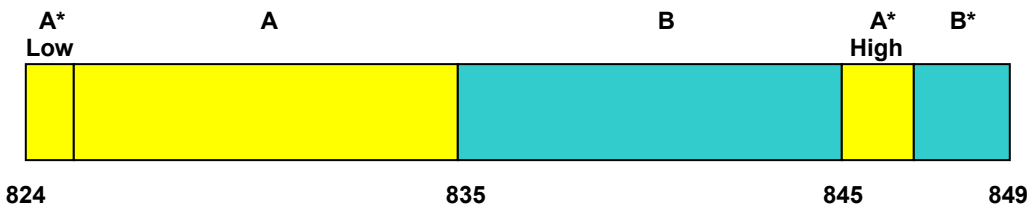


**BLOCK 1:** 824 – 835 MHz (A\* Low + A)

**BLOCK 3:** 845 – 846.5 MHz (A\* High)

**BLOCK 2:** 835 – 845 MHz (B)

**BLOCK 4:** 846.5 – 849 MHz (B\*)

#### 3.4 PCS - Base Frequency Blocks

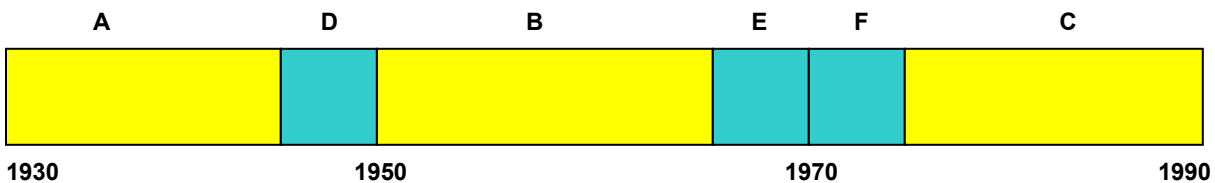

**BLOCK 1:** 1930 – 1945 MHz (A)

**BLOCK 4:** 1965 – 1970 MHz (E)

**BLOCK 2:** 1945 – 1950 MHz (D)


**BLOCK 5:** 1970 – 1975 MHz (F)

**BLOCK 3:** 1950 – 1965 MHz (B)

**BLOCK 6:** 1975 – 1990 MHz (C)

FCC ID: ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 6 of 60	

### 3.5 PCS - Mobile Frequency Blocks

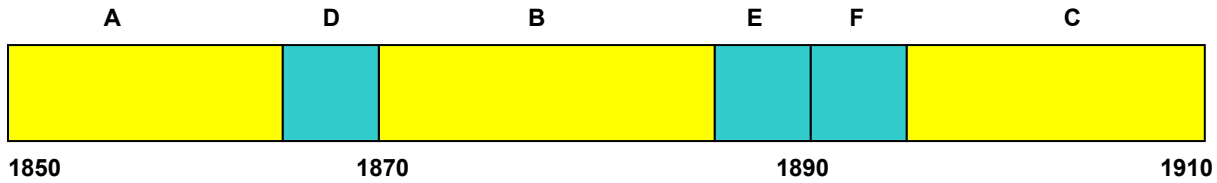

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)


BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks

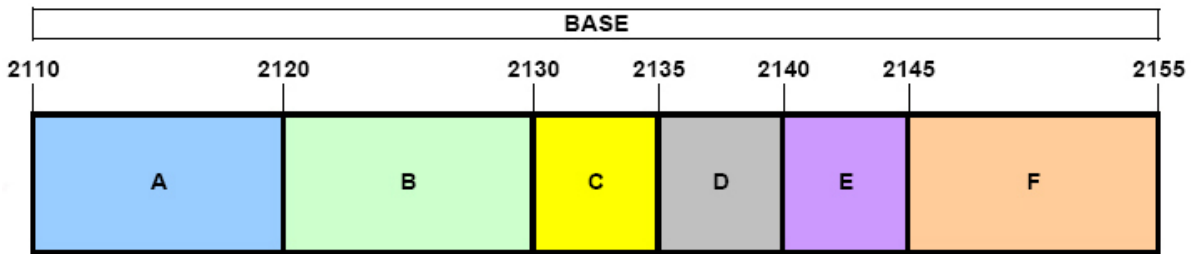

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

### 3.7 AWS - Mobile Frequency Blocks

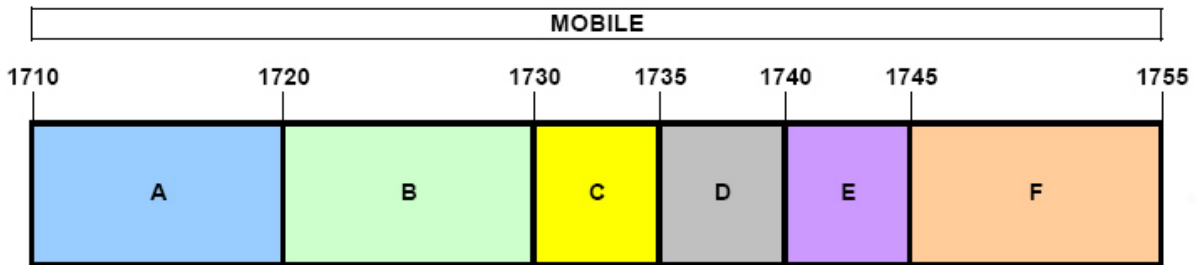

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 7 of 60

### 3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 8 of 60



## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 9 of 60	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
-	LTx2	Licensed Transmitter Cable Set	8/23/2018	Annual	8/23/2019	LTx2
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	8/8/2018	Annual	8/8/2019	441128
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/28/2018	Biennial	3/28/2020	150693
Keysight Technologie	N9020A	MXA Signal Analyzer	4/29/2019	Annual	4/29/2020	MY54500644
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			107826
Rohde & Schwarz	CMW500	Radio Communication Tester	11/14/2018	Annual	11/14/2019	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	6/26/2019	Annual	6/26/2020	112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/11/2017	Biennial	8/11/2019	A042511

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

<b>FCC ID:</b> ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 10 of 60	

## 6.0 SAMPLE CALCULATIONS

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 11 of 60	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFT600US  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> 43 + 10 log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 12 of 60

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


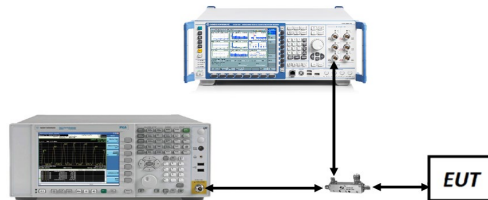


Figure 7-1. Test Instrument & Measurement Setup


### Test Notes

None.

FCC ID: ZNFT600US	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 13 of 60	

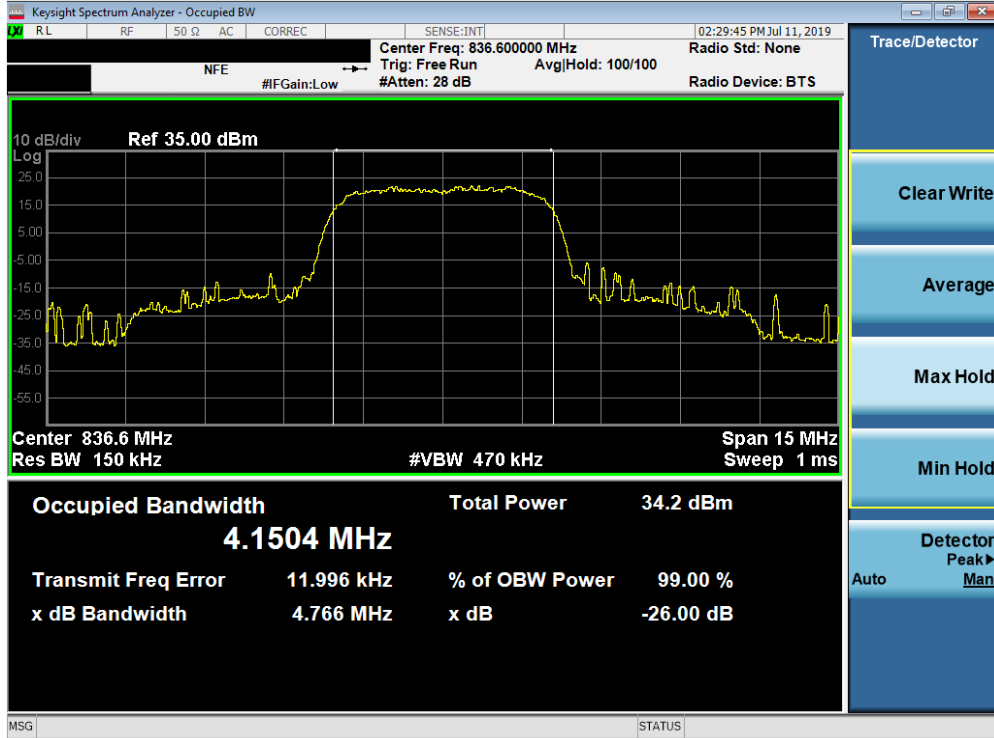


Plot 7-1. Occupied Bandwidth Plot (Cellular WCDMA Mode)

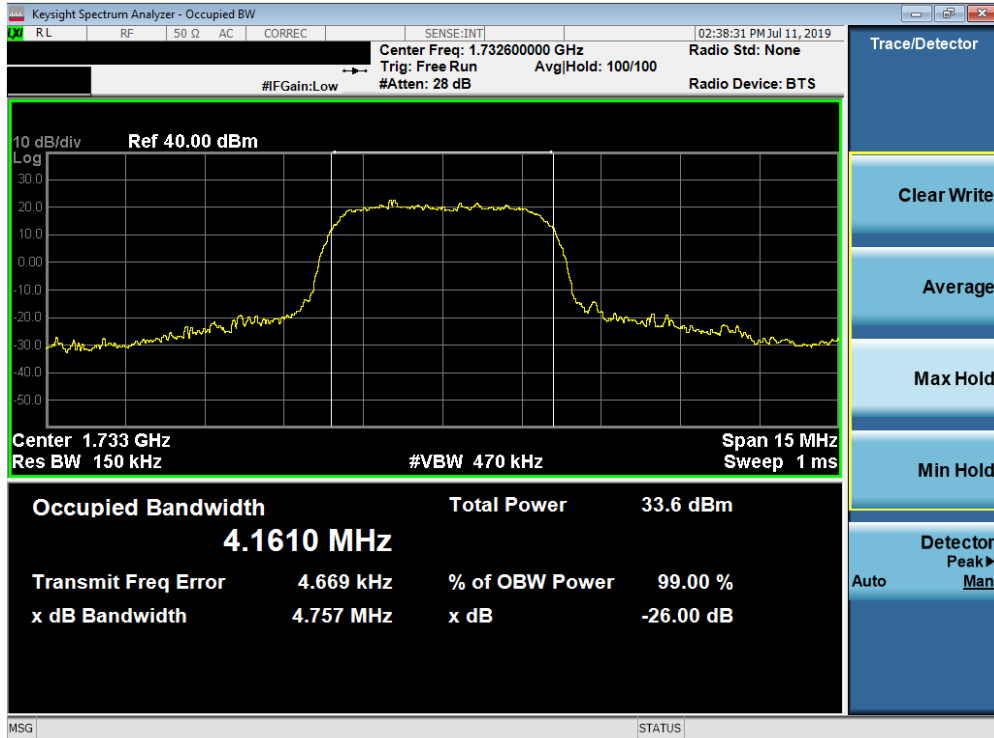

Plot 7-2. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 14 of 60

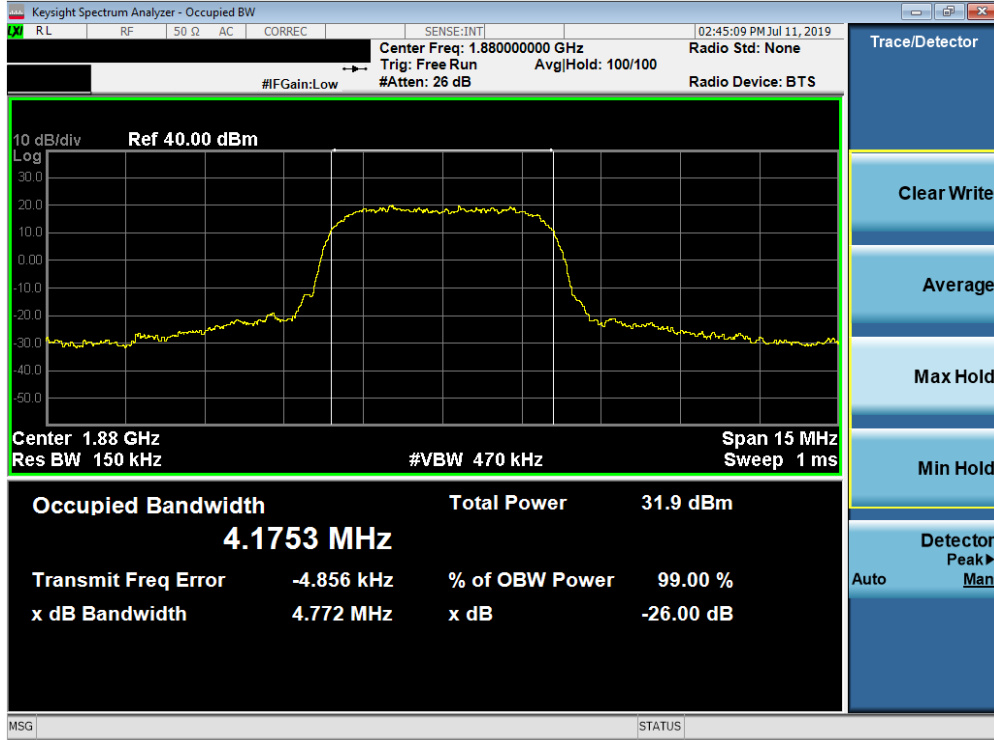

Plot 7-3. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 15 of 60

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10\log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

#### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

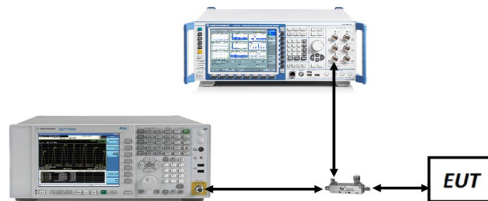


Figure 7-2. Test Instrument & Measurement Setup


#### Test Notes

Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 16 of 60



## Cellular WCDMA Mode

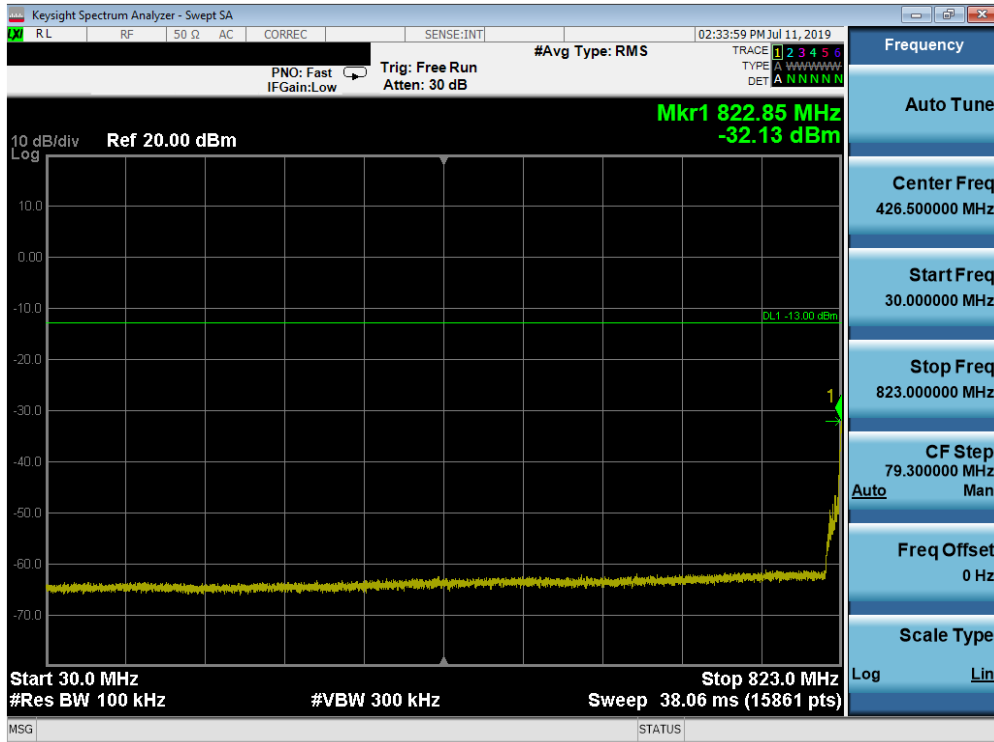


**Plot 7-4. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)**

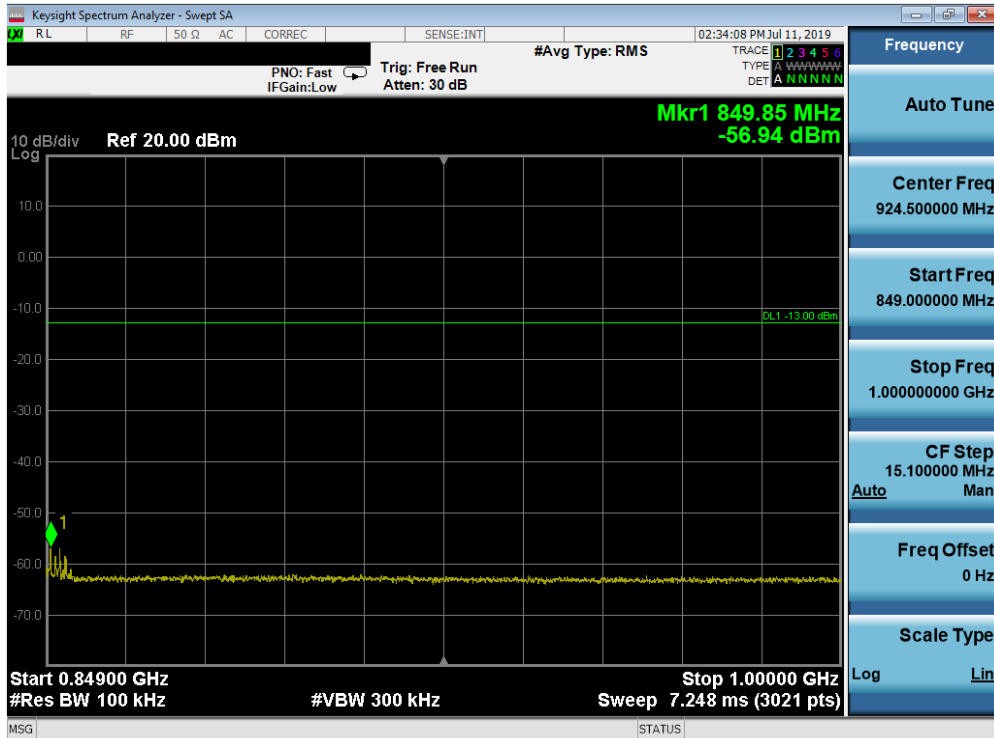


**Plot 7-5. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 17 of 60



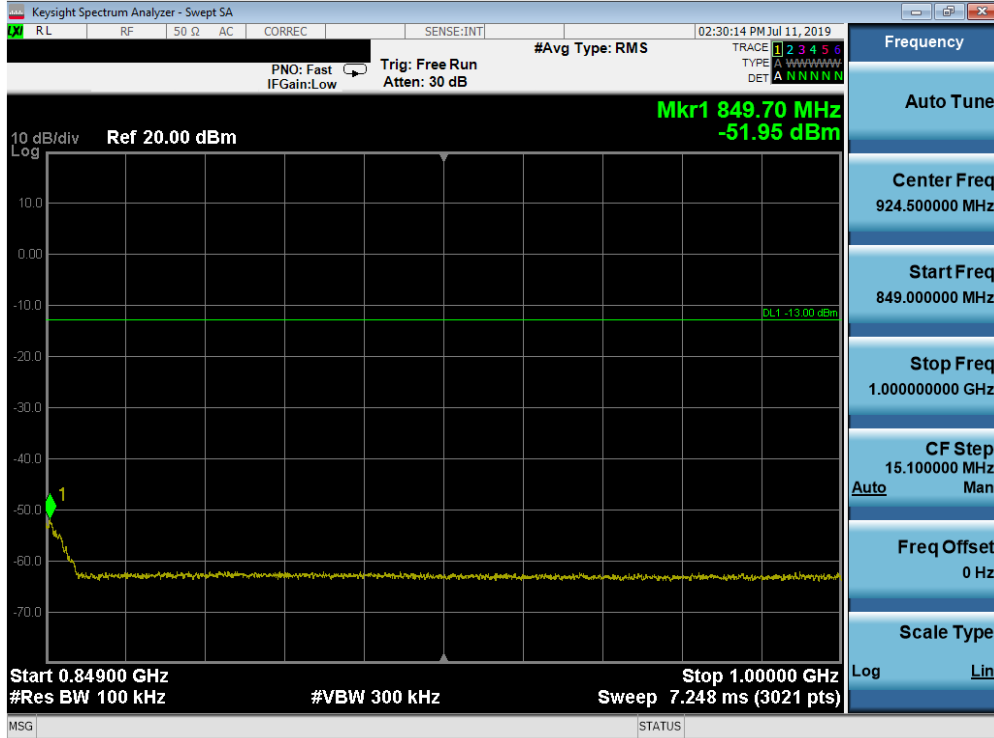


Plot 7-8. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

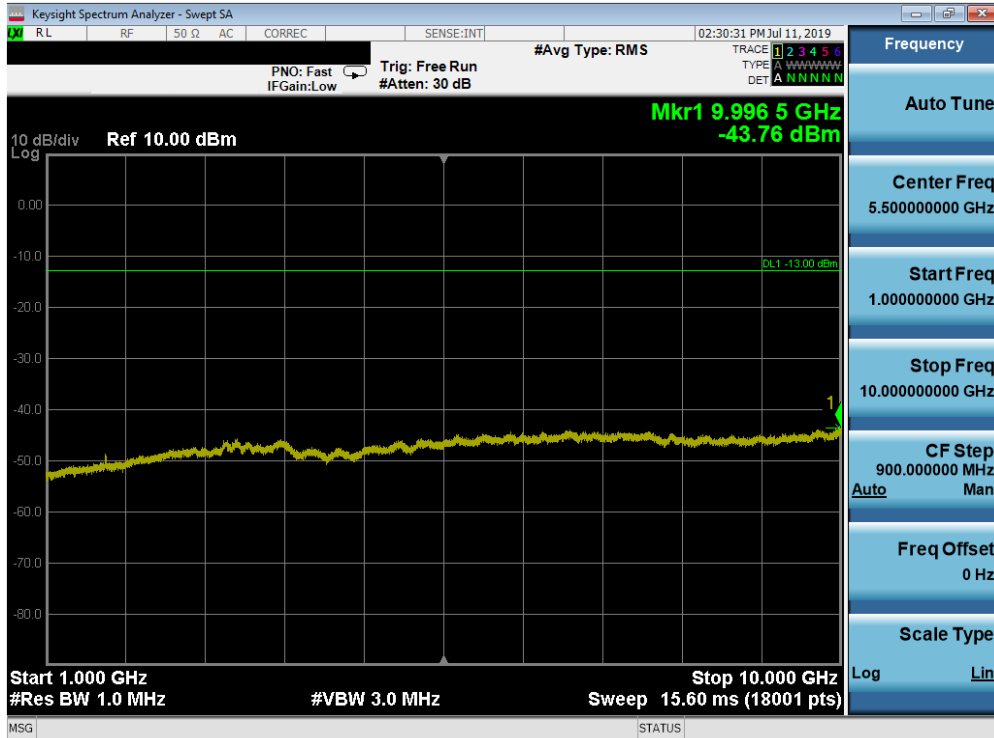


Plot 7-9. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 19 of 60

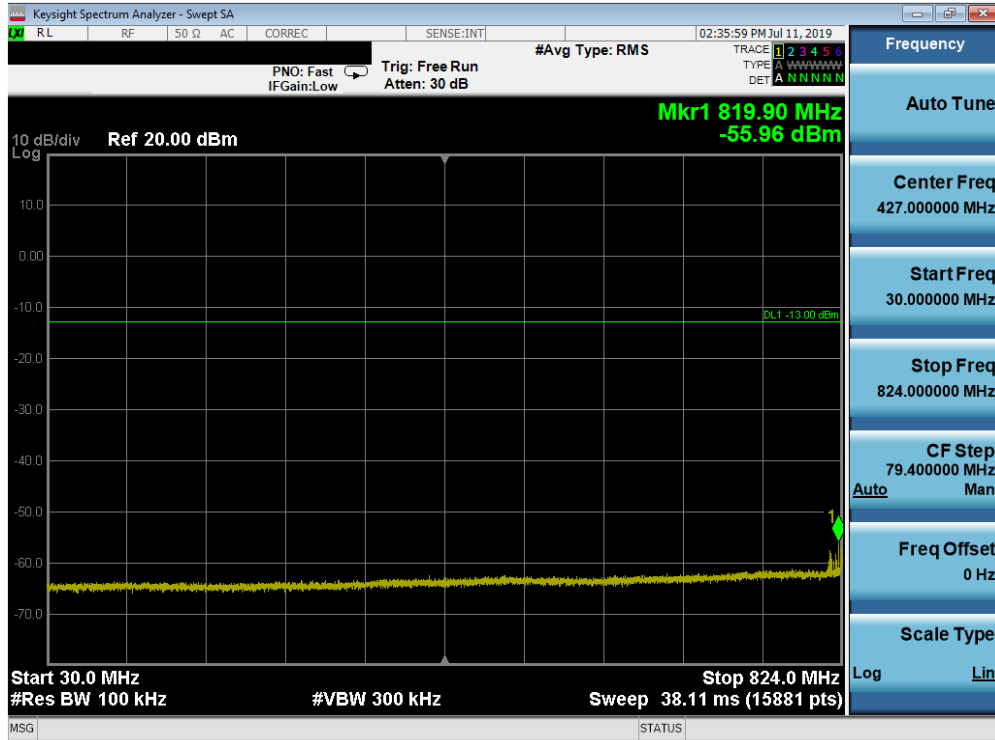


**Plot 7-10. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)**

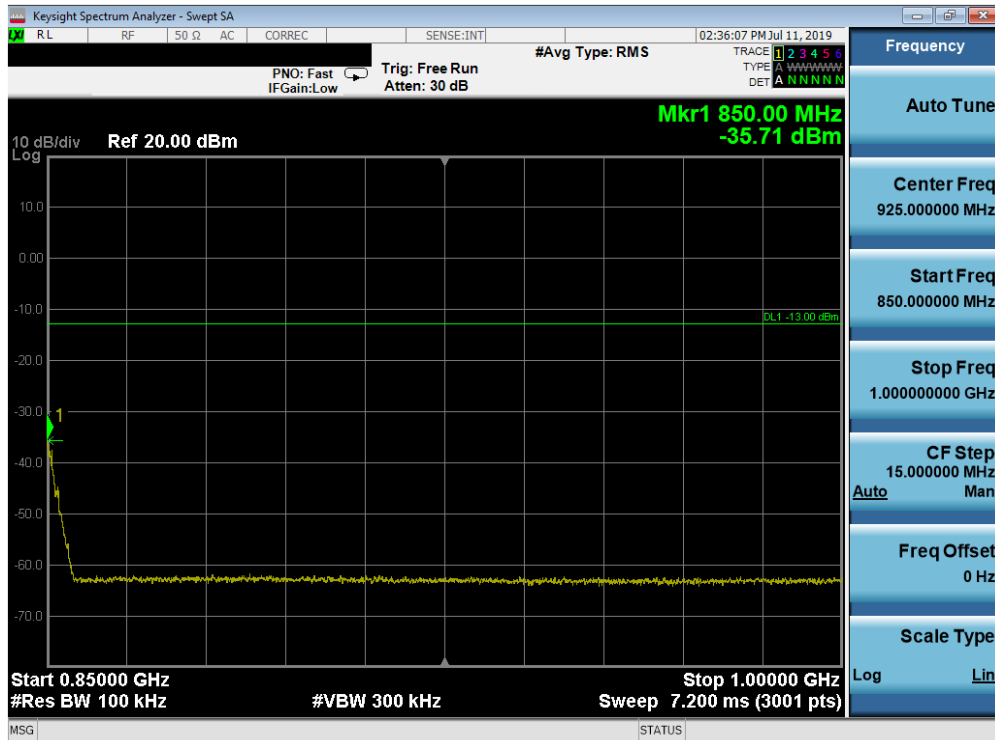

**Plot 7-11. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)**


FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 20 of 60

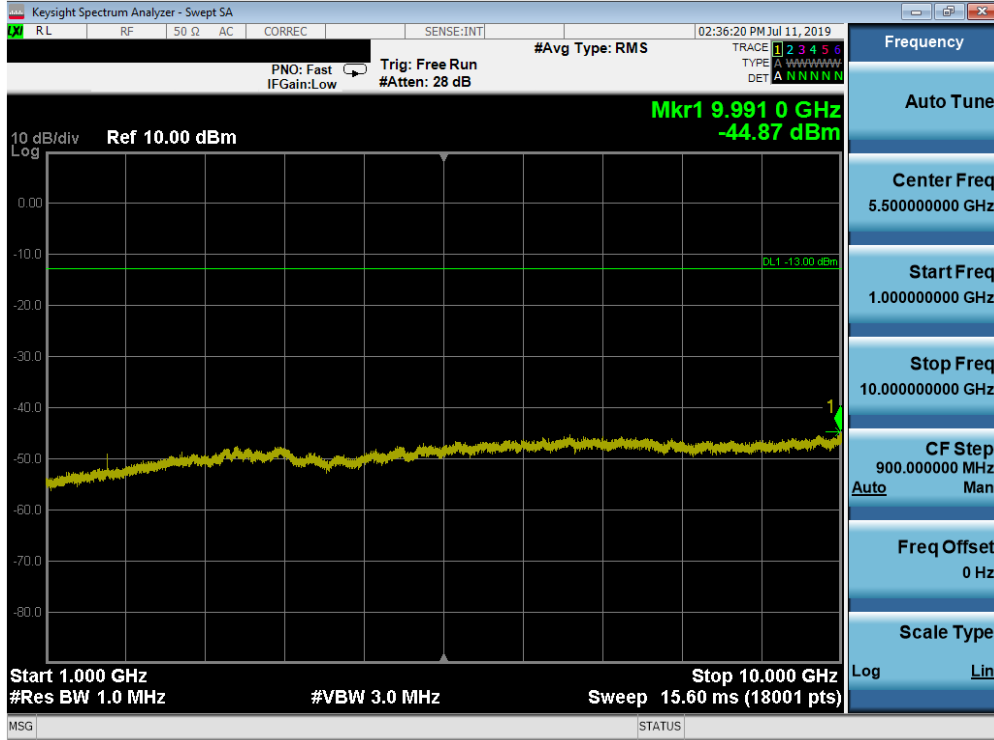


**Plot 7-12. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 21 of 60

**AWS WCDMA Mode**

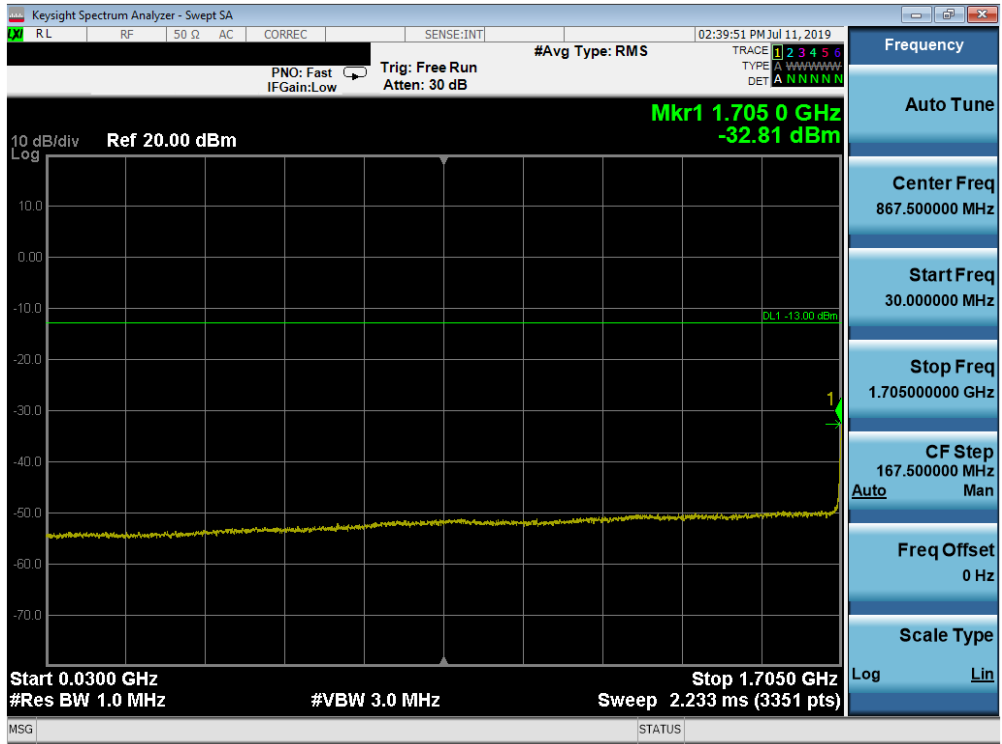


**Plot 7-13. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)**

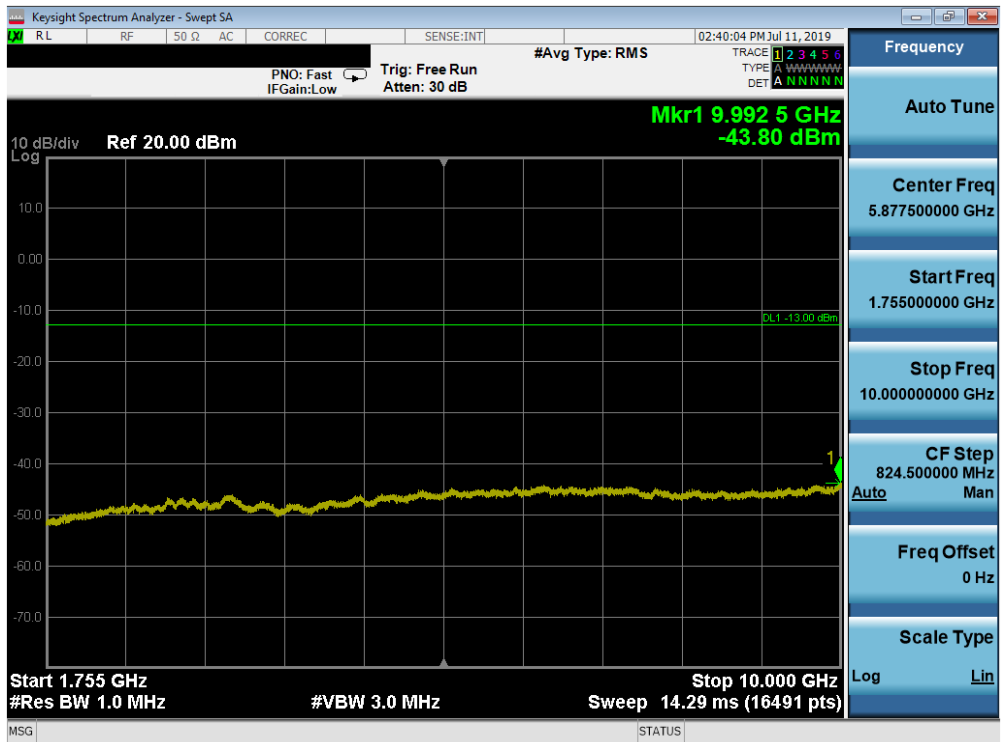


**Plot 7-14. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 22 of 60

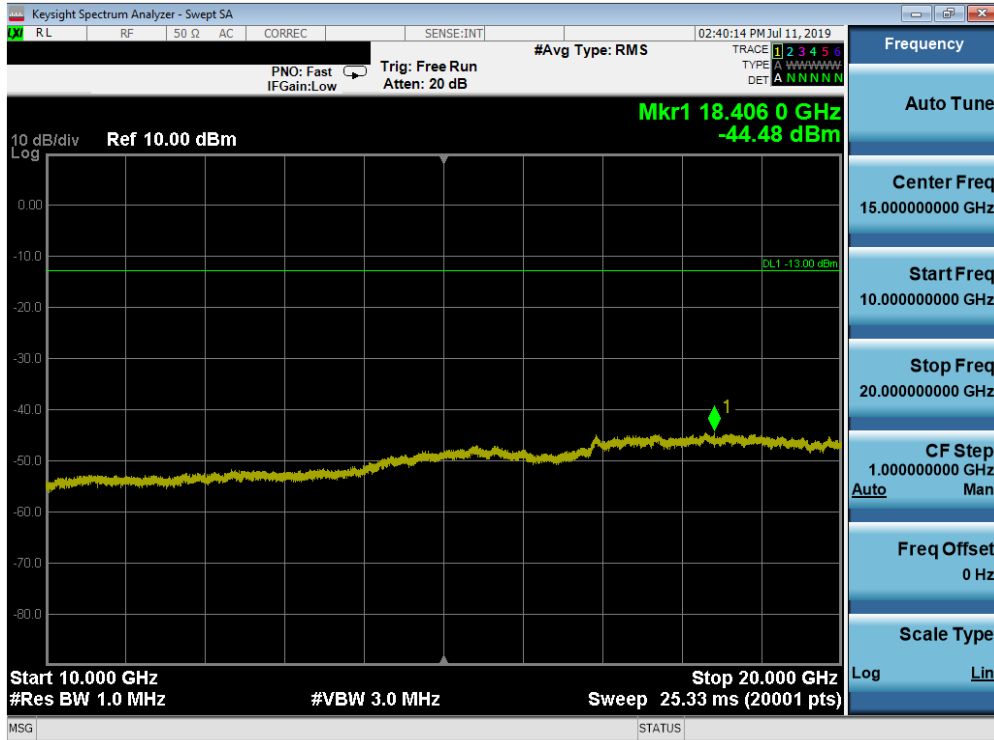


Plot 7-15. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

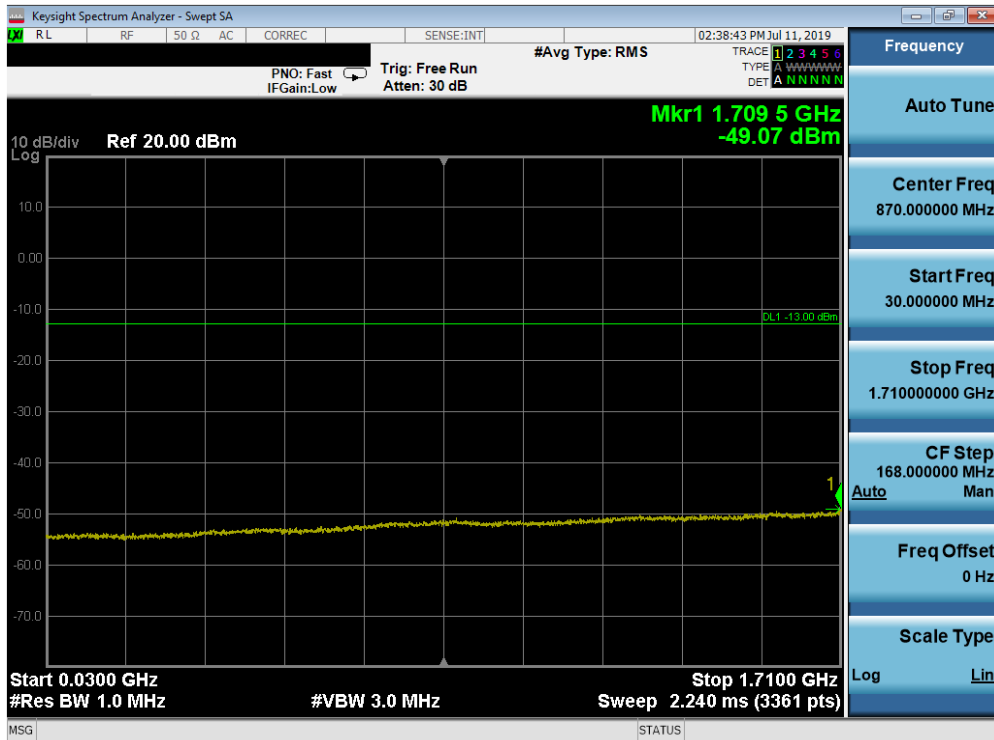


Plot 7-16. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 23 of 60

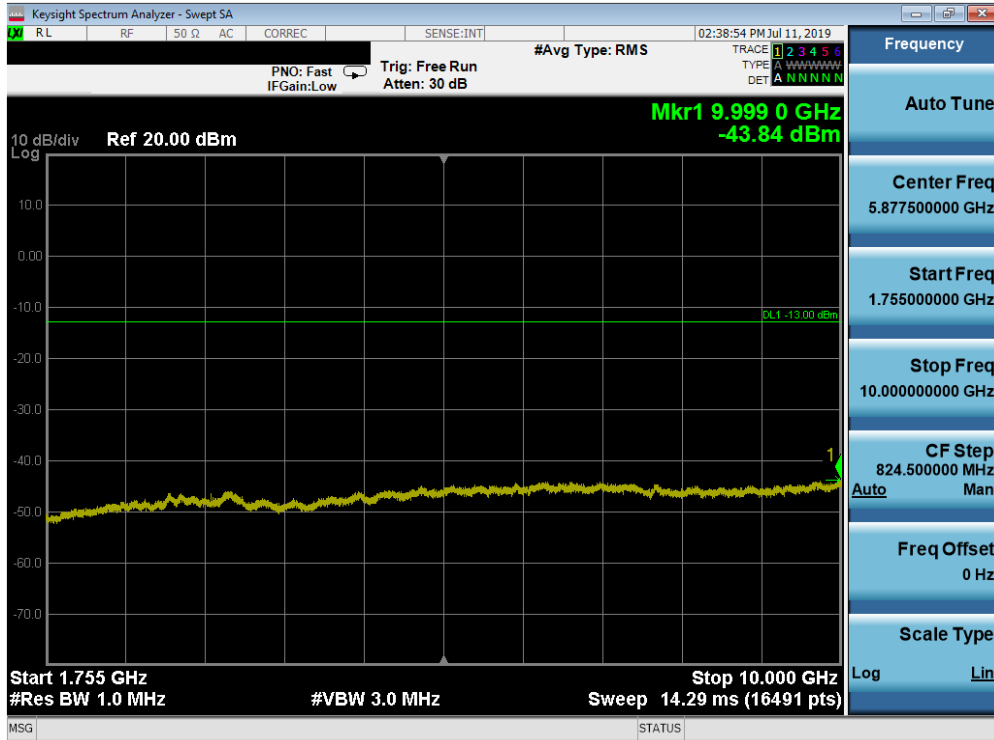

Plot 7-17. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

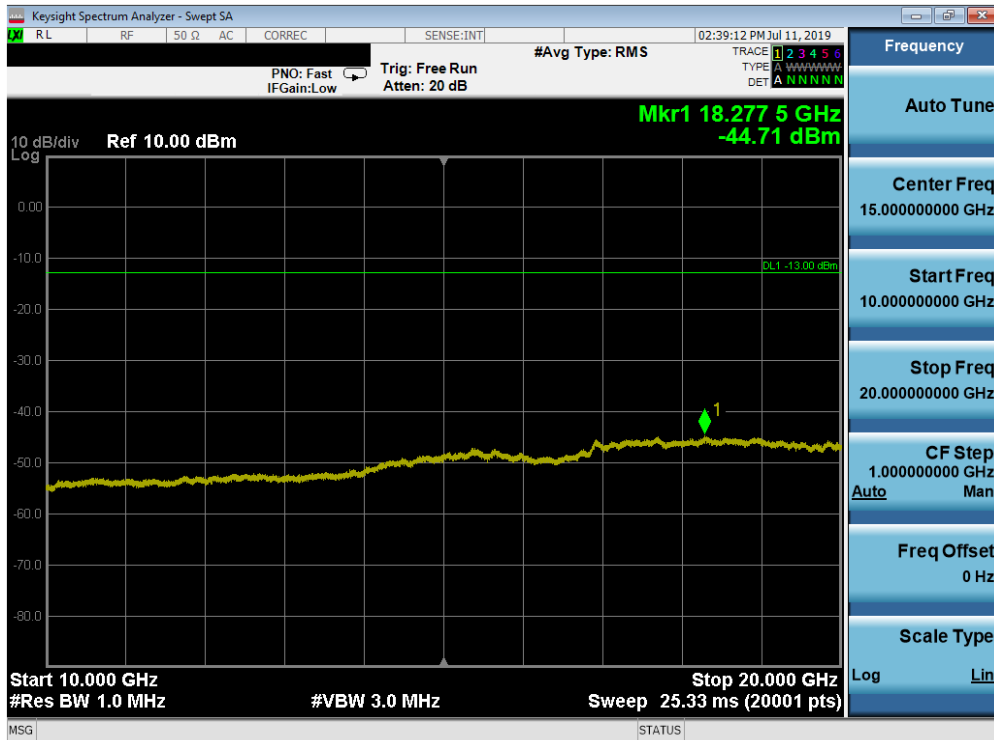


Plot 7-18. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 24 of 60






Plot 7-19. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

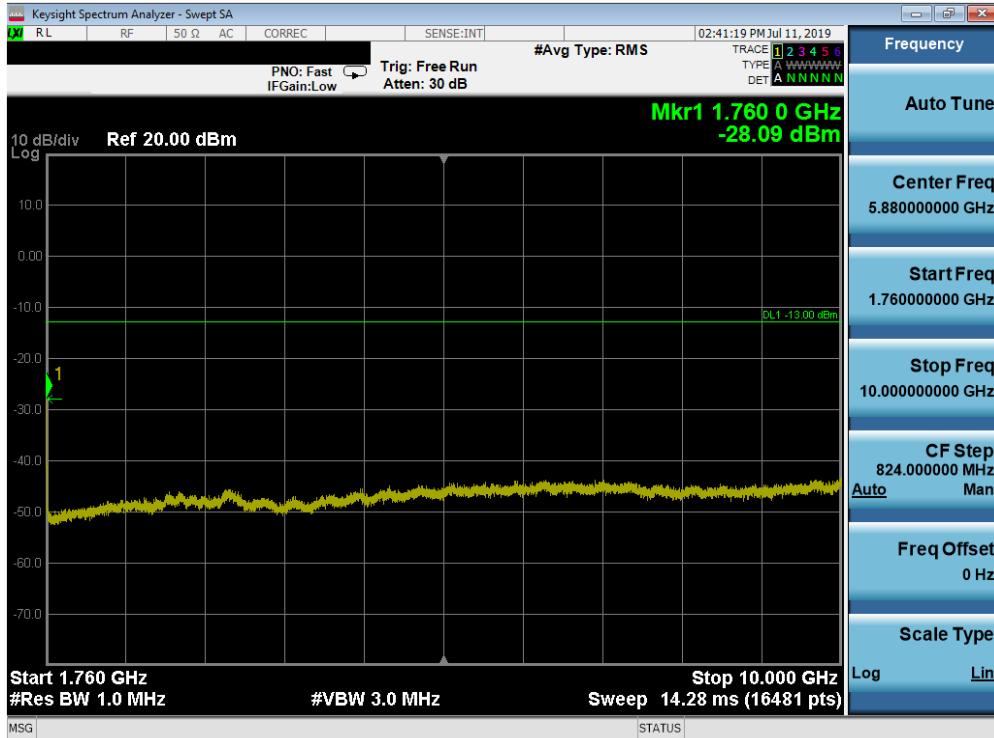

Plot 7-20. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 25 of 60

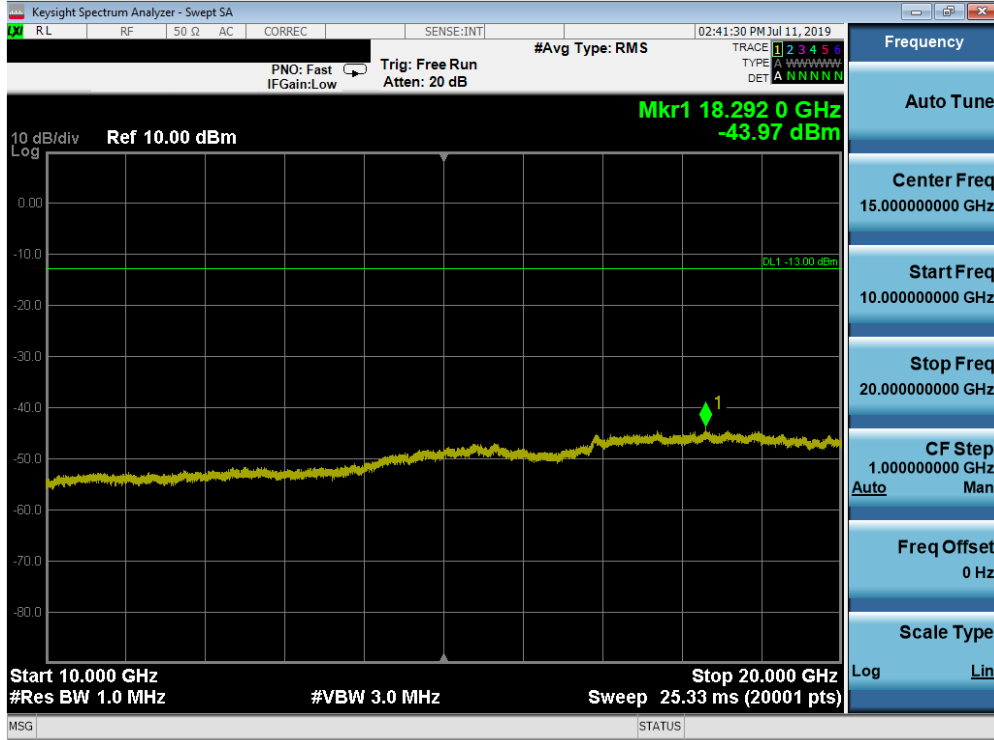


**Plot 7-21. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 26 of 60

**PCS WCDMA Mode**

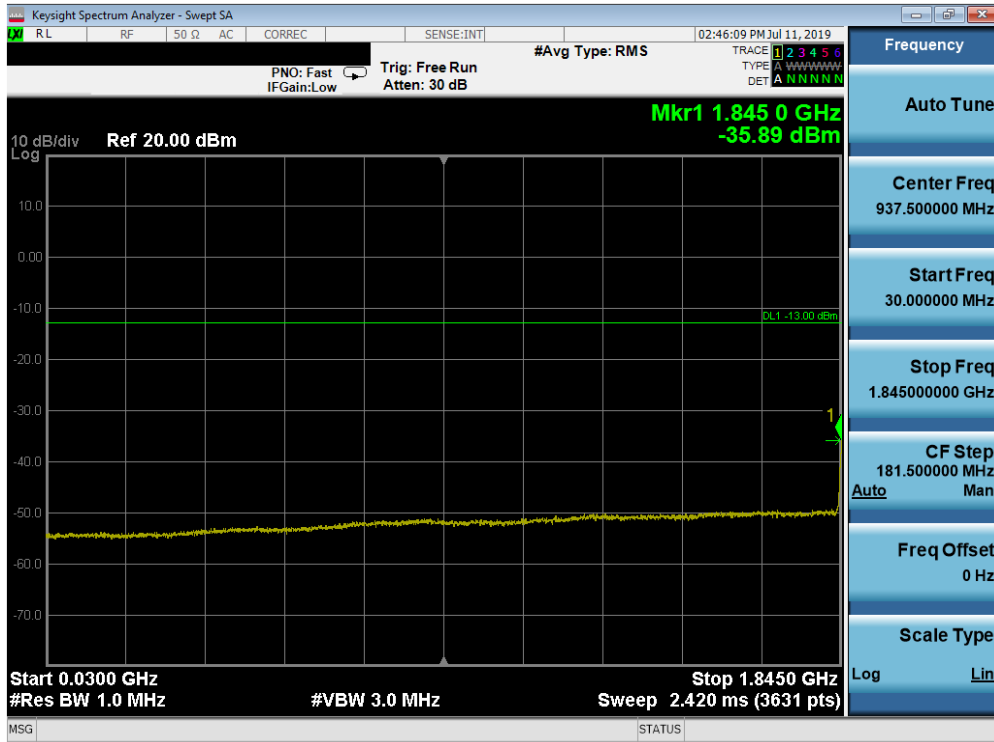


**Plot 7-22. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)**

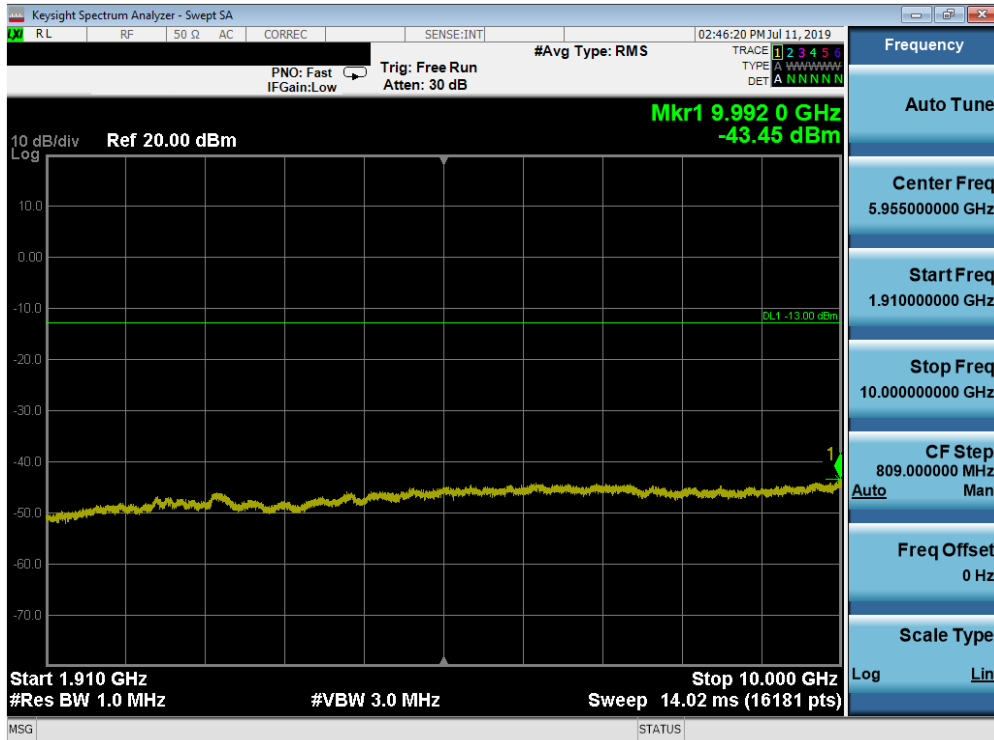

**Plot 7-23. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 27 of 60

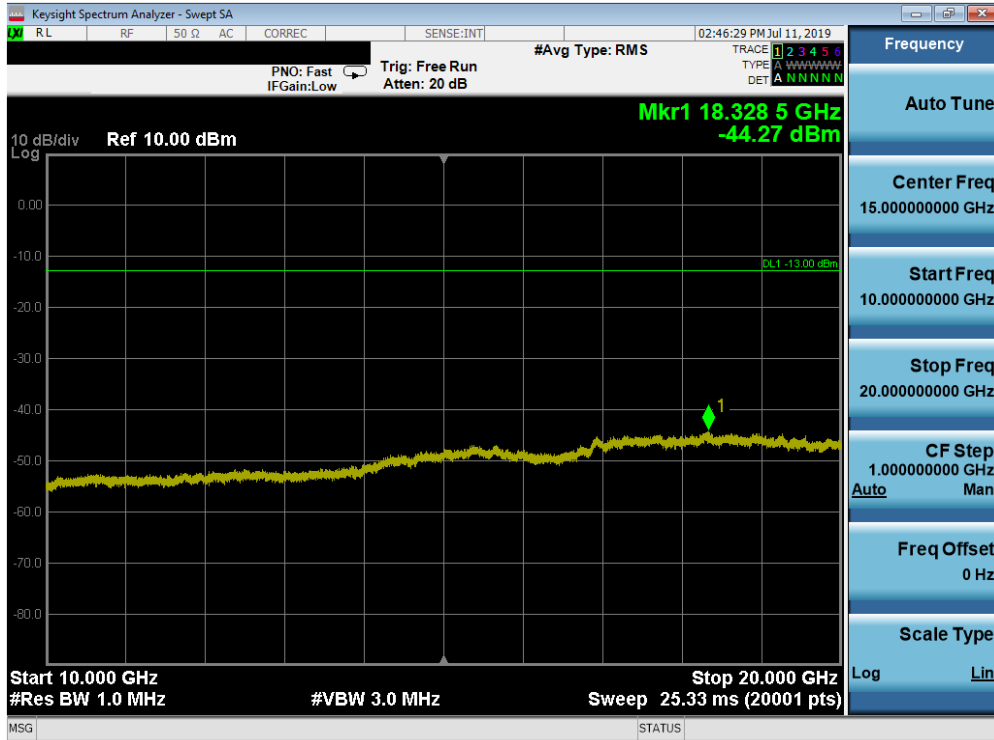


Plot 7-24. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)




Plot 7-25. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 28 of 60

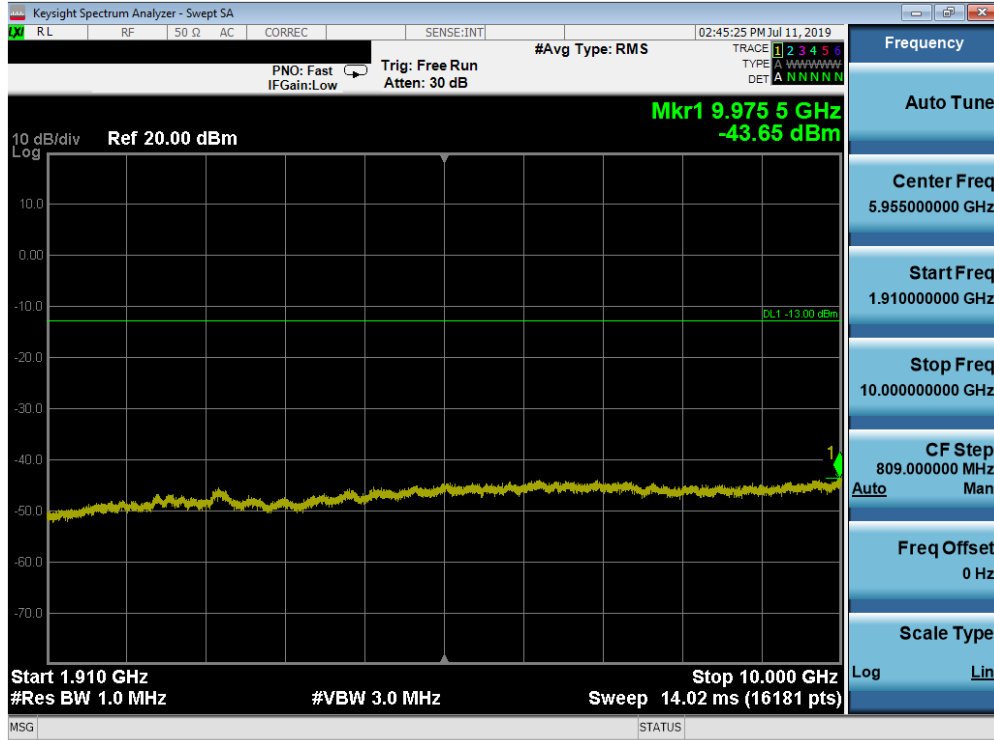


Plot 7-26. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

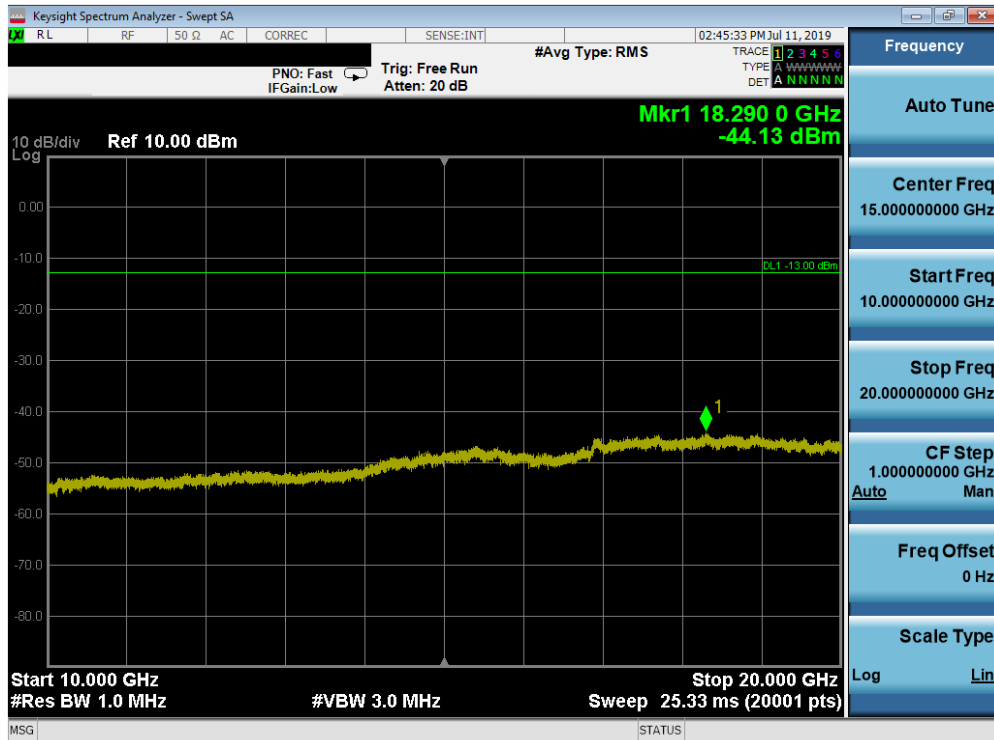


Plot 7-27. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 29 of 60

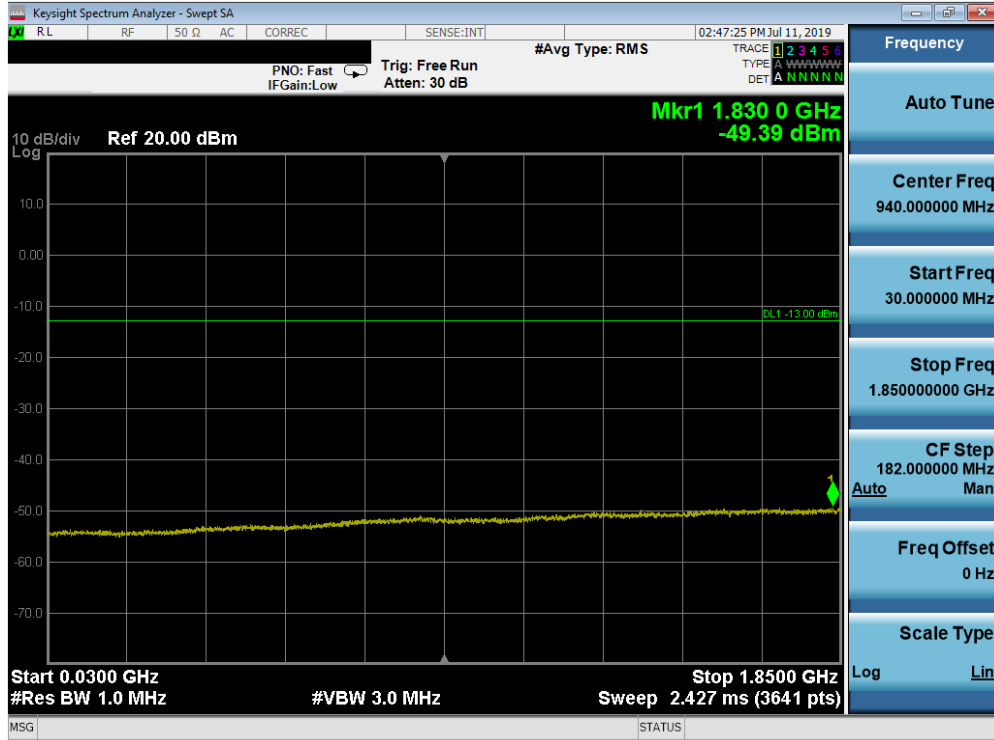


Plot 7-28. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

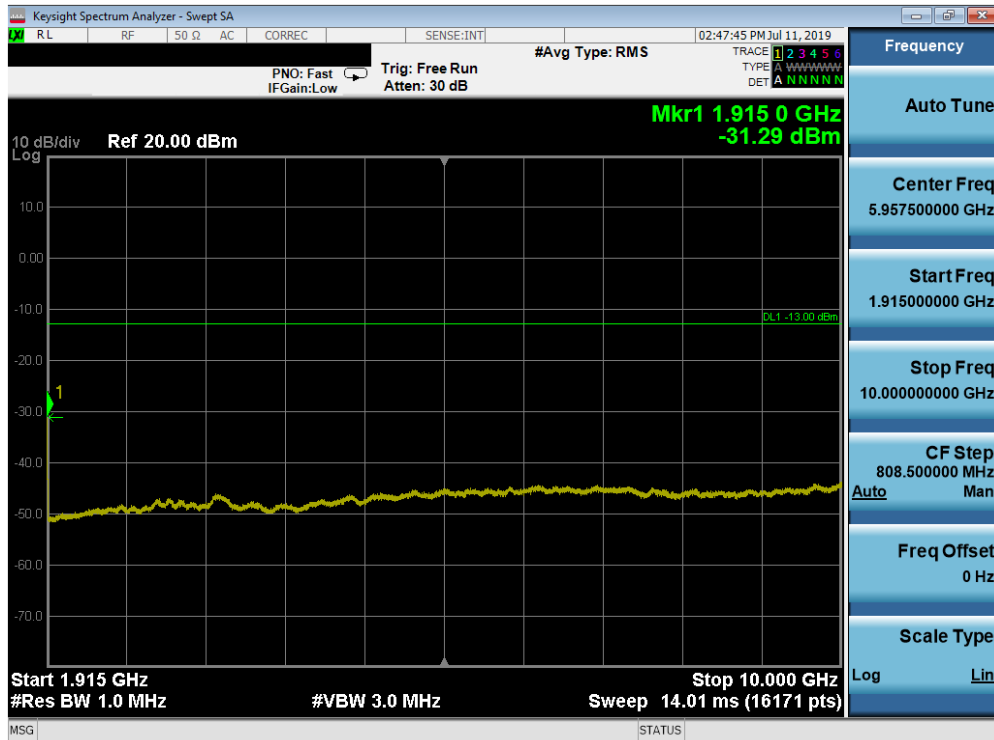

Plot 7-29. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 30 of 60

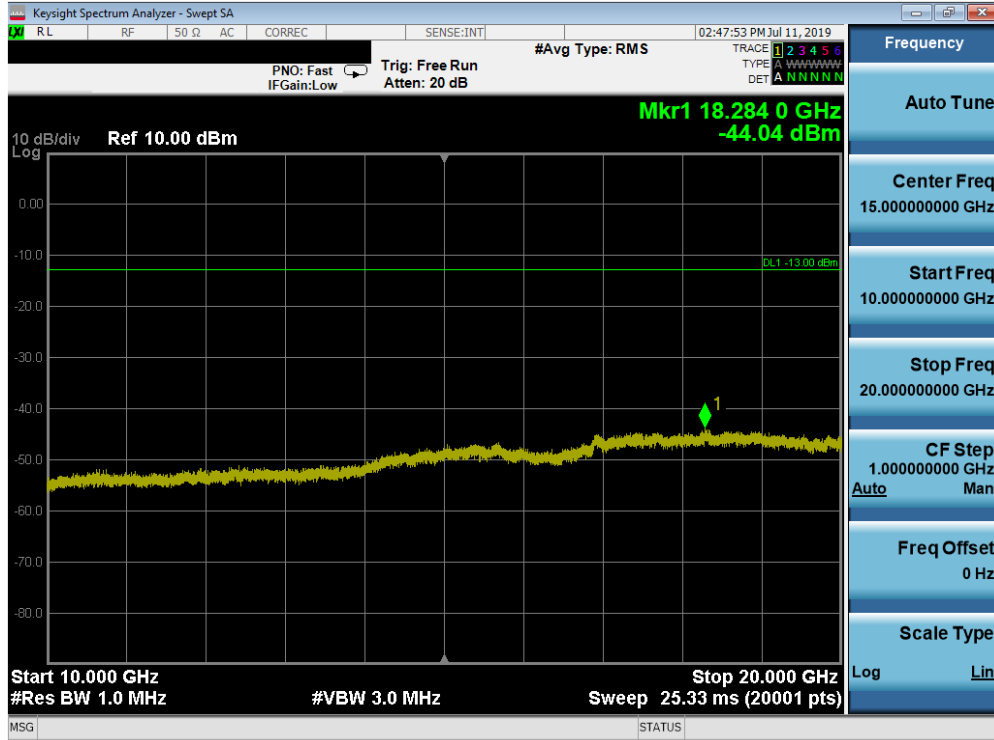

Plot 7-30. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 31 of 60

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

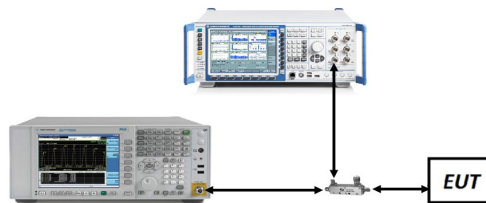

**Figure 7-3. Test Instrument & Measurement Setup**


### Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 32 of 60



## Cellular WCDMA Mode

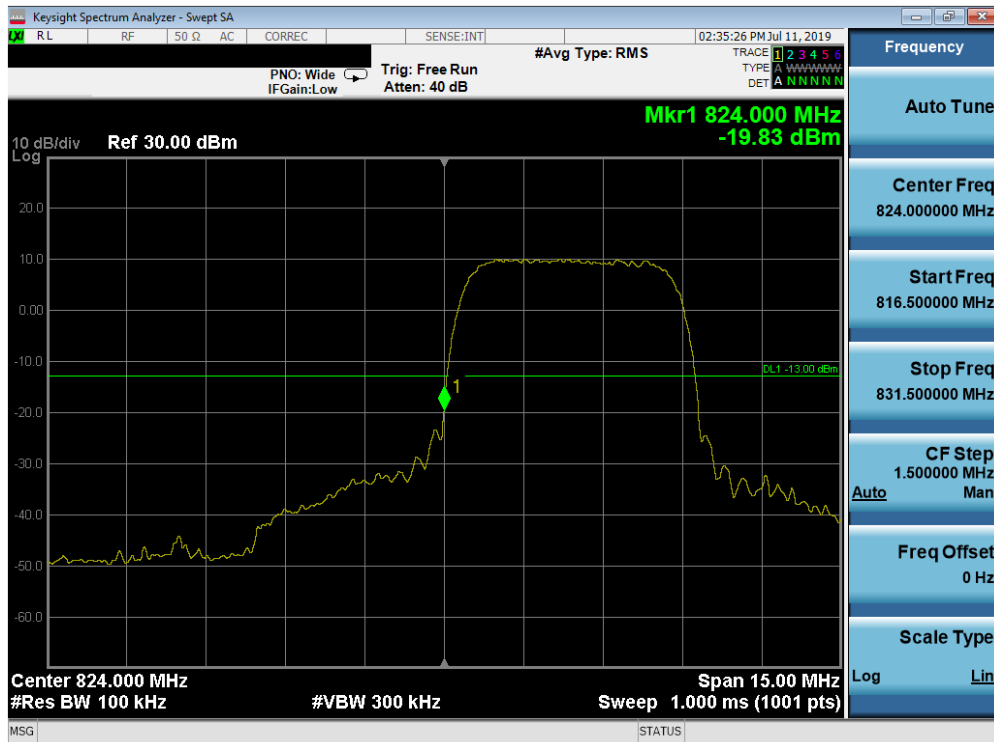


Plot 7-31. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-32. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 33 of 60

## AWS WCDMA Mode

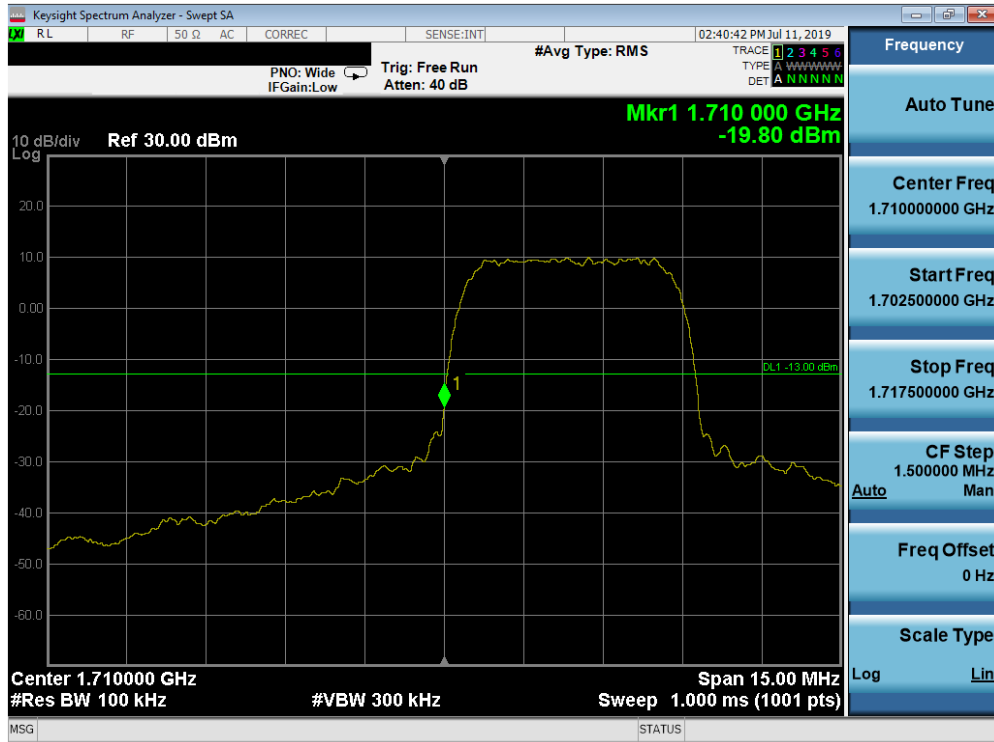

Plot 7-33. Band Edge Plot (AWS WCDMA Mode - Low Channel)

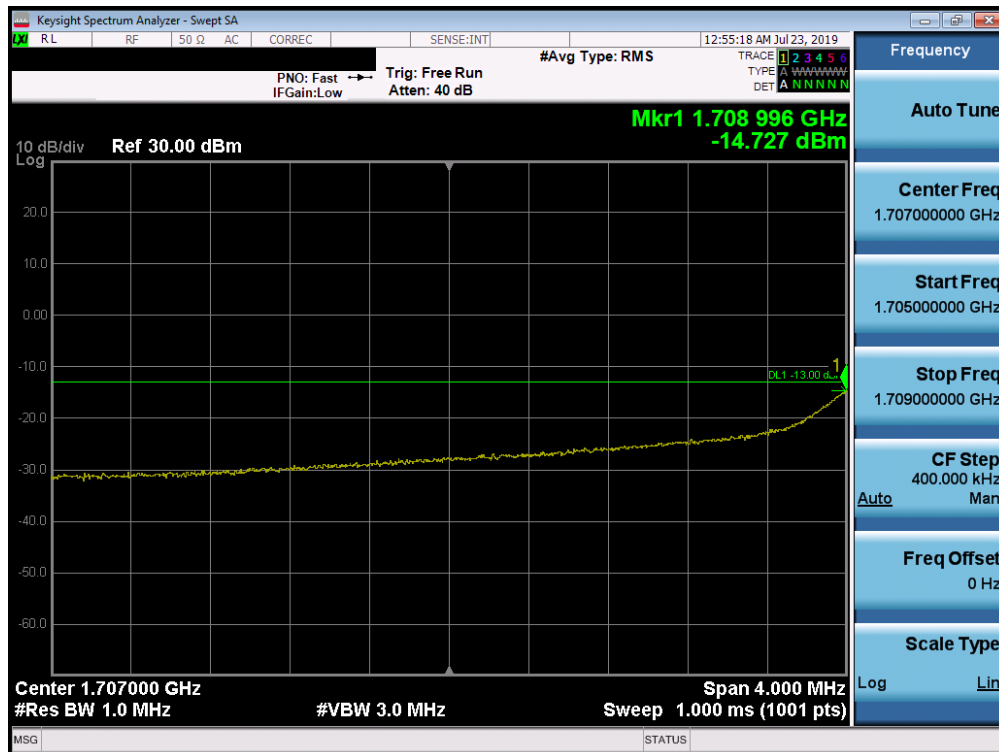


Plot 7-34. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 34 of 60




Plot 7-35. Band Edge Plot (AWS WCDMA Mode - High Channel)

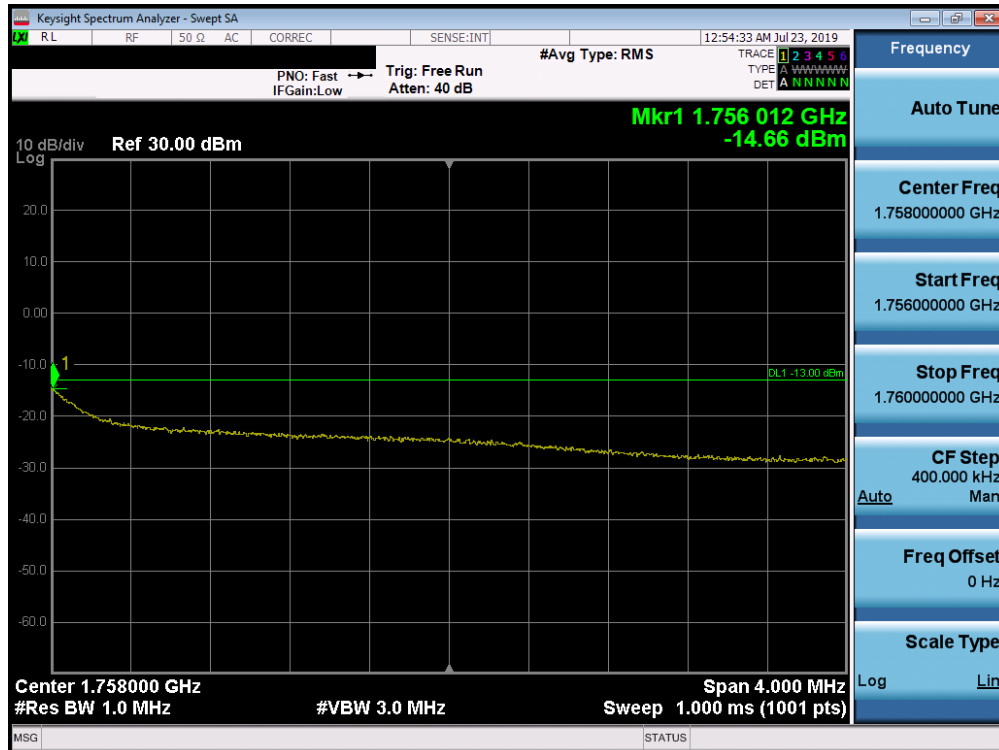


Plot 7-36. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 35 of 60

**PCS WCDMA Mode**

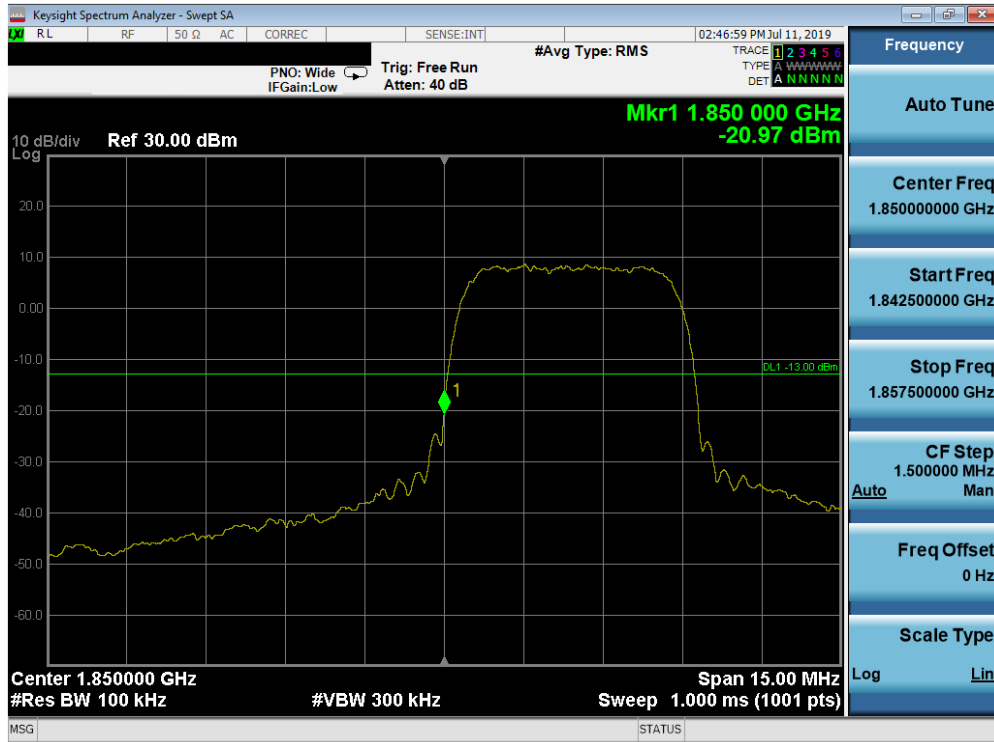

**Plot 7-37. Band Edge Plot (PCS WCDMA Mode - Low Channel)**

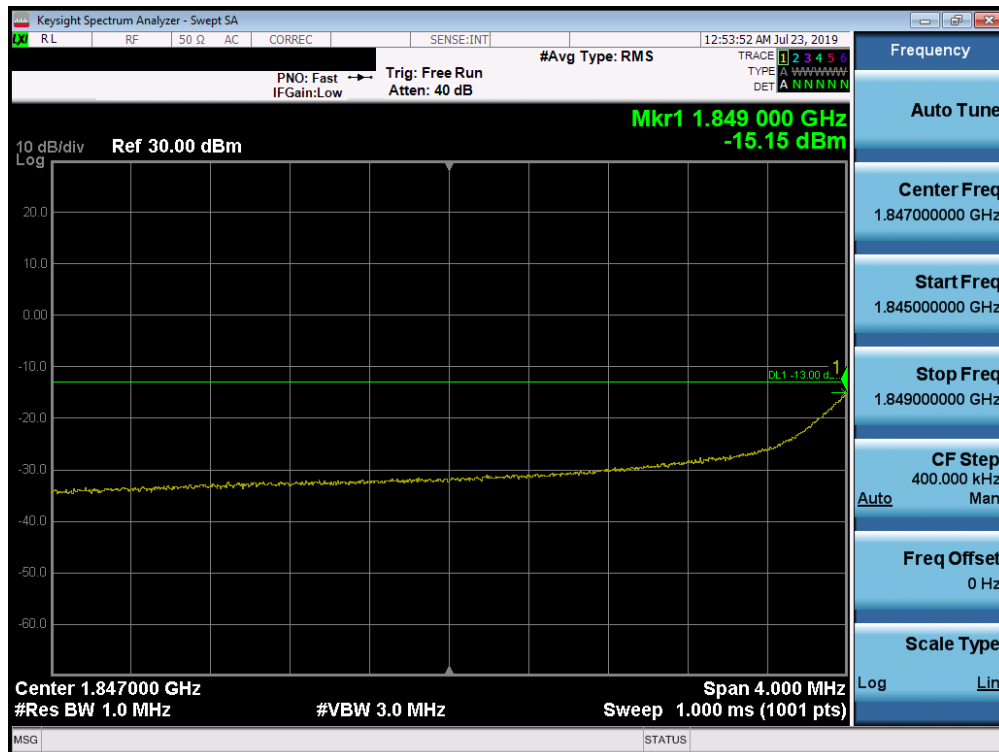

**Plot 7-38. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 36 of 60



Plot 7-39. Band Edge Plot (PCS WCDMA Mode - High Channel)



Plot 7-40. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 37 of 60

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

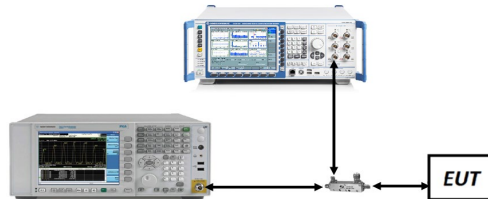


**Figure 7-4. Test Instrument & Measurement Setup**


### Test Notes

None

FCC ID: ZNFT600US	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet		Page 38 of 60

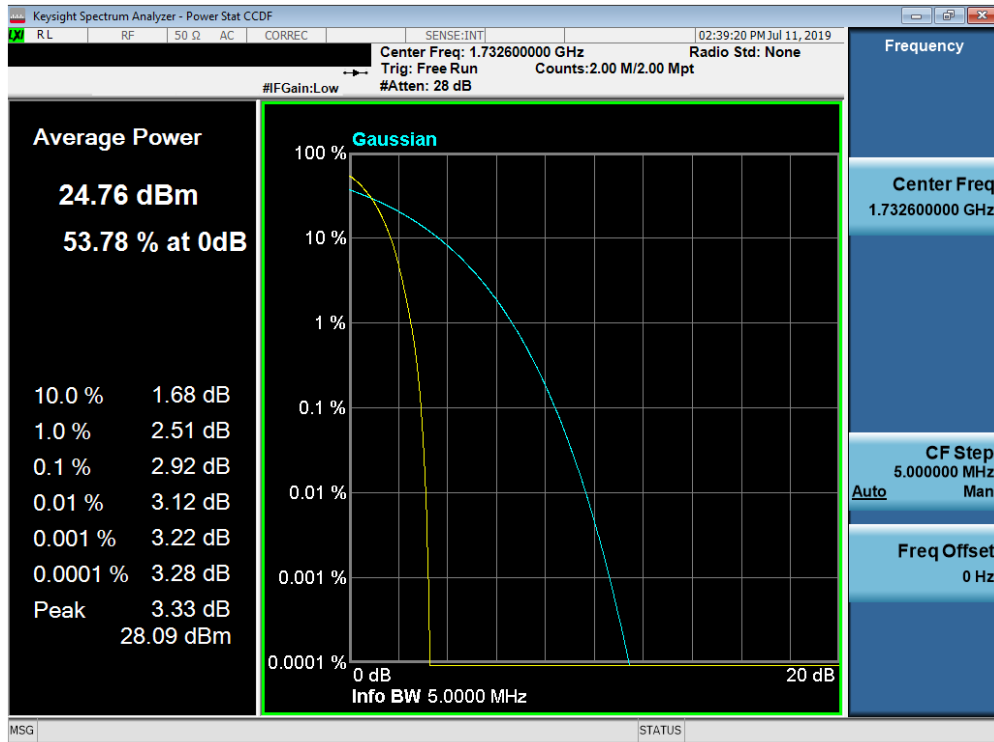

Plot 7-41. Peak-Average Ratio Plot (AWS WCDMA Mode)

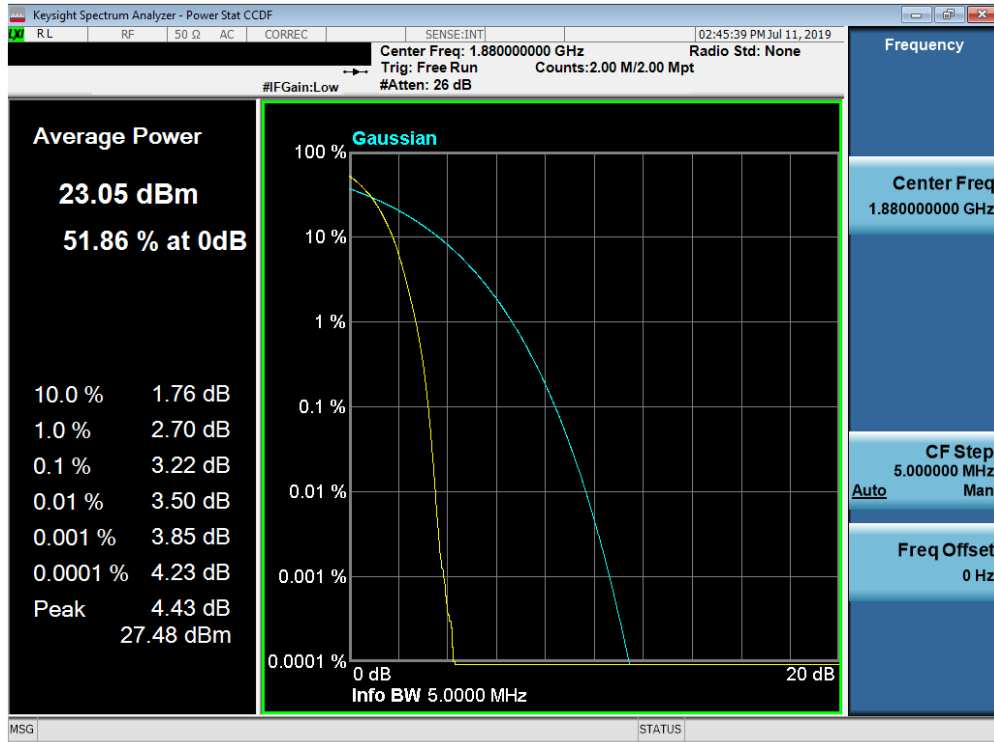

Plot 7-42. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 39 of 60

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

### Test Settings


1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 40 of 60	




### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

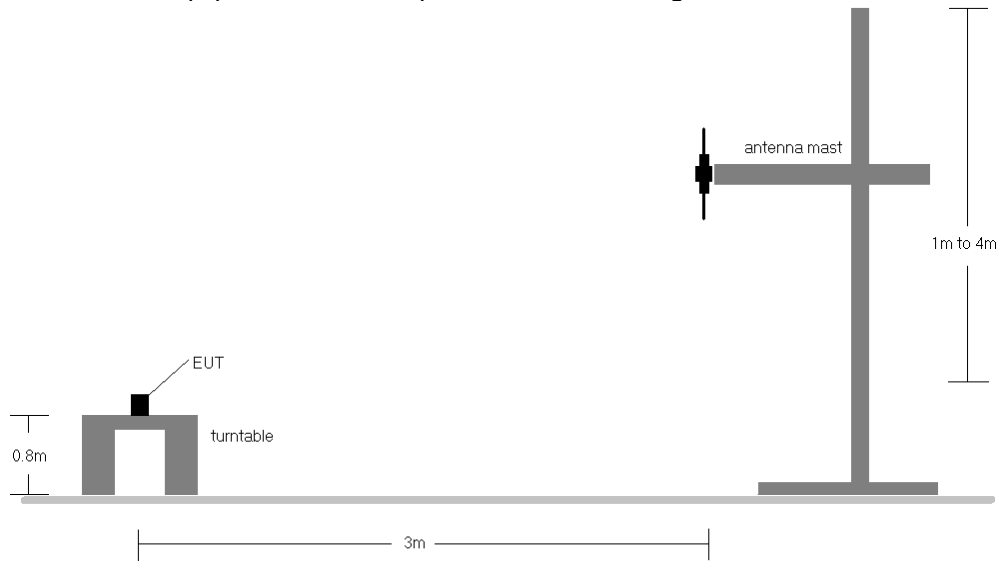

**Figure 7-5. Radiated Test Setup <1GHz**

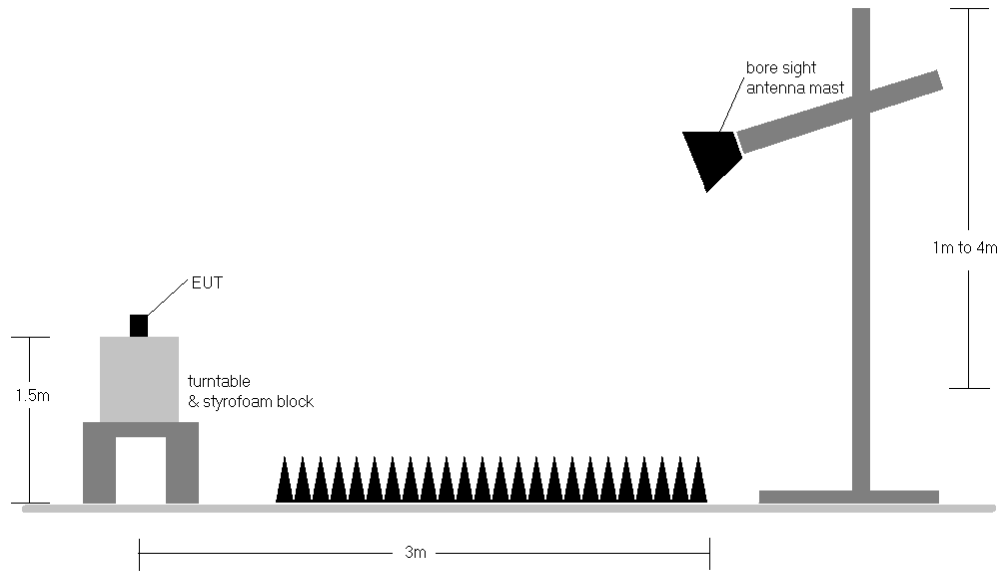

**Figure 7-6. Radiated Test Setup >1GHz**

FCC ID: ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 41 of 60	

### Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

<b>FCC ID:</b> ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 42 of 60	

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	122	7	15.93	6.70	<b>20.48</b>	38.45	-17.97	<b>22.63</b>	40.61	-17.98
836.60	WCDMA850	H	206	185	14.76	6.70	19.31	38.45	-19.14	21.46	40.61	-19.15
846.60	WCDMA850	H	191	187	15.26	6.60	19.71	38.45	-18.74	21.86	40.61	-18.75
826.40	WCDMA850	V	337	21	14.54	6.70	19.09	38.45	-19.36	21.24	40.61	-19.37

**Table 7-2. ERP/EIRP (Cellular WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	117	144	13.44	9.34	22.78	30.00	-7.22
1732.60	WCDMA1700	H	102	137	14.53	9.19	<b>23.72</b>	30.00	-6.28
1752.60	WCDMA1700	H	100	139	14.10	9.08	23.18	30.00	-6.82
1732.60	WCDMA1700	V	217	255	12.92	9.19	22.11	30.00	-7.89

**Table 7-3. EIRP (AWS WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	V	105	258	14.91	9.51	24.42	33.01	-8.59
1880.00	WCDMA1900	V	102	256	16.00	9.90	<b>25.90</b>	33.01	-7.11
1907.60	WCDMA1900	V	102	259	15.05	10.24	25.29	33.01	-7.72
1880.00	WCDMA1900	H	102	167	14.64	9.90	24.54	33.01	-8.47

**Table 7-4. EIRP (PCS WCDMA)**

FCC ID: ZNFT600US	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 43 of 60	

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: ZNFT600US	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		<b>Approved by:</b> Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 44 of 60

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

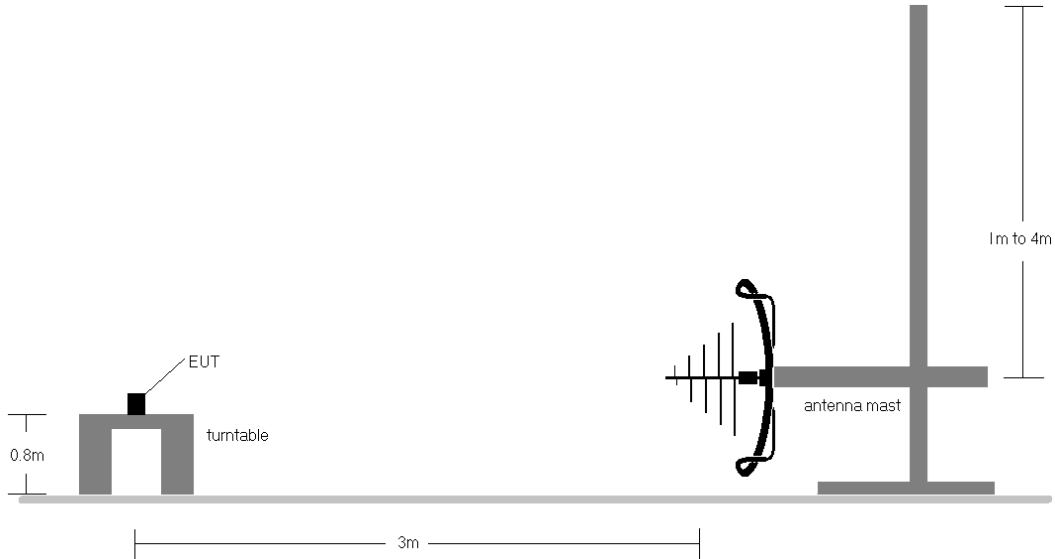

**Figure 7-7. Test Instrument & Measurement Setup < 1GHz**

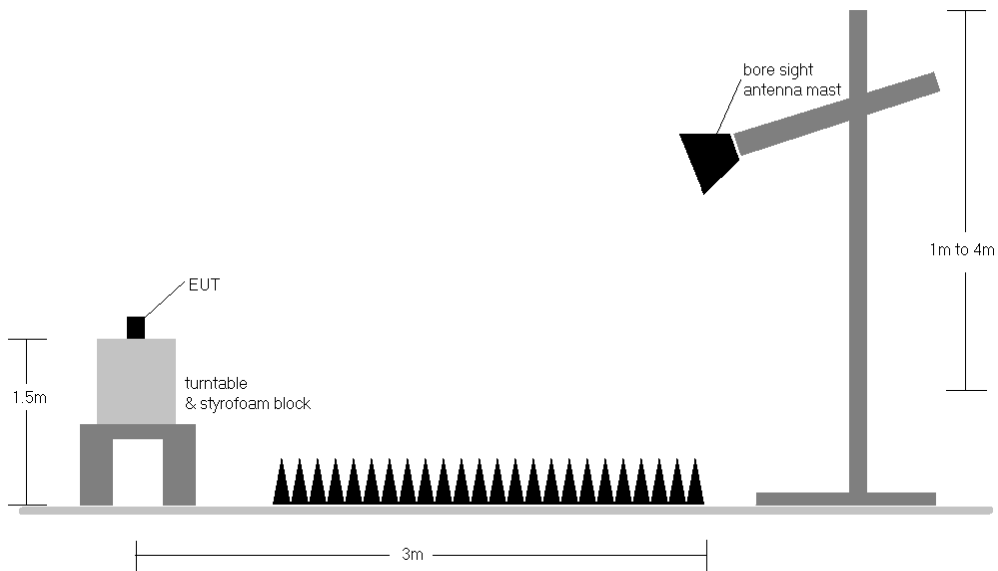

**Figure 7-8. Test Instrument & Measurement Setup >1 GHz**

**Test Notes**


- 1) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 45 of 60

- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

<b>FCC ID:</b> ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 46 of 60	

## Cellular WCDMA Mode

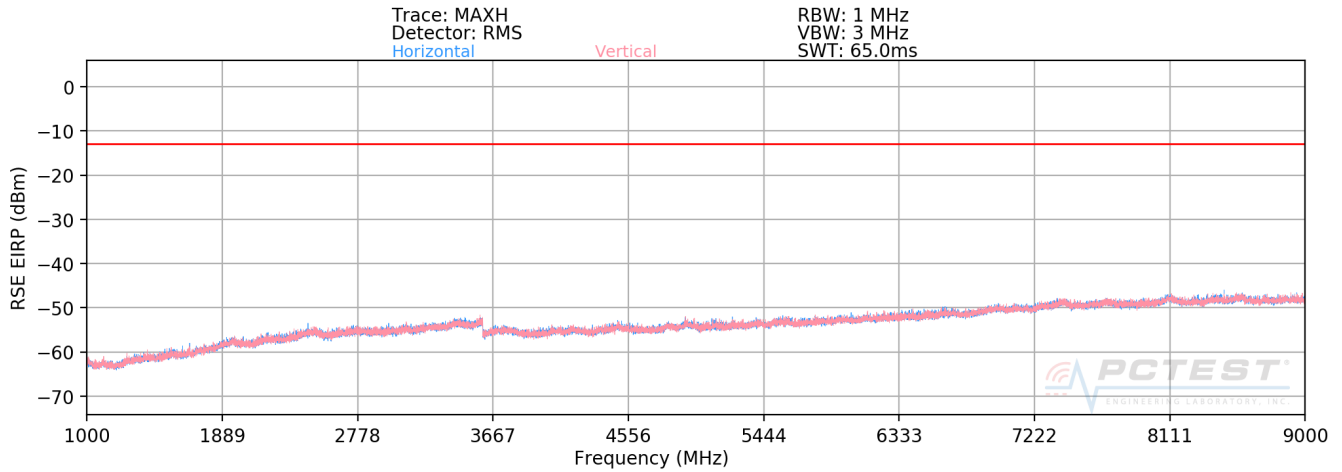

**Plot 7-43. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)**

OPERATING FREQUENCY: 826.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	193	143	-59.53	3.61	-55.92	-42.9
2479.20	H	-	-	-57.92	4.23	-53.69	-40.7
3305.60	H	-	-	-58.20	5.80	-52.40	-39.4

**Table 7-5. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 47 of 60

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	185	154	-59.53	3.62	-55.91	-42.9
2509.80	H	-	-	-58.32	4.34	-53.98	-41.0
3346.40	H	-	-	-58.72	5.92	-52.80	-39.8

**Table 7-6. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

OPERATING FREQUENCY: 846.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	105	123	-60.81	3.63	-57.18	-44.2
2539.80	H	-	-	-57.87	4.52	-53.36	-40.4
3386.40	H	-	-	-58.04	6.10	-51.94	-38.9

**Table 7-7. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 48 of 60



# AWS WCDMA Mode

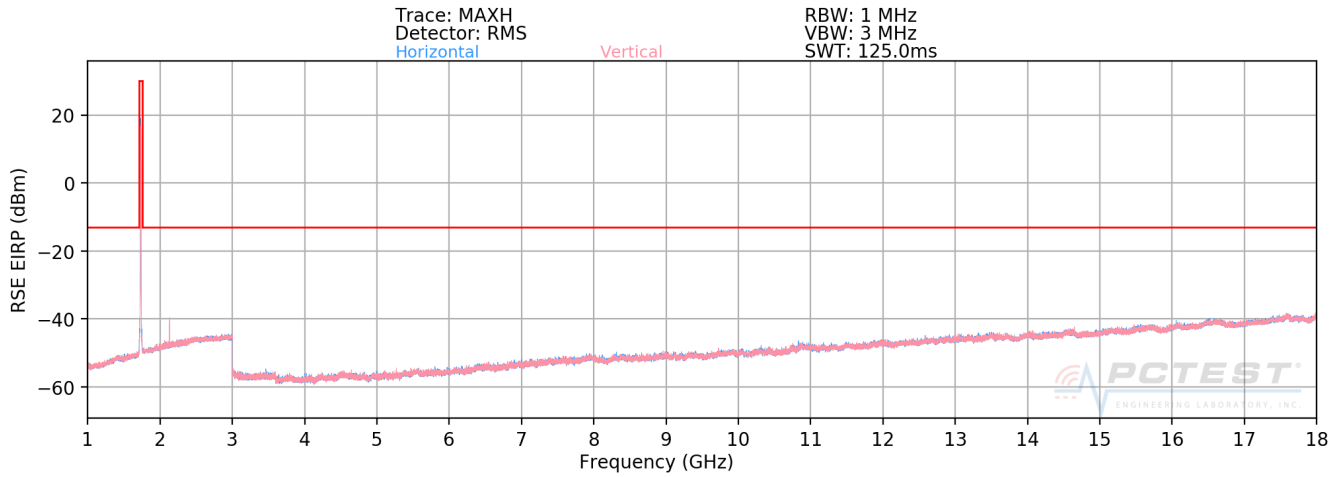

**Plot 7-44. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)**

OPERATING FREQUENCY: 1712.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	v	-	-	-53.19	6.20	-47.00	-34.0
5137.20	v	-	-	-57.76	8.66	-49.10	-36.1

**Table 7-8. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)**

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	v	-	-	-56.36	6.27	-50.10	-37.1
5197.80	v	-	-	-58.17	8.71	-49.46	-36.5

**Table 7-9. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)**

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 49 of 60


OPERATING FREQUENCY: 1752.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	v	-	-	-53.79	6.34	-47.45	-34.5
5257.80	v	-	-	-58.26	8.72	-49.54	-36.5

Table 7-10. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 50 of 60

# PCS WCDMA Mode

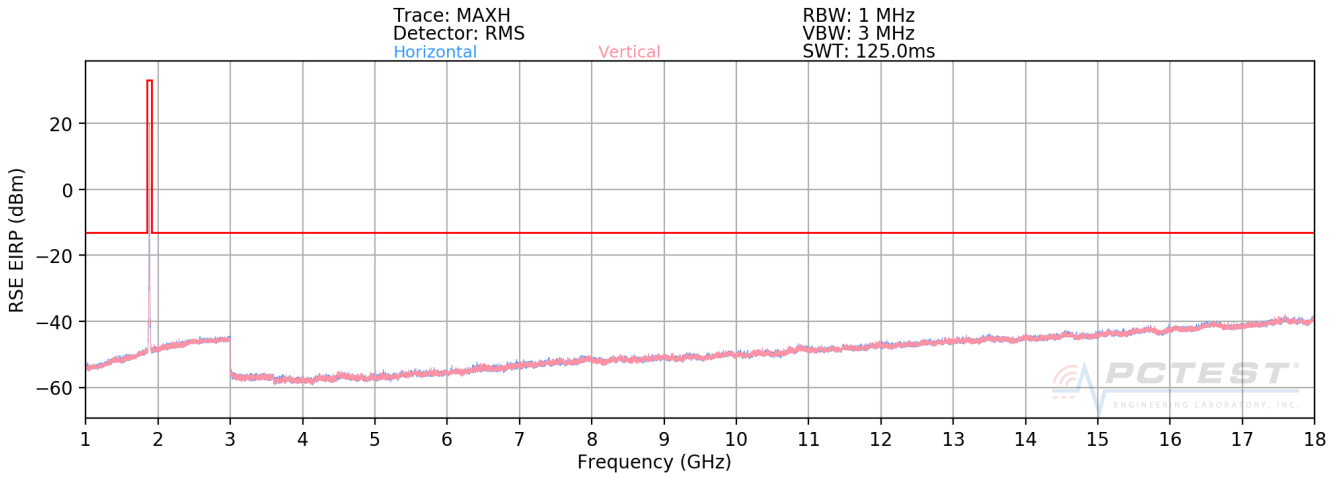

**Plot 7-45. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)**

OPERATING FREQUENCY: 1852.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	-	-	-64.01	6.57	-57.44	-44.4
5557.20	V	-	-	-64.06	8.72	-55.34	-42.3

**Table 7-11. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)**

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	-	-	-64.83	6.67	-58.16	-45.2
5640.00	V	-	-	-67.07	8.81	-58.26	-45.3

**Table 7-12. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

FCC ID: ZNFT600US			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 51 of 60		

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	-	-	-64.57	6.97	-57.60	-44.6
5722.80	V	-	-	-64.52	8.77	-55.75	-42.8

Table 7-13. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 52 of 60

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 53 of 60	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 4183  
 REFERENCE VOLTAGE: 3.98 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.98	- 30	836,599,843	-157	-0.0000188
100 %		- 20	836,600,333	333	0.0000398
100 %		- 10	836,600,438	438	0.0000524
100 %		0	836,599,894	-106	-0.0000127
100 %		+ 10	836,599,682	-318	-0.0000380
100 %		+ 20	836,599,911	-89	-0.0000106
100 %		+ 30	836,599,903	-97	-0.0000116
100 %		+ 40	836,599,821	-179	-0.0000214
100 %		+ 50	836,600,063	63	0.0000075
BATT. ENDPOINT	2.90	+ 20	836,600,092	92	0.0000110

**Table 7-14. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet	Page 54 of 60	

## Frequency Stability / Temperature Variation

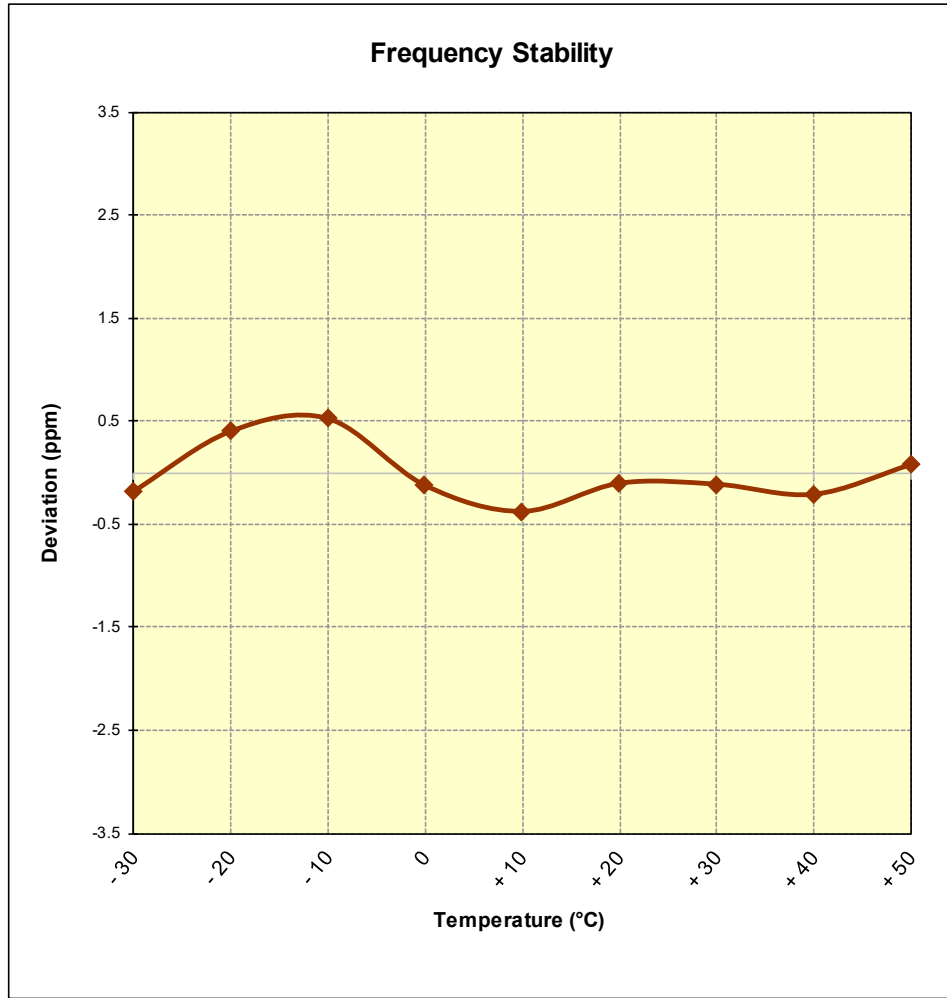


Figure 7-9. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 55 of 60

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,732,600,000 Hz  
 CHANNEL: 1413  
 REFERENCE VOLTAGE: 3.98 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.98	- 30	1,732,599,722	-278	-0.0000160
100 %		- 20	1,732,600,165	165	0.0000095
100 %		- 10	1,732,600,112	112	0.0000065
100 %		0	1,732,600,008	8	0.0000005
100 %		+ 10	1,732,599,723	-277	-0.0000160
100 %		+ 20	1,732,599,944	-56	-0.0000032
100 %		+ 30	1,732,599,904	-96	-0.0000055
100 %		+ 40	1,732,599,983	-17	-0.0000010
100 %		+ 50	1,732,600,037	37	0.0000021
BATT. ENDPOINT	2.90	+ 20	1,732,600,158	158	0.0000091

**Table 7-15. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 56 of 60



## Frequency Stability / Temperature Variation

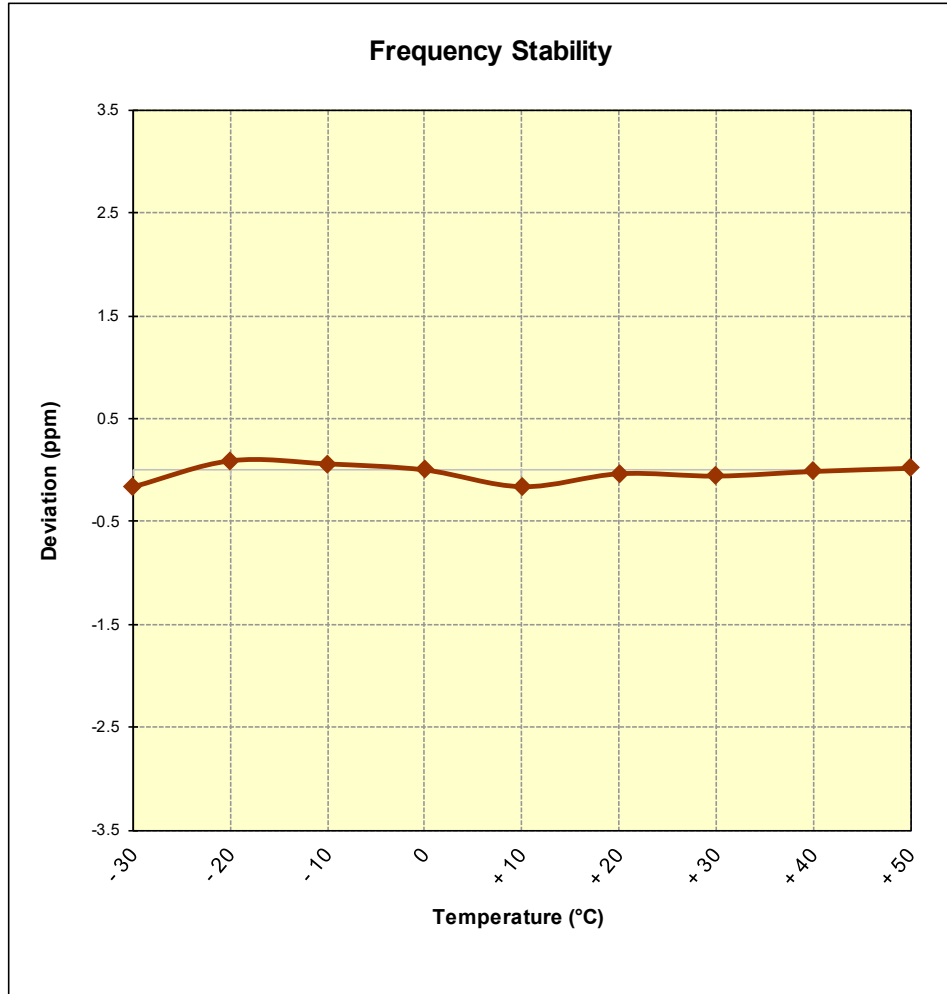


Figure 7-10. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 57 of 60

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 9400  
 REFERENCE VOLTAGE: 3.98 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.98	- 30	1,880,000,073	73	0.0000039
100 %		- 20	1,880,000,091	91	0.0000048
100 %		- 10	1,879,999,856	-144	-0.0000077
100 %		0	1,880,000,123	123	0.0000065
100 %		+ 10	1,880,000,458	458	0.0000244
100 %		+ 20	1,880,000,302	302	0.0000161
100 %		+ 30	1,880,000,083	83	0.0000044
100 %		+ 40	1,880,000,162	162	0.0000086
100 %		+ 50	1,880,000,010	10	0.0000005
BATT. ENDPOINT	2.90	+ 20	1,880,000,114	114	0.0000061

**Table 7-16. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

FCC ID: ZNFT600US		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 58 of 60	

## Frequency Stability / Temperature Variation

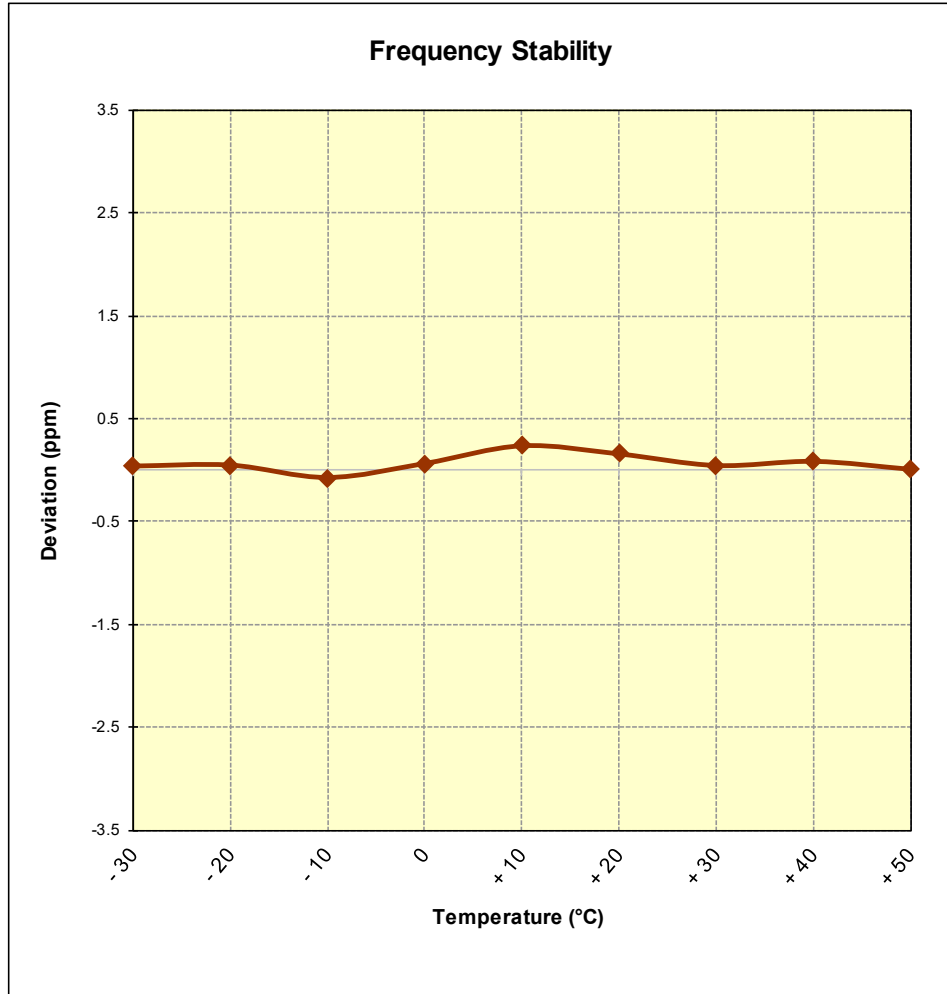


Figure 7-11. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFT600US	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1907050112-02.ZNF	Test Dates: 7/8 - 7/23/2019	EUT Type: Portable Tablet		Page 59 of 60

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Tablet FCC ID: ZNFT600US** complies with all the requirements of Parts 22, 24 & 27 of the FCC Rules.

<b>FCC ID:</b> ZNFT600US		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1907050112-02.ZNF	<b>Test Dates:</b> 7/8 - 7/23/2019	<b>EUT Type:</b> Portable Tablet	Page 60 of 60	