



## SAR EVALUATION REPORT

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.  
 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632  
 United States

**Date of Testing:**  
 04/06/18 - 04/18/18  
**Test Site/Location:**  
 PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
 1M1804040064-01-R1.ZNF

**FCC ID:** ZNFV350A

**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A., INC.

**DUT Type:** Portable Handset  
**Application Type:** Class II Permissive Change  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** LM-V350AWM  
**Additional Model(s):** LMV350AWM, V350AWM, LM-V350AWA, LMV350AWA, V350AWA, LM-V350AWS, LMV350AWS, V350AWS, LM-V350ULA, LMV350ULA, V350ULA, LM-V350ULM, LMV350ULM, V350ULM, LM-V350ULS, LMV350ULS, V350ULS  
**Permissive Change(s):** See FCC Change Document

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body/Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	CDMA/EVDO BC10 (S90S)	817.90 - 823.10 MHz	0.16	0.68	0.73	NA
PCE	CDMA/EVDO BC0 (S22H)	824.70 - 848.31 MHz	0.16	0.73	0.73	NA
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.15	0.50	0.59	NA
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.16	0.76	0.76	NA
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1929.80 MHz	0.15	0.50	0.50	NA
PCE	UMTS 850	825.40 - 846.60 MHz	0.16	0.73	0.73	NA
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.12	0.61	0.61	NA
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.15	0.50	0.60	NA
PCE	LTE Band 12	699.7 - 715.3 MHz	0.12	0.56	0.57	NA
PCE	LTE Band 17	706.5 - 713.5 MHz	NA	NA	NA	NA
PCE	LTE Band 13	779.5 - 784.5 MHz	0.12	0.60	0.60	NA
PCE	LTE Band 14	730.5 - 735.5 MHz	0.12	0.63	0.63	NA
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.16	0.59	0.59	NA
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.13	0.60	0.60	NA
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.14	0.75	0.75	NA
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	NA	NA	NA	NA
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.17	0.50	0.67	NA
PCE	LTE Band 2 (PCS)	1850.7 - 1908.3 MHz	NA	NA	NA	NA
PCE	LTE Band 30	2307.5 - 2312.5 MHz	< 0.1	0.90	1.09	NA
PCE	LTE Band 7	2502.5 - 2567.5 MHz	< 0.1	0.60	0.60	NA
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.51	0.51	NA
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.70	0.31	0.32	NA
NI	U-NI-1	5180 - 5240 MHz	NA	NA	0.35	NA
NI	U-NI-2A	5260 - 5320 MHz	0.91	0.36	NA	1.48
NI	U-NI-2C	5500 - 5720 MHz	0.50	0.68	NA	1.41
NI	U-NI-3	5745 - 5825 MHz	0.49	0.55	0.55	NA
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.28	< 0.1	< 0.1	NA
Simultaneous SAR per KDB 690783 D01v01r03:			1.59	1.57	1.57	2.89

Note: This revised Test Report (S/N: 1M1804040064-01-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez  
 President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 1 of 105

# T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	12
3	INTRODUCTION .....	13
4	DOSIMETRIC ASSESSMENT .....	14
5	DEFINITION OF REFERENCE POINTS.....	15
6	TEST CONFIGURATION POSITIONS.....	16
7	RF EXPOSURE LIMITS .....	19
8	FCC MEASUREMENT PROCEDURES.....	20
9	RF CONDUCTED POWERS .....	28
10	SYSTEM VERIFICATION.....	59
11	SAR DATA SUMMARY .....	63
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	84
13	SAR MEASUREMENT VARIABILITY .....	100
14	EQUIPMENT LIST.....	101
15	MEASUREMENT UNCERTAINTIES.....	102
16	CONCLUSION.....	103
17	REFERENCES .....	104
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	
APPENDIX D:	SAR TISSUE SPECIFICATIONS	
APPENDIX E:	SAR SYSTEM VALIDATION	
APPENDIX F:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX G:	POWER REDUCTION VERIFICATION	
APPENDIX H:	DOWNLINK LTE CA RF CONDUCTED POWERS	

FCC ID: ZNFV350A	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 2 of 105

# 1 DEVICE UNDER TEST

## 1.1 Device Overview



Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
WMC	Data	500 Hz - 4 kHz

## 1.2 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

## 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 3 of 105	

### 1.3.1 Maximum PCE Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.7	33.7	32.7	30.0	28.3	28.0	27.7	26.5	26.2
	Nominal	33.2	33.2	32.2	29.5	27.8	27.5	27.2	26.0	25.7
GSM/GPRS/EDGE 1900	Maximum	30.7	30.7	28.7	27.0	25.5	26.8	26.8	25.2	25.2
	Nominal	30.2	30.2	28.2	26.5	25.0	26.3	26.3	24.7	24.7

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	25.5	25.5	25.5
	Nominal	25.0	25.0	25.0
UMTS Band 4 (1750 MHz)	Maximum	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0
UMTS Band 2 (1900 MHz)	Maximum	24.7	24.7	24.7
	Nominal	24.2	24.2	24.2



Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	25.5
	Nominal	25.0
CDMA/EVDO BC0 (§22H)	Maximum	25.5
	Nominal	25.0
PCS CDMA/EVDO	Maximum	24.7
	Nominal	24.2

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 4 of 105

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	25.5
	Nominal	25.0
LTE Band 17	Maximum	25.5
	Nominal	25.0
LTE Band 13	Maximum	25.5
	Nominal	25.0
LTE Band 14	Maximum	25.5
	Nominal	25.0
LTE Band 26 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 66 (AWS)	Maximum	24.7
	Nominal	24.2
LTE Band 4 (AWS)	Maximum	24.7
	Nominal	24.2
LTE Band 25 (PCS)	Maximum	24.7
	Nominal	24.2
LTE Band 2 (PCS)	Maximum	24.7
	Nominal	24.2
LTE Band 30	Maximum	25.2
	Nominal	24.7
LTE Band 7	Maximum	23.7
	Nominal	23.2
LTE Band 41	Maximum	25.2
	Nominal	24.7

### 1.3.1 Maximum Bluetooth and SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
Channel		1-2	3-9	10-11
IEEE 802.11b (2.4 GHz)	Maximum	19.5		18.5
	Nominal	18.5		17.5
IEEE 802.11g (2.4 GHz)	Maximum	16.0	18.0	17.0
	Nominal	15.0	17.0	16.0
IEEE 802.11n (2.4 GHz)	Maximum	16.5	17.5	16.5
	Nominal	15.5	16.5	15.5
IEEE 802.11ac (2.4 GHz)	Maximum	16.5		
	Nominal	15.5		



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 5 of 105

Mode / Band		Modulated Average - MIMO (dBm)		
		Channel	1-2	3-9
IEEE 802.11b (2.4 GHz)	Maximum		<b>22.5</b>	<b>21.5</b>
	Nominal		<b>21.5</b>	<b>20.5</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>19.0</b>	<b>21.0</b>	<b>20.0</b>
	Nominal	<b>18.0</b>	<b>20.0</b>	<b>19.0</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>19.5</b>	<b>20.5</b>	<b>19.5</b>
	Nominal	<b>18.5</b>	<b>19.5</b>	<b>18.5</b>
IEEE 802.11ac (2.4 GHz)	Maximum		<b>19.5</b>	
	Nominal		<b>18.5</b>	

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	<b>15.0</b>		
	Nominal	<b>14.0</b>		
IEEE 802.11n (5 GHz)	Maximum	<b>15.0</b>	<b>13.0</b>	
	Nominal	<b>14.0</b>	<b>12.0</b>	
IEEE 802.11ac (5 GHz)	Maximum	<b>15.0</b>	<b>13.0</b>	<b>11.0</b>
	Nominal	<b>14.0</b>	<b>12.0</b>	<b>10.0</b>

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	<b>18.0</b>		
	Nominal	<b>17.0</b>		
IEEE 802.11n (5 GHz)	Maximum	<b>18.0</b>	<b>16.0</b>	
	Nominal	<b>17.0</b>	<b>15.0</b>	
IEEE 802.11ac (5 GHz)	Maximum	<b>18.0</b>	<b>16.0</b>	<b>14.0</b>
	Nominal	<b>17.0</b>	<b>15.0</b>	<b>13.0</b>

Mode / Band		Modulated Average (dBm)
Bluetooth (1 Mbps GFSK)	Maximum	<b>13.0</b>
	Nominal	<b>12.0</b>
Bluetooth (2 Mbps DPSK)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth (3 Mbps 8Dpsk)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth LE	Maximum	<b>7.0</b>
	Nominal	<b>6.0</b>



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 6 of 105

### 1.3.1

### Reduced SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	15.5
	Nominal	14.5
IEEE 802.11g (2.4 GHz)	Maximum	15.5
	Nominal	14.5
IEEE 802.11n (2.4 GHz)	Maximum	15.5
	Nominal	14.5
IEEE 802.11ac (2.4 GHz)	Maximum	15.5
	Nominal	14.5

Mode / Band		Modulated Average - MIMO (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	18.5
	Nominal	17.5
IEEE 802.11g (2.4 GHz)	Maximum	18.5
	Nominal	17.5
IEEE 802.11n (2.4 GHz)	Maximum	18.5
	Nominal	17.5
IEEE 802.11ac (2.4 GHz)	Maximum	18.5
	Nominal	17.5

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 7 of 105

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”



**Table 1-1  
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (\$90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (\$22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 14	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 30	Yes	Yes	No	Yes	No	Yes
LTE Band 7	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled U-NII-2A and U-NII-2C operations are disabled.

## 1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 8 of 105	



## 1.6 Simultaneous Transmission Capabilities



According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2  
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
5	1x CDMA voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
6	1x CDMA voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
8	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
9	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
10	GSM voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
11	GSM voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
12	GSM voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	N/A	Yes	
13	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
14	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
15	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
16	UMTS + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
17	UMTS + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
18	UMTS + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
19	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
20	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
21	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
22	LTE + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
23	LTE + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
24	LTE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
25	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
26	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
27	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
28	CDMA/EVDO data + 2.4 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
29	CDMA/EVDO data + 5 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
30	CDMA/EVDO data + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
31	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
32	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
33	GPRS/EDGE + 2.4 GHz Bluetooth	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
34	GPRS/EDGE + 2.4 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
35	GPRS/EDGE + 5 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
36	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered

- Bluetooth cannot transmit simultaneously with WLAN.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, the simultaneous transmission scenarios involving WIFI are listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, therefore U-NII2A and U-NII2C were not evaluated for wireless router conditions.
- This device supports 2x2 MIMO Tx for WLAN. 802.11a/g/n/ac modes support CDD and 802.11n/ac modes additionally support SDM. 802.11b mode supports TDD operations only. Each WLAN antenna can transmit independently or together when operating with MIMO.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 9 of 105	

7. This device supports BT Tethering.
8. This device supports VOLTE.
9. This device supports VOWIFI.

## 1.7 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1 and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for Bluetooth, 2.4 GHz, U-NII-1, and U-NII-3 WLAN operations since wireless router 1g SAR was <1.2 W/kg.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.



This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in downlink only LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. Downlink LTE CA conducted powers are included in Appendix H.

This device supports 64QAM on the downlink for LTE Operations. Conducted powers for 64QAM configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is  $\leq \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg, per Section 5.2.4 of

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 10 of 105	

FCC KDB Publication 941225 D05v02r05.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. Downlink 4x4 MIMO powers are included in Appendix H.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.



This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 41 and LTE Band 5 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

## 1.8 Guidance Applied



- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO)
- Fall 2017 TCB Workshop Notes (LTE Carrier Aggregation)

## 1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 11 of 105	

LTE Information					
<b>FCC ID</b>	ZNFV350A				
<b>Form Factor</b>	Portable Handset				
<b>Frequency Range of each LTE transmission band</b>	LTE Band 12 (699.7 - 715.3 MHz) LTE Band 17 (706.5 - 713.5 MHz) LTE Band 13 (779.5 - 784.5 MHz) LTE Band 14 (790.5 - 795.5 MHz) LTE Band 26 (Cell) (814.7 - 848.3 MHz) LTE Band 5 (Cell) (824.7 - 848.3 MHz) LTE Band 66 (AWS) (1710.7 - 1779.3 MHz) LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) LTE Band 25 (PCS) (1850.7 - 1914.3 MHz) LTE Band 2 (PCS) (1850.7 - 1909.3 MHz) LTE Band 30 (2307.5 - 2312.5 MHz) LTE Band 7 (2502.5 - 2567.5 MHz) LTE Band 41 (2498.5 - 2687.5 MHz)				
<b>Channel Bandwidths</b>	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17: 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 14: 5 MHz, 10 MHz LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 30: 5 MHz, 10 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
<b>Channel Numbers and Frequencies (MHz)</b>	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)		713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)		710 (23790)		711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 14: 5 MHz	790.5 (23305)		793 (23330)		795.5 (23355)
LTE Band 14: 10 MHz	N/A		793 (23330)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (26407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 30: 5 MHz	2307.5 (27685)		2310 (27710)		2312.5 (27735)
LTE Band 30: 10 MHz	N/A		2310 (27710)		N/A
LTE Band 7: 5 MHz	2502.5 (20775)		2535 (21100)		2567.5 (21425)
LTE Band 7: 10 MHz	2505 (20800)		2535 (21100)		2565 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)		2535 (21100)		2562.5 (21375)
LTE Band 7: 20 MHz	2510 (20850)		2535 (21100)		2560 (21350)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
<b>UE Category</b>	12				
<b>UL UE Category</b>	13				
<b>DL UE Category</b>	12				
<b>Modulations Supported in UL</b>	QPSK, 16QAM, 64QAM				
<b>LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)</b>	YES				
<b>A-MPR (Additional MPR) disabled for SAR Testing?</b>	YES				
<b>LTE Carrier Aggregation Possible Combinations</b>	The technical description includes all the possible carrier aggregation combinations				
<b>LTE Additional Information</b>	This device does not support full CA features on 3GPP Release 12. It supports carrier aggregation and downlink MIMO and LAA features as shown in Section 9 and Appendix H. It supports uplink carrier aggregation for LTE CA 41C with a maximum of two 20MHz component carriers and LTE CA 5B with a maximum of two 10MHz component carriers. All other uplink communications are identical to the Release 8 specifications. Uplink Communications are done on the PCC unless otherwise specified. The following LTE Release 12 features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, MDH, eMBMS, Cross-carrier scheduling, Enhanced SC-FDMA.				

<b>FCC ID:</b> ZNFV350A		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 12 of 105	

### 3

## INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 13 of 105	


# 4

## DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





**Figure 4-1** point  
**Sample SAR Area Scan** was

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\***

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid		Graded Grid	
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$		
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 14 of 105	




# 5

## DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

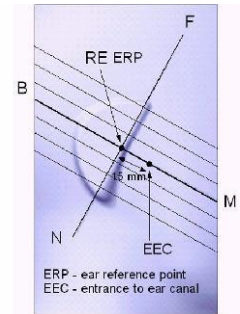


**Figure 5-1**  
Close-Up Side view of ERP

### 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

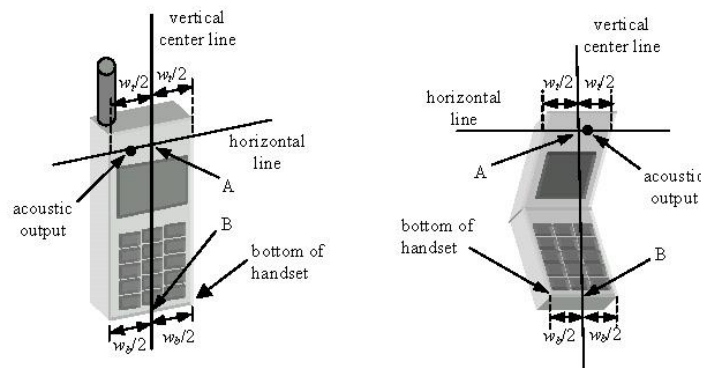

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 15 of 105	

## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

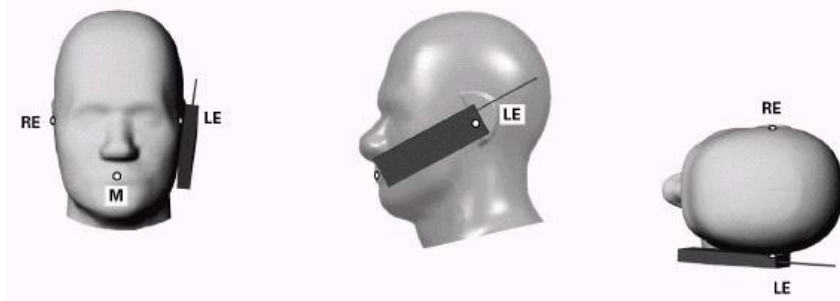




Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).


### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:


1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 16 of 105



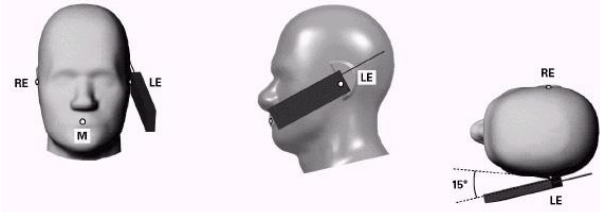

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**


## 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.



## 6.5 Body-Worn Accessory Configurations

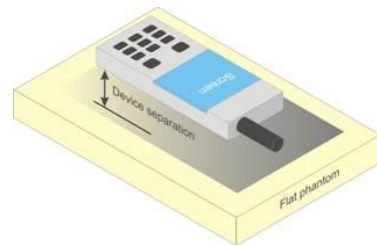Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



**Figure 6-4 Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 17 of 105

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 18 of 105	

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 19 of 105

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

#### 8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 20 of 105

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$\frac{I_{or}}{I_{or}}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$\frac{I_{or}}{I_{or}}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at fullrate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

## 8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

## 8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 21 of 105	



When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

### 8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

### 8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



## 8.5 SAR Measurement Conditions for UMTS

### 8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

### 8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 22 of 105	

primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

### 8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

### 8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

### 8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.6 SAR Measurement Conditions for LTE



LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 23 of 105	

### 8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 24 of 105	



## 8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.7.2 U-NII-1 and U-NII-2A



For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 25 of 105	

### 8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



### 8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.8 Subsequent Test Configuration Procedures



For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 26 of 105

subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 27 of 105

## 9.1 CDMA Conducted Powers

Table 9-1  
Maximum Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	25.30	25.33	25.31	25.29	25.23	25.21	25.39
Cellular	1013	22H	824.7	25.42	25.40	25.33	25.46	25.45	25.39	25.19
	384	22H	836.52	25.43	25.34	25.42	25.39	25.44	25.30	25.47
	777	22H	848.31	25.39	25.30	25.45	25.40	25.28	25.22	25.34
PCS	25	24E	1851.25	24.48	24.68	24.55	24.63	24.39	24.49	24.68
	600	24E	1880	24.59	24.44	24.51	24.64	24.48	24.69	24.52
	1175	24E	1908.75	24.68	24.57	24.53	24.50	24.47	24.46	24.49

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.






Figure 9-1  
Power Measurement Setup

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 28 of 105	

## 9.2 GSM Conducted Powers

**Table 9-2  
Maximum Conducted Power**



Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.41	33.39	<b>32.48</b>	29.99	28.08	27.86	27.58	26.13	25.80
	190	33.46	33.46	<b>32.43</b>	29.88	27.84	27.82	27.53	26.13	25.84
	251	33.49	33.54	<b>32.32</b>	29.65	27.89	27.85	27.57	26.29	25.79
GSM 1900	512	30.42	30.38	28.70	<b>26.88</b>	25.13	26.53	26.30	25.20	24.87
	661	30.40	30.41	28.69	<b>26.75</b>	25.06	26.49	26.26	25.14	24.78
	810	30.39	30.25	28.46	<b>26.61</b>	25.03	26.36	26.18	25.09	24.62

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.38	24.36	<b>26.46</b>	25.73	25.07	18.83	21.56	21.87	22.79
	190	24.43	24.43	<b>26.41</b>	25.62	24.83	18.79	21.51	21.87	22.83
	251	24.46	24.51	<b>26.30</b>	25.39	24.88	18.82	21.55	22.03	22.78
GSM 1900	512	21.39	21.35	22.68	<b>22.62</b>	22.12	17.50	20.28	20.94	21.86
	661	21.37	21.38	22.67	<b>22.49</b>	22.05	17.46	20.24	20.88	21.77
	810	21.36	21.22	22.44	<b>22.35</b>	22.02	17.33	20.16	20.83	21.61

<b>GSM 850</b>	<b>Frame Avg. Targets:</b>	24.17	24.17	<b>26.18</b>	25.24	24.79	18.47	21.18	21.74	22.69
<b>GSM 1900</b>		21.17	21.17	22.18	<b>22.24</b>	21.99	17.27	20.28	20.44	21.69

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 29 of 105

2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 12 (Max 4 Tx uplink slots)**  
**EDGE Multislot class: 12 (Max 4 Tx uplink slots)**  
**DTM Multislot Class: N/A**



**Figure 9-2**  
**Power Measurement Setup**

<b>FCC ID:</b> ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 30 of 105	

### 9.3 UMTS Conducted Powers



**Table 9-3  
Maximum Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.34	25.33	25.29	24.45	24.48	24.46	24.41	24.44	24.46	-
99		12.2 kbps AMR	25.32	25.33	25.31	24.38	24.42	24.49	24.49	24.50	24.46	-
6	HSDPA	Subtest 1	25.32	25.29	25.35	24.32	24.36	24.40	24.57	24.51	24.67	0
6		Subtest 2	25.35	25.31	25.37	24.30	24.32	24.37	24.59	24.48	24.68	0
6		Subtest 3	24.84	24.82	24.88	23.83	23.99	24.00	23.95	23.99	24.12	0.5
6		Subtest 4	24.81	24.89	24.90	23.85	23.82	23.85	23.97	24.02	24.15	0.5
6	HSUPA	Subtest 1	25.24	25.21	25.26	24.30	24.32	24.40	24.52	24.50	24.64	0
6		Subtest 2	23.29	23.31	23.32	22.28	22.36	22.37	22.55	22.58	22.62	2
6		Subtest 3	24.31	24.35	24.37	23.31	23.37	23.35	23.49	23.52	23.58	1
6		Subtest 4	23.37	23.39	23.41	22.25	22.31	22.40	22.51	22.53	22.57	2
6		Subtest 5	25.29	25.22	25.30	24.30	24.33	24.42	24.50	24.50	24.61	0

This device does not support DC-HSDPA.



**Figure 9-3  
Power Measurement Setup**

FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b>			Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 31 of 105

## 9.4 LTE Conducted Powers

### 9.4.1 LTE Band 12



**Table 9-4**  
**LTE Band 12 Conducted Powers - 10 MHz Bandwidth**

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.35	0	0
	1	25	<b>25.50</b>		0
	1	49	25.27		0
	25	0	23.92	0-1	1
	25	12	23.98		1
	25	25	<b>24.06</b>		1
16QAM	50	0	23.98	0-1	1
	1	0	24.35		1
	1	25	24.34		1
	1	49	24.37	0-2	1
	25	0	22.98		2
	25	12	23.07		2
64QAM	25	25	23.07	0-2	2
	50	0	23.06		2
	1	0	23.30		0-2
	1	25	23.30	2	
	1	49	23.28	2	
	64QAM	25	0	21.85	0-3
25		12	21.97	3	
25		25	21.97	3	
50		0	21.92	3	

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 9-5**  
**LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.36	25.20	25.15	0	0	
	1	12	25.16	25.17	25.24		0	
	1	24	25.13	25.14	25.01		0	
	12	0	23.98	23.94	24.07	0-1	1	
	12	6	23.98	23.92	24.07		1	
	12	13	24.05	23.96	24.03		1	
16QAM	25	0	24.09	23.94	24.05	0-1	1	
	1	0	24.42	24.15	24.29		0-1	1
	1	12	24.26	24.18	24.22			1
	1	24	24.38	24.17	24.02	0-2		1
	12	0	23.21	23.00	23.11		2	
	12	6	23.19	23.00	23.10		2	
64QAM	12	13	23.28	22.96	23.07	0-2	2	
	25	0	23.23	22.95	23.13		2	
	1	0	23.33	23.04	23.21		0-2	2
	1	12	23.19	23.16	23.18	2		
	1	24	23.27	23.14	22.90	0-3		2
	12	0	22.13	21.90	22.06		3	
12	6	22.14	21.94	21.97	3			
64QAM	12	13	22.16	21.93	22.01	0-3	3	
	25	0	22.11	21.88	22.12		3	

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 32 of 105





**Table 9-6  
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.28	25.01	25.35	0	0
	1	7	25.19	25.13	25.40		0
	1	14	25.20	24.99	25.16		0
	8	0	23.97	23.92	24.02	0-1	1
	8	4	23.95	23.92	24.02		1
	8	7	23.96	23.91	24.01		1
16QAM	15	0	23.95	23.91	24.03	0-1	1
	1	0	24.36	24.05	24.25		1
	1	7	24.38	24.21	24.31		1
	1	14	24.30	24.07	23.95	0-2	1
	8	0	23.04	22.98	23.02		2
	8	4	22.99	22.99	23.04		2
64QAM	8	7	22.97	22.96	22.99	0-2	2
	15	0	23.00	22.92	23.06		2
	1	0	23.26	23.00	23.21		0-2
	1	7	23.29	23.08	23.25	2	
	1	14	23.21	22.98	22.81	2	
	64QAM	8	0	21.97	21.89	21.88	0-3
8		4	21.94	21.98	21.94	3	
8		7	21.94	21.91	21.98	3	
15		0	22.00	21.79	21.93	3	

**Table 9-7  
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.21	25.15	25.17	0	0	
	1	2	25.19	25.07	25.13		0	
	1	5	25.12	25.14	25.06		0	
	3	0	24.98	24.83	24.84		0	
	3	2	24.95	24.84	24.64		0	
	3	3	24.92	24.80	24.54		0	
16QAM	6	0	23.84	23.85	23.95	0-1	1	
	1	0	24.21	24.05	24.15		0-1	1
	1	2	24.21	24.13	24.18			1
	1	5	24.11	24.03	23.89	1		
	3	0	23.91	23.98	24.01	1		
	3	2	23.88	24.00	23.95	1		
64QAM	3	3	23.84	23.91	23.79	0-2		1
	6	0	22.81	22.82	23.15		2	
	1	0	23.20	22.92	23.12		0-2	2
	1	2	23.20	23.04	23.13	2		
	1	5	23.07	22.94	22.80	2		
	3	0	22.77	22.86	22.88	2		
3	2	22.76	22.88	22.92	2			
3	3	22.77	22.89	22.67	2			
64QAM	6	0	21.69	21.79	22.09	0-3	3	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 33 of 105	

9.4.2

LTE Band 13



**Table 9-8**  
**LTE Band 13 Conducted Powers - 10 MHz Bandwidth**

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.33	0	0
	1	25	25.32		0
	1	49	25.03		0
	25	0	24.32	0-1	1
	25	12	24.29		1
	25	25	23.87		1
16QAM	50	0	24.23	0-1	1
	1	0	24.26		1
	1	25	24.40		1
	1	49	24.22	0-2	1
	25	0	23.33		2
	25	12	23.33		2
64QAM	25	25	23.25	0-2	2
	50	0	23.41		2
	1	0	23.50		0-2
	1	25	23.46	2	
	1	49	23.25	2	
	64QAM	25	0	22.21	0-3
25		12	22.05	3	
25		25	22.26	3	
50		0	22.28	0-3	3
25		0	22.28		3
25		12	22.05		3

**Table 9-9**  
**LTE Band 13 Conducted Powers - 5 MHz Bandwidth**

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.36	0	0
	1	12	25.14		0
	1	24	24.96		0
	12	0	24.44	0-1	1
	12	6	24.33		1
	12	13	24.23		1
16QAM	25	0	24.22	0-1	1
	1	0	24.49		1
	1	12	24.40		1
	1	24	24.25	0-2	1
	12	0	23.41		2
	12	6	23.43		2
64QAM	12	13	23.31	0-2	2
	25	0	23.33		2
	1	0	23.20		0-2
	1	12	23.06	2	
	1	24	23.15	0-3	
	12	0	22.12		3
12	6	22.03	3		
64QAM	12	13	22.06	0-3	3
	25	0	22.00		3
	12	0	22.00		3
	12	6	22.03	3	
	12	13	22.06	3	
	25	0	22.00	3	

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 34 of 105	

9.4.1

LTE Band 14



**Table 9-10**  
**LTE Band 14 Conducted Powers - 10 MHz Bandwidth**

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.21	0	0
	1	25	25.35		0
	1	49	25.22		0
	25	0	24.28	0-1	1
	25	12	24.35		1
	25	25	24.47		1
16QAM	50	0	24.39	0-1	1
	1	0	23.98		1
	1	25	24.02		1
	1	49	24.33	0-2	1
	25	0	23.41		2
	25	12	23.43		2
64QAM	25	25	23.21	0-2	2
	50	0	23.45		2
	1	0	23.10		0-2
	1	25	23.15	2	
	1	49	23.16	2	
	64QAM	25	0	22.15	0-3
25		12	22.11	3	
25		25	22.10	3	
50		0	22.20	3	

**Table 9-11**  
**LTE Band 14 Conducted Powers - 5 MHz Bandwidth**

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.16	0	0
	1	12	25.12		0
	1	24	25.20		0
	12	0	24.32	0-1	1
	12	6	24.30		1
	12	13	24.32		1
16QAM	25	0	24.30	0-1	1
	1	0	24.30		1
	1	12	24.20		1
	1	24	24.13	0-2	1
	12	0	23.50		2
	12	6	23.47		2
64QAM	12	13	23.47	0-2	2
	25	0	23.34		2
	1	0	23.40		0-2
	1	12	23.15	2	
	1	24	23.06	0-3	
	12	0	22.08		3
12	6	22.44	3		
64QAM	12	13	22.45	0-3	3
	25	0	22.16		3

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 35 of 105	

9.4.2

LTE Band 26 (Cell)



Table 9-12  
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.41	0	0
	1	36	25.20		0
	1	74	25.34		0
	36	0	24.34	0-1	1
	36	18	24.30		1
	36	37	24.39		1
	75	0	24.16		1
16QAM	1	0	24.41	0-1	1
	1	36	24.36		1
	1	74	24.42		1
	36	0	23.32	0-2	2
	36	18	23.46		2
	36	37	23.35		2
	75	0	23.44		2
64QAM	1	0	23.32	0-2	2
	1	36	23.22		2
	1	74	23.30		2
	36	0	22.24	0-3	3
	36	18	22.39		3
	36	37	22.35		3
	75	0	22.37		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-13  
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.37	25.33	25.38	0	0	
	1	25	25.44	25.26	25.03		0	0
	1	49	25.39	25.42	24.87		0	0
	25	0	24.34	24.34	24.39	0-1	1	
	25	12	24.35	24.44	24.47		1	
	25	25	24.28	24.44	24.46		1	
	50	0	24.44	24.40	24.42		1	
16QAM	1	0	24.40	24.32	24.38	0-1	1	
	1	25	24.25	24.31	24.44		1	
	1	49	24.49	24.50	24.39		1	
	25	0	23.48	23.40	23.26	0-2	2	
	25	12	23.40	23.45	23.41		2	
	25	25	23.44	23.30	23.40		2	
	50	0	23.45	23.49	23.44		2	
64QAM	1	0	23.31	23.21	23.35	0-2	2	
	1	25	23.20	23.26	23.40		2	
	1	49	23.42	23.44	23.26		2	
	25	0	22.38	22.35	22.14	0-3	3	
	25	12	22.34	22.31	22.37		3	
	25	25	22.41	22.30	22.31		3	
	50	0	22.38	22.44	22.44		3	



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 36 of 105

**Table 9-14**  
**LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.38	25.35	25.30	0	0	
	1	12	25.39	25.43	25.32		0	
	1	24	25.42	25.34	25.15		0	
	16QAM	12	0	24.40	24.42	24.47	0-1	1
		12	6	24.50	24.30	24.48		1
		12	13	24.29	24.39	24.34		1
		25	0	24.40	24.30	24.25		1
64QAM	1	0	24.39	24.21	24.35	0-1	1	
	1	12	24.43	24.38	24.46		1	
	1	24	24.40	24.42	24.21		1	
	16QAM	12	0	23.42	23.31	23.41	0-2	2
		12	6	23.32	23.44	23.41		2
		12	13	23.45	23.31	23.42		2
		25	0	23.36	23.43	23.46		2
64QAM	1	0	23.39	23.10	23.32	0-2	2	
	1	12	23.30	23.28	23.43		2	
	1	24	23.30	23.33	23.16		2	
	16QAM	12	0	22.32	22.30	22.31	0-3	3
		12	6	22.31	22.40	22.32		3
		12	13	22.34	22.20	22.29		3
		25	0	22.30	22.32	22.34		3



**Table 9-15**  
**LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.31	25.15	25.35	0	0	
	1	7	25.40	25.44	25.41		0	
	1	14	25.38	25.34	25.13		0	
	16QAM	8	0	24.49	24.40	24.50	0-1	1
		8	4	24.40	24.34	24.47		1
		8	7	24.35	24.44	24.28		1
		15	0	24.50	24.34	24.45		1
64QAM	1	0	24.32	24.30	24.38	0-1	1	
	1	7	24.44	24.41	24.30		1	
	1	14	24.34	24.46	24.38		1	
	16QAM	8	0	23.32	23.27	23.45	0-2	2
		8	4	23.40	23.43	23.46		2
		8	7	23.36	23.43	23.37		2
64QAM	15	0	23.40	23.43	23.47	0-2	2	
	1	0	23.23	23.23	23.32		0-3	2
	1	7	23.33	23.35	23.26			2
	1	14	23.21	23.42	23.30	0-3		2
	8	0	22.19	22.16	22.34		3	
	8	4	22.27	22.36	22.38		3	
16QAM	8	7	22.35	22.32	22.34	0-3	3	
	15	0	22.26	22.36	22.45		3	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 37 of 105

**Table 9-16**  
**LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.25	25.42	25.34	0	0
	1	2	25.34	25.44	25.15		0
	1	5	25.27	25.37	25.11		0
	3	0	25.30	25.37	25.14		0
	3	2	25.27	25.27	25.18		0
	3	3	25.33	25.31	25.18		0
16QAM	6	0	24.42	24.42	24.20	0-1	1
	1	0	24.36	24.48	24.42	0-1	1
	1	2	24.27	24.40	24.37		1
	1	5	24.40	24.30	24.40		1
	3	0	24.44	24.33	24.34		1
	3	2	24.31	24.30	24.23		1
3	3	24.43	24.38	24.13	1		
64QAM	6	0	23.31	23.20	23.23	0-2	2
	1	0	23.28	23.44	23.34	0-2	2
	1	2	23.27	23.40	23.30		2
	1	5	23.26	23.22	23.38		2
	3	0	23.32	23.20	23.34		2
	3	2	23.25	23.28	23.14		2
3	3	23.43	23.35	22.99	2		
	6	0	22.23	22.18	22.21	0-3	3

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 38 of 105

9.4.1

LTE Band 5 (Cell)



Table 9-17  
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz) Conducted Power [dBm]		
QPSK	1	0	25.40	0	0
	1	25	25.30		0
	1	49	25.30		0
	25	0	24.36	0-1	1
	25	12	24.46		1
	25	25	24.39		1
16QAM	50	0	24.20	0-1	1
	1	0	24.42		1
	1	25	24.48		1
	1	49	24.31	0-2	1
	25	0	23.41		2
	25	12	23.48		2
64QAM	25	25	23.48	0-2	2
	50	0	23.45		2
	1	0	23.41		0-3
	1	25	23.40	2	
	1	49	23.29	2	
		25	0	22.38	0-3
	25	12	22.38	3	
	25	25	22.39	3	
	50	0	22.32		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-18  
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20425 (826.5 MHz) Conducted Power [dBm]	20525 (836.5 MHz)	20625 (846.5 MHz)			
QPSK	1	0	25.42	25.38	25.34	0	0	
	1	12	25.37	25.42	25.07		0	
	1	24	25.40	25.42	24.96		0	
	12	0	24.40	24.32	24.46	0-1	1	
	12	6	24.39	24.46	24.38		1	
	12	13	24.33	24.41	24.34		1	
16QAM	25	0	24.35	24.47	24.40	0-1	1	
	1	0	24.32	24.22	24.31		0-2	1
	1	12	24.37	24.48	24.44			1
	1	24	24.42	24.47	24.44	1		
	12	0	23.48	23.36	23.29	0-2	2	
	12	6	23.42	23.46	23.47		2	
12	13	23.41	23.44	23.49	2			
64QAM	25	0	23.41	23.46	23.45	0-2	2	
	1	0	23.26	23.17	23.17		0-3	2
	1	12	23.25	23.44	23.38			2
	1	24	23.35	23.42	23.35	0-3		2
	12	0	22.42	22.25	22.29		3	
	12	6	22.31	22.34	22.35		3	
	12	13	22.41	22.43	22.43	0-3	3	
	25	0	22.39	22.36	22.33		3	



FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b>			Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 39 of 105	

**Table 9-19  
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.37	25.24	25.24	0	0
	1	7	25.38	25.38	25.33		0
	1	14	25.28	25.29	25.05		0
	8	0	24.37	24.32	24.42	0-1	1
	8	4	24.41	24.45	24.41		1
	8	7	24.36	24.39	24.31		1
16QAM	15	0	24.37	24.41	24.32	0-1	1
	1	0	24.36	24.48	24.37		1
	1	7	24.44	24.37	24.39		1
	1	14	24.36	24.44	24.39	0-2	1
	8	0	23.37	23.40	23.40		2
	8	4	23.38	23.35	23.42		2
64QAM	8	7	23.35	23.49	23.34	0-2	2
	15	0	23.34	23.43	23.43		2
	1	0	23.23	23.39	23.31		0-3
	1	7	23.33	23.26	23.25	2	
	1	14	23.31	23.34	23.34	2	
	8	0	22.36	22.38	22.35	0-3	3
8	4	22.36	22.22	22.37	3		
8	7	22.31	22.36	22.32	3		
	15	0	22.28	22.35	22.35		3

**Table 9-20  
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.24	25.33	25.18	0	0
	1	2	25.29	25.37	25.12		0
	1	5	25.24	25.28	24.95		0
	3	0	25.28	25.34	25.11		0
	3	2	25.33	25.35	25.11		0
	3	3	25.28	25.30	25.04	0	
16QAM	6	0	24.30	24.36	24.22	0-1	1
	1	0	24.44	24.41	24.40	0-1	1
	1	2	24.32	24.49	24.43		1
	1	5	24.50	24.31	24.47		1
	3	0	24.42	24.43	24.26		1
	3	2	24.46	24.46	24.24		1
64QAM	3	3	24.42	24.41	24.18	0-2	1
	6	0	23.28	23.49	23.24		2
	1	0	23.31	23.29	23.40		0-2
	1	2	23.31	23.41	23.37	2	
	1	5	23.45	23.29	23.34	2	
	3	0	23.39	23.35	23.13	2	
3	2	23.43	23.37	23.16	2		
	3	3	23.30	23.36	23.08	0-3	2
	6	0	22.15	22.41	22.16		3

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 40 of 105



9.4.2



LTE Band 66 (AWS)

Table 9-21  
LTE Band 66 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.02	24.56	24.70	0	0
	1	50	23.94	24.54	24.52		0
	1	99	24.28	24.60	24.45		0
	50	0	23.20	23.57	23.58	0-1	1
	50	25	23.16	23.57	23.60		1
	50	50	23.23	23.41	23.59		1
	100	0	23.22	23.43	23.58		1
16QAM	1	0	23.11	23.55	23.69	0-1	1
	1	50	23.10	23.42	23.58		1
	1	99	23.30	23.63	23.62		1
	50	0	22.03	22.62	22.63	0-2	2
	50	25	22.12	22.63	22.65		2
	50	50	22.22	22.53	22.61		2
	100	0	22.19	22.56	22.63		2
64QAM	1	0	22.00	22.46	22.63	0-2	2
	1	50	21.97	22.38	22.51		2
	1	99	22.22	22.50	22.53		2
	50	0	20.93	21.60	21.54	0-3	3
	50	25	21.03	21.55	21.59		3
	50	50	21.14	21.47	21.53		3
	100	0	21.18	21.44	21.56		3

Table 9-22  
LTE Band 66 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.04	24.61	24.40	0	0
	1	36	23.94	24.65	24.43		0
	1	74	24.26	24.61	24.62		0
	36	0	23.11	23.60	23.46	0-1	1
	36	18	23.03	23.50	23.64		1
	36	37	23.22	23.38	23.58		1
	75	0	23.18	23.51	23.54		1
16QAM	1	0	23.06	23.58	23.64	0-1	1
	1	36	23.01	23.46	23.57		1
	1	74	23.24	23.56	23.58		1
	36	0	21.95	22.61	22.64	0-2	2
	36	18	22.07	22.69	22.70		2
	36	37	22.17	22.45	22.68		2
	75	0	22.23	22.56	22.62		2
64QAM	1	0	22.00	22.52	22.56	0-2	2
	1	36	22.00	22.32	22.48		2
	1	74	22.18	22.46	22.49		2
	36	0	20.82	21.55	21.53	0-3	3
	36	18	20.95	21.57	21.65		3
	36	37	21.04	21.37	21.62		3
	75	0	21.12	21.43	21.57		3



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 41 of 105

**Table 9-23**  
**LTE Band 66 (AWS) Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.92	24.45	24.49	0	0	
	1	25	23.93	24.51	24.58		0	
	1	49	24.36	24.59	24.59		0	
	QPSK	25	0	23.15	23.52	23.55	0-1	1
		25	12	23.16	23.57	23.59		1
		25	25	23.21	23.40	23.51		1
		50	0	23.26	23.45	23.51		1
16QAM	1	0	23.02	23.51	23.60	0-1	1	
	1	25	23.09	23.36	23.62		1	
	1	49	23.28	23.60	23.68		1	
	16QAM	25	0	22.05	22.58	22.52	0-2	2
		25	12	22.04	22.67	22.57		2
		25	25	22.26	22.55	22.65		2
		50	0	22.25	22.58	22.63		2
64QAM	1	0	21.90	22.42	22.47	0-2	2	
	1	25	21.99	22.30	22.55		2	
	1	49	22.27	22.60	22.64		2	
	64QAM	25	0	21.03	21.57	21.39	0-3	3
		25	12	20.98	21.59	21.53		3
		25	25	21.18	21.46	21.60		3
		50	0	21.23	21.45	21.60		3

**Table 9-24**  
**LTE Band 66 (AWS) Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.04	24.53	24.40	0	0	
	1	12	23.86	24.47	24.54		0	
	1	24	24.29	24.58	24.56		0	
	QPSK	12	0	23.27	23.53	23.59	0-1	1
		12	6	23.08	23.59	23.54		1
		12	13	23.27	23.42	23.55		1
		25	0	23.24	23.50	23.66		1
16QAM	1	0	23.08	23.47	23.59	0-1	1	
	1	12	23.15	23.38	23.57		1	
	1	24	23.35	23.65	23.65		1	
	16QAM	12	0	22.05	22.56	22.67	0-2	2
		12	6	22.22	22.66	22.56		2
		12	13	22.28	22.57	22.70		2
		25	0	22.19	22.45	22.66		2
64QAM	1	0	21.96	22.46	22.54	0-2	2	
	1	12	22.05	22.29	22.51		2	
	1	24	22.29	22.62	22.63		2	
	64QAM	12	0	20.97	21.48	21.63	0-3	3
		12	6	21.22	21.62	21.50		3
		12	13	21.27	21.54	21.63		3
		25	0	21.19	21.42	21.61		3



FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 42 of 105

**Table 9-25  
LTE Band 66 (AWS) Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.02	24.56	24.38	0	0
	1	7	23.98	24.60	24.55		0
	1	14	24.20	24.51	24.59		0
	8	0	23.24	23.68	23.59	0-1	1
	8	4	23.15	23.62	23.60		1
	8	7	23.27	23.43	23.56		1
	15	0	23.32	23.42	23.58		1
16QAM	1	0	23.06	23.49	23.70	0-1	1
	1	7	23.12	23.43	23.66		1
	1	14	23.28	23.63	23.55		1
	8	0	22.04	22.61	22.66	0-2	2
	8	4	22.20	22.56	22.63		2
	8	7	22.16	22.53	22.54		2
	15	0	22.09	22.62	22.66		2
64QAM	1	0	21.93	22.47	22.67	0-2	2
	1	7	22.10	22.32	22.63		2
	1	14	22.26	22.52	22.41		2
	8	0	20.93	21.56	21.61	0-3	3
	8	4	21.20	21.49	21.58		3
	8	7	21.05	21.48	21.53		3
	15	0	20.95	21.52	21.58		3

**Table 9-26  
LTE Band 66 (AWS) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.90	24.56	24.43	0	0
	1	2	23.86	24.63	24.49		0
	1	5	24.21	24.52	24.56		0
	3	0	23.95	24.53	24.33		0
	3	2	23.85	24.62	24.49		0
	3	3	24.27	24.59	24.47		0
	6	0	23.25	23.32	23.62	0-1	1
16QAM	1	0	23.12	23.44	23.65	0-1	1
	1	2	23.11	23.53	23.69		1
	1	5	23.20	23.65	23.47		1
	3	0	23.11	23.31	23.62		1
	3	2	23.16	23.47	23.69		1
	3	3	23.24	23.70	23.36		1
64QAM	6	0	22.00	22.65	22.69	0-2	2
	1	0	21.98	22.43	22.59	0-2	2
	1	2	22.06	22.46	22.63		2
	1	5	22.20	22.65	22.41		2
	3	0	21.98	22.22	22.49		2
	3	2	22.07	22.42	22.57		2
	3	3	22.13	22.68	22.31		2
6	0	20.91	21.57	21.59	0-3	3	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 43 of 105

9.4.3



LTE Band 25 (PCS)

Table 9-27  
LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.31	24.31	24.70	0	0
	1	50	24.06	24.40	24.65		0
	1	99	24.22	24.23	24.24		0
	50	0	23.28	23.54	23.56	0-1	1
	50	25	23.13	23.28	23.67		1
	50	50	23.29	23.17	23.66		1
	100	0	23.29	23.28	23.66		1
16QAM	1	0	23.63	23.68	23.51	0-1	1
	1	50	23.39	23.49	23.66		1
	1	99	23.53	23.67	23.66		1
	50	0	22.36	22.59	22.67	0-2	2
	50	25	22.14	22.29	22.55		2
	50	50	22.30	22.18	22.66		2
	100	0	22.29	22.32	22.53		2
64QAM	1	0	22.54	22.54	22.45	0-2	2
	1	50	22.28	22.46	22.55		2
	1	99	22.52	22.67	22.55		2
	50	0	21.22	21.51	21.58	0-3	3
	50	25	21.10	21.26	21.49		3
	50	50	21.23	21.06	21.59		3
	100	0	21.17	21.24	21.51		3

Table 9-28  
LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.47	24.43	24.66	0	0
	1	36	24.18	23.98	24.61		0
	1	74	24.26	24.16	24.22		0
	36	0	23.34	23.45	23.63	0-1	1
	36	18	23.19	23.24	23.69		1
	36	37	23.01	23.16	23.52		1
	75	0	23.16	23.22	23.64		1
16QAM	1	0	23.56	23.64	23.54	0-1	1
	1	36	23.50	23.31	23.59		1
	1	74	23.64	23.44	23.54		1
	36	0	22.41	22.38	22.64	0-2	2
	36	18	22.37	22.18	22.51		2
	36	37	22.23	22.05	22.52		2
	75	0	22.36	22.24	22.41		2
64QAM	1	0	22.53	22.53	22.50	0-2	2
	1	36	22.39	22.29	22.50		2
	1	74	22.50	22.38	22.49		2
	36	0	21.40	21.37	21.60	0-3	3
	36	18	21.36	21.15	21.38		3
	36	37	21.15	20.92	21.47		3
	75	0	21.25	21.22	21.32		3



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 44 of 105

**Table 9-29**  
**LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.64	24.37	24.55	0	0
	1	25	24.34	24.01	24.67		0
	1	49	24.30	24.18	24.21		0
	25	0	23.45	23.33	23.62	0-1	1
	25	12	23.41	23.15	23.53		1
	25	25	23.42	23.06	23.66		1
16QAM	1	0	23.57	23.57	23.53	0-1	1
	1	25	23.61	23.37	23.56		1
	1	49	23.54	23.53	23.58		1
	25	0	22.37	22.37	22.68	0-2	2
	25	12	22.35	22.36	22.65		2
	25	25	22.38	22.14	22.54		2
64QAM	1	0	22.55	22.51	22.44	0-2	2
	1	25	22.49	22.29	22.51		2
	1	49	22.46	22.44	22.54		2
	25	0	21.23	21.24	21.65	0-3	3
	25	12	21.27	21.27	21.63		3
	25	25	21.31	21.02	21.54		3
	50	0	21.33	21.22	21.62		3

**Table 9-30**  
**LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.32	24.21	24.65	0	0
	1	12	24.24	24.07	24.69		0
	1	24	24.23	24.06	24.22		0
	12	0	23.41	23.25	23.68	0-1	1
	12	6	23.37	23.19	23.70		1
	12	13	23.37	23.10	23.50		1
16QAM	1	0	23.37	23.16	23.68	0-1	1
	1	12	23.64	23.54	23.57		1
	1	24	23.65	23.51	23.57		1
	12	0	22.44	22.37	22.64	0-2	2
	12	6	22.52	22.24	22.63		2
	12	13	22.52	22.17	22.58		2
64QAM	1	0	22.41	22.15	22.62	0-2	2
	1	12	22.53	22.45	22.55		2
	1	24	22.62	22.43	22.57		2
	12	0	22.61	22.36	22.45	0-3	2
	12	6	21.30	21.28	21.63		3
	12	13	21.49	21.19	21.51		3
	25	0	21.45	21.08	21.58		3
	25	0	21.37	21.08	21.52		3



FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 45 of 105

**Table 9-31**  
**LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.34	24.11	24.67	0	0
	1	7	24.44	24.11	24.37		0
	1	14	24.31	23.98	24.12		0
	8	0	23.37	23.18	23.52	0-1	1
	8	4	23.40	23.17	23.47		1
	8	7	23.36	23.13	23.38		1
16QAM	15	0	23.38	23.18	23.43	0-1	1
	1	0	23.55	23.42	23.53		1
	1	7	23.66	23.54	23.68		1
	1	14	23.65	23.34	23.46	0-2	1
	8	0	22.32	22.29	22.52		2
	8	4	22.32	22.25	22.51		2
64QAM	8	7	22.40	22.18	22.40	0-2	2
	15	0	22.37	22.17	22.51		2
	1	0	22.54	22.42	22.42		0-2
	1	7	22.56	22.45	22.57	2	
	1	14	22.61	22.23	22.37	2	
	8	0	21.31	21.20	21.46	0-3	3
8	4	21.25	21.15	21.43	3		
8	7	21.36	21.09	21.34	3		
	15	0	21.26	21.13	21.45		3

**Table 9-32**  
**LTE Band 25 (PCS) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.26	24.18	24.20	0	0
	1	2	24.32	24.24	24.18		0
	1	5	24.28	24.16	24.09		0
	3	0	24.29	24.15	24.12		0
	3	2	24.36	24.19	24.13		0
	3	3	24.29	24.13	24.09		0
16QAM	6	0	23.28	23.16	23.26	0-1	1
	1	0	23.69	23.43	23.49	0-1	1
	1	2	23.59	23.55	23.52		1
	1	5	23.69	23.42	23.41		1
	3	0	23.32	23.31	23.27		1
	3	2	23.39	23.36	23.37		1
3	3	23.35	23.21	23.30	1		
64QAM	6	0	22.28	22.08	22.45	0-2	2
	1	0	22.62	22.34	22.42	0-2	2
	1	2	22.49	22.52	22.48		2
	1	5	22.60	22.41	22.32		2
	3	0	22.30	22.17	22.19		2
	3	2	22.25	22.33	22.28		2
3	3	22.26	22.20	22.22	2		
	6	0	21.23	21.00	21.40	0-3	3

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 46 of 105

9.4.1

LTE Band 30



**Table 9-33**  
**LTE Band 30 Conducted Powers - 10 MHz Bandwidth**

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.90	0	0
	1	25	25.06		0
	1	49	24.93		0
	25	0	23.80	0-1	1
	25	12	23.79		1
	25	25	23.76		1
16QAM	50	0	23.77	0-1	1
	1	0	24.15		1
	1	25	24.16		1
	1	49	24.16	0-2	1
	25	0	22.85		2
	25	12	22.82		2
64QAM	25	25	22.82	0-2	2
	50	0	22.86		2
	1	0	22.55		0-2
	1	25	22.78	2	
	1	49	22.69	2	
	64QAM	25	0	21.66	0-3
25		12	21.79	3	
25		25	21.77	3	
50		0	21.70	3	

**Table 9-34**  
**LTE Band 30 Conducted Powers - 5 MHz Bandwidth**

LTE Band 30 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			27710 (2310.0 MHz)			
			Conducted Power [dBm]			
QPSK	1	0	24.68	0	0	
	1	12	24.64		0	
	1	24	24.66		0	
	12	0	23.78	0-1	1	
	12	6	23.77		1	
	12	13	23.76		1	
16QAM	25	0	23.75	0-1	1	
	1	0	24.08		0-1	1
	1	12	24.02			1
	1	24	24.08	0-2		1
	12	0	22.92		2	
	12	6	22.94		2	
64QAM	12	13	22.88	0-2	2	
	25	0	22.77		2	
	1	0	22.72		0-2	2
	1	12	22.80	2		
	1	24	22.62	0-3		2
	12	0	21.68		3	
12	6	21.66	3			
64QAM	12	13	21.89	0-3	3	
	25	0	21.78		3	

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 47 of 105



9.4.1



LTE Band 7

Table 9-35  
LTE Band 7 Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.58	23.42	23.08	0	0	
	1	50	23.43	23.70	23.48		0	
	1	99	23.45	23.42	23.31		0	
	50	0	22.54	22.47	22.29	0-1	1	
	50	25	22.46	22.41	22.24		1	
	50	50	22.39	22.28	22.23		1	
16QAM	100	0	22.42	22.39	22.27	0-1	1	
	1	0	22.64	22.64	22.69		0-1	1
	1	50	22.61	22.57	22.57			1
	1	99	22.70	22.51	22.59	0-2		1
	50	0	21.53	21.49	21.37		2	
	50	25	21.43	21.41	21.32		2	
64QAM	50	50	21.41	21.32	21.26	0-2	2	
	100	0	21.48	21.40	21.28		2	
	1	0	21.62	21.63	21.60		0-2	2
	1	50	21.50	21.51	21.55	2		
	1	99	21.60	21.39	21.48	0-3		2
	50	0	20.43	20.37	20.28		3	
50	25	20.36	20.30	20.19	3			
64QAM	50	50	20.40	20.25	20.13	0-3	3	
	100	0	20.48	20.28	20.22		3	

Table 9-36  
LTE Band 7 Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.62	23.49	23.45	0	0	
	1	36	23.52	23.25	23.34		0	
	1	74	23.42	23.16	23.20		0	
	36	0	22.52	22.33	22.25	0-1	1	
	36	18	22.50	22.40	22.26		1	
	36	37	22.40	22.30	22.20		1	
16QAM	75	0	22.47	22.38	22.22	0-1	1	
	1	0	22.69	22.61	22.65		0-1	1
	1	36	22.65	22.58	22.49			1
	1	74	22.54	22.55	22.49	0-2		1
	36	0	21.54	21.34	21.27		2	
	36	18	21.54	21.40	21.25		2	
64QAM	36	37	21.49	21.31	21.20	0-2	2	
	75	0	21.47	21.39	21.27		2	
	1	0	21.57	21.59	21.55		0-2	2
	1	36	21.58	21.50	21.44	2		
	1	74	21.40	21.52	21.47	2		
	64QAM	36	0	20.50	20.24	20.17	0-3	3
36		18	20.51	20.37	20.23	3		
36		37	20.46	20.27	20.08	3		
75		0	20.40	20.33	20.19	3		



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 48 of 105

**Table 9-37**  
**LTE Band 7 Conducted Powers - 10 MHz Bandwidth**

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.45	23.39	23.27	0	0
	1	25	23.42	23.36	23.21		0
	1	49	23.35	23.28	23.16		0
	25	0	22.46	22.32	22.16	0-1	1
	25	12	22.51	22.42	22.28		1
	25	25	22.46	22.33	22.24		1
16QAM	1	0	22.62	22.67	22.69	0-1	1
	1	25	22.55	22.68	22.58		1
	1	49	22.61	22.57	22.61		1
	25	0	21.55	21.37	21.31	0-2	2
	25	12	21.50	21.43	21.29		2
	25	25	21.49	21.36	21.28		2
64QAM	1	0	21.59	21.64	21.56	0-2	2
	1	25	21.50	21.55	21.49		2
	1	49	21.58	21.56	21.51		2
	25	0	20.50	20.29	20.25	0-3	3
	25	12	20.45	20.42	20.22		3
	25	25	20.37	20.29	20.25		3
	50	0	20.42	20.42	20.15		3

**Table 9-38**  
**LTE Band 7 Conducted Powers - 5 MHz Bandwidth**

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.50	23.34	23.12	0	0
	1	12	23.47	23.34	23.10		0
	1	24	23.45	23.30	23.10		0
	12	0	22.43	22.33	22.24	0-1	1
	12	6	22.49	22.38	22.23		1
	12	13	22.46	22.31	22.17		1
16QAM	1	0	22.66	22.57	22.52	0-1	1
	1	12	22.63	22.60	22.50		1
	1	24	22.53	22.58	22.49		1
	12	0	21.51	21.40	21.33	0-2	2
	12	6	21.54	21.42	21.34		2
	12	13	21.51	21.35	21.32		2
64QAM	1	0	21.46	21.39	21.21	0-2	2
	1	12	21.56	21.44	21.43		2
	1	24	21.52	21.51	21.50		2
	12	0	20.50	20.32	20.26	0-3	3
	12	6	20.48	20.34	20.34		3
	12	13	20.37	20.27	20.19		3
	25	0	20.44	20.33	20.08		3

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 49 of 105

9.4.2



LTE Band 41

Table 9-39  
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.10	25.18	25.03	25.06	24.80	0	0
	1	50	25.03	25.04	25.07	25.01	25.08		0
	1	99	25.06	25.00	25.11	24.62	24.66		0
	50	0	24.03	23.99	24.01	23.83	23.98	0-1	1
	50	25	24.04	23.96	23.98	23.89	23.83		1
	50	50	23.99	23.91	23.96	23.83	23.90		1
16QAM	100	0	24.01	23.92	24.01	23.95	23.95	0-1	1
	1	0	23.98	24.00	24.11	23.85	24.00		1
	1	50	23.83	24.01	23.98	23.74	24.10		1
	50	0	23.10	23.08	23.03	22.85	23.02	0-2	2
	50	25	23.02	23.03	22.94	22.88	22.90		2
	50	50	22.96	22.98	22.90	22.84	22.93		2
64QAM	100	0	23.04	22.96	22.98	22.90	22.95	0-2	2
	1	0	22.92	22.93	23.10	22.82	22.91		2
	1	50	22.69	22.89	22.97	22.66	22.99		2
	50	0	22.01	21.94	21.93	21.77	21.91	0-3	3
	50	25	22.01	21.90	21.94	21.85	21.87		3
	50	50	21.95	21.88	21.81	21.73	21.86		3
	100	0	21.90	21.89	21.97	21.78	21.87		3

Table 9-40  
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.10	25.02	25.13	25.04	24.91	0	0
	1	36	24.95	24.88	25.02	24.96	24.81		0
	1	74	24.88	24.91	24.95	24.89	24.75		0
	36	0	24.05	24.01	24.00	24.00	23.88	0-1	1
	36	18	23.98	23.98	23.98	23.99	23.80		1
	36	37	23.99	23.97	23.95	23.95	23.85		1
16QAM	75	0	24.00	23.96	23.95	23.96	23.80	0-1	1
	1	0	24.01	24.07	24.18	23.88	23.92		1
	1	36	23.86	23.92	24.07	23.94	23.79		1
	36	0	23.84	23.86	24.02	23.86	23.79	0-2	2
	36	18	22.97	22.95	22.98	22.99	22.84		2
	36	37	22.93	22.93	22.95	22.90	22.78		2
64QAM	75	0	23.00	22.94	22.97	22.97	22.80	0-2	2
	1	0	23.01	22.98	23.07	22.82	22.87		2
	1	36	22.75	22.83	23.02	22.86	22.77		2
	36	0	22.73	22.78	22.99	22.77	22.74	0-3	3
	36	18	21.99	21.93	21.91	21.90	21.82		3
	36	37	21.95	21.82	21.85	21.98	21.71		3
	75	0	21.87	21.83	21.82	21.80	21.69		3
			21.86	21.91	21.96	21.88	21.75		3



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 50 of 105

**Table 9-41**  
**LTE Band 41 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.03	24.95	25.07	25.05	25.00	0	0
	1	25	24.88	24.90	25.03	24.94	24.81		0
	1	49	24.92	24.90	24.98	24.94	25.10		0
	25	0	23.98	23.98	23.94	24.01	23.98	0-1	1
	25	12	24.04	24.00	23.96	24.00	23.88		1
	25	25	23.98	23.95	23.96	23.98	23.97		1
50	0	24.00	23.96	23.98	24.00	23.87	1		
16QAM	1	0	23.98	24.06	24.19	23.99	24.00	0-1	1
	1	25	23.90	23.97	24.09	23.91	23.81		1
	1	49	23.88	23.91	24.08	23.83	24.00		1
	25	0	23.00	22.98	23.01	23.01	22.98	0-2	2
	25	12	23.02	22.95	22.93	22.99	22.83		2
	25	25	22.95	22.95	22.95	22.94	22.95		2
50	0	23.00	22.95	22.98	22.98	22.99	2		
64QAM	1	0	22.84	23.04	23.15	22.95	22.92	0-2	2
	1	25	22.86	22.91	23.07	22.88	22.74		2
	1	49	22.74	22.88	23.06	22.83	22.94		2
	25	0	21.96	21.98	21.92	21.95	21.95	0-3	3
	25	12	21.97	21.84	21.87	21.86	21.81		3
	25	25	21.83	21.87	21.93	21.93	21.94		3
50	0	21.99	21.87	21.86	21.92	21.86	3		

**Table 9-42**  
**LTE Band 41 Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.95	24.95	24.80	25.01	24.90	0	0
	1	12	24.90	24.90	24.78	25.05	24.85		0
	1	24	24.87	24.88	24.78	24.95	24.78		0
	12	0	23.99	23.92	23.98	24.02	23.83	0-1	1
	12	6	24.03	24.05	24.00	24.00	23.85		1
	12	13	24.00	23.94	23.95	23.97	23.80		1
25	0	23.95	23.98	23.97	24.01	23.78	1		
16QAM	1	0	23.90	23.89	24.06	23.96	23.77	0-1	1
	1	12	23.88	23.85	24.13	23.95	23.72		1
	1	24	23.81	23.88	24.09	23.98	23.71		1
	12	0	22.98	22.98	23.05	23.00	22.78	0-2	2
	12	6	23.02	22.98	23.04	22.97	22.78		2
	12	13	22.98	22.90	22.98	22.95	22.76		2
25	0	22.96	22.95	22.95	22.96	22.80	2		
64QAM	1	0	22.78	22.87	22.96	22.91	22.70	0-2	2
	1	12	22.81	22.78	23.09	22.94	22.67		2
	1	24	22.79	22.81	22.96	22.87	22.66		2
	12	0	21.89	21.85	21.99	22.00	21.67	0-3	3
	12	6	21.98	21.96	21.96	21.92	21.66		3
	12	13	21.88	21.84	21.90	21.83	21.76		3
25	0	21.95	21.86	21.84	21.82	21.79	3		

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 51 of 105	

### 9.4.3 LTE Uplink Carrier Aggregation Conducted Powers

**Table 9-43**  
**LTE Band 5 Uplink Carrier Aggregation Conducted Powers**

Combination	PCC								SCC								Power			
	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_5B	LTE B5	10	20525	836.5	2525	881.5	QPSK	1	0	LTE B5	5	20453	829.3	2453	874.3	QPSK	1	24	25.15	25.40

**Table 9-44**  
**LTE Band 41 Uplink Carrier Aggregation Conducted Powers**



Combination	PCC						SCC						Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	1	99	24.88	25.18

**Notes:**

1. This device supports uplink carrier aggregation for LTE CA\_41C with a maximum of two 20 MHz component carriers and LTE CA\_5B with a maximum of two 10 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.



**Figure 9-4**  
**Power Measurement Setup**

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 52 of 105	

## 9.5 WLAN Conducted Powers

**Table 9-45**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 1**



2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
		Average	Average	Average	Average
2412	1	19.46	15.81	15.68	15.63
2422	3	N/A	17.97	16.52	N/A
2437	6	19.44	17.98	16.61	15.73
2452	9	19.33	17.93	16.52	N/A
2462	11	18.48	16.12	15.63	15.58

**Table 9-46**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
		Average	Average	Average	Average
2412	1	19.49	15.88	15.70	15.69
2422	3	N/A	17.99	16.57	N/A
2437	6	19.44	17.98	16.63	15.70
2452	9	19.45	17.99	16.64	N/A
2462	11	18.49	16.10	15.55	15.56

**Table 9-47**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 1**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
		Average	Average	Average	Average
2412	1	15.41	15.26	15.05	14.95
2437	6	15.50	15.32	15.11	15.00
2462	11	15.40	15.26	15.06	15.02



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 53 of 105

**Table 9-48**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
		Average	Average	Average	Average
2412	1	15.34	15.29	15.14	15.12
2437	6	15.48	15.36	15.20	15.10
2462	11	15.29	15.31	15.26	15.06

**Table 9-49**  
**5 GHz WLAN Maximum Average RF Power – Ant 1**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	14.64	14.52	14.51
5200	40	14.73	14.56	14.56
5220	44	14.82	14.61	14.59
5240	48	14.84	14.71	14.65
5260	52	14.83	14.64	14.72
5280	56	14.63	14.48	14.57
5300	60	14.97	14.70	14.73
5320	64	14.93	14.66	14.75
5500	100	14.80	14.62	14.59
5600	120	14.88	14.66	14.68
5620	124	14.93	14.70	14.72
5720	144	14.79	14.62	14.54
5745	149	14.88	14.70	14.64
5785	157	14.77	14.58	14.60
5825	165	14.67	14.53	14.50

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 54 of 105





**Table 9-50**  
**5 GHz WLAN Maximum Average RF Power – Ant 2**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	14.66	14.47	14.44
5200	40	14.50	14.31	14.28
5220	44	14.51	14.29	14.26
5240	48	14.53	14.35	14.33
5260	52	14.62	14.37	14.41
5280	56	14.61	14.35	14.31
5300	60	<b>14.63</b>	14.43	14.41
5320	64	14.60	14.35	14.34
5500	100	14.70	14.49	14.47
5600	120	<b>14.71</b>	14.53	14.49
5620	124	14.68	14.44	14.44
5720	144	14.66	14.53	14.53
5745	149	<b>14.76</b>	14.50	14.56
5785	157	14.72	14.55	14.58
5825	165	14.74	14.54	14.54


**Table 9-51**  
**5 GHz WLAN Maximum Average RF Power – MIMO**

5GHz (20MHz) 802.11n Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5180	36	14.52	14.47	17.51
5200	40	14.56	14.31	17.45
5220	44	14.61	14.29	17.46
5240	48	14.71	14.35	17.54
5260	52	14.64	14.37	17.52
5280	56	14.48	14.35	17.43
5300	60	14.70	14.43	17.58
5320	64	14.66	14.35	17.52
5500	100	14.62	14.49	17.57
5600	120	14.66	14.53	17.61
5620	124	14.70	14.44	17.58
5720	144	14.62	14.53	17.59
5745	149	<b>14.70</b>	<b>14.50</b>	<b>17.61</b>
5785	157	14.58	14.55	17.58
5825	165	14.53	14.54	17.55



FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 55 of 105

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

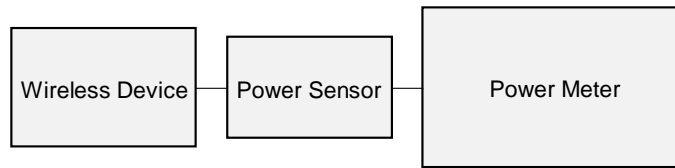- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-5**  
**Power Measurement Setup**

FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 56 of 105

## 9.6 Bluetooth Conducted Powers

Table 9-52  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	<b>12.10</b>	16.230
2441	1.0	39	11.97	15.726
2480	1.0	78	11.11	12.919
2402	2.0	0	11.42	13.872
2441	2.0	39	11.31	13.507
2480	2.0	78	10.46	11.116
2402	3.0	0	11.49	14.090
2441	3.0	39	11.38	13.725
2480	3.0	78	10.51	11.251

Note: The bolded data rates and channel above were tested for SAR.



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 57 of 105



Figure 9-6  
Bluetooth Transmission Plot

Equation 9-1  
Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.930ms}{3.760ms} * 100\% = 77.9\%$$

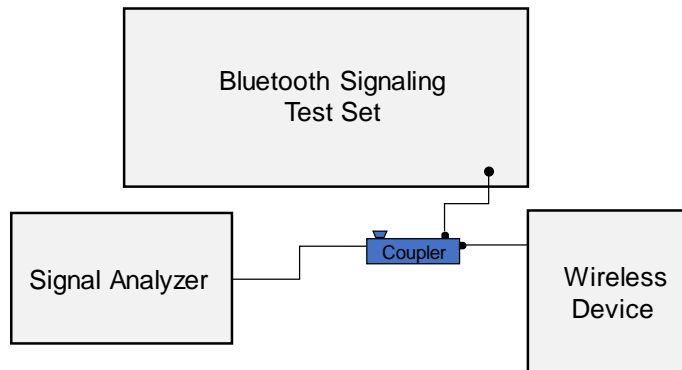


Figure 9-7  
Power Measurement Setup



FCC ID: ZNFV350A	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 58 of 105

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Head Tissue Properties**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
4/12/2018	750H	21.7	700	0.887	41.260	0.889	42.201	-0.22%	-2.23%
			710	0.890	41.238	0.890	42.149	0.00%	-2.16%
			740	0.901	41.117	0.893	41.994	0.90%	-2.09%
			755	0.906	41.076	0.894	41.916	1.34%	-2.00%
			770	0.913	41.049	0.895	41.838	2.01%	-1.89%
			785	0.917	40.952	0.896	41.760	2.34%	-1.93%
4/9/2018	835H	20.7	820	0.903	43.022	0.899	41.578	0.44%	3.47%
			835	0.918	42.828	0.900	41.500	2.00%	3.20%
			850	0.934	42.627	0.916	41.500	1.97%	2.72%
4/11/2018	835H	21.6	820	0.889	42.192	0.899	41.578	-1.11%	1.48%
			835	0.904	42.007	0.900	41.500	0.44%	1.22%
			850	0.920	41.828	0.916	41.500	0.44%	0.79%
4/14/2018	835H	20.5	820	0.890	40.717	0.899	41.578	-1.00%	-2.07%
			835	0.905	40.508	0.900	41.500	0.56%	-2.39%
			850	0.920	40.307	0.916	41.500	0.44%	-2.87%
4/7/2018	1750H	21.4	1710	1.360	39.763	1.348	40.142	0.89%	-0.94%
			1750	1.403	39.580	1.371	40.079	2.33%	-1.25%
			1790	1.445	39.373	1.394	40.016	3.66%	-1.61%
4/13/2018	1900H	21.7	1850	1.403	38.131	1.400	40.000	0.21%	-4.67%
			1880	1.422	38.103	1.400	40.000	1.57%	-4.74%
			1910	1.441	38.070	1.400	40.000	2.93%	-4.83%
4/15/2018	2300H	22.5	2300	1.689	40.974	1.670	39.500	1.14%	3.73%
			2310	1.701	40.942	1.679	39.480	1.31%	3.70%
			2320	1.712	40.913	1.687	39.460	1.48%	3.68%
4/9/2018	2450H-2600H	22.8	2400	1.786	39.784	1.756	39.289	1.71%	1.26%
			2450	1.843	39.600	1.800	39.200	2.39%	1.02%
			2500	1.900	39.399	1.855	39.136	2.43%	0.67%
			2550	1.956	39.213	1.909	39.073	2.46%	0.36%
			2600	2.015	39.023	1.964	39.009	2.60%	0.04%
			2650	2.074	38.833	2.019	38.944	2.74%	-0.28%
4/9/2018	5250H-5750H	21.6	5240	4.609	37.163	4.696	35.940	-1.85%	3.40%
			5260	4.618	37.249	4.717	35.917	-2.10%	3.71%
			5300	4.653	37.187	4.758	35.871	-2.21%	3.67%
			5320	4.674	37.163	4.778	35.849	-2.18%	3.67%
			5600	4.981	36.743	5.065	35.529	-1.66%	3.42%
			5620	5.009	36.646	5.086	35.506	-1.51%	3.21%
			5745	5.136	36.462	5.214	35.363	-1.50%	3.11%
			5765	5.144	36.508	5.234	35.340	-1.72%	3.31%
4/18/2018	5250H	22.0	5240	4.509	35.746	4.696	35.940	-3.98%	-0.54%
			5260	4.529	35.720	4.717	35.917	-3.99%	-0.55%
			5300	4.560	35.658	4.758	35.871	-4.16%	-0.59%

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 59 of 105	

**Table 10-2  
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
4/14/2018	750B	21.2	700	0.959	53.224	0.959	55.726	0.00%	-4.49%
			710	0.963	53.210	0.960	55.687	0.31%	-4.45%
			740	0.974	53.152	0.963	55.570	1.14%	-4.35%
			755	0.979	53.111	0.964	55.512	1.56%	-4.33%
			770	0.985	53.072	0.965	55.453	2.07%	-4.29%
			785	0.990	53.028	0.966	55.395	2.48%	-4.27%
			800	0.996	52.997	0.967	55.336	3.00%	-4.23%
4/11/2018	835B	22.3	820	0.950	53.692	0.969	55.258	-1.96%	-2.83%
			835	0.965	53.572	0.970	55.200	-0.52%	-2.95%
			850	0.980	53.449	0.988	55.154	-0.81%	-3.09%
4/12/2018	1750B	20.9	1710	1.466	51.639	1.463	53.537	0.21%	-3.55%
			1750	1.513	51.512	1.488	53.432	1.68%	-3.59%
			1790	1.558	51.355	1.514	53.326	2.91%	-3.70%
4/15/2018	1750B	22.0	1710	1.463	51.399	1.463	53.537	0.00%	-3.99%
			1750	1.507	51.241	1.488	53.432	1.28%	-4.10%
			1790	1.548	51.054	1.514	53.326	2.25%	-4.26%
4/11/2018	1900B	21.9	1850	1.522	53.701	1.520	53.300	0.13%	0.75%
			1880	1.556	53.681	1.520	53.300	2.37%	0.71%
			1910	1.593	53.546	1.520	53.300	4.80%	0.46%
4/15/2018	1900B	22.4	1850	1.504	54.036	1.520	53.300	-1.05%	1.38%
			1880	1.540	53.934	1.520	53.300	1.32%	1.19%
			1910	1.577	53.811	1.520	53.300	3.75%	0.96%
4/15/2018	2300B	20.9	2300	1.876	51.612	1.809	52.900	3.70%	-2.43%
			2310	1.887	51.577	1.816	52.887	3.91%	-2.48%
			2320	1.899	51.544	1.826	52.873	4.00%	-2.51%
4/6/2018	2450B-2600B	22.3	2450	2.027	51.515	1.950	52.700	3.95%	-2.25%
			2500	2.088	51.344	2.021	52.636	3.32%	-2.45%
			2550	2.146	51.188	2.092	52.573	2.58%	-2.63%
			2600	2.209	51.032	2.163	52.509	2.13%	-2.81%
4/14/2018	2450B	22.5	2400	1.958	52.349	1.902	52.767	2.94%	-0.79%
			2450	2.022	52.188	1.950	52.700	3.69%	-0.97%
			2500	2.095	51.994	2.021	52.636	3.66%	-1.22%
4/16/2018	2450B-2600B	23.0	2450	1.964	52.143	1.950	52.700	0.72%	-1.06%
			2500	2.037	51.950	2.021	52.636	0.79%	-1.30%
			2550	2.101	51.789	2.092	52.573	0.43%	-1.49%
			2600	2.166	51.570	2.163	52.509	0.14%	-1.79%
4/14/2018	5250B-5750B	21.8	5180	5.418	47.751	5.276	49.041	2.69%	-2.63%
			5240	5.503	47.675	5.346	48.960	2.94%	-2.62%
			5260	5.529	47.610	5.369	48.933	2.98%	-2.70%
			5300	5.586	47.541	5.416	48.879	3.14%	-2.74%
			5600	5.980	47.052	5.766	48.471	3.71%	-2.93%
			5620	5.985	46.990	5.790	48.444	3.37%	-3.00%
			5700	6.128	46.867	5.883	48.336	4.16%	-3.04%
			5745	6.185	46.822	5.936	48.275	4.19%	-3.01%
			5765	6.212	46.785	5.959	48.248	4.25%	-3.03%
			5785	6.244	46.767	5.982	48.220	4.38%	-3.01%
			5825	6.302	46.681	6.029	48.166	4.53%	-3.08%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 60 of 105	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-3  
System Verification Results – 1g**


System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
J	750	HEAD	04/12/2018	22.7	21.7	0.200	1003	3914	1.720	8.280	8.600	3.86%
E	835	HEAD	04/09/2018	21.5	20.7	0.200	4d132	3213	1.990	9.360	9.950	6.30%
G	835	HEAD	04/11/2018	21.5	20.9	0.200	4d133	3332	1.850	9.520	9.250	-2.84%
G	835	HEAD	04/14/2018	20.0	19.9	0.200	4d133	3332	1.880	9.520	9.400	-1.26%
J	1750	HEAD	04/07/2018	20.3	21.4	0.100	1148	7410	3.720	36.400	37.200	2.20%
J	1900	HEAD	04/13/2018	21.9	21.7	0.100	5d148	3914	4.350	40.100	43.500	8.48%
G	2300	HEAD	04/15/2018	22.8	23.1	0.100	1073	3332	4.780	48.600	47.800	-1.65%
G	2450	HEAD	04/09/2018	22.4	22.8	0.100	797	3332	5.490	52.700	54.900	4.17%
G	2600	HEAD	04/09/2018	22.4	22.8	0.100	1126	3332	5.570	56.400	55.700	-1.24%
H	5250	HEAD	04/09/2018	21.9	21.6	0.050	1191	3589	3.680	78.900	73.600	-6.72%
H	5250	HEAD	04/18/2018	22.3	22.0	0.050	1191	3589	3.840	78.900	76.800	-2.66%
H	5600	HEAD	04/09/2018	21.9	21.6	0.050	1191	3589	3.910	83.600	78.200	-6.46%
H	5750	HEAD	04/09/2018	21.9	21.6	0.050	1191	3589	3.910	79.100	78.200	-1.14%
E	750	BODY	04/14/2018	22.0	21.2	0.200	1161	3213	1.750	8.430	8.750	3.80%
E	835	BODY	04/11/2018	22.7	22.3	0.200	4d132	3213	1.940	9.710	9.700	-0.10%
I	1750	BODY	04/12/2018	23.0	20.8	0.100	1148	3287	3.910	37.000	39.100	5.68%
I	1750	BODY	04/15/2018	22.0	22.0	0.100	1148	3287	3.910	37.000	39.100	5.68%
J	1900	BODY	04/11/2018	21.3	21.9	0.100	5d148	3914	4.250	39.600	42.500	7.32%
J	1900	BODY	04/15/2018	22.5	22.4	0.100	5d148	3914	4.140	39.600	41.400	4.55%
K	2300	BODY	04/15/2018	22.0	20.9	0.100	1073	3319	5.030	48.100	50.300	4.57%
K	2450	BODY	04/06/2018	22.8	21.7	0.100	797	3319	5.020	51.100	50.200	-1.76%
H	2450	BODY	04/14/2018	21.9	22.5	0.100	797	7410	5.490	51.100	54.900	7.44%
H	2450	BODY	04/16/2018	22.8	21.7	0.100	797	7410	5.020	51.100	50.200	-1.76%
K	2600	BODY	04/06/2018	22.8	21.7	0.100	1126	3319	5.410	54.300	54.100	-0.37%
H	2600	BODY	04/16/2018	22.6	23.0	0.100	1126	7410	5.270	54.300	52.700	-2.95%
D	5250	BODY	04/14/2018	22.3	21.8	0.050	1237	7308	3.750	76.900	75.000	-2.47%
D	5600	BODY	04/14/2018	22.3	21.8	0.050	1237	7308	3.940	78.500	78.800	0.38%
D	5750	BODY	04/14/2018	22.3	21.8	0.050	1237	7308	3.670	77.100	73.400	-4.80%

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 61 of 105	



**Table 10-4  
System Verification Results – 10g**

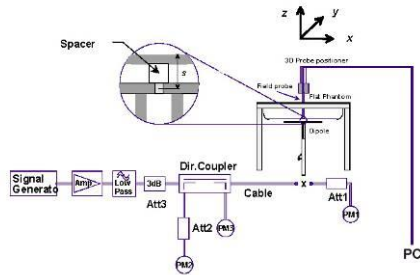

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
D	5250	BODY	04/14/2018	22.3	21.8	0.050	1237	7308	1.050	21.500	21.000	-2.33%
D	5600	BODY	04/14/2018	22.3	21.8	0.050	1237	7308	1.090	22.100	21.800	-1.36%



**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 62 of 105

# 11 SAR DATA SUMMARY



## 11.1 Standalone Head SAR Data

**Table 11-1  
CDMA BC10 (\$90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.33	0.03	Right	Cheek	19036	1:1	0.092	1.040	0.096	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.33	0.13	Right	Tilt	19036	1:1	0.065	1.040	0.068	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.33	-0.05	Left	Cheek	19036	1:1	0.154	1.040	0.160	A1
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.33	-0.01	Left	Tilt	19036	1:1	0.069	1.040	0.072	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.39	0.17	Right	Cheek	19036	1:1	0.110	1.026	0.113	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.39	0.07	Right	Tilt	19036	1:1	0.083	1.026	0.085	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.39	-0.02	Left	Cheek	19036	1:1	0.152	1.026	0.156	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.39	0.10	Left	Tilt	19036	1:1	0.082	1.026	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
CDMA BC0 (\$22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.34	0.10	Right	Cheek	19036	1:1	0.095	1.038	0.099	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.34	0.16	Right	Tilt	19036	1:1	0.059	1.038	0.061	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.34	-0.11	Left	Cheek	19036	1:1	0.148	1.038	0.154	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.34	0.10	Left	Tilt	19036	1:1	0.066	1.038	0.069	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.47	-0.06	Right	Cheek	19036	1:1	0.105	1.007	0.106	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.47	0.00	Right	Tilt	19036	1:1	0.077	1.007	0.078	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.47	-0.05	Left	Cheek	19036	1:1	0.160	1.007	0.161	A2
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.47	0.02	Left	Tilt	19036	1:1	0.076	1.007	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 63 of 105	

**Table 11-3  
PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.44	0.14	Right	Cheek	19036	1:1	0.085	1.062	0.090	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.44	0.12	Right	Tilt	19036	1:1	0.054	1.062	0.057	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.44	0.08	Left	Cheek	19036	1:1	0.135	1.062	0.143	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.44	0.00	Left	Tilt	19036	1:1	0.088	1.062	0.093	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.52	0.18	Right	Cheek	19036	1:1	0.125	1.042	0.130	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.52	0.11	Right	Tilt	19036	1:1	0.059	1.042	0.061	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.52	0.05	Left	Cheek	19036	1:1	0.140	1.042	0.146	A3
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.52	-0.05	Left	Tilt	19036	1:1	0.092	1.042	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-4  
GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.46	0.12	Right	Cheek	19010	1	1:8.3	0.086	1.057	0.091	
836.60	190	GSM 850	GSM	33.7	33.46	0.20	Right	Tilt	19010	1	1:8.3	0.052	1.057	0.055	
836.60	190	GSM 850	GSM	33.7	33.46	-0.02	Left	Cheek	19010	1	1:8.3	0.125	1.057	0.132	
836.60	190	GSM 850	GSM	33.7	33.46	-0.03	Left	Tilt	19010	1	1:8.3	0.057	1.057	0.060	
836.60	190	GSM 850	GPRS	32.7	32.43	-0.02	Right	Cheek	19010	2	1:4.15	0.091	1.064	0.097	
836.60	190	GSM 850	GPRS	32.7	32.43	-0.13	Right	Tilt	19010	2	1:4.15	0.061	1.064	0.065	
836.60	190	GSM 850	GPRS	32.7	32.43	-0.20	Left	Cheek	19010	2	1:4.15	0.150	1.064	0.160	A4
836.60	190	GSM 850	GPRS	32.7	32.43	0.11	Left	Tilt	19010	2	1:4.15	0.066	1.064	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 64 of 105	

**Table 11-5  
GSM 1900 Head SAR**



MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.40	0.13	Right	Cheek	19010	1	1:8.3	0.097	1.072	0.104	
1880.00	661	GSM 1900	GSM	30.7	30.40	0.15	Right	Tilt	19010	1	1:8.3	0.054	1.072	0.058	
1880.00	661	GSM 1900	GSM	30.7	30.40	0.11	Left	Cheek	19010	1	1:8.3	0.140	1.072	0.150	A5
1880.00	661	GSM 1900	GSM	30.7	30.40	0.16	Left	Tilt	19010	1	1:8.3	0.083	1.072	0.089	
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.14	Right	Cheek	19010	3	1:2.76	0.070	1.059	0.074	
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.07	Right	Tilt	19010	3	1:2.76	0.045	1.059	0.048	
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.06	Left	Cheek	19010	3	1:2.76	0.108	1.059	0.114	
1880.00	661	GSM 1900	GPRS	27.0	26.75	-0.01	Left	Tilt	19010	3	1:2.76	0.066	1.059	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-6  
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.5	25.33	0.09	Right	Cheek	19010	1:1	0.095	1.040	0.099	
836.60	4183	UMTS 850	RMC	25.5	25.33	0.04	Right	Tilt	19010	1:1	0.073	1.040	0.076	
836.60	4183	UMTS 850	RMC	25.5	25.33	0.03	Left	Cheek	19010	1:1	0.155	1.040	0.161	A6
836.60	4183	UMTS 850	RMC	25.5	25.33	-0.02	Left	Tilt	19010	1:1	0.076	1.040	0.079	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.10	Right	Cheek	19010	1:1	0.101	1.005	0.102	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.10	Right	Tilt	19010	1:1	0.062	1.005	0.062	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.06	Left	Cheek	19010	1:1	0.119	1.005	0.120	A7
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.08	Left	Tilt	19010	1:1	0.075	1.005	0.075	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 65 of 105	

**Table 11-8  
UMTS 1900 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.17	Right	Cheek	19010	1:1	0.105	1.062	0.112	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.13	Right	Tilt	19010	1:1	0.063	1.062	0.067	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	-0.04	Left	Cheek	19010	1:1	0.143	1.062	0.152	A8
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.19	Left	Tilt	19010	1:1	0.092	1.062	0.098	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-9  
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.13	0	Right	Cheek	QPSK	1	25	19093	1:1	0.103	1.000	0.103	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	0.08	1	Right	Cheek	QPSK	25	25	19093	1:1	0.061	1.107	0.068	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.00	0	Right	Tilt	QPSK	1	25	19093	1:1	0.053	1.000	0.053	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	0.15	1	Right	Tilt	QPSK	25	25	19093	1:1	0.031	1.107	0.034	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.14	0	Left	Cheek	QPSK	1	25	19093	1:1	0.117	1.000	0.117	A9
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	0.12	1	Left	Cheek	QPSK	25	25	19093	1:1	0.075	1.107	0.083	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.14	0	Left	Tilt	QPSK	1	25	19093	1:1	0.056	1.000	0.056	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.07	1	Left	Tilt	QPSK	25	25	19093	1:1	0.030	1.107	0.033	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-10  
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	0.06	0	Right	Cheek	QPSK	1	0	19093	1:1	0.093	1.040	0.097	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	-0.02	1	Right	Cheek	QPSK	25	0	19093	1:1	0.057	1.042	0.059	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	0.15	0	Right	Tilt	QPSK	1	0	19093	1:1	0.064	1.040	0.067	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.19	1	Right	Tilt	QPSK	25	0	19093	1:1	0.037	1.042	0.039	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	0.19	0	Left	Cheek	QPSK	1	0	19093	1:1	0.118	1.040	0.123	A10
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.15	1	Left	Cheek	QPSK	25	0	19093	1:1	0.072	1.042	0.075	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	0.14	0	Left	Tilt	QPSK	1	0	19093	1:1	0.045	1.040	0.047	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.03	1	Left	Tilt	QPSK	25	0	19093	1:1	0.030	1.042	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFV350A		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 66 of 105

**Table 11-11  
LTE Band 14 Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.15	0	Right	Cheek	QPSK	1	25	19093	1:1	0.092	1.035	0.095	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.05	1	Right	Cheek	QPSK	25	25	19093	1:1	0.056	1.007	0.056	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	0.02	0	Right	Tilt	QPSK	1	25	19093	1:1	0.060	1.035	0.062	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.12	1	Right	Tilt	QPSK	25	25	19093	1:1	0.042	1.007	0.042	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.13	0	Left	Cheek	QPSK	1	25	19093	1:1	0.118	1.035	0.122	A11
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.13	1	Left	Cheek	QPSK	25	25	19093	1:1	0.077	1.007	0.078	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	0.15	0	Left	Tilt	QPSK	1	25	19093	1:1	0.056	1.035	0.058	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.12	1	Left	Tilt	QPSK	25	25	19093	1:1	0.035	1.007	0.035	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12  
LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.03	0	Right	Cheek	QPSK	1	0	19085	1:1	0.089	1.021	0.091	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.07	1	Right	Cheek	QPSK	36	37	19085	1:1	0.053	1.026	0.054	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	-0.05	0	Right	Tilt	QPSK	1	0	19085	1:1	0.056	1.021	0.057	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.01	1	Right	Tilt	QPSK	36	37	19085	1:1	0.038	1.026	0.039	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.02	0	Left	Cheek	QPSK	1	0	19085	1:1	0.160	1.021	0.163	A12
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.02	1	Left	Cheek	QPSK	36	37	19085	1:1	0.094	1.026	0.096	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.01	0	Left	Tilt	QPSK	1	0	19085	1:1	0.074	1.021	0.076	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.08	1	Left	Tilt	QPSK	36	37	19085	1:1	0.041	1.026	0.042	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-13  
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.11	0	Right	Cheek	QPSK	1	0	19085	1:1	0.085	1.023	0.087	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.06	1	Right	Cheek	QPSK	25	12	19085	1:1	0.053	1.009	0.053	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	0.19	0	Right	Tilt	QPSK	1	0	19085	1:1	0.070	1.023	0.072	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.14	1	Right	Tilt	QPSK	25	12	19085	1:1	0.040	1.009	0.040	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.05	0	Left	Cheek	QPSK	1	0	19085	1:1	0.130	1.023	0.133	A13
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.15	0.04	0	Left	Cheek	QPSK	1	0	19085	1:1	0.120	1.084	0.130	
2 CC Uplink	SCC	829.30	20453		LTE Band 5 (Cell)	5				0	Left	Cheek	QPSK	1	24		1:1				
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.00	1	Left	Cheek	QPSK	25	12	19085	1:1	0.097	1.009	0.098	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.04	0	Left	Tilt	QPSK	1	0	19085	1:1	0.068	1.023	0.070	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.11	1	Left	Tilt	QPSK	25	12	19085	1:1	0.043	1.009	0.043	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 67 of 105	

**Table 11-14  
LTE Band 66 (AWS) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.07	0	Right	Cheek	QPSK	1	0	19085	1:1	0.138	1.000	0.138	A14
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	0.13	1	Right	Cheek	QPSK	50	25	19085	1:1	0.133	1.023	0.136	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.02	0	Right	Tilt	QPSK	1	0	19085	1:1	0.088	1.000	0.088	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	0.07	1	Right	Tilt	QPSK	50	25	19085	1:1	0.086	1.023	0.088	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	-0.15	0	Left	Cheek	QPSK	1	0	19085	1:1	0.135	1.000	0.135	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	0.14	1	Left	Cheek	QPSK	50	25	19085	1:1	0.132	1.023	0.135	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.00	0	Left	Tilt	QPSK	1	0	19085	1:1	0.093	1.000	0.093	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.07	1	Left	Tilt	QPSK	50	25	19085	1:1	0.082	1.023	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-15  
LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.19	0	Right	Cheek	QPSK	1	0	19085	1:1	0.119	1.000	0.119	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.13	1	Right	Cheek	QPSK	50	25	19085	1:1	0.083	1.007	0.084	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.19	0	Right	Tilt	QPSK	1	0	19085	1:1	0.072	1.000	0.072	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.07	1	Right	Tilt	QPSK	50	25	19085	1:1	0.068	1.007	0.068	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.13	0	Left	Cheek	QPSK	1	0	19085	1:1	0.165	1.000	0.165	A15
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.02	1	Left	Cheek	QPSK	50	25	19085	1:1	0.147	1.007	0.148	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.14	0	Left	Tilt	QPSK	1	0	19085	1:1	0.113	1.000	0.113	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	-0.01	1	Left	Tilt	QPSK	50	25	19085	1:1	0.107	1.007	0.108	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-16  
LTE Band 30 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Md	LTE Band 30	10	25.2	25.06	0.07	0	Right	Cheek	QPSK	1	25	19093	1:1	0.075	1.033	0.077	
2310.00	27710	Md	LTE Band 30	10	24.2	23.80	0.04	1	Right	Cheek	QPSK	25	0	19093	1:1	0.064	1.096	0.070	
2310.00	27710	Md	LTE Band 30	10	25.2	25.06	0.13	0	Right	Tilt	QPSK	1	25	19093	1:1	0.041	1.033	0.042	
2310.00	27710	Md	LTE Band 30	10	24.2	23.80	0.07	1	Right	Tilt	QPSK	25	0	19093	1:1	0.039	1.096	0.043	
2310.00	27710	Md	LTE Band 30	10	25.2	25.06	-0.12	0	Left	Cheek	QPSK	1	25	19093	1:1	0.089	1.033	0.092	A16
2310.00	27710	Md	LTE Band 30	10	24.2	23.80	0.14	1	Left	Cheek	QPSK	25	0	19093	1:1	0.079	1.096	0.087	
2310.00	27710	Md	LTE Band 30	10	25.2	25.06	0.02	0	Left	Tilt	QPSK	1	25	19093	1:1	0.028	1.033	0.029	
2310.00	27710	Md	LTE Band 30	10	24.2	23.80	0.12	1	Left	Tilt	QPSK	25	0	19093	1:1	0.026	1.096	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFV350A		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 68 of 105

**Table 11-17  
LTE Band 7 Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2535.00	21100	Md	LTE Band 7	20	23.7	23.70	0.15	0	Right	Cheek	QPSK	1	50	19093	1:1	0.038	1.000	0.038	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.12	1	Right	Cheek	QPSK	50	0	19093	1:1	0.037	1.038	0.038	
2535.00	21100	Md	LTE Band 7	20	23.7	23.70	0.13	0	Right	Tilt	QPSK	1	50	19093	1:1	0.025	1.000	0.025	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.20	1	Right	Tilt	QPSK	50	0	19093	1:1	0.029	1.038	0.030	
2535.00	21100	Md	LTE Band 7	20	23.7	23.70	-0.02	0	Left	Cheek	QPSK	1	50	19093	1:1	0.048	1.000	0.048	A17
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	-0.06	1	Left	Cheek	QPSK	50	0	19093	1:1	0.042	1.038	0.044	
2535.00	21100	Md	LTE Band 7	20	23.7	23.70	0.18	0	Left	Tilt	QPSK	1	50	19093	1:1	0.013	1.000	0.013	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.14	1	Left	Tilt	QPSK	50	0	19093	1:1	0.020	1.038	0.021	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-18  
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.18	0.18	0	Right	Cheek	QPSK	1	0	19093	1:1.58	0.030	1.005	0.030	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.18	1	Right	Cheek	QPSK	50	25	19093	1:1.58	0.027	1.038	0.028	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.18	-0.07	0	Right	Tilt	QPSK	1	0	19093	1:1.58	0.016	1.005	0.016	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.11	1	Right	Tilt	QPSK	50	25	19093	1:1.58	0.017	1.038	0.018	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.18	0.16	0	Left	Cheek	QPSK	1	0	19093	1:1.58	0.032	1.005	0.032	A18
2 CC Uplink	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	24.88	0.19	0	Left	Cheek	QPSK	1	0	19093	1:1.58	0.028	1.076	0.030	
2 CC Uplink	SCC	2529.70	39987								Left	Cheek	QPSK	1	99						
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.13	1	Left	Cheek	QPSK	50	25	19093	1:1.58	0.031	1.038	0.032	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.18	0.14	0	Left	Tilt	QPSK	1	0	19093	1:1.58	0.012	1.005	0.012	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.14	1	Left	Tilt	QPSK	50	25	19093	1:1.58	0.009	1.038	0.009	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-19  
DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	15.5	15.41	-0.12	Right	Cheek	1	19176	1	99.2	0.753	0.665	1.021	1.008	0.684	
2437	6	802.11b	DSSS	22	15.5	15.50	0.18	Right	Cheek	1	19176	1	99.2	0.794	0.603	1.000	1.008	0.608	
2462	11	802.11b	DSSS	22	15.5	15.40	0.15	Right	Cheek	1	19176	1	99.2	0.651	0.546	1.023	1.008	0.563	
2437	6	802.11b	DSSS	22	15.5	15.50	0.16	Right	Tilt	1	19176	1	99.2	0.267	0.257	1.000	1.008	0.259	
2437	6	802.11b	DSSS	22	15.5	15.50	-0.09	Left	Cheek	1	19176	1	99.2	0.109	0.101	1.000	1.008	0.102	
2437	6	802.11b	DSSS	22	15.5	15.50	0.10	Left	Tilt	1	19176	1	99.2	0.107	0.097	1.000	1.008	0.098	
2412	1	802.11b	DSSS	22	15.5	15.34	0.14	Right	Cheek	2	19176	1	99.2	0.771	0.669	1.038	1.008	0.700	A19
2437	6	802.11b	DSSS	22	15.5	15.48	0.12	Right	Cheek	2	19176	1	99.2	0.630	0.662	1.005	1.008	0.671	
2462	11	802.11b	DSSS	22	15.5	15.29	0.17	Right	Cheek	2	19176	1	99.2	0.693	0.614	1.050	1.008	0.650	
2437	6	802.11b	DSSS	22	15.5	15.48	0.15	Right	Tilt	2	19176	1	99.2	0.559	0.534	1.005	1.008	0.541	
2437	6	802.11b	DSSS	22	15.5	15.48	-0.13	Left	Cheek	2	19176	1	99.2	0.358	-	1.005	1.008	-	
2437	6	802.11b	DSSS	22	15.5	15.48	0.04	Left	Tilt	2	19176	1	99.2	0.357	-	1.005	1.008	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: ZNFV350A		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 69 of 105



**Table 11-20  
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.													W/kg	(W/kg)				
5300	60	802.11a	OFDM	20	15.0	14.97	-0.05	Right	Cheek	1	19200	6	98.3	0.220	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.97	0.15	Right	Tilt	1	19200	6	98.3	0.223	0.090	1.007	1.017	0.092	
5300	60	802.11a	OFDM	20	15.0	14.97	-0.20	Left	Cheek	1	19200	6	98.3	0.100	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.97	0.15	Left	Tilt	1	19200	6	98.3	0.128	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.63	0.15	Right	Cheek	2	19200	6	99.3	1.329	0.704	1.089	1.007	0.772	
5260	52	802.11a	OFDM	20	15.0	14.62	0.17	Right	Tilt	2	19200	6	99.3	1.511	0.830	1.091	1.007	0.912	
5300	60	802.11a	OFDM	20	15.0	14.63	0.19	Right	Tilt	2	19200	6	99.3	1.657	0.832	1.089	1.007	0.912	A20
5320	64	802.11a	OFDM	20	15.0	14.60	0.14	Right	Tilt	2	19200	6	99.3	1.365	0.824	1.096	1.007	0.909	
5300	60	802.11a	OFDM	20	15.0	14.63	-0.19	Left	Cheek	2	19200	6	99.3	0.614	0.290	1.089	1.007	0.318	
5300	60	802.11a	OFDM	20	15.0	14.63	0.19	Left	Tilt	2	19200	6	99.3	0.691	0.339	1.089	1.007	0.372	
5300	60	802.11a	OFDM	20	15.0	14.63	0.16	Right	Tilt	2	19200	6	99.3	1.491	0.831	1.089	1.007	0.911	
5620	124	802.11a	OFDM	20	15.0	14.93	0.12	Right	Cheek	1	19200	6	98.3	0.614	0.308	1.016	1.017	0.318	
5620	124	802.11a	OFDM	20	15.0	14.93	0.15	Right	Tilt	1	19200	6	98.3	0.614	-	1.016	1.017	-	
5620	124	802.11a	OFDM	20	15.0	14.93	0.20	Left	Cheek	1	19200	6	98.3	0.254	-	1.016	1.017	-	
5620	124	802.11a	OFDM	20	15.0	14.93	0.17	Left	Tilt	1	19200	6	98.3	0.309	-	1.016	1.017	-	
5600	120	802.11a	OFDM	20	15.0	14.71	0.16	Right	Cheek	2	19200	6	99.3	0.889	0.468	1.069	1.007	0.504	
5600	120	802.11a	OFDM	20	15.0	14.71	0.17	Right	Tilt	2	19200	6	99.3	0.862	0.465	1.069	1.007	0.501	
5600	120	802.11a	OFDM	20	15.0	14.71	0.00	Left	Cheek	2	19200	6	99.3	0.433	0.184	1.069	1.007	0.198	
5600	120	802.11a	OFDM	20	15.0	14.71	0.03	Left	Tilt	2	19200	6	99.3	0.404	0.189	1.069	1.007	0.203	
5745	149	802.11a	OFDM	20	15.0	14.88	0.12	Right	Cheek	1	19200	6	98.3	0.656	0.344	1.028	1.017	0.360	
5745	149	802.11a	OFDM	20	15.0	14.88	-0.13	Right	Tilt	1	19200	6	98.3	0.620	-	1.028	1.017	-	
5745	149	802.11a	OFDM	20	15.0	14.88	0.16	Left	Cheek	1	19200	6	98.3	0.280	-	1.028	1.017	-	
5745	149	802.11a	OFDM	20	15.0	14.88	0.19	Left	Tilt	1	19200	6	98.3	0.304	-	1.028	1.017	-	
5745	149	802.11a	OFDM	20	15.0	14.76	0.13	Right	Cheek	2	19200	6	99.3	0.945	0.458	1.057	1.007	0.487	
5745	149	802.11a	OFDM	20	15.0	14.76	0.16	Right	Tilt	2	19200	6	99.3	0.712	0.392	1.057	1.007	0.417	
5745	149	802.11a	OFDM	20	15.0	14.76	-0.12	Left	Cheek	2	19200	6	99.3	0.375	0.146	1.057	1.007	0.155	
5745	149	802.11a	OFDM	20	15.0	14.76	0.13	Left	Tilt	2	19200	6	99.3	0.411	0.145	1.057	1.007	0.154	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability measurement.

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 70 of 105	



**Table 11-21  
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle %	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2402.00	0	Bluetooth	FHSS	13.0	12.10	-0.10	Right	Cheek	19176	1	77.9	0.177	1.230	1.284	0.280	A21
2402.00	0	Bluetooth	FHSS	13.0	12.10	0.12	Right	Tilt	19176	1	77.9	0.068	1.230	1.284	0.107	
2402.00	0	Bluetooth	FHSS	13.0	12.10	0.21	Left	Cheek	19176	1	77.9	0.031	1.230	1.284	0.049	
2402.00	0	Bluetooth	FHSS	13.0	12.10	0.16	Left	Tilt	19176	1	77.9	0.025	1.230	1.284	0.039	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

## 11.2 Standalone Body-Worn SAR Data

**Table 11-22  
GSM/UMTS/CDMA Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	TDSO / SO32	25.5	25.23	0.01	10 mm	19036	N/A	1:1	back	0.640	1.064	0.681	A22
824.70	1013	CDMA BC0 (§22H)	TDSO / SO32	25.5	25.45	0.02	10 mm	19036	N/A	1:1	back	0.640	1.012	0.648	
836.52	384	CDMA BC0 (§22H)	TDSO / SO32	25.5	25.44	-0.01	10 mm	19036	N/A	1:1	back	0.661	1.014	0.670	
848.31	777	CDMA BC0 (§22H)	TDSO / SO32	25.5	25.28	0.03	10 mm	19036	N/A	1:1	back	0.689	1.052	0.725	A24
1880.00	600	PCS CDMA	TDSO / SO32	24.7	24.48	0.01	10 mm	19036	N/A	1:1	back	0.474	1.052	0.499	A26
836.60	190	GSM 850	GSM	33.7	33.46	0.00	10 mm	19010	1	1:8.3	back	0.582	1.057	0.615	
824.20	128	GSM 850	GPRS	32.7	32.48	0.01	10 mm	19010	2	1:4.15	back	0.632	1.052	0.665	
836.60	190	GSM 850	GPRS	32.7	32.43	0.04	10 mm	19010	2	1:4.15	back	0.645	1.064	0.686	
848.80	251	GSM 850	GPRS	32.7	32.32	0.01	10 mm	19010	2	1:4.15	back	0.695	1.091	0.758	A28
1880.00	661	GSM 1900	GSM	30.7	30.40	0.00	10 mm	19010	1	1:8.3	back	0.464	1.072	0.497	A29
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.00	10 mm	19010	3	1:2.76	back	0.409	1.059	0.433	
826.40	4132	UMTS 850	RMC	25.5	25.34	0.00	10 mm	19010	N/A	1:1	back	0.684	1.038	0.710	
836.60	4183	UMTS 850	RMC	25.5	25.33	0.01	10 mm	19010	N/A	1:1	back	0.690	1.040	0.718	
846.60	4233	UMTS 850	RMC	25.5	25.29	0.05	10 mm	19010	N/A	1:1	back	0.692	1.050	0.727	A31
1712.40	1312	UMTS 1750	RMC	24.5	24.45	-0.03	10 mm	19077	N/A	1:1	back	0.510	1.012	0.516	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.00	10 mm	19077	N/A	1:1	back	0.574	1.005	0.577	
1752.60	1513	UMTS 1750	RMC	24.5	24.46	0.00	10 mm	19077	N/A	1:1	back	0.603	1.009	0.608	A32
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.04	10 mm	19010	N/A	1:1	back	0.470	1.062	0.499	A33
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 71 of 105	

**Table 11-23  
LTE FDD Body-Worn SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.03	0	19093	QPSK	1	25	10 mm	back	1:1	0.557	1.000	0.557	A35
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.03	1	19093	QPSK	25	25	10 mm	back	1:1	0.343	1.107	0.380	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	-0.07	0	19093	QPSK	1	0	10 mm	back	1:1	0.579	1.040	0.602	A37
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.03	1	19093	QPSK	25	0	10 mm	back	1:1	0.358	1.042	0.373	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.01	0	19093	QPSK	1	25	10 mm	back	1:1	0.607	1.035	0.628	A39
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.08	1	19093	QPSK	25	25	10 mm	back	1:1	0.400	1.007	0.403	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.00	0	19085	QPSK	1	0	10 mm	back	1:1	0.579	1.021	0.591	A40
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.02	1	19085	QPSK	36	37	10 mm	back	1:1	0.357	1.026	0.366	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.7	24.28	-0.11	0	19085	QPSK	1	99	10 mm	back	1:1	0.631	1.102	0.695	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.60	-0.03	0	19085	QPSK	1	99	10 mm	back	1:1	0.675	1.023	0.691	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	-0.10	0	19085	QPSK	1	0	10 mm	back	1:1	0.751	1.000	0.751	A42
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.01	1	19085	QPSK	50	25	10 mm	back	1:1	0.524	1.023	0.536	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.03	0	19085	QPSK	1	0	10 mm	back	1:1	0.501	1.000	0.501	A43
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	-0.02	1	19085	QPSK	50	25	10 mm	back	1:1	0.473	1.007	0.476	
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	0.08	0	19176	QPSK	1	25	10 mm	back	1:1	0.873	1.033	0.902	A45
2310.00	27710	Mid	LTE Band 30	10	24.2	23.80	0.04	1	19176	QPSK	25	0	10 mm	back	1:1	0.629	1.096	0.689	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.77	-0.03	1	19176	QPSK	50	0	10 mm	back	1:1	0.622	1.104	0.687	
2535.00	21100	Mid	LTE Band 7	20	23.7	23.70	-0.05	0	19085	QPSK	1	50	10 mm	back	1:1	0.600	1.000	0.600	A47
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.03	1	19085	QPSK	50	0	10 mm	back	1:1	0.464	1.038	0.482	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-24  
LTE FDD Band 5 Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.02	0	19085	QPSK	1	0	10 mm	back	1:1	0.584	1.023	0.597	A41
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.15	0.01	0	19085	QPSK	1	0	10 mm	back	1:1	0.551	1.084	0.597	
2 CC Uplink	SCC	829.30	20453		LTE Band 5 (Cell)	5						QPSK	1	24	10 mm	back					
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.02	1	19085	QPSK	25	12	10 mm	back	1:1	0.373	1.009	0.376	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-25  
LTE TDD Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.18	0.02	0	19085	QPSK	1	0	10 mm	back	1:1.58	0.502	1.005	0.505	A48
2 CC Uplink	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	24.88	-0.03	0	19085	QPSK	1	0	10 mm	back	1:1.58	0.466	1.076	0.501	
2 CC Uplink	SCC	2529.70	39987		LTE Band 41	20						QPSK	1	99	10 mm	back					
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.01	1	19085	QPSK	50	25	10 mm	back	1:1.58	0.446	1.038	0.463	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 72 of 105	

**Table 11-26  
DTS SISO Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	19.5	19.46	0.02	10 mm	1	19173	1	back	99.2	0.408	0.301	1.009	1.008	0.306	A49
2412	1	802.11b	DSSS	22	19.5	19.49	0.12	10 mm	2	19173	1	back	99.2	0.238	0.208	1.002	1.008	0.210	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-27  
NII SISO Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5300	60	802.11a	OFDM	20	15.0	14.97	-0.03	10 mm	1	19200	6	back	98.3	0.498	0.234	1.007	1.017	0.240	
5300	60	802.11a	OFDM	20	15.0	14.63	0.02	10 mm	2	19200	6	back	99.3	0.677	0.326	1.089	1.007	0.357	
5620	124	802.11a	OFDM	20	15.0	14.93	0.09	10 mm	1	19200	6	back	98.3	1.168	0.537	1.016	1.017	0.555	
5600	120	802.11a	OFDM	20	15.0	14.71	0.07	10 mm	2	19200	6	back	99.3	0.741	0.312	1.069	1.007	0.336	
5745	149	802.11a	OFDM	20	15.0	14.88	-0.03	10 mm	1	19200	6	back	98.3	1.114	0.522	1.028	1.017	0.546	
5745	149	802.11a	OFDM	20	15.0	14.76	0.01	10 mm	2	19200	6	back	99.3	0.720	0.325	1.057	1.007	0.346	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram						



**Table 11-28  
NII MIMO Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)			(W/kg)	
5300	60	802.11n	OFDM	20	15.0	14.70	15.0	14.43	0.07	10 mm	MIMO	19200	13	back	98.3	1.184	0.524	1.140	1.017	0.608	
5600	120	802.11n	OFDM	20	15.0	14.66	15.0	14.53	0.15	10 mm	MIMO	19200	13	back	98.3	1.463	0.697	1.114	1.017	0.790	A51
5620	124	802.11n	OFDM	20	15.0	14.70	15.0	14.44	0.02	10 mm	MIMO	19200	13	back	98.3	1.548	0.869	1.138	1.017	0.774	
5720	144	802.11n	OFDM	20	15.0	14.62	15.0	14.53	0.05	10 mm	MIMO	19200	13	back	98.3	1.387	0.606	1.114	1.017	0.687	
5745	149	802.11n	OFDM	20	15.0	14.70	15.0	14.50	0.05	10 mm	MIMO	19200	13	back	98.3	1.340	0.613	1.122	1.017	0.699	
5785	157	802.11n	OFDM	20	15.0	14.58	15.0	14.55	0.13	10 mm	MIMO	19200	13	back	98.3	1.401	0.632	1.109	1.017	0.713	
5825	165	802.11n	OFDM	20	15.0	14.53	15.0	14.54	-0.03	10 mm	MIMO	19200	13	back	98.3	1.235	0.593	1.114	1.017	0.672	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: To achieve the 5GHz WLAN 18.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 15.0 dBm.

**Table 11-29  
DSS Body-Worn SAR**



MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2402	0	Bluetooth	FHSS	13.0	12.10	0.09	10 mm	19176	1	back	77.9	0.028	1.230	1.284	0.044	A53
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram					

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 73 of 105	

# 11.3 Standalone Hotspot SAR Data

**Table 11-30  
GPRS/UMTS/CDMA Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.21	-0.03	10 mm	19036	N/A	1:1	back	0.683	1.069	0.730	A23
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.21	-0.07	10 mm	19036	N/A	1:1	front	0.568	1.069	0.607	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.21	-0.03	10 mm	19036	N/A	1:1	bottom	0.340	1.069	0.363	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.21	0.09	10 mm	19036	N/A	1:1	right	0.111	1.069	0.119	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.21	-0.04	10 mm	19036	N/A	1:1	left	0.193	1.069	0.206	
824.70	1013	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.39	0.03	10 mm	19036	N/A	1:1	back	0.643	1.026	0.660	
836.52	384	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.30	0.01	10 mm	19036	N/A	1:1	back	0.655	1.047	0.686	
848.31	777	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.22	0.06	10 mm	19036	N/A	1:1	back	0.681	1.067	0.727	A25
836.52	384	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.30	-0.11	10 mm	19036	N/A	1:1	front	0.609	1.047	0.638	
836.52	384	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.30	-0.03	10 mm	19036	N/A	1:1	bottom	0.306	1.047	0.320	
836.52	384	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.30	0.06	10 mm	19036	N/A	1:1	right	0.101	1.047	0.106	
836.52	384	CDMABC0 (§22H)	EVDO Rev. 0	25.5	25.30	0.03	10 mm	19036	N/A	1:1	left	0.190	1.047	0.199	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.69	0.03	10 mm	19036	N/A	1:1	back	0.455	1.002	0.456	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.69	0.08	10 mm	19036	N/A	1:1	front	0.451	1.002	0.452	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.69	-0.02	10 mm	19036	N/A	1:1	bottom	0.588	1.002	0.589	A27
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.69	0.11	10 mm	19036	N/A	1:1	left	0.241	1.002	0.241	
824.20	128	GSM850	GPRS	32.7	32.48	0.01	10 mm	19010	2	1:4.15	back	0.632	1.052	0.665	
836.60	190	GSM850	GPRS	32.7	32.43	0.04	10 mm	19010	2	1:4.15	back	0.645	1.064	0.686	
848.80	251	GSM850	GPRS	32.7	32.32	0.01	10 mm	19010	2	1:4.15	back	0.695	1.091	0.758	A28
836.60	190	GSM850	GPRS	32.7	32.43	-0.05	10 mm	19010	2	1:4.15	front	0.580	1.064	0.617	
836.60	190	GSM850	GPRS	32.7	32.43	0.01	10 mm	19010	2	1:4.15	bottom	0.288	1.064	0.306	
836.60	190	GSM850	GPRS	32.7	32.43	-0.01	10 mm	19010	2	1:4.15	right	0.096	1.064	0.102	
836.60	190	GSM850	GPRS	32.7	32.43	0.01	10 mm	19010	2	1:4.15	left	0.201	1.064	0.214	
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.00	10 mm	19010	3	1:2.76	back	0.409	1.059	0.433	
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.03	10 mm	19010	3	1:2.76	front	0.385	1.059	0.408	
1880.00	661	GSM 1900	GPRS	27.0	26.75	-0.04	10 mm	19010	3	1:2.76	bottom	0.469	1.059	0.497	A30
1880.00	661	GSM 1900	GPRS	27.0	26.75	0.03	10 mm	19010	3	1:2.76	left	0.195	1.059	0.207	
826.40	4132	UMTS 850	RMC	25.5	25.34	0.00	10 mm	19010	N/A	1:1	back	0.684	1.038	0.710	
836.60	4183	UMTS 850	RMC	25.5	25.33	0.01	10 mm	19010	N/A	1:1	back	0.690	1.040	0.718	
846.60	4233	UMTS 850	RMC	25.5	25.29	0.05	10 mm	19010	N/A	1:1	back	0.692	1.050	0.727	A31
836.60	4183	UMTS 850	RMC	25.5	25.33	-0.02	10 mm	19010	N/A	1:1	front	0.634	1.040	0.659	
836.60	4183	UMTS 850	RMC	25.5	25.33	-0.02	10 mm	19010	N/A	1:1	bottom	0.335	1.040	0.348	
836.60	4183	UMTS 850	RMC	25.5	25.33	-0.01	10 mm	19010	N/A	1:1	right	0.117	1.040	0.122	
836.60	4183	UMTS 850	RMC	25.5	25.33	-0.04	10 mm	19010	N/A	1:1	left	0.235	1.040	0.244	
1712.40	1312	UMTS 1750	RMC	24.5	24.45	-0.03	10 mm	19077	N/A	1:1	back	0.510	1.012	0.516	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.00	10 mm	19077	N/A	1:1	back	0.574	1.005	0.577	
1752.60	1513	UMTS 1750	RMC	24.5	24.46	0.00	10 mm	19077	N/A	1:1	back	0.603	1.009	0.608	A32
1732.40	1412	UMTS 1750	RMC	24.5	24.48	0.00	10 mm	19077	N/A	1:1	front	0.474	1.005	0.476	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	-0.03	10 mm	19077	N/A	1:1	bottom	0.312	1.005	0.314	
1732.40	1412	UMTS 1750	RMC	24.5	24.48	-0.02	10 mm	19077	N/A	1:1	left	0.194	1.005	0.195	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.04	10 mm	19010	N/A	1:1	back	0.470	1.062	0.499	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	-0.04	10 mm	19010	N/A	1:1	front	0.450	1.062	0.478	
1880.00	9400	UMTS 1900	RMC	24.7	24.44	-0.05	10 mm	19010	N/A	1:1	bottom	0.565	1.062	0.600	A34
1880.00	9400	UMTS 1900	RMC	24.7	24.44	0.00	10 mm	19010	N/A	1:1	left	0.223	1.062	0.237	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body					
Spatial Peak										1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population										averaged over 1 gram					

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 74 of 105	

**Table 11-31  
LTE Band 12 Hotspot SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.03	0	19093	QPSK	1	25	10 mm	back	1:1	0.557	1.000	0.557	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.03	1	19093	QPSK	25	25	10 mm	back	1:1	0.343	1.107	0.380	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.02	0	19093	QPSK	1	25	10 mm	front	1:1	0.568	1.000	0.568	A36
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.03	1	19093	QPSK	25	25	10 mm	front	1:1	0.345	1.107	0.382	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.07	0	19093	QPSK	1	25	10 mm	bottom	1:1	0.267	1.000	0.267	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.08	1	19093	QPSK	25	25	10 mm	bottom	1:1	0.165	1.107	0.183	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.10	0	19093	QPSK	1	25	10 mm	right	1:1	0.129	1.000	0.129	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	-0.04	1	19093	QPSK	25	25	10 mm	right	1:1	0.082	1.107	0.091	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.01	0	19093	QPSK	1	25	10 mm	left	1:1	0.217	1.000	0.217	
707.50	23095	Mid	LTE Band 12	10	24.5	24.06	0.04	1	19093	QPSK	25	25	10 mm	left	1:1	0.118	1.107	0.131	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-32  
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	-0.07	0	19093	QPSK	1	0	10 mm	back	1:1	0.579	1.040	0.602	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.03	1	19093	QPSK	25	0	10 mm	back	1:1	0.358	1.042	0.373	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	0.06	0	19093	QPSK	1	0	10 mm	front	1:1	0.581	1.040	0.604	A38
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.00	1	19093	QPSK	25	0	10 mm	front	1:1	0.358	1.042	0.373	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	-0.06	0	19093	QPSK	1	0	10 mm	bottom	1:1	0.322	1.040	0.335	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	0.00	1	19093	QPSK	25	0	10 mm	bottom	1:1	0.194	1.042	0.202	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	-0.03	0	19093	QPSK	1	0	10 mm	right	1:1	0.114	1.040	0.119	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	-0.06	1	19093	QPSK	25	0	10 mm	right	1:1	0.070	1.042	0.073	
782.00	23230	Mid	LTE Band 13	10	25.5	25.33	-0.03	0	19093	QPSK	1	0	10 mm	left	1:1	0.204	1.040	0.212	
782.00	23230	Mid	LTE Band 13	10	24.5	24.32	-0.04	1	19093	QPSK	25	0	10 mm	left	1:1	0.132	1.042	0.138	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-33  
LTE Band 14 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.01	0	19093	QPSK	1	25	10 mm	back	1:1	0.607	1.035	0.628	A39
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.08	1	19093	QPSK	25	25	10 mm	back	1:1	0.400	1.007	0.403	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.05	0	19093	QPSK	1	25	10 mm	front	1:1	0.549	1.035	0.568	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.10	1	19093	QPSK	25	25	10 mm	front	1:1	0.359	1.007	0.362	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.10	0	19093	QPSK	1	25	10 mm	bottom	1:1	0.308	1.035	0.319	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.05	1	19093	QPSK	25	25	10 mm	bottom	1:1	0.201	1.007	0.202	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.03	0	19093	QPSK	1	25	10 mm	right	1:1	0.121	1.035	0.125	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	-0.02	1	19093	QPSK	25	25	10 mm	right	1:1	0.075	1.007	0.076	
793.00	23330	Mid	LTE Band 14	10	25.5	25.35	-0.16	0	19093	QPSK	1	25	10 mm	left	1:1	0.209	1.035	0.216	
793.00	23330	Mid	LTE Band 14	10	24.5	24.47	0.03	1	19093	QPSK	25	25	10 mm	left	1:1	0.136	1.007	0.137	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFV350A		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 75 of 105	

**Table 11-34  
LTE Band 26 (Cell) Hotspot SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.00	0	19085	QPSK	1	0	10 mm	back	1:1	0.579	1.021	0.591	A40
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.02	1	19085	QPSK	36	37	10 mm	back	1:1	0.357	1.026	0.366	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.00	0	19085	QPSK	1	0	10 mm	front	1:1	0.533	1.021	0.544	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	-0.06	1	19085	QPSK	36	37	10 mm	front	1:1	0.334	1.026	0.343	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.00	0	19085	QPSK	1	0	10 mm	bottom	1:1	0.314	1.021	0.321	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	-0.08	1	19085	QPSK	36	37	10 mm	bottom	1:1	0.184	1.026	0.189	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	-0.01	0	19085	QPSK	1	0	10 mm	right	1:1	0.106	1.021	0.108	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.00	1	19085	QPSK	36	37	10 mm	right	1:1	0.064	1.026	0.066	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.41	0.01	0	19085	QPSK	1	0	10 mm	left	1:1	0.193	1.021	0.197	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.39	0.01	1	19085	QPSK	36	37	10 mm	left	1:1	0.122	1.026	0.125	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-35  
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
		MHz	Ch.																		
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.02	0	19085	QPSK	1	0	10 mm	back	1:1	0.584	1.023	0.597	A41
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.15	0.01	0	19085	QPSK	1	0	10 mm	back	1:1	0.551	1.084	0.597	
2 CC Uplink	SCC	829.30	20453		LTE Band 5 (Cell)	5															
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.02	1	19085	QPSK	25	12	10 mm	back	1:1	0.373	1.009	0.376	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	0.01	0	19085	QPSK	1	0	10 mm	front	1:1	0.545	1.023	0.558	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	0.01	1	19085	QPSK	25	12	10 mm	front	1:1	0.349	1.009	0.352	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.03	0	19085	QPSK	1	0	10 mm	bottom	1:1	0.304	1.023	0.311	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	-0.08	1	19085	QPSK	25	12	10 mm	bottom	1:1	0.192	1.009	0.194	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	0.01	0	19085	QPSK	1	0	10 mm	right	1:1	0.105	1.023	0.107	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	-0.07	1	19085	QPSK	25	12	10 mm	right	1:1	0.066	1.009	0.067	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.40	-0.04	0	19085	QPSK	1	0	10 mm	left	1:1	0.198	1.023	0.203	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.46	-0.04	1	19085	QPSK	25	12	10 mm	left	1:1	0.128	1.009	0.129	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-36  
LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.7	24.28	-0.11	0	19085	QPSK	1	99	10 mm	back	1:1	0.631	1.102	0.695	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.60	-0.03	0	19085	QPSK	1	99	10 mm	back	1:1	0.675	1.023	0.691	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	-0.10	0	19085	QPSK	1	0	10 mm	back	1:1	0.751	1.000	0.751	A42
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.01	1	19085	QPSK	50	25	10 mm	back	1:1	0.524	1.023	0.536	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.00	0	19085	QPSK	1	0	10 mm	front	1:1	0.608	1.000	0.608	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.05	1	19085	QPSK	50	25	10 mm	front	1:1	0.423	1.023	0.433	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.10	0	19085	QPSK	1	0	10 mm	bottom	1:1	0.453	1.000	0.453	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.04	1	19085	QPSK	50	25	10 mm	bottom	1:1	0.402	1.023	0.411	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.70	0.00	0	19085	QPSK	1	0	10 mm	left	1:1	0.270	1.000	0.270	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.7	23.60	-0.02	1	19085	QPSK	50	25	10 mm	left	1:1	0.204	1.023	0.209	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 76 of 105	

**Table 11-37  
LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.03	0	19085	QPSK	1	0	10 mm	back	1:1	0.501	1.000	0.501	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	-0.02	1	19085	QPSK	50	25	10 mm	back	1:1	0.473	1.007	0.476	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.17	0	19085	QPSK	1	0	10 mm	front	1:1	0.475	1.000	0.475	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.18	1	19085	QPSK	50	25	10 mm	front	1:1	0.450	1.007	0.453	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.7	24.31	0.19	0	19085	QPSK	1	0	10 mm	bottom	1:1	0.542	1.094	0.593	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.7	24.40	-0.04	0	19085	QPSK	1	50	10 mm	bottom	1:1	0.570	1.072	0.611	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.07	0	19085	QPSK	1	0	10 mm	bottom	1:1	0.667	1.000	0.667	A44
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.08	1	19085	QPSK	50	25	10 mm	bottom	1:1	0.502	1.007	0.506	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.09	0	19085	QPSK	1	0	10 mm	left	1:1	0.263	1.000	0.263	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.67	0.04	1	19085	QPSK	50	25	10 mm	left	1:1	0.247	1.007	0.249	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									



**Table 11-38  
LTE Band 30 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	0.08	0	19176	QPSK	1	25	10 mm	back	1:1	0.873	1.033	0.902	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.80	0.04	1	19176	QPSK	25	0	10 mm	back	1:1	0.629	1.096	0.689	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.77	-0.03	1	19176	QPSK	50	0	10 mm	back	1:1	0.622	1.104	0.687	
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	-0.09	0	19176	QPSK	1	25	10 mm	front	1:1	0.663	1.033	0.685	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.80	-0.03	1	19176	QPSK	25	0	10 mm	front	1:1	0.471	1.096	0.516	
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	-0.01	0	19176	QPSK	1	25	10 mm	bottom	1:1	1.050	1.033	1.085	A46
2310.00	27710	Mid	LTE Band 30	10	24.2	23.80	-0.06	1	19176	QPSK	25	0	10 mm	bottom	1:1	0.744	1.096	0.815	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.77	0.00	1	19176	QPSK	50	0	10 mm	bottom	1:1	0.740	1.104	0.817	
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	0.19	0	19176	QPSK	1	25	10 mm	left	1:1	0.163	1.033	0.168	
2310.00	27710	Mid	LTE Band 30	10	24.2	23.80	-0.08	1	19176	QPSK	25	0	10 mm	left	1:1	0.112	1.096	0.123	
2310.00	27710	Mid	LTE Band 30	10	25.2	25.06	0.08	0	19176	QPSK	1	25	10 mm	bottom	1:1	1.050	1.033	1.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry represents variability measurement.

**Table 11-39  
LTE Band 7 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2535.00	21100	Mid	LTE Band 7	20	23.7	23.70	-0.05	0	19085	QPSK	1	50	10 mm	back	1:1	0.600	1.000	0.600	A47
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.03	1	19085	QPSK	50	0	10 mm	back	1:1	0.464	1.038	0.482	
2535.00	21100	Mid	LTE Band 7	20	23.7	23.70	-0.05	0	19085	QPSK	1	50	10 mm	front	1:1	0.348	1.000	0.348	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.01	1	19085	QPSK	50	0	10 mm	front	1:1	0.280	1.038	0.291	
2535.00	21100	Mid	LTE Band 7	20	23.7	23.70	0.01	0	19085	QPSK	1	50	10 mm	bottom	1:1	0.487	1.000	0.487	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	-0.02	1	19085	QPSK	50	0	10 mm	bottom	1:1	0.375	1.038	0.389	
2535.00	21100	Mid	LTE Band 7	20	23.7	23.70	0.05	0	19085	QPSK	1	50	10 mm	left	1:1	0.100	1.000	0.100	
2510.00	20850	Low	LTE Band 7	20	22.7	22.54	0.07	1	19085	QPSK	50	0	10 mm	left	1:1	0.077	1.038	0.080	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 77 of 105	





**Table 11-40  
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
		MHz	Ch.																		
1 CC Uplink	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.18	0.02	0	19085	QPSK	1	0	10 mm	back	1:1.58	0.502	1.005	0.505	A48
2 CC Uplink	PCC	2549.50	40185	Low-Md	LTE Band 41	20	25.2	24.88	-0.03	0	19085	QPSK	1	0	10 mm	back	1:1.58	0.466	1.076	0.501	
2 CC Uplink	SCC	2529.70	39987		LTE Band 41	20		0	QPSK	1		99	10 mm	back							
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.01	1	19085	QPSK	50	25	10 mm	back	1:1.58	0.446	1.038	0.463	
1 CC Uplink	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.18	0.00	0	19085	QPSK	1	0	10 mm	front	1:1.58	0.269	1.005	0.270	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.01	1	19085	QPSK	50	25	10 mm	front	1:1.58	0.246	1.038	0.255	
1 CC Uplink	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.18	-0.04	0	19085	QPSK	1	0	10 mm	bottom	1:1.58	0.382	1.005	0.384	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	0.01	1	19085	QPSK	50	25	10 mm	bottom	1:1.58	0.366	1.038	0.380	
1 CC Uplink	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.18	0.07	0	19085	QPSK	1	0	10 mm	left	1:1.58	0.077	1.005	0.077	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.2	24.04	-0.04	1	19085	QPSK	50	25	10 mm	left	1:1.58	0.067	1.038	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-41  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan (W/kg)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #	
																			MHz
2412	1	802.11b	DSSS	22	19.5	19.46	0.02	10 mm	1	19173	1	back	99.2	0.408	-	1.009	1.008	-	
2412	1	802.11b	DSSS	22	19.5	19.46	0.15	10 mm	1	19173	1	front	99.2	0.275	-	1.009	1.008	-	
2412	1	802.11b	DSSS	22	19.5	19.46	0.03	10 mm	1	19173	1	top	99.2	0.145	-	1.009	1.008	-	
2412	1	802.11b	DSSS	22	19.5	19.46	0.12	10 mm	1	19173	1	left	99.2	0.409	0.317	1.009	1.008	0.322	A50
2412	1	802.11b	DSSS	22	19.5	19.49	0.12	10 mm	2	19173	1	back	99.2	0.238	-	1.002	1.008	-	
2412	1	802.11b	DSSS	22	19.5	19.49	0.12	10 mm	2	19173	1	front	99.2	0.252	0.203	1.002	1.008	0.205	
2412	1	802.11b	DSSS	22	19.5	19.49	0.08	10 mm	2	19173	1	top	99.2	0.220	-	1.002	1.008	-	
2412	1	802.11b	DSSS	22	19.5	19.49	0.10	10 mm	2	19173	1	left	99.2	0.046	-	1.002	1.008	-	
5240	48	802.11a	OFDM	20	15.0	14.84	0.15	10 mm	1	19200	6	back	98.3	0.396	0.175	1.038	1.017	0.185	
5240	48	802.11a	OFDM	20	15.0	14.84	-0.11	10 mm	1	19200	6	front	98.3	0.021	-	1.038	1.017	-	
5240	48	802.11a	OFDM	20	15.0	14.84	0.18	10 mm	1	19200	6	top	98.3	0.107	-	1.038	1.017	-	
5240	48	802.11a	OFDM	20	15.0	14.84	0.10	10 mm	1	19200	6	left	98.3	0.184	-	1.038	1.017	-	
5180	36	802.11a	OFDM	20	15.0	14.66	0.06	10 mm	2	19200	6	back	99.3	0.691	0.321	1.081	1.007	0.349	
5180	36	802.11a	OFDM	20	15.0	14.66	0.10	10 mm	2	19200	6	front	99.3	0.234	-	1.081	1.007	-	
5180	36	802.11a	OFDM	20	15.0	14.66	0.15	10 mm	2	19200	6	top	99.3	0.444	-	1.081	1.007	-	
5180	36	802.11a	OFDM	20	15.0	14.66	0.15	10 mm	2	19200	6	left	99.3	0.181	-	1.081	1.007	-	
5745	149	802.11a	OFDM	20	15.0	14.88	-0.03	10 mm	1	19200	6	back	98.3	1.114	0.522	1.028	1.017	0.546	
5745	149	802.11a	OFDM	20	15.0	14.88	0.10	10 mm	1	19200	6	front	98.3	0.135	-	1.028	1.017	-	
5745	149	802.11a	OFDM	20	15.0	14.88	-0.16	10 mm	1	19200	6	top	98.3	0.210	-	1.028	1.017	-	
5745	149	802.11a	OFDM	20	15.0	14.88	-0.17	10 mm	1	19200	6	left	98.3	0.617	0.260	1.028	1.017	0.272	
5745	149	802.11a	OFDM	20	15.0	14.76	0.01	10 mm	2	19200	6	back	99.3	0.720	0.325	1.057	1.007	0.346	
5745	149	802.11a	OFDM	20	15.0	14.76	0.00	10 mm	2	19200	6	front	99.3	0.119	-	1.057	1.007	-	
5745	149	802.11a	OFDM	20	15.0	14.76	0.11	10 mm	2	19200	6	top	99.3	0.499	-	1.057	1.007	-	
5745	149	802.11a	OFDM	20	15.0	14.76	0.00	10 mm	2	19200	6	left	99.3	0.111	-	1.057	1.007	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 78 of 105



**Table 11-42  
WLAN MIMO Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (1g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) [W/kg]	Plot #
MHz	Ch.																				
5240	48	802.11n	OFDM	20	15.0	14.71	15.0	14.35	0.00	10 mm	MIMO	19200	13	back	98.3	1.123	0.497	1.161	1.017	0.587	
5240	48	802.11n	OFDM	20	15.0	14.71	15.0	14.35	-0.10	10 mm	MIMO	19200	13	front	98.3	0.192	-	1.161	1.017	-	
5240	48	802.11n	OFDM	20	15.0	14.71	15.0	14.35	0.16	10 mm	MIMO	19200	13	top	98.3	0.343	0.163	1.161	1.017	0.192	
5240	48	802.11n	OFDM	20	15.0	14.71	15.0	14.35	0.18	10 mm	MIMO	19200	13	left	98.3	0.313	-	1.161	1.017	-	
5745	149	802.11n	OFDM	20	15.0	14.70	15.0	14.50	0.05	10 mm	MIMO	19200	13	back	98.3	1.340	0.613	1.122	1.017	0.699	
5785	157	802.11n	OFDM	20	15.0	14.58	15.0	14.55	0.13	10 mm	MIMO	19200	13	back	98.3	1.401	0.632	1.109	1.017	0.713	A52
5825	165	802.11n	OFDM	20	15.0	14.53	15.0	14.54	-0.03	10 mm	MIMO	19200	13	back	98.3	1.235	0.593	1.114	1.017	0.672	
5745	149	802.11n	OFDM	20	15.0	14.70	15.0	14.50	0.16	10 mm	MIMO	19200	13	front	98.3	0.141	-	1.122	1.017	-	
5745	149	802.11n	OFDM	20	15.0	14.70	15.0	14.50	0.14	10 mm	MIMO	19200	13	top	98.3	0.478	0.162	1.122	1.017	0.185	
5745	149	802.11n	OFDM	20	15.0	14.70	15.0	14.50	0.17	10 mm	MIMO	19200	13	left	98.3	0.476	-	1.122	1.017	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: To achieve the 5GHz WLAN 18 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 15.0 dBm.

**Table 11-43  
DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) [W/kg]	Plot #
MHz	Ch.											(W/kg)				
2402	0	Bluetooth	FHSS	13.0	12.10	0.09	10 mm	19176	1	back	77.9	0.028	1.230	1.284	0.044	A53
2402	0	Bluetooth	FHSS	13.0	12.10	0.11	10 mm	19176	1	front	77.9	0.022	1.230	1.284	0.035	
2402	0	Bluetooth	FHSS	13.0	12.10	-0.08	10 mm	19176	1	top	77.9	0.016	1.230	1.284	0.025	
2402	0	Bluetooth	FHSS	13.0	12.10	0.00	10 mm	19176	1	left	77.9	0.026	1.230	1.284	0.041	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 79 of 105

## 11.4 Standalone Phablet SAR Data



**Table 11-44  
WLAN Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5300	60	802.11a	OFDM	20	15.0	14.97	-0.10	0 mm	1	19200	6	back	98.3	16.121	0.769	1.007	1.017	0.788	
5300	60	802.11a	OFDM	20	15.0	14.97	0.17	0 mm	1	19200	6	front	98.3	0.807	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.97	-0.17	0 mm	1	19200	6	top	98.3	1.484	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.97	0.10	0 mm	1	19200	6	left	98.3	2.913	-	1.007	1.017	-	
5300	60	802.11a	OFDM	20	15.0	14.63	-0.12	0 mm	2	19200	6	back	99.3	11.525	1.350	1.089	1.007	1.480	
5300	60	802.11a	OFDM	20	15.0	14.63	0.10	0 mm	2	19200	6	front	99.3	3.137	-	1.089	1.007	-	
5300	60	802.11a	OFDM	20	15.0	14.63	0.10	0 mm	2	19200	6	top	99.3	8.153	0.786	1.089	1.007	0.862	
5300	60	802.11a	OFDM	20	15.0	14.63	0.10	0 mm	2	19200	6	left	99.3	0.987	-	1.089	1.007	-	
5620	124	802.11a	OFDM	20	15.0	14.93	-0.12	0 mm	1	19200	6	back	98.3	31.377	1.360	1.016	1.017	1.405	A54
5620	124	802.11a	OFDM	20	15.0	14.93	-0.15	0 mm	1	19200	6	front	98.3	1.974	-	1.016	1.017	-	
5620	124	802.11a	OFDM	20	15.0	14.93	-0.19	0 mm	1	19200	6	top	98.3	2.924	-	1.016	1.017	-	
5620	124	802.11a	OFDM	20	15.0	14.93	0.10	0 mm	1	19200	6	left	98.3	7.027	0.744	1.016	1.017	0.769	
5600	120	802.11a	OFDM	20	15.0	14.71	0.12	0 mm	2	19200	6	back	99.3	8.620	1.060	1.069	1.007	1.141	
5600	120	802.11a	OFDM	20	15.0	14.71	0.10	0 mm	2	19200	6	front	99.3	1.483	-	1.069	1.007	-	
5600	120	802.11a	OFDM	20	15.0	14.71	0.10	0 mm	2	19200	6	top	99.3	3.947	0.465	1.069	1.007	0.501	
5600	120	802.11a	OFDM	20	15.0	14.71	0.10	0 mm	2	19200	6	left	99.3	0.821	-	1.069	1.007	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

## 11.5 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Publication 616217 D04v01r02, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 80 of 105	

11. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
12. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.

**GSM Test Notes:**



1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
4. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

**CDMA Notes:**

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

**UMTS Notes:**

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.



<b>FCC ID:</b> ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 81 of 105	

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. For LTE Band 41 and LTE Band 5, per Fall TCB Workshop Notes, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 82 of 105

reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

7. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Bluetooth Notes**

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT BR tethering applications.

FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 83 of 105



## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 84 of 105



## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.160	0.684	0.700	0.844	0.860	1.544
	CDMA/EVDO BC0 (§22H)	0.161	0.684	0.700	0.845	0.861	1.545
	PCS CDMA/EVDO	0.146	0.684	0.700	0.830	0.846	1.530
	GSM/GPRS 850	0.160	0.684	0.700	0.844	0.860	1.544
	GSM/GPRS 1900	0.150	0.684	0.700	0.834	0.850	1.534
	UMTS 850	0.161	0.684	0.700	0.845	0.861	1.545
	UMTS 1750	0.120	0.684	0.700	0.804	0.820	1.504
	UMTS 1900	0.152	0.684	0.700	0.836	0.852	1.536
	LTE Band 12	0.117	0.684	0.700	0.801	0.817	1.501
	LTE Band 13	0.123	0.684	0.700	0.807	0.823	1.507
	LTE Band 14	0.122	0.684	0.700	0.806	0.822	1.506
	LTE Band 26 (Cell)	0.163	0.684	0.700	0.847	0.863	1.547
	LTE Band 5 (Cell)	0.133	0.684	0.700	0.817	0.833	1.517
	LTE Band 66 (AWS)	0.138	0.684	0.700	0.822	0.838	1.522
	LTE Band 25 (PCS)	0.165	0.684	0.700	0.849	0.865	<b>1.549</b>
	LTE Band 30	0.092	0.684	0.700	0.776	0.792	1.476
LTE Band 7	0.048	0.684	0.700	0.732	0.748	1.432	
LTE Band 41	0.032	0.684	0.700	0.716	0.732	1.416	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 85 of 105



**Table 12-2  
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.160	0.360	0.912	0.520	1.072	1.432
	CDMA/EVDO BC0 (§22H)	0.161	0.360	0.912	0.521	1.073	1.433
	PCS CDMA/EVDO	0.146	0.360	0.912	0.506	1.058	1.418
	GSM/GPRS 850	0.160	0.360	0.912	0.520	1.072	1.432
	GSM/GPRS 1900	0.150	0.360	0.912	0.510	1.062	1.422
	UMTS 850	0.161	0.360	0.912	0.521	1.073	1.433
	UMTS 1750	0.120	0.360	0.912	0.480	1.032	1.392
	UMTS 1900	0.152	0.360	0.912	0.512	1.064	1.424
	LTE Band 12	0.117	0.360	0.912	0.477	1.029	1.389
	LTE Band 13	0.123	0.360	0.912	0.483	1.035	1.395
	LTE Band 14	0.122	0.360	0.912	0.482	1.034	1.394
	LTE Band 26 (Cell)	0.163	0.360	0.912	0.523	1.075	1.435
	LTE Band 5 (Cell)	0.133	0.360	0.912	0.493	1.045	1.405
	LTE Band 66 (AWS)	0.138	0.360	0.912	0.498	1.050	1.410
	LTE Band 25 (PCS)	0.165	0.360	0.912	0.525	1.077	<b>1.437</b>
	LTE Band 30	0.092	0.360	0.912	0.452	1.004	1.364
LTE Band 7	0.048	0.360	0.912	0.408	0.960	1.320	
LTE Band 41	0.032	0.360	0.912	0.392	0.944	1.304	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 86 of 105



**Table 12-3**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	
		1	2	3	1+2	1+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.160	0.684	0.912	0.844	1.072
	CDMA/EVDO BC0 (§22H)	0.161	0.684	0.912	0.845	1.073
	PCS CDMA/EVDO	0.146	0.684	0.912	0.830	1.058
	GSM/GPRS 850	0.160	0.684	0.912	0.844	1.072
	GSM/GPRS 1900	0.150	0.684	0.912	0.834	1.062
	UMTS 850	0.161	0.684	0.912	0.845	1.073
	UMTS 1750	0.120	0.684	0.912	0.804	1.032
	UMTS 1900	0.152	0.684	0.912	0.836	1.064
	LTE Band 12	0.117	0.684	0.912	0.801	1.029
	LTE Band 13	0.123	0.684	0.912	0.807	1.035
	LTE Band 14	0.122	0.684	0.912	0.806	1.034
	LTE Band 26 (Cell)	0.163	0.684	0.912	0.847	1.075
	LTE Band 5 (Cell)	0.133	0.684	0.912	0.817	1.045
	LTE Band 66 (AWS)	0.138	0.684	0.912	0.822	1.050
	LTE Band 25 (PCS)	0.165	0.684	0.912	0.849	<b>1.077</b>
	LTE Band 30	0.092	0.684	0.912	0.776	1.004
LTE Band 7	0.048	0.684	0.912	0.732	0.960	
LTE Band 41	0.032	0.684	0.912	0.716	0.944	

Simult Tx	Configuration	CDMA BC10 (§90S) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC10 (§90S) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.096	0.684	0.772	<b>1.552</b>	Head SAR	Right Cheek	0.113	0.684	0.772	<b>1.569</b>
	Right Tilt	0.068	0.259	0.912	1.239		Right Tilt	0.085	0.259	0.912	1.256
	Left Cheek	0.160	0.102	0.318	0.580		Left Cheek	0.156	0.102	0.318	0.576
	Left Tilt	0.072	0.098	0.372	0.542		Left Tilt	0.084	0.098	0.372	0.554
Simult Tx	Configuration	CDMA BC0 (§22H) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (§22H) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.099	0.684	0.772	<b>1.555</b>	Head SAR	Right Cheek	0.106	0.684	0.772	<b>1.562</b>
	Right Tilt	0.061	0.259	0.912	1.232		Right Tilt	0.078	0.259	0.912	1.249
	Left Cheek	0.154	0.102	0.318	0.574		Left Cheek	0.161	0.102	0.318	0.581
	Left Tilt	0.069	0.098	0.372	0.539		Left Tilt	0.077	0.098	0.372	0.547
Simult Tx	Configuration	PCS CDMA SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.090	0.684	0.772	<b>1.546</b>	Head SAR	Right Cheek	0.130	0.684	0.772	<b>1.586</b>
	Right Tilt	0.057	0.259	0.912	1.228		Right Tilt	0.061	0.259	0.912	1.232
	Left Cheek	0.143	0.102	0.318	0.563		Left Cheek	0.146	0.102	0.318	0.566
	Left Tilt	0.093	0.098	0.372	0.563		Left Tilt	0.096	0.098	0.372	0.566

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1-ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 87 of 105	

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.091	0.684	0.772	1.547	Head SAR	Right Cheek	0.097	0.684	0.772	1.553
	Right Tilt	0.055	0.259	0.912	1.226		Right Tilt	0.065	0.259	0.912	1.236
	Left Cheek	0.132	0.102	0.318	0.552		Left Cheek	0.160	0.102	0.318	0.580
	Left Tilt	0.060	0.098	0.372	0.530		Left Tilt	0.070	0.098	0.372	0.540
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.104	0.684	0.772	1.560	Head SAR	Right Cheek	0.074	0.684	0.772	1.530
	Right Tilt	0.058	0.259	0.912	1.229		Right Tilt	0.048	0.259	0.912	1.219
	Left Cheek	0.150	0.102	0.318	0.570		Left Cheek	0.114	0.102	0.318	0.534
	Left Tilt	0.089	0.098	0.372	0.559		Left Tilt	0.070	0.098	0.372	0.540
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.099	0.684	0.772	1.555	Head SAR	Right Cheek	0.102	0.684	0.772	1.558
	Right Tilt	0.076	0.259	0.912	1.247		Right Tilt	0.062	0.259	0.912	1.233
	Left Cheek	0.161	0.102	0.318	0.581		Left Cheek	0.120	0.102	0.318	0.540
	Left Tilt	0.079	0.098	0.372	0.549		Left Tilt	0.075	0.098	0.372	0.545
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 12 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.112	0.684	0.772	1.568	Head SAR	Right Cheek	0.103	0.684	0.772	1.559
	Right Tilt	0.067	0.259	0.912	1.238		Right Tilt	0.053	0.259	0.912	1.224
	Left Cheek	0.152	0.102	0.318	0.572		Left Cheek	0.117	0.102	0.318	0.537
	Left Tilt	0.098	0.098	0.372	0.568		Left Tilt	0.056	0.098	0.372	0.526
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 14 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.097	0.684	0.772	1.553	Head SAR	Right Cheek	0.095	0.684	0.772	1.551
	Right Tilt	0.067	0.259	0.912	1.238		Right Tilt	0.062	0.259	0.912	1.233
	Left Cheek	0.123	0.102	0.318	0.543		Left Cheek	0.122	0.102	0.318	0.542
	Left Tilt	0.047	0.098	0.372	0.517		Left Tilt	0.058	0.098	0.372	0.528
Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.091	0.684	0.772	1.547	Head SAR	Right Cheek	0.087	0.684	0.772	1.543
	Right Tilt	0.057	0.259	0.912	1.228		Right Tilt	0.072	0.259	0.912	1.243
	Left Cheek	0.163	0.102	0.318	0.583		Left Cheek	0.133	0.102	0.318	0.553
	Left Tilt	0.076	0.098	0.372	0.546		Left Tilt	0.070	0.098	0.372	0.540
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.138	0.684	0.772	1.594	Head SAR	Right Cheek	0.119	0.684	0.772	1.575
	Right Tilt	0.088	0.259	0.912	1.259		Right Tilt	0.072	0.259	0.912	1.243
	Left Cheek	0.135	0.102	0.318	0.555		Left Cheek	0.165	0.102	0.318	0.585
	Left Tilt	0.093	0.098	0.372	0.563		Left Tilt	0.113	0.098	0.372	0.583



FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 88 of 105	

Simult Tx	Configuration	LTE Band 30 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Head SAR	Right Cheek	0.077	0.684	0.772	1.533	Head SAR	Right Cheek	0.038	0.684	0.772	1.494
	Right Tilt	0.043	0.259	0.912	1.214		Right Tilt	0.030	0.259	0.912	1.201
	Left Cheek	0.092	0.102	0.318	0.512		Left Cheek	0.048	0.102	0.318	0.468
	Left Tilt	0.029	0.098	0.372	0.499		Left Tilt	0.021	0.098	0.372	0.491

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	Right Cheek	0.030	0.684	0.772	1.486
	Right Tilt	0.018	0.259	0.912	1.189
	Left Cheek	0.032	0.102	0.318	0.452
	Left Tilt	0.012	0.098	0.372	0.482

**Table 12-4**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.160	0.280	0.440
	CDMA/EVDO BC0 (§22H)	0.161	0.280	0.441
	PCS CDMA/EVDO	0.146	0.280	0.426
	GSM/GPRS 850	0.160	0.280	0.440
	GSM/GPRS 1900	0.150	0.280	0.430
	UMTS 850	0.161	0.280	0.441
	UMTS 1750	0.120	0.280	0.400
	UMTS 1900	0.152	0.280	0.432
	LTE Band 12	0.117	0.280	0.397
	LTE Band 13	0.123	0.280	0.403
	LTE Band 14	0.122	0.280	0.402
	LTE Band 26 (Cell)	0.163	0.280	0.443
	LTE Band 5 (Cell)	0.133	0.280	0.413
	LTE Band 66 (AWS)	0.138	0.280	0.418
	LTE Band 25 (PCS)	0.165	0.280	0.445
	LTE Band 30	0.092	0.280	0.372
	LTE Band 7	0.048	0.280	0.328
	LTE Band 41	0.032	0.280	0.312

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 89 of 105	

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-5**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	CDMA BC10 (§90S)	0.681	0.306	0.210	0.987	0.891	1.197
	CDMA BC0 (§22H)	0.725	0.306	0.210	1.031	0.935	1.241
	PCS CDMA	0.499	0.306	0.210	0.805	0.709	1.015
	GSM/GPRS 850	0.758	0.306	0.210	1.064	0.968	1.274
	GSM/GPRS 1900	0.497	0.306	0.210	0.803	0.707	1.013
	UMTS 850	0.727	0.306	0.210	1.033	0.937	1.243
	UMTS 1750	0.608	0.306	0.210	0.914	0.818	1.124
	UMTS 1900	0.499	0.306	0.210	0.805	0.709	1.015
	LTE Band 12	0.557	0.306	0.210	0.863	0.767	1.073
	LTE Band 13	0.602	0.306	0.210	0.908	0.812	1.118
	LTE Band 14	0.628	0.306	0.210	0.934	0.838	1.144
	LTE Band 26 (Cell)	0.591	0.306	0.210	0.897	0.801	1.107
	LTE Band 5 (Cell)	0.597	0.306	0.210	0.903	0.807	1.113
	LTE Band 66 (AWS)	0.751	0.306	0.210	1.057	0.961	1.267
	LTE Band 25 (PCS)	0.501	0.306	0.210	0.807	0.711	1.017
	LTE Band 30	0.902	0.306	0.210	1.208	1.112	<b>1.418</b>
	LTE Band 7	0.600	0.306	0.210	0.906	0.810	1.116
LTE Band 41	0.505	0.306	0.210	0.811	0.715	1.021	



FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 90 of 105

**Table 12-6**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	
		1	2	3	1+2	1+3
Body-Worn	CDMA BC10 (§90S)	0.681	0.555	0.357	1.236	1.038
	CDMA BC0 (§22H)	0.725	0.555	0.357	1.280	1.082
	PCS CDMA	0.499	0.555	0.357	1.054	0.856
	GSM/GPRS 850	0.758	0.555	0.357	1.313	1.115
	GSM/GPRS 1900	0.497	0.555	0.357	1.052	0.854
	UMTS 850	0.727	0.555	0.357	1.282	1.084
	UMTS 1750	0.608	0.555	0.357	1.163	0.965
	UMTS 1900	0.499	0.555	0.357	1.054	0.856
	LTE Band 12	0.557	0.555	0.357	1.112	0.914
	LTE Band 13	0.602	0.555	0.357	1.157	0.959
	LTE Band 14	0.628	0.555	0.357	1.183	0.985
	LTE Band 26 (Cell)	0.591	0.555	0.357	1.146	0.948
	LTE Band 5 (Cell)	0.597	0.555	0.357	1.152	0.954
	LTE Band 66 (AWS)	0.751	0.555	0.357	1.306	1.108
	LTE Band 25 (PCS)	0.501	0.555	0.357	1.056	0.858
	LTE Band 30	0.902	0.555	0.357	<b>1.457</b>	1.259
LTE Band 7	0.600	0.555	0.357	1.155	0.957	
LTE Band 41	0.505	0.555	0.357	1.060	0.862	

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	CDMA BC10 (§90S)	0.681	0.790	1.471	N/A
	CDMA BC0 (§22H)	0.725	0.790	1.515	N/A
	PCS CDMA	0.499	0.790	1.289	N/A
	GSM/GPRS 850	0.758	0.790	<b>1.548</b>	N/A
	GSM/GPRS 1900	0.497	0.790	1.287	N/A
	UMTS 850	0.727	0.790	1.517	N/A
	UMTS 1750	0.608	0.790	1.398	N/A
	UMTS 1900	0.499	0.790	1.289	N/A
	LTE Band 12	0.557	0.790	1.347	N/A
	LTE Band 13	0.602	0.790	1.392	N/A
	LTE Band 14	0.628	0.790	1.418	N/A
	LTE Band 26 (Cell)	0.591	0.790	1.381	N/A
	LTE Band 5 (Cell)	0.597	0.790	1.387	N/A
	LTE Band 66 (AWS)	0.751	0.790	1.541	N/A
	LTE Band 25 (PCS)	0.501	0.790	1.291	N/A
	LTE Band 30	0.902	0.790	See Note 1	0.02
LTE Band 7	0.600	0.790	1.390	N/A	
LTE Band 41	0.505	0.790	1.295	N/A	

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLSR ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 91 of 105

**Table 12-7**



**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	CDMA BC10 (§90S)	0.681	0.306	0.357	0.987	1.038	1.344
	CDMA BC0 (§22H)	0.725	0.306	0.357	1.031	1.082	1.388
	PCS CDMA	0.499	0.306	0.357	0.805	0.856	1.162
	GSM/GPRS 850	0.758	0.306	0.357	1.064	1.115	1.421
	GSM/GPRS 1900	0.497	0.306	0.357	0.803	0.854	1.160
	UMTS 850	0.727	0.306	0.357	1.033	1.084	1.390
	UMTS 1750	0.608	0.306	0.357	0.914	0.965	1.271
	UMTS 1900	0.499	0.306	0.357	0.805	0.856	1.162
	LTE Band 12	0.557	0.306	0.357	0.863	0.914	1.220
	LTE Band 13	0.602	0.306	0.357	0.908	0.959	1.265
	LTE Band 14	0.628	0.306	0.357	0.934	0.985	1.291
	LTE Band 26 (Cell)	0.591	0.306	0.357	0.897	0.948	1.254
	LTE Band 5 (Cell)	0.597	0.306	0.357	0.903	0.954	1.260
	LTE Band 66 (AWS)	0.751	0.306	0.357	1.057	1.108	1.414
	LTE Band 25 (PCS)	0.501	0.306	0.357	0.807	0.858	1.164
	LTE Band 30	0.902	0.306	0.357	1.208	1.259	<b>1.565</b>
LTE Band 7	0.600	0.306	0.357	0.906	0.957	1.263	
LTE Band 41	0.505	0.306	0.357	0.811	0.862	1.168	

**Table 12-8**

**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.681	0.044	0.725
	CDMA BC0 (§22H)	0.725	0.044	0.769
	PCS CDMA	0.499	0.044	0.543
	GSM/GPRS 850	0.758	0.044	0.802
	GSM/GPRS 1900	0.497	0.044	0.541
	UMTS 850	0.727	0.044	0.771
	UMTS 1750	0.608	0.044	0.652
	UMTS 1900	0.499	0.044	0.543
	LTE Band 12	0.557	0.044	0.601
	LTE Band 13	0.602	0.044	0.646
	LTE Band 14	0.628	0.044	0.672
	LTE Band 26 (Cell)	0.591	0.044	0.635
	LTE Band 5 (Cell)	0.597	0.044	0.641
	LTE Band 66 (AWS)	0.751	0.044	0.795
	LTE Band 25 (PCS)	0.501	0.044	0.545
	LTE Band 30	0.902	0.044	<b>0.946</b>
LTE Band 7	0.600	0.044	0.644	
LTE Band 41	0.505	0.044	0.549	

FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b>			<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 92 of 105	

## 12.5 Hotspot SAR Simultaneous Transmission Analysis



Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

**Table 12-9  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	EVDO BC10 (§90S)	0.730	0.322	0.205	1.052	0.935	1.257
	EVDO BC0 (§22H)	0.727	0.322	0.205	1.049	0.932	1.254
	PCS EVDO	0.589	0.322	0.205	0.911	0.794	1.116
	GPRS 850	0.758	0.322	0.205	1.080	0.963	1.285
	GPRS 1900	0.497	0.322	0.205	0.819	0.702	1.024
	UMTS 850	0.727	0.322	0.205	1.049	0.932	1.254
	UMTS 1750	0.608	0.322	0.205	0.930	0.813	1.135
	UMTS 1900	0.600	0.322	0.205	0.922	0.805	1.127
	LTE Band 12	0.568	0.322	0.205	0.890	0.773	1.095
	LTE Band 13	0.604	0.322	0.205	0.926	0.809	1.131
	LTE Band 14	0.628	0.322	0.205	0.950	0.833	1.155
	LTE Band 26 (Cell)	0.591	0.322	0.205	0.913	0.796	1.118
	LTE Band 5 (Cell)	0.597	0.322	0.205	0.919	0.802	1.124
	LTE Band 66 (AWS)	0.751	0.322	0.205	1.073	0.956	1.278
	LTE Band 25 (PCS)	0.667	0.322	0.205	0.989	0.872	1.194
	LTE Band 30	1.085	0.322	0.205	<b>1.407</b>	1.290	See Table Below
	LTE Band 7	0.600	0.322	0.205	0.922	0.805	1.127
LTE Band 41	0.505	0.322	0.205	0.827	0.710	1.032	

Simult Tx	Configuration	LTE Band 30 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.902	0.322*	0.205*	<b>1.429</b>
	Front	0.685	0.322*	0.205	1.212
	Top	-	0.322*	0.205*	0.527
	Bottom	1.085	-	-	1.085
	Right	-	-	-	0.000
	Left	0.168	0.322	0.205*	0.695



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 93 of 105



**Table 12-10**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	
		1	2	3	1+2	1+3
Hotspot SAR	EVDO BC10 (§90S)	0.730	0.546	0.349	1.276	1.079
	EVDO BC0 (§22H)	0.727	0.546	0.349	1.273	1.076
	PCS EVDO	0.589	0.546	0.349	1.135	0.938
	GPRS 850	0.758	0.546	0.349	<b>1.304</b>	1.107
	GPRS 1900	0.497	0.546	0.349	1.043	0.846
	UMTS 850	0.727	0.546	0.349	1.273	1.076
	UMTS 1750	0.608	0.546	0.349	1.154	0.957
	UMTS 1900	0.600	0.546	0.349	1.146	0.949
	LTE Band 12	0.568	0.546	0.349	1.114	0.917
	LTE Band 13	0.604	0.546	0.349	1.150	0.953
	LTE Band 14	0.628	0.546	0.349	1.174	0.977
	LTE Band 26 (Cell)	0.591	0.546	0.349	1.137	0.940
	LTE Band 5 (Cell)	0.597	0.546	0.349	1.143	0.946
	LTE Band 66 (AWS)	0.751	0.546	0.349	1.297	1.100
	LTE Band 25 (PCS)	0.667	0.546	0.349	1.213	1.016
	LTE Band 30	1.085	0.546	0.349	See Table Below	1.434
LTE Band 7	0.600	0.546	0.349	1.146	0.949	
LTE Band 41	0.505	0.546	0.349	1.051	0.854	



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.730	0.713	1.443
	EVDO BC0 (§22H)	0.727	0.713	1.440
	PCS EVDO	0.589	0.713	1.302
	GPRS 850	0.758	0.713	<b>1.471</b>
	GPRS 1900	0.497	0.713	1.210
	UMTS 850	0.727	0.713	1.440
	UMTS 1750	0.608	0.713	1.321
	UMTS 1900	0.600	0.713	1.313
	LTE Band 12	0.568	0.713	1.281
	LTE Band 13	0.604	0.713	1.317
	LTE Band 14	0.628	0.713	1.341
	LTE Band 26 (Cell)	0.591	0.713	1.304
	LTE Band 5 (Cell)	0.597	0.713	1.310
	LTE Band 66 (AWS)	0.751	0.713	1.464
	LTE Band 25 (PCS)	0.667	0.713	1.380
	LTE Band 30	1.085	0.713	See Table Below
LTE Band 7	0.600	0.713	1.313	
LTE Band 41	0.505	0.713	1.218	

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 94 of 105

Simult Tx	Configuration	LTE Band 30 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.902	0.546	<b>1.448</b>
	Front	0.685	0.546*	1.231
	Top	-	0.546*	0.546
	Bottom	1.085	-	1.085
	Right	-	-	0.000
	Left	0.168	0.272	0.440

Simult Tx	Configuration	LTE Band 30 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	0.902	0.713	See Note 1	0.02
	Front	0.685	0.713*	<b>1.398</b>	N/A
	Top	-	0.192	0.192	N/A
	Bottom	1.085	-	1.085	N/A
	Right	-	-	0.000	N/A
	Left	0.168	0.713*	0.881	N/A



Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFV350A	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 95 of 105

**Table 12-11**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	EVDO BC10 (§90S)	0.730	0.322	0.349	1.052	1.079	1.401
	EVDO BC0 (§22H)	0.727	0.322	0.349	1.049	1.076	1.398
	PCS EVDO	0.589	0.322	0.349	0.911	0.938	1.260
	GPRS 850	0.758	0.322	0.349	1.080	1.107	1.429
	GPRS 1900	0.497	0.322	0.349	0.819	0.846	1.168
	UMTS 850	0.727	0.322	0.349	1.049	1.076	1.398
	UMTS 1750	0.608	0.322	0.349	0.930	0.957	1.279
	UMTS 1900	0.600	0.322	0.349	0.922	0.949	1.271
	LTE Band 12	0.568	0.322	0.349	0.890	0.917	1.239
	LTE Band 13	0.604	0.322	0.349	0.926	0.953	1.275
	LTE Band 14	0.628	0.322	0.349	0.950	0.977	1.299
	LTE Band 26 (Cell)	0.591	0.322	0.349	0.913	0.940	1.262
	LTE Band 5 (Cell)	0.597	0.322	0.349	0.919	0.946	1.268
	LTE Band 66 (AWS)	0.751	0.322	0.349	1.073	1.100	1.422
	LTE Band 25 (PCS)	0.667	0.322	0.349	0.989	1.016	1.338
	LTE Band 30	1.085	0.322	0.349	1.407	<b>1.434</b>	See Table Below
	LTE Band 7	0.600	0.322	0.349	0.922	0.949	1.271
LTE Band 41	0.505	0.322	0.349	0.827	0.854	1.176	

Simult Tx	Configuration	LTE Band 30 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.902	0.322*	0.349	<b>1.573</b>
	Front	0.685	0.322*	0.349*	1.356
	Top	-	0.322*	0.349*	0.671
	Bottom	1.085	-	-	1.085
	Right	-	-	-	0.000
	Left	0.168	0.322	0.349*	0.839

FCC ID: ZNFV350A	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 96 of 105	

**Table 12-12**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.730	0.044	0.774
	EVDO BC0 (§22H)	0.727	0.044	0.771
	PCS EVDO	0.589	0.044	0.633
	GPRS 850	0.758	0.044	0.802
	GPRS 1900	0.497	0.044	0.541
	UMTS 850	0.727	0.044	0.771
	UMTS 1750	0.608	0.044	0.652
	UMTS 1900	0.600	0.044	0.644
	LTE Band 12	0.568	0.044	0.612
	LTE Band 13	0.604	0.044	0.648
	LTE Band 14	0.628	0.044	0.672
	LTE Band 26 (Cell)	0.591	0.044	0.635
	LTE Band 5 (Cell)	0.597	0.044	0.641
	LTE Band 66 (AWS)	0.751	0.044	0.795
	LTE Band 25 (PCS)	0.667	0.044	0.711
	LTE Band 30	1.085	0.044	1.129
LTE Band 7	0.600	0.044	0.644	
LTE Band 41	0.505	0.044	0.549	

## 12.6 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

**Table 12-13**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet at 0.0 cm)**

Exposure Condition	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
	1	2	1+2
Phablet SAR	1.405	1.480	2.885

FCC ID: ZNFV350A		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 97 of 105

## 12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is  $\leq 0.04$  for 1g and  $\leq 0.10$ , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

### 12.7.1 Body-Worn Back Side SPLSR Evaluation and Analysis


**Table 12-14**  
Peak SAR Locations for Body-Worn Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN MIMO	19.00	59.00	0.790
LTE Band 30	1.20	-69.80	0.902

**Table 12-15**  
Body-Worn Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
5 GHz WLAN MIMO	LTE Band 30	0.79	0.902	1.692	130.02	0.02	1

**Table 12-16**  
Body-Worn Back Side SAR to Peak Location Separation Ratio Plots

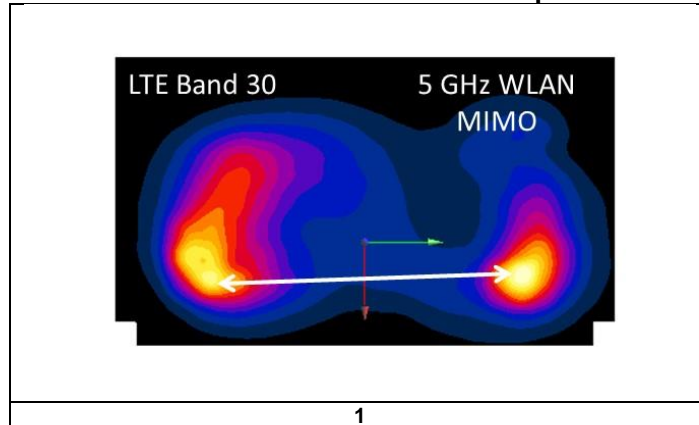

FCC ID: ZNFV350A	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset		Page 98 of 105

## 12.7.2 Hotspot Back Side SPLSR Evaluation and Analysis


**Table 12-17**  
**Peak SAR Locations for Hotspot Back Side**

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN MIMO	17.00	59.00	0.713
LTE Band 30	1.20	-69.80	0.902

**Table 12-18**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Calculations**



Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN MIMO	LTE Band 30	0.713	0.902	1.615	129.77	0.02	2

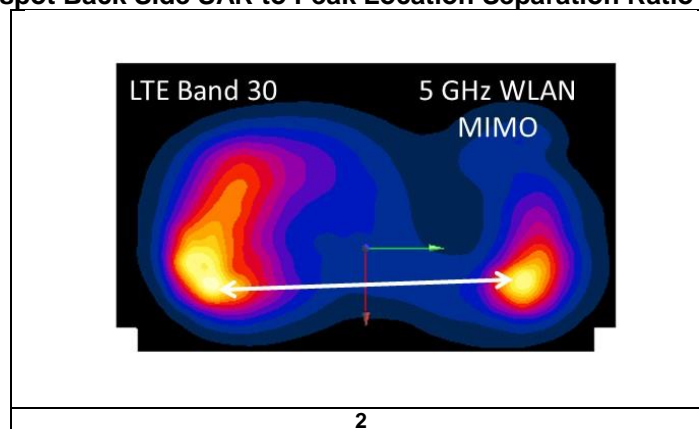**Table 12-19**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Plots**



## 12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 99 of 105	

# 13 SAR MEASUREMENT VARIABILITY

## 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1  
Head SAR Measurement Variability Results**



HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5250	5300.00	60	802.11a, 20 MHz Bandwidth	OFDM, ANT 2	Right	Tilt	6	0.832	0.831	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 13-2  
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2300	2310.00	27710	LTE Band 30, 10 MHz Bandwidth	QPSK, 1 RB, 25 RB Offset	bottom	10 mm	1.050	1.050	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							



## 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: ZNFV350A	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1804040064-01-R1.ZNF	Test Dates: 04/06/18 - 04/18/18	DUT Type: Portable Handset	Page 100 of 105	

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	CBT	N/A	CBT	3051A00187
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/17/2017	Annual	8/17/2018	MY40003841
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	E4438C	ESG Vector Signal Generator	3/21/2017	Biennial	3/21/2019	MY45090700
Agilent	E5515C	Wireless Communications Test Set	5/31/2017	Annual	5/31/2018	GB43304278
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	11/15/2017	Annual	11/15/2018	GB42230325
Agilent	E5515C	Wireless Communications Test Set	1/24/2018	Annual	1/24/2019	GB44400860
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	N5182A	MXG Vector Signal Generator	11/1/2017	Annual	11/1/2018	MY47420603
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA24106A	USB Power Sensor	3/12/2018	Annual	3/12/2019	1344557
Anritsu	MA2411B	Pulse Power Sensor	10/16/2017	Annual	10/16/2018	1207470
Anritsu	ML2496A	Power Meter	4/20/2017	Annual	4/20/2018	1306009
Anritsu	MT8821C	Radio Communication Analyzer	11/17/2017	Annual	11/17/2018	6201381794
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330144
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini Circuits	PWR-4GHS	USB Power Sensor	1/20/2018	Annual	1/20/2019	11710030063
Mini Circuits	PWR-4GHS	USB Power Sensor	1/22/2018	Annual	1/22/2019	11710030062
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20V5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/22/2017	Annual	5/22/2018	109892
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	101699
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	164948
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	1003
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Biennial	7/13/2018	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	D835V2	835 MHz SAR Dipole	7/11/2017	Annual	7/11/2018	4d133
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D2300V2	2300 MHz SAR Dipole	7/25/2016	Biennial	7/25/2018	1073
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Annual	9/11/2018	797
SPEAG	D2600V2	2600 MHz SAR Dipole	7/10/2017	Annual	7/10/2018	1126
SPEAG	D5GHzV2	5 GHz SAR Dipole	9/21/2016	Biennial	9/21/2018	1191
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/15/2017	Annual	8/15/2018	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/9/2017	Annual	8/9/2018	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	3/13/2018	Annual	3/13/2019	1102
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/12/2017	Annual	9/12/2018	1091
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/11/2017	Annual	7/11/2018	1039
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/8/2017	Annual	8/8/2018	1041
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	ES3DV3	SAR Probe	8/14/2017	Annual	8/14/2018	3332
SPEAG	EX3DV4	SAR Probe	1/16/2018	Annual	1/16/2019	3589
SPEAG	EX3DV4	SAR Probe	2/14/2018	Annual	2/14/2019	3914
SPEAG	EX3DV4	SAR Probe	8/16/2017	Annual	8/16/2018	7308
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410



Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements. Each equipment item was used solely within its respective calibration period.

FCC ID: ZNFV350A		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 101 of 105	



# 15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>1</sub> 1gm	c <sub>1</sub> 10 gms	1gm u <sub>1</sub> (± %)	10gms u <sub>1</sub> (± %)	v <sub>1</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>	RSS					11.5	11.3	60
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset		Page 102 of 105

## 16 CONCLUSION

### 16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 103 of 105	

# 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

<b>FCC ID:</b> ZNFV350A	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 104 of 105	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

<b>FCC ID:</b> ZNFV350A	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1804040064-01-R1.ZNF	<b>Test Dates:</b> 04/06/18 - 04/18/18	<b>DUT Type:</b> Portable Handset	Page 105 of 105

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**


Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.716$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-14-2018; Ambient Temp: 20.0°C; Tissue Temp: 19.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA, Rule Part 90S, Left Head, Cheek, Mid.ch**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.35 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.185 W/kg  
**SAR(1 g) = 0.154 W/kg**

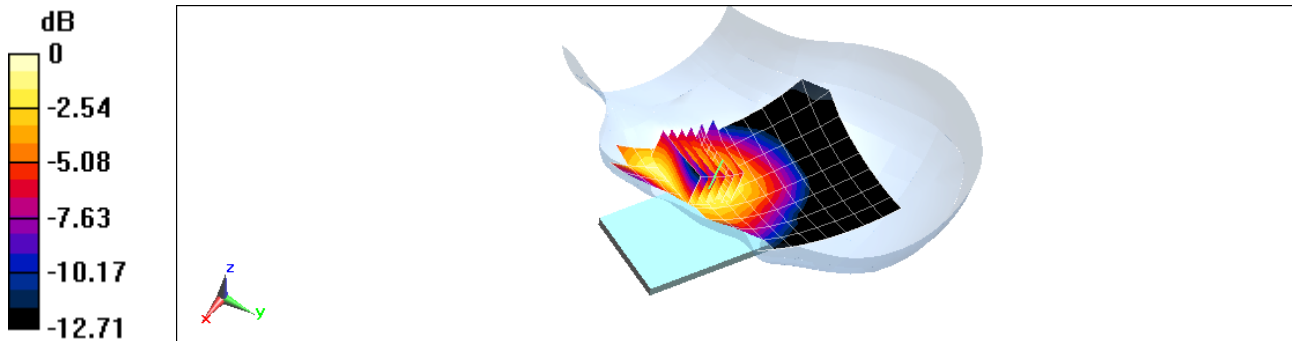

0 dB = 0.166 W/kg = -7.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.907 \text{ S/m}$ ;  $\epsilon_r = 40.488$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-14-2018; Ambient Temp: 20.0°C; Tissue Temp: 19.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO Rev. A, Rule Part 22H, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.160 W/kg**

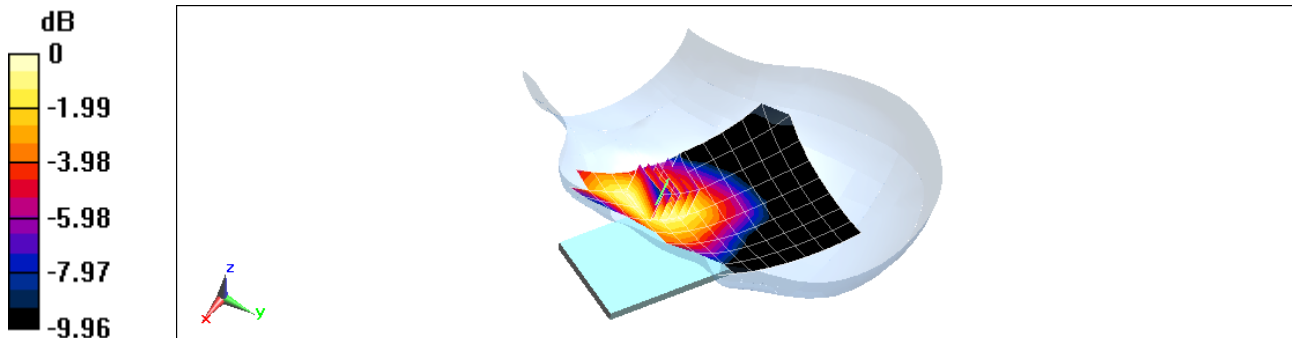

0 dB = 0.172 W/kg = -7.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 38.103$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-13-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.98, 7.98, 7.98); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: PCS EVDO Rev A, Left Head, Cheek, Mid.ch**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.23 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.140 W/kg**

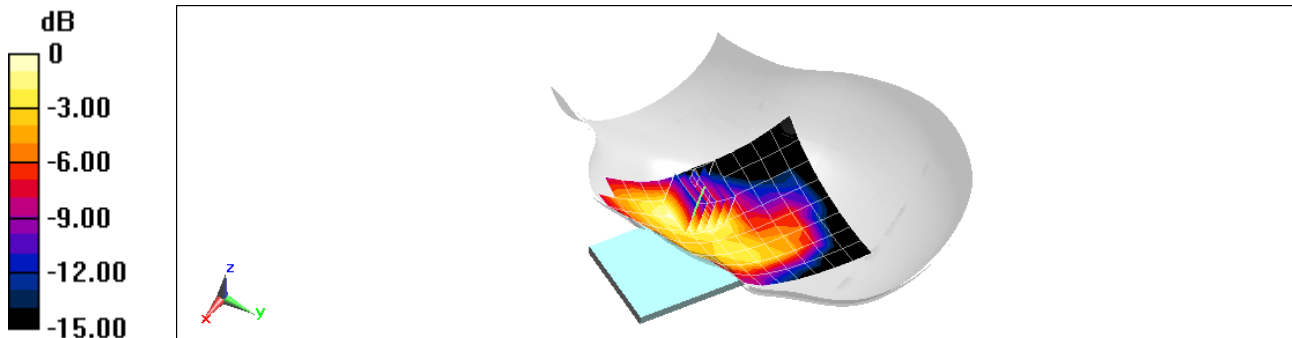

0 dB = 0.182 W/kg = -7.40 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, \_GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.906 \text{ S/m}$ ;  $\epsilon_r = 41.988$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-11-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 850, Left Head, Cheek, Mid.ch, 2 Tx slots**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.42 V/m; Power Drift = -0.20 dB  
Peak SAR (extrapolated) = 0.192 W/kg  
**SAR(1 g) = 0.150 W/kg**

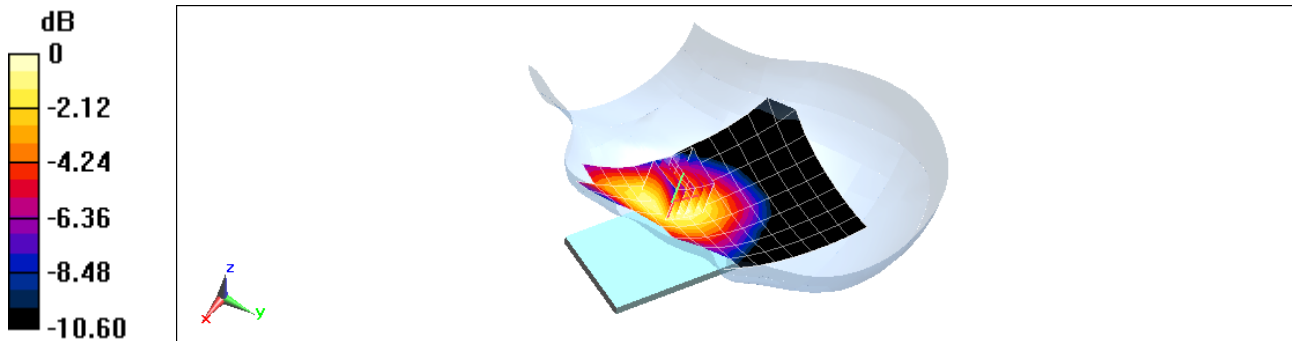

0 dB = 0.165 W/kg = -7.83 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium: 1900 Head; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 38.103$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-13-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.98, 7.98, 7.98); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: GSM 1900, Left Head, Cheek, Mid.ch**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.14 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 0.217 W/kg  
**SAR(1 g) = 0.140 W/kg**

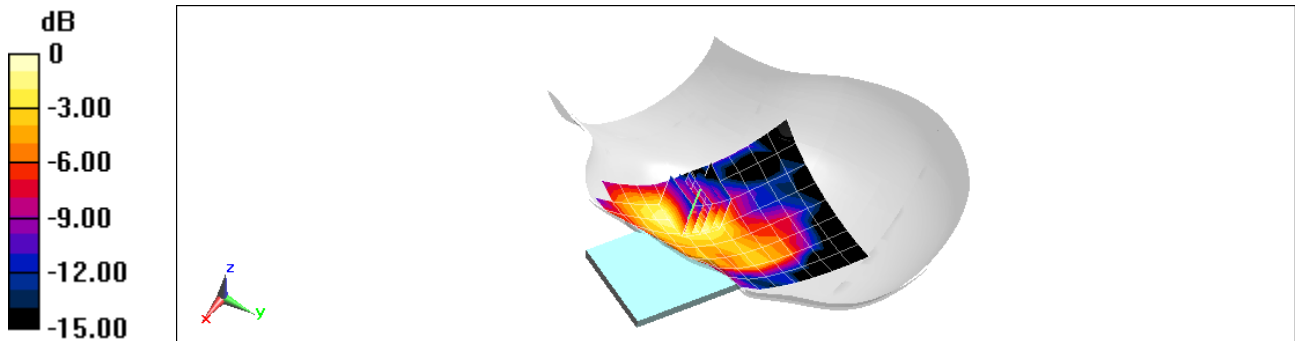

0 dB = 0.185 W/kg = -7.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.906 \text{ S/m}$ ;  $\epsilon_r = 41.988$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-11-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 850, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.59 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.155 W/kg**

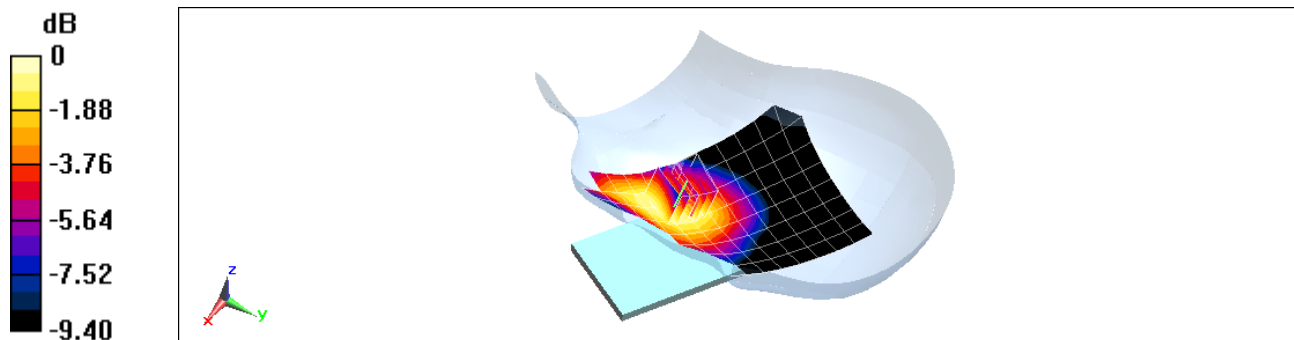

0 dB = 0.167 W/kg = -7.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Head; Medium parameters used (interpolated):  
 $f = 1732.4$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 39.661$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 04-07-2018; Ambient Temp: 20.3°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(8.66, 8.66, 8.66); Calibrated: 7/17/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.637 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.119 W/kg**

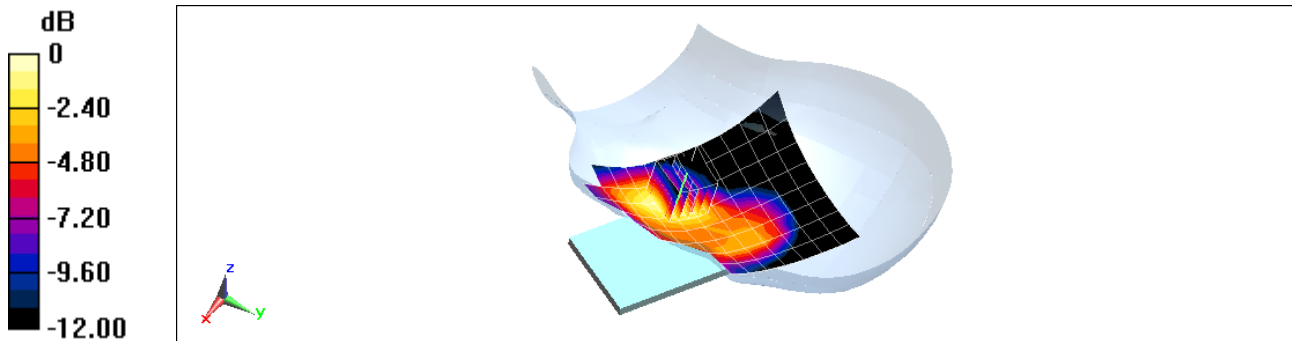

0 dB = 0.154 W/kg = -8.12 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Head; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 38.103$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-13-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.98, 7.98, 7.98); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Left Head, Cheek, Mid.ch**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.34 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.221 W/kg  
**SAR(1 g) = 0.143 W/kg**

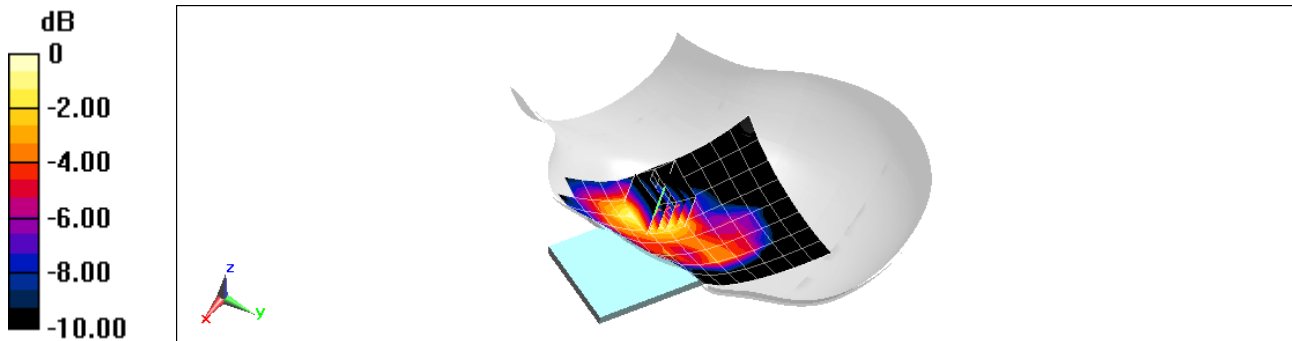

0 dB = 0.192 W/kg = -7.17 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Head; Medium parameters used (interpolated):  
 $f = 707.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 41.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 04-12-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(10.18, 10.18, 10.18); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,  
10 MHz Bandwidth, 1 RB, 25 RB Offset**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.20 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.150 W/kg  
**SAR(1 g) = 0.117 W/kg**

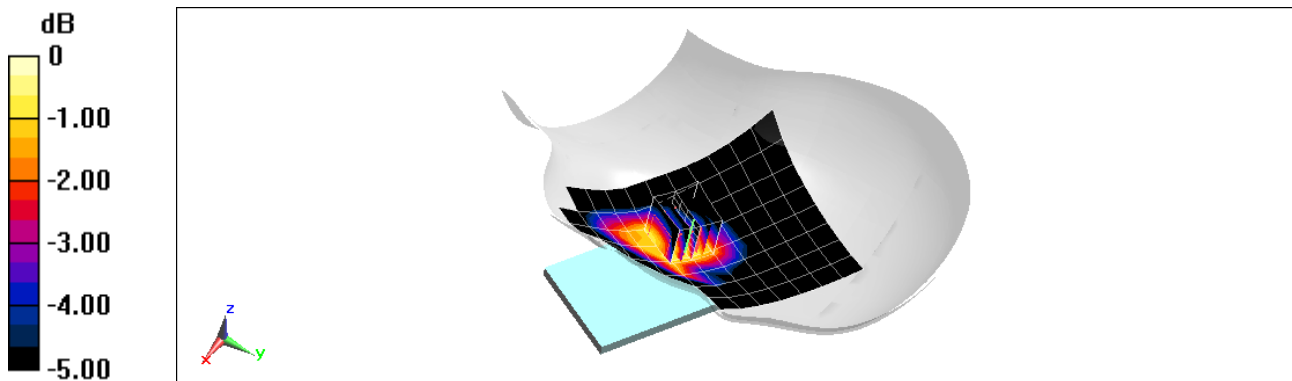

0 dB = 0.141 W/kg = -8.51 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Head; Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 0.916 \text{ S/m}$ ;  $\epsilon_r = 40.971$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-12-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(10.18, 10.18, 10.18); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK,  
10 MHz Bandwidth, 1 RB, 0 RB Offset**

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (8x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.361 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.141 W/kg  
**SAR(1 g) = 0.118 W/kg**

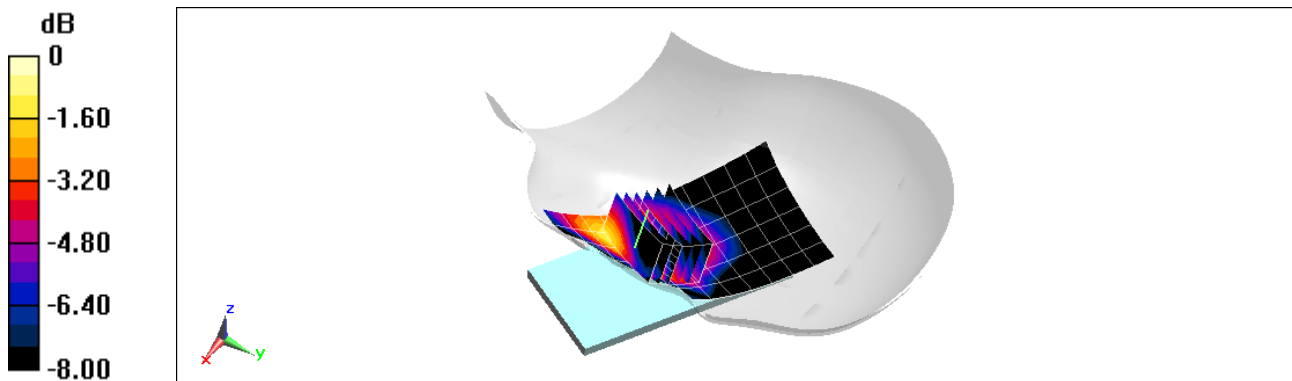

0 dB = 0.133 W/kg = -8.76 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 40.935$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-12-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(10.18, 10.18, 10.18); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 14, Left Head, Cheek, Mid.ch, QPSK,  
10 MHz Bandwidth, 1 RB, 25 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.39 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.118 W/kg**

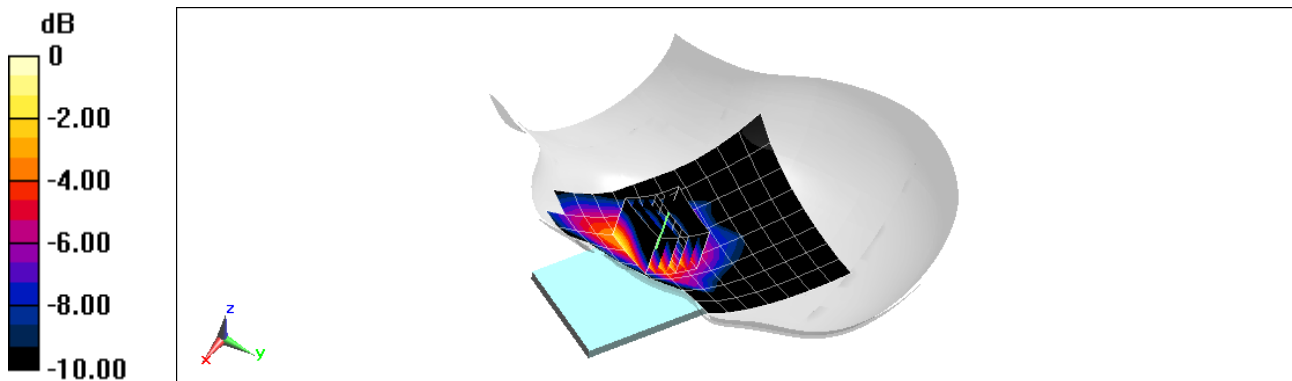

0 dB = 0.134 W/kg = -8.73 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 42.873$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-09-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.26 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.198 W/kg  
**SAR(1 g) = 0.160 W/kg**

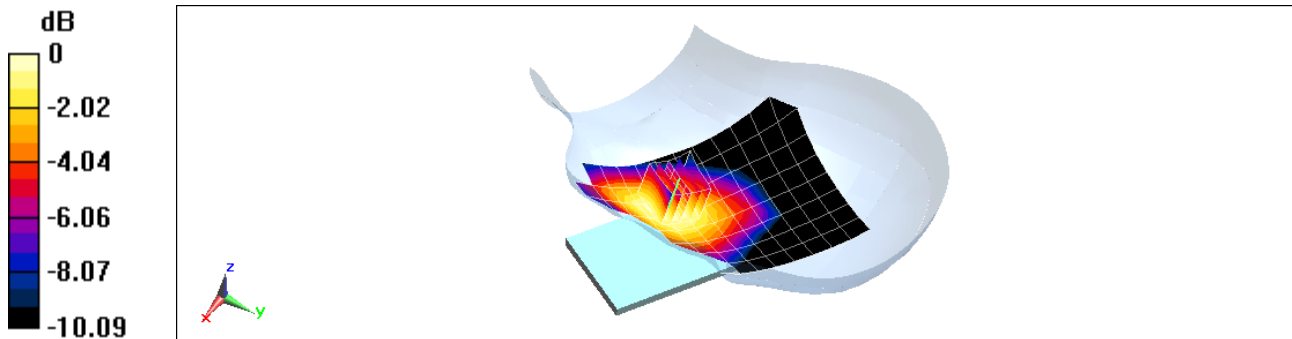

0 dB = 0.174 W/kg = -7.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head; Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.906 \text{ S/m}$ ;  $\epsilon_r = 41.989$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-11-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Left Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.00 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.160 W/kg  
**SAR(1 g) = 0.130 W/kg**

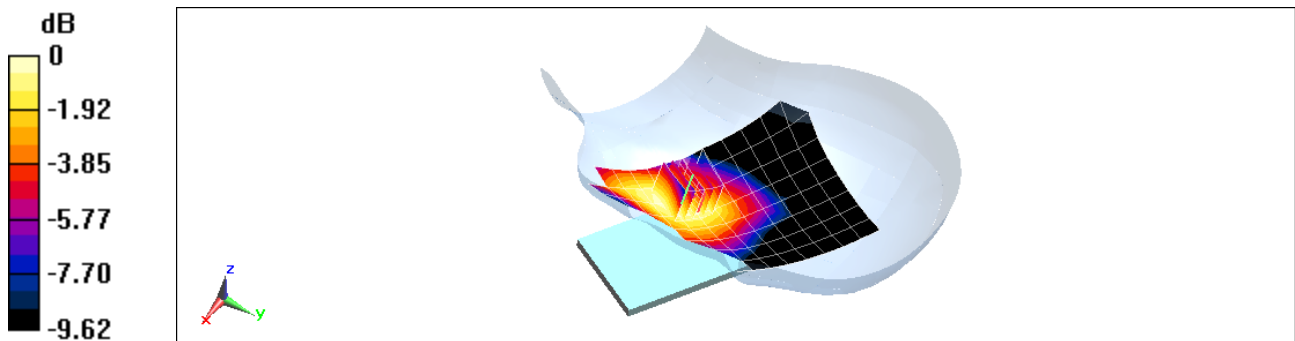

0 dB = 0.141 W/kg = -8.51 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: 1750 Head; Medium parameters used (interpolated):  
 $f = 1770 \text{ MHz}$ ;  $\sigma = 1.424 \text{ S/m}$ ;  $\epsilon_r = 39.477$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-07-2018; Ambient Temp: 20.3°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(8.66, 8.66, 8.66); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Right Head, Cheek, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.67 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.138 W/kg**

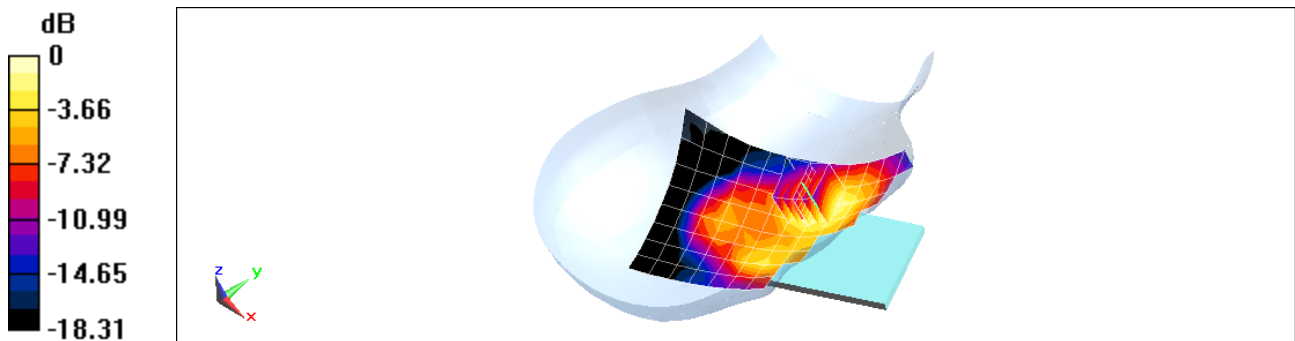

0 dB = 0.179 W/kg = -7.47 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: 1900 Head; Medium parameters used (interpolated):  
 $f = 1905 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 38.076$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-13-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.98, 7.98, 7.98); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.61 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.257 W/kg  
**SAR(1 g) = 0.165 W/kg**

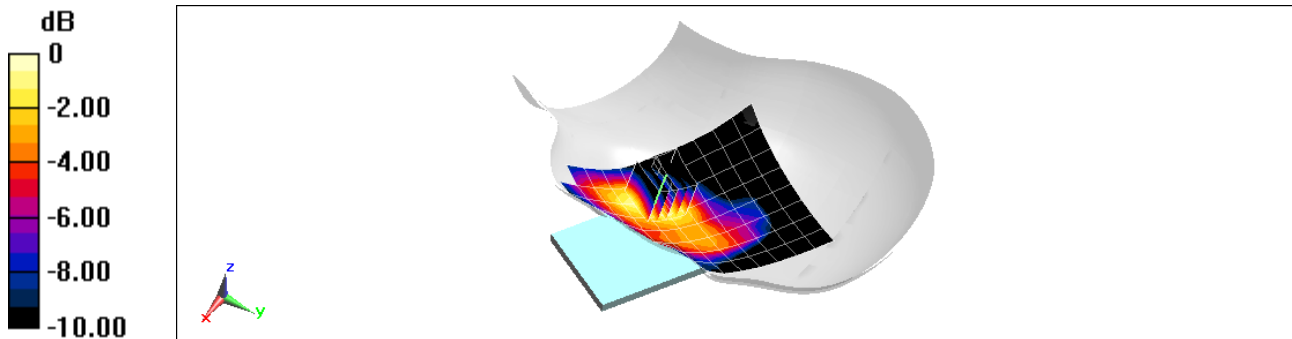

0 dB = 0.218 W/kg = -6.62 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Head; Medium parameters used:

$f = 2310$  MHz;  $\sigma = 1.701$  S/m;  $\epsilon_r = 40.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04-15-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.99, 4.99, 4.99); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 30, Left Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.101 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.089 W/kg**

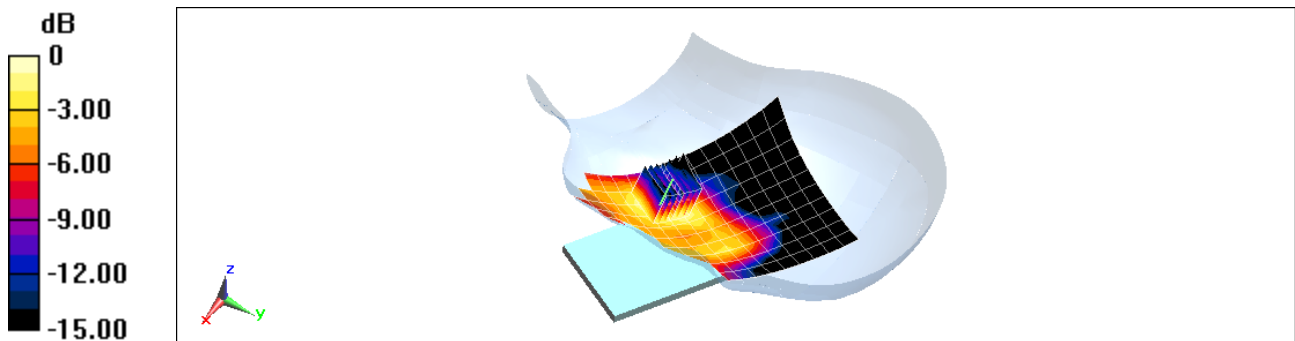

0 dB = 0.107 W/kg = -9.71 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**


Communication System: UID 0, \_LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: 2600 Head; Medium parameters used (interpolated):  
 $f = 2535 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 39.269$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Left Head, Cheek, Mid.ch, QPSK,  
20 MHz Bandwidth, 1 RB, 50 RB Offset**

**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.525 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.0880 W/kg  
**SAR(1 g) = 0.048 W/kg**

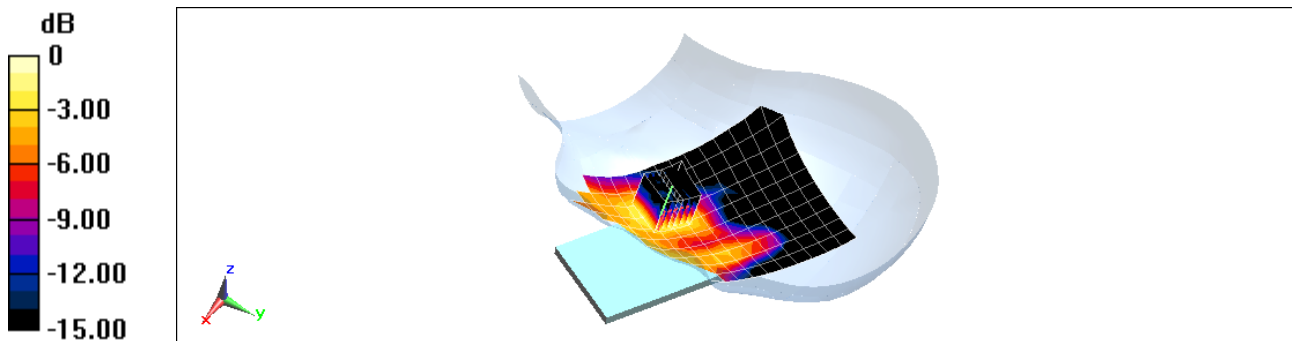

0 dB = 0.0598 W/kg = -12.23 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 41; Frequency: 2549.5 MHz; Duty Cycle: 1:1.58

Medium: 2600 Head; Medium parameters used:

$f = 2550$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 39.213$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Left Head, Cheek, Low-Mid.ch, QPSK,  
20 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.472 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0590 W/kg

**SAR(1 g) = 0.032 W/kg**

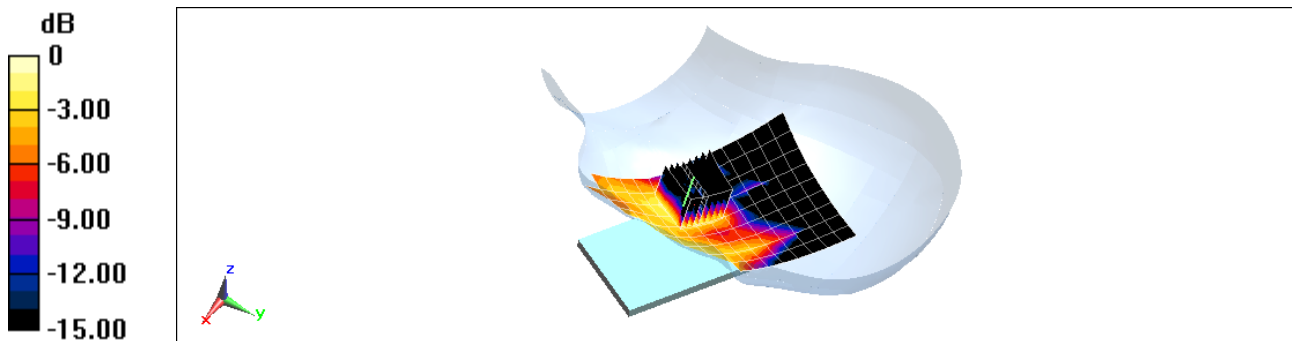

0 dB = 0.0426 W/kg = -13.71 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19176**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: 2450 Head; Medium parameters used (interpolated):  
 $f = 2412 \text{ MHz}$ ;  $\sigma = 1.8 \text{ S/m}$ ;  $\epsilon_r = 39.74$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, Antenna 2, 22 MHz Bandwidth,  
Right Head, Cheek, Ch 1, 1 Mbps**

**Area Scan (11x11x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 14.08 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 1.80 W/kg  
**SAR(1 g) = 0.669 W/kg**

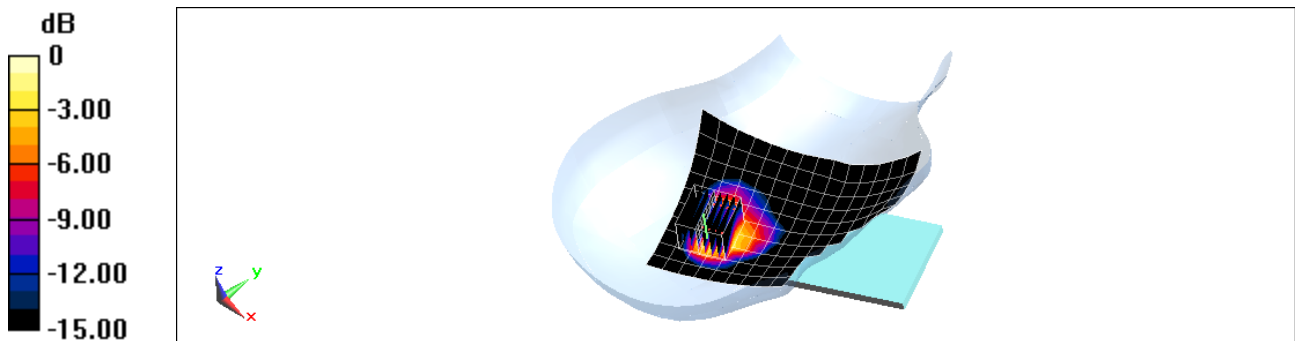

0 dB = 1.00 W/kg = 0.00 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19200**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 4.653 \text{ S/m}$ ;  $\epsilon_r = 37.187$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, Antenna 2, U-NII-2A, 20 MHz Bandwidth,  
Right Head, Tilt, Ch 60, 6 Mbps**


**Area Scan (13x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.486 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.87 W/kg

**SAR(1 g) = 0.832 W/kg**

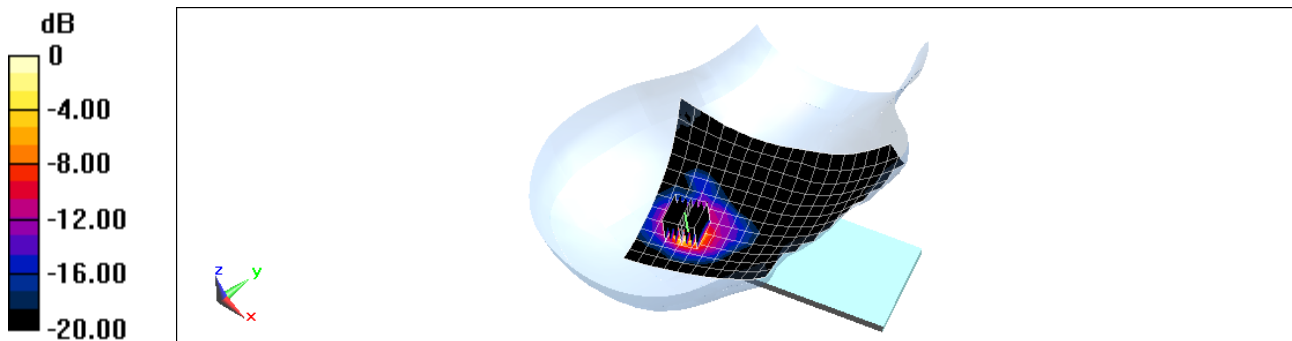

0 dB = 2.37 W/kg = 3.75 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19176**

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.284

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2402$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 39.777$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: Bluetooth, Right Head, Cheek, Ch 0, 1 Mbps**


**Area Scan (11x19x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.25 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.501 W/kg

**SAR(1 g) = 0.177 W/kg**

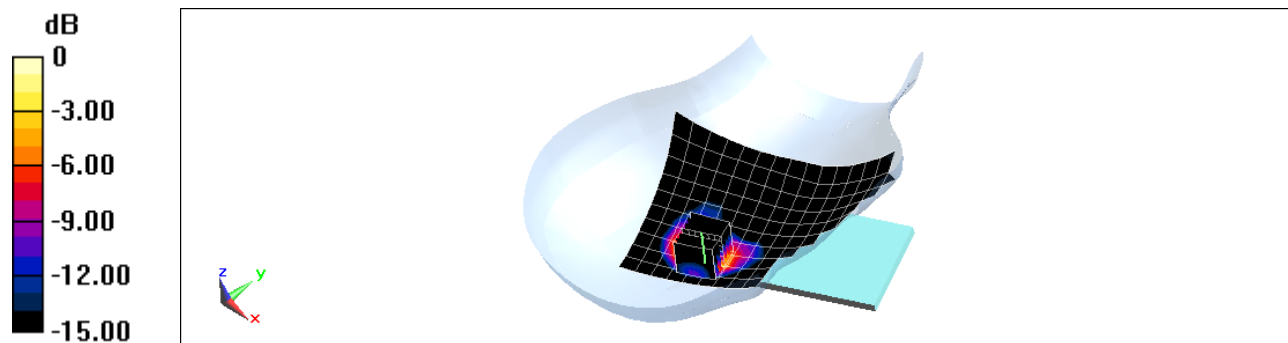

0 dB = 0.261 W/kg = -5.83 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.95 \text{ S/m}$ ;  $\epsilon_r = 53.691$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;  
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA BC10, Rule Part 90S, Body SAR, Back Side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.86 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.929 W/kg

**SAR(1 g) = 0.640 W/kg**

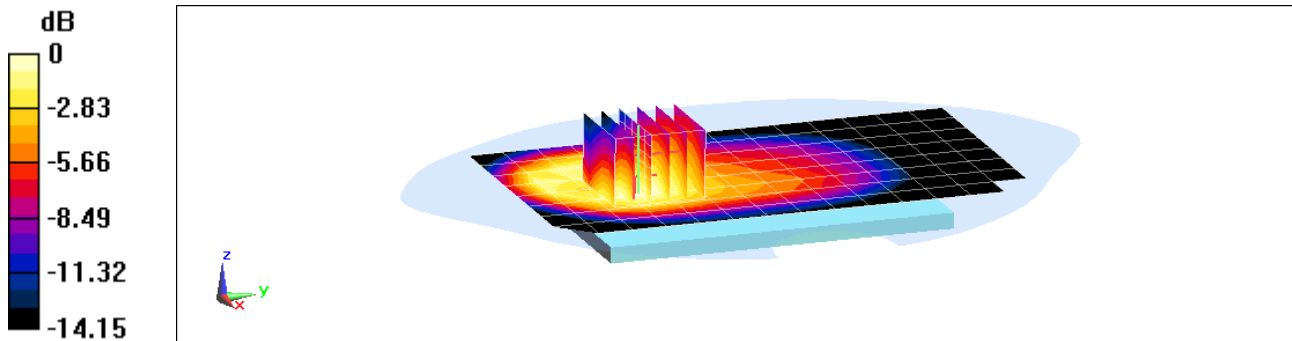

0 dB = 0.712 W/kg = -1.48 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.95 \text{ S/m}$ ;  $\epsilon_r = 53.691$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO BC10, Rule Part 90S, Body SAR, Back Side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.93 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.996 W/kg

**SAR(1 g) = 0.683 W/kg**

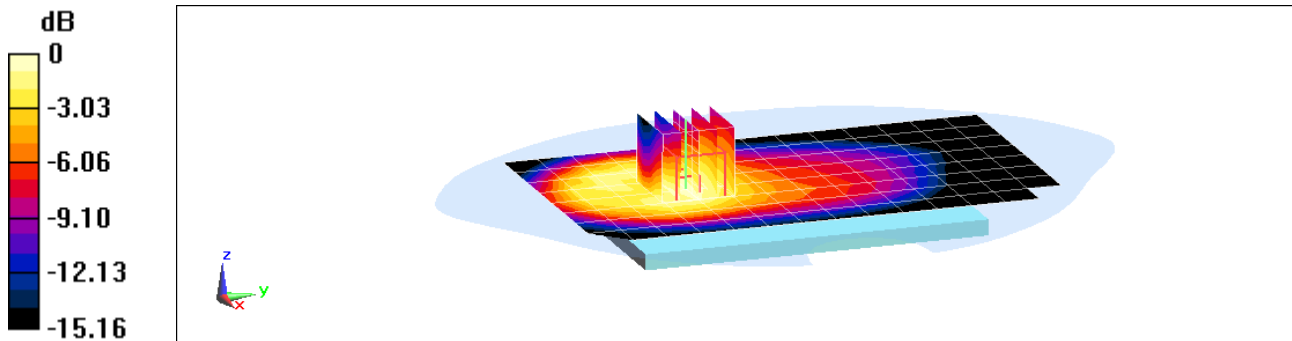

0 dB = 0.777 W/kg = -1.10 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 848.31$  MHz;  $\sigma = 0.978$  S/m;  $\epsilon_r = 53.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA, Rule Part 22H, Body SAR, Back Side, High.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.68 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.689 W/kg**

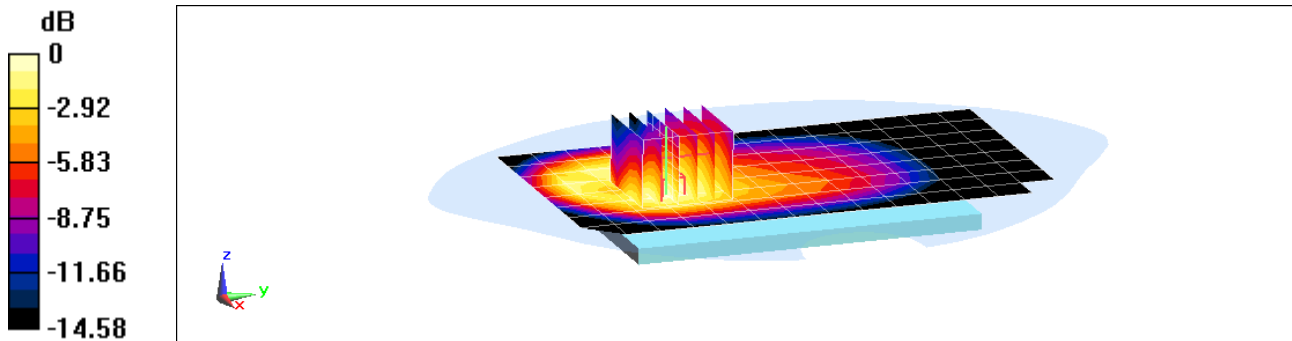

0 dB = 0.779 W/kg = -1.08 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.978 \text{ S/m}$ ;  $\epsilon_r = 53.463$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO, Rule Part 22H, Body SAR, Back Side, High.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.53 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.681 W/kg**

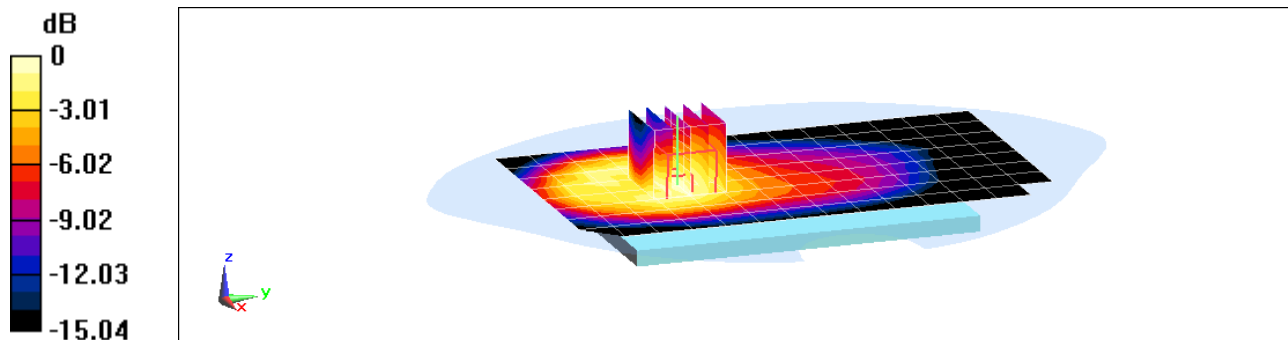

0 dB = 0.771 W/kg = -1.13 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**


Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: PCS CDMA, Body SAR, Back Side, Mid.ch**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.45 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.863 W/kg  
**SAR(1 g) = 0.474 W/kg**

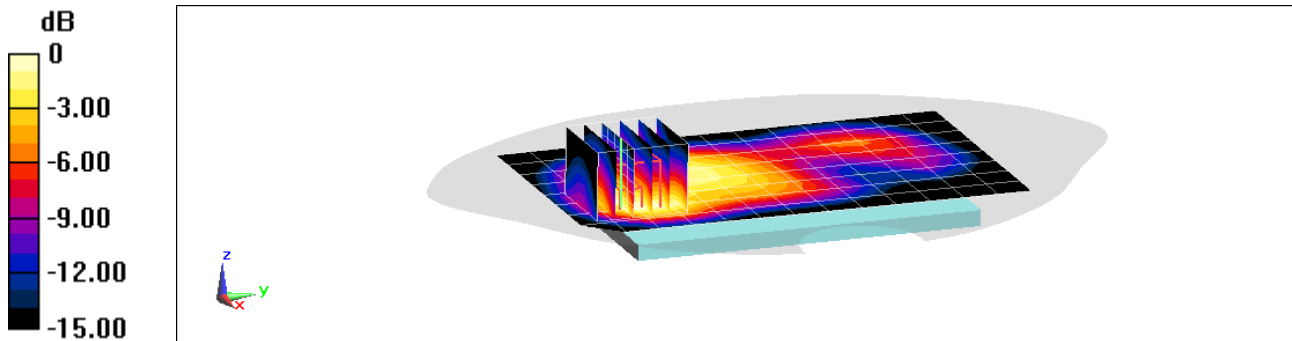

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19036**

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: PCS EVDO, Body SAR, Bottom Edge, Mid.ch**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.78 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.588 W/kg**

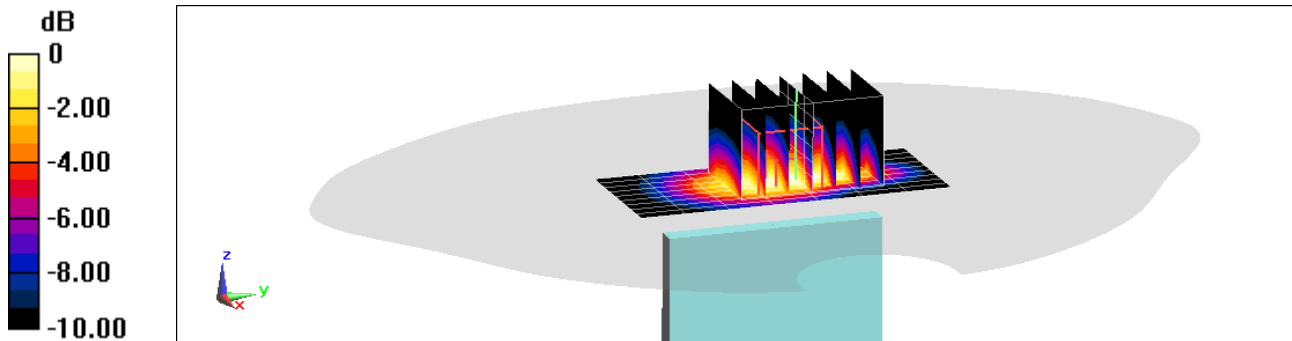

0 dB = 0.858 W/kg = -0.67 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:4.15  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.979 \text{ S/m}$ ;  $\epsilon_r = 53.459$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 850, Body SAR, Back Side, High.ch, 2 Tx Slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.51 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.695 W/kg**

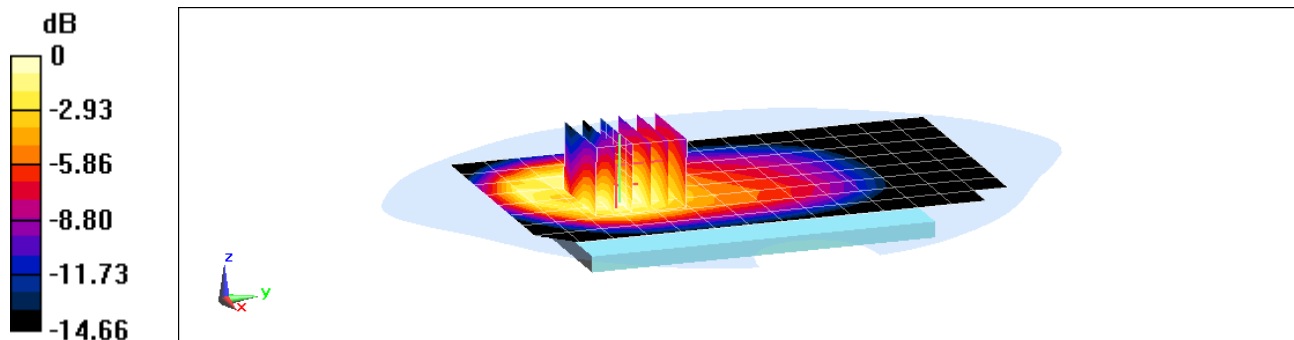

0 dB = 0.778 W/kg = -1.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium: 1900 Body; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GSM 1900, Body SAR, Back Side, Mid.ch**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.43 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.830 W/kg  
**SAR(1 g) = 0.464 W/kg**

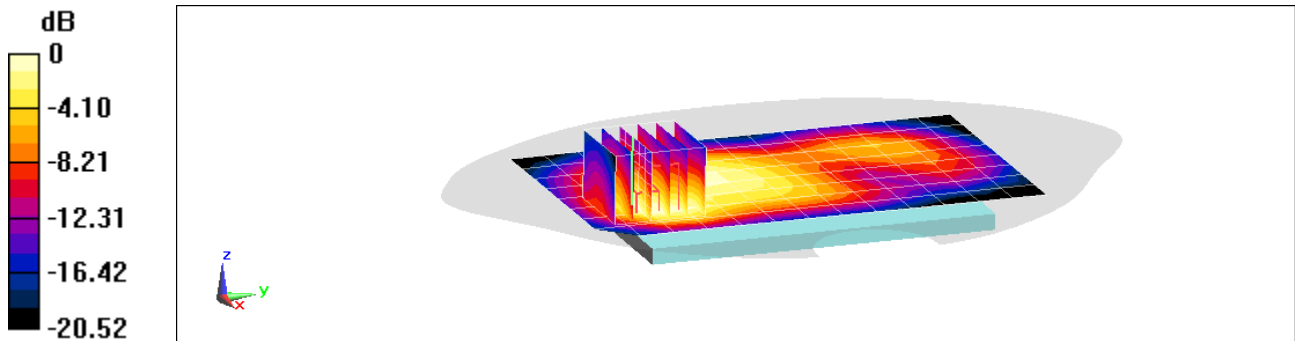

0 dB = 0.668 W/kg = -1.75 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880$  MHz;  $\sigma = 1.556$  S/m;  $\epsilon_r = 53.681$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.86 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.829 W/kg

**SAR(1 g) = 0.469 W/kg**

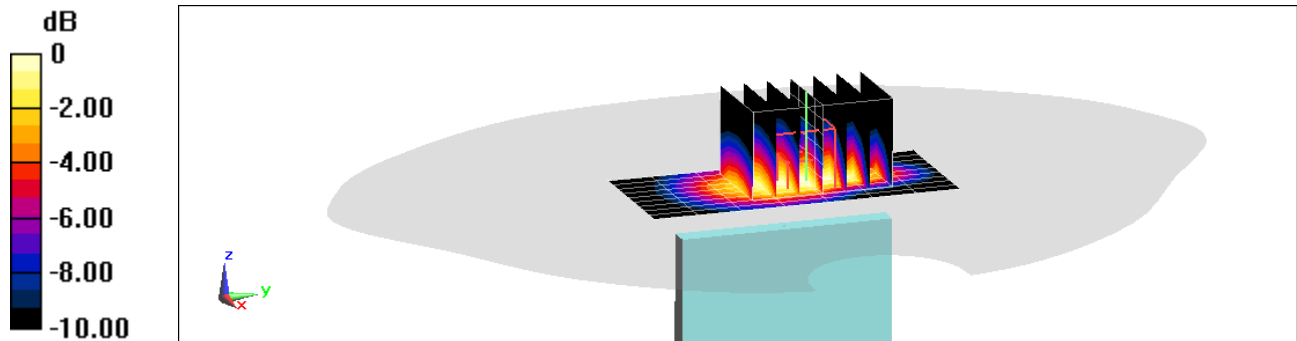

0 dB = 0.693 W/kg = -1.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**

Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.977 \text{ S/m}$ ;  $\epsilon_r = 53.477$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 850, Body SAR, Back Side, High.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.62 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.692 W/kg**

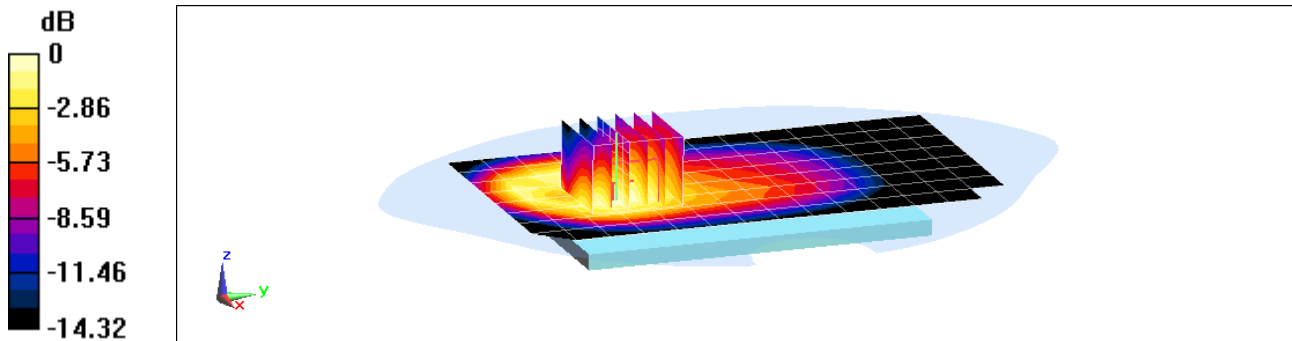

0 dB = 0.777 W/kg = -1.10 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19077**


Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: 1750 Body; Medium parameters used (interpolated):  
 $f = 1752.6$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 51.229$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 6/21/2017  
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Body SAR, Back Side, High.ch**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.90 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.921 W/kg  
**SAR(1 g) = 0.603 W/kg**

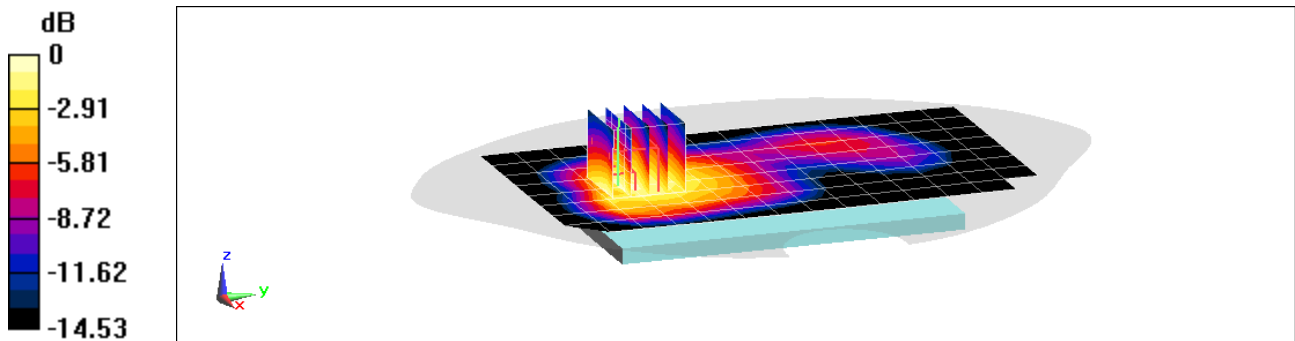

0 dB = 0.725 W/kg = -1.40 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Body SAR, Back Side, Mid.ch**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.59 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.852 W/kg  
**SAR(1 g) = 0.470 W/kg**

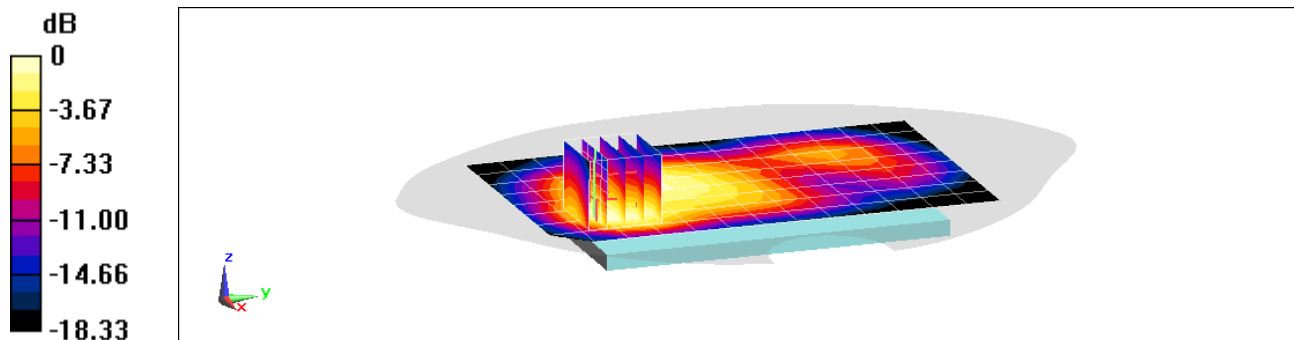

0 dB = 0.661 W/kg = -1.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19010**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Mid.ch**

**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.29 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.986 W/kg  
**SAR(1 g) = 0.565 W/kg**

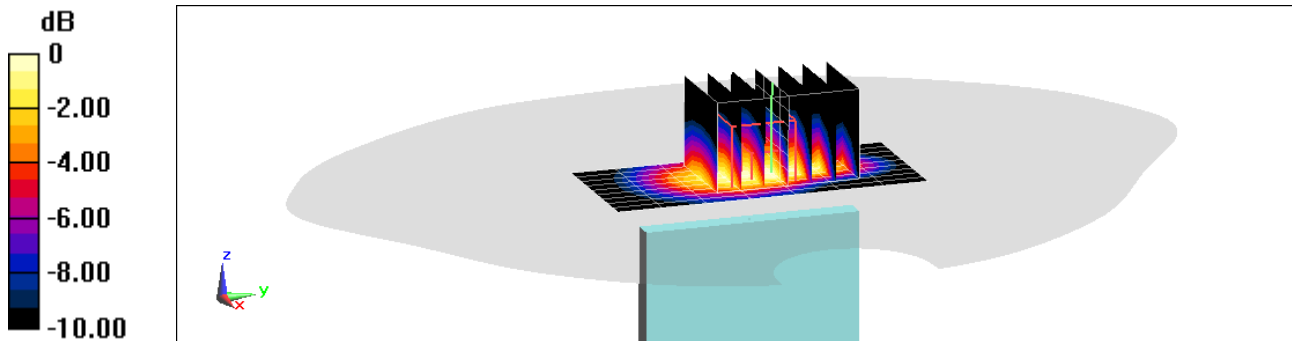

0 dB = 0.830 W/kg = -0.81 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.213$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Back Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.07 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.862 W/kg

**SAR(1 g) = 0.557 W/kg**

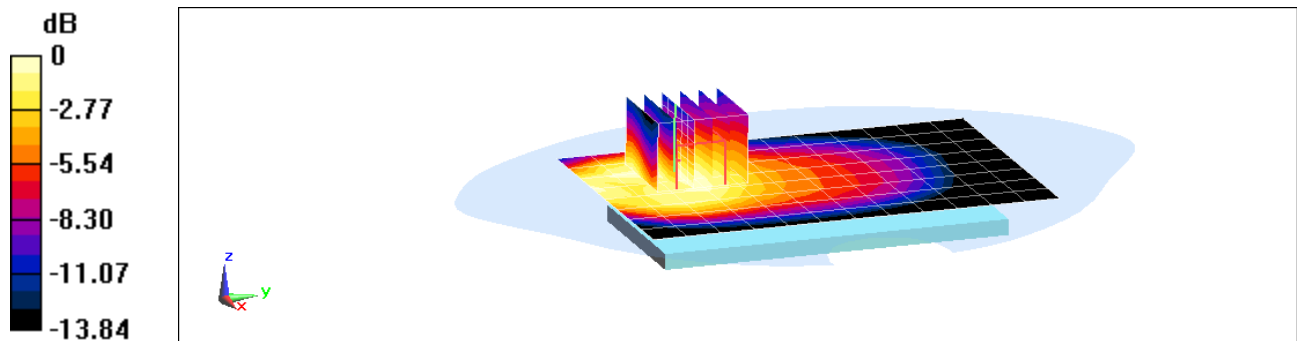

0 dB = 0.642 W/kg = -1.92 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.213$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Front Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.961 W/kg

**SAR(1 g) = 0.568 W/kg**

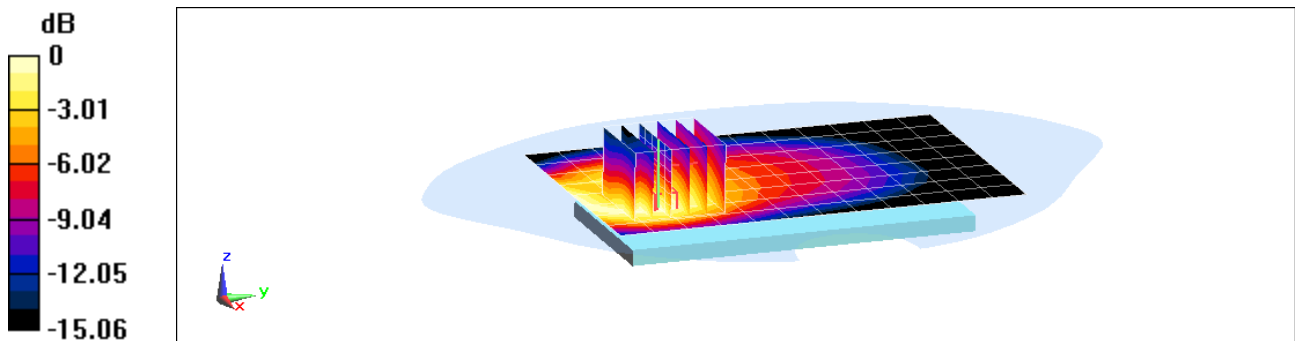

0 dB = 0.682 W/kg = -1.66 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.989 \text{ S/m}$ ;  $\epsilon_r = 53.037$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Back Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**



**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.10 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.860 W/kg

**SAR(1 g) = 0.579 W/kg**

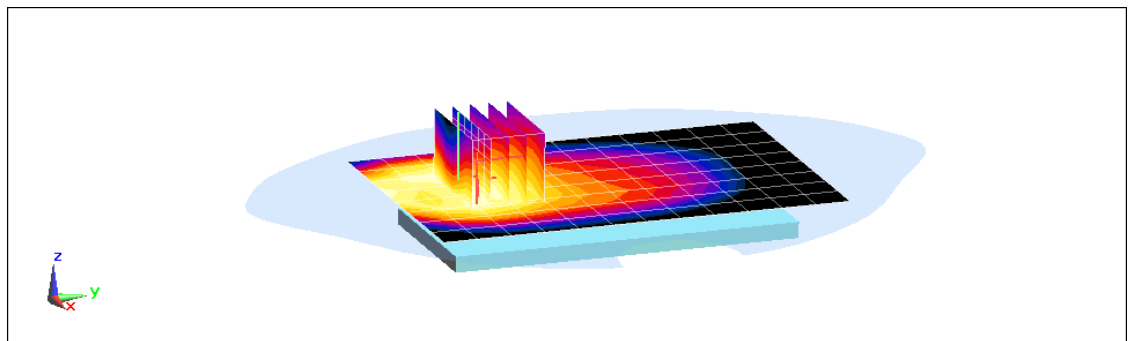

0 dB = 0.655 W/kg = -1.84 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.989 \text{ S/m}$ ;  $\epsilon_r = 53.037$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Front Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**



**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.00 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.916 W/kg

**SAR(1 g) = 0.581 W/kg**

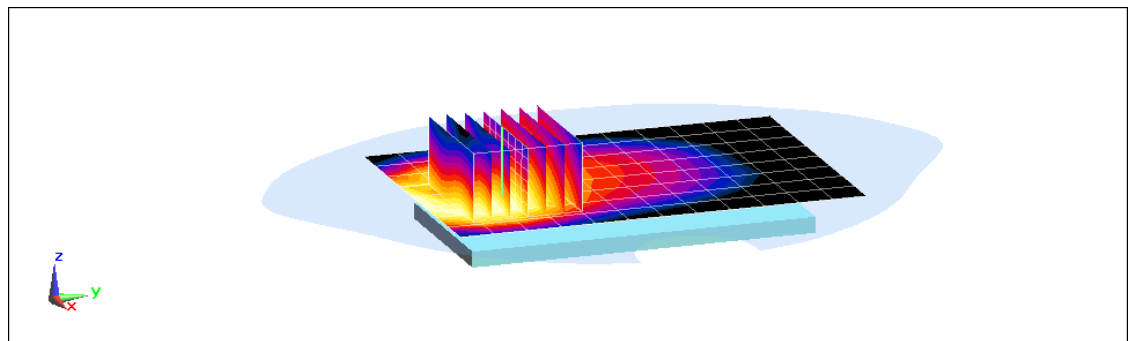

0 dB = 0.674 W/kg = -1.71 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19093**

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$ ;  $\sigma = 0.993 \text{ S/m}$ ;  $\epsilon_r = 53.011$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 14, Body SAR, Back Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.78 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.909 W/kg

**SAR(1 g) = 0.607 W/kg**

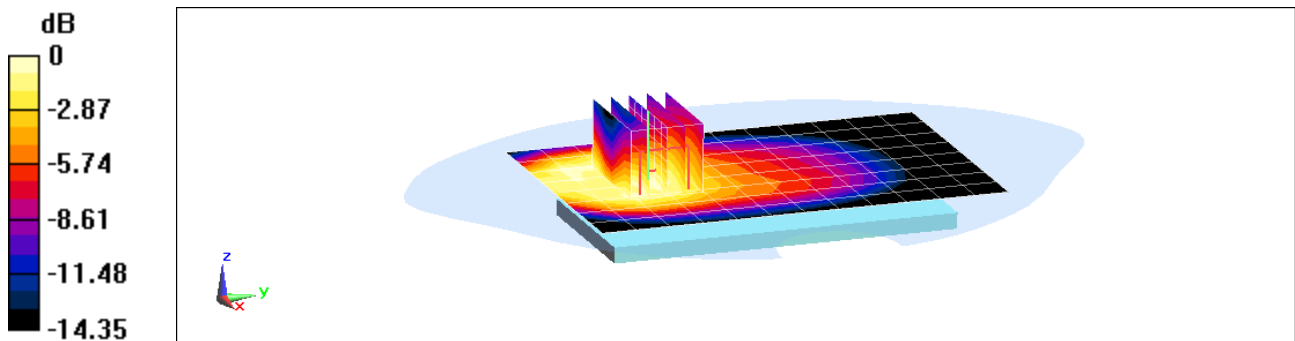

0 dB = 0.700 W/kg = -1.55 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.961 \text{ S/m}$ ;  $\epsilon_r = 53.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Body SAR, Back Side, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**



**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.59 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.836 W/kg

**SAR(1 g) = 0.579 W/kg**

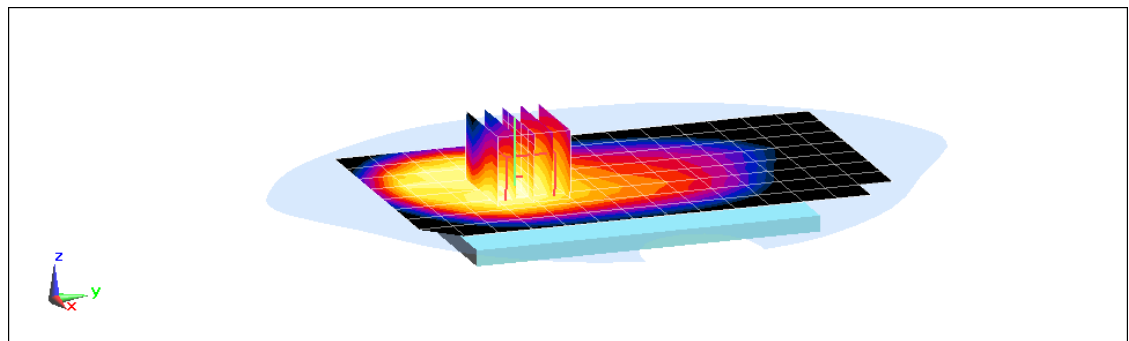

0 dB = 0.655 W/kg = -1.84 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Body; Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.967 \text{ S/m}$ ;  $\epsilon_r = 53.56$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Back Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.61 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.849 W/kg

**SAR(1 g) = 0.584 W/kg**

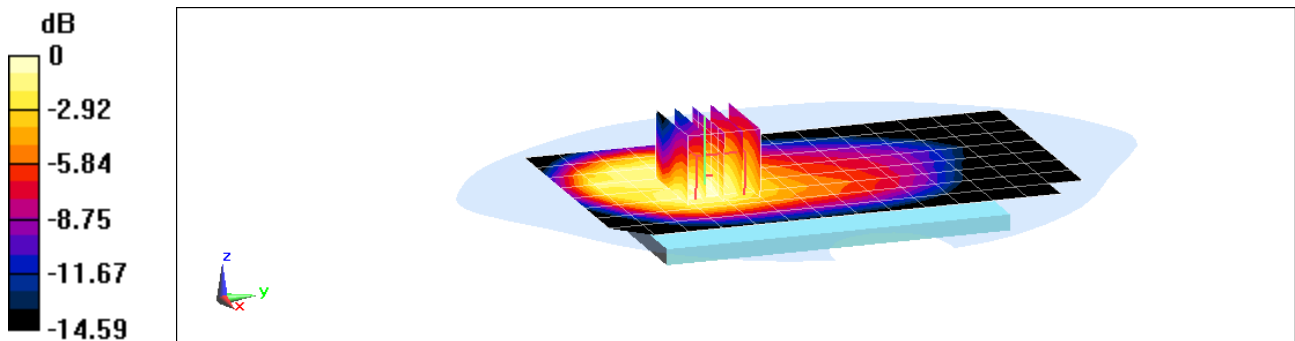

0 dB = 0.661 W/kg = -1.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: 1750 Body; Medium parameters used (interpolated):  
 $f = 1770 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 51.434$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-12-2018; Ambient Temp: 23.0°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 6/21/2017  
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Back Side, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.86 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 1.18 W/kg  
**SAR(1 g) = 0.751 W/kg**

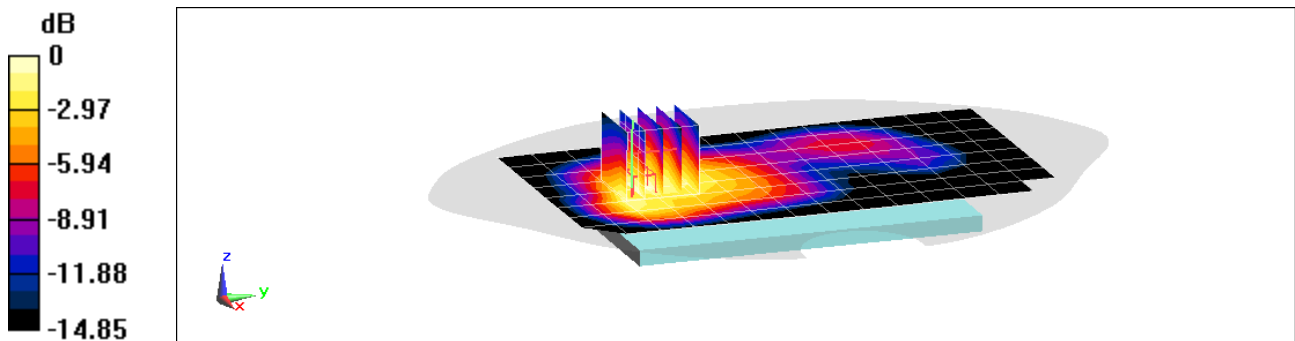

0 dB = 0.874 W/kg = -0.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used (interpolated):  
 $f = 1905 \text{ MHz}$ ;  $\sigma = 1.571 \text{ S/m}$ ;  $\epsilon_r = 53.832$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Back Side, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.75 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.896 W/kg  
**SAR(1 g) = 0.501 W/kg**

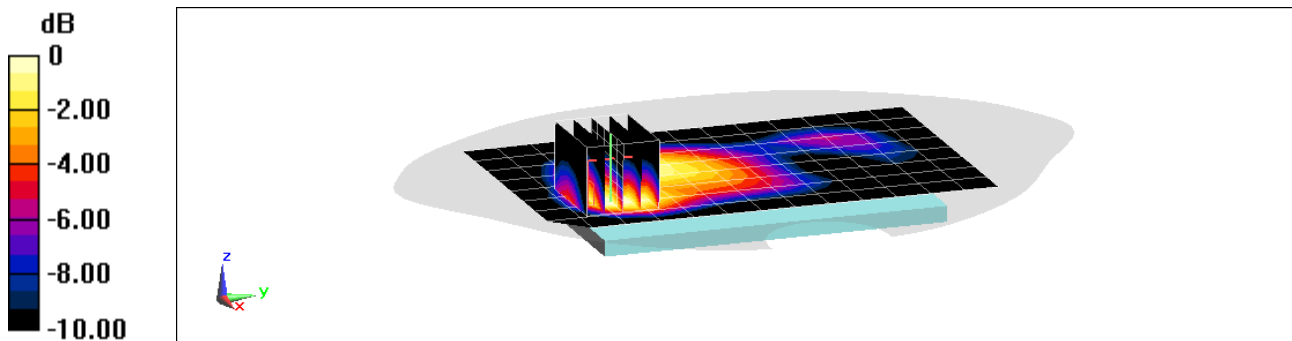

0 dB = 0.750 W/kg = -1.25 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used (interpolated):  
 $f = 1905 \text{ MHz}$ ;  $\sigma = 1.571 \text{ S/m}$ ;  $\epsilon_r = 53.832$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.58 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.667 W/kg**

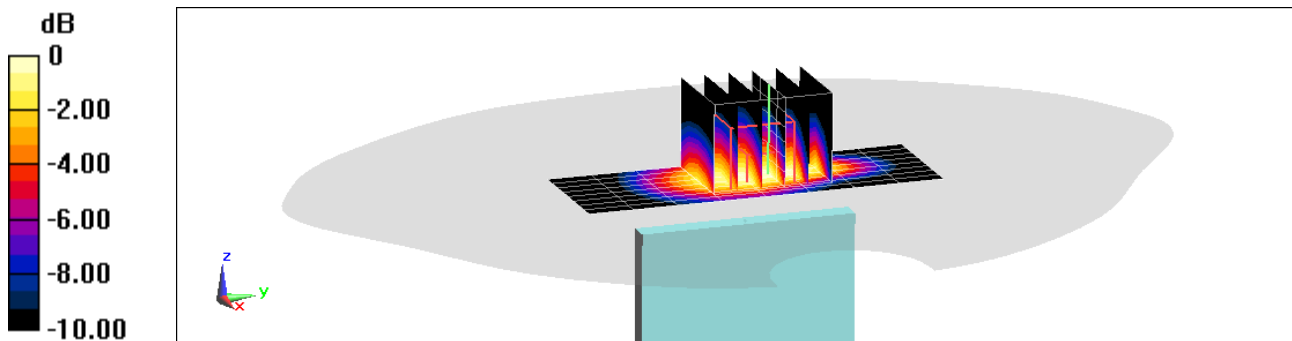

0 dB = 0.961 W/kg = -0.17 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19176**

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body; Medium parameters used:

$f = 2310$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 51.577$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.63, 4.63, 4.63); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 30, Body SAR, Back Side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**



**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.50 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.873 W/kg**

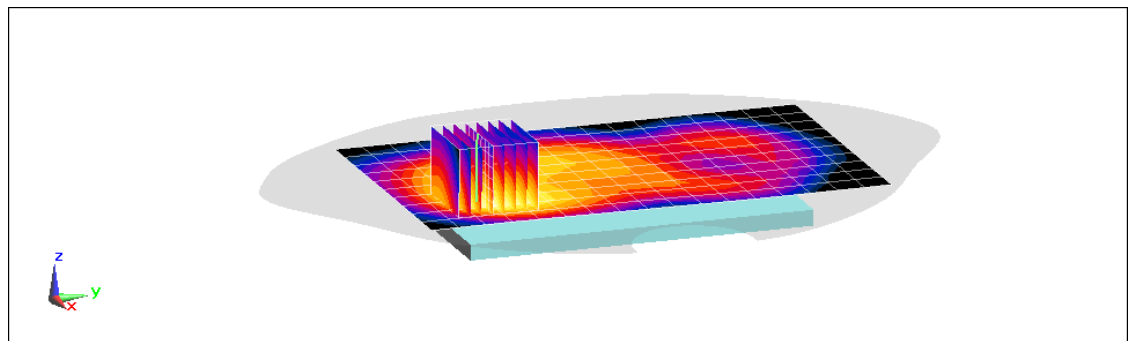

0 dB = 1.16 W/kg = 0.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19176**

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body; Medium parameters used:

$f = 2310 \text{ MHz}$ ;  $\sigma = 1.887 \text{ S/m}$ ;  $\epsilon_r = 51.577$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.63, 4.63, 4.63); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**More: LTE Band 30, Body SAR, Bottom Edge, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


**Area Scan (11x10x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.21 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.05 W/kg**

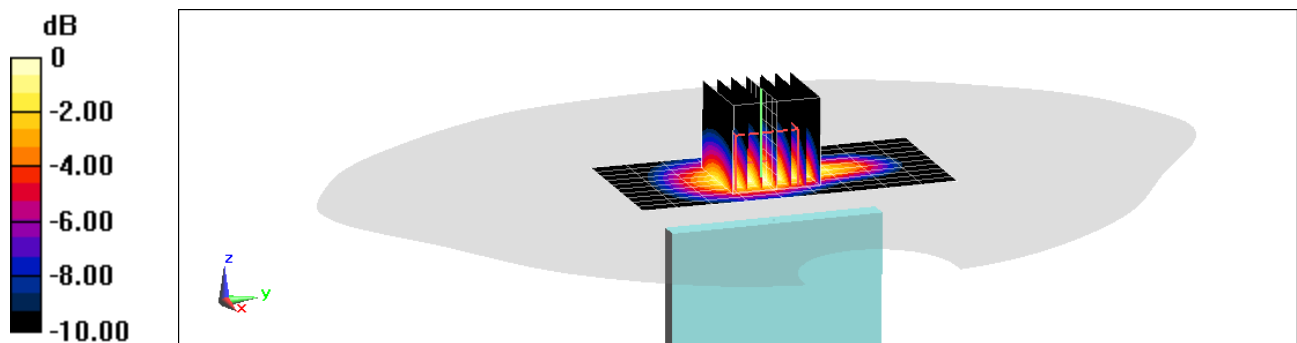

0 dB = 1.29 W/kg = 1.11 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**


Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: 2600 Body; Medium parameters used (interpolated):  
 $f = 2535 \text{ MHz}$ ;  $\sigma = 2.082 \text{ S/m}$ ;  $\epsilon_r = 51.837$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2018; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7410; ConvF(7.43, 7.43, 7.43); Calibrated: 7/17/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Body SAR, Back Side, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 18.50 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.36 W/kg  
**SAR(1 g) = 0.600 W/kg**

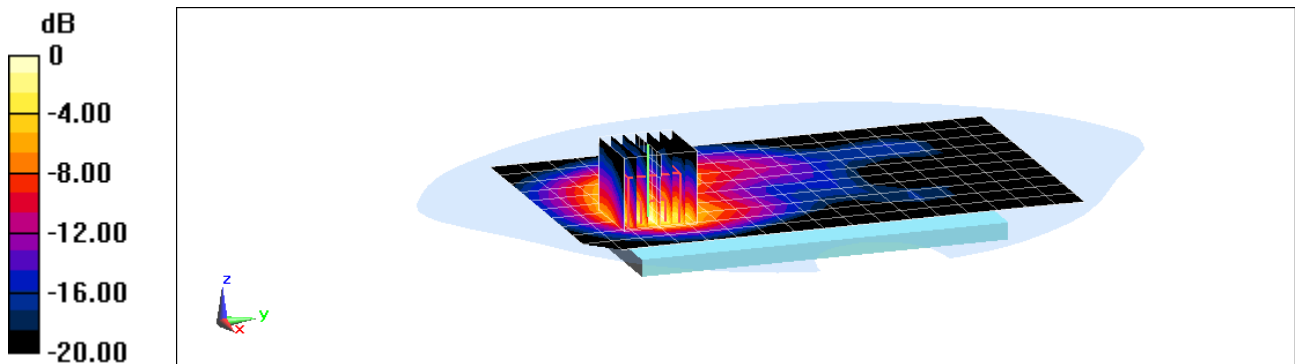

0 dB = 1.06 W/kg = 0.25 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19085**

Communication System: UID 0, LTE Band 41; Frequency: 2549.5 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body; Medium parameters used:

$f = 2550$  MHz;  $\sigma = 2.146$  S/m;  $\epsilon_r = 51.188$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-06-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Body SAR, Back Side, Low-Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.27 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.502 W/kg**

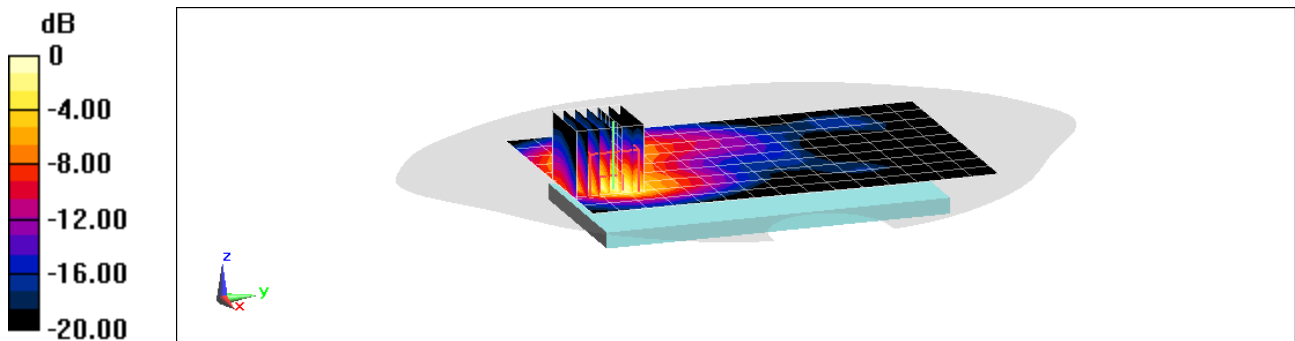

0 dB = 0.692 W/kg = -1.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19173**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: 2450 Body; Medium parameters used (interpolated):  
 $f = 2412 \text{ MHz}$ ;  $\sigma = 1.973 \text{ S/m}$ ;  $\epsilon_r = 52.31$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Back Side**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 12.97 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.627 W/kg  
**SAR(1 g) = 0.301 W/kg**

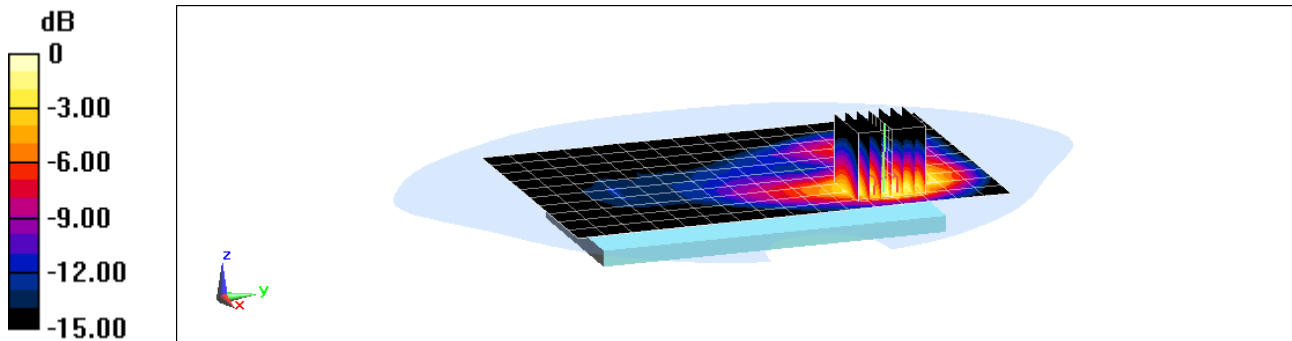

0 dB = 0.394 W/kg = -4.05 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19173**


Communication System: UID 0, \_IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: 2450 Body; Medium parameters used (interpolated):  
 $f = 2412 \text{ MHz}$ ;  $\sigma = 1.973 \text{ S/m}$ ;  $\epsilon_r = 52.31$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Left Side**

**Area Scan (10x17x1):** Measurement grid: dx=5mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.640 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.645 W/kg  
**SAR(1 g) = 0.317 W/kg**

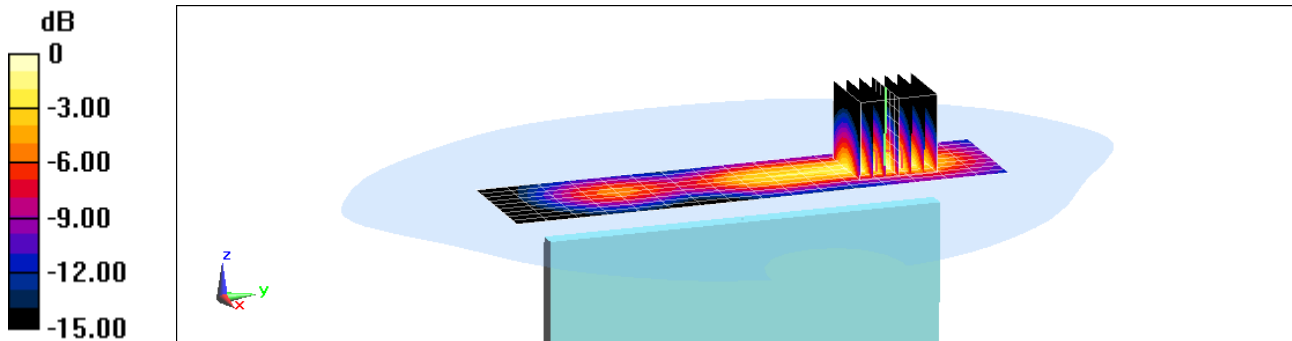

0 dB = 0.430 W/kg = -3.67 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19200**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:  
 $f = 5600 \text{ MHz}$ ;  $\sigma = 5.98 \text{ S/m}$ ;  $\epsilon_r = 47.052$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, MIMO, UNII-2C, 20 MHz Bandwidth,  
Body SAR, Ch 120, 13 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 10.77 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.07 W/kg

**SAR(1 g) = 0.697 W/kg**

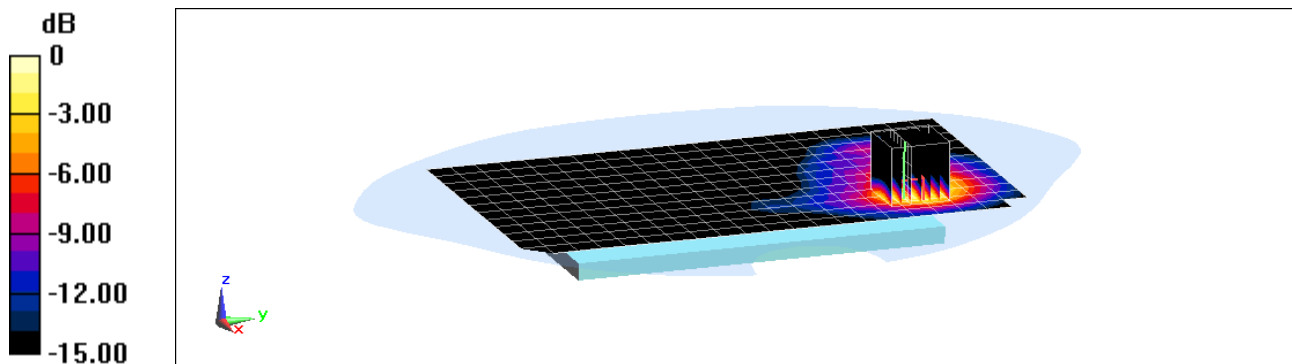

0 dB = 1.63 W/kg = 2.12 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19200**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:  
 $f = 5785 \text{ MHz}$ ;  $\sigma = 6.244 \text{ S/m}$ ;  $\epsilon_r = 46.767$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, MIMO, UNII-3, 20 MHz Bandwidth,  
Body SAR, Ch 157, 13 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 9.751 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.90 W/kg

**SAR(1 g) = 0.632 W/kg**

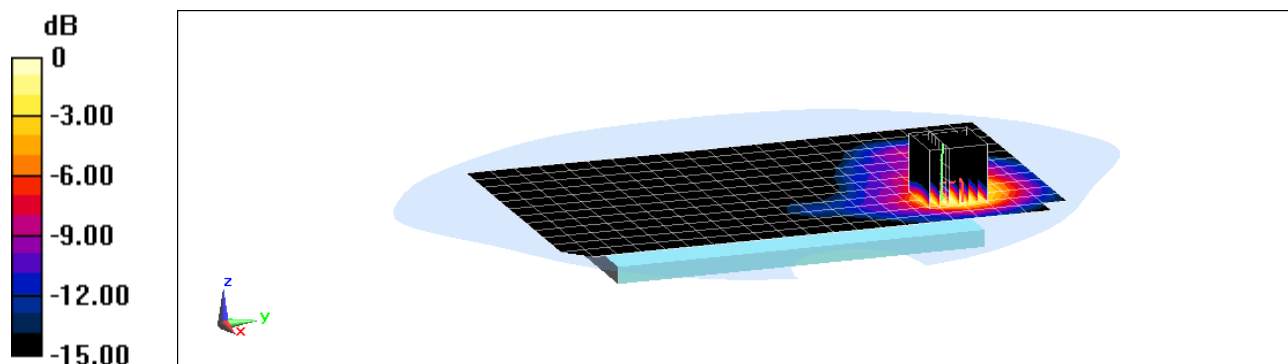

0 dB = 1.54 W/kg = 1.88 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19176**

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.284

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$ ;  $\sigma = 1.961 \text{ S/m}$ ;  $\epsilon_r = 52.343$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Bluetooth, Body SAR, Ch 0, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.942 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0550 W/kg

**SAR(1 g) = 0.028 W/kg**

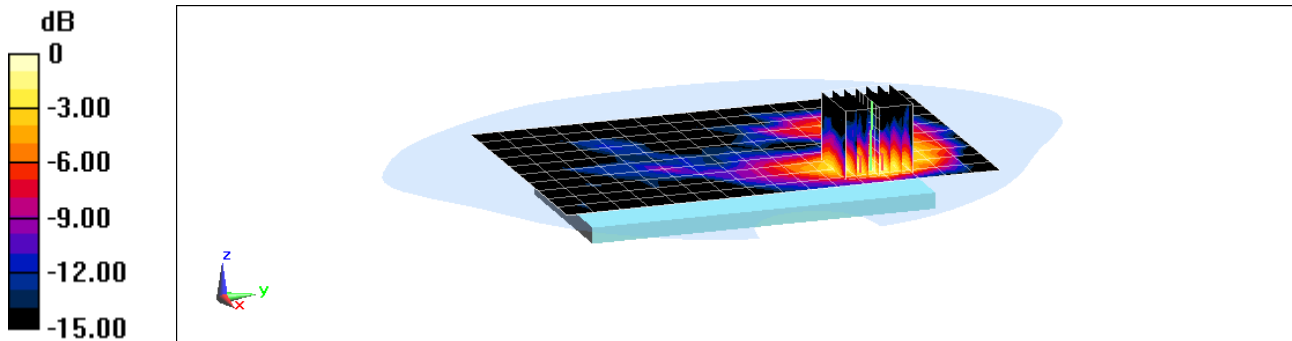

0 dB = 0.0365 W/kg = -14.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFV350A; Type: Portable Handset; Serial: 19200**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:  
 $f = 5620 \text{ MHz}$ ;  $\sigma = 5.985 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, Antenna 1, U-NII-2C, 20 MHz Bandwidth,  
Phablet SAR, Ch 124, 6 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.8100 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 83.3 W/kg

**SAR(10 g) = 1.36 W/kg**

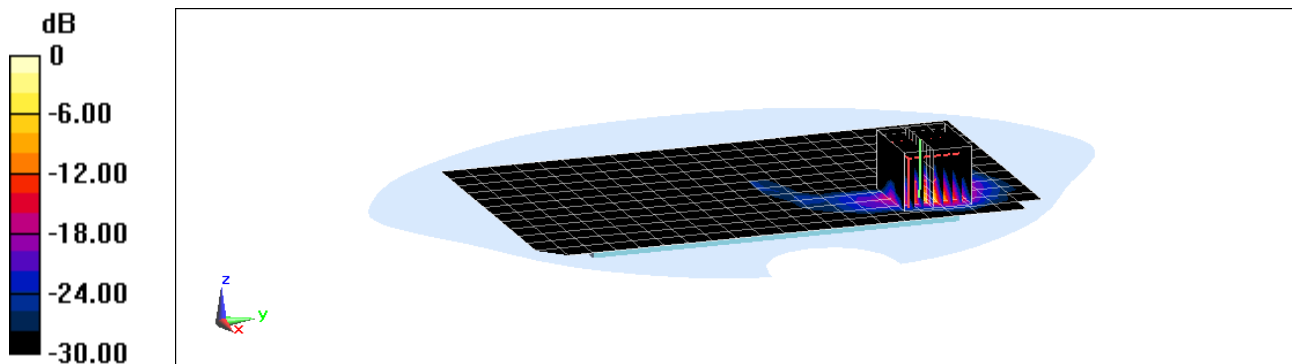

0 dB = 28.5 W/kg = 14.55 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.904 \text{ S/m}$ ;  $\epsilon_r = 41.09$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-12-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(10.18, 10.18, 10.18); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.57 W/kg

**SAR(1 g) = 1.72 W/kg**

Deviation(1 g) = 3.86%

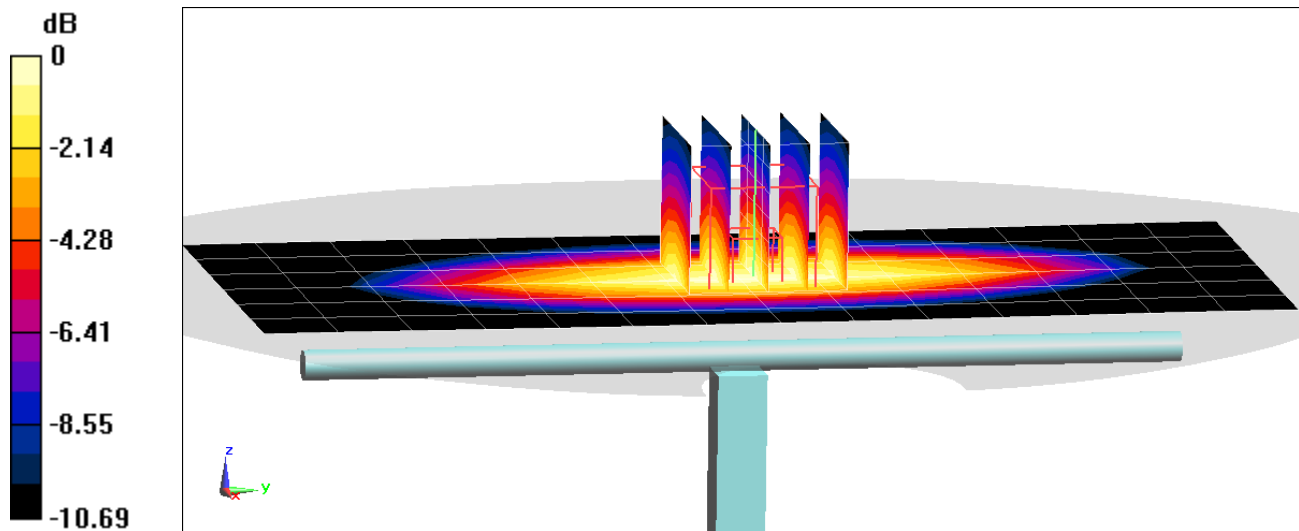

0 dB = 2.29 W/kg = 3.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.918 \text{ S/m}$ ;  $\epsilon_r = 42.828$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-09-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.92 W/kg

**SAR(1 g) = 1.99 W/kg**

Deviation(1 g) = 6.30%

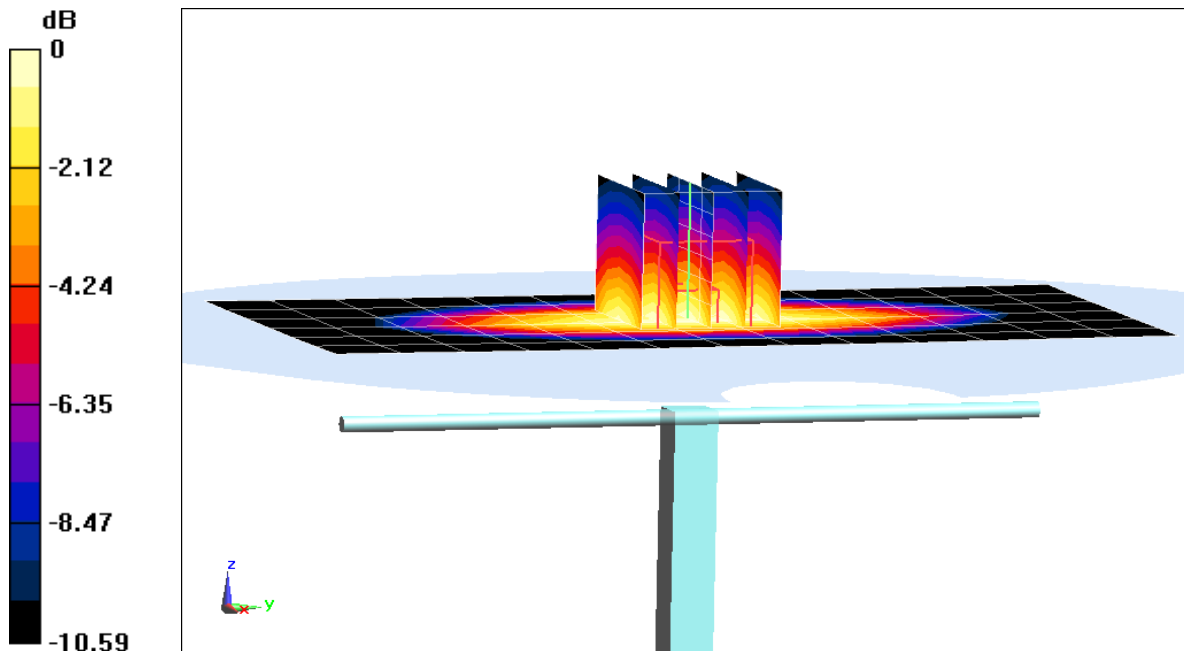

0 dB = 2.32 W/kg = 3.65 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.904 \text{ S/m}$ ;  $\epsilon_r = 42.007$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-11-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.70 W/kg

**SAR(1 g) = 1.85 W/kg**

Deviation(1 g) = -2.84%

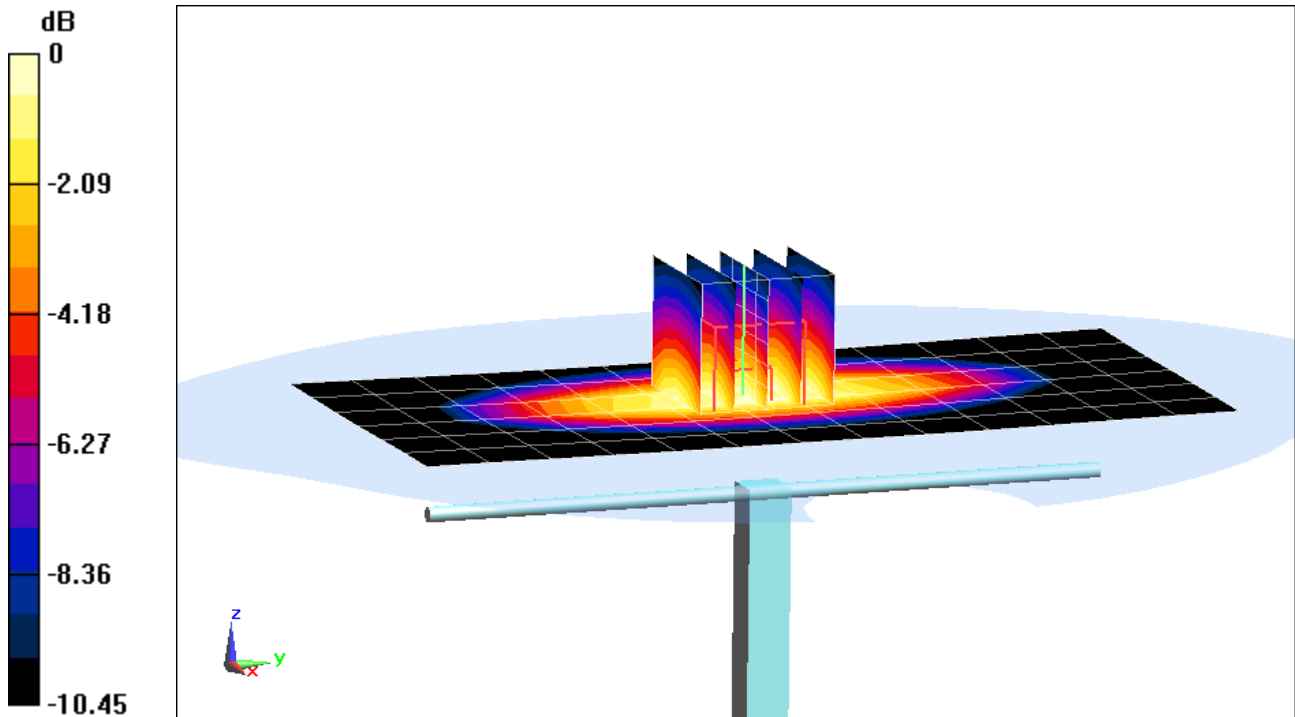

0 dB = 2.16 W/kg = 3.34 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: 1750 Head; Medium parameters used:  
 $f = 1750 \text{ MHz}$ ;  $\sigma = 1.403 \text{ S/m}$ ;  $\epsilon_r = 39.58$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-07-2018; Ambient Temp: 20.3°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(8.66, 8.66, 8.66); Calibrated: 7/17/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.84 W/kg

**SAR(1 g) = 3.72 W/kg**

Deviation(1 g) = 2.20%

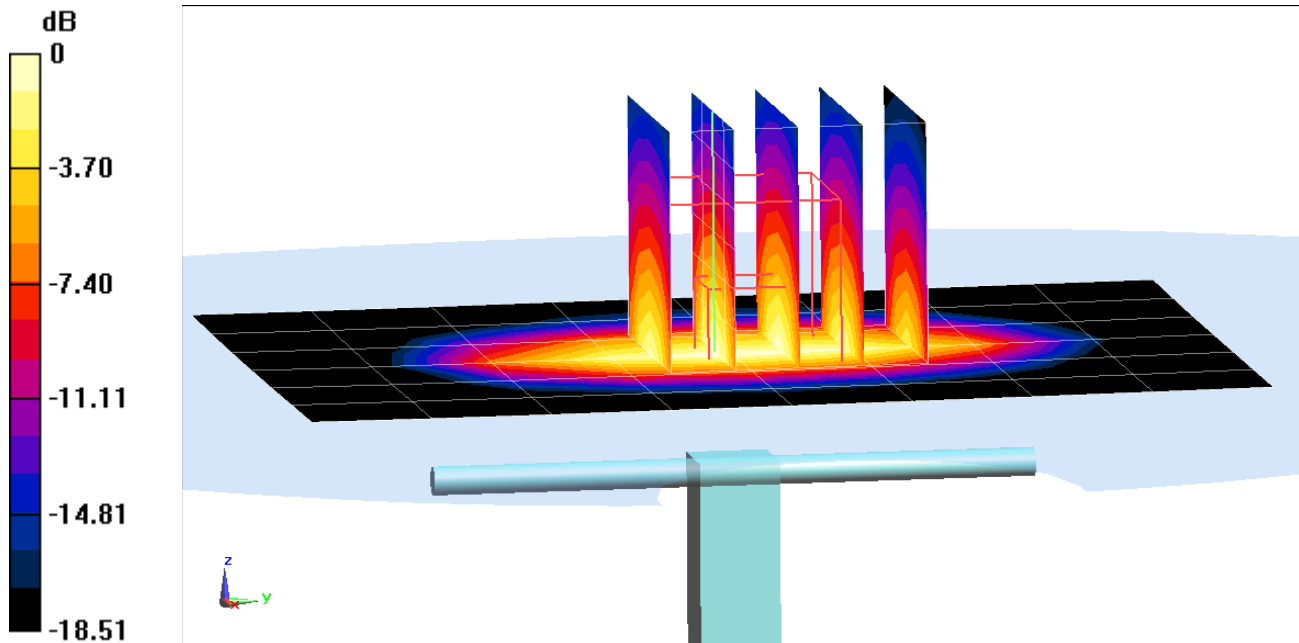

0 dB = 5.69 W/kg = 7.55 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Head; Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.435 \text{ S/m}$ ;  $\epsilon_r = 38.081$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.98, 7.98, 7.98); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018  
Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1900 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 8.17 W/kg  
**SAR(1 g) = 4.35 W/kg**  
Deviation(1 g) = 8.48%

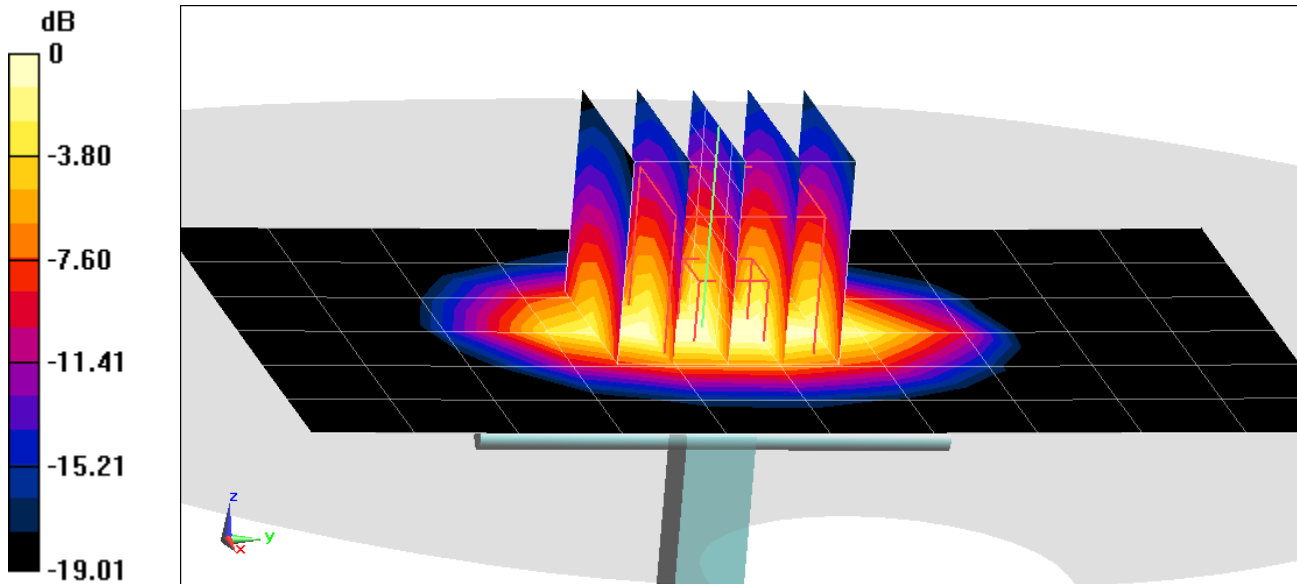

0 dB = 6.74 W/kg = 8.29 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1073**

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2300 Head; Medium parameters used:

$f = 2300 \text{ MHz}$ ;  $\sigma = 1.689 \text{ S/m}$ ;  $\epsilon_r = 40.974$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.99, 4.99, 4.99); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2300 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 9.22 W/kg

**SAR(1 g) = 4.78 W/kg**

Deviation(1 g) = -1.65%

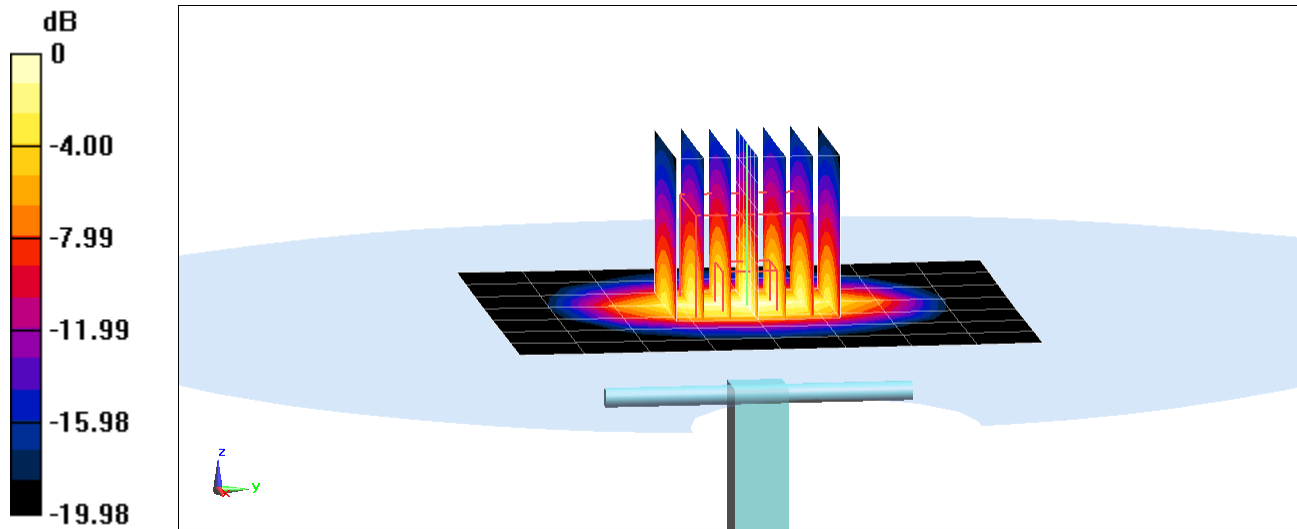

0 dB = 6.23 W/kg = 7.94 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 39.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(1 g) = 5.49 W/kg**

Deviation(1 g) = 4.17%

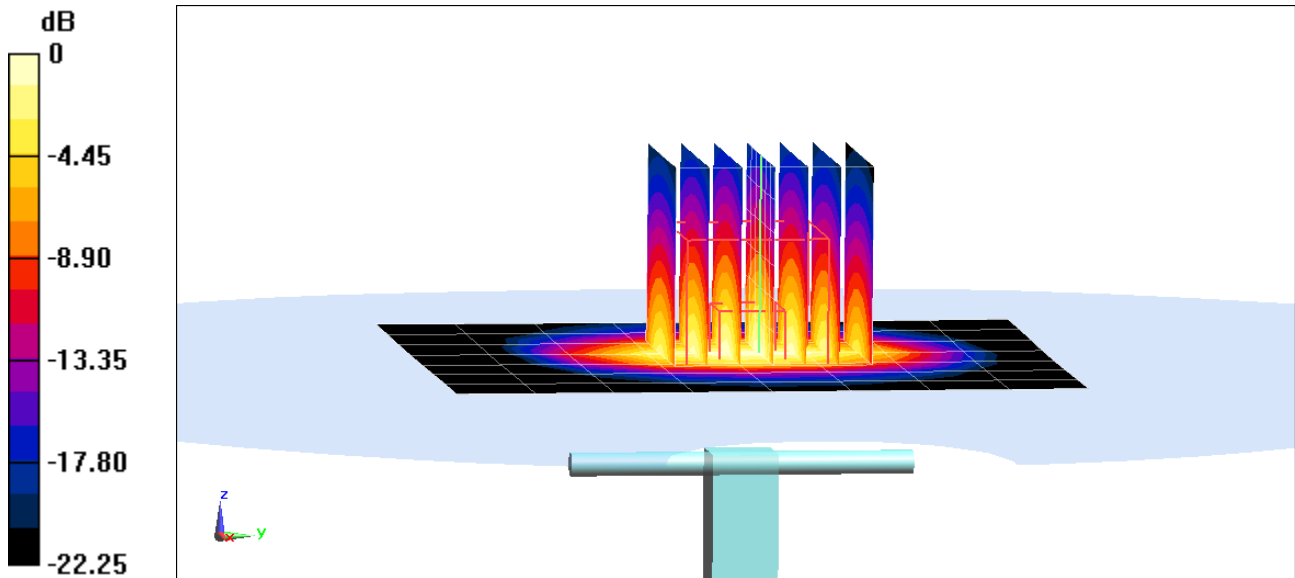

0 dB = 7.24 W/kg = 8.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head; Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.015$  S/m;  $\epsilon_r = 39.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-09-2018; Ambient Temp: 22.4°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.1 W/kg

**SAR(1 g) = 5.57 W/kg**

Deviation(1 g) = -1.24%

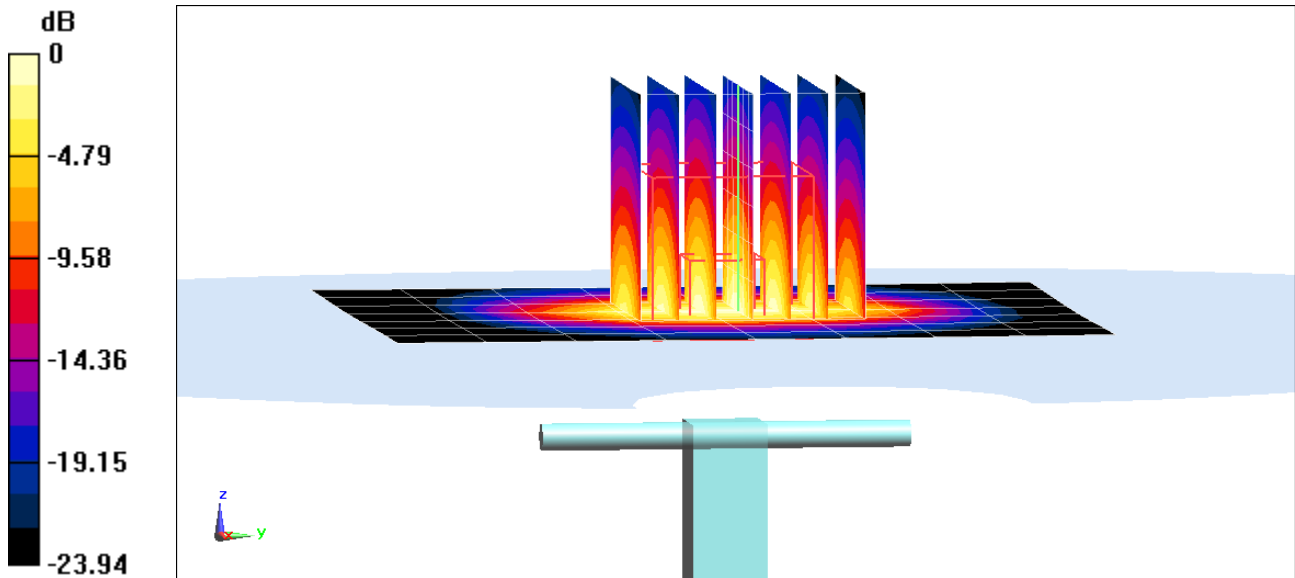

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head; Medium parameters used (interpolated):  
 $f = 5250 \text{ MHz}$ ;  $\sigma = 4.614 \text{ S/m}$ ;  $\epsilon_r = 37.206$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.1 W/kg

**SAR(1 g) = 3.68 W/kg**

Deviation(1 g) = -6.72%

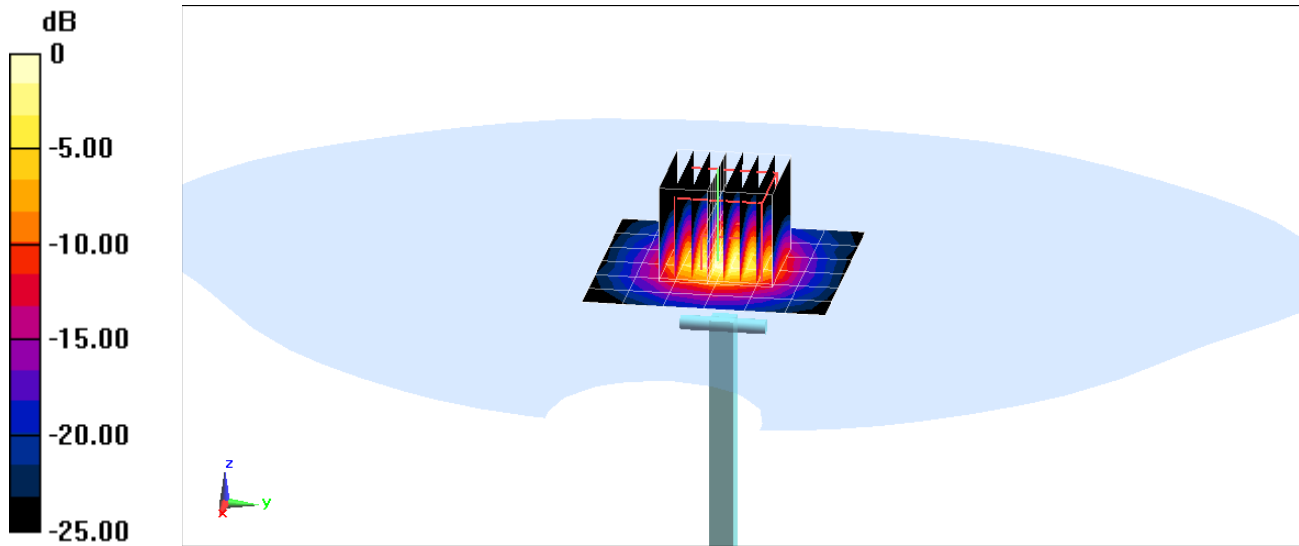

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 4.981 \text{ S/m}$ ;  $\epsilon_r = 36.743$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 3.91 W/kg**

Deviation(1 g) = -6.46%

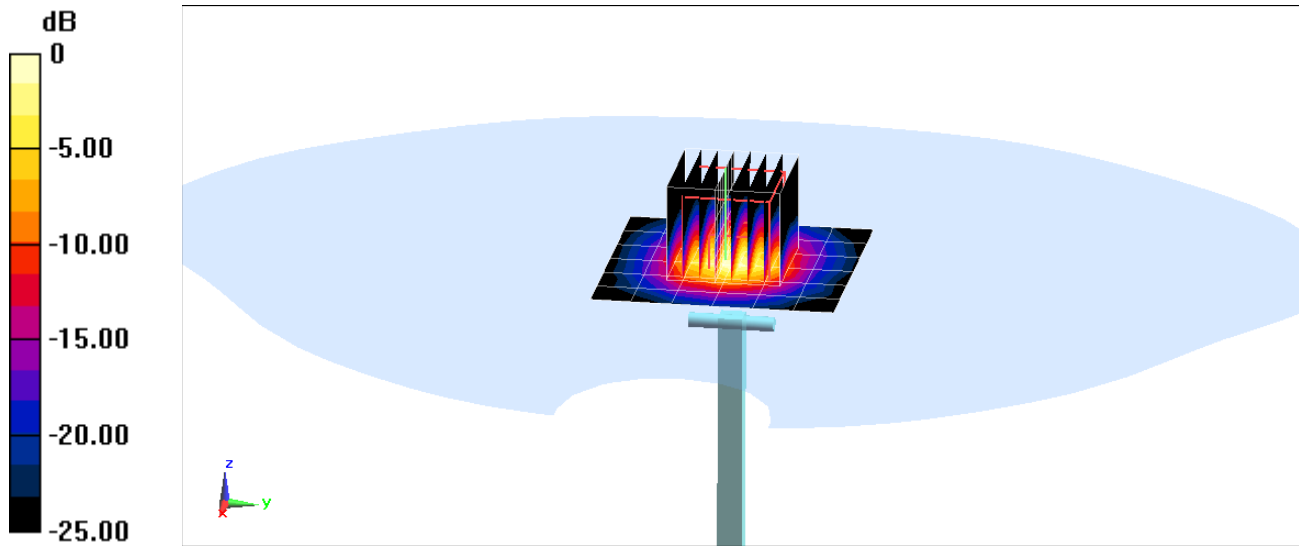

0 dB = 9.48 W/kg = 9.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head; Medium parameters used (interpolated):  
 $f = 5750 \text{ MHz}$ ;  $\sigma = 5.138 \text{ S/m}$ ;  $\epsilon_r = 36.474$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0cm

Test Date: 04-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

**SAR(1 g) = 3.91 W/kg**

Deviation(1 g) = -1.14%

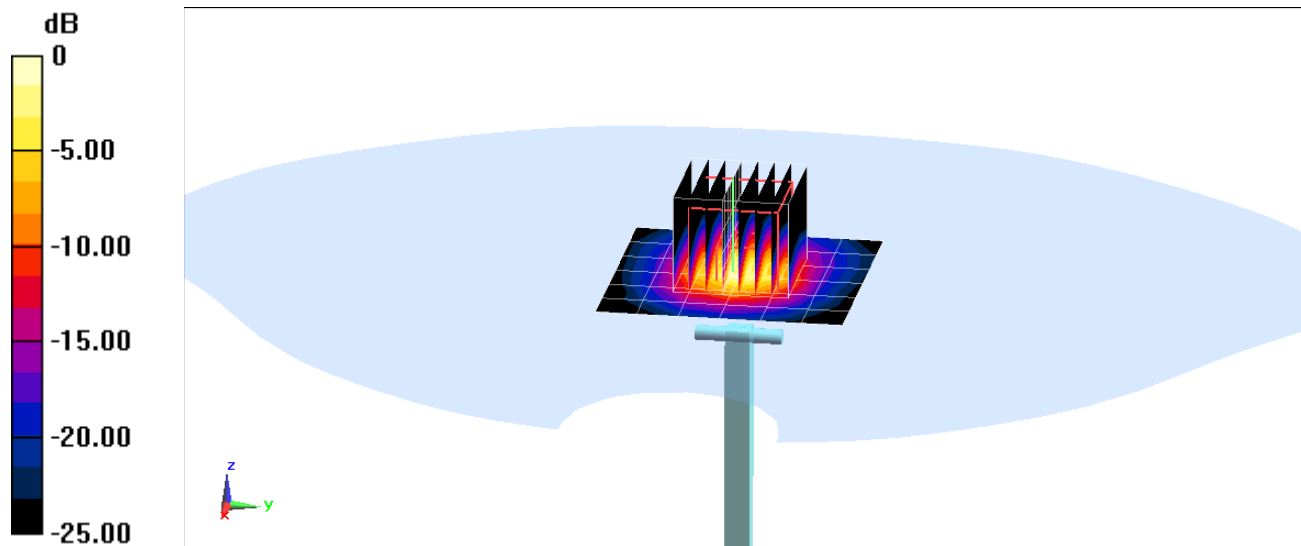

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.977 \text{ S/m}$ ;  $\epsilon_r = 53.125$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.60 W/kg

**SAR(1 g) = 1.75 W/kg**

Deviation(1 g) = 3.80%

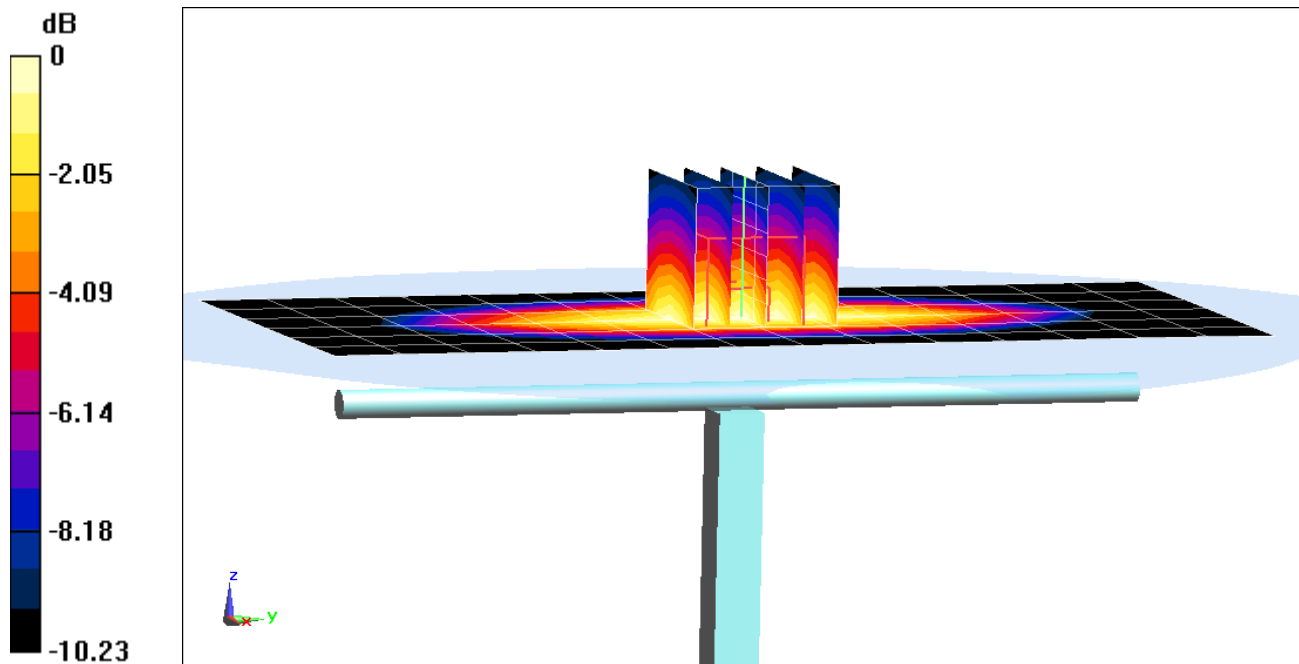



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.965 \text{ S/m}$ ;  $\epsilon_r = 53.572$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-11-2018; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.83 W/kg

**SAR(1 g) = 1.94 W/kg**

Deviation(1 g) = -0.10%

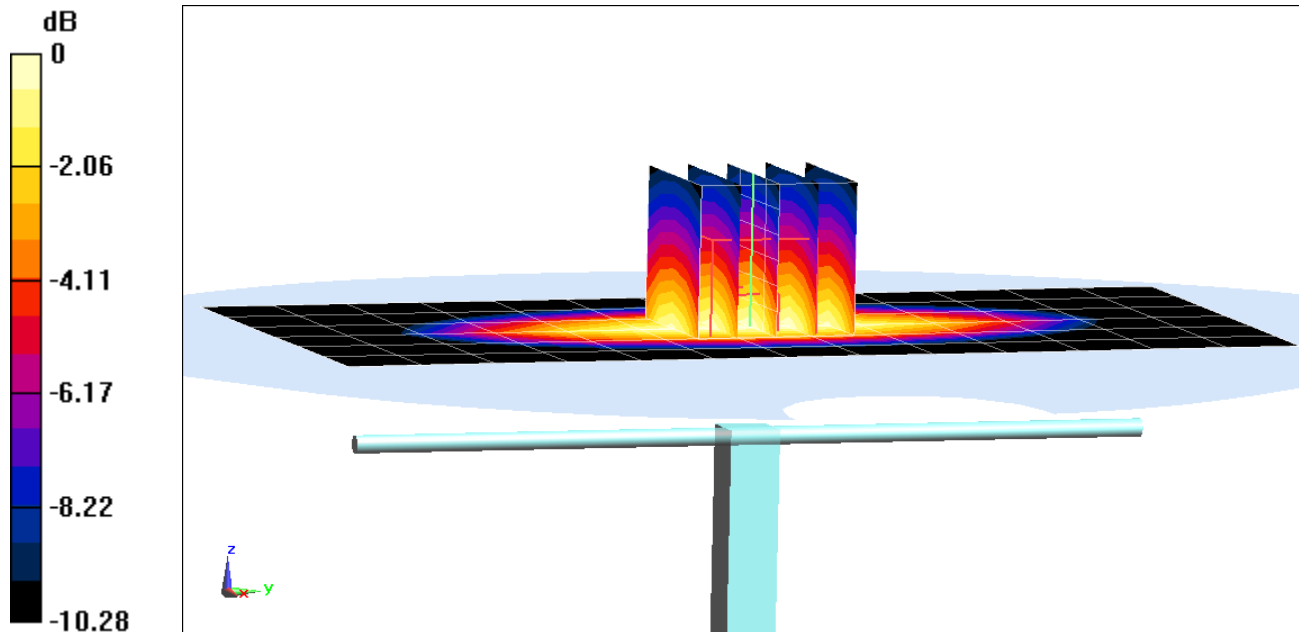

0 dB = 2.25 W/kg = 3.52 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.513 \text{ S/m}$ ;  $\epsilon_r = 51.512$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-12-2018; Ambient Temp: 23.0°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.94 W/kg

**SAR(1 g) = 3.91 W/kg**

Deviation(1 g) = 5.68%

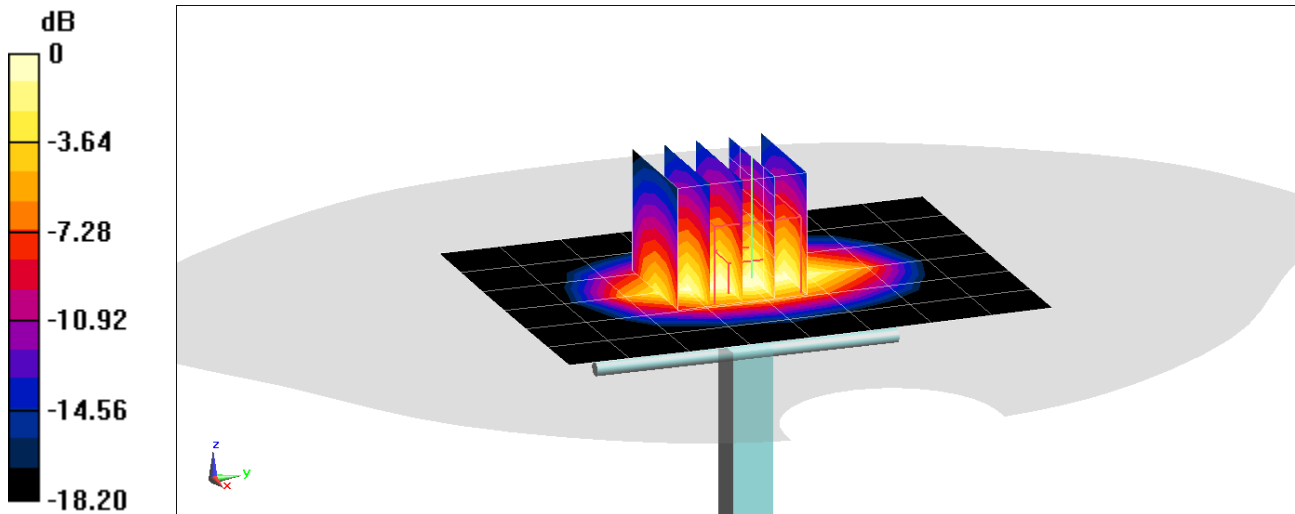

0 dB = 4.62 W/kg = 6.65 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Body; Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.581 \text{ S/m}$ ;  $\epsilon_r = 53.591$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.83 W/kg

**SAR(1 g) = 4.25 W/kg**

Deviation(1 g) = 7.32%

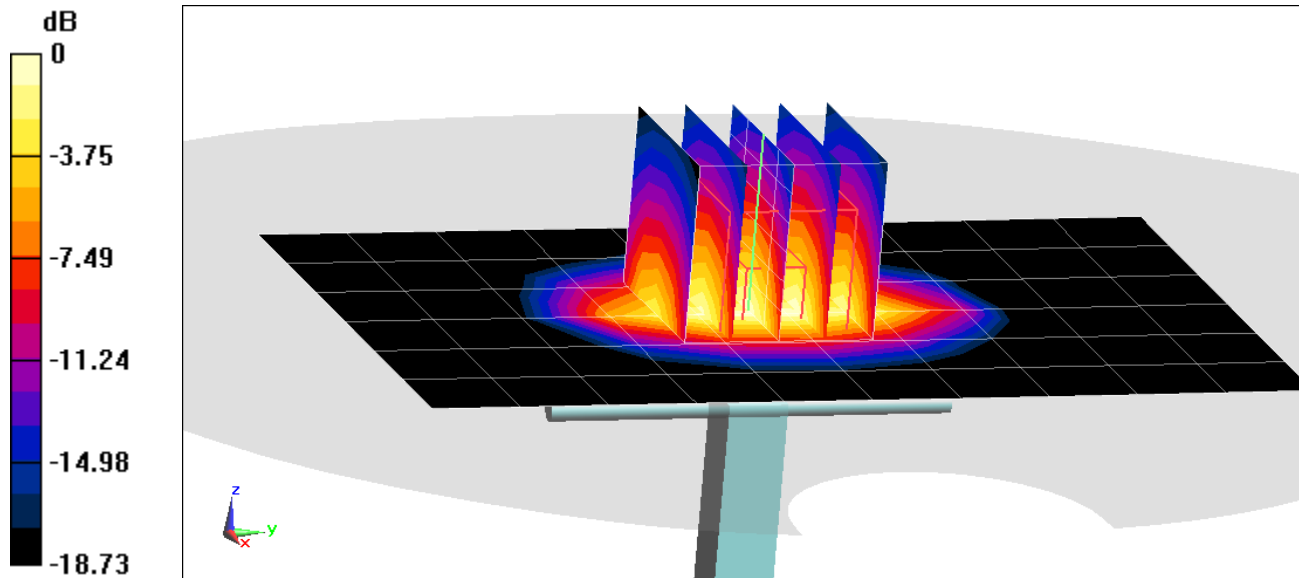

0 dB = 6.54 W/kg = 8.16 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1073**

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2300 Body; Medium parameters used:

$f = 2300 \text{ MHz}$ ;  $\sigma = 1.876 \text{ S/m}$ ;  $\epsilon_r = 51.612$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.63, 4.63, 4.63); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2300 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 9.98 W/kg

**SAR(1 g) = 5.03 W/kg**

Deviation(1 g) = 4.57%

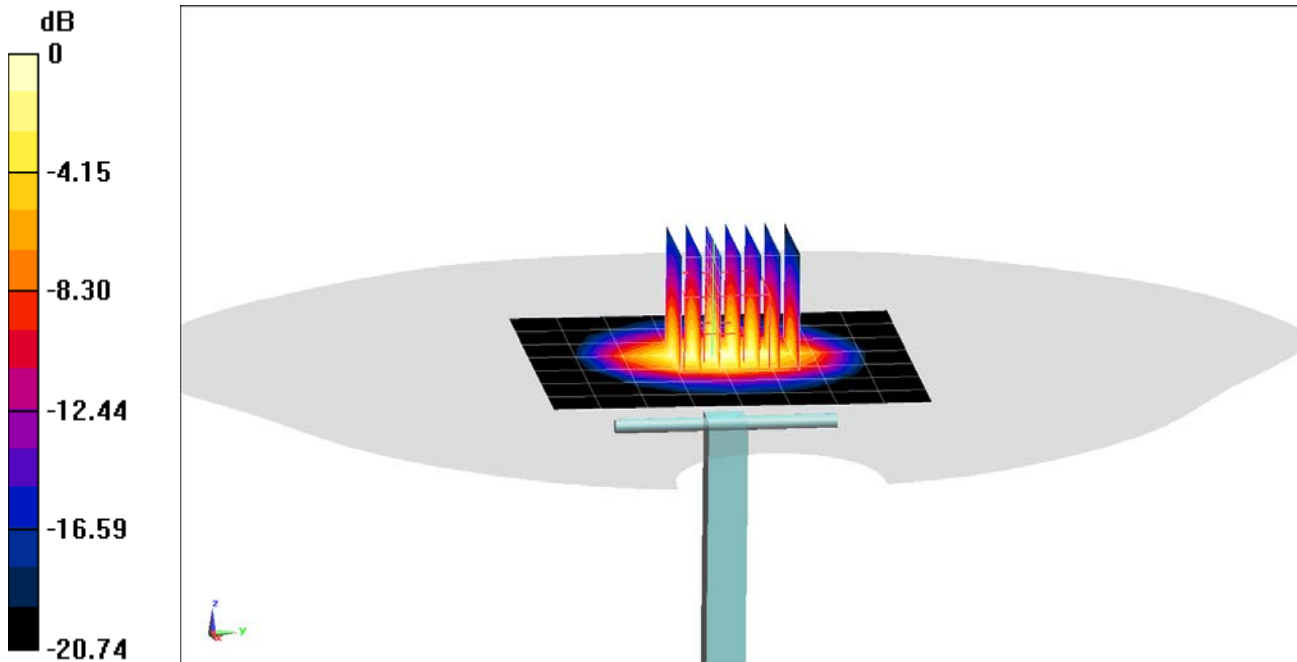

0 dB = 6.50 W/kg = 8.13 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.027$  S/m;  $\epsilon_r = 51.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-06-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.4 W/kg

**SAR(1 g) = 5.02 W/kg**

Deviation(1 g) = -1.76%

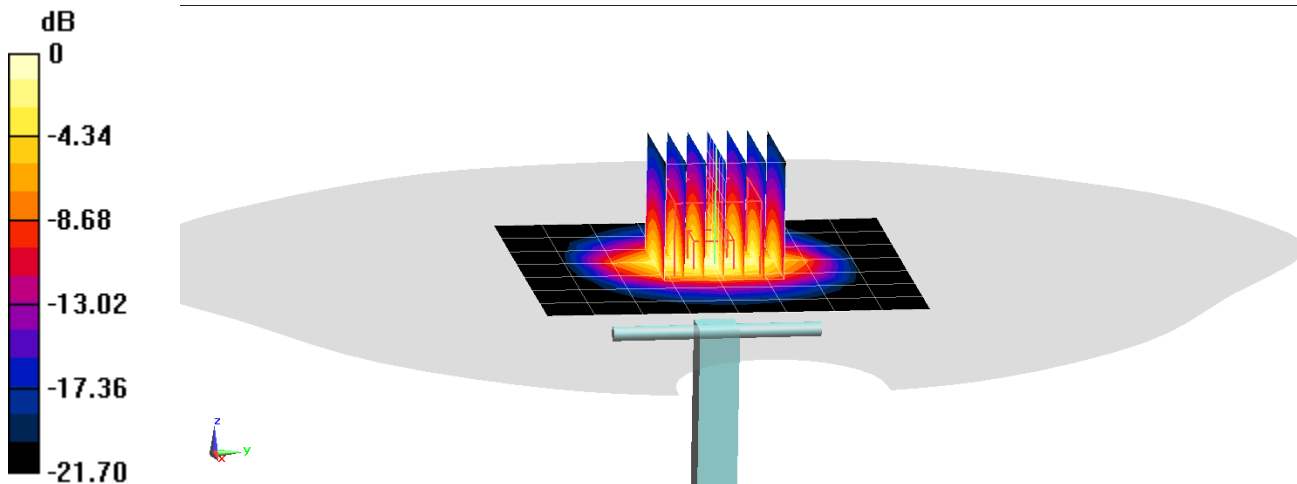

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.022 \text{ S/m}$ ;  $\epsilon_r = 52.188$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

**SAR(1 g) = 5.49 W/kg**

Deviation(1 g) = 7.44%

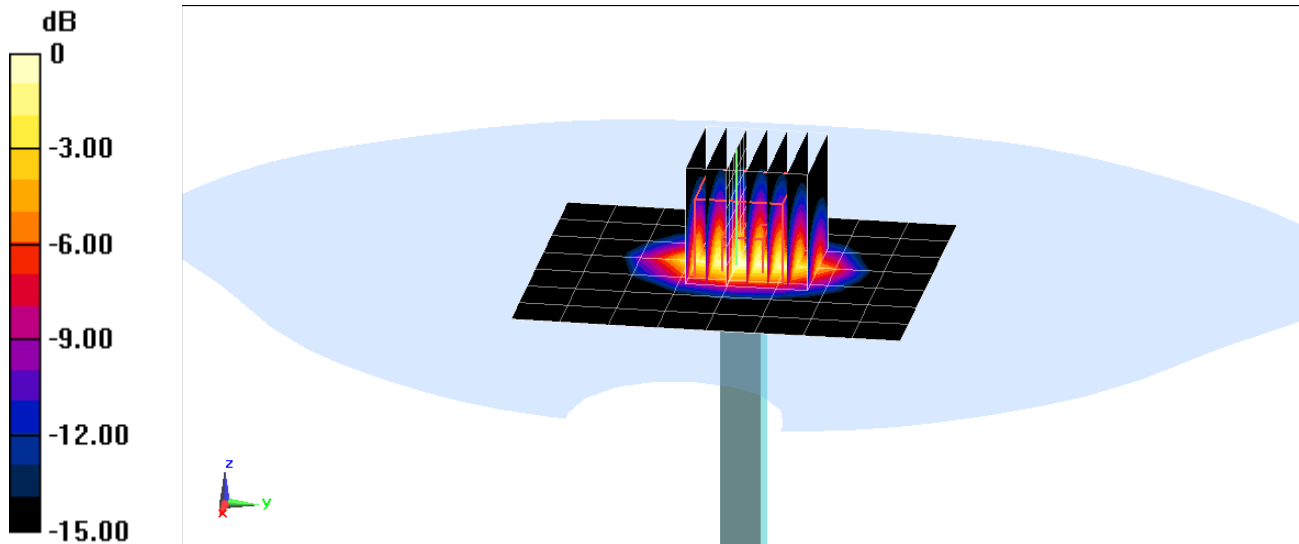

0 dB = 9.09 W/kg = 9.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.209$  S/m;  $\epsilon_r = 51.032$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-06-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 5.41 W/kg**

Deviation(1 g) = -0.37%

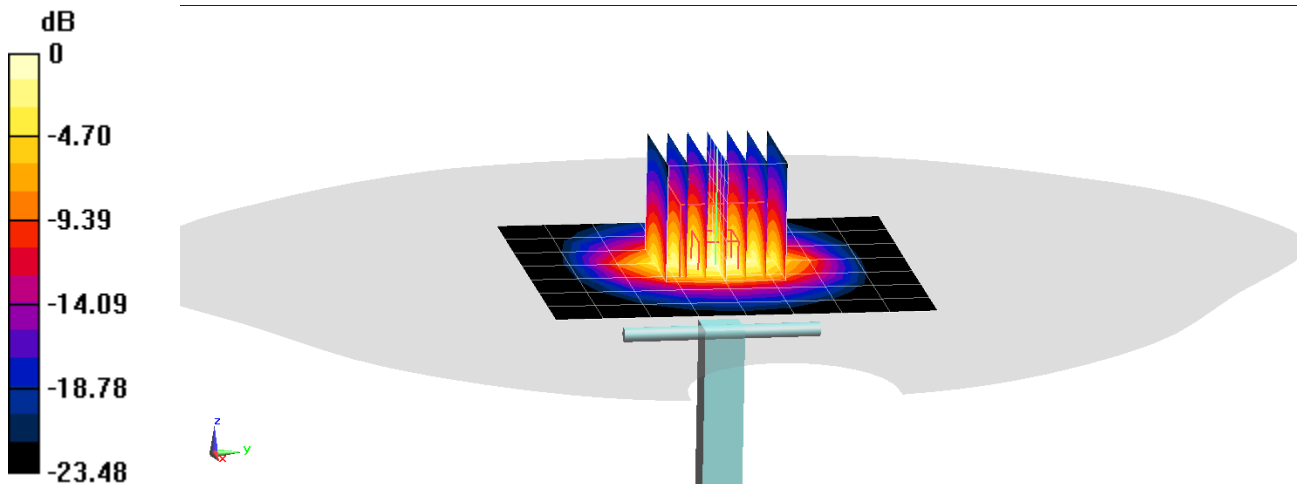

0 dB = 7.19 W/kg = 8.57 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body; Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.166 \text{ S/m}$ ;  $\epsilon_r = 51.57$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2018; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7410; ConvF(7.43, 7.43, 7.43); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 5.27 W/kg**

Deviation(1 g) = -2.95%

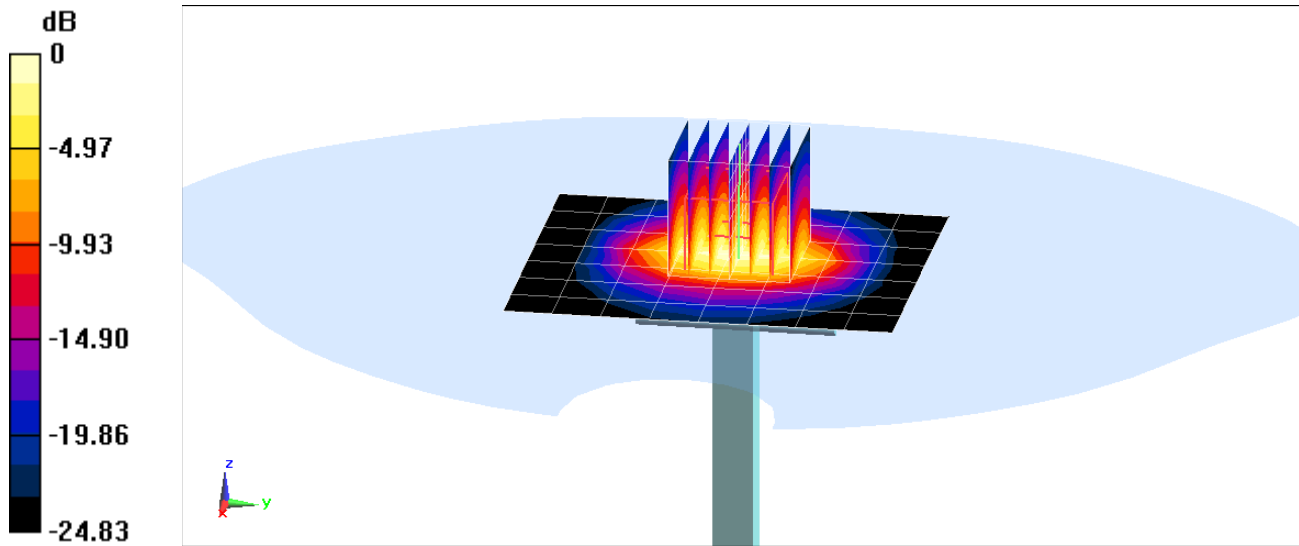



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used (interpolated):  
 $f = 5250 \text{ MHz}$ ;  $\sigma = 5.516 \text{ S/m}$ ;  $\epsilon_r = 47.642$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.05 W/kg**

Deviation(1 g) = -2.47%; Deviation(10 g) = -2.33%

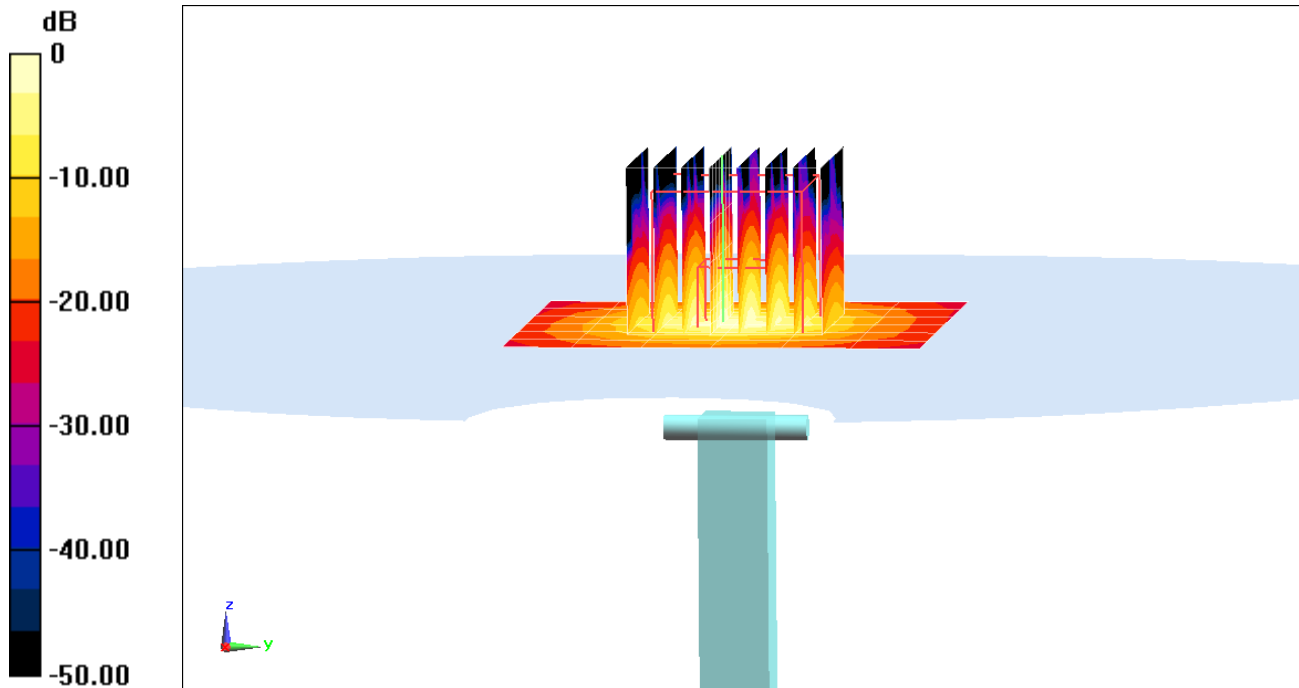

0 dB = 9.09 W/kg = 9.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used:  
 $f = 5600 \text{ MHz}$ ;  $\sigma = 5.98 \text{ S/m}$ ;  $\epsilon_r = 47.052$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 3.94 W/kg; SAR(10 g) = 1.09 W/kg**

Deviation(1 g) = 0.38%; Deviation(10 g) = -1.36%

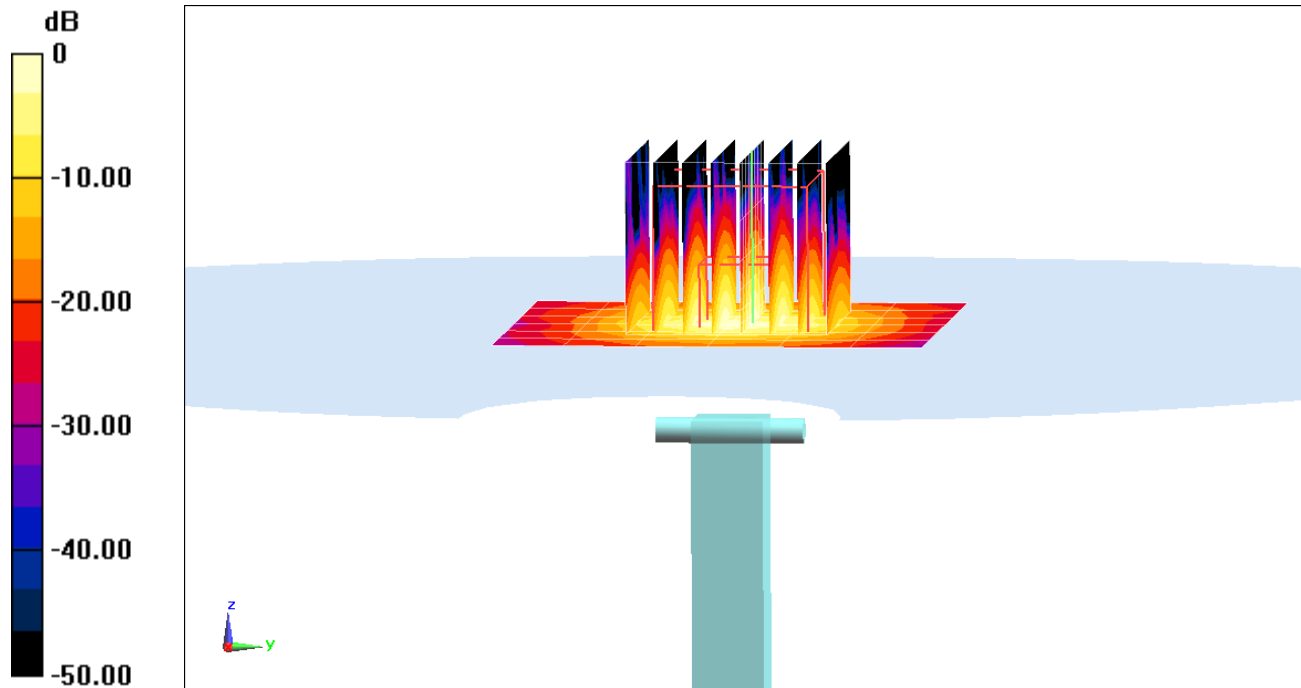

0 dB = 10.0 W/kg = 10.00 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used (interpolated):  
 $f = 5750 \text{ MHz}$ ;  $\sigma = 6.192 \text{ S/m}$ ;  $\epsilon_r = 46.813$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 3.67 W/kg**

Deviation(1 g) = -4.80%

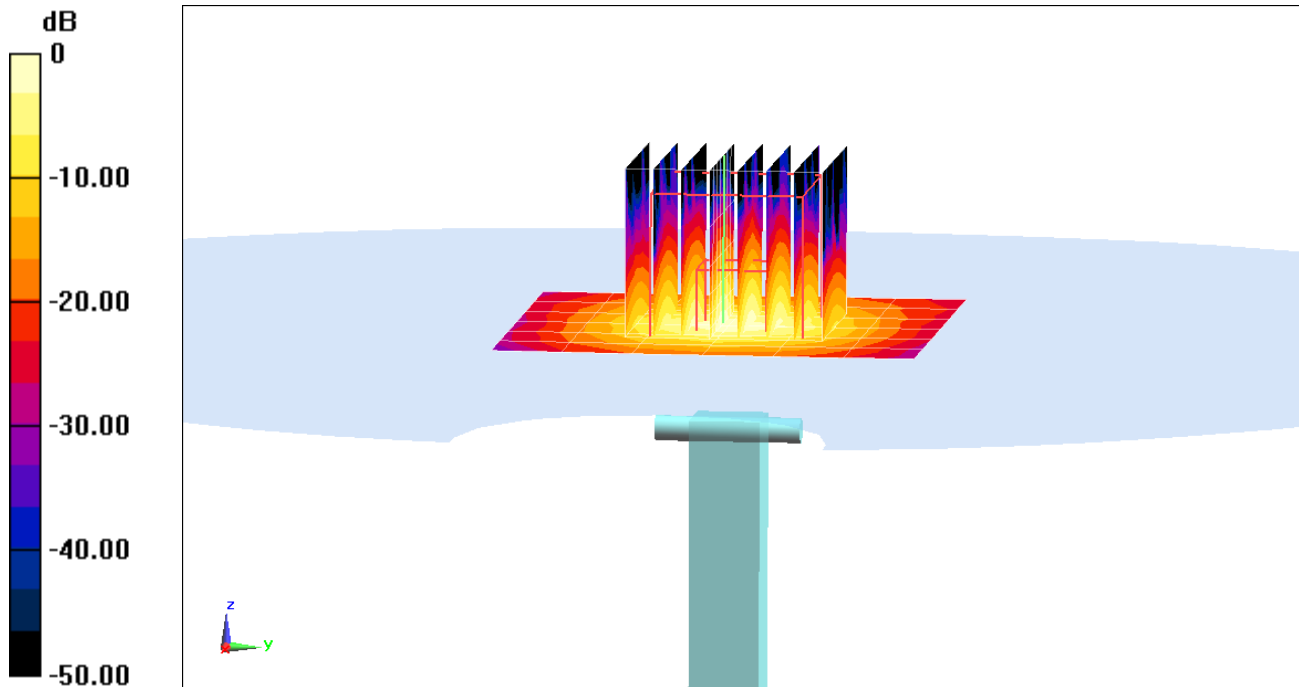

0 dB = 8.96 W/kg = 9.52 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003\_Jan18**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BN*  
*01-25-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner**      Function: **Laboratory Technician**

Signature  
*Leif Klysner*

Approved by: **Katja Pokovic**      Technical Manager

*Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.0
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5.0 mm	
<b>Frequency</b>	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.28 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.42 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	55.5	0.96 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	55.0 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>8.58 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>5.71 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 $\Omega$ - 2.1 j $\Omega$
Return Loss	- 27.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2 $\Omega$ - 6.2 j $\Omega$
Return Loss	- 24.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009



## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

### SAR result with SAM Head (Top)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.94 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Mouth)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Neck)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.06 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Ear)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.70 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.60 W/kg ± 16.9 % (k=2)

# DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

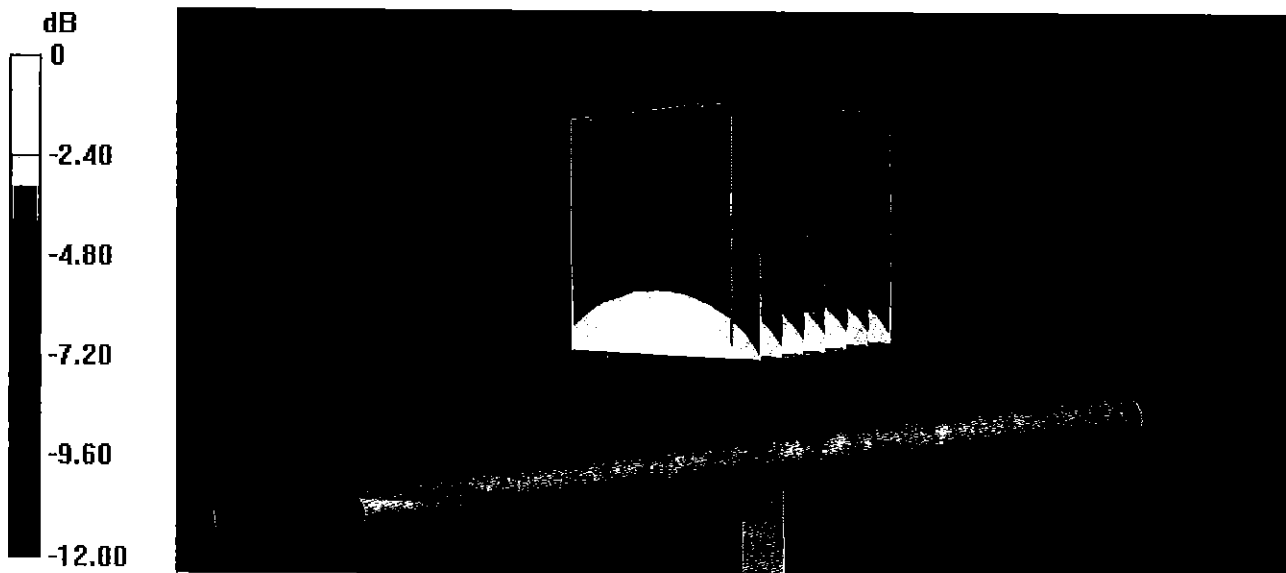


0 dB = 2.80 W/kg = 4.47 dBW/kg

# Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07  
CH1 S11 1 U FS 1: 53.754  $\Omega$  -2.0996  $\Omega$  101.07 pF 750.000 000 MHz

\*  
Del  
CA

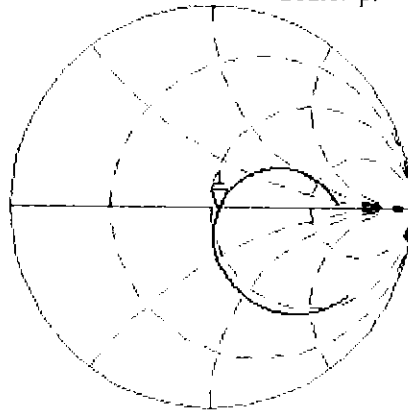

Avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -27.643 dB 750.000 000 MHz

CA

Avg  
16

H1d

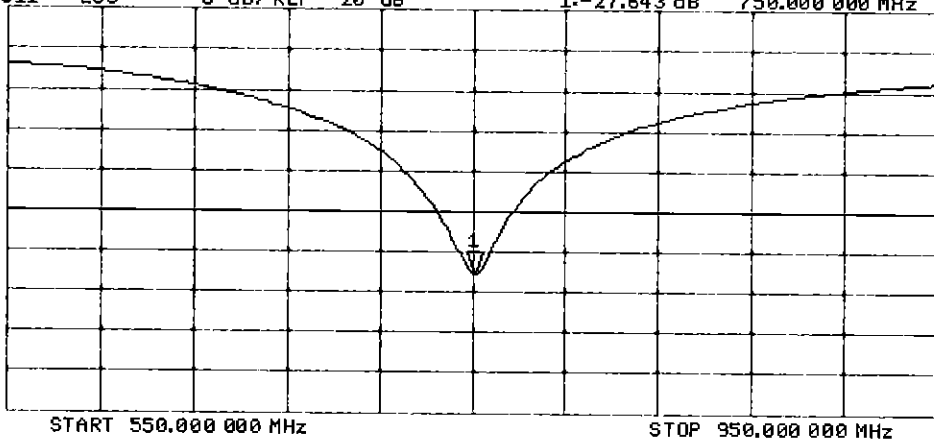

# DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg**

Maximum value of SAR (measured) = 2.83 W/kg

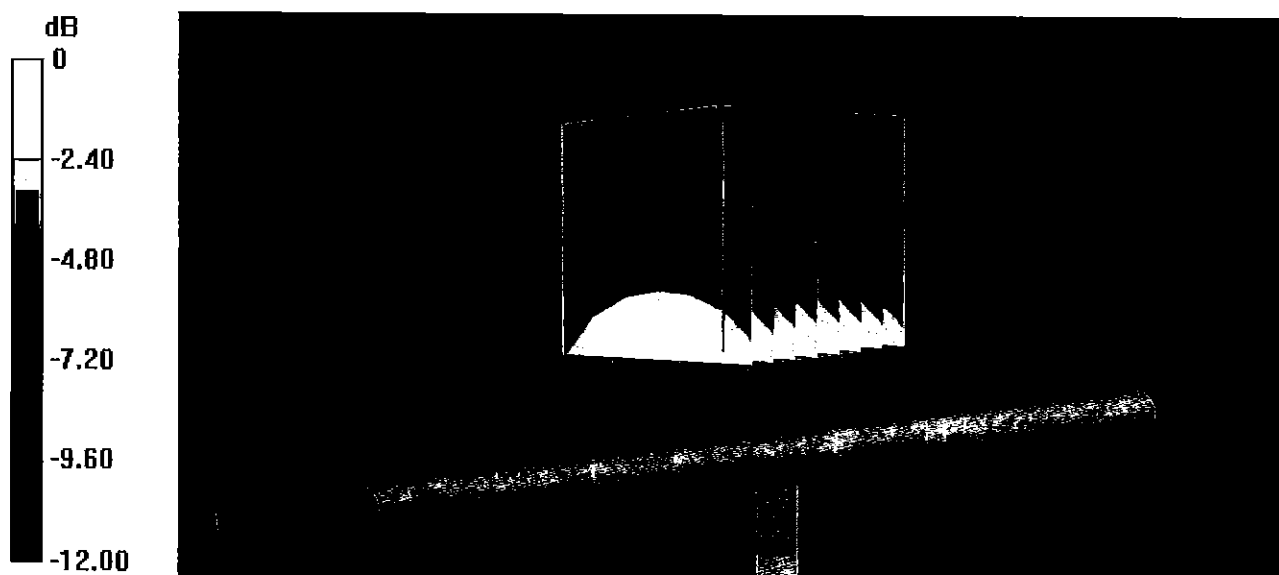

0 dB = 2.83 W/kg = 4.52 dBW/kg

# Impedance Measurement Plot for Body TSL


12 Jan 2018 13:13:21  
**CH1** S11 1 U FS 1: 49.234  $\Omega$  -6.1934  $\Omega$  34.264 pF 750.000 000 MHz

\*  
 De1

CA

Avg  
 16

H1d

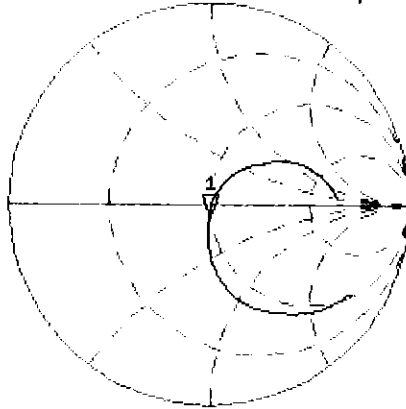


**CH2** S11 LOG 5 dB/REF -20 dB 1:-24.047 dB 750.000 000 MHz

CA

Avg  
 16

H1d

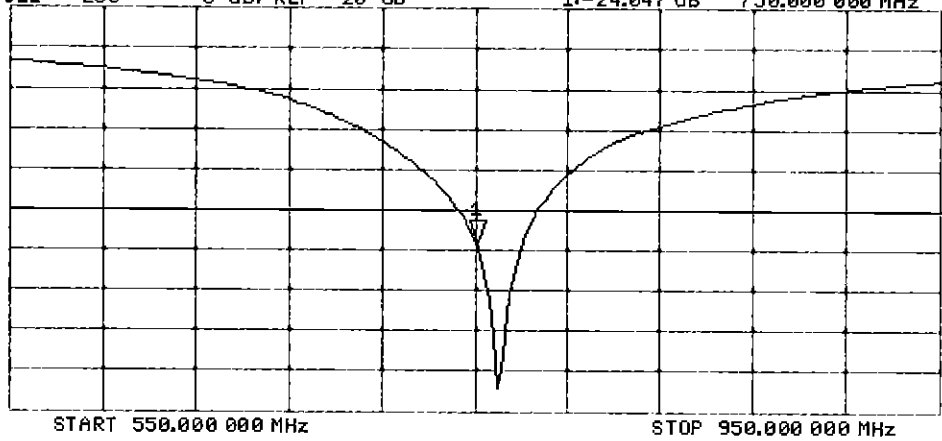

## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg**

Maximum value of SAR (measured) = 2.58 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.62 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.56 W/kg



**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg**

Maximum value of SAR (measured) = 2.11 W/kg

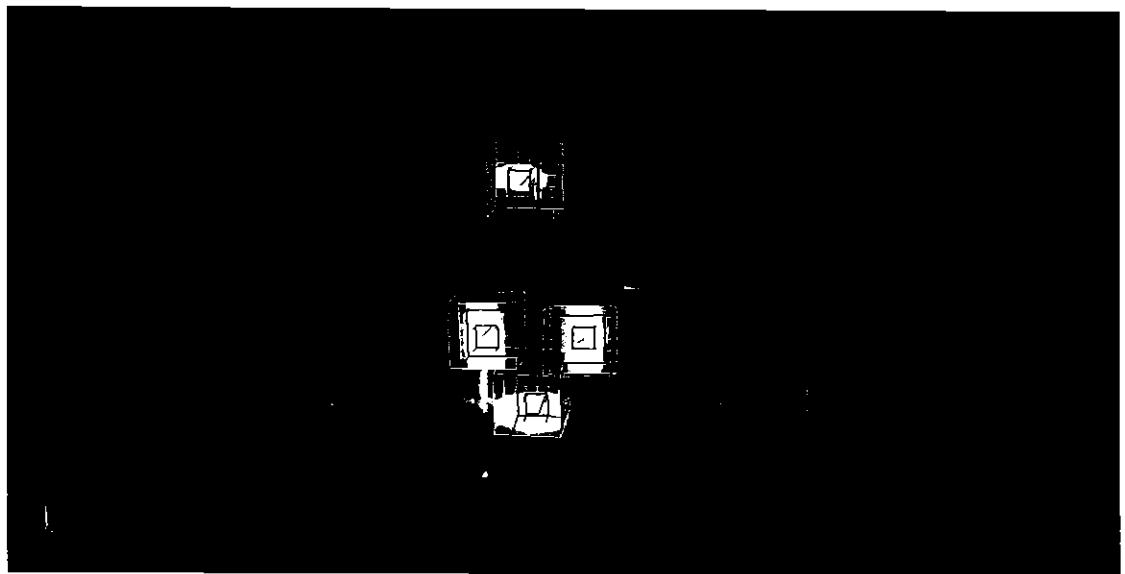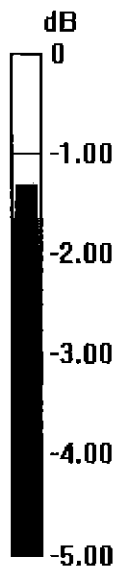

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132\_Jan18**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BNV*  
*01-25-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner**      Name: **Leif Klysner**      Function: **Laboratory Technician**

Signature: *Leif Klysner*

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature: *Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.36 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.71 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.39 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 $\Omega$ - 2.9 j $\Omega$
Return Loss	- 29.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 $\Omega$ - 5.7 j $\Omega$
Return Loss	- 23.9 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

### SAR result with SAM Head (Top)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.41 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Mouth)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.69 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.45 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Neck)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.25 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Ear)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.96 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg ± 16.9 % (k=2)

# DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 3.22 W/kg



0 dB = 3.22 W/kg = 5.08 dBW/kg

# Impedance Measurement Plot for Head TSL

8 Jan 2018 16:29:07

CH1 S11 1 U FS

1: 51.768  $\Omega$  -2.8984  $\Omega$  65.761 pF


835.000 000 MHz

#  
De1

Cor

Avg  
16

H1d

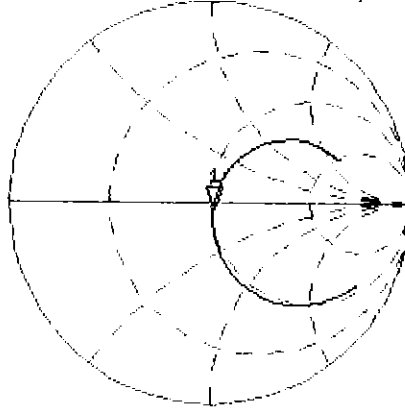

CH2 S11 LOG

5 dB/REF -20 dB


1:-29.535 dB

835.000 000 MHz

Cor

Avg  
16

H1d

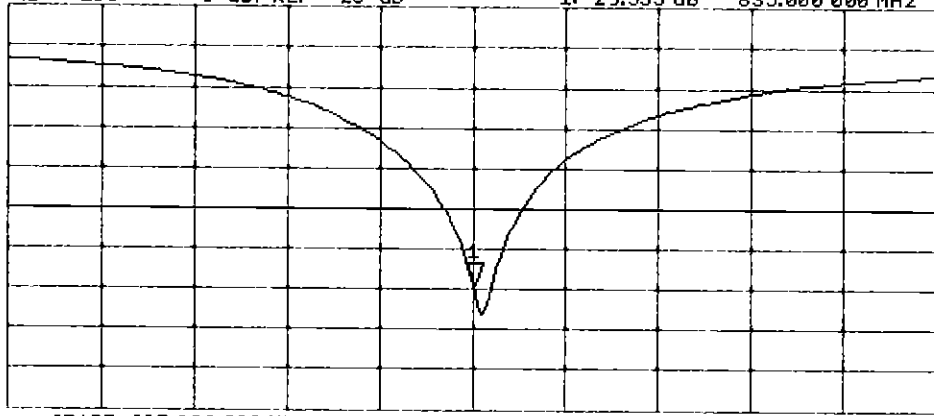

START 835.000 000 MHz

STOP 1 035.000 000 MHz

# DASY5 Validation Report for Body TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 54.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 3.24 W/kg

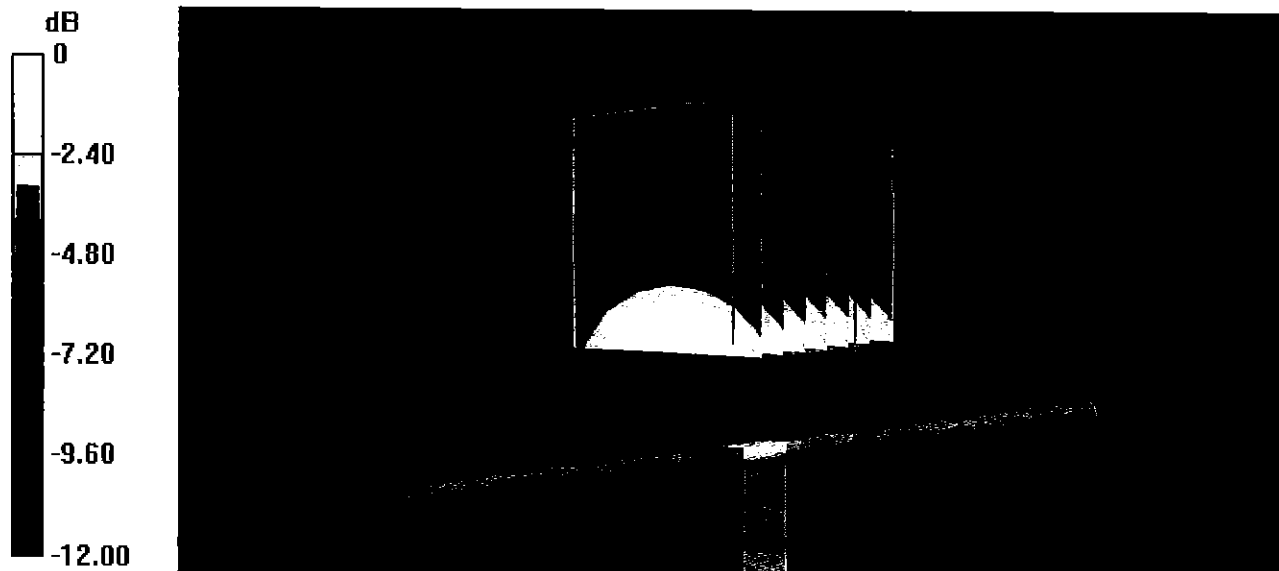

0 dB = 3.24 W/kg = 5.11 dBW/kg

# Impedance Measurement Plot for Body TSL


8 Jan 2018 16:27:09

CH1 S11 1 U FS

1: 47.447  $\Omega$  -5.6680  $\Omega$  33.628 pF

835.000 000 MHz

\*  
De1  
Cor

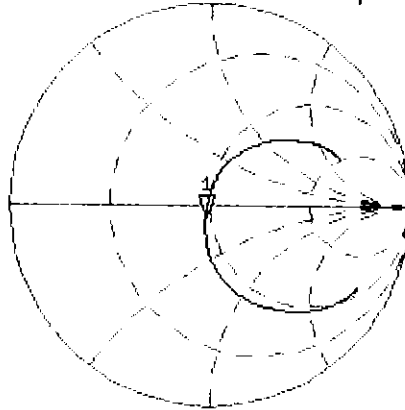

Avg  
16

H1d


CH2 S11 LOG

5 dB/REF -20 dB

1:-23.922 dB

835.000 000 MHz

Cor

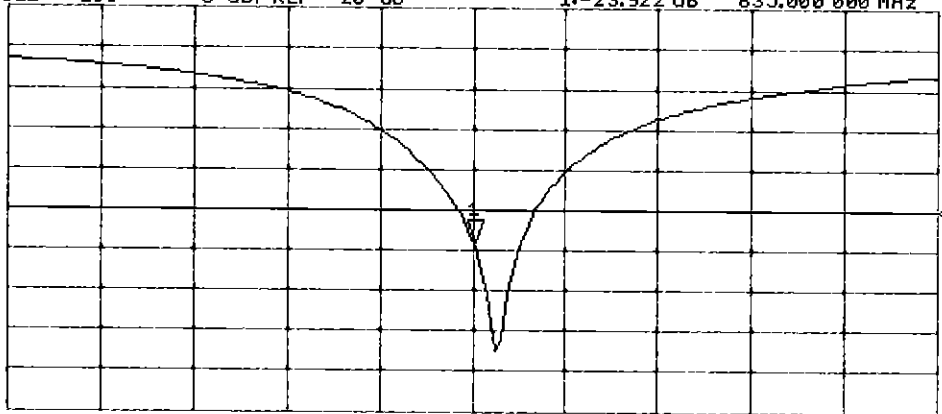

START 635.000 000 MHz

STOP 1 035.000 000 MHz



## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 44.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

**SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (measured) = 3.16 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.99 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.65 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg**

Maximum value of SAR (measured) = 3.19 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.33 W/kg

**SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 3.04 W/kg



**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.90 W/kg

**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.61 W/kg

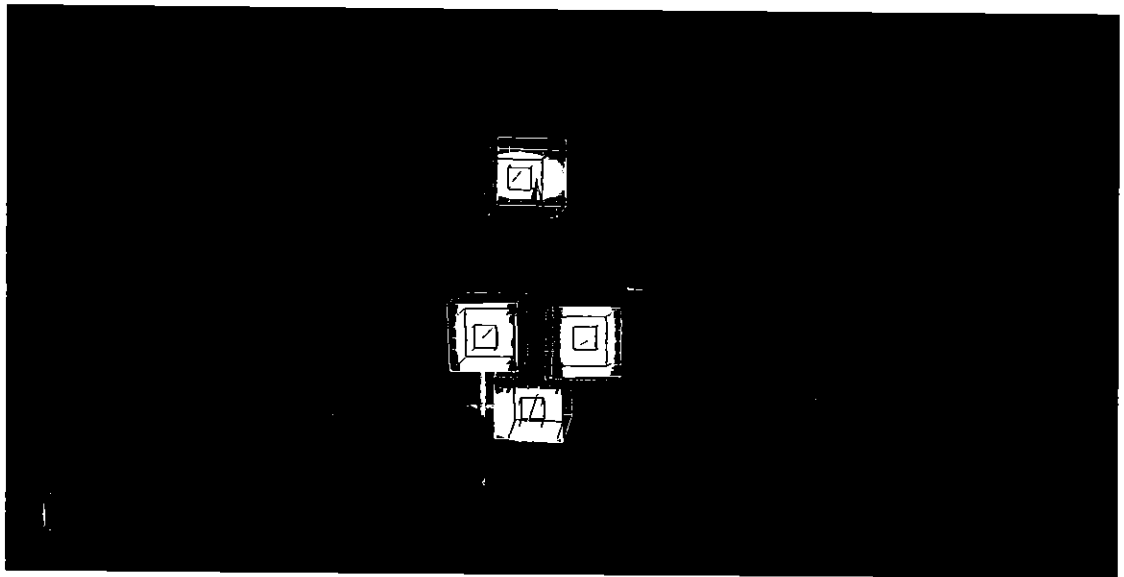

0 dB = 2.61 W/kg = 4.17 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d133\_Jul17**

## CALIBRATION CERTIFICATE

*PNV*  
*8/3/2017*

Object **D835V2 - SN:4d133**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka**      Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic**      Technical Manager

Issued: July 12, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.52 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.41 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.16 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 $\Omega$ - 2.9 j $\Omega$
Return Loss	- 30.4 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 $\Omega$ - 6.8 j $\Omega$
Return Loss	- 22.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

# DASY5 Validation Report for Head TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.74 W/kg

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.54 W/kg**

Maximum value of SAR (measured) = 3.28 W/kg

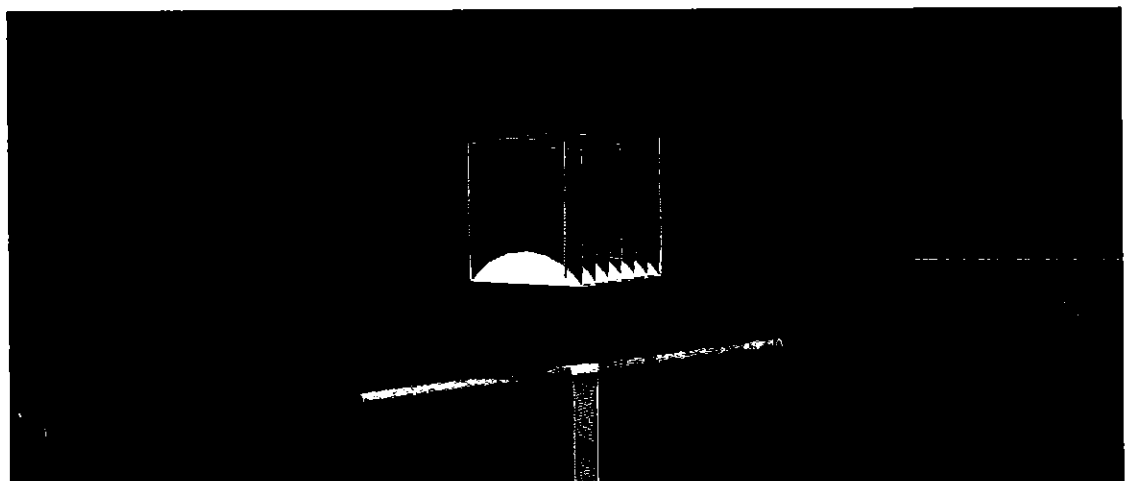


0 dB = 3.28 W/kg = 5.16 dBW/kg

# Impedance Measurement Plot for Head TSL

11 Jul 2017 13:58:45


CH1 S11 1 U FS 1: 50.998  $\Omega$  -2.8750  $\Omega$  66.297 pF 835.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

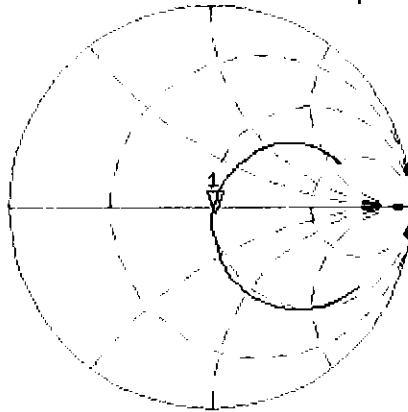

CH2 S11 LOG 5 dB/REF -20 dB 1: -30.411 dB 835.000 000 MHz

CA  
Avg  
16  
H1d

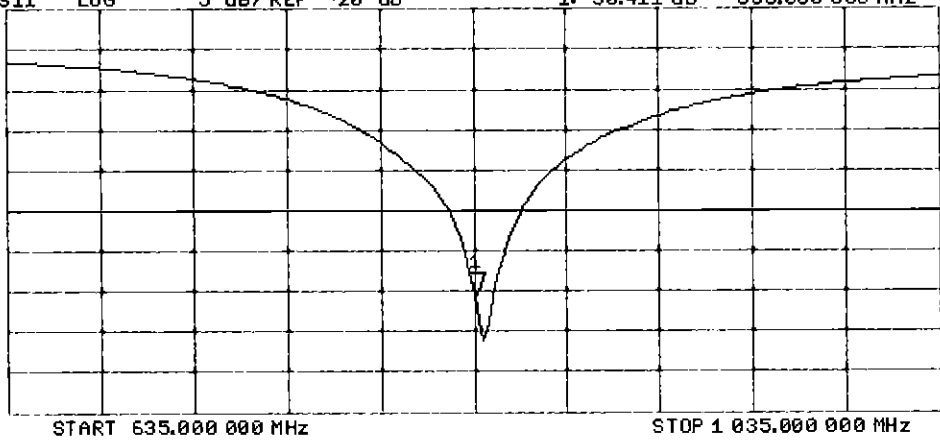



## DASY5 Validation Report for Body TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.01$  S/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (measured) = 3.21 W/kg

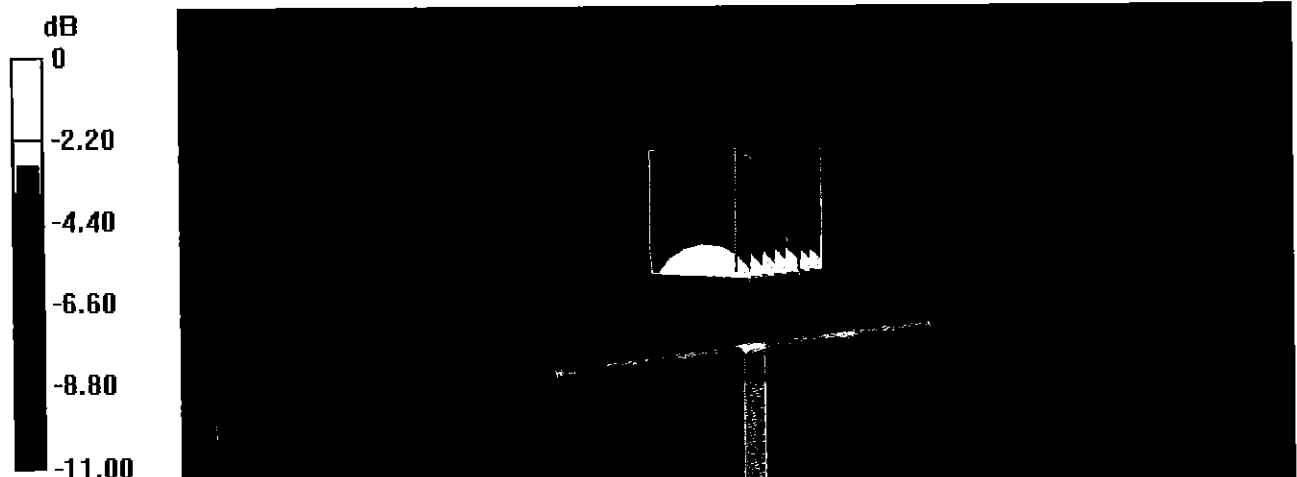


0 dB = 3.21 W/kg = 5.07 dBW/kg

# Impedance Measurement Plot for Body TSL

11 Jul 2017 13:57:15


[CH1] S11 1 U FS 1: 46.736  $\Omega$  -6.7871  $\Omega$  28.083  $\mu$ F 835.000 000 MHz

\*  
De1  
Ca  
Avg  
16  
H1d

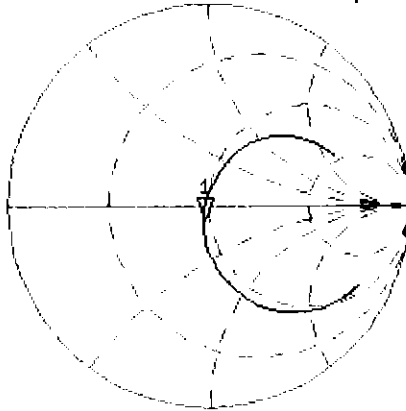

CH2 S11 LOG 5 dB/REF -20 dB 1: -22.199 dB 835.000 000 MHz

Ca  
Avg  
16  
H1d

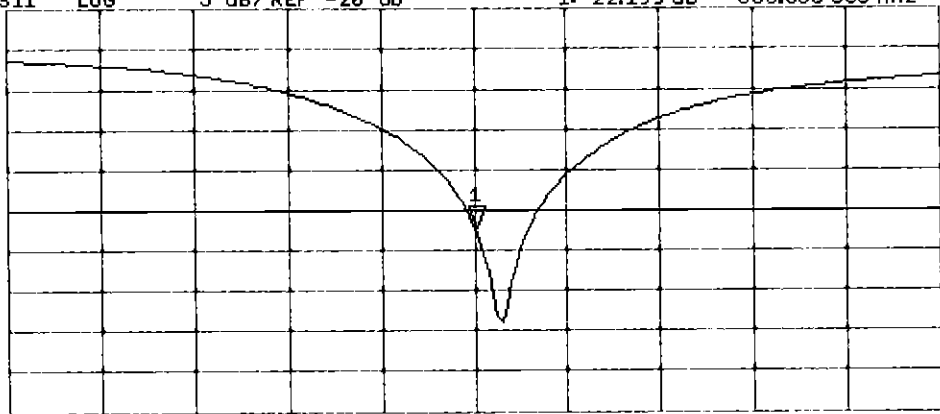

START 635.000 000 MHz

STOP 1 835.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1148\_May17**

## CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1148**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 09, 2017**

*BN ✓  
05-23-2017*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler**      **Laboratory Technician**

Signature

Approved by: **Katja Pokovic**      **Technical Manager**

Issued: May 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.36 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg ± 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.7 ± 6 %	1.47 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.8 W/kg ± 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 $\Omega$ - 0.7 j $\Omega$
Return Loss	- 42.9 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.7 $\Omega$ - 0.5 j $\Omega$
Return Loss	- 26.9 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.223 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 30, 2014

## DASY5 Validation Report for Head TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.5 W/kg

**SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.83 W/kg**

Maximum value of SAR (measured) = 13.9 W/kg

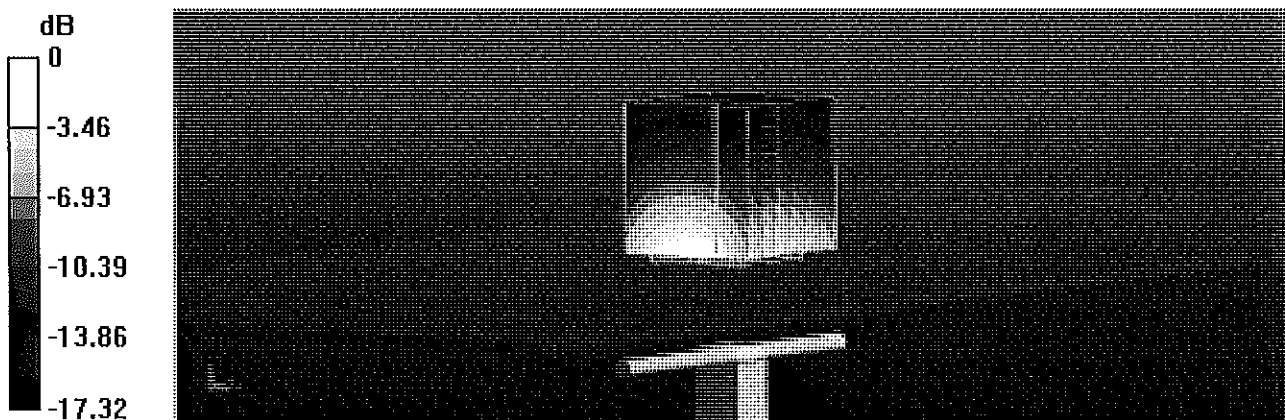


# Impedance Measurement Plot for Head TSL

9 May 2017 14:43:11


CH1 S11 1 U FS 1: 49.777  $\Omega$  -683.59 m $\Omega$  133.04 pF 1 750.000 000 MHz

\*  
De1  
CA  
AVG  
16  
H1d

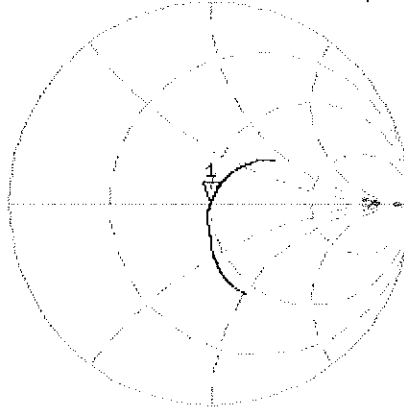

CH2 S11 LOG 5 dB/REF -20 dB 1: -42.893 dB 1 750.000 000 MHz

CA  
AVG  
16  
H1d

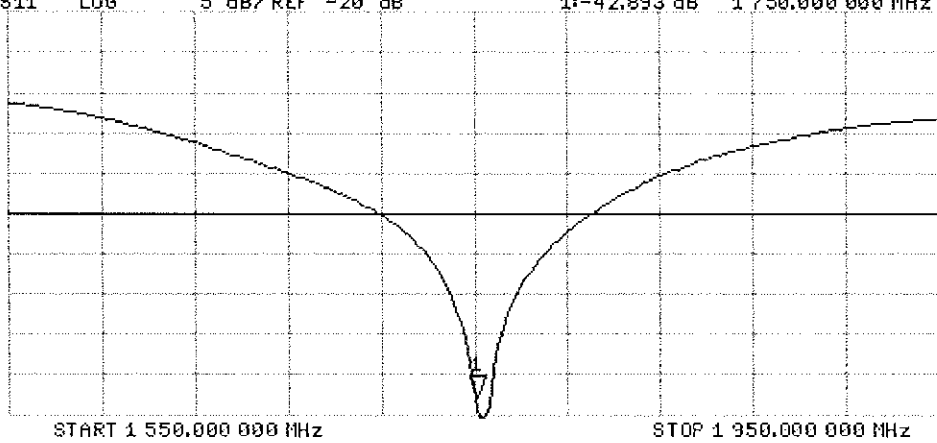



## DASY5 Validation Report for Body TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.9 W/kg

**SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.93 W/kg**

Maximum value of SAR (measured) = 13.1 W/kg

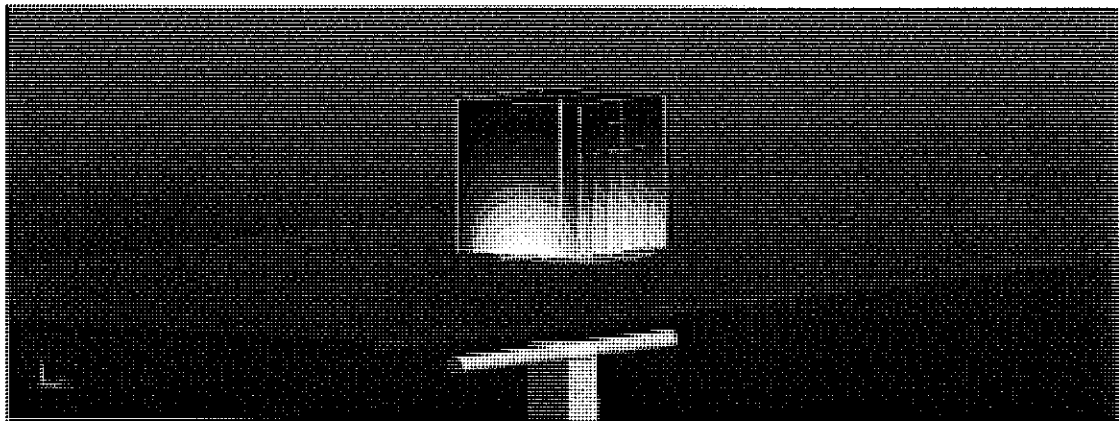

0 dB = 13.1 W/kg = 11.17 dBW/kg

# Impedance Measurement Plot for Body TSL

9 May 2017 14:42:25

[CH1] S11 1 U FS 1: 45.707  $\Omega$  -513.67  $m\Omega$  177.05 pF 1 750.000 000 MHz


\*

De1

CA

Avg  
16

H1d

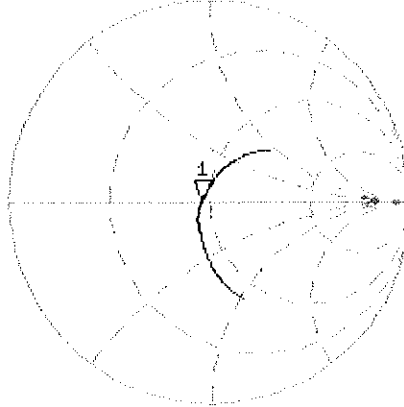


CH2 S11 LOG 5 dB/REF -20 dB 1:-26.901 dB 1 750.000 000 MHz

CA

Avg  
16

H1d

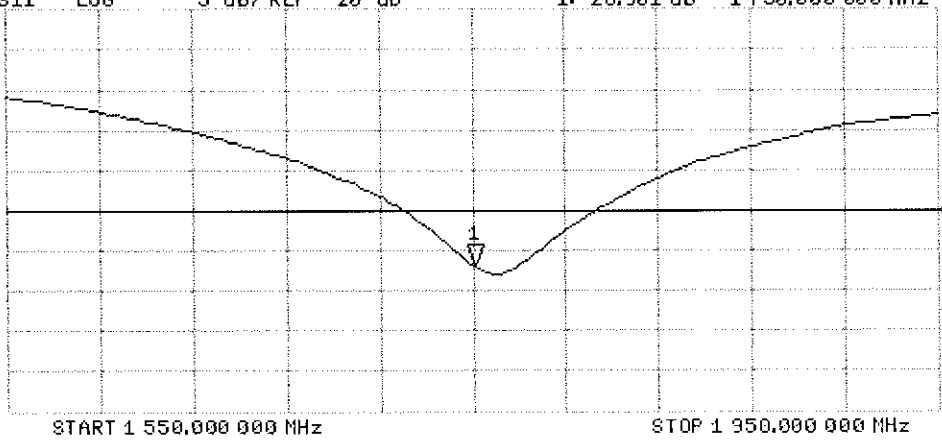



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d148\_Feb18**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

*BNM  
03-02-2018*

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Claudio Leubler**      Name: Claudio Leubler      Function: Laboratory Technician

Signature

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Function: Technical Manager

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.0
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	9.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>40.1 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.0 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	53.3	1.52 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	55.2 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	9.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>39.6 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	5.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>20.9 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.1 $\Omega$ + 5.8 j $\Omega$
Return Loss	- 24.3 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 $\Omega$ + 6.5 j $\Omega$
Return Loss	- 23.1 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

## DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.6 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.5 W/kg

**SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.22 W/kg**

Maximum value of SAR (measured) = 15.3 W/kg

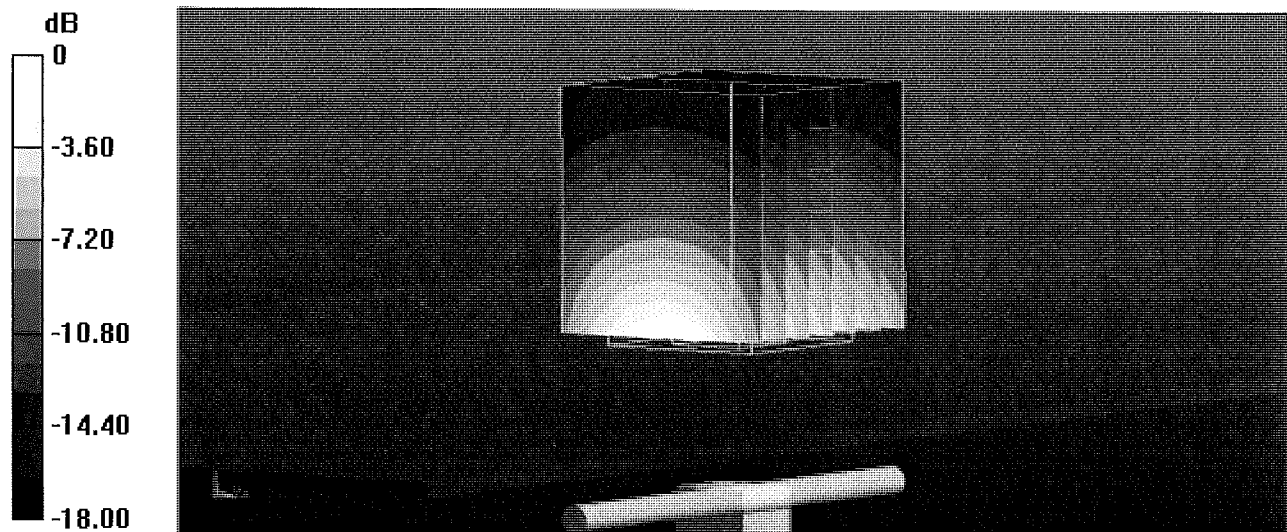


0 dB = 15.3 W/kg = 11.85 dBW/kg

# Impedance Measurement Plot for Head TSL

7 Feb 2018 15:15:06

CH1 S11 1 U FS 1: 52.148  $\Omega$  5.8281  $\Omega$  488.20  $\mu\text{H}$  1 900.000 000 MHz

\*  
De1  
CA

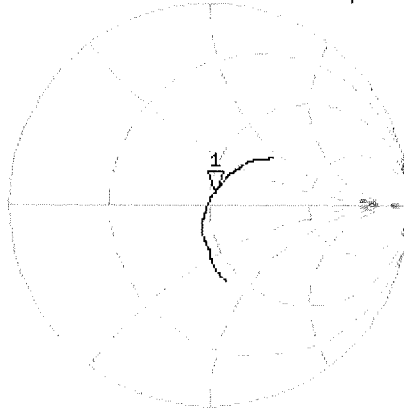

Avg  
16


H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1: -24.331 dB 1 900.000 000 MHz

CA

Avg  
16

H1d

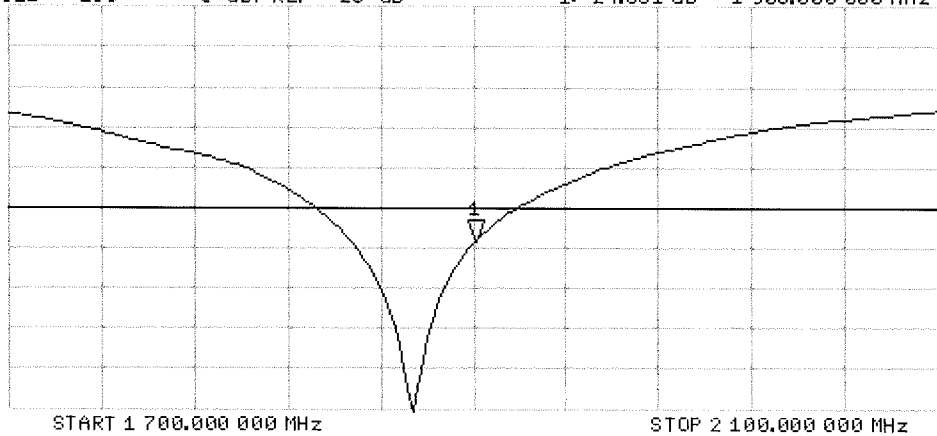



## DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.14 W/kg**

Maximum value of SAR (measured) = 14.4 W/kg

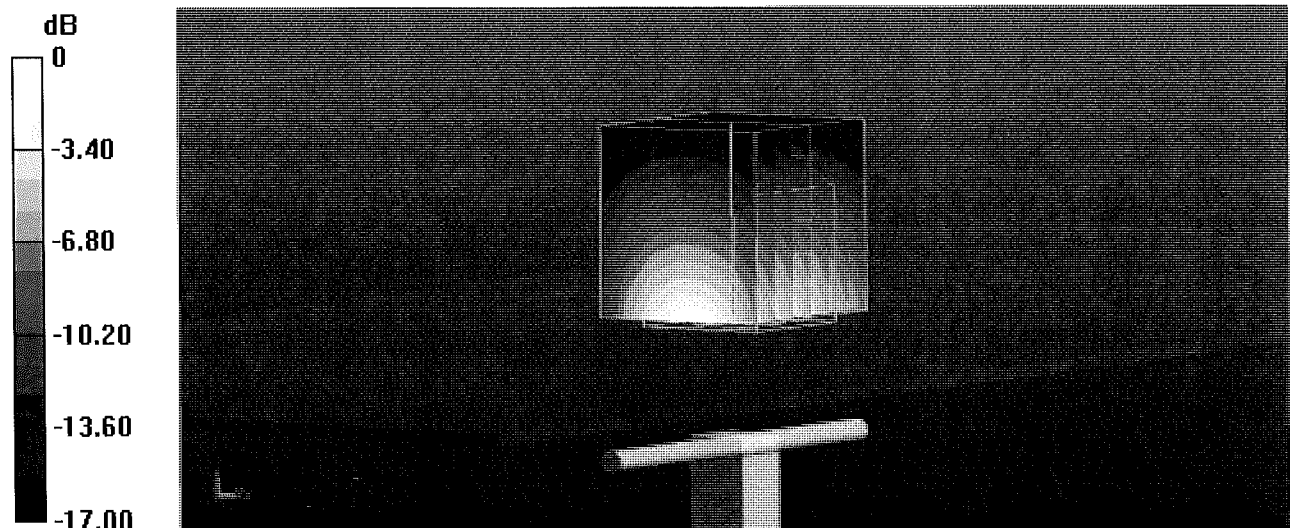


0 dB = 14.4 W/kg = 11.58 dBW/kg

# Impedance Measurement Plot for Body TSL

7 Feb 2018 15:14:31


CH1 S11 1 U FS 1: 47.787  $\Omega$  6.4551  $\Omega$  540.71  $\mu\text{H}$  1 900.000 000 MHz

\*  
Del  
CA  
Avg  
16  
H1d

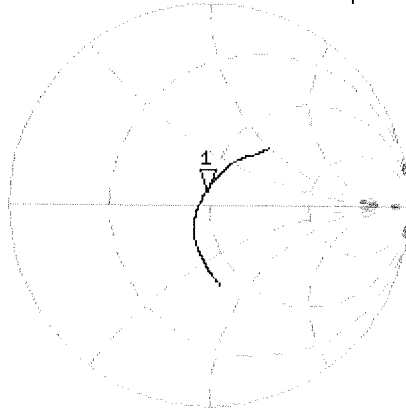

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.146 dB 1 900.000 000 MHz

CA  
Avg  
16  
H1d

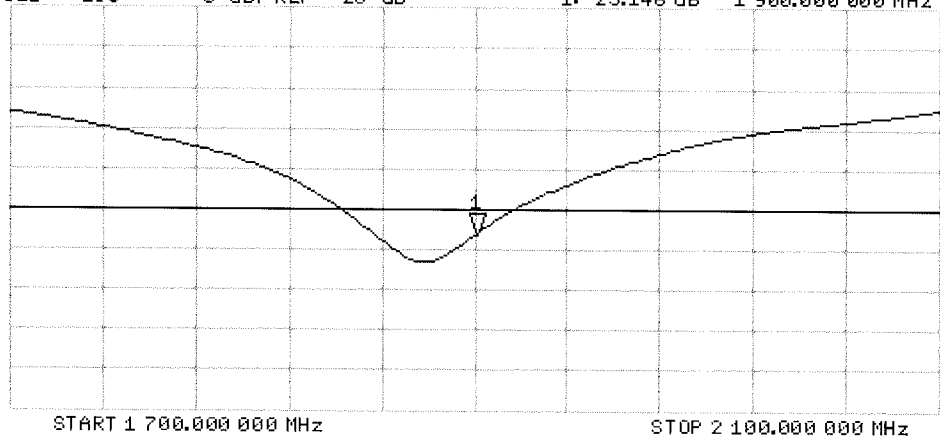



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2300V2-1073\_Jul16**

## CALIBRATION CERTIFICATE

Object **D2300V2 - SN:1073**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 25, 2016**

*VPIT  
8/9/16  
Extended  
7/2017  
SCV*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber**      Name      Function: **Laboratory Technician**      Signature: *M. Weber*

Approved by: **Katja Pokovic**      Name      Function: **Technical Manager**      Signature: *K. Pokovic*

Issued: July 26, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2300 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.6 $\pm$ 6 %	1.69 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>48.6 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.4 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.9	1.81 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.2 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.2 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>48.1 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.85 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>23.2 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.9 $\Omega$ - 4.9 j $\Omega$
Return Loss	- 25.8 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.5 $\Omega$ - 4.1 j $\Omega$
Return Loss	- 23.9 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.171 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 16, 2015

## DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1073**

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.69$  S/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.99, 7.99, 7.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 24.1 W/kg

**SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.9 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg

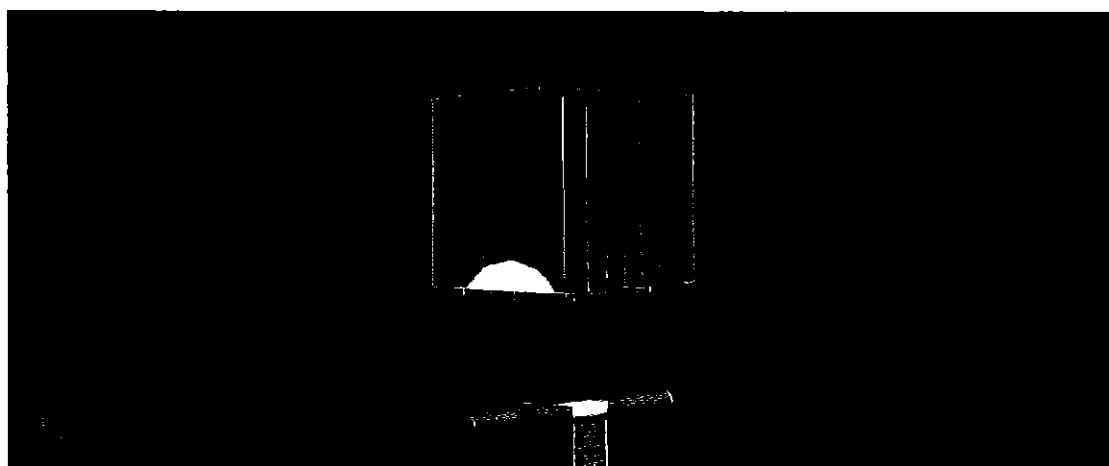


0 dB = 19.8 W/kg = 12.97 dBW/kg

# Impedance Measurement Plot for Head TSL

13 Jul 2016 12:44:09


[CH1] S11 1 U FS 2: 48.926  $\Omega$  -4.9414  $\Omega$  14.004 pF 2 300.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

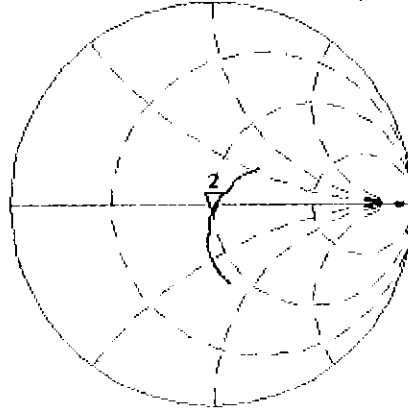

CH2 S11 LOG 5 dB/REF -20 dB 2:-25.842 dB 2 300.000 000 MHz

CA  
Avg  
16  
H1d

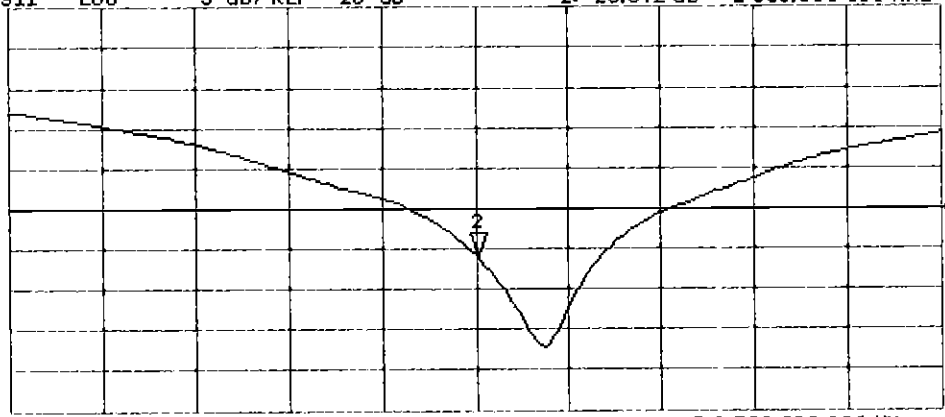

START 2 100.000 000 MHz

STOP 2 500.000 000 MHz



# DASY5 Validation Report for Body TSL

Date: 25.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1073**

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.8 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 23.8 W/kg

**SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.85 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg




0 dB = 19.0 W/kg = 12.79 dBW/kg

# Impedance Measurement Plot for Body TSL

25 Jul 2016 14:32:48

CH1 S11 1 U FS 1: 45.496  $\Omega$  -4.1348  $\Omega$  16.736 pF 2 300.000 000 MHz

\*  
Del  
CA

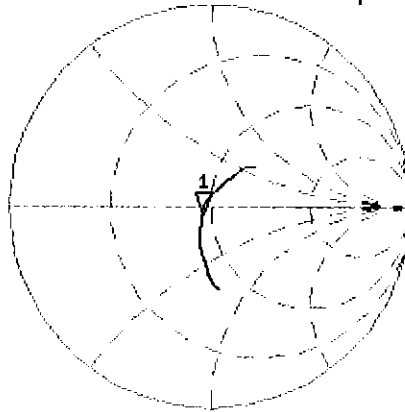


Avg  
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.882 dB 2 300.000 000 MHz

CA

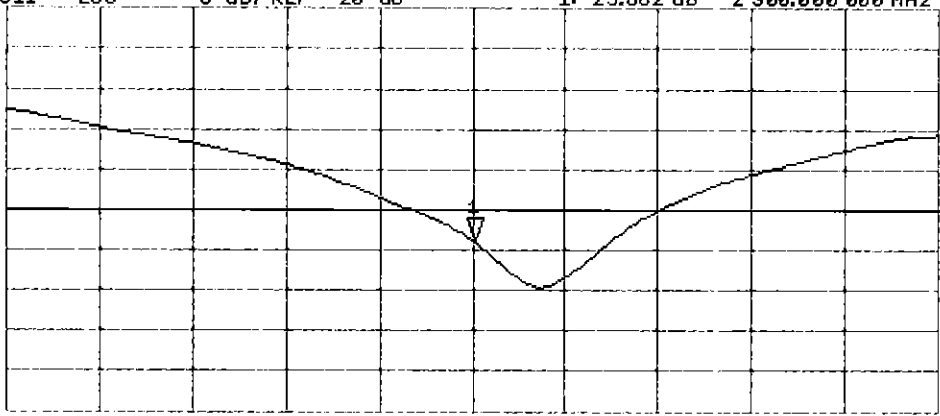

H1d

START 2 100.000 000 MHz

STOP 2 500.000 000 MHz

# Certification of Calibration

Object: D2300V2 – SN: 1073

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 24, 2017

Description: SAR Validation Dipole at 2300 MHz.

## Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/14/2016	Annual	9/14/2017	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2017	Annual	2/9/2018	1272
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	9/19/2016	Annual	9/19/2017	3287
SPEAG	ES3DV3	SAR Probe	2/10/2017	Annual	2/10/2018	3213
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty =  $\pm 23\%$  (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALBFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

# DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/25/2016	7/24/2017	1.171	4.88	5.08	4.12%	2.34	2.40	2.58%	48.9	46.6	2.3	-4.9	-5.6	0.7	-25.8	-22.5	12.80%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/25/2016	7/24/2017	1.171	4.81	4.63	-3.74%	2.32	2.18	-6.03%	45.5	45.0	0.5	-4.1	-4.9	0.8	-23.9	-23.0	3.80%	PASS

# Impedance & Return-Loss Measurement Plot for Head TSL

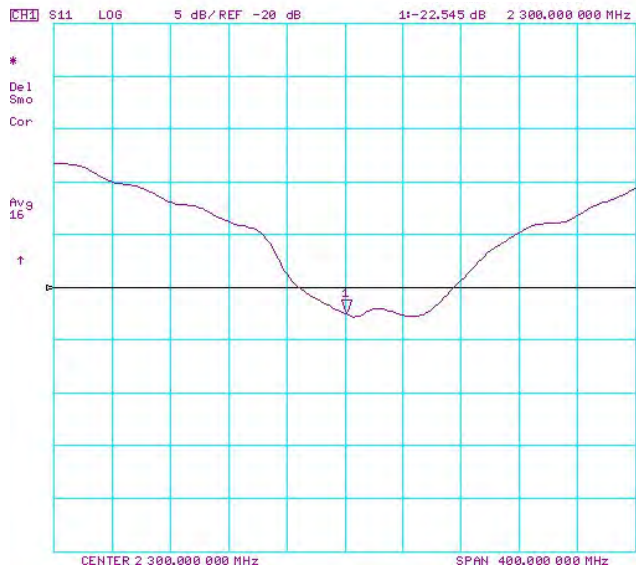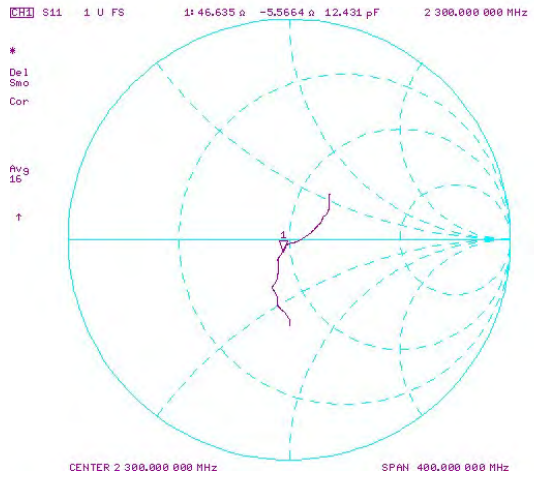

# Impedance & Return-Loss Measurement Plot for Body TSL

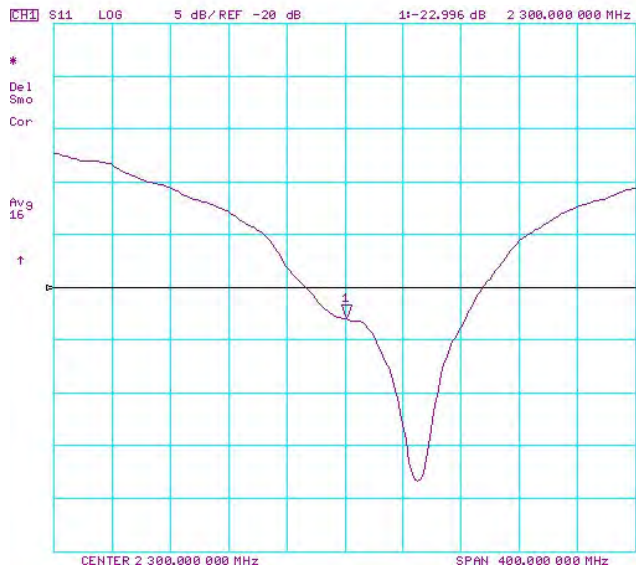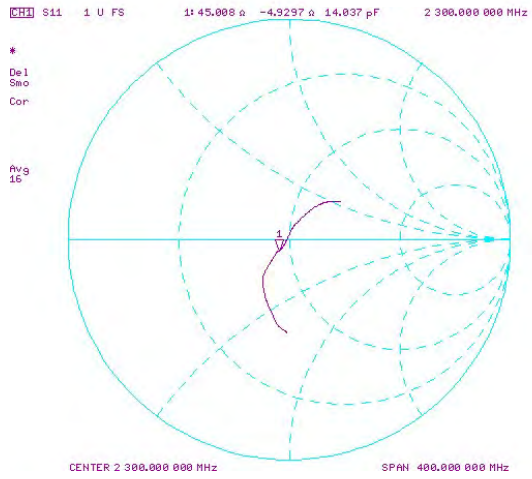



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-797\_Sep17**

**CALIBRATION CERTIFICATE**

Object **D2450V2 - SN:797**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

*SCS ✓  
10/03/2017*

Calibration date: **September 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber**      Name: Michael Weber      Function: Laboratory Technician

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Function: Technical Manager

Signature  
*M. Weber*  
*K. Pokovic*

Issued: September 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.0
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	37.8 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	---	---

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>52.7 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.8 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	52.7	1.95 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	51.9 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	---	---

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>51.1 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	6.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>24.2 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 $\Omega$ + 7.4 j $\Omega$
Return Loss	- 21.9 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.7 $\Omega$ + 9.1 j $\Omega$
Return Loss	- 20.9 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

## DASY5 Validation Report for Head TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.5 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 26.9 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.28 W/kg**

Maximum value of SAR (measured) = 21.6 W/kg

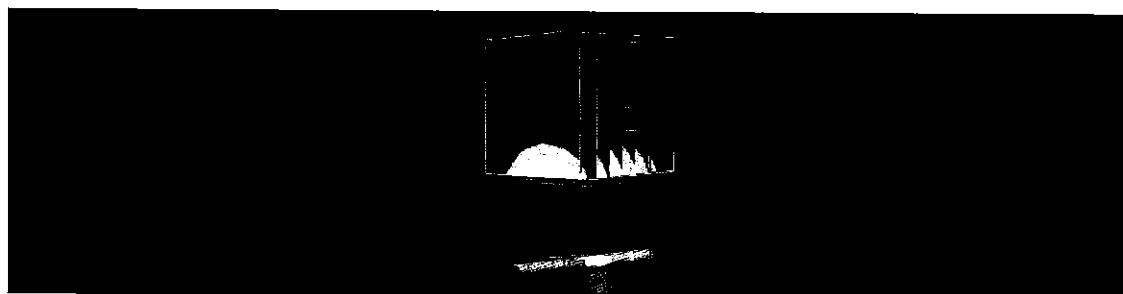


0 dB = 21.6 W/kg = 13.34 dBW/kg

# Impedance Measurement Plot for Head TSL

11 Sep 2017 11:52:57


CH1 S11 1 U FS 1: 53.777  $\Omega$  7.4395  $\Omega$  483.28  $\mu\text{H}$  2 450.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

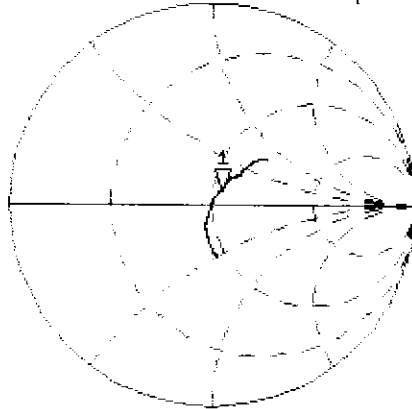

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.911 dB 2 450.000 000 MHz

CA  
Avg  
16  
H1d

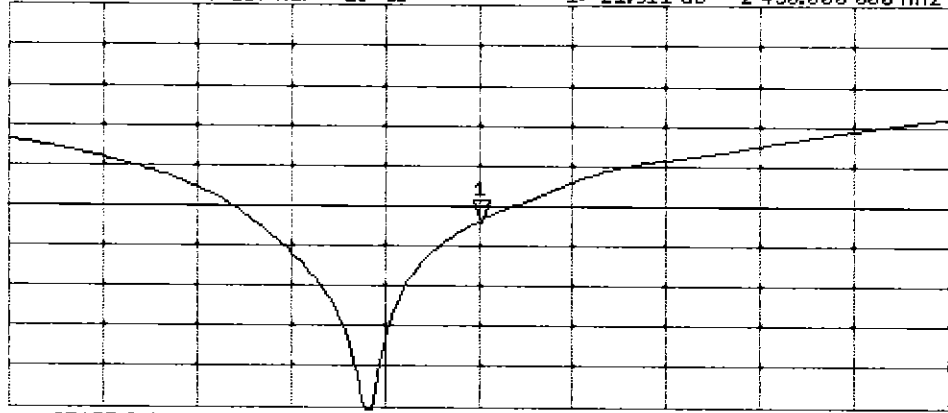

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 25.6 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.14 W/kg**

Maximum value of SAR (measured) = 20.3 W/kg

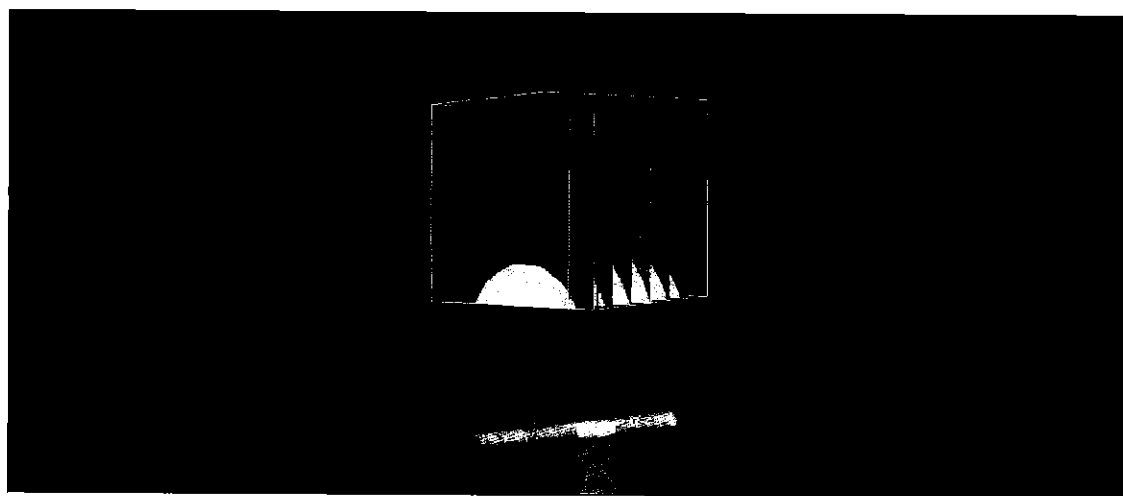

0 dB = 20.3 W/kg = 13.07 dBW/kg

# Impedance Measurement Plot for Body TSL

11 Sep 2017 11:52:10


CH1 S11 1 U FS 1: 49.725  $\Omega$  9.0703  $\Omega$  589.22 pF 2 450.000 000 MHz

\*  
Del

CA

Avg  
16

H1d

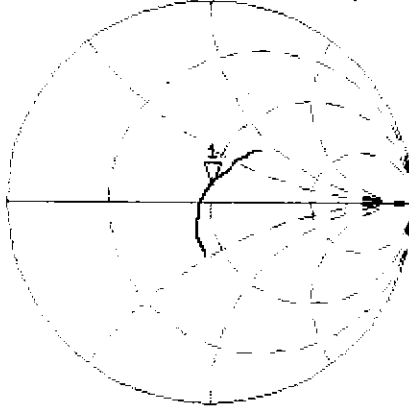


CH2 S11 LOG 5 dB/REF -20 dB 1:-20.854 dB 2 450.000 000 MHz

CA

Avg  
16

H1d

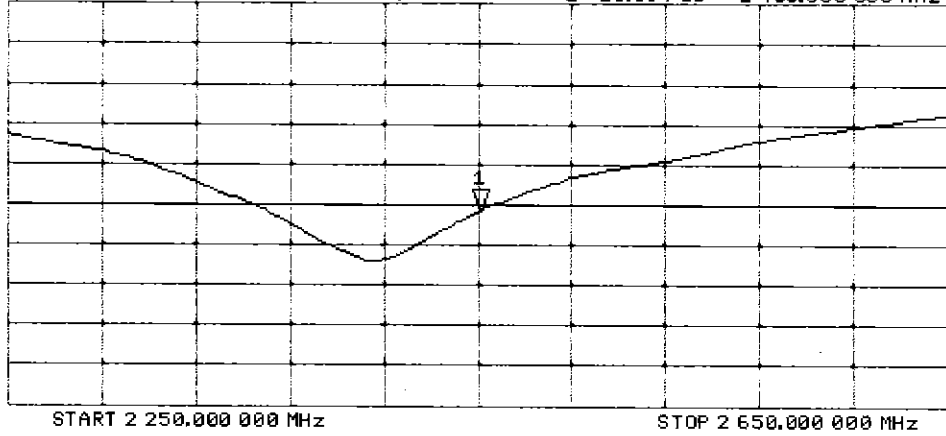



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2600V2-1126\_Jul17**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1126**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

*BNV*  
*8/3/2017*

Calibration date: **July 10, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Jeton Kastrall**      Name: **Jeton Kastrall**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature  
*[Handwritten signature]*  
*[Handwritten signature]*

Issued: July 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.2 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.2 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.6 $\pm$ 6 %	2.22 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	54.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.4 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.8 $\Omega$ - 7.7 j $\Omega$
Return Loss	- 21.8 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.8 $\Omega$ - 5.8 j $\Omega$
Return Loss	- 21.7 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.154 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 22, 2015

## DASY5 Validation Report for Head TSL

Date: 10.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1126**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 37.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 113.2 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.3 W/kg

**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.4 W/kg**

Maximum value of SAR (measured) = 24.0 W/kg

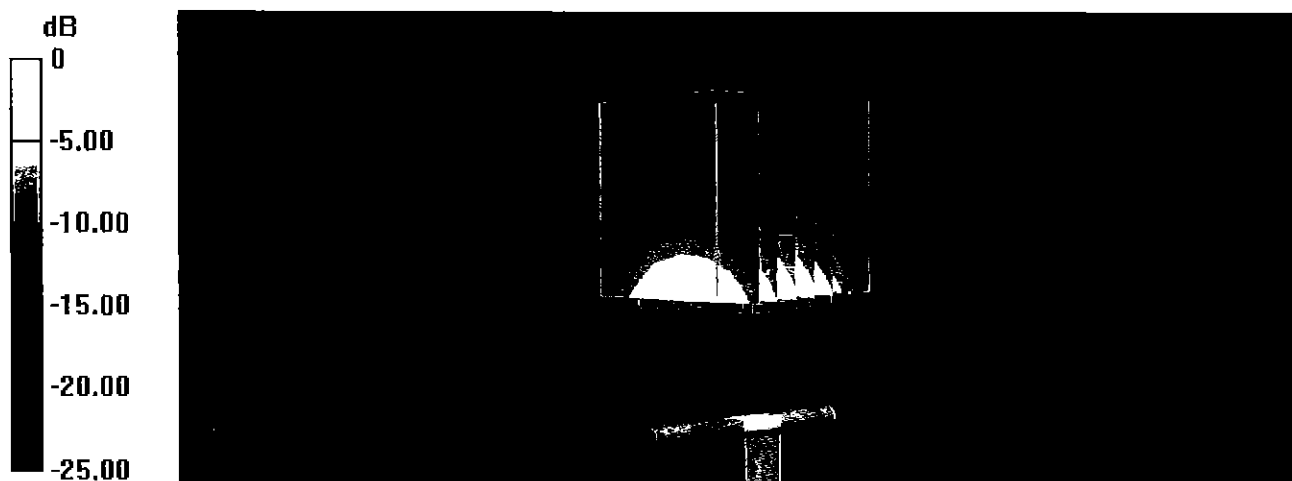

# Impedance Measurement Plot for Head TSL


10 Jul 2017 14:28:06

CH1 S11 1 U FS

2: 47.771  $\Omega$  -7.6934  $\Omega$  7.9567 pF

2 600.000 000 MHz

\*  
De1  
CA

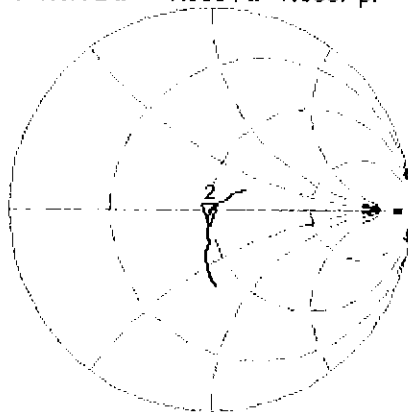


Avg  
16  
H1d

CH2 S11 LOG

5 dB/REF -20 dB

2:-21.756 dB 2 600.000 000 MHz

CA  
Avg  
16  
H1d

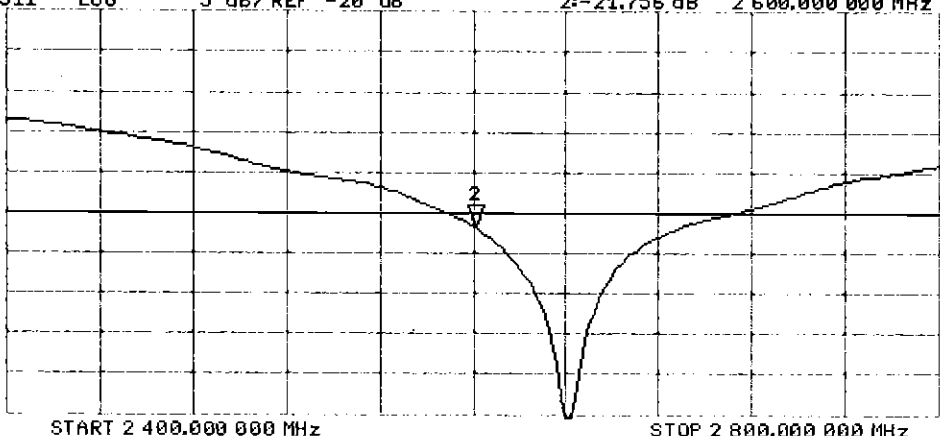

START 2 400.000 000 MHz

STOP 2 800.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 10.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1126**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.94, 7.94, 7.94); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.8 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 28.9 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.16 W/kg**

Maximum value of SAR (measured) = 22.2 W/kg

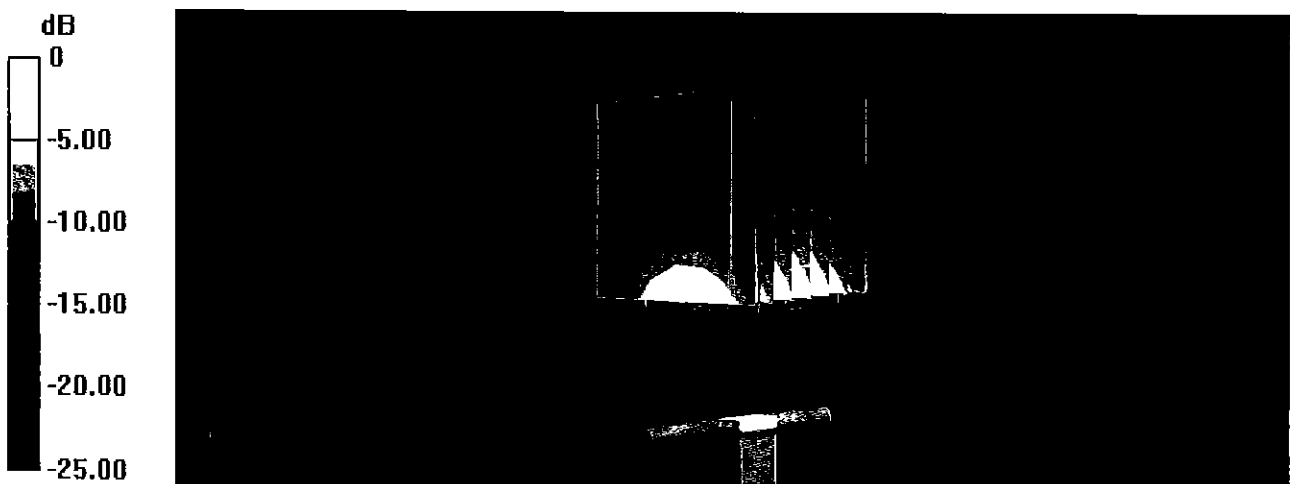


# Impedance Measurement Plot for Body TSL

10 Jul 2017 14:27:30


CH1 S11 1 U FS 2: 44.785  $\Omega$  -5.8145  $\Omega$  10.528 pF 2 600.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

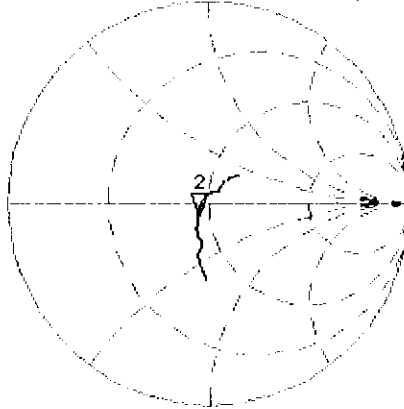

CH2 S11 LOG 5 dB/REF -20 dB 2:-21.696 dB 2 600.000 000 MHz

CA  
Avg  
16  
H1d

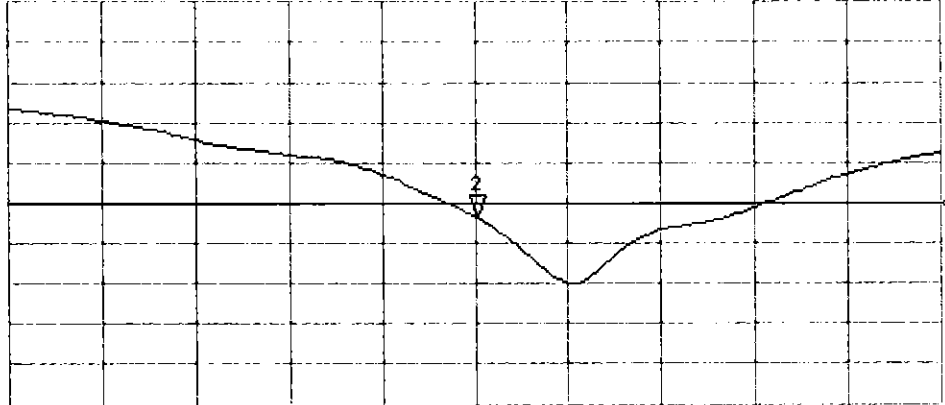

START 2 400.000 000 MHz

STOP 2 800.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1191\_Sep16**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v2  
Calibration procedure for dipole validation kits between 3-6 GHz**

*BNV*  
*09-28-2016*

Calibration date: **September 21, 2016**

*Extended*  
*09/2017*  
*SC*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 3503	30-Jun-16 (No. EX3-3503_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name <b>Leif Klysner</b>	Function <b>Laboratory Technician</b>	Signature <i>Leif Klysner</i>
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature <i>Katja Pokovic</i>

Issued: September 22, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.8
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5750 MHz ± 1 MHz	

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.9	4.71 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	34.5 ± 6 %	4.59 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5250 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	7.96 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>78.9 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.6 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.93 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>83.6 W / kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.8 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.08 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.99 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>79.1 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.4 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.4 ± 6 %	5.52 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	6.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	55.7 $\Omega$ - 4.3 j $\Omega$
Return Loss	- 23.4 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	58.3 $\Omega$ - 3.2 j $\Omega$
Return Loss	- 21.8 dB

### Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	58.1 $\Omega$ + 4.8 j $\Omega$
Return Loss	- 21.2 dB

### Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	56.1 $\Omega$ - 3.7 j $\Omega$
Return Loss	- 23.4 dB

### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	58.9 $\Omega$ - 1.7 j $\Omega$
Return Loss	- 21.7 dB

### Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	59.5 $\Omega$ + 6.9 j $\Omega$
Return Loss	- 19.4 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.204 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 28, 2003

## DASY5 Validation Report for Head TSL

Date: 21.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.59$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.93$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.08$  S/m;  $\epsilon_r = 33.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.42, 5.42, 5.42); Calibrated: 30.06.2016, ConvF(4.89, 4.89, 4.89); Calibrated: 30.06.2016, ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.49 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 18.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.34 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 32.9 W/kg

**SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.41 W/kg**

Maximum value of SAR (measured) = 20.0 W/kg



**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.3 W/kg

**SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.27 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg

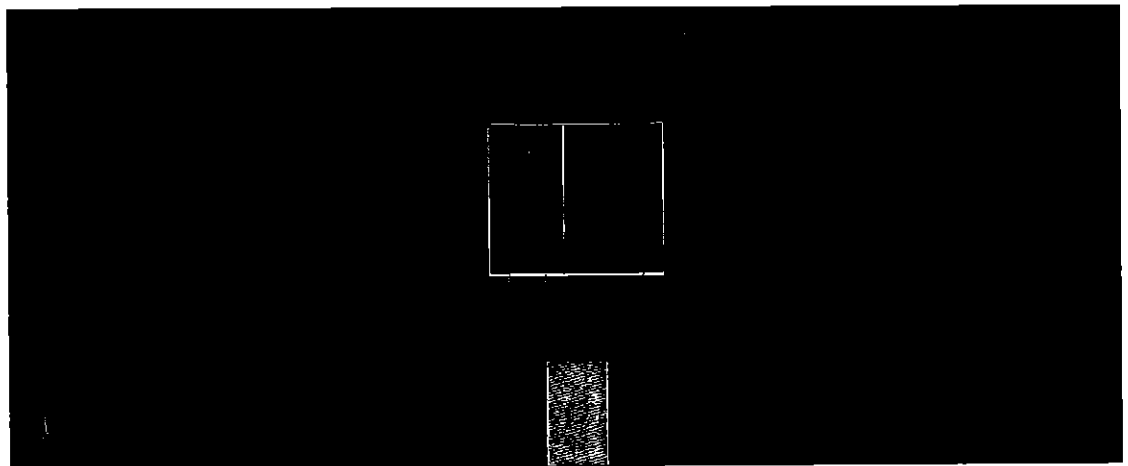


0 dB = 18.2 W/kg = 12.60 dBW/kg

# Impedance Measurement Plot for Head TSL

20 Sep 2016 13:20:17

CH1 S11 1 U FS 1: 55.695  $\Omega$  -4.2793  $\Omega$  7.0842 pF 5 250.000 000 MHz


\*  
De1  
Cor  
Avg  
16  
H1d

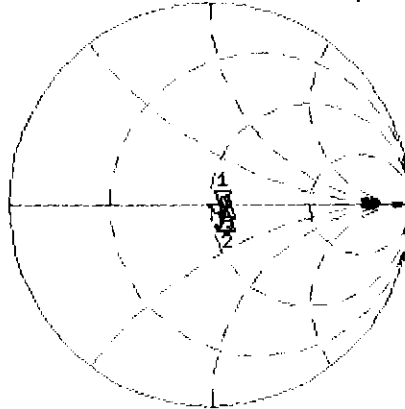

CH1 Markers  
2: 58.262  $\Omega$   
-3.1738  $\Omega$   
5.60000 GHz  
3: 58.078  $\Omega$   
4.7969  $\Omega$   
5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.432 dB 5 250.000 000 MHz

Cor  
Avg  
16  
H1d

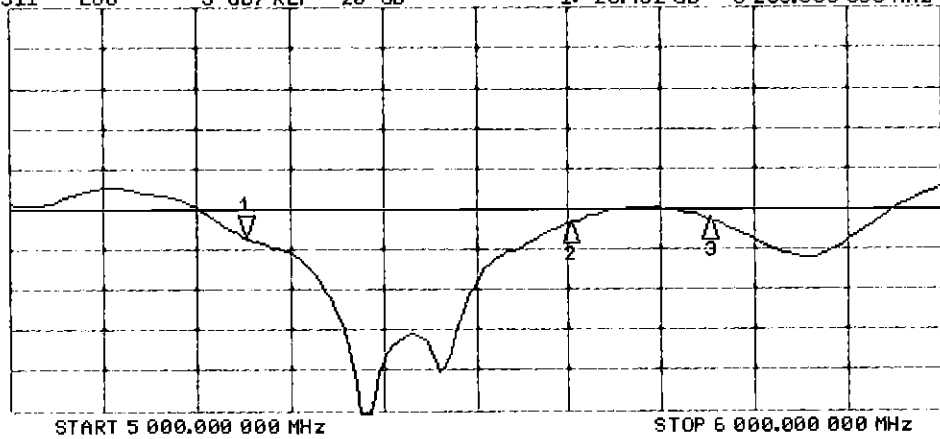

CH2 Markers  
2: -21.752 dB  
5.60000 GHz  
3: -21.228 dB  
5.75000 GHz



## DASY5 Validation Report for Body TSL

Date: 20.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.52$  S/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 6$  S/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016, ConvF(4.35, 4.35, 4.35); Calibrated: 30.06.2016, ConvF(4.3, 4.3, 4.3); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.49 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.1 W/kg

**SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

### **Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.85 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.5 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

### **Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan,**



**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

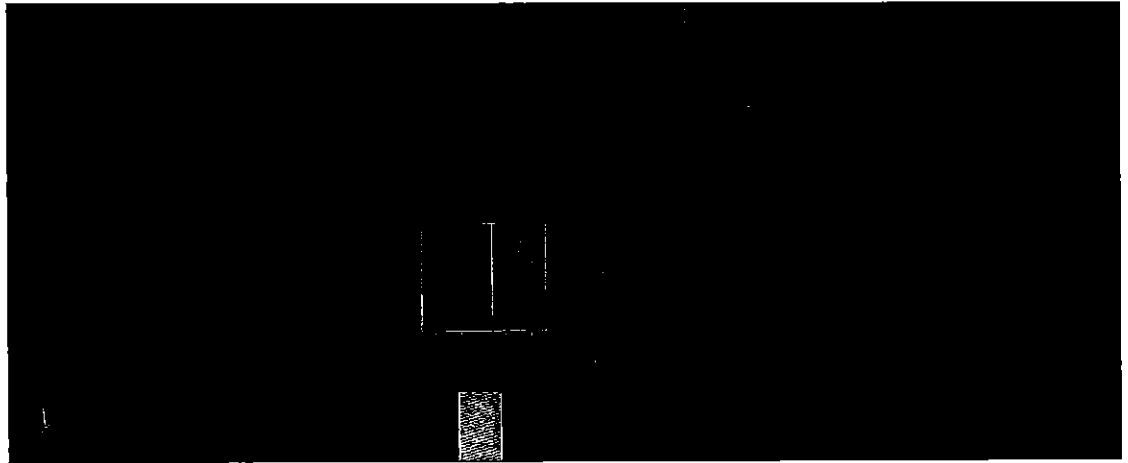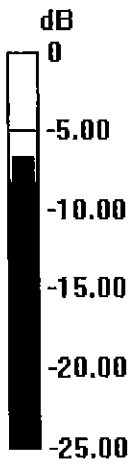


0 dB = 17.7 W/kg = 12.48 dBW/kg

# Impedance Measurement Plot for Body TSL

20 Sep 2016 13:19:13

CH1 S11 1 U FS 1: 56.143  $\Omega$  -3.6992  $\Omega$  8.1950 pF 5 250.000 000 MHz


\*  
De1  
Cor  
Avg  
16  
H1d

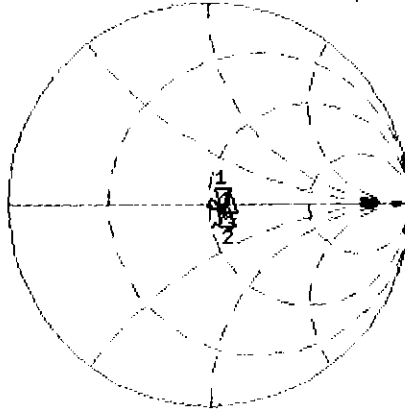

CH1 Markers  
2: 58.887  $\Omega$   
-1.6504  $\Omega$   
5.60000 GHz  
3: 59.510  $\Omega$   
6.9121  $\Omega$   
5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.406 dB 5 250.000 000 MHz

Cor  
Avg  
16  
H1d

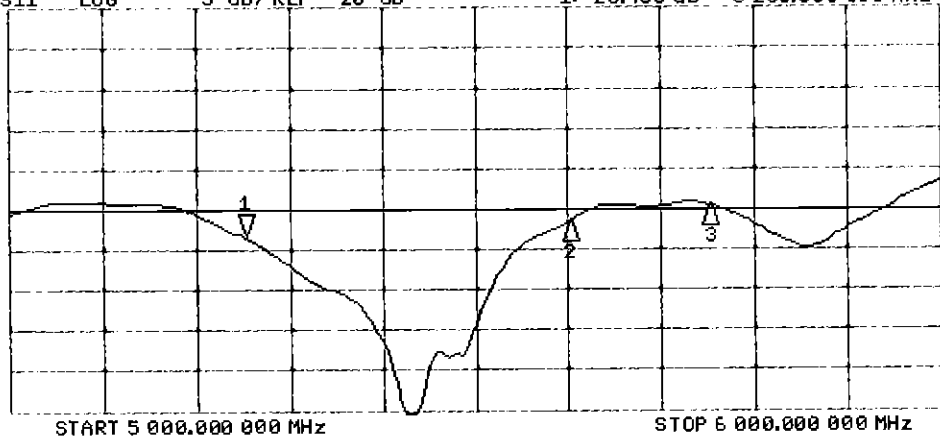

CH2 Markers  
2: -21.616 dB  
5.60000 GHz  
3: -19.400 dB  
5.75000 GHz

# Certification of Calibration

Object: D5GHzV2 – SN: 1191

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 9/19/2017

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

## Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	EX3DV4	SAR Probe	1/13/2017	Annual	1/13/2018	3589
SPEAG	EX3DV4	SAR Probe	2/13/2017	Annual	2/13/2018	3914
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/16/2017	Annual	1/16/2018	1466
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2017	Annual	2/9/2018	665
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty =  $\pm 23\%$  (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALBFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

# DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g W/kg @ 17.0 dBm)	Measured Head SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g W/kg @ 17.0 dBm)	Measured Head SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5250	9/21/2016	9/19/2017	1.204	3.95	3.70	-6.21%	1.13	1.05	-7.08%	55.7	53.4	2.3	-4.3	-6.4	2.1	-23.4	-26.9	-15.00%	PASS
5600	9/21/2016	9/19/2017	1.204	4.18	4.03	-3.59%	1.19	1.13	-5.04%	58.3	55.8	2.7	-3.2	-1.2	2.0	-21.8	-26.1	-19.80%	PASS
5750	9/21/2016	9/19/2017	1.204	3.96	3.84	-3.08%	1.12	1.10	-1.79%	58.1	57.4	0.7	4.8	3.2	1.6	-21.2	-21.0	0.90%	PASS

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g W/kg @ 17.0 dBm)	Measured Body SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g W/kg @ 17.0 dBm)	Measured Body SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5250	9/21/2016	9/19/2017	1.204	3.85	3.80	-1.30%	1.08	1.06	-1.85%	56.1	54.0	2.1	-3.7	-3.3	0.4	-23.4	-26.0	-11.10%	PASS
5600	9/21/2016	9/19/2017	1.204	3.96	4.06	2.53%	1.11	1.13	1.80%	58.9	56.5	2.4	-1.7	0.5	2.2	-21.7	-24.5	-12.80%	PASS
5750	9/21/2016	9/19/2017	1.204	3.81	3.66	-3.81%	1.06	1.02	-3.77%	59.5	58.0	1.5	6.9	5.2	1.7	-19.4	-21.1	-8.70%	PASS

# Impedance & Return-Loss Measurement Plot for Head TSL

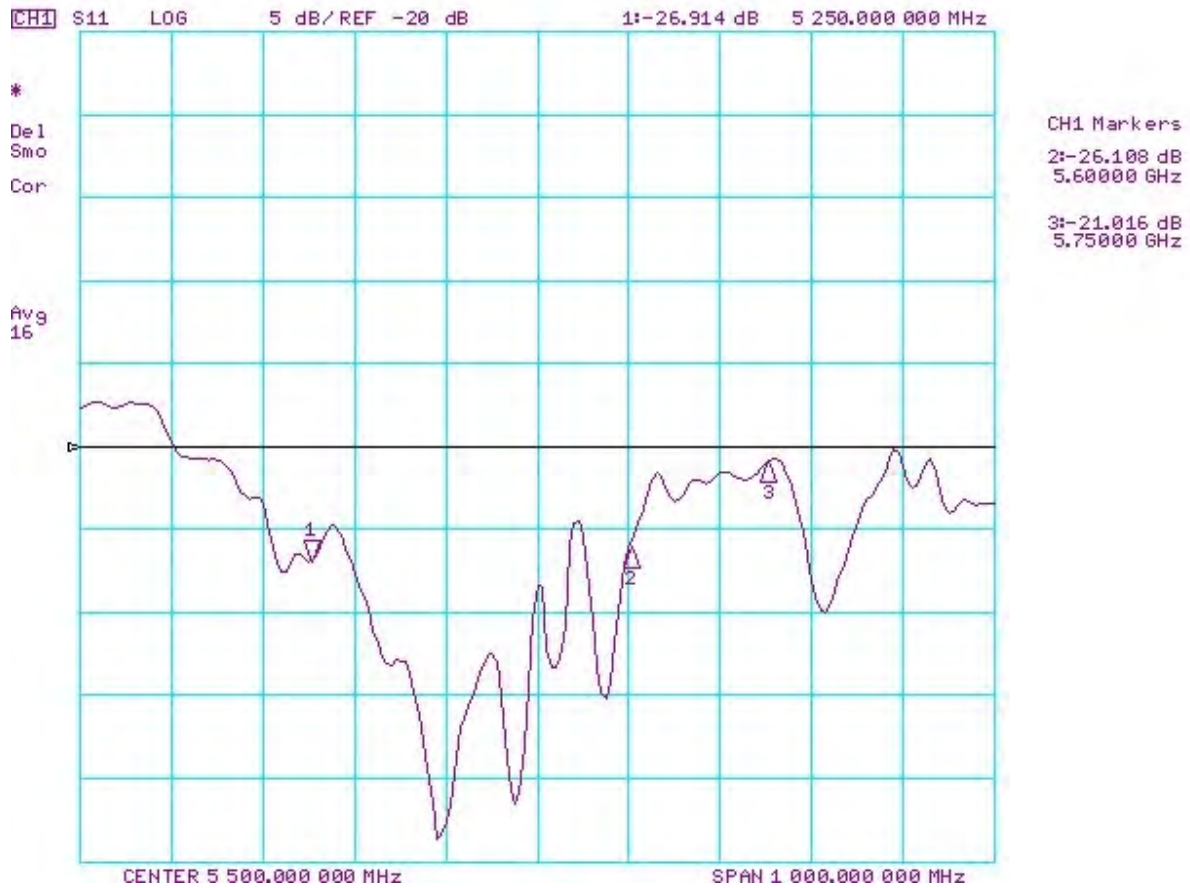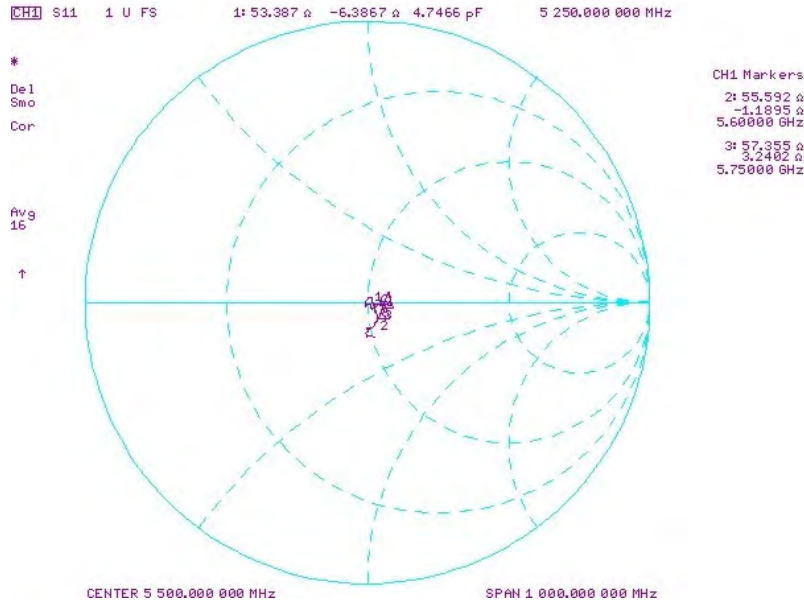

# Impedance & Return-Loss Measurement Plot for Body TSL

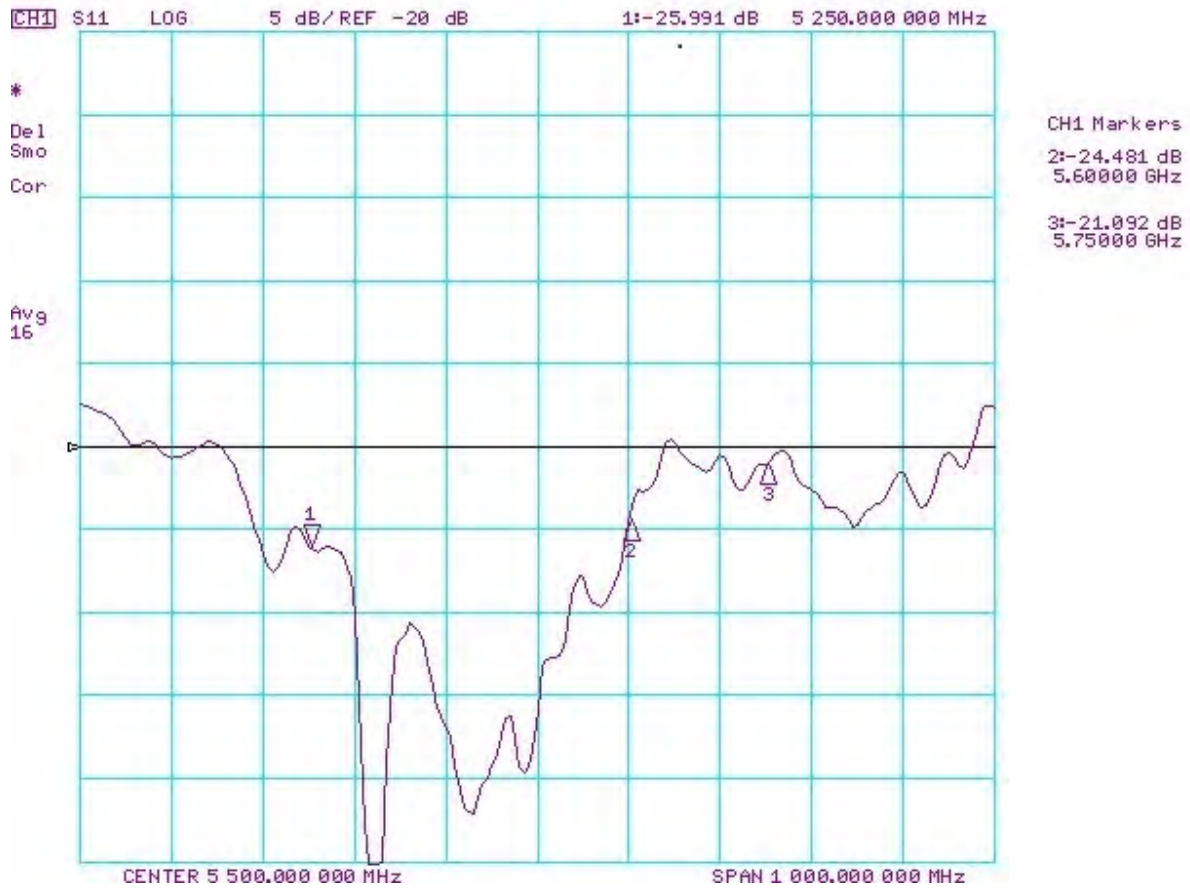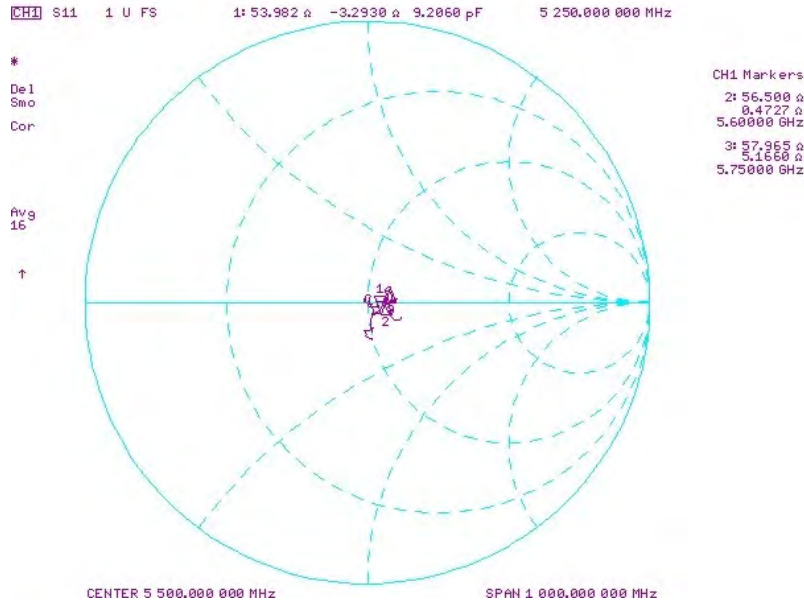



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1161\_Jul16**

**CALIBRATION CERTIFICATE**

Object **D750V3 - SN:1161**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2016**

✓PN  
8/9/16  
Extended  
7/2017  
SC ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Claudio Leubler** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.17 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.39 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.1 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>8.43 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>5.53 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 $\Omega$ - 0.9 $j\Omega$
Return Loss	- 25.4 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.2 $\Omega$ - 4.0 $j\Omega$
Return Loss	- 28.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2015

## DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.07 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.13 W/kg

**SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

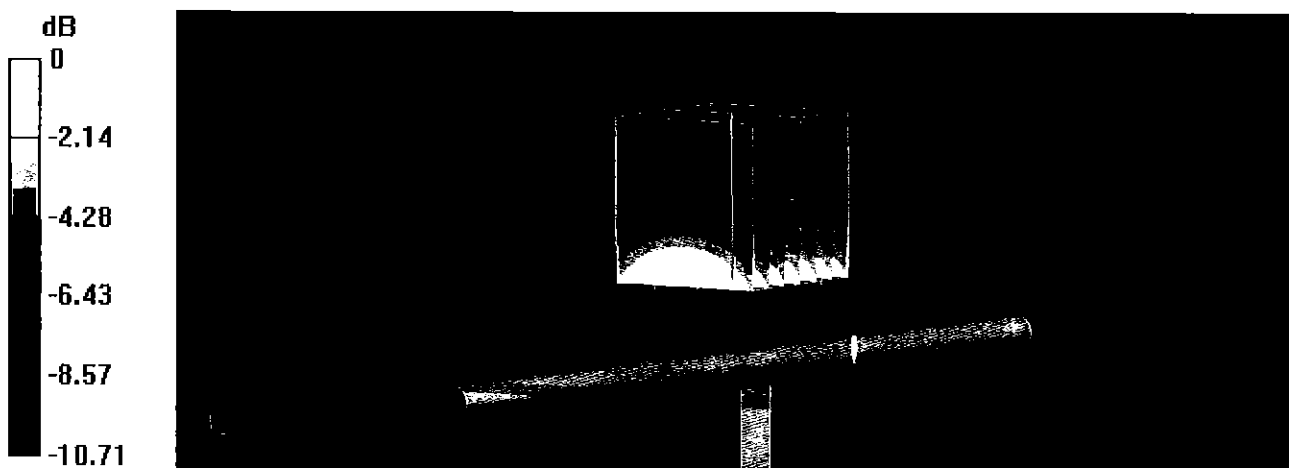


0 dB = 2.80 W/kg = 4.47 dBW/kg

# Impedance Measurement Plot for Head TSL

13 Jul 2016 09:55:53  
 [CH1] S11 1 U FS 1: 55.615  $\Omega$  -949.22 m $\Omega$  223.56 pF 750.000 000 MHz

\*  
 De1  
 CA

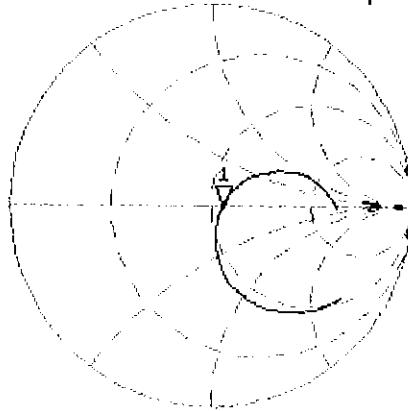

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.361 dB 750.000 000 MHz

CA

Avg  
 16

H1d

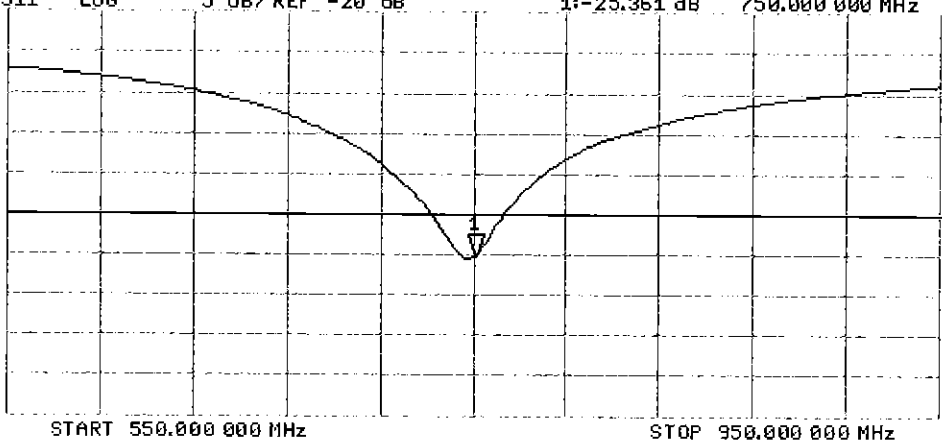

# DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.33 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.22 W/kg

**SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.41 W/kg**

Maximum value of SAR (measured) = 2.87 W/kg

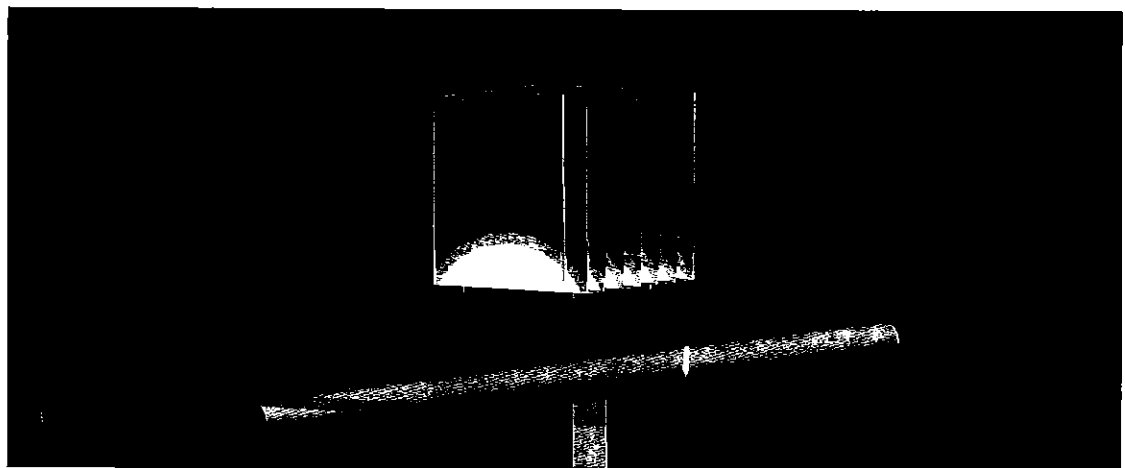


0 dB = 2.87 W/kg = 4.58 dBW/kg

# Impedance Measurement Plot for Body TSL

13 Jul 2016 13:16:34  
[CH1] S11 1 U FS 1: 50.244  $\Omega$  -3.9707  $\Omega$  53.443 pF 750.000 000 MHz


\*  
Del  
CA

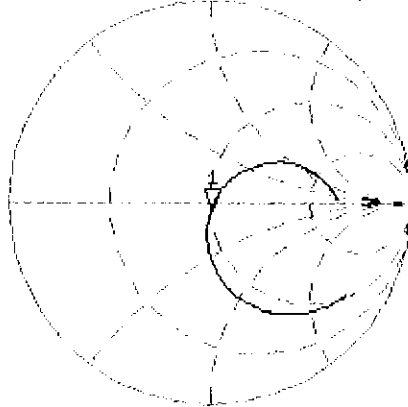

Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.995 dB 750.000 000 MHz

CA  
H1d

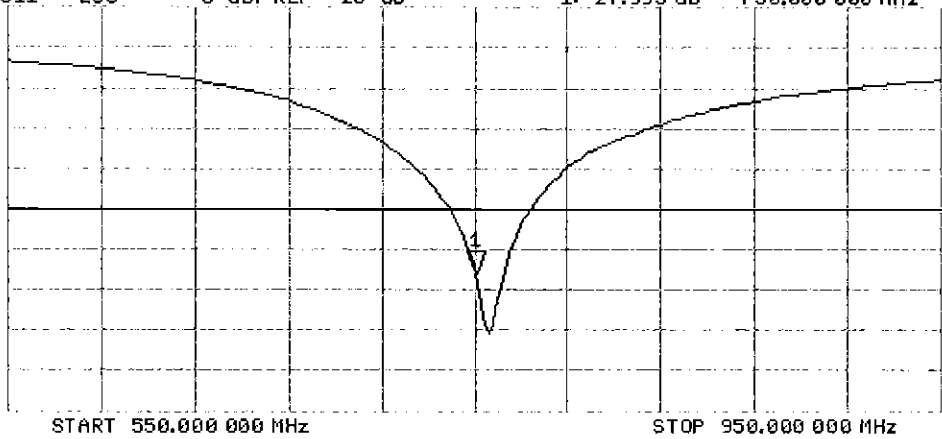

# Certification of Calibration

Object: D750V3 – SN: 1161  
 Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.  
 Calibration date: July 12, 2017  
 Description: SAR Validation Dipole at 750 MHz.

## Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	11/15/2016	Annual	11/15/2017	3334
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3319
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty =  $\pm 23\%$  (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALBFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>



# DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:


1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:


Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.63	1.65	0.98%	1.08	1.09	1.11%	55.6	54.5	1.1	-0.9	-4.0	3.1	-25.4	-24.8	2.40%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.69	1.75	3.80%	1.11	1.17	5.79%	50.2	48.0	2.2	-4.0	-6.9	2.9	-28.0	-23.9	14.60%	PASS

# Impedance & Return-Loss Measurement Plot for Head TSL



12 Jul 2017 23:41:56  
 S11 1 U FS 1: 54.459  $\Omega$  -4.0215  $\Omega$  52.768 pF 750.000 000 MHz

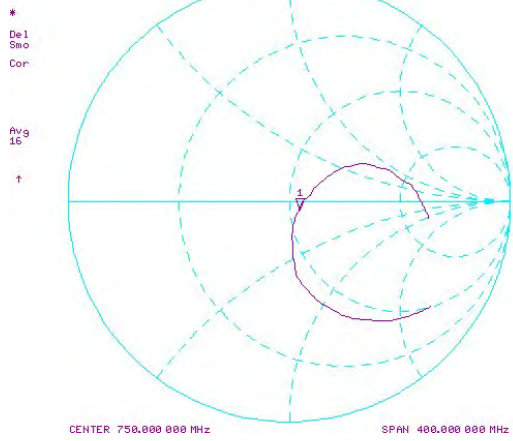

12 Jul 2017 23:35:17  
 S11 LOG 5 dB/REF -20 dB 1:-24.763 dB 750.000 000 MHz

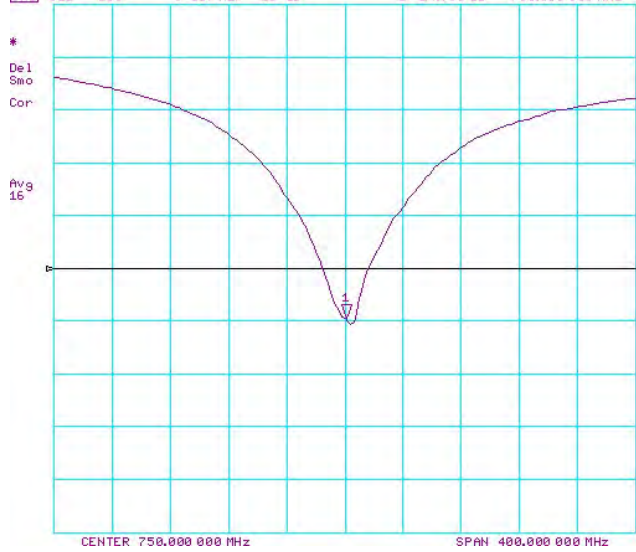

# Impedance & Return-Loss Measurement Plot for Body TSL

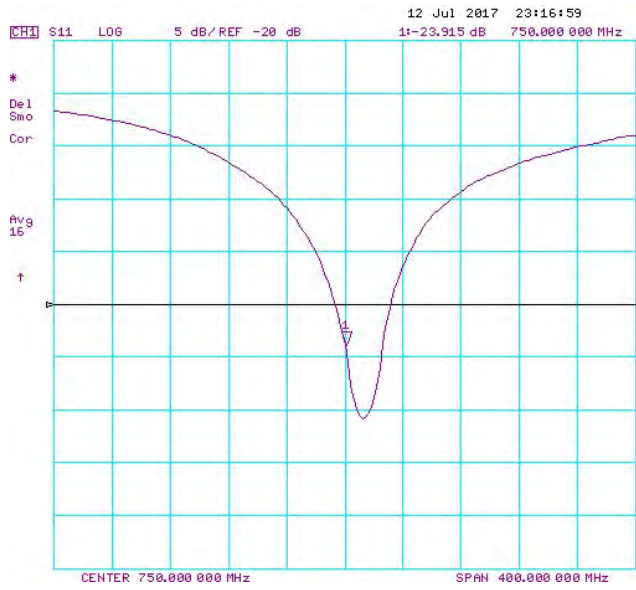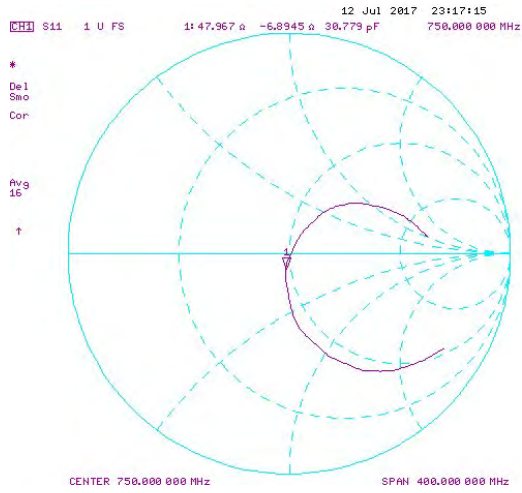



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1237\_Aug17**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1237**

Calibration procedure(s) **QA CAL-22.v2  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **August 15, 2017**

*PMV*  
*8/27/17*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	31-Dec-16 (No. EX3-3503_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name <b>Johannes Kurikka</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5750 MHz ± 1 MHz	

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.49 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>80.7 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.0 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.84 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>82.5 W / kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.5 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.99 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>80.2 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.8 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.93 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.91 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)



### Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.13 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	49.9 $\Omega$ - 5.3 j $\Omega$
Return Loss	- 25.5 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	51.9 $\Omega$ + 2.3 j $\Omega$
Return Loss	- 30.7 dB

### Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	55.6 $\Omega$ - 0.5 j $\Omega$
Return Loss	- 25.5 dB

### Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	46.9 $\Omega$ - 4.2 j $\Omega$
Return Loss	- 25.4 dB

### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	50.2 $\Omega$ + 3.0 j $\Omega$
Return Loss	- 30.4 dB

### Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	53.4 $\Omega$ + 0.2 j $\Omega$
Return Loss	- 29.7 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.194 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 04, 2015

## DASY5 Validation Report for Head TSL

Date: 15.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.49$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.84$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 4.99$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.58, 5.58, 5.58); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.02, 5.02, 5.02); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.04 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.38 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg


**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.11 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

**SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.31 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

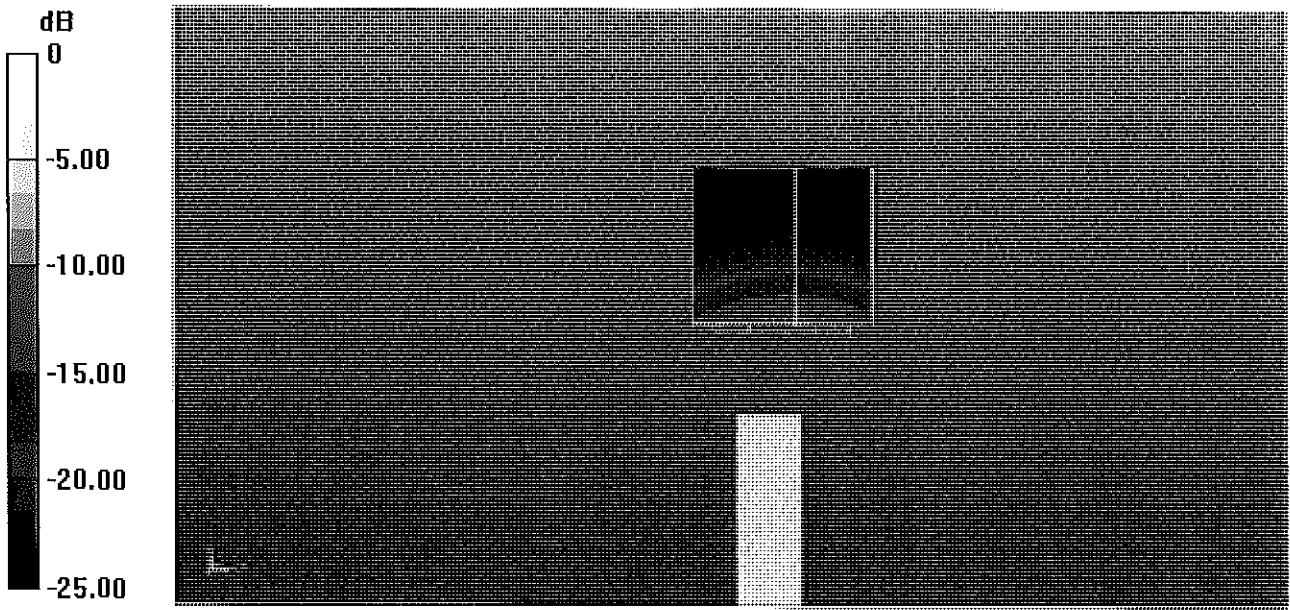


0 dB = 19.2 W/kg = 12.83 dBW/kg

# Impedance Measurement Plot for Head TSL

9 Aug 2017 12:04:29

CH1 S11 1 U FS 1: 49.920  $\Omega$  -5.3223  $\Omega$  5.6959  $\mu$ F 5 250.000 000 MHz


\*  
De1  
Cor  
Avg  
16  
H1d

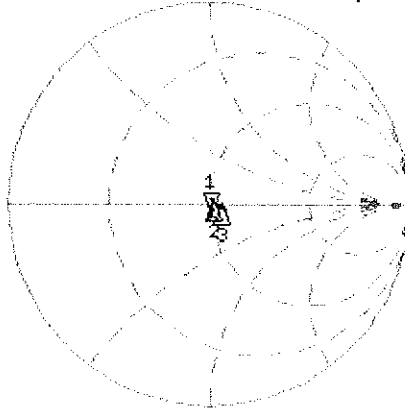

CH1 Markers  
2: 51.904  $\Omega$   
2.3008  $\Omega$   
5.60000 GHz  
3: 55.609  $\Omega$   
-492.19  $m\Omega$   
5.75000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -25.482 dB 5 250.000 000 MHz

Cor  
Avg  
16  
H1d

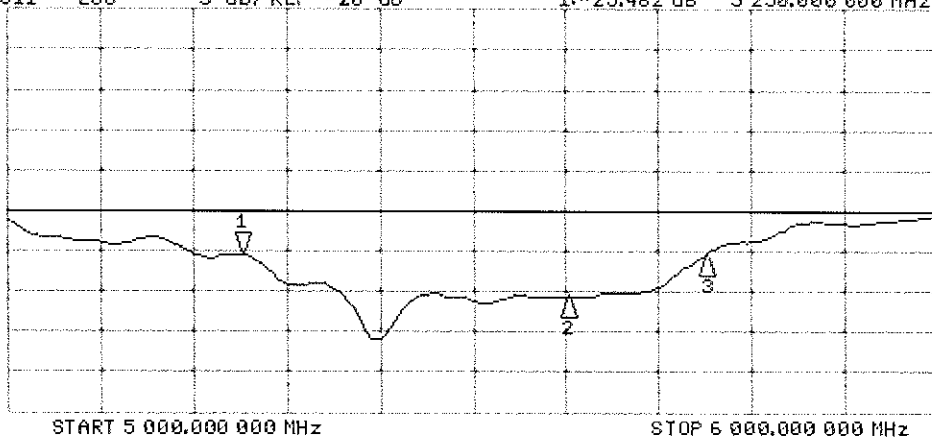

CH2 Markers  
2: -30.654 dB  
5.60000 GHz  
3: -25.460 dB  
5.75000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 08.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.46$  S/m;  $\epsilon_r = 47$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.93$  S/m;  $\epsilon_r = 46.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.13$  S/m;  $\epsilon_r = 46.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.51, 4.51, 4.51); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.87 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.9 W/kg

**SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.11 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.0 W/kg

**SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg



**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.64 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.8 W/kg

**SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 19.1 W/kg

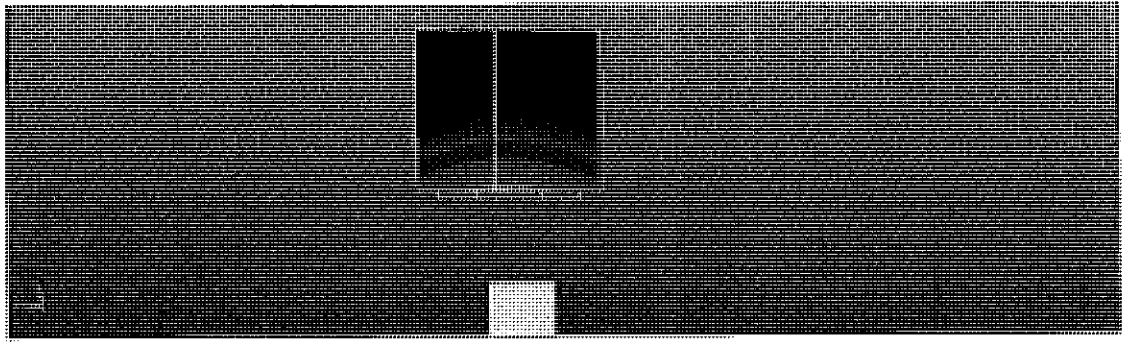


0 dB = 18.4 W/kg = 12.65 dBW/kg

# Impedance Measurement Plot for Body TSL

8 Aug 2017 15:23:50

CH1 S11 1 U FS 1: 46.885  $\Omega$  -4.1973  $\Omega$  7.2226 pF 5 250.000 000 MHz


\*  
De1  
Cor  
Avg  
16  
H1d

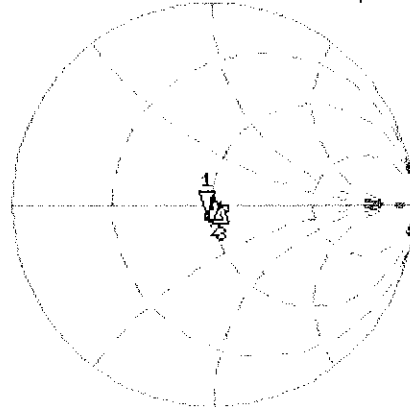

CH1 Markers  
2: 50.184  $\Omega$   
3: 0.215  $\Omega$   
5.60000 GHz  
3: 53.363  $\Omega$   
0.1719  $\Omega$   
5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.364 dB 5 250.000 000 MHz

Cor  
Avg  
16  
H1d

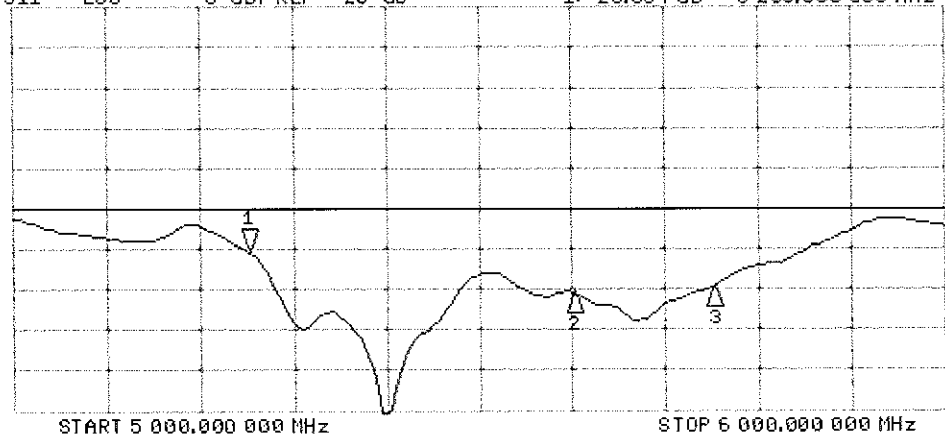

CH2 Markers  
2: -30.389 dB  
5.60000 GHz  
3: -29.742 dB  
5.75000 GHz





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-3914\_Feb18**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3914**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

*BN  
02-29-2018*

Calibration date: **February 14, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name <b>Jeton Kastrati</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function Technical Manager	Signature 

Issued: February 14, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3914

Manufactured: December 18, 2012  
Calibrated: February 14, 2018

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.47	0.41	0.44	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	98.1	103.5	99.1	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	157.3	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		143.4	
		Z	0.0	0.0	1.0		153.1	

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ V <sup>-1</sup>	T1 ms.V <sup>-2</sup>	T2 ms.V <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
X	44.52	338.7	36.78	11.30	0.699	5.054	0.000	0.544	1.006
Y	43.63	317.9	34.18	13.04	0.623	5.031	2.000	0.164	1.007
Z	41.48	314.2	36.51	10.96	0.847	5.054	0.251	0.494	1.008

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth (mm) <sup>G</sup>	Unc (k=2)
6	55.5	0.75	21.06	21.06	21.06	0.00	1.00	± 13.3 %
13	55.5	0.75	17.97	17.97	17.97	0.00	1.00	± 13.3 %
750	41.9	0.89	10.18	10.18	10.18	0.58	0.80	± 12.0 %
835	41.5	0.90	9.70	9.70	9.70	0.52	0.80	± 12.0 %
1750	40.1	1.37	8.34	8.34	8.34	0.40	0.80	± 12.0 %
1900	40.0	1.40	7.98	7.98	7.98	0.41	0.84	± 12.0 %
2300	39.5	1.67	7.58	7.58	7.58	0.37	0.87	± 12.0 %
2450	39.2	1.80	7.26	7.26	7.26	0.43	0.84	± 12.0 %
2600	39.0	1.96	7.04	7.04	7.04	0.29	0.86	± 12.0 %
3500	37.9	2.91	6.99	6.99	6.99	0.25	1.20	± 13.1 %
3700	37.7	3.12	6.72	6.72	6.72	0.23	1.20	± 13.1 %
5250	35.9	4.71	5.41	5.41	5.41	0.30	1.80	± 13.1 %
5600	35.5	5.07	4.79	4.79	4.79	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.78	4.78	4.78	0.40	1.80	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.