



	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	2.89	30.0	-27.11
	5785	157	a	6	3.55	30.0	-26.45
	5825	165	a	6	3.98	30.0	-26.02
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.21	30.0	-26.79
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.76	30.0	-26.24
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.71	30.0	-26.29
	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	0.89	30.0	-29.11
	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	0.58	30.0	-29.42
	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	0.68	30.0	-29.32
	5755	151	n (40MHz)	13.5/15 (MCS0)	-0.73	30.0	-30.73
	5795	159	n (40MHz)	13.5/15 (MCS0)	-1.35	30.0	-31.35
	5755	151	ax (40MHz)	13.5/15 (MCS0)	-4.78	30.0	-34.78
	5795	159	ax (40MHz)	13.5/15 (MCS0)	-4.62	30.0	-34.62
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-4.59	30.0	-34.59
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	-6.71	30.0	-36.71

Table 7-23. Band 3 Conducted Power Spectral Density Measurements SISO ANT2

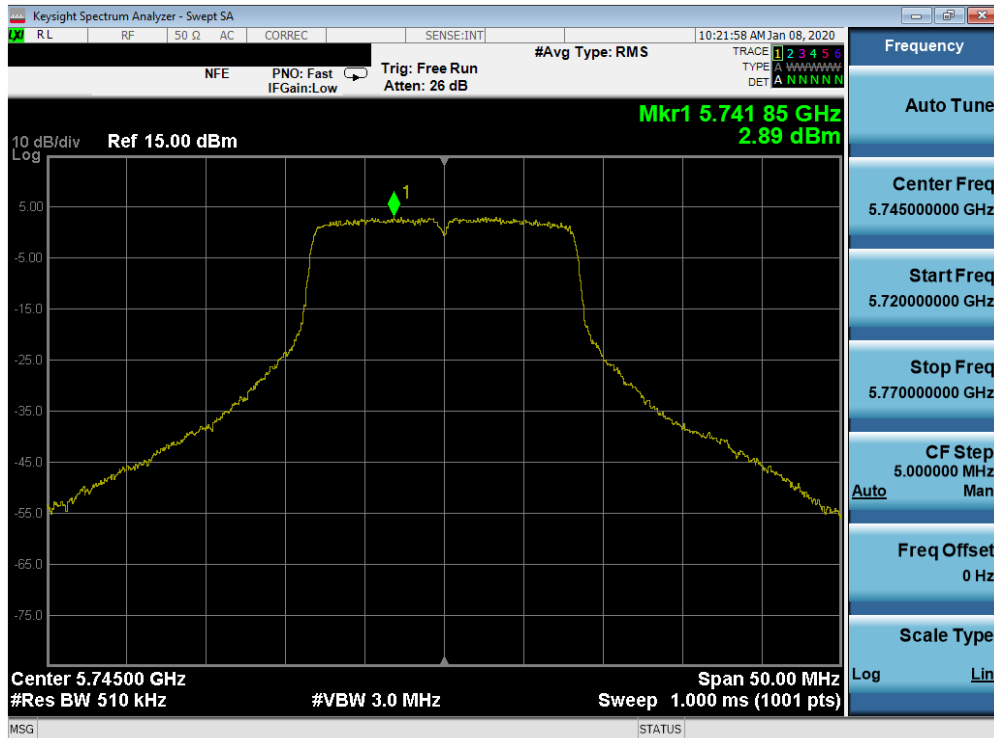


Plot 7-242. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 149)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 156 of 234

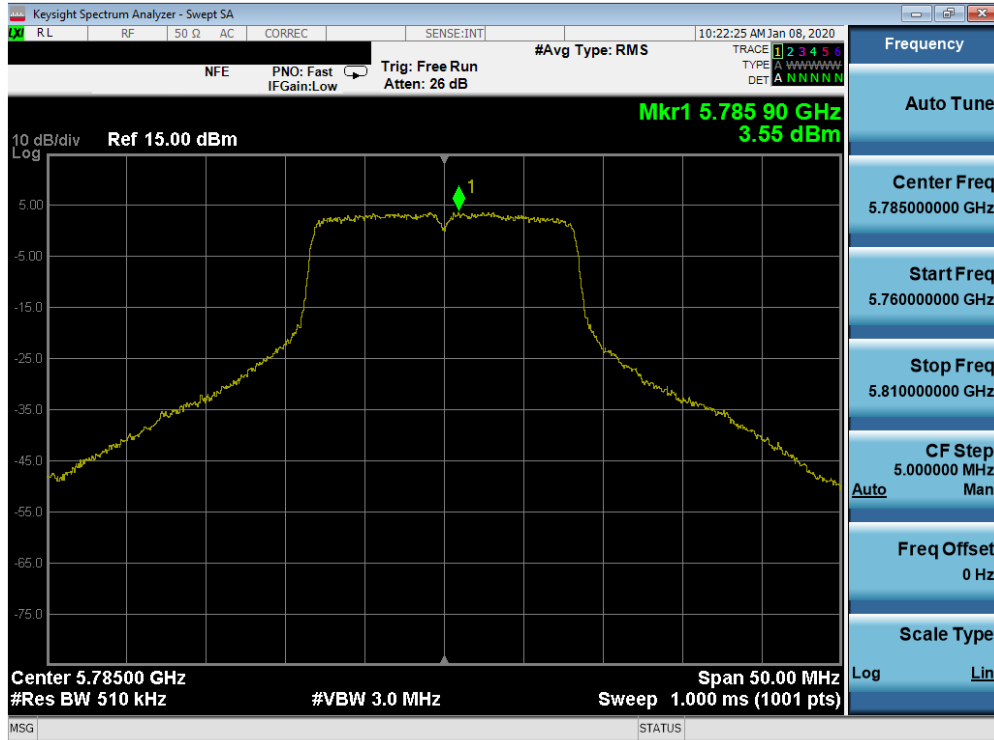


Plot 7-243. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 157)

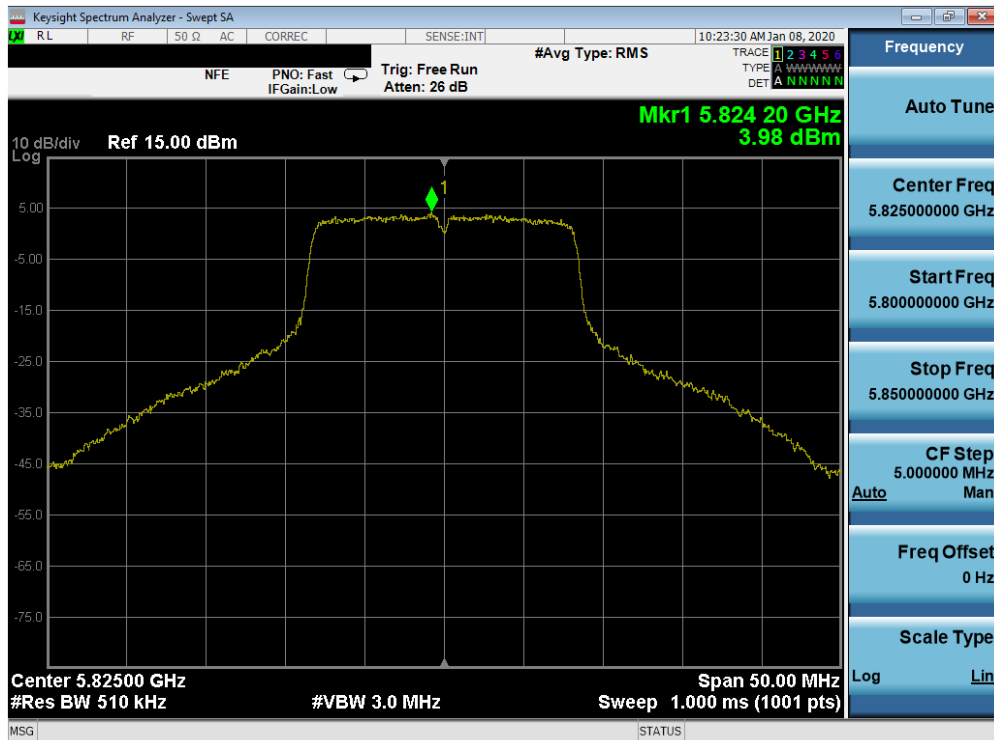


Plot 7-244. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 157 of 234

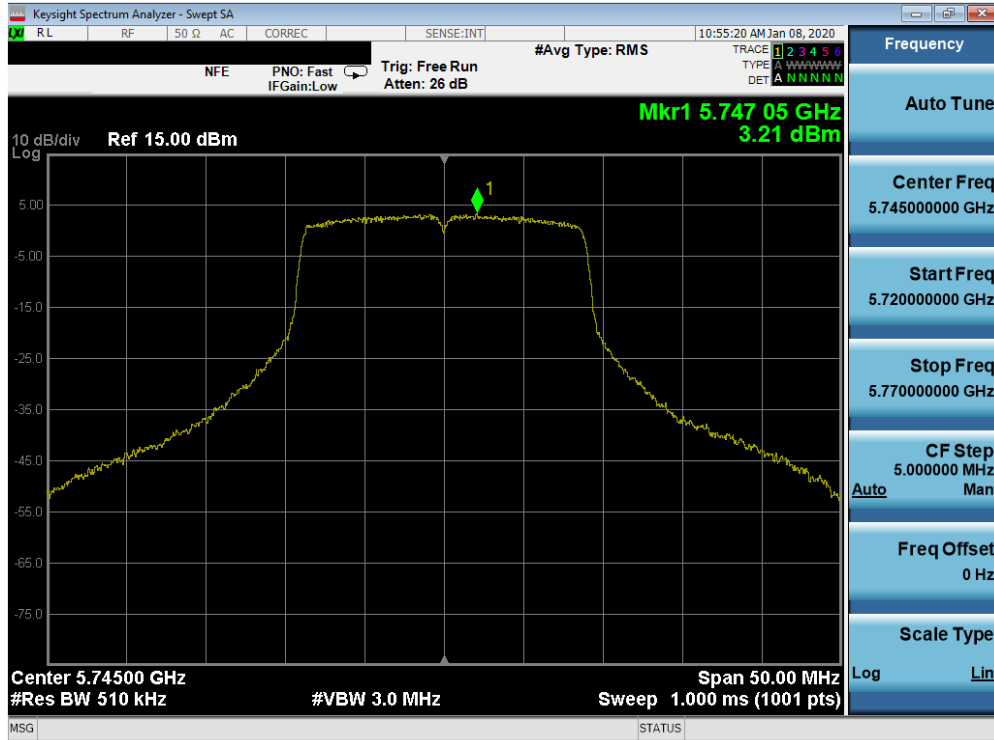


Plot 7-245. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

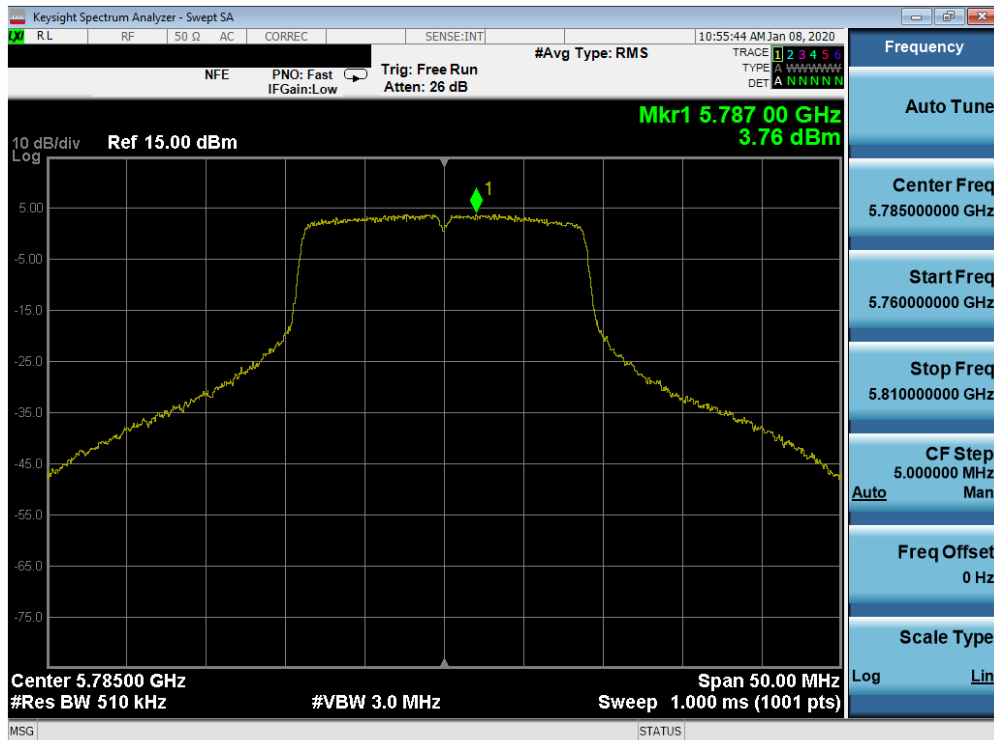


Plot 7-246. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 158 of 234

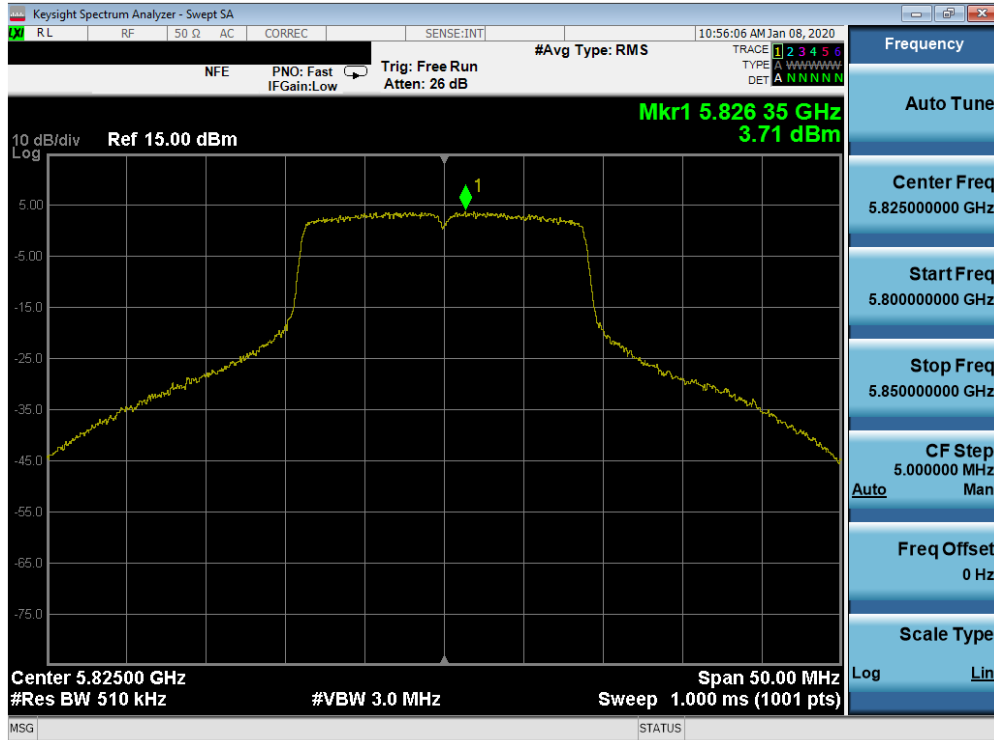


Plot 7-247. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

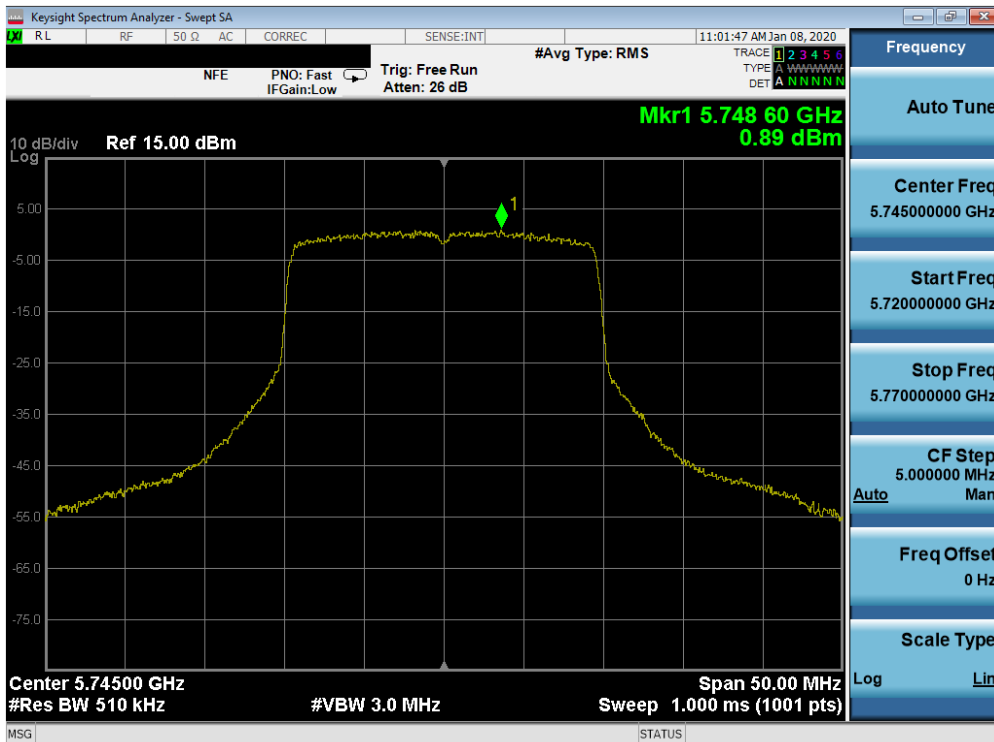


Plot 7-248. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 159 of 234

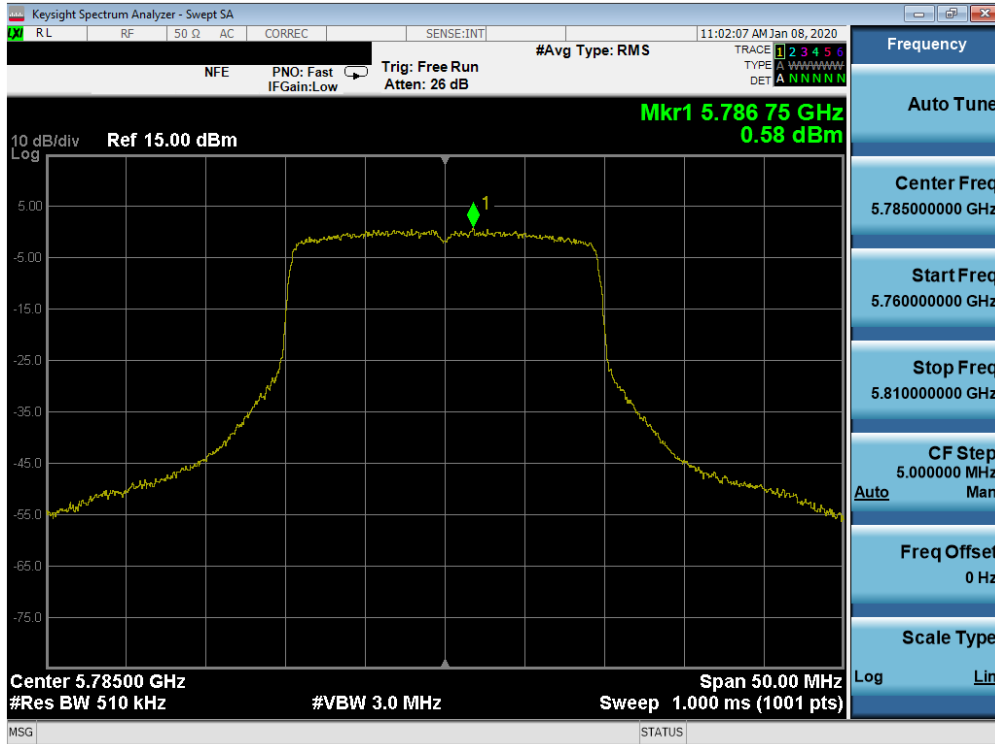


Plot 7-249. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

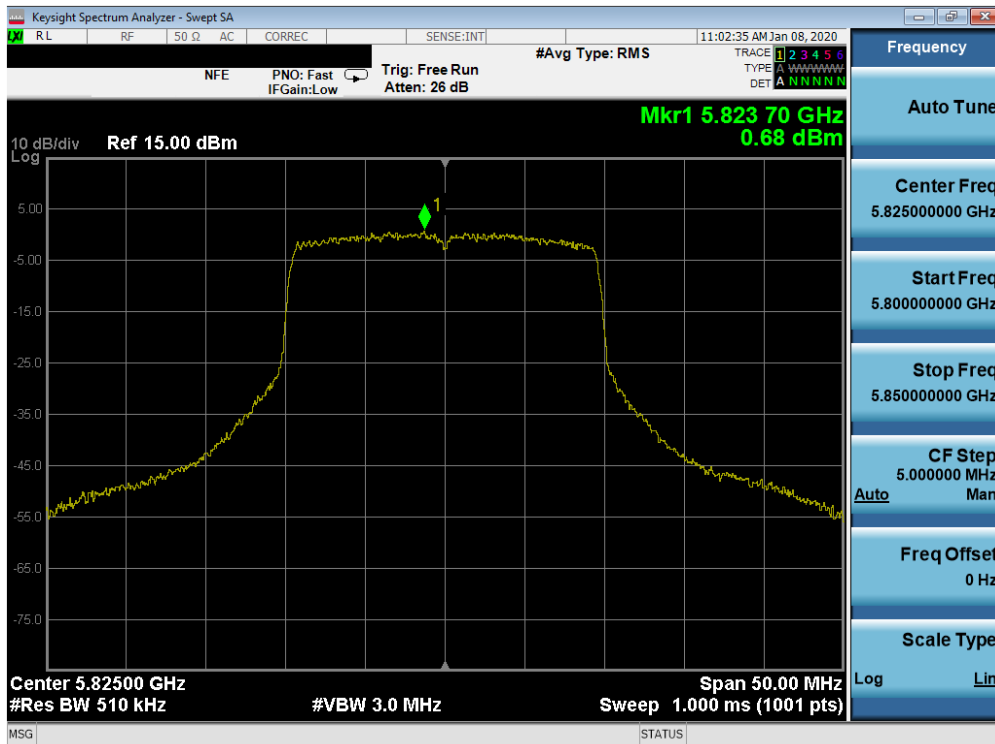


Plot 7-250. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 160 of 234

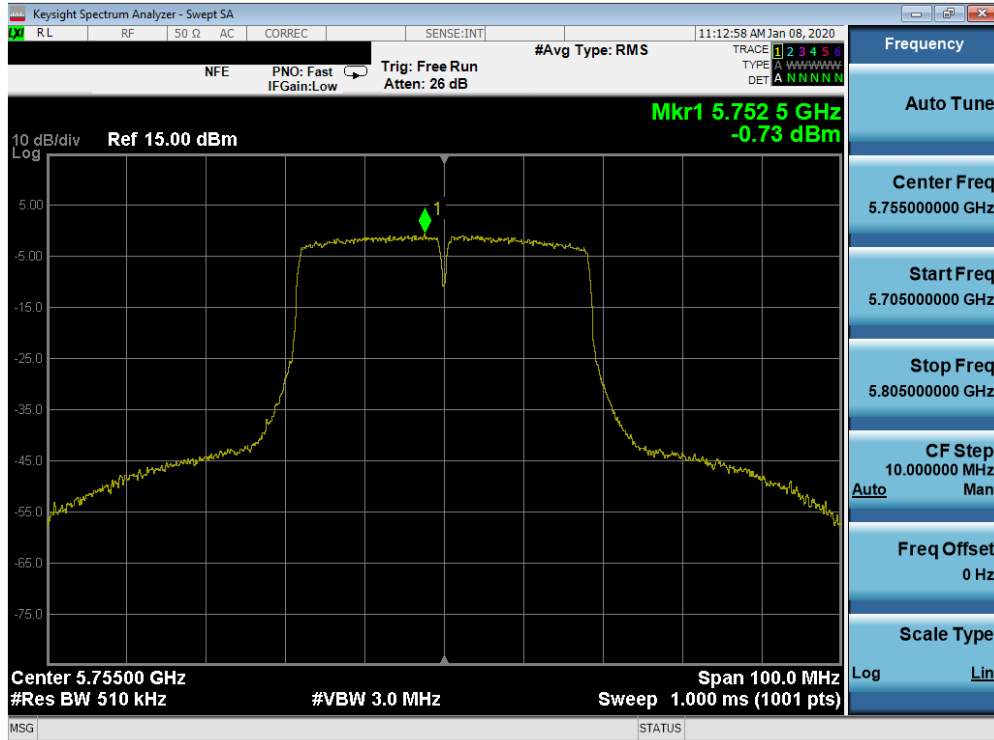


Plot 7-251. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

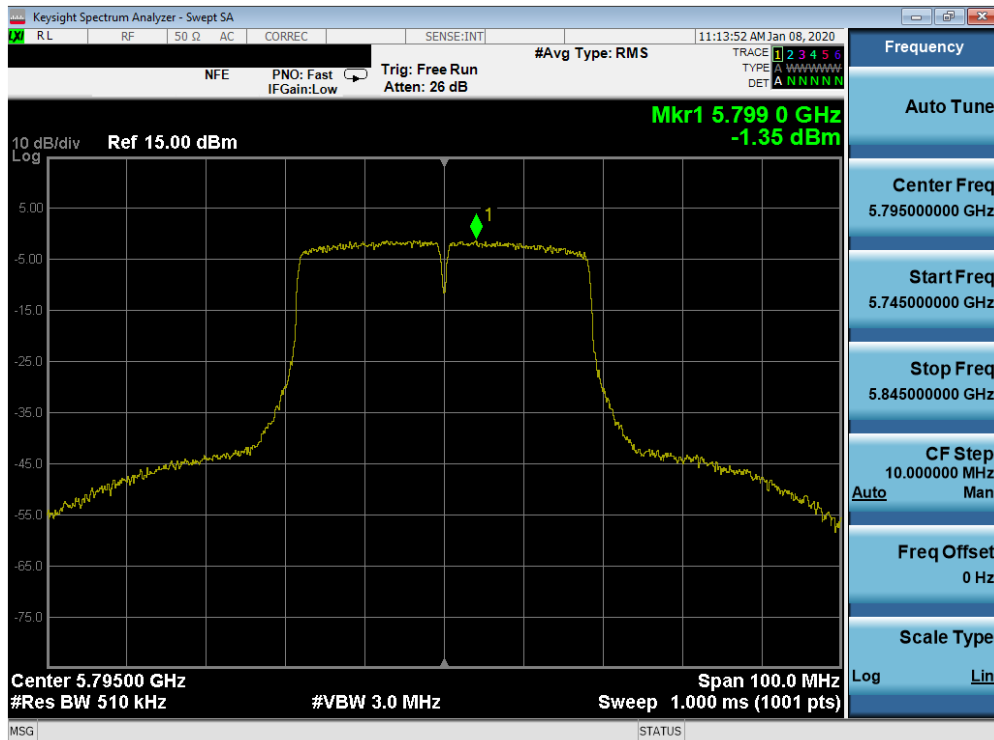


Plot 7-252. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 161 of 234

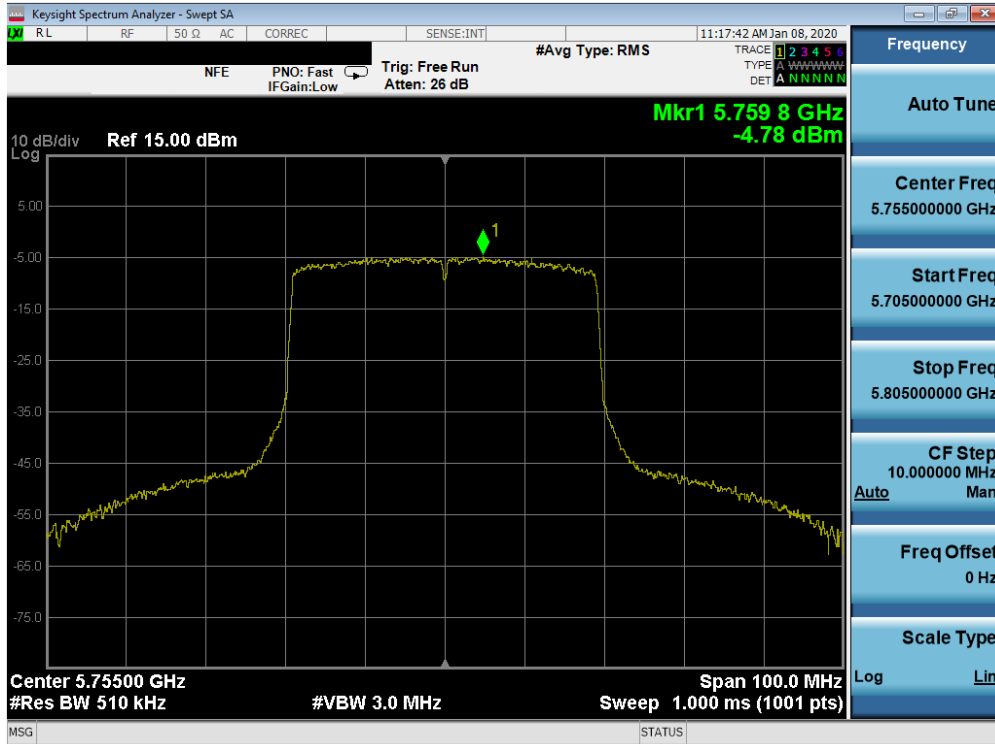


Plot 7-253. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

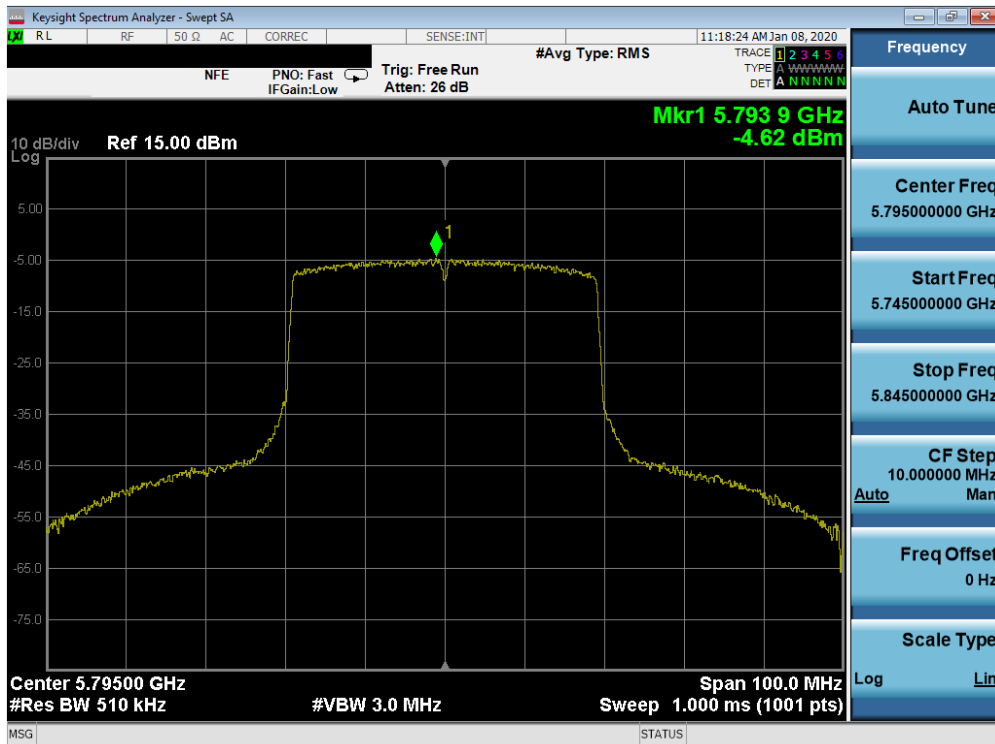


Plot 7-254. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 162 of 234

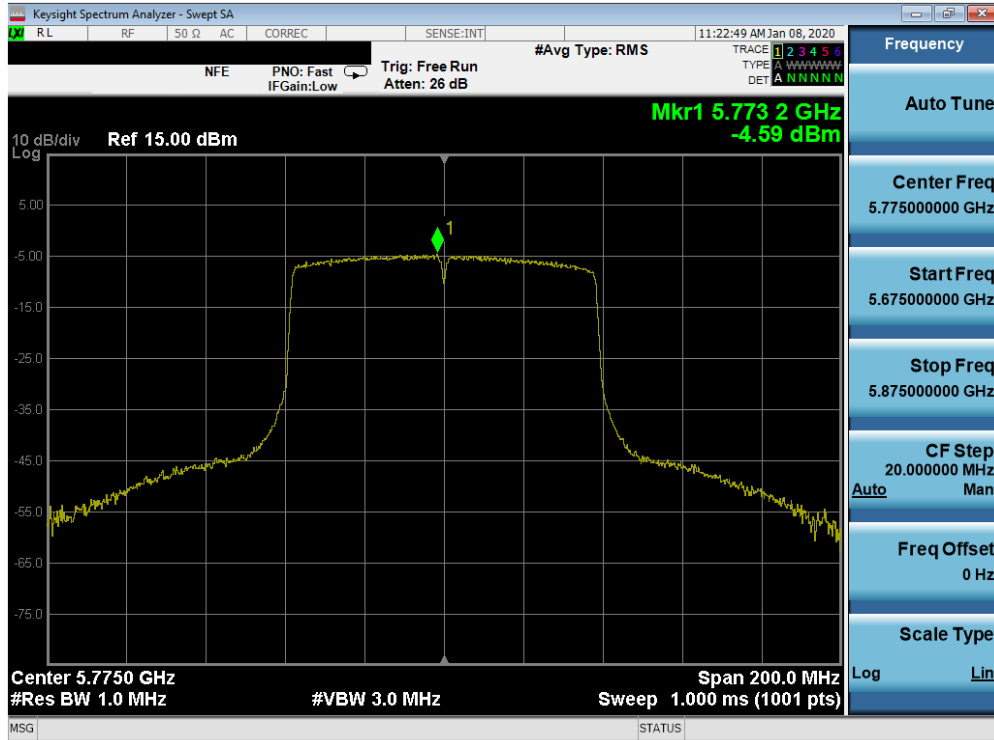

Plot 7-255. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

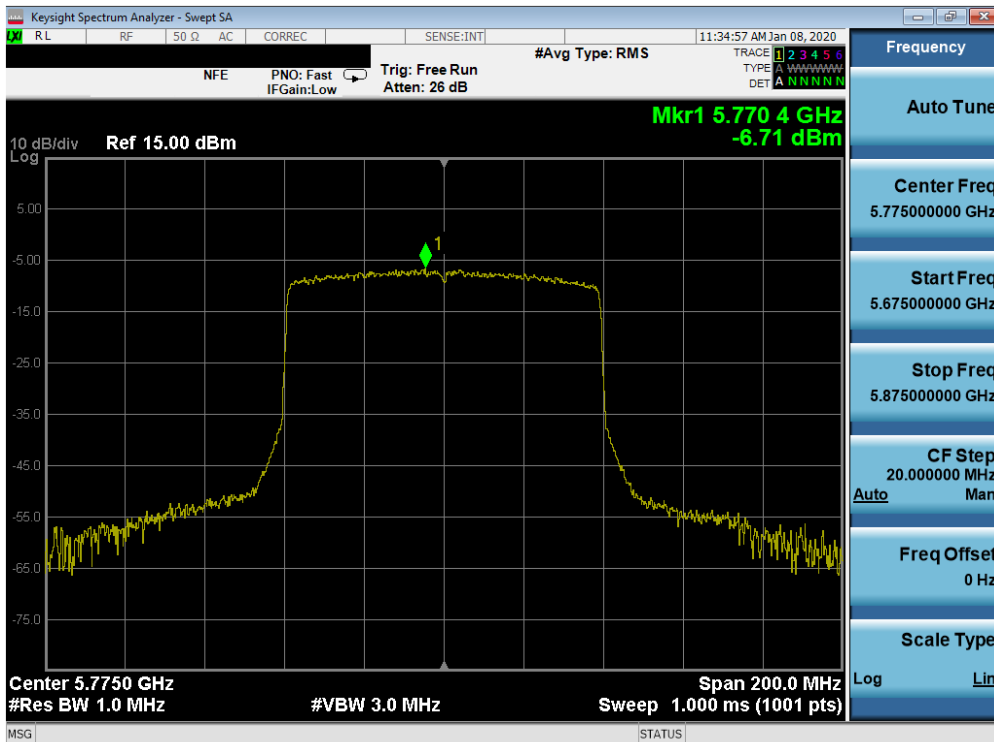

Plot 7-256. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 163 of 234

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.59	5.66	8.64	11.0	-2.36
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.52	6.87	9.71	11.0	-1.29
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.89	6.00	8.96	11.0	-2.04
	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	2.96	3.30	6.14	11.0	-4.86
	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	3.05	3.37	6.22	11.0	-4.78
	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	3.12	3.56	6.36	11.0	-4.64
	5190	38	n (40MHz)	13.5/15 (MCS0)	-3.67	-3.25	-0.44	11.0	-11.44
	5230	46	n (40MHz)	13.5/15 (MCS0)	1.00	1.78	4.42	11.0	-6.58
	5190	38	ax (40MHz)	13.5/15 (MCS0)	-6.32	-5.56	-2.91	11.0	-13.91
	5230	46	ax (40MHz)	13.5/15 (MCS0)	-2.43	-2.04	0.78	11.0	-10.22
Band 2A	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-7.54	-7.05	-4.28	11.0	-15.28
	5210	42	ax (80MHz)	29.3/32.5 (MCS0)	-9.51	-9.12	-6.30	11.0	-17.30
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.25	6.35	8.85	11.0	-2.15
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.42	7.37	9.93	11.0	-1.07
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	5.61	6.39	9.03	11.0	-1.97
	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	2.83	3.71	6.30	11.0	-4.70
	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	2.54	3.67	6.15	11.0	-4.85
	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	2.65	3.54	6.13	11.0	-4.87
	5270	54	n (40MHz)	13.5/15 (MCS0)	0.75	1.67	4.24	11.0	-6.76
	5310	62	n (40MHz)	13.5/15 (MCS0)	-3.67	-3.01	-0.32	11.0	-11.32
Band 2C	5270	54	ax (40MHz)	13.5/15 (MCS0)	-2.59	-2.11	0.67	11.0	-10.33
	5310	62	ax (40MHz)	13.5/15 (MCS0)	-6.50	-5.81	-3.13	11.0	-14.13
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-7.46	-6.59	-3.99	11.0	-14.99
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	-9.90	-9.90	-6.89	11.0	-17.89
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	5.36	6.04	8.72	11.0	-2.28
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	5.93	5.95	8.95	11.0	-2.05
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	5.76	6.19	8.99	11.0	-2.01
	5500	100	ax (20MHz)	6.5/7.2 (MCS0)	2.66	3.42	6.07	11.0	-4.93
	5600	120	ax (20MHz)	6.5/7.2 (MCS0)	3.28	3.63	6.47	11.0	-4.53
	5700	140	ax (20MHz)	6.5/7.2 (MCS0)	3.08	3.80	6.47	11.0	-4.53
5510	102	n (40MHz)	13.5/15 (MCS0)	-4.15	-3.23	-0.66	11.0	-11.66	
5590	118	n (40MHz)	13.5/15 (MCS0)	0.87	1.53	4.22	11.0	-6.78	
5670	134	n (40MHz)	13.5/15 (MCS0)	1.15	2.26	4.75	11.0	-6.25	
5510	102	ax (40MHz)	13.5/15 (MCS0)	-6.72	-5.70	-3.17	11.0	-14.17	
5590	118	ax (40MHz)	13.5/15 (MCS0)	-2.36	-2.11	0.78	11.0	-10.22	
5670	134	ax (40MHz)	13.5/15 (MCS0)	-2.23	-1.45	1.19	11.0	-9.81	
5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-5.71	-4.87	-2.26	11.0	-13.26	
5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-5.85	-5.22	-2.51	11.0	-13.51	
5530	106	ax (80MHz)	29.3/32.5 (MCS0)	-7.96	-6.81	-4.34	11.0	-15.34	
5610	122	ax (80MHz)	29.3/32.5 (MCS0)	-10.45	-7.41	-5.66	11.0	-16.66	

Table 7-24. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 164 of 234	

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.52	3.21	5.08	30.0	-24.92
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.97	3.76	6.88	30.0	-23.12
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	3.95	3.71	6.84	30.0	-23.16
	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	0.16	0.89	3.55	30.0	-26.45
	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	0.21	0.58	3.41	30.0	-26.59
	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	0.17	0.68	3.44	30.0	-26.56
	5755	151	n (40MHz)	13.5/15 (MCS0)	-1.85	-0.73	1.76	30.0	-28.24
	5795	159	n (40MHz)	13.5/15 (MCS0)	-1.57	-1.35	1.55	30.0	-28.45
	5755	151	ax (40MHz)	13.5/15 (MCS0)	-5.17	-4.78	-1.96	30.0	-31.96
	5795	159	ax (40MHz)	13.5/15 (MCS0)	-5.36	-4.62	-1.96	30.0	-31.96
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-5.07	-4.59	-1.81	30.0	-31.81
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	-7.14	-6.71	-3.91	30.0	-33.91

Table 7-25. Band 3 MIMO Conducted Power Spectral Density Measurements

FCC ID: ZNFV600AM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 165 of 234	

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted power spectral density was measured to be 5.59 dBm for Antenna-1 and 5.66 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(5.59 \text{ dBm} + 5.66 \text{ dBm}) = (3.62 \text{ mW} + 3.68 \text{ mW}) = 7.30 \text{ mW} = 8.64 \text{ dBm}$$

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 166 of 234

7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-26 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-26. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 167 of 234

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

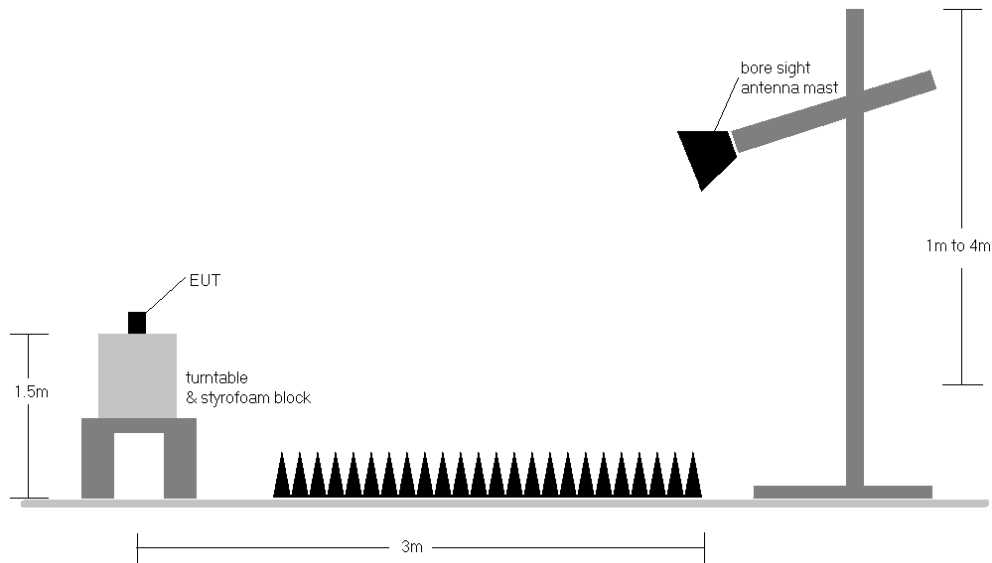


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 168 of 234	

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-26.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-26. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 169 of 234	


7.6.1 SISO Antenna-1 Radiated Spurious Emission Measurements

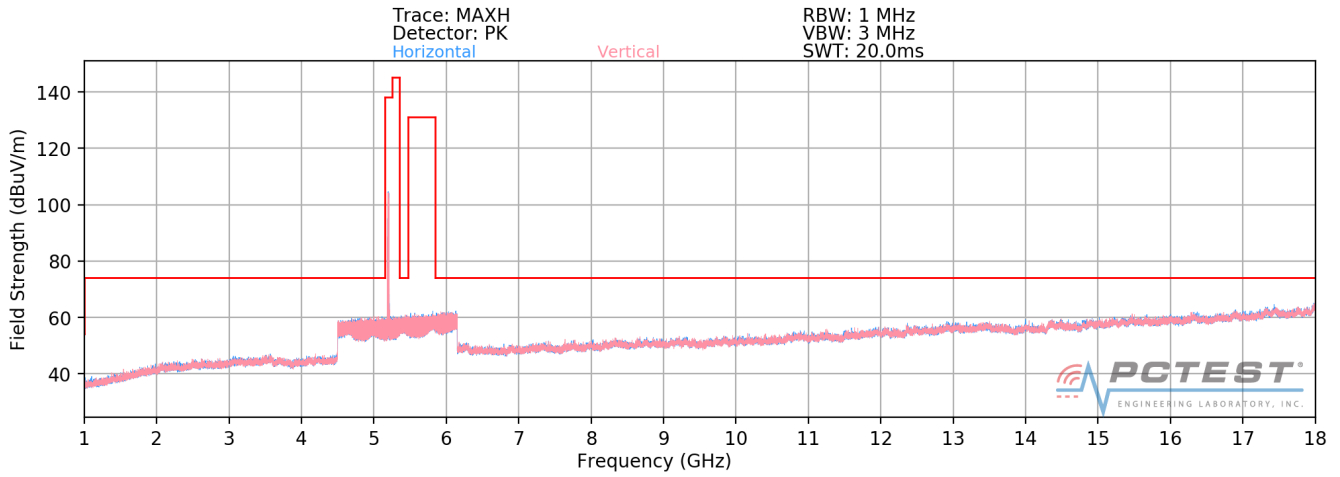

Plot 7-257. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11a – U1 Ch. 40)

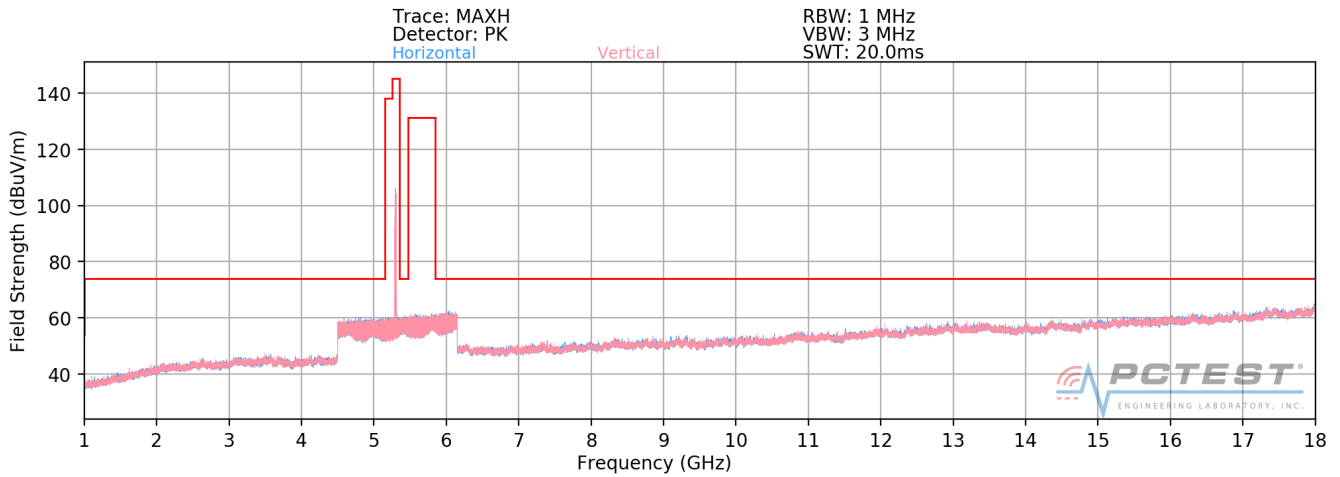


Plot 7-258. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11a – U2A Ch. 56)

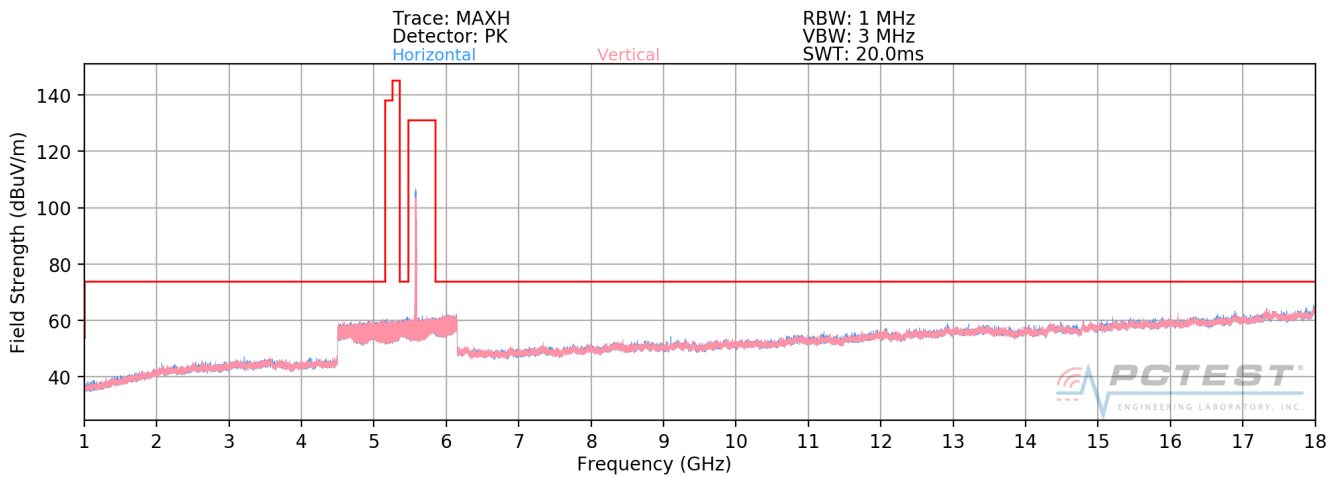

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 170 of 234


Plot 7-259. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11a – U2C Ch. 120)

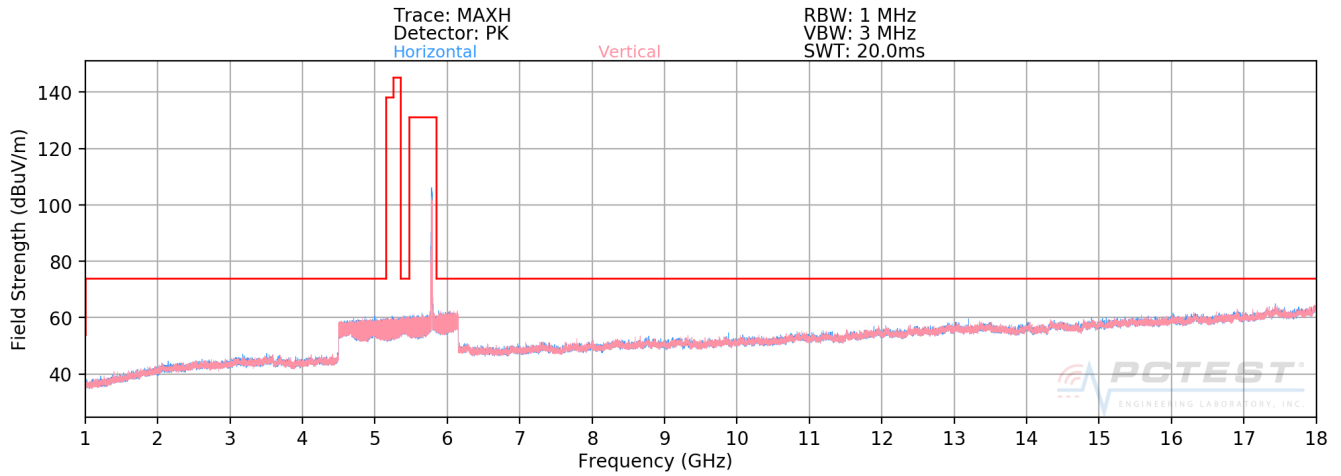


Plot 7-260. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11a – U3 Ch. 157)

FCC ID: ZNFV600AM	 MEASUREMENT REPORT (CERTIFICATION)		 Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 171 of 234

SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

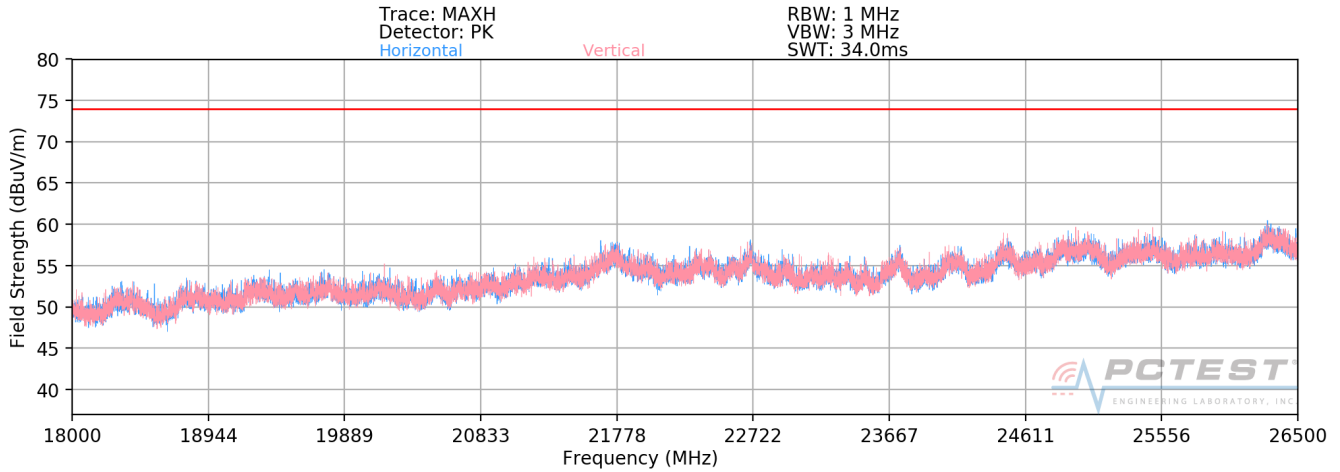

Plot 7-261. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11a)

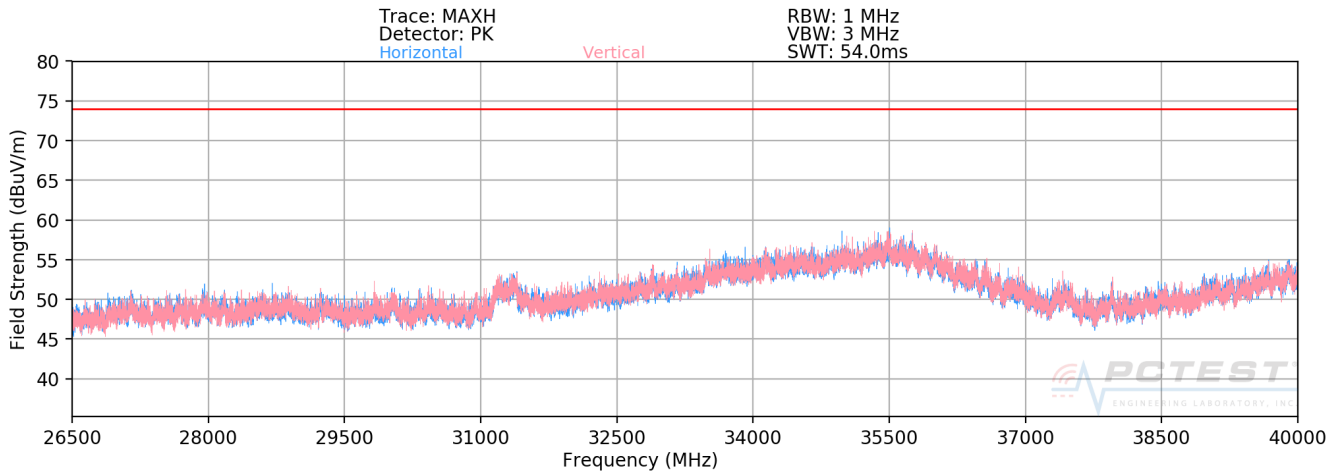

Plot 7-262. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11a)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 172 of 234	

SISO Antenna-1 Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	132	73	-67.13	15.23	0.00	55.10	68.20	-13.10
* 15540.00	Average	H	-	-	-81.21	22.71	0.00	48.50	53.98	-5.48
* 15540.00	Peak	H	-	-	-69.58	22.71	0.00	60.13	73.98	-13.85
* 20720.00	Average	H	-	-	-70.99	7.97	-9.54	34.44	53.98	-19.54
* 20720.00	Peak	H	-	-	-77.89	7.97	-9.54	27.54	73.98	-46.44
25900.00	Peak	H	-	-	-77.54	10.34	-9.54	30.26	68.20	-37.94

Table 7-27. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	123	71	-67.12	15.67	0.00	55.55	68.20	-12.65
* 15600.00	Average	H	-	-	-80.97	22.46	0.00	48.49	53.98	-5.49
* 15600.00	Peak	H	-	-	-69.54	22.46	0.00	59.92	73.98	-14.06
* 20800.00	Average	H	180	329	-70.26	8.33	-9.54	35.52	53.98	-18.46
* 20800.00	Peak	H	180	329	-76.70	8.33	-9.54	29.08	73.98	-44.90
26000.00	Peak	H	-	-	-77.82	10.61	-9.54	30.24	68.20	-37.96

Table 7-28. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 173 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	123	73	-67.09	15.49	0.00	55.40	68.20	-12.80
* 15720.00	Average	H	-	-	-81.08	22.45	0.00	48.37	53.98	-5.61
* 15720.00	Peak	H	-	-	-69.17	22.45	0.00	60.28	73.98	-13.70
* 20960.00	Average	H	180	317	-70.13	8.52	-9.54	35.84	53.98	-18.13
* 20960.00	Peak	H	180	317	-77.22	8.52	-9.54	28.75	73.98	-45.22
26200.00	Peak	H	-	-	-77.61	10.69	-9.54	30.54	68.20	-37.66

Table 7-29. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	139	69	-67.80	15.86	0.00	55.06	68.20	-13.14
* 15780.00	Average	H	-	-	-81.24	22.77	0.00	48.53	53.98	-5.45
* 15780.00	Peak	H	-	-	-69.52	22.77	0.00	60.25	73.98	-13.73
* 21040.00	Average	H	180	314	-68.78	8.82	-9.54	37.49	53.98	-16.49
* 21040.00	Peak	H	180	314	-75.20	8.82	-9.54	31.07	73.98	-42.91
26300.00	Peak	H	-	-	-77.03	11.42	-9.54	31.84	68.20	-36.36

Table 7-30. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 174 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	125	76	-68.60	15.70	0.00	54.10	68.20	-14.10
* 15840.00	Average	H	-	-	-81.30	22.66	0.00	48.36	53.98	-5.62
* 15840.00	Peak	H	-	-	-69.35	22.66	0.00	60.31	73.98	-13.67
* 21120.00	Average	H	180	322	-70.45	8.63	-9.54	35.63	53.98	-18.34
* 21120.00	Peak	H	180	322	-76.87	8.63	-9.54	29.21	73.98	-44.76
26400.00	Peak	H	-	-	-77.14	11.11	-9.54	31.43	68.20	-36.77

Table 7-31. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-80.76	16.03	0.00	42.27	53.98	-11.71
* 10640.00	Peak	H	-	-	-68.57	16.03	0.00	54.46	73.98	-19.52
* 15960.00	Average	H	-	-	-81.55	23.09	0.00	48.54	53.98	-5.44
* 15960.00	Peak	H	-	-	-70.06	23.09	0.00	60.03	73.98	-13.95
* 21280.00	Average	H	180	315	-69.28	9.03	-9.54	37.21	53.98	-16.77
* 21280.00	Peak	H	180	315	-75.99	9.03	-9.54	30.50	73.98	-43.48
26600.00	Peak	H	-	-	-78.54	11.18	-9.54	30.10	68.20	-38.10

Table 7-32. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 175 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-80.32	16.51	0.00	43.19	53.98	-10.79
* 11000.00	Peak	H	-	-	-68.65	16.51	0.00	54.86	73.98	-19.12
16500.00	Peak	H	-	-	-69.38	24.17	0.00	61.79	68.20	-6.41
22000.00	Peak	H	180	308	-78.31	9.58	-9.54	28.72	68.20	-39.48
27500.00	Peak	H	-	-	-62.52	-5.56	-9.54	29.38	68.20	-38.82

Table 7-33. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	H	-	-	-80.44	16.73	0.00	43.29	53.98	-10.69
* 11200.00	Peak	H	-	-	-68.40	16.73	0.00	55.33	73.98	-18.65
16800.00	Peak	H	-	-	-69.54	24.00	0.00	61.46	68.20	-6.74
* 22400.00	Average	H	180	294	-70.68	10.49	-9.54	37.27	53.98	-16.71
* 22400.00	Peak	H	180	294	-78.64	10.49	-9.54	29.31	73.98	-44.67
28000.00	Peak	H	-	-	-63.76	-4.84	-9.54	28.86	68.20	-39.34

Table 7-34. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 176 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	Average	H	-	-	-81.20	17.67	0.00	43.47	53.98	-10.51
* 11400.00	Peak	H	-	-	-69.68	17.67	0.00	54.99	73.98	-18.99
17100.00	Peak	H	-	-	-70.26	24.82	0.00	61.56	68.20	-6.64
* 22800.00	Average	H	180	293	-71.57	9.97	-9.54	35.86	53.98	-18.12
* 22800.00	Peak	H	180	293	-78.96	9.97	-9.54	28.47	73.98	-45.51
28500.00	Peak	H	-	-	-63.08	-5.58	-9.54	28.79	68.20	-39.41

Table 7-35. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-81.07	17.63	0.00	43.56	53.98	-10.41
* 11490.00	Peak	H	-	-	-69.27	17.63	0.00	55.36	73.98	-18.61
17235.00	Peak	H	-	-	-69.98	25.01	0.00	62.03	68.20	-6.17
* 22980.00	Average	H	180	287	-71.49	10.35	-9.54	36.31	53.98	-17.67
* 22980.00	Peak	H	180	287	-79.41	10.35	-9.54	28.39	73.98	-45.59
28725.00	Peak	H	-	-	-63.94	-4.88	-9.54	28.64	68.20	-39.56

Table 7-36. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 177 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-80.56	17.35	0.00	43.79	53.98	-10.19
* 11570.00	Peak	H	-	-	-68.81	17.35	0.00	55.54	73.98	-18.44
17355.00	Peak	H	-	-	-69.08	26.08	0.00	64.00	68.20	-4.20
23140.00	Peak	H	-	-	-79.16	10.05	-9.54	28.35	68.20	-39.85
28925.00	Peak	H	-	-	-64.28	-5.11	-9.54	28.07	68.20	-40.13

Table 7-37. Radiated Measurements SISO ANT1


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-80.93	17.57	0.00	43.64	53.98	-10.33
* 11650.00	Peak	H	-	-	-68.63	17.57	0.00	55.94	73.98	-18.03
17475.00	Peak	H	-	-	-69.67	26.23	0.00	63.56	68.20	-4.64
23300.00	Peak	H	-	-	-78.69	9.39	-9.54	28.16	68.20	-40.04
29125.00	Peak	H	-	-	-62.43	-6.06	-9.54	28.97	68.20	-39.23


Table 7-38. Radiated Measurements SISO ANT1

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 178 of 234	


7.6.2 SISO Antenna-2 Radiated Spurious Emission Measurements

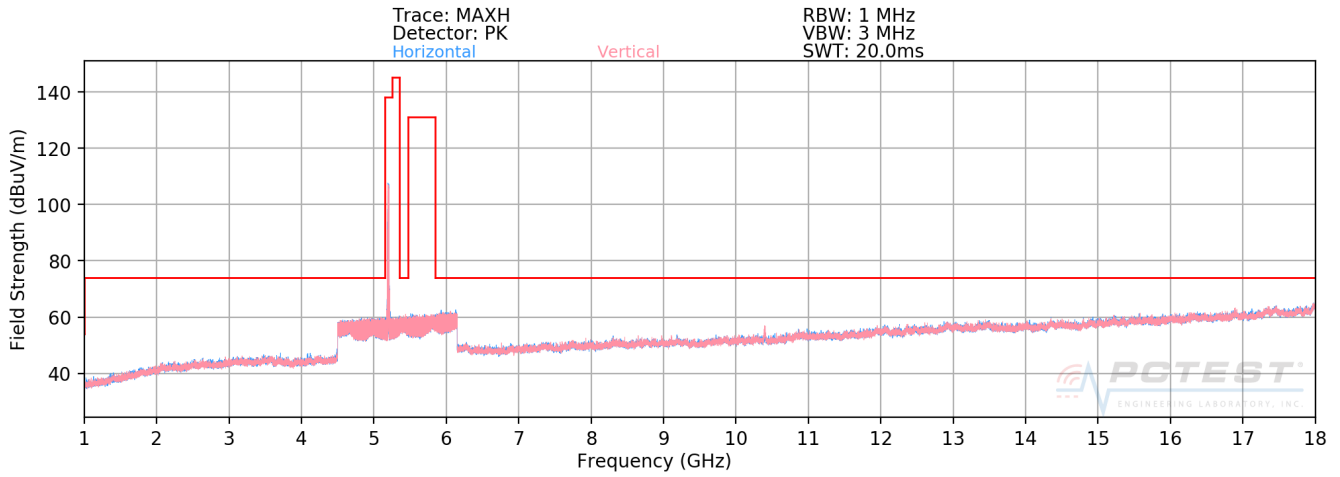

Plot 7-263. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11a – U1 Ch. 40)

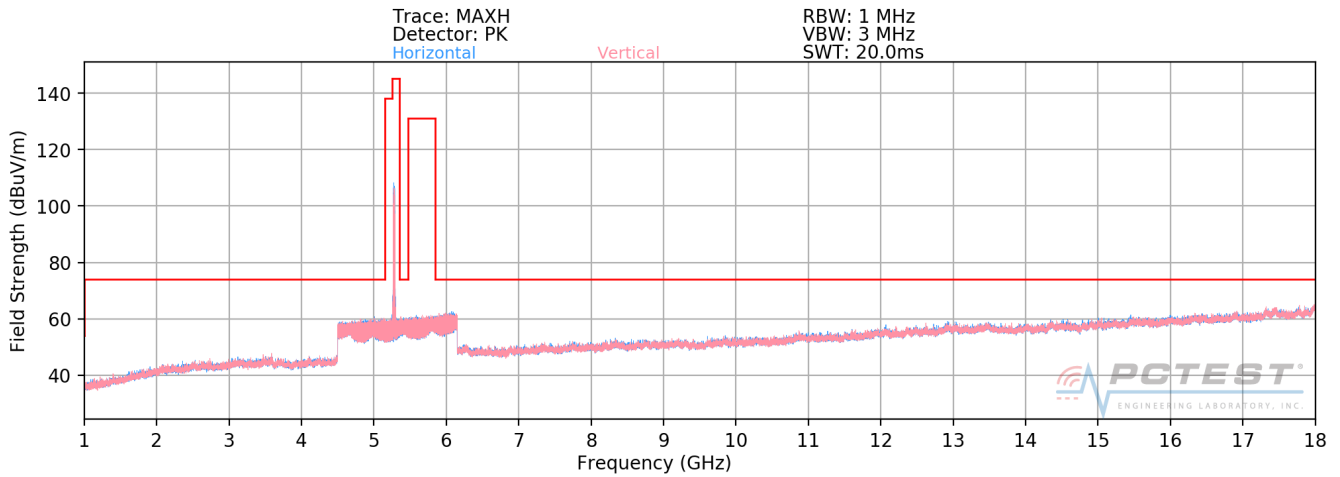


Plot 7-264. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11a – U2A Ch. 56)

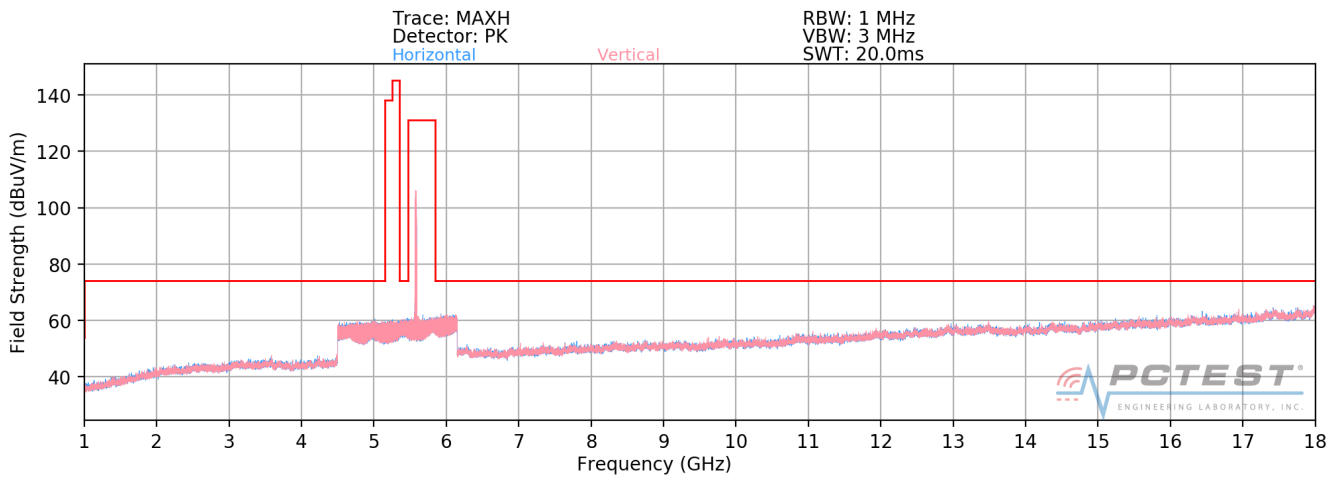

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 179 of 234


Plot 7-265. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11a – U2C Ch. 120)

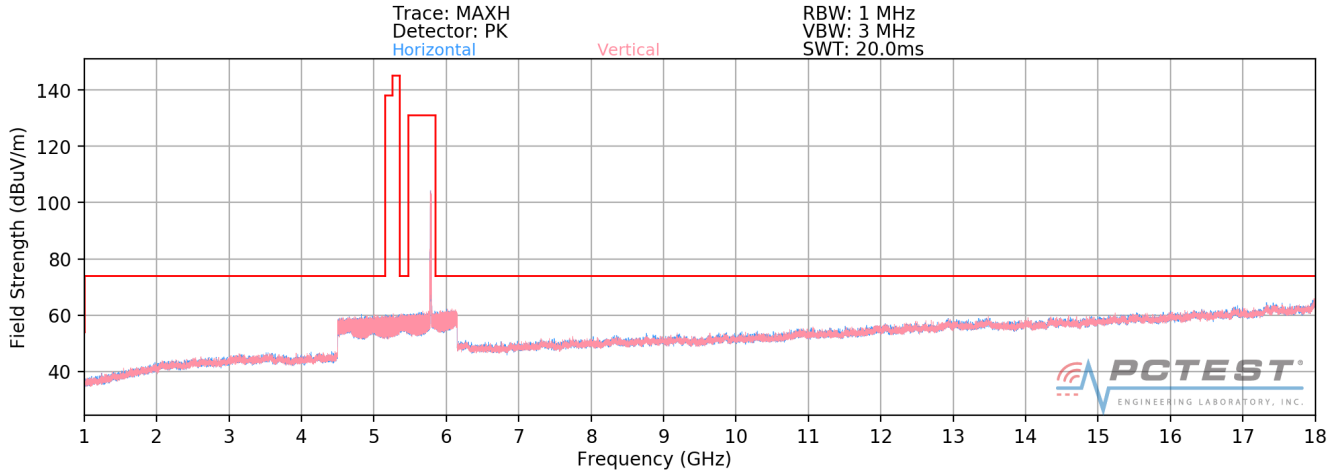


Plot 7-266. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11a – U3 Ch. 157)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 180 of 234	

SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

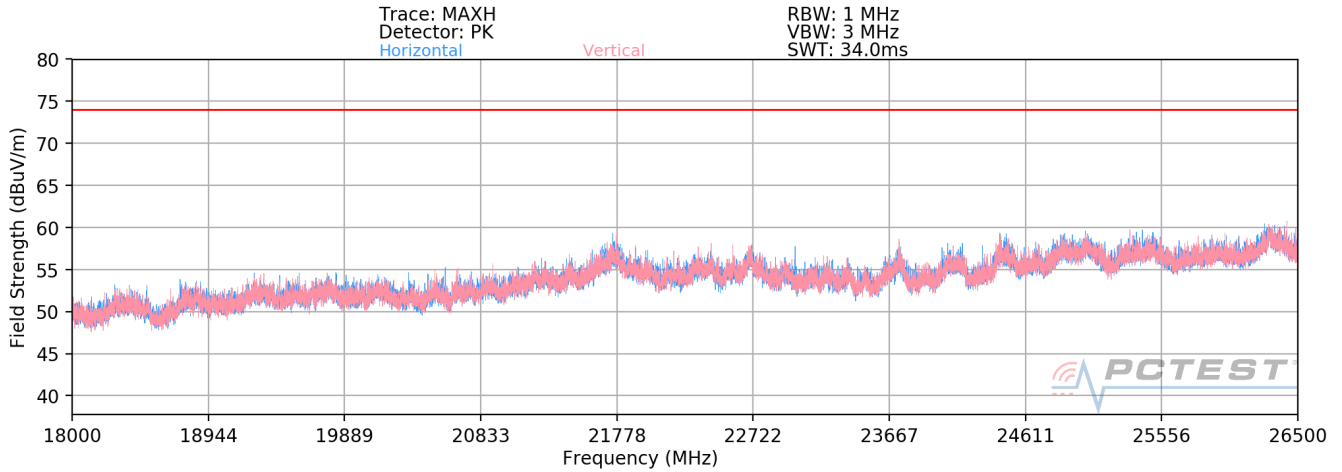

Plot 7-267. Radiated Spurious Plot above 18GHz - 26.5GHz SISO ANT2 (802.11a)

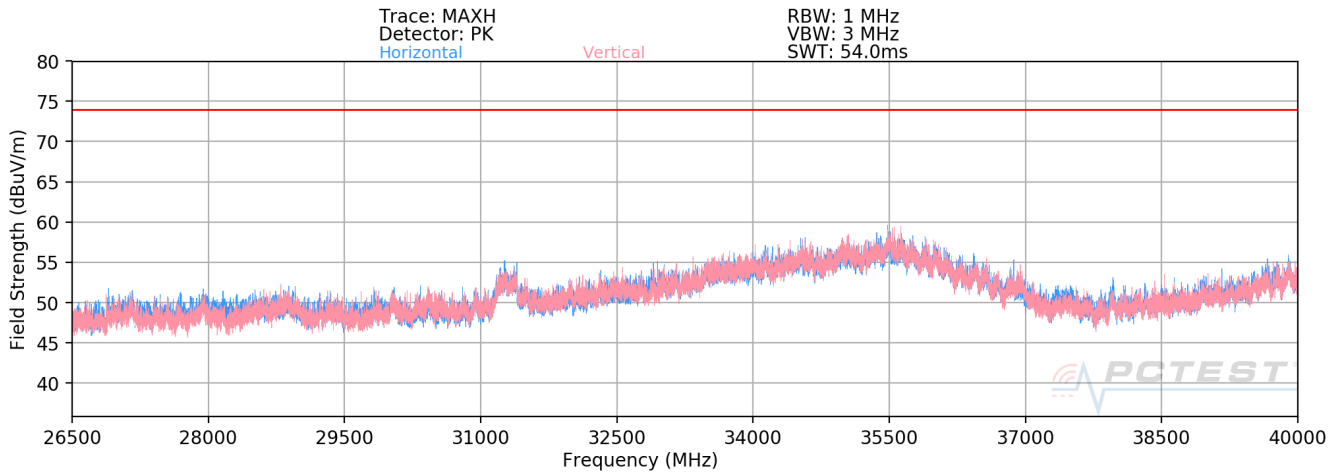

Plot 7-268. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT2 (802.11a)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 181 of 234	

SISO Antenna-2 Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	102	220	-61.26	15.23	0.00	60.97	68.20	-7.23
* 15540.00	Average	V	-	-	-81.15	22.71	0.00	48.56	53.98	-5.42
* 15540.00	Peak	V	-	-	-69.27	22.71	0.00	60.44	73.98	-13.54
* 20720.00	Average	H	-	-	-72.68	0.00	-9.54	24.78	53.98	-29.20
* 20720.00	Peak	H	-	-	-63.88	0.00	-9.54	33.58	73.98	-40.40
25900.00	Peak	H	-	-	-53.21	0.00	-9.54	44.25	68.20	-23.95

Table 7-39. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	101	221	-61.63	15.67	0.00	61.04	68.20	-7.16
* 15600.00	Average	V	-	-	-80.96	22.46	0.00	48.50	53.98	-5.48
* 15600.00	Peak	V	-	-	-69.15	22.46	0.00	60.31	73.98	-13.67
* 20800.00	Average	H	150	324	-73.01	0.00	-9.54	24.45	53.98	-29.53
* 20800.00	Peak	H	150	324	-63.22	0.00	-9.54	34.24	73.98	-39.74
26000.00	Peak	H	-	-	-54.91	0.00	-9.54	42.55	68.20	-25.65

Table 7-40. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 182 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	100	223	-64.37	15.49	0.00	58.12	68.20	-10.08
* 15720.00	Average	V	-	-	-81.04	22.45	0.00	48.41	53.98	-5.57
* 15720.00	Peak	V	-	-	-69.32	22.45	0.00	60.13	73.98	-13.85
* 20960.00	Average	H	-	-	-72.99	0.00	-9.54	24.47	53.98	-29.51
* 20960.00	Peak	H	-	-	-63.06	0.00	-9.54	34.40	73.98	-39.58
26200.00	Peak	H	-	-	-56.16	0.00	-9.54	41.30	68.20	-26.90

Table 7-41. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	100	228	-65.06	15.86	0.00	57.80	68.20	-10.40
* 15780.00	Average	V	-	-	-81.19	22.77	0.00	48.58	53.98	-5.40
* 15780.00	Peak	V	-	-	-69.56	22.77	0.00	60.21	73.98	-13.77
* 21040.00	Average	H	-	-	-72.45	8.82	-9.54	33.82	53.98	-20.16
* 21040.00	Peak	H	-	-	-62.77	8.82	-9.54	43.50	73.98	-30.48
26300.00	Peak	H	-	-	-53.33	11.42	-9.54	55.54	68.20	-12.66

Table 7-42. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 183 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	100	224	-65.76	15.70	0.00	56.94	68.20	-11.26
* 15840.00	Average	V	-	-	-81.25	22.66	0.00	48.41	53.98	-5.57
* 15840.00	Peak	V	-	-	-69.38	22.66	0.00	60.28	73.98	-13.70
* 21120.00	Average	H	-	-	-72.40	8.63	-9.54	33.68	53.98	-20.29
* 21120.00	Peak	H	-	-	-62.02	8.63	-9.54	44.06	73.98	-29.91
26400.00	Peak	H	-	-	-54.89	11.11	-9.54	53.68	68.20	-14.52

Table 7-43. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	104	229	-79.24	16.03	0.00	43.79	53.98	-10.19
* 10640.00	Peak	V	104	229	-66.72	16.03	0.00	56.31	73.98	-17.67
* 15960.00	Average	V	-	-	-81.48	23.09	0.00	48.61	53.98	-5.37
* 15960.00	Peak	V	-	-	-81.50	23.09	0.00	48.59	73.98	-25.39
* 21280.00	Average	H	150	270	-71.75	9.03	-9.54	34.74	53.98	-19.24
* 21280.00	Peak	H	150	270	-61.46	9.03	-9.54	45.03	73.98	-28.95
26600.00	Peak	H	-	-	-53.81	11.18	-9.54	54.83	68.20	-13.37

Table 7-44. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 184 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.05	16.51	0.00	43.46	53.98	-10.52
* 11000.00	Peak	V	-	-	-67.77	16.51	0.00	55.74	73.98	-18.24
16500.00	Peak	V	-	-	-69.33	24.17	0.00	61.84	68.20	-6.36
22000.00	Peak	V	150	325	-61.45	9.58	-9.54	45.58	53.98	-8.39
27500.00	Peak	V	-	-	-51.96	-5.56	-9.54	39.94	73.98	-34.04

Table 7-45. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	-	-	-80.21	16.73	0.00	43.52	53.98	-10.46
* 11200.00	Peak	V	-	-	-68.39	16.73	0.00	55.34	73.98	-18.64
16800.00	Peak	V	-	-	-69.51	24.00	0.00	61.49	68.20	-6.71
* 22400.00	Average	V	-	-	-71.63	10.49	-9.54	36.32	53.98	-17.66
* 22400.00	Peak	V	-	-	-60.63	10.49	-9.54	47.32	73.98	-26.66
28000.00	Peak	V	-	-	-53.62	-4.84	-9.54	39.00	68.20	-29.20

Table 7-46. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 185 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11400.00	Average	V	104	182	-78.83	17.67	0.00	45.84	53.98	-8.14
* 11400.00	Peak	V	104	182	-69.82	17.67	0.00	54.85	73.98	-19.13
17100.00	Peak	V	-	-	-71.25	24.82	0.00	60.57	68.20	-7.63
* 22800.00	Average	V	150	340	-72.22	9.97	-9.54	35.21	53.98	-18.77
* 22800.00	Peak	V	150	340	-62.00	9.97	-9.54	45.43	73.98	-28.55
28500.00	Peak	V	-	-	-52.47	-5.58	-9.54	39.40	68.20	-28.80

Table 7-47. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-81.09	17.63	0.00	43.54	53.98	-10.43
* 11490.00	Peak	V	-	-	-69.13	17.63	0.00	55.50	73.98	-18.47
17235.00	Peak	V	-	-	-70.12	25.01	0.00	61.89	68.20	-6.31
* 22980.00	Average	H	150	88	-73.00	0.80	-9.54	25.26	53.98	-28.72
* 22980.00	Peak	H	150	88	-63.34	0.80	-9.54	34.92	73.98	-39.06
28725.00	Peak	H	-	-	-53.12	-14.42	-9.54	29.92	68.20	-38.28

Table 7-48. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 186 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-80.69	17.35	0.00	43.66	53.98	-10.32
* 11570.00	Peak	H	-	-	-69.15	17.35	0.00	55.20	73.98	-18.78
17355.00	Peak	H	-	-	-70.07	26.08	0.00	63.01	68.20	-5.19
23140.00	Peak	H	-	-	-62.83	10.05	-9.54	44.68	68.20	-23.52
28925.00	Peak	H	-	-	-52.20	-5.11	-9.54	40.15	68.20	-28.05

Table 7-49. Radiated Measurements SISO ANT2


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-81.00	17.57	0.00	43.57	53.98	-10.40
* 11650.00	Peak	H	-	-	-69.12	17.57	0.00	55.45	73.98	-18.52
17475.00	Peak	H	-	-	-69.96	26.23	0.00	63.27	68.20	-4.93
23300.00	Peak	H	150	185	-62.85	9.39	-9.54	44.00	68.20	-24.20
29125.00	Peak	H	-	-	-51.94	-6.06	-9.54	39.46	68.20	-28.74


Table 7-50. Radiated Measurements SISO ANT2

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 187 of 234	


7.6.3 MIMO Radiated Spurious Emission Measurements

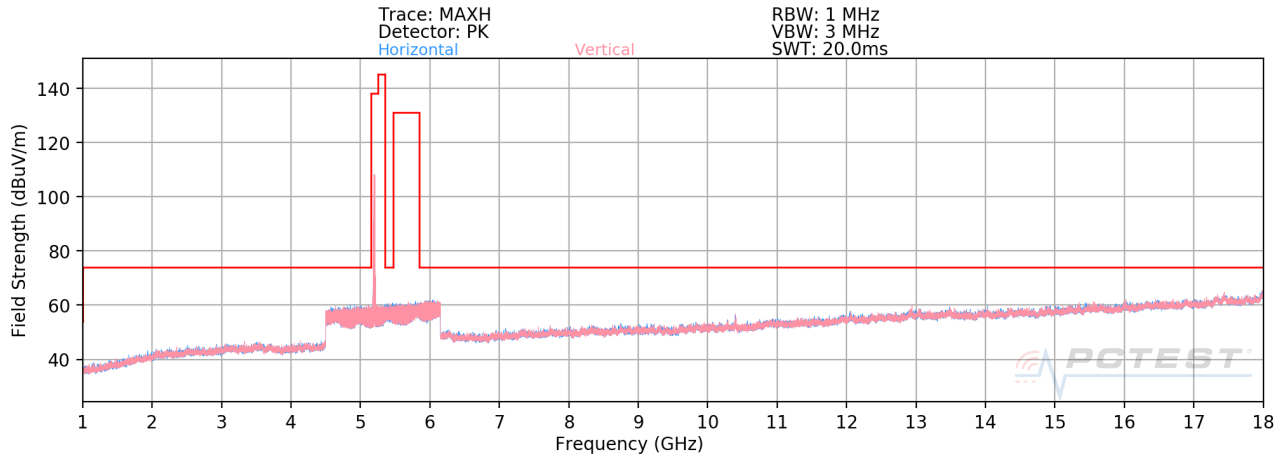

Plot 7-269. Radiated Spurious Plot above 1GHz MIMO (802.11a – U1 Ch. 40)

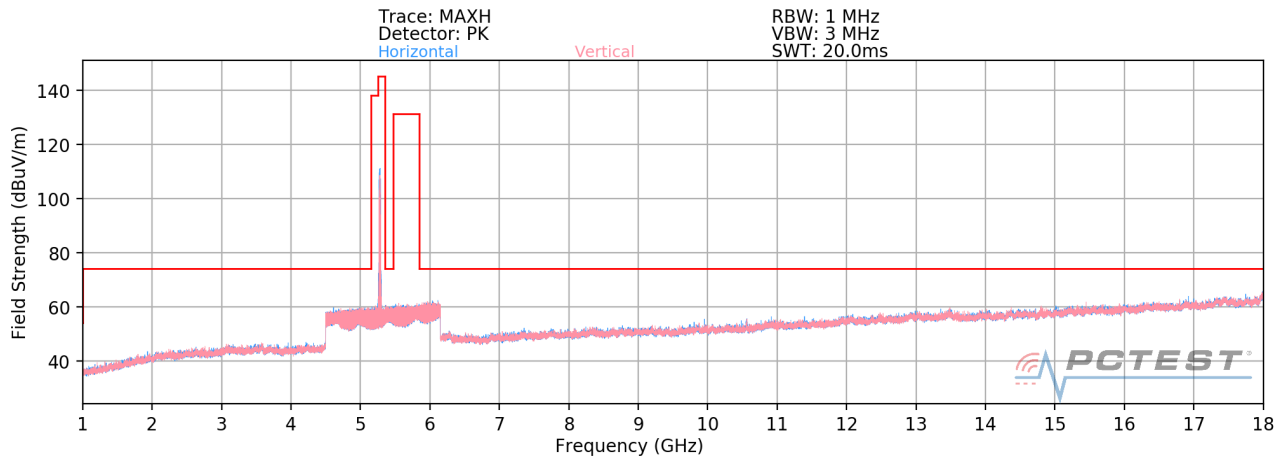


Plot 7-270. Radiated Spurious Plot above 1GHz MIMO (802.11a – U2A Ch. 56)

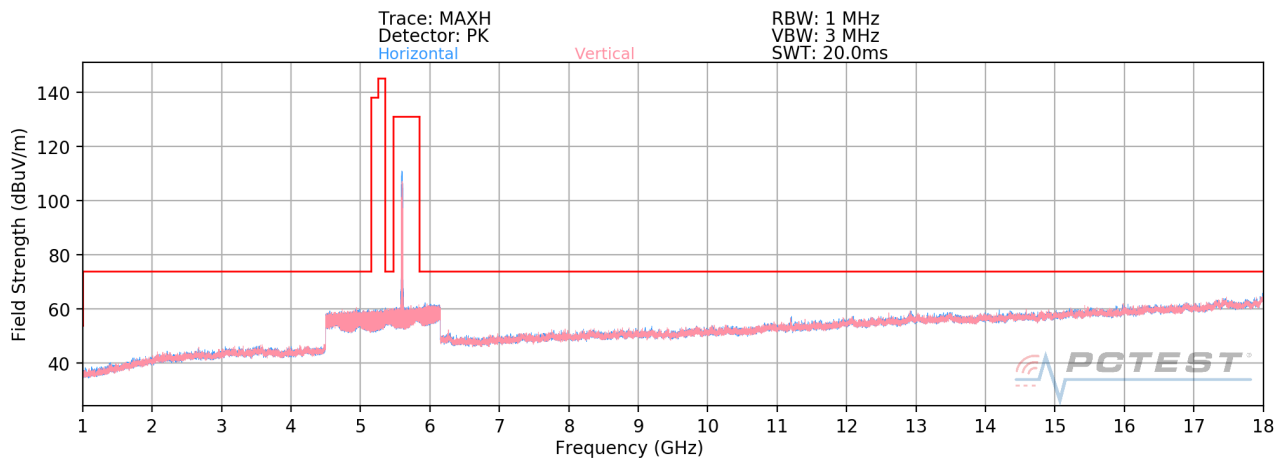

Plot 7-271. Radiated Spurious Plot above 1GHz MIMO (802.11a – U2C Ch. 116120)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 188 of 234

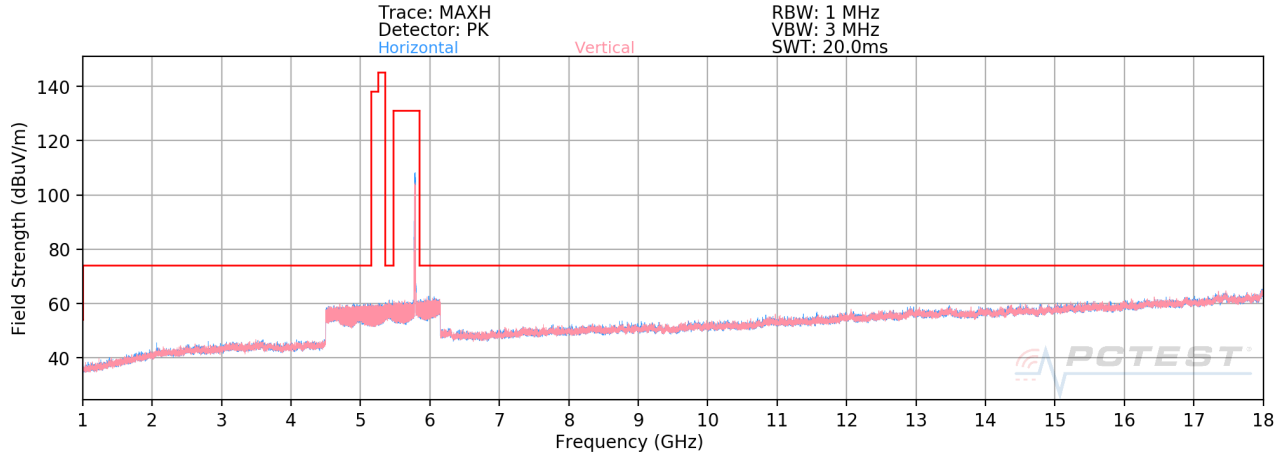

Plot 7-272. Radiated Spurious Plot above 1GHz MIMO (802.11a – U3 Ch. 157)

FCC ID: ZNFV600AM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 189 of 234

MIMO Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	101	227	-57.19	15.23	0.00	65.04	68.20	-3.16
* 15540.00	Average	V	-	-	-81.21	22.71	0.00	48.50	53.98	-5.48
* 15540.00	Peak	V	-	-	-69.89	22.71	0.00	59.82	73.98	-14.16
* 20720.00	Average	H	150	65	-72.54	0.00	-9.54	24.92	53.98	-29.06
* 20720.00	Peak	H	150	65	-61.15	0.00	-9.54	36.31	73.98	-37.67
25900.00	Peak	H	-	-	-60.47	0.00	-9.54	36.99	68.20	-31.21

Table 7-51. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	101	224	-57.58	15.67	0.00	65.09	68.20	-3.11
* 15600.00	Average	V	-	-	-81.06	22.46	0.00	48.40	53.98	-5.58
* 15600.00	Peak	V	-	-	-69.40	22.46	0.00	60.06	73.98	-13.92
* 20800.00	Average	H	-	-	-72.55	0.00	-9.54	24.91	53.98	-29.07
* 20800.00	Peak	H	-	-	-63.28	0.00	-9.54	34.18	73.98	-39.80
26000.00	Peak	H	-	-	-60.83	0.00	-9.54	36.63	68.20	-31.57

Table 7-52. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 190 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	100	228	-60.12	15.49	0.00	62.37	68.20	-5.83
* 15720.00	Average	V	-	-	-81.05	22.45	0.00	48.40	53.98	-5.58
* 15720.00	Peak	V	-	-	-69.22	22.45	0.00	60.23	73.98	-13.75
* 20960.00	Average	H	150	315	-72.46	0.00	-9.54	25.00	53.98	-28.98
* 20960.00	Peak	H	150	315	-61.79	0.00	-9.54	35.67	73.98	-38.31
26200.00	Peak	H	-	-	-60.37	0.00	-9.54	37.09	68.20	-31.11

Table 7-53. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	101	226	-61.48	15.86	0.00	61.38	68.20	-6.82
* 15780.00	Average	V	-	-	-81.24	22.77	0.00	48.53	53.98	-5.45
* 15780.00	Peak	V	-	-	-69.62	22.77	0.00	60.15	73.98	-13.83
* 21040.00	Average	H	150	315	-71.17	8.82	-9.54	35.10	53.98	-18.88
* 21040.00	Peak	H	150	315	-61.50	8.82	-9.54	44.77	73.98	-29.21
26300.00	Peak	H	-	-	-60.06	11.42	-9.54	48.81	68.20	-19.39

Table 7-54. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 191 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10560.00	Peak	V	109	228	-61.77	15.70	0.00	60.93	68.20	-7.27
* 15840.00	Average	V	-	-	-81.31	22.66	0.00	48.35	53.98	-5.63
* 15840.00	Peak	V	-	-	-69.73	22.66	0.00	59.93	73.98	-14.05
* 21120.00	Average	H	150	313	-70.80	8.63	-9.54	35.28	53.98	-18.69
* 21120.00	Peak	H	150	313	-59.97	8.63	-9.54	46.11	73.98	-27.86
26400.00	Peak	H	-	-	-60.61	11.11	-9.54	47.96	68.20	-20.24

Table 7-55. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	101	233	-77.43	16.03	0.00	45.60	53.98	-8.38
* 10640.00	Peak	V	101	233	-64.38	16.03	0.00	58.65	73.98	-15.33
* 15960.00	Average	V	-	-	-81.53	23.09	0.00	48.56	53.98	-5.42
* 15960.00	Peak	V	-	-	-69.60	23.09	0.00	60.49	73.98	-13.49
* 21280.00	Average	H	150	314	-70.40	9.03	-9.54	36.09	53.98	-17.89
* 21280.00	Peak	H	150	314	-60.38	9.03	-9.54	46.11	73.98	-27.87
26600.00	Peak	H	-	-	-54.91	11.18	-9.54	53.73	68.20	-14.47

Table 7-56. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 192 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.20	16.51	0.00	43.31	53.98	-10.67
* 11000.00	Peak	V	-	-	-68.29	16.51	0.00	55.22	73.98	-18.76
16500.00	Peak	V	-	-	-69.44	24.17	0.00	61.73	68.20	-6.47
22000.00	Peak	H	150	314	-60.62	9.58	-9.54	46.41	68.20	-21.79
27500.00	Peak	H	-	-	-53.19	-5.56	-9.54	38.71	68.20	-29.49

Table 7-57. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	-	-	-80.40	16.73	0.00	43.33	53.98	-10.65
* 11200.00	Peak	V	-	-	-68.41	16.73	0.00	55.32	73.98	-18.66
16800.00	Peak	V	-	-	-70.29	24.00	0.00	60.71	68.20	-7.49
* 22400.00	Average	H	150	314	-71.71	10.49	-9.54	36.24	53.98	-17.74
* 22400.00	Peak	H	150	314	-61.70	10.49	-9.54	46.25	73.98	-27.73
28000.00	Peak	H	-	-	-52.98	-4.84	-9.54	39.64	68.20	-28.56

Table 7-58. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 193 of 234	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	Average	V	-	-	-81.12	17.67	0.00	43.55	53.98	-10.43
* 11400.00	Peak	V	-	-	-69.69	17.67	0.00	54.98	73.98	-19.00
17100.00	Peak	V	-	-	-69.85	24.82	0.00	61.97	68.20	-6.23
* 22800.00	Average	H	-	-	-72.02	9.97	-9.54	35.41	53.98	-18.57
* 22800.00	Peak	H	-	-	-62.89	9.97	-9.54	44.54	73.98	-29.44
28500.00	Peak	H	-	-	-52.29	-5.58	-9.54	39.58	68.20	-28.62

Table 7-59. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-81.05	17.63	0.00	43.58	53.98	-10.39
* 11490.00	Peak	V	-	-	-69.57	17.63	0.00	55.06	73.98	-18.91
17235.00	Peak	V	-	-	-70.45	25.01	0.00	61.56	68.20	-6.64
* 22980.00	Average	H	-	-	-73.16	0.80	-9.54	25.10	53.98	-28.88
* 22980.00	Peak	H	-	-	-62.34	0.80	-9.54	35.92	73.98	-38.06
28725.00	Peak	H	-	-	-52.83	-14.42	-9.54	30.21	68.20	-37.99

Table 7-60. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 194 of 234	

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.60	17.35	0.00	43.75	53.98	-10.23
* 11570.00	Peak	V	-	-	-69.28	17.35	0.00	55.07	73.98	-18.91
17355.00	Peak	V	-	-	-70.43	26.08	0.00	62.65	68.20	-5.55
23140.00	Peak	H	-	-	-62.66	10.05	-9.54	44.85	68.20	-23.35
28925.00	Peak	H	-	-	-53.64	-5.11	-9.54	38.71	68.20	-29.49

Table 7-61. Radiated Measurements MIMO


Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-80.94	17.57	0.00	43.63	53.98	-10.34
* 11650.00	Peak	V	-	-	-69.30	17.57	0.00	55.27	73.98	-18.70
17475.00	Peak	V	-	-	-70.27	26.23	0.00	62.96	68.20	-5.24
23300.00	Peak	H	-	-	-61.27	9.39	-9.54	45.58	68.20	-22.62
29125.00	Peak	H	-	-	-52.09	-6.06	-9.54	39.31	68.20	-28.89


Table 7-62. Radiated Measurements MIMO

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 195 of 234	

MIMO Radiated Spurious Emissions Measurements (Above 18GHz)

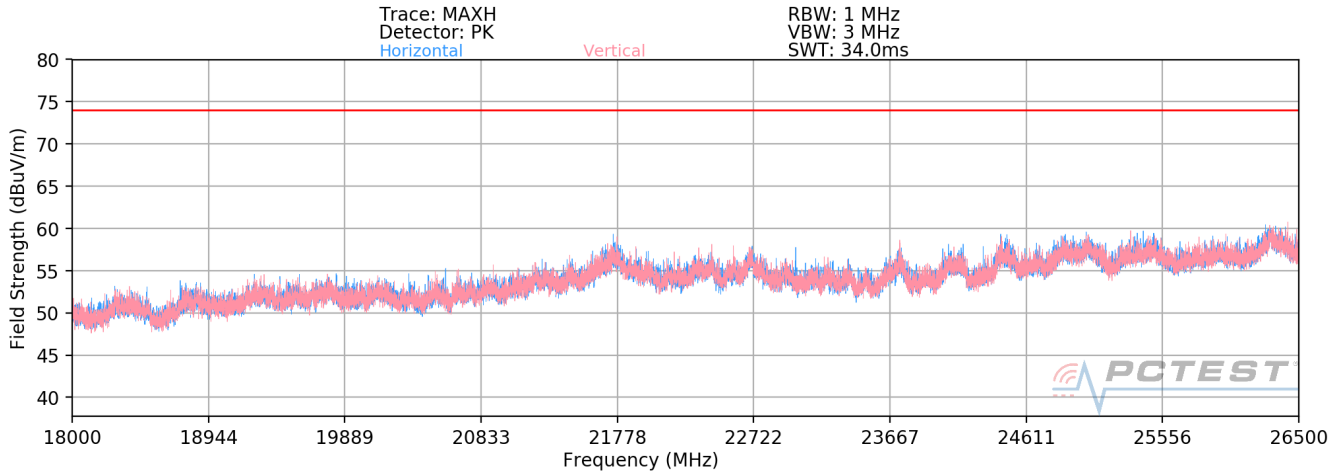

Plot 7-273. Radiated Spurious Plot above 18GHz - 26.5GHz MIMO (802.11a)

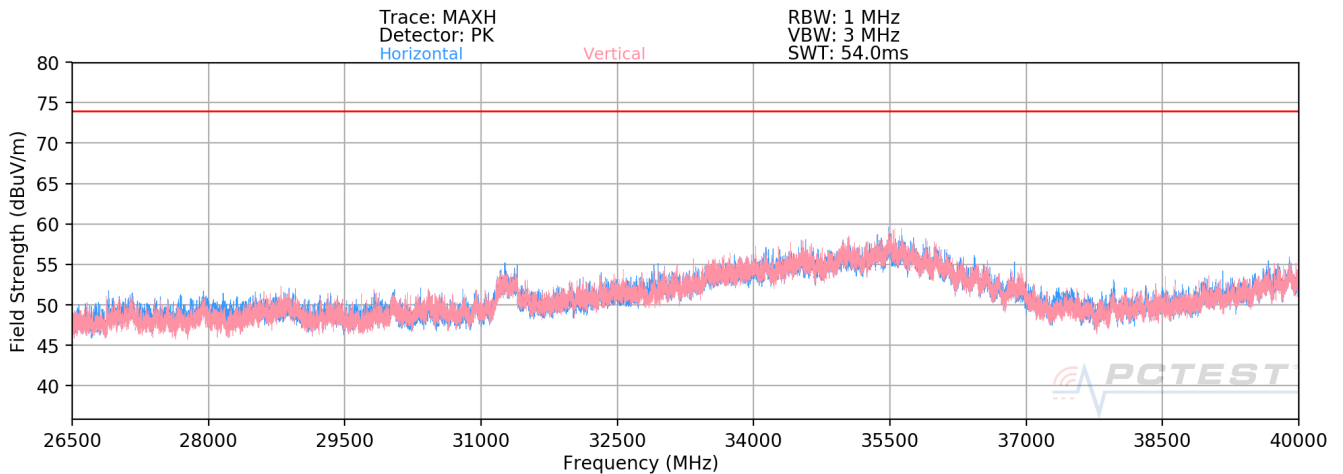

Plot 7-274. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11a)


FCC ID: ZNFV600AM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 196 of 234	

7.6.4 Simultaneous Tx Radiated Spurious Emissions Measurements


§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1	36
Operating Frequency (MHz)	2412	5180
Data Rate (Mbps)	1	MCS0
Mode	802.11b	802.11n

Table 7-63. Simultaneous Transmission Config-1

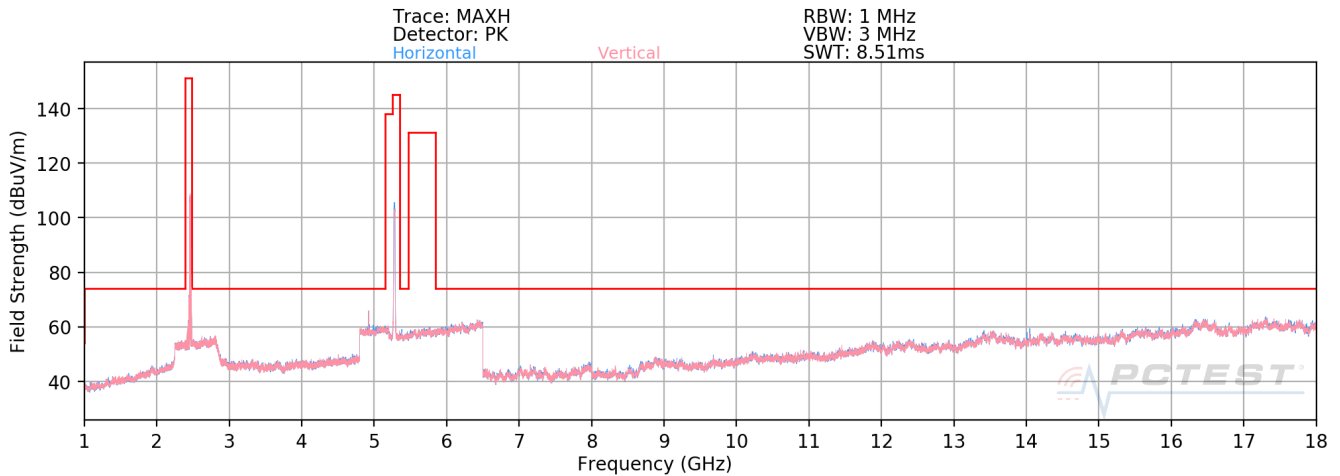


Plot 7-275. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)

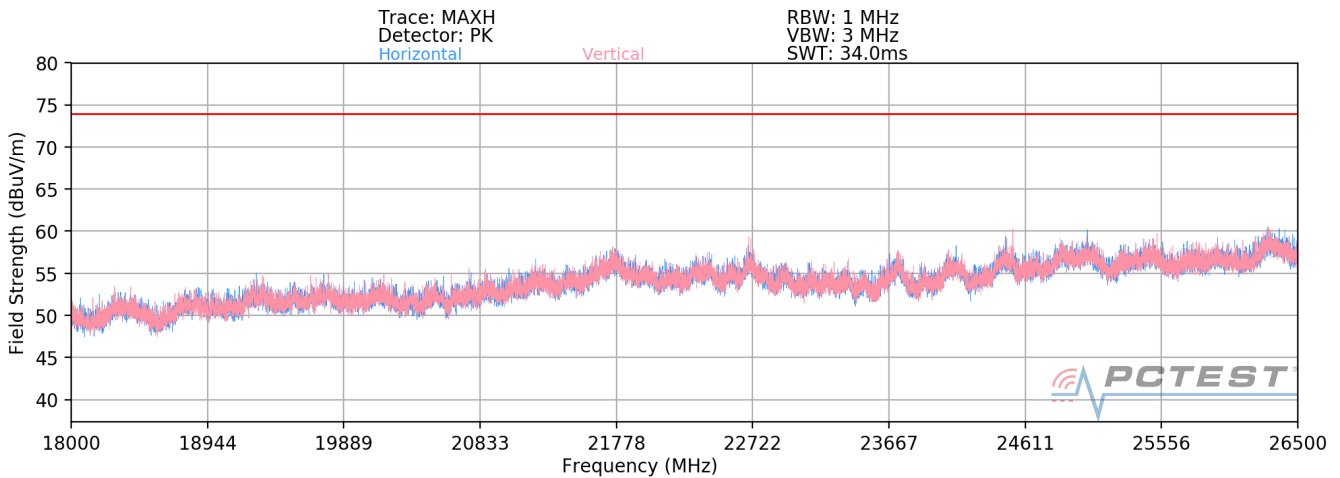

Plot 7-276. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 197 of 234

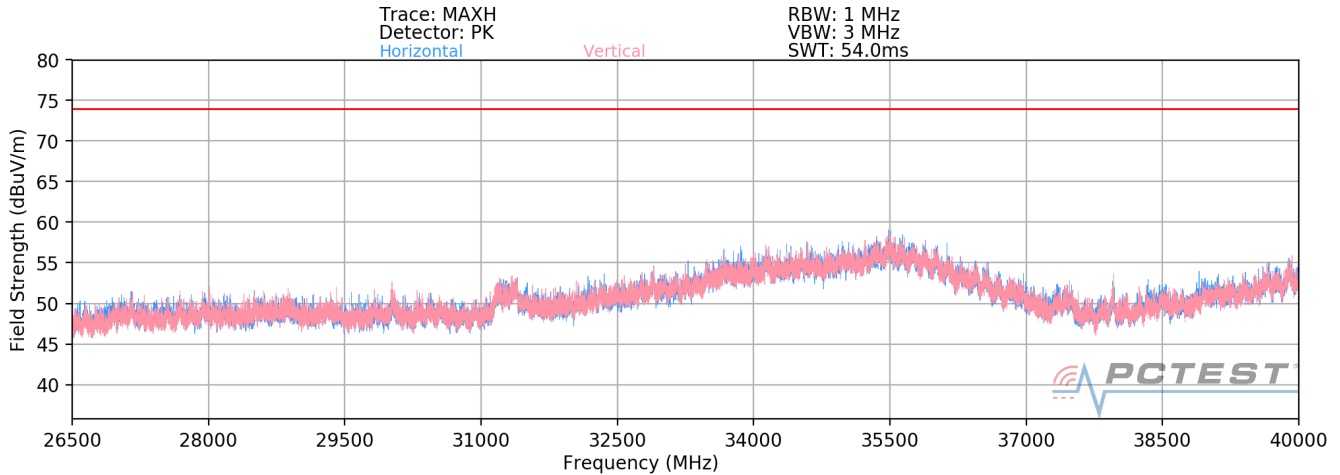

Plot 7-277. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
356.00	Peak	H	154	264	-62.17	-12.51	32.32	68.20	-35.88
3174.00	Peak	H	-	-	-69.29	7.24	44.95	73.98	-29.03
5992.00	Peak	H	-	-	-71.54	35.39	70.85	73.98	-3.13
* 8098.00	Peak	H	-	-	-74.33	16.05	48.72	73.98	-25.26
* 8098.00	Average	H	-	-	-84.28	16.05	38.77	53.98	-15.21
8810.00	Peak	H	-	-	-72.14	16.57	51.43	73.98	-22.55
* 10916.00	Peak	H	-	-	-74.19	21.12	53.93	73.98	-20.05
* 10916.00	Average	H	-	-	-84.96	21.12	43.16	53.98	-10.82
13734.00	Peak	H	-	-	-74.11	24.81	57.70	73.98	-16.28
16552.00	Peak	H	-	-	-75.03	28.24	60.21	73.98	-13.77

Table 7-64. Radiated Measurements (ANT1 2.4GHz – ANT2 5GHz)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 198 of 234	


Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	1	36
Operating Frequency (MHz)	2412	5180
Data Rate (Mbps)	1	MCS0
Mode	802.11b	802.11n

Table 7-65. Simultaneous Transmission Config-2

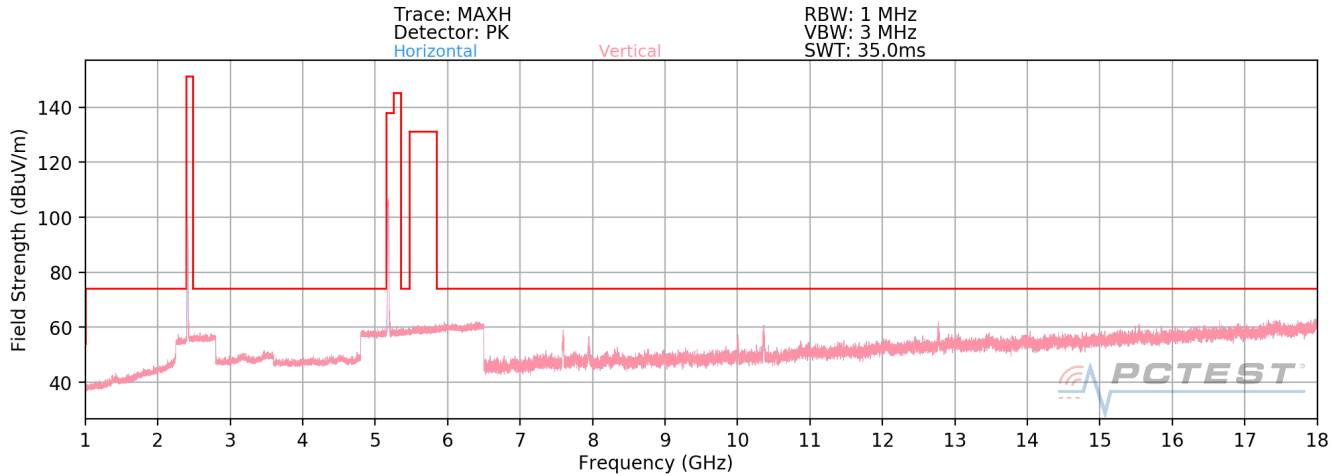


Plot 7-278. Radiated Spurious Plot above 1GHz (5GHz – 2.4 GHz)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 199 of 234	

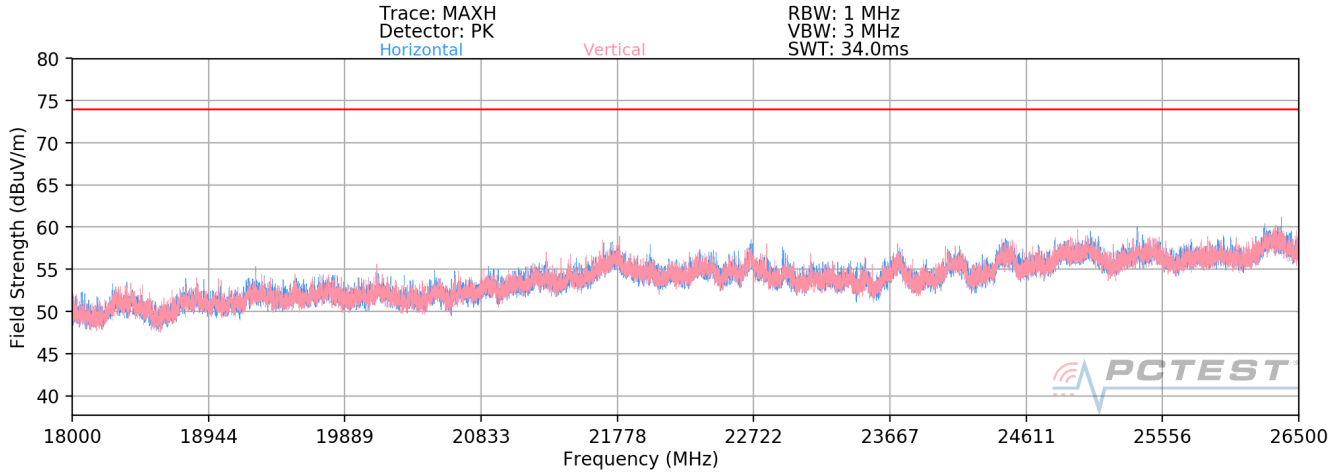

Plot 7-279. Radiated Spurious Plot 18GHz – 26.5GHz (5GHz – 2.4 GHz)

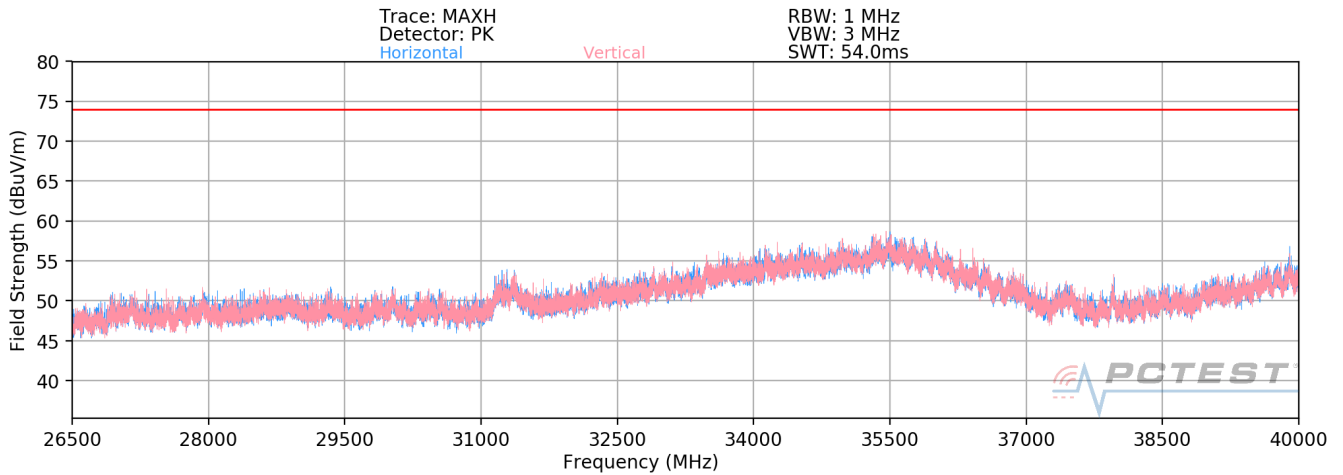

Plot 7-280. Radiated Spurious Plot above 26.5GHz (5GHz – 2.4 GHz)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 200 of 234


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
356.00	Peak	H	-	-	-96.82	-12.51	-2.33	68.20	-70.53
3124.00	Peak	H	-	-	-66.21	5.23	46.02	68.20	-22.18
5892.00	Peak	H	-	-	-68.04	8.58	47.54	68.20	-20.66
7948.00	Peak	H	-	-	-70.21	12.89	49.68	68.20	-18.52
8660.00	Peak	H	-	-	-70.14	13.20	50.06	68.20	-18.14
10716.00	Average	H	-	-	-81.56	16.74	42.18	53.98	-11.80
10716.00	Peak	H	-	-	-71.49	16.74	52.25	73.98	-21.73
13484.00	Peak	H	-	-	-70.04	20.51	57.47	68.20	-10.73
16252.00	Peak	H	-	-	-70.12	23.51	60.39	68.20	-7.81

Table 7-66. Radiated Measurements (ANT1 5GHz – ANT2 2.4GHz)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 201 of 234	


Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	1	36
Operating Frequency (MHz)	2412	5180
Data Rate (Mbps)	MCS8	MCS8
Mode	802.11n	802.11n

Table 7-67. Dual Band Simultaneous Transmission

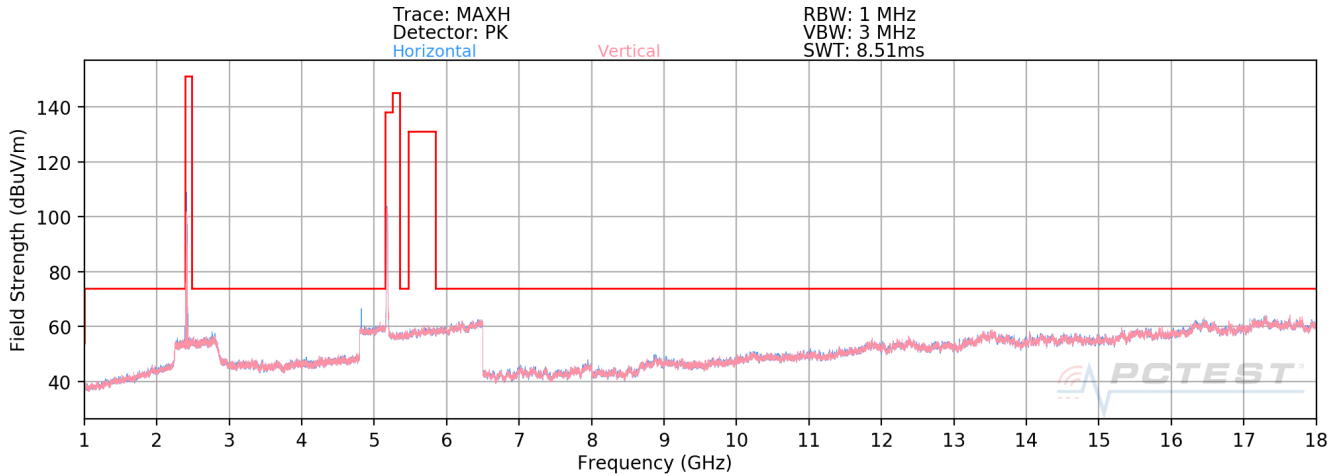


Plot 7-281. Radiated Spurious Plot above 1GHz (Dual Band Simult. Tx)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 202 of 234

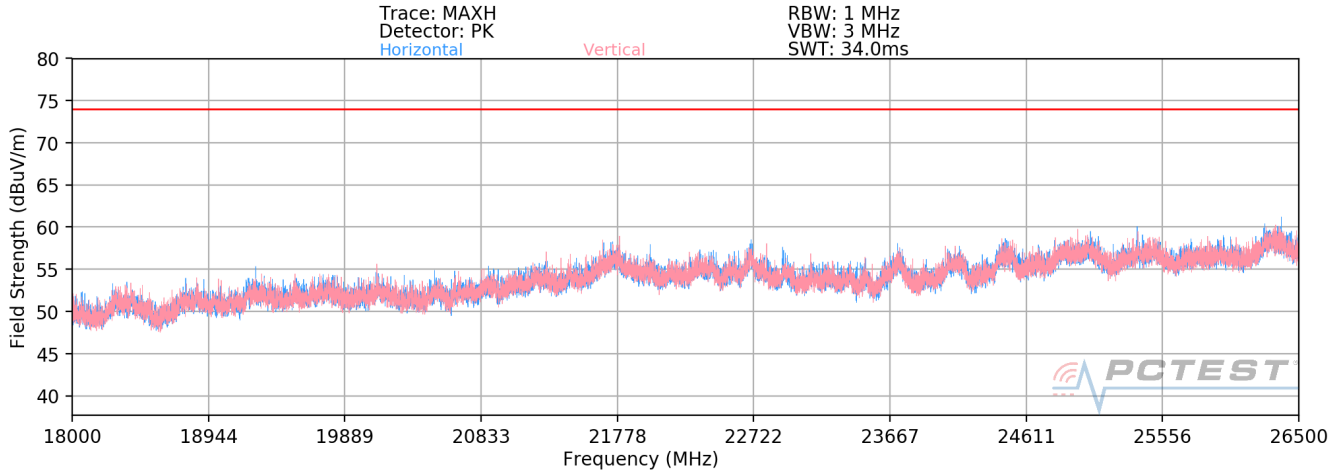

Plot 7-282. Radiated Spurious Plot 18GHz – 26.5GHz (Dual Band Simult. Tx)

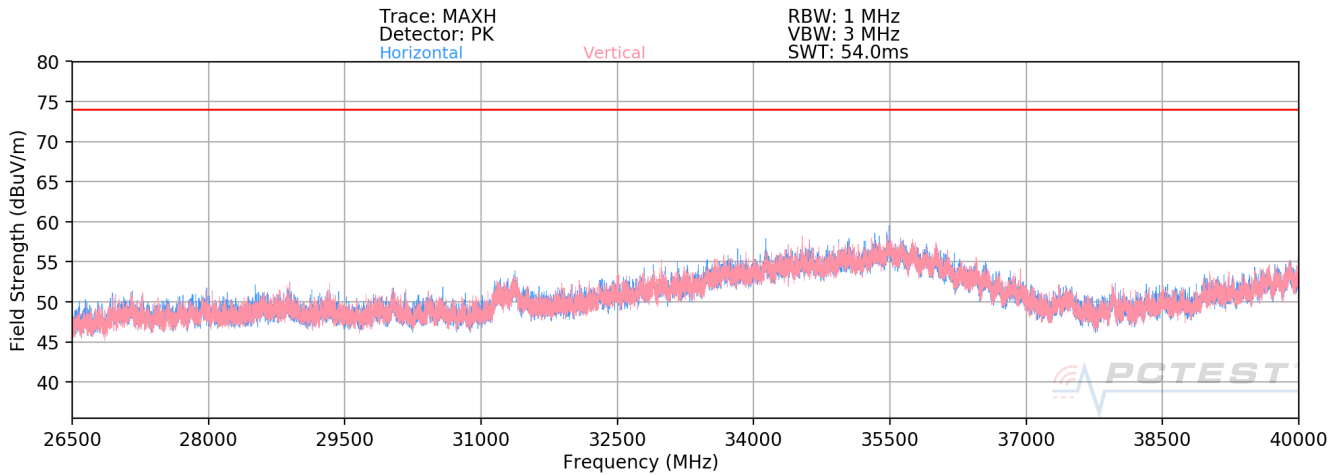

Plot 7-283. Radiated Spurious Plot above 26.5GHz (Dual Band Simult. Tx)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 203 of 234


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
356.00	Peak	H	-	-	-95.41	-12.51	-0.92	68.20	-69.12
3124.00	Peak	H	-	-	-65.98	5.23	46.25	68.20	-21.95
5892.00	Peak	H	-	-	-68.36	8.58	47.22	68.20	-20.98
7948.00	Peak	H	-	-	-71.01	12.89	48.88	68.20	-19.32
8660.00	Peak	H	-	-	-70.22	13.20	49.98	68.20	-18.22
10716.00	Average	H	-	-	-82.01	16.74	41.73	53.98	-12.25
10716.00	Peak	H	-	-	-70.14	16.74	53.60	73.98	-20.38
13484.00	Peak	H	-	-	-72.22	20.51	55.29	68.20	-12.91
16252.00	Peak	H	-	-	-71.08	23.51	59.43	68.20	-8.77

Table 7-68. Radiated Measurements (Dual Band Simult. Tx)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 204 of 234	

7.6.5 SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

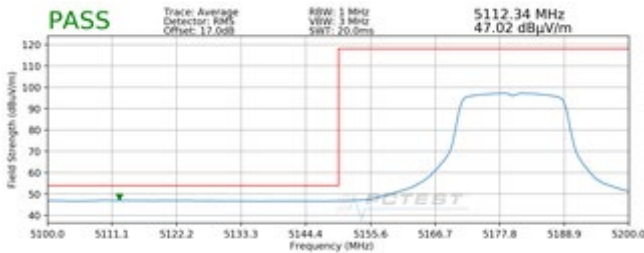


Plot 7-284. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

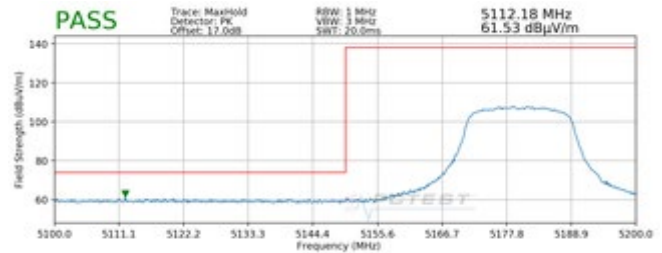


Plot 7-285. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

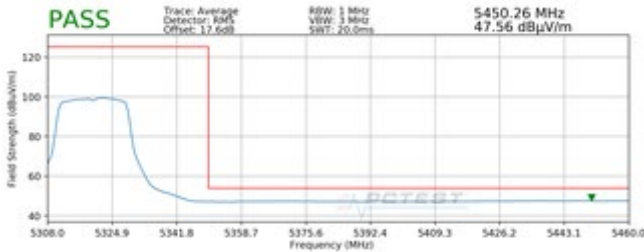


Plot 7-286. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

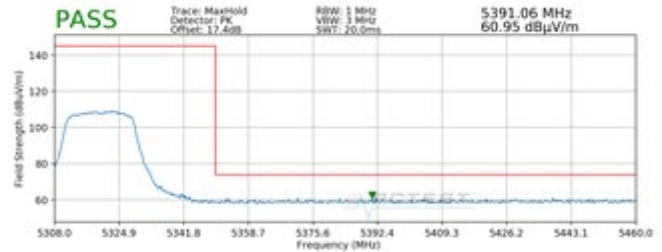


Plot 7-287. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 205 of 234

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

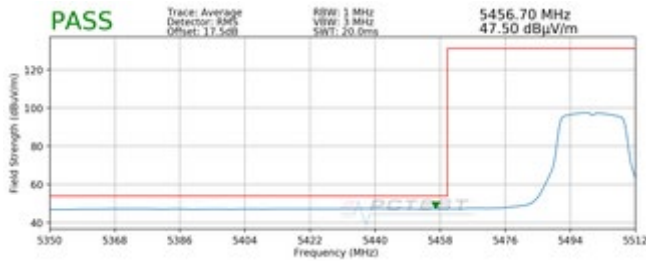


Plot 7-288. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

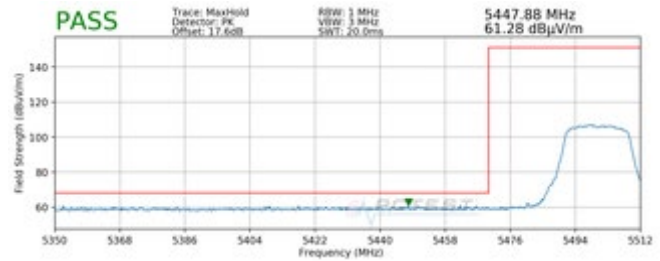

Plot 7-289. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

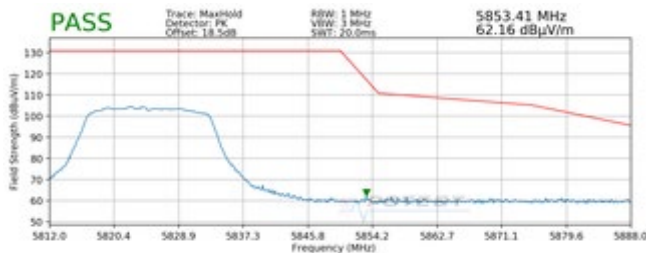


Plot 7-290. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 206 of 234

7.6.6 SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

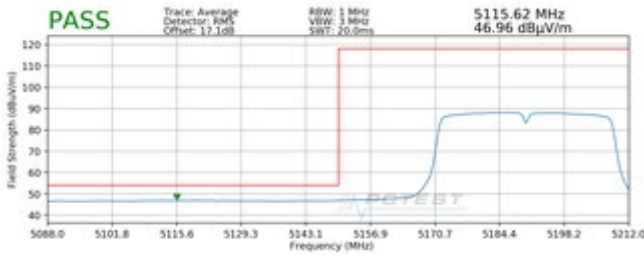


Plot 7-291. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

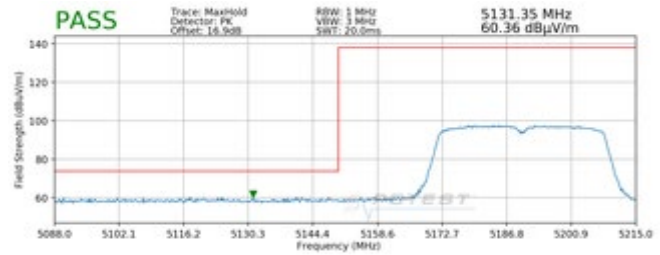


Plot 7-292. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

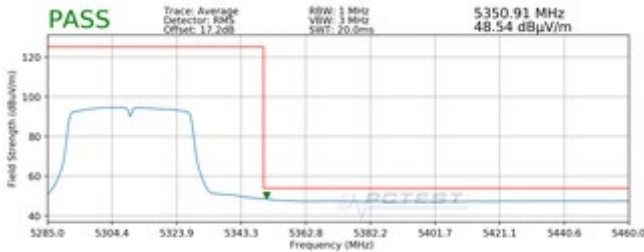


Plot 7-293. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

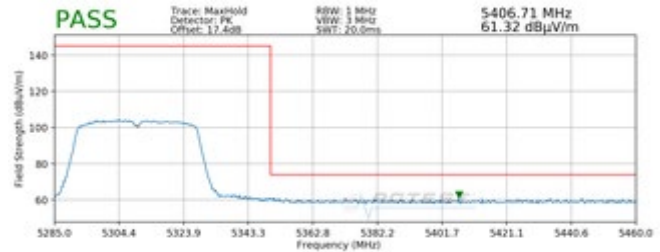


Plot 7-294. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 207 of 234

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

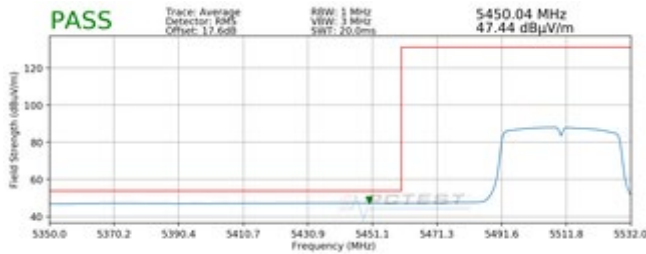


Plot 7-295. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

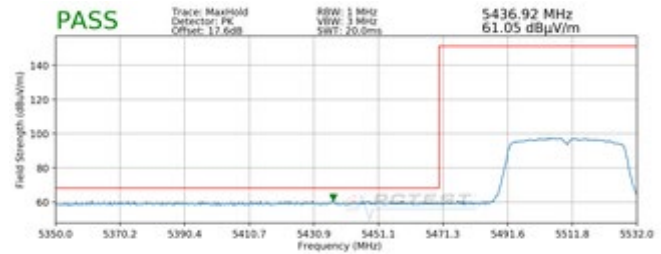

Plot 7-296. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

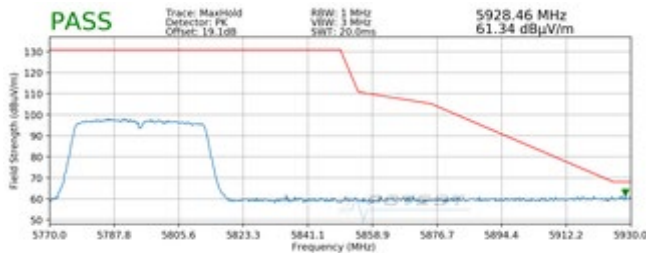


Plot 7-297. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 208 of 234

7.6.7 SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

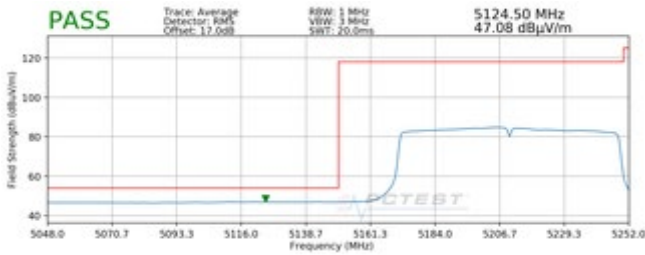


Plot 7-298. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

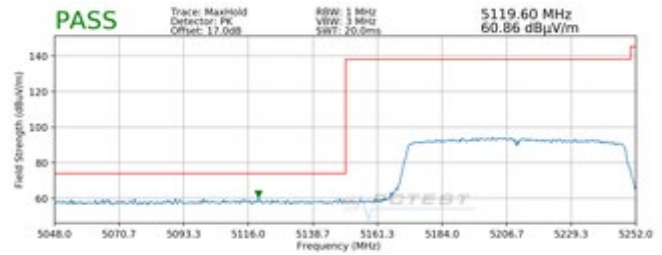


Plot 7-299. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

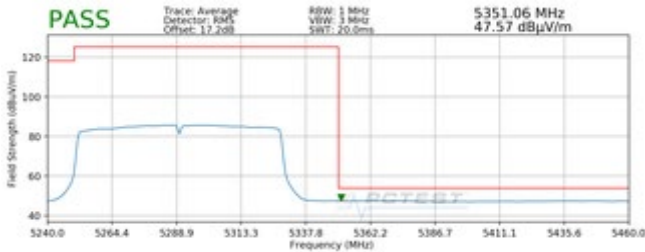


Plot 7-300. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

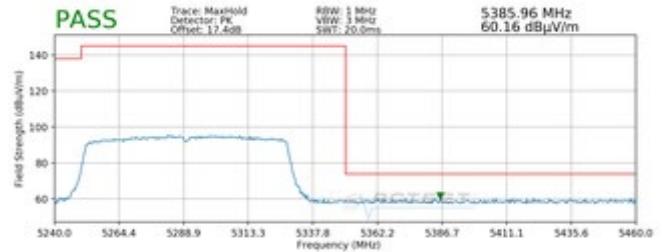


Plot 7-301. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 209 of 234

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

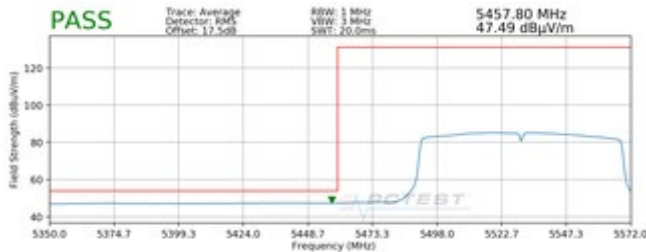


Plot 7-302. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

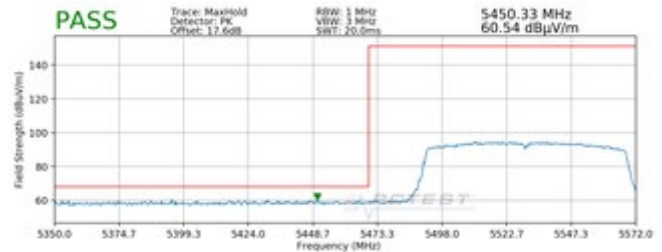

Plot 7-303. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

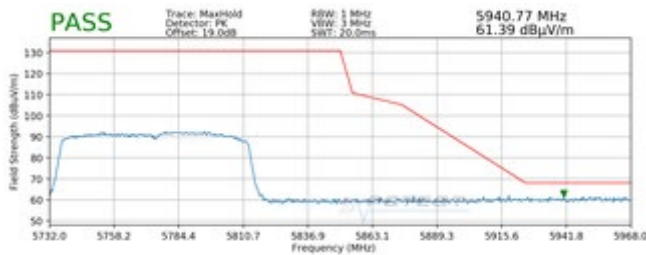


Plot 7-304. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 210 of 234

7.6.8 SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

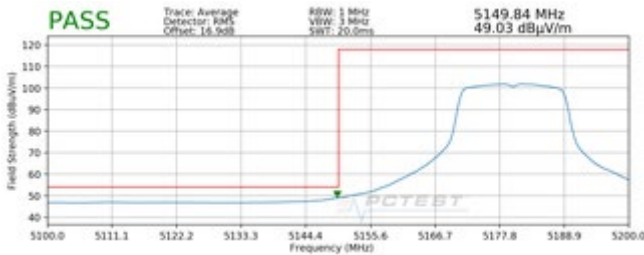


Plot 7-305. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

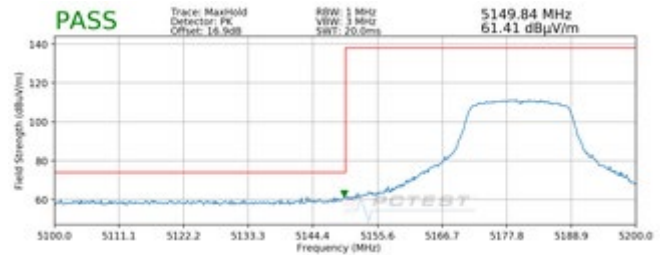


Plot 7-306. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

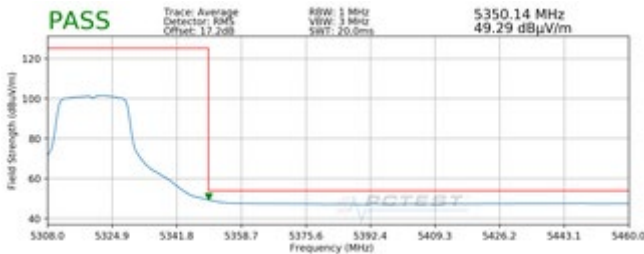


Plot 7-307. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

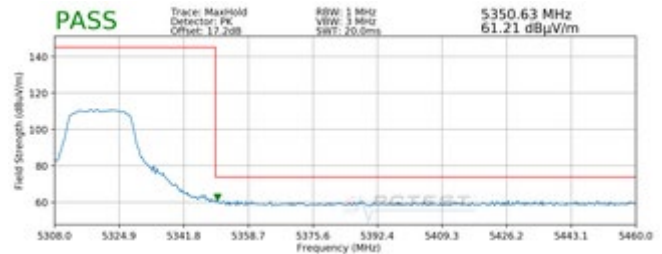


Plot 7-308. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 211 of 234

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

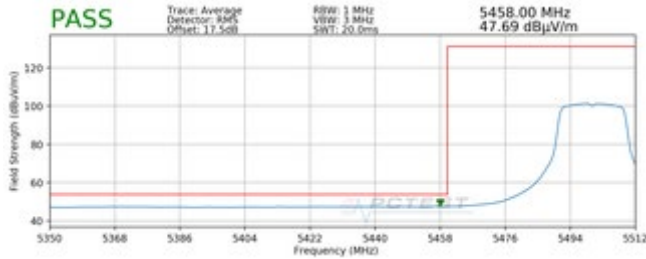


Plot 7-309. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

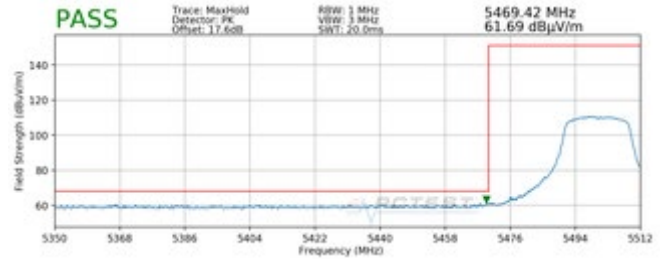

Plot 7-310. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

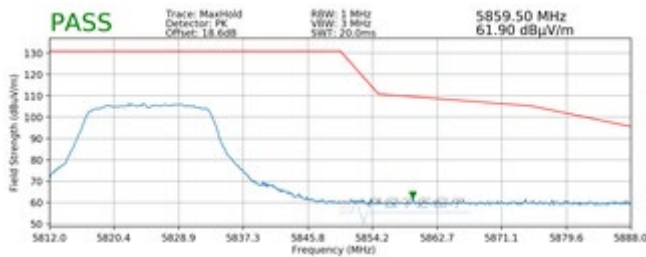


Plot 7-311. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 212 of 234

7.6.9 SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

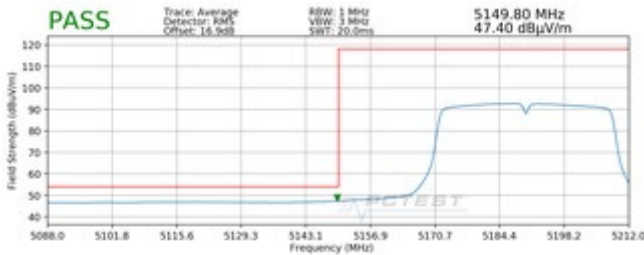


Plot 7-312. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

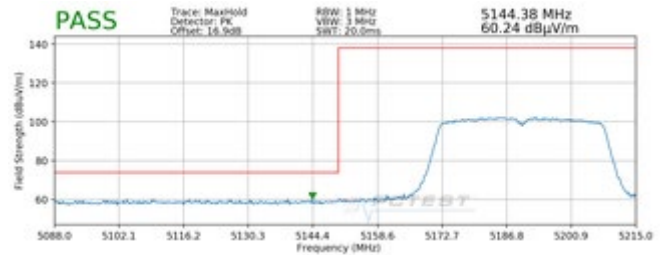


Plot 7-313. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

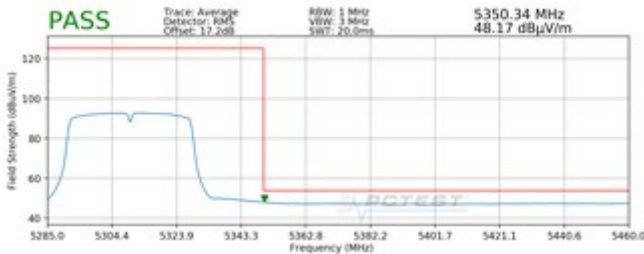


Plot 7-314. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

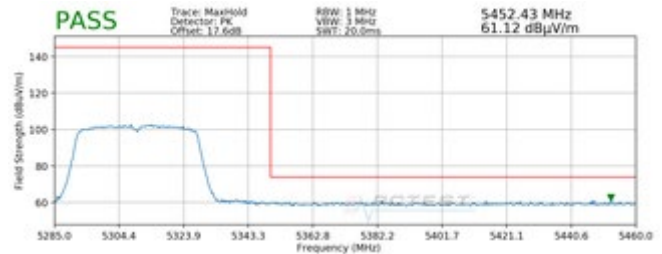


Plot 7-315. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 213 of 234

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

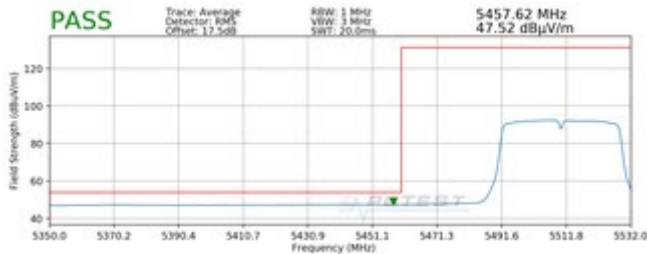


Plot 7-316. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

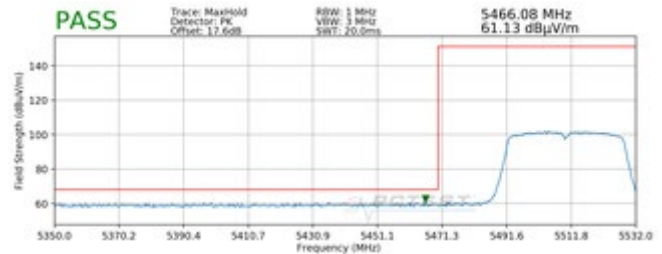

Plot 7-317. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

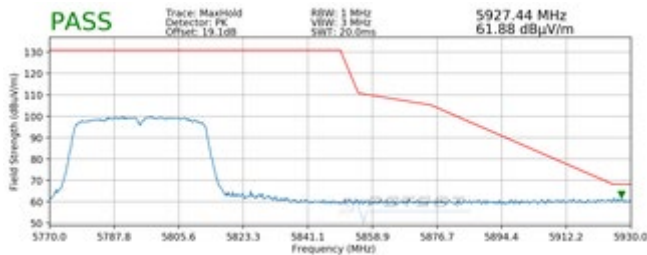


Plot 7-318. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 214 of 234

7.6.10 SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

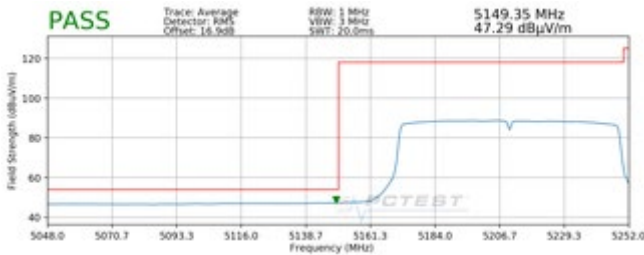


Plot 7-319. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

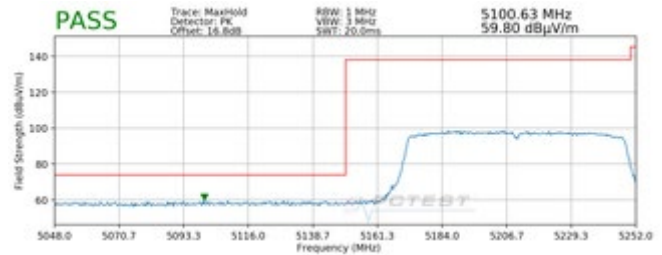


Plot 7-320. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

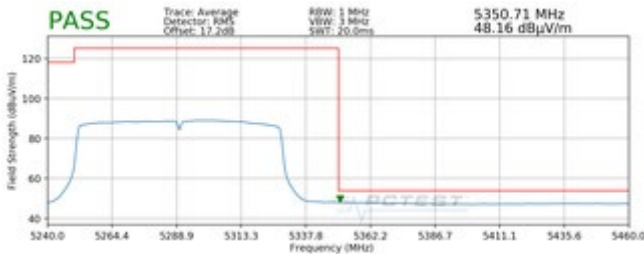


Plot 7-321. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

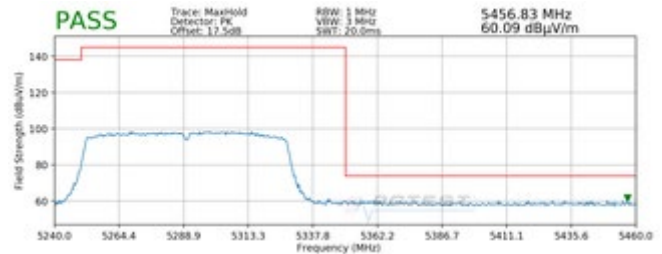


Plot 7-322. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 215 of 234

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

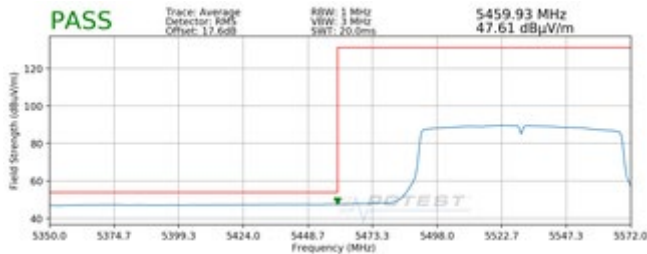


Plot 7-323. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

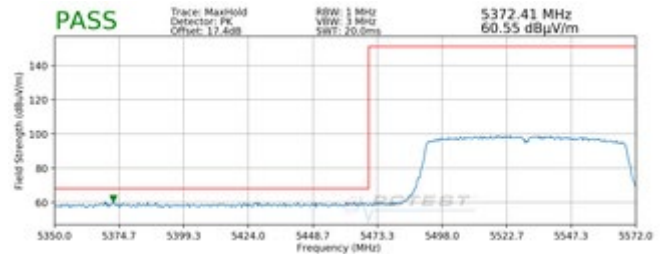

Plot 7-324. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

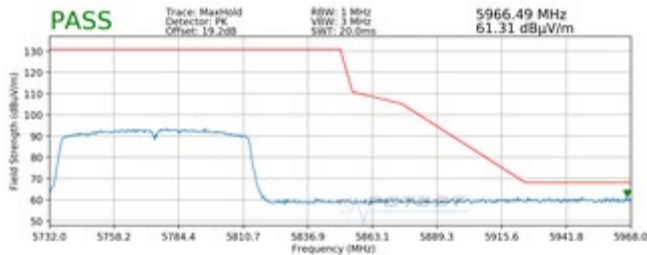


Plot 7-325. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 216 of 234

7.6.11 MIMO/CDD Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

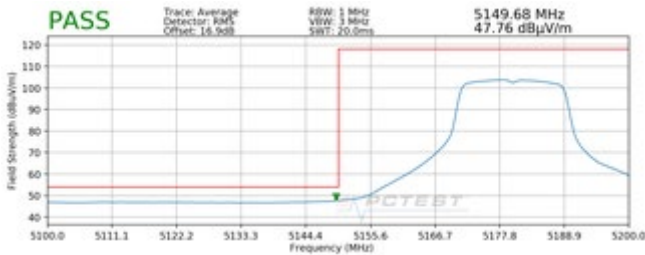


Plot 7-326. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

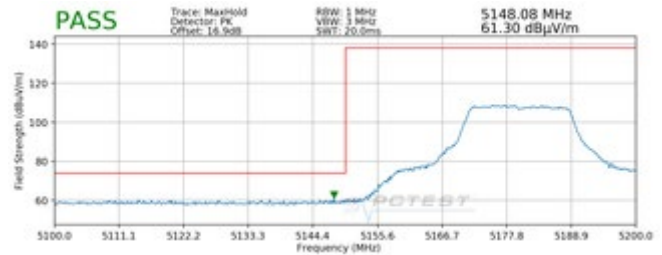


Plot 7-327. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

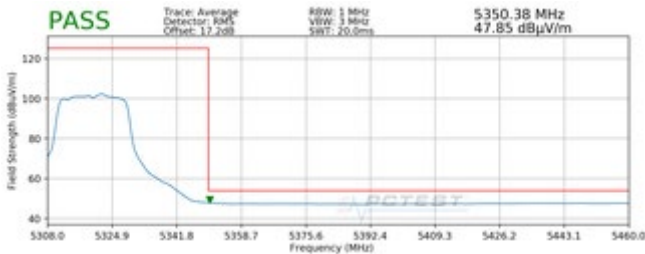


Plot 7-328. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

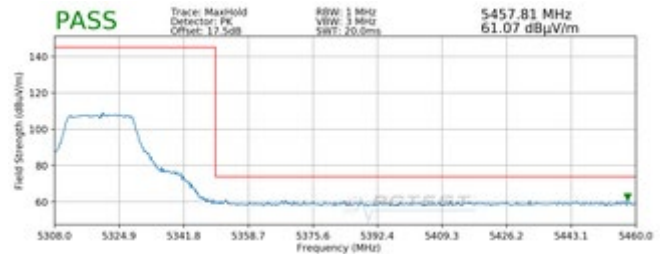


Plot 7-329. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 217 of 234

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

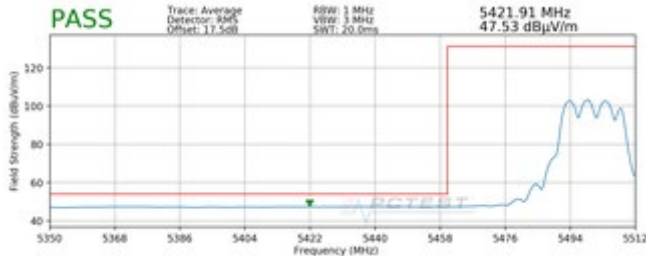


Plot 7-330. Radiated Lower Band Edge Plot CDD (Average – UNII Band 2C)

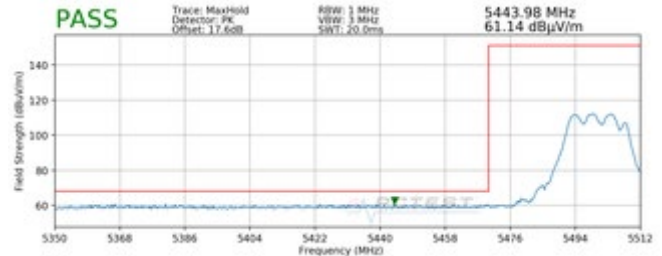

Plot 7-331. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

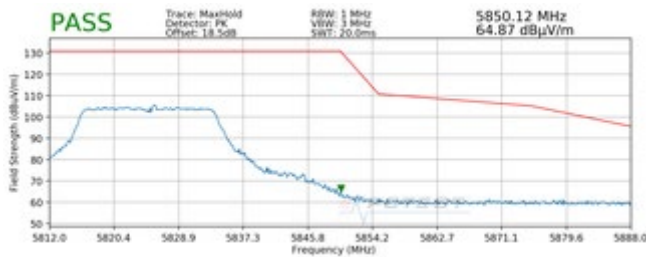


Plot 7-332. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 218 of 234

7.6.12 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

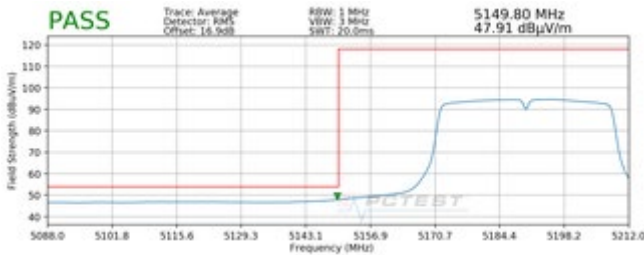


Plot 7-333. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

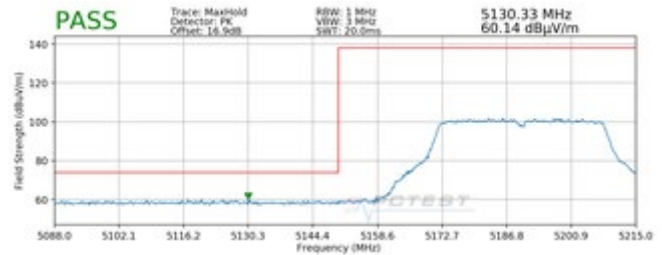


Plot 7-334. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

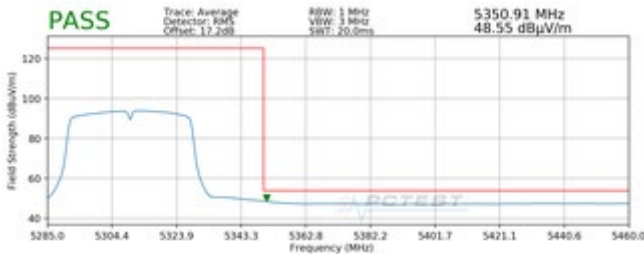

Plot 7-335. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

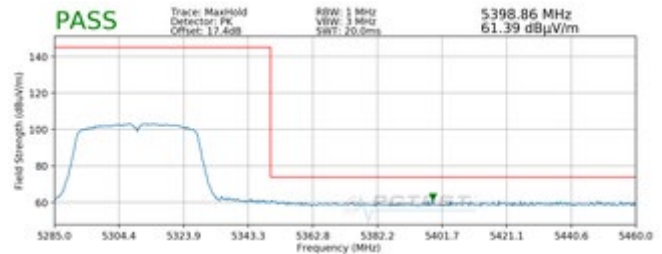


Plot 7-336. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 219 of 234

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102




Plot 7-337. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

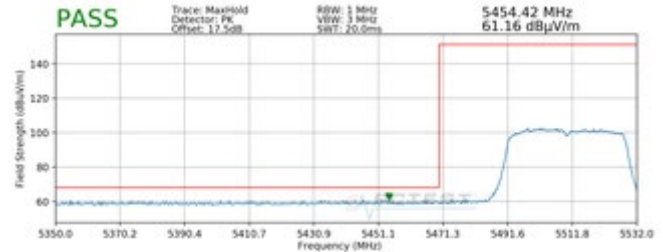

Plot 7-338. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

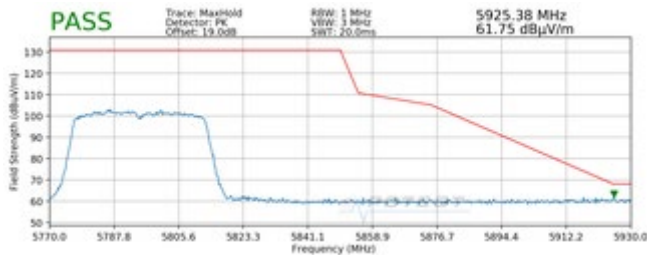


Plot 7-339. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 220 of 234

7.6.13 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

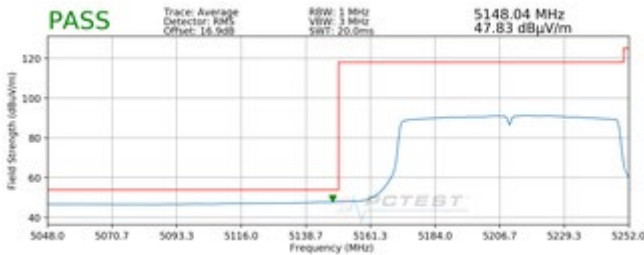


Plot 7-340. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

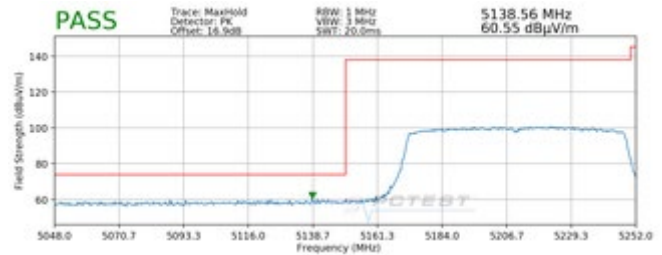


Plot 7-341. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

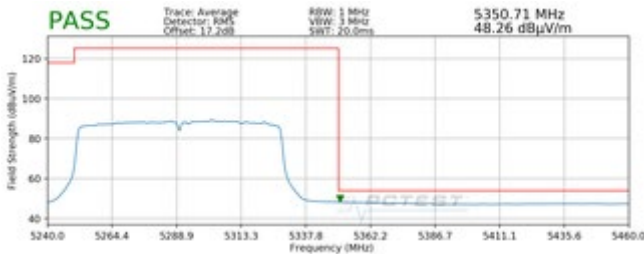


Plot 7-342. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

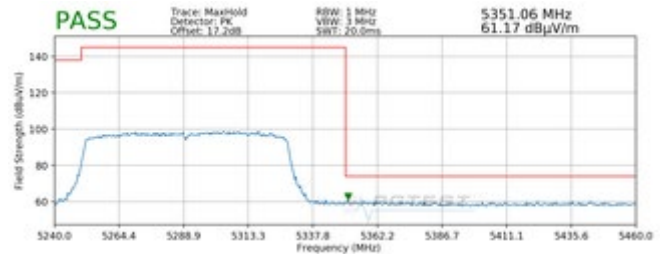


Plot 7-343. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 221 of 234

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

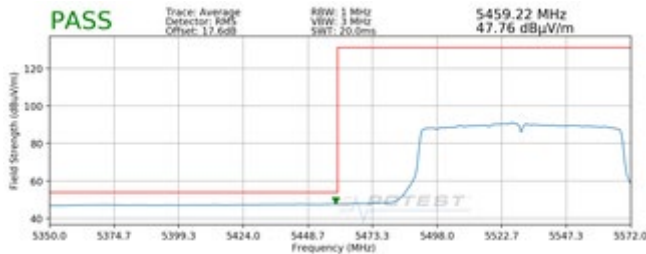


Plot 7-344. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

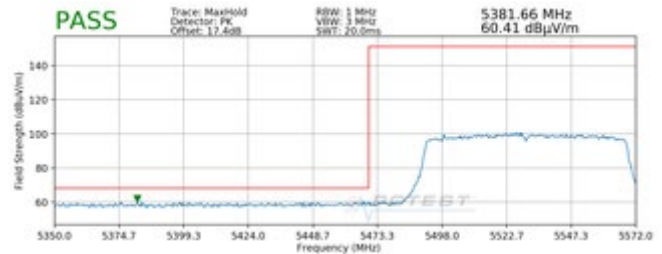

Plot 7-345. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

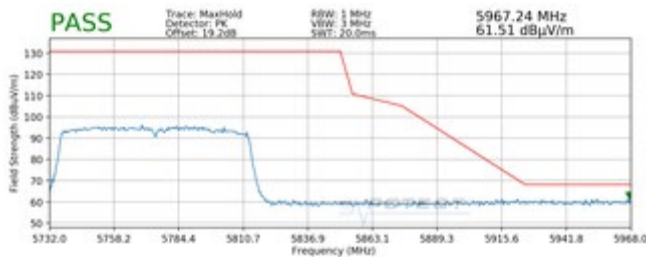

Plot 7-346. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07_ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 222 of 234

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-69 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-69. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07-ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 223 of 234	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

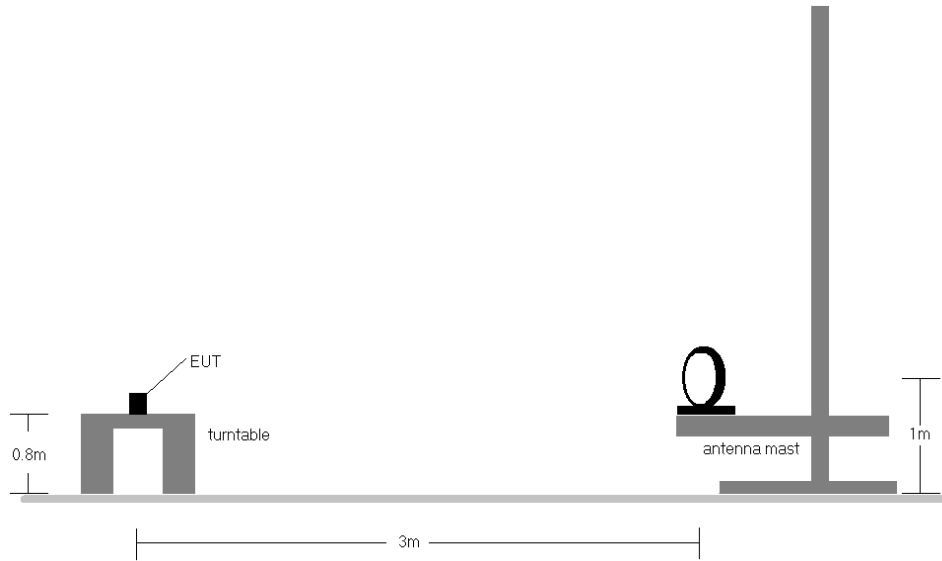


Figure 7-6. Radiated Test Setup < 30MHz

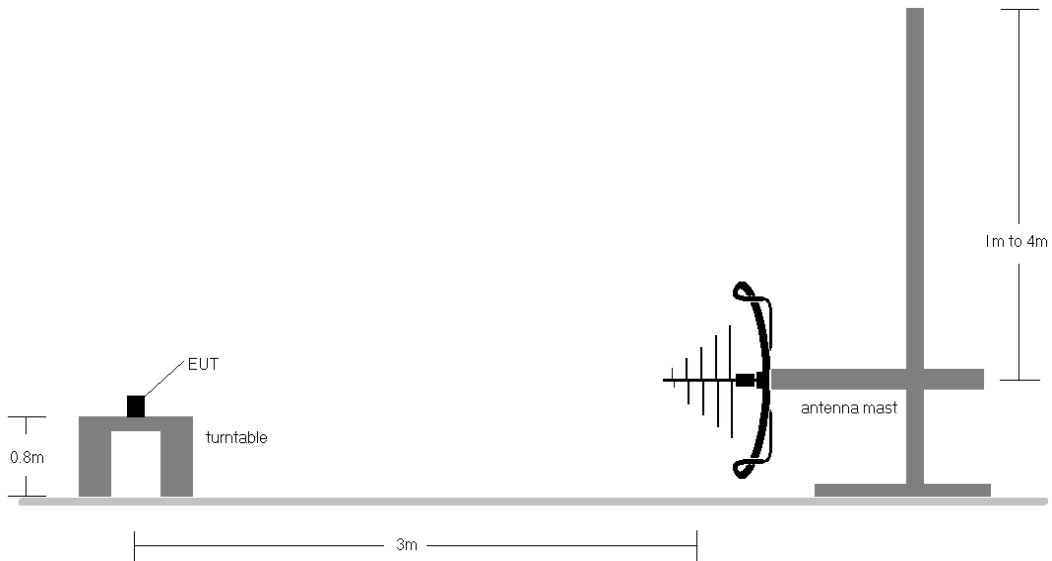


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 224 of 234


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-69.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset		Page 225 of 234

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

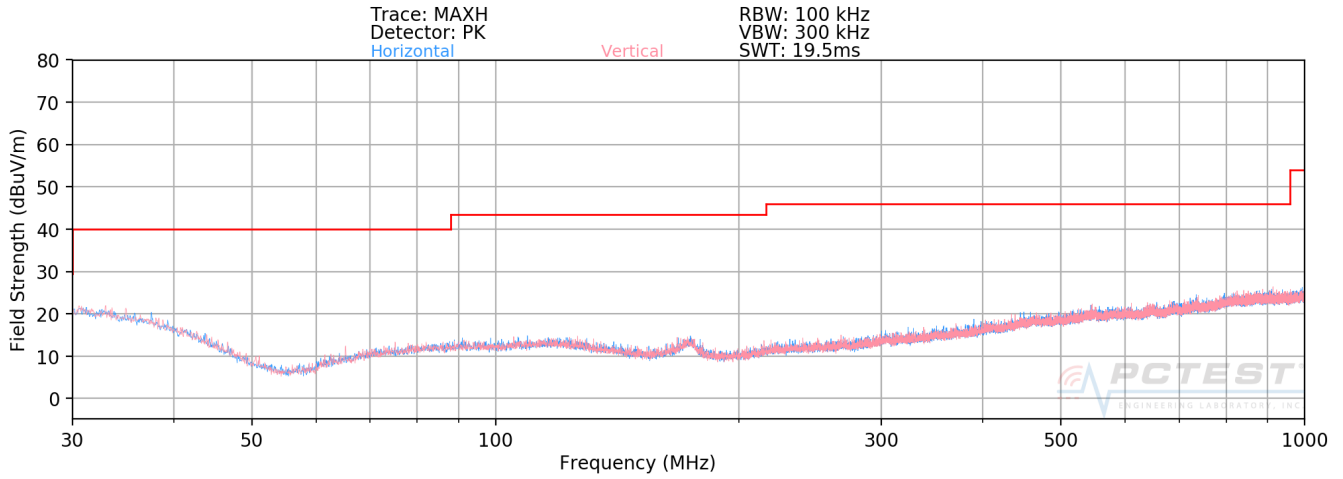

Plot 7-347. Radiated Spurious Plot below 1GHz SISO ANT1 (802.11a – U3 Ch. 157)

FCC ID: ZNFV600AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300229-07.ZNF	Test Dates: 12/30/2019 - 2/03/2020	EUT Type: Portable Handset	Page 226 of 234	