



TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2002-0008
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-V600EA
FCC ID : ZNFV600EA
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR 47 Part 2 subpart 2.1093
6. Date of Test : 2019.12.27 ~ 2020.01.22
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by Name : BumJun Park 	Reviewed by Name : HakMin Kim 
-------------	---------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2020 . 02 . 14.

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2002-0008	Feb. 14, 2020	Initial issue	BumJun Park	HakMin Kim

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information	5
1.2 Power Reduction for SAR	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	7
1.5 Simultaneous Transmission Capabilities	7
1.6 Miscellaneous SAR Test Considerations	8
1.7 Guidance Applied	9
1.8 Device Serial Numbers	9
2. LTE INFORMATION	10
3. INTROCUCTION	11
4. DOSIMETRIC ASSESSMENT	12
4.1 Measurement Procedure	12
5. DEFINITION OF REFERENCE POINTS	14
5.1 Ear Reference Point	14
5.2 Handset Reference Points	14
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	15
6.1 Device Holder	15
6.2 Positioning for Cheek/Touch	15
6.3 Positioning for Ear / 15 ° Tilt	15
6.4 Body-Worn Accessory Configurations	16
6.5 Extremity Exposure Configurations	16
6.6 Wireless Router Configurations	17
6.7 Phablet Configurations	17
7. RF EXPOSURE LIMITS	18
8. FCC MEASUREMENT PROCEDURES	19
8.1 Measured and Reported SAR	19
8.2 Procedures Used to Establish RF Signal for SAR	19
8.3 SAR Measurement Conditions for WCDMA (UMTS)	19
8.3.1 Output Power Verification	19
8.3.2 Head SAR Measurements for Handsets	19
8.3.3 Body SAR Measurements	20
8.3.4 Release 5 HSDPA Data Devices	20
8.3.5 Release 6 HSUPA Data Devices	20
8.3.6 SAR Measurement Conditions for DC-HSDPA	21
8.4 SAR Measurement Conditions for LTE	22
8.4.1 Spectrum Plots for RB Configurations	22
8.4.2 MPR	22
8.4.3 A-MPR	22
8.4.4 Required RB Size and RB Offsets for SAR Testing	22
8.4.5 64QAM uplink	22
8.5 SAR Testing with 802.11 Transmitters	23
8.5.1 General Device Setup	23
8.5.2 U-NII and U-NII-2A	23
8.5.3 U-NII-2C and U-NII-3	23
8.5.4 Initial Test Position Procedure	24
8.5.5 2.4 GHz SAR Test Requirements	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	24
8.5.7 Initial Test Configuration Procedure	24
8.5.8 Subsequent Test Configuration Procedures	25
8.5.9 MIMO SAR Considerations	25
9. RF CONDUCTED POWERS	26
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	28
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	36
9.5 Bluetooth Conducted Powers	39

10. SYSTEM VERIFICATION	41
10.1 Tissue Verification.....	41
10.2 Test System Verification.....	44
11. SAR TEST RESULTS	45
11.1 Head SAR Results.....	45
11.2 Standalone Body-Worn SAR Worn SAR Results	49
11.3 Standalone Hotspot SAR Results.....	51
11.4 Standalone Phablet SAR Results	53
11.5 SAR Test Notes.....	54
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	57
12.1 Introduction.....	57
12.2 Simultaneous Transmission Procedures	57
12.3 Simultaneous Transmission Capabilities	57
12.4 Head SAR Simultaneous Transmission Analysis	59
12.5 Body-Worn Simultaneous Transmission Analysis	66
12.6 Hotspot SAR Simultaneous Transmission Analysis.....	71
12.7 Phablet SAR Simultaneous Transmission Analysis.....	76
12.8 Simultaneous Transmission Conclusion.....	76
13. SAR MEASUREMENT VARIABILITY	77
13.1 Measurement Variability	77
13.2 Measurement Uncertainty	77
14. EQUIPMENT LIST	78
15. MEASUREMENT UNCERTAINTIES	79
16. CONCLUSION	96
17. REFERENCES.....	97
APPENDIX A. – Probe Calibration Data.....	99
APPENDIX B. – Dipole Calibration Data.....	133
APPENDIX C. – SAR Tissue Specifications	190
APPENDIX D. – SAR SYSTEM VALIDATION.....	193
APPENDIX E. – IEEE 802.11AX RU SAR EXCLUSION.....	195
APPENDIX F. – Description of Test Equipment	203

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone					
FCC ID	ZNFV600EA					
Equipment model name	LM-V600EA					
Equipment add model name	LMV600EA, V600EA					
Equipment serial no.	Identical prototype					
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1900, LTE Band 12, 17, 5, 4, 2, 2.4 G W-LAN (802.11b/g/n/ac/ax), 5 G W-LAN (802.11a/n/ac/ax), Bluetooth					
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency	
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz	
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz	
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz	
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz	
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz	
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz	
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz	
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz	
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz	
	2.4 GHz W-LAN	802.11b/g/n/ac/ax	Voice/Data	20MHz	2412 ~ 2472 MHz	
	5.2 GHz W-LAN	802.11a/n/ac/ax	Voice/Data	20MHz	5180 ~ 5240 MHz	
		802.11n/ac/ax	Voice/Data	40MHz	5190 ~ 5230 MHz	
		802.11ac/ax	Voice/Data	80MHz	5210 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5260 ~ 5320 MHz	
	5.3 GHz W-LAN	802.11n/ac/ax	Voice/Data	40MHz	5270 ~ 5310 MHz	
		802.11ac/ax	Voice/Data	80MHz	5290 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5500 ~ 5720 MHz	
	5.6 GHz W-LAN	802.11n/ac/ax	Voice/Data	40MHz	5510 ~ 5710 MHz	
		802.11ac/ax	Voice/Data	80MHz	5530 ~ 5690 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5745 ~ 5825 MHz	
	5.8 GHz W-LAN	802.11n/ac/ax	Voice/Data	40MHz	5755 ~ 5795 MHz	
		802.11ac/ax	Voice/Data	80MHz	5775 MHz	
		Bluetooth	-	Data	-	2402 ~ 2480 MHz
	RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
		GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
WCDMA 850		WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz	
WCDMA 1900		WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz	
LTE Band 12		LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz	
LTE Band 17		LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz	
LTE Band 5		LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz	
LTE Band 4		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz	
LTE Band 2		LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz	
2.4 GHz W-LAN		802.11b/g/n/ac/ax	Voice/Data	20MHz	2412 ~ 2472 MHz	
5.2 GHz W-LAN		802.11a/n/ac/ax	Voice/Data	20MHz	5180 ~ 5240 MHz	
		802.11n/ac/ax	Voice/Data	40MHz	5190 ~ 5230 MHz	
		802.11ac/ax	Voice/Data	80MHz	5210 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5260 ~ 5320 MHz	
5.3 GHz W-LAN		802.11n/ac/ax	Voice/Data	40MHz	5270 ~ 5310 MHz	
		802.11ac/ax	Voice/Data	80MHz	5290 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5500 ~ 5720 MHz	
5.6 GHz W-LAN		802.11n/ac/ax	Voice/Data	40MHz	5510 ~ 5710 MHz	
		802.11ac/ax	Voice/Data	80MHz	5530 ~ 5690 MHz	
		802.11a/n/ac/ax	Voice/Data	20MHz	5745 ~ 5825 MHz	
5.8 GHz W-LAN		802.11n/ac/ax	Voice/Data	40MHz	5755 ~ 5795 MHz	
		802.11ac/ax	Voice/Data	80MHz	5775 MHz	
		Bluetooth	-	Data	-	2402 ~ 2480 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.18	0.50	-	-
PCE	GPRS 850	0.20	0.51	0.51	-
PCE	GSM 1900	< 0.1	0.24	-	-
PCE	GPRS 1900	< 0.1	0.34	0.48	-
PCE	WCDMA 850	0.28	0.61	0.61	-
PCE	WCDMA 1900	< 0.1	0.57	0.88	-
PCE	LTE Band 12	0.11	0.26	0.26	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 5	0.28	0.90	0.90	-
PCE	LTE Band 4	< 0.1	0.43	0.65	-
PCE	LTE Band 2	< 0.1	0.68	0.99	-
DTS(SISO)	2.4 GHz W-LAN	0.50	< 0.1	0.17	-
DTS(MIMO)	2.4 GHz W-LAN	0.54	0.14	0.19	-
U-NII-1(SISO)	5.2 GHz W-LAN	-	-	0.13	-
U-NII-1(MIMO)	5.2 GHz W-LAN	-	-	0.27	-
U-NII-2A(SISO)	5.3 GHz W-LAN	0.52	0.16	-	0.44
U-NII-2A(MIMO)	5.3 GHz W-LAN	0.64	0.27	-	0.62
U-NII-2C(SISO)	5.6 GHz W-LAN	0.45	0.36	-	0.71
U-NII-2C(MIMO)	5.6 GHz W-LAN	0.50	0.46	-	1.02
U-NII-3(SISO)	5.8 GHz W-LAN	0.39	0.48	0.33	1.04
U-NII-3(MIMO)	5.8 GHz W-LAN	0.38	0.40	0.41	1.20
DSS	Bluetooth	0.33	< 0.1	0.10	-
Simultaneous SAR per KDB 690783 D01v01r03		1.46	1.45	1.40	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2019.12.27 ~ 2020.01.22				
Antenna Type	Internal Antenna				
Functions	<ul style="list-style-type: none"> ● GSM/GPRS/EDGE (GPRS/EDGE Class: 12) supported. * DTM not supported. ● Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. ● VoIP is supported. ● W-LAN 2.4GHz is supported Hotspot. ● W-LAN 5 GHz is supported Hotspot in UNII B1, B3. 				

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFV600EA_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	X
GSM/GPRS/EDGE 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	X
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	O	X
LTE Band 17	X	O	O	O	O	X
LTE Band 5	X	O	O	O	O	X
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
2.4G W-LAN Ant.1	O	X	O	O	X	O
2.4G W-LAN Ant.2	O	X	O	O	X	O
2.4G W-LAN MIMO	O	X	O	O	X	O
5G W-LAN Ant.1	O <small>Note 2</small>	X	O	O	X	O <small>Note 2</small>
5G W-LAN Ant.2	O <small>Note 2</small>	X	O	O	X	O <small>Note 2</small>
5G W-LAN MIMO	O <small>Note 2</small>	X	O	O	X	O <small>Note 2</small>
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

Note 4: This DUT has NFC operations. The NFC antenna is integrated into the back side.

The SAR tests were performed with NFC antenna already incorporated.

A diagram showing the location of the device antenna can be found in ZNFV600EA_Antenna Location.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1, U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot **Bluetooth SAR was not required; [(14/10)*√2.480] = 2.1 (< 3.0)**. Per KDB Publication 447498 D01 v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distance < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet **Bluetooth SAR was not required; [(14/5)*√2.480] = 4.3 (< 7.5)**. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C & U-NII-3 WLAN(CH 165), phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

Per April 2019 TCB Workshop Notes, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection.

The 802.11ax specified maximum output power of this device is not greater than the other 802.11 modes.

Also the maximum conducted powers were measured for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

In conclusion, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

Per FCC KDB Publication 648474 D04 v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (802.11ax Transmitters)
- FCC KDB Inquiry (Tracking No. 372568)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	ZNFV600EA				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note2}	N/A	844.0 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) ^{Note3}	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
UE Category	LTE Rel 15 LTE UE Cat (DL UE Cat 20, UL UE Cat 16)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	LTE Carrier Aggregation is not supported. This device does not support full CA features on 3GPP Release 15.				
LTE Additional Information	All uplink communications are identical to the Release 8 Specifications. The following LTE Release 15 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

- LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05V02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B5 (Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05V02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.
Per KDB 941225 D05V02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASYS manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm \pm 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm \pm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1
Close-up side view of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

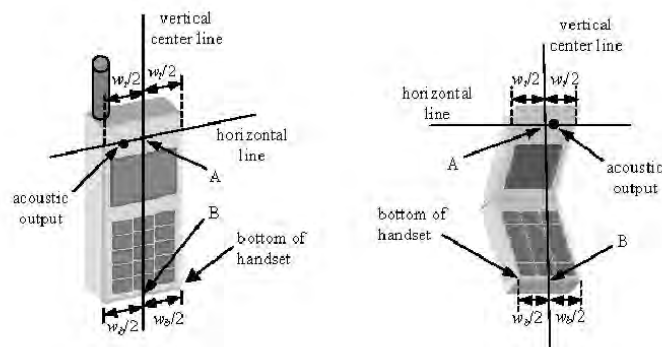


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

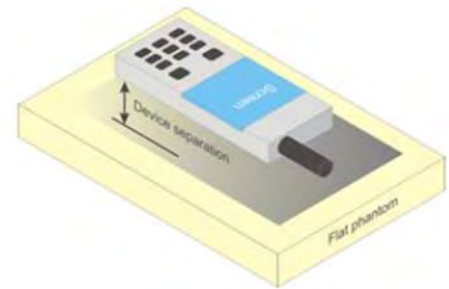


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 8.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 8.2 Table 2

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 64QAM uplink

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11 ac or 802.11g, 802.11n and 802.11ac with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a then 802.11n and 802.11ac or 802.11g then 802.11n and 802.11ac is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

8.5.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	33.20	33.20	31.20	27.20	25.70	27.20	26.70	25.70	24.70
	Nominal	32.70	32.70	30.70	26.70	25.20	26.70	26.20	25.20	24.20
GSM/GPRS/EDGE 1900	Maximum	30.20	30.20	29.20	27.20	25.70	26.20	25.70	24.70	23.70
	Nominal	29.70	29.70	28.70	26.70	25.20	25.70	25.20	24.20	23.20

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	33.00	33.00	31.20	27.10	25.50	26.10	25.90	25.10	23.60
	190	33.10	33.10	31.20	27.00	25.50	26.20	25.90	25.00	23.60
	251	32.70	32.70	31.00	26.80	25.30	26.00	25.90	25.10	23.70
PCS 1900	512	30.00	30.00	29.10	27.10	25.50	25.70	25.50	24.60	23.40
	661	30.10	30.10	29.20	27.20	25.70	25.80	25.50	24.70	23.70
	810	30.00	30.00	29.10	27.10	25.20	25.90	25.70	24.60	23.20
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	23.97	23.97	25.18	22.84	22.49	17.07	19.88	20.84	20.59
	190	24.07	24.07	25.18	22.74	22.49	17.17	19.88	20.74	20.59
	251	23.67	23.67	24.98	22.54	22.29	16.97	19.88	20.84	20.69
PCS 1900	512	20.97	20.97	23.08	22.84	22.49	16.67	19.48	20.34	20.39
	661	21.07	21.07	23.18	22.94	22.69	16.77	19.48	20.44	20.69
	810	20.97	20.97	23.08	22.84	22.19	16.87	19.68	20.34	20.19
GSM850	Frame Avg. Targets:	23.67	23.67	24.68	22.44	22.19	17.67	20.18	20.94	21.19
PCS 1900		20.67	20.67	22.68	22.44	22.19	16.67	19.18	19.94	20.19

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
 EDGE Multislot class: 12 (max 4 TX Uplink slots)
 DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		PCS Band (dBm)		3GPP MPR (dB)
99	WCDMA	Voice	Maximum	25.2	23.7	-	
			Nominal	24.7	23.2		
5	HSDPA	Subtest 1	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
5		Subtest 2	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
5		Subtest 3	Maximum	24.7	23.2	0.5	
			Nominal	24.2	22.7		
5		Subtest 4	Maximum	24.7	23.2	0.5	
			Nominal	24.2	22.7		
6	HSUPA	Subtest 1	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
6		Subtest 2	Maximum	23.2	21.7	2	
			Nominal	22.7	21.2		
6		Subtest 3	Maximum	24.2	22.7	1	
			Nominal	23.7	22.2		
6		Subtest 4	Maximum	23.2	21.7	2	
			Nominal	22.7	21.2		
6		Subtest 5	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
8	DC-HSDPA	Subtest 1	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
8		Subtest 2	Maximum	25.2	23.7	0	
			Nominal	24.7	23.2		
8		Subtest 3	Maximum	24.7	23.2	0.5	
			Nominal	24.2	22.7		
8		Subtest 4	Maximum	24.7	23.2	0.5	
			Nominal	24.2	22.7		

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.15	25.19	25.12	23.65	23.67	23.69	-
		12.2 kbps AMR	25.16	25.19	25.13	23.66	23.67	23.68	-
5	HSDPA	Subtest 1	24.26	24.32	24.27	22.72	22.74	22.76	0
5		Subtest 2	24.26	24.32	24.26	22.71	22.76	22.75	0
5		Subtest 3	23.77	23.82	23.76	22.20	22.23	22.25	0.5
5		Subtest 4	23.77	23.82	23.77	22.20	22.21	22.25	0.5
6	HSUPA	Subtest 1	24.27	24.33	24.27	22.71	22.72	22.74	0
6		Subtest 2	22.28	22.32	22.27	20.72	20.75	20.74	2
6		Subtest 3	23.24	23.33	23.27	21.67	21.72	21.74	1
6		Subtest 4	22.28	22.31	22.28	20.70	20.75	20.76	2
6		Subtest 5	24.26	24.31	24.27	22.69	22.75	22.75	0
8	DC-HSDPA	Subtest 1	24.08	24.12	23.95	22.18	22.35	22.23	0
8		Subtest 2	24.07	24.12	23.94	22.17	22.36	22.23	0
8		Subtest 3	23.57	23.62	23.44	21.68	21.84	21.73	0.5
8		Subtest 4	23.56	23.61	23.44	21.67	21.84	21.72	0.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.




Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode	Modulated Average[dBm]	
	LTE Band 12	Maximum
	Nominal	25.0

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)	Conducted Power (dBm)		
QPSK	1	0		24.99	≤ 1	0
	1	25		25.11		
	1	49		25.02		
	25	0		24.02		1
	25	12		24.15		
	25	25		24.08		
16QAM	50	0		24.06	≤ 1	1
	1	0		24.15		
	1	25		24.23		
	1	49		24.16		≤ 2
	25	0		22.90		
	25	12		22.98		
64QAM	25	25		22.90	≤ 2	2
	50	0		22.87		
	1	0		23.02		
	1	25		23.19		≤ 3
	1	49		23.11		
	25	0		21.93		
64QAM	25	12		22.02	≤ 3	3
	25	25		22.00		
	50	0		21.90		

Table 9.3.1.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.83	24.91	24.89	≤ 1	0
	1	12	24.94	25.04	25.00		
	1	24	24.92	24.95	24.93		
	12	0	24.00	24.02	24.02		1
	12	6	24.02	24.05	24.04		
	12	13	24.01	24.03	24.03		
16QAM	25	0	24.01	24.05	24.03	≤ 1	1
	1	0	24.01	24.06	24.07		
	1	12	24.12	24.20	24.15		
	1	24	24.09	24.13	24.12		≤ 2
	12	0	22.86	22.88	22.86		
	12	6	22.87	22.89	22.88		
64QAM	12	13	22.87	22.92	22.90	≤ 2	2
	25	0	22.86	22.87	22.84		
	1	0	23.02	23.03	23.04		
	1	12	23.09	23.14	23.14		≤ 3
	1	24	23.00	23.09	23.05		
	12	0	21.90	21.93	21.89		
64QAM	12	6	21.94	21.99	21.99	≤ 3	3
	12	13	21.90	22.01	21.95		
	15	0	21.89	21.93	21.90		

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.93	24.93	25.00	≤ 1	0
	1	7	24.97	25.06	25.03		
	1	14	24.96	24.97	24.93		
	8	0	24.01	24.02	24.00		1
	8	4	24.03	24.05	24.04		
	8	7	24.01	24.04	24.02		
16QAM	15	0	24.00	24.03	24.02	≤ 1	1
	1	0	24.08	24.11	24.10		
	1	7	24.12	24.20	24.15		
	1	14	24.10	24.14	24.11		≤ 2
	8	0	22.89	22.90	22.91		
	8	4	22.94	22.93	22.95		
64QAM	8	7	22.86	22.99	22.92	≤ 2	2
	15	0	22.86	22.90	22.89		
	1	0	23.08	23.08	23.04		
	1	7	23.10	23.20	23.10		
	1	14	23.03	23.16	23.05		
	64QAM	8	0	21.96	21.93		21.98
8		4	21.95	21.96	21.99		
8		7	21.92	22.01	21.90		
15		0	21.91	21.97	21.95	3	

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.89	24.87	24.87	≤ 1	0
	1	2	24.92	24.98	24.96		
	1	5	24.86	24.92	24.91		
	3	0	24.86	24.88	24.84		0
	3	2	24.91	24.98	24.87		
	3	3	24.88	24.92	24.85		
16QAM	6	0	23.95	23.98	23.91	≤ 1	1
	1	0	24.04	24.02	24.05		
	1	2	24.09	24.15	24.12		
	1	5	24.00	24.12	24.05		≤ 1
	3	0	23.81	23.83	23.82		
	3	2	23.84	23.91	23.84		
64QAM	3	3	23.82	23.86	23.83	≤ 2	1
	6	0	22.86	22.86	22.84		
	1	0	22.97	23.01	22.96		
	1	2	23.04	23.05	23.02		
	1	5	22.95	23.02	22.97		
	64QAM	3	0	22.92	22.97		22.90
3		2	22.98	23.07	22.98		
3		3	22.94	22.99	22.94		
6		0	21.81	21.83	21.82	≤ 3	

Table 9.3.1.5 LTE Conducted Power

Band & Mode	Modulated Average[dBm]
LTE Band 5	Maximum
	Nominal

Table 9.3.2.1 Nominal and Maximum Output Power Spec

2) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20525 (836.5 MHz)	Conducted Power (dBm)			
QPSK	1	0		25.15	≤ 1	0	
	1	25		25.21			
	1	49		25.16			
	25	0		24.16		1	
	25	12		24.26			
	25	25		24.22			
16QAM	1	0		24.32	≤ 1	1	
	1	25		24.39			
	1	49		24.32			
	25	0		22.99		≤ 2	2
	25	12		23.07			
	25	25		23.04			
64QAM	1	0		23.12	≤ 2	2	
	1	25		23.23			
	1	49		23.26			
	25	0		22.01		≤ 3	3
	25	12		22.11			
	25	25		22.05			
	50	0		22.08		3	

Table 9.3.2.2 LTE Conducted Power

Note : LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)			
QPSK	1	0	25.11	25.03	25.02	≤ 1	0	
	1	12	25.16	25.18	25.14			
	1	24	25.13	25.08	24.98			
	12	0	24.19	24.19	24.14		1	
	12	6	24.23	24.24	24.17			
	12	13	24.22	24.22	24.14			
16QAM	25	0	24.19	24.20	24.11	≤ 1	1	
	1	0	24.24	24.22	24.15			
	1	12	24.32	24.37	24.30			
	1	24	24.27	24.23	24.10		≤ 2	2
	12	0	23.04	23.01	22.96			
	12	6	23.06	23.06	23.00			
64QAM	12	13	23.03	23.04	22.98	≤ 2	2	
	25	0	23.03	23.12	22.94			
	1	0	23.20	23.17	23.05			
	1	12	23.27	23.29	23.18		≤ 3	3
	1	24	23.24	23.19	22.80			
	12	0	22.10	22.00	22.03			
64QAM	12	6	22.13	22.12	22.05	≤ 3	3	
	12	13	22.11	22.07	22.04			
	25	0	22.02	22.06	21.93			

Table 9.3.2.3 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.11	25.06	24.98	≤ 1	0
	1	7	25.18	25.20	25.13		
	1	14	25.13	25.14	25.01		
	8	0	24.19	24.15	24.03		1
	8	4	24.22	24.24	24.17		
	8	7	24.17	24.20	24.12		
16QAM	15	0	24.18	24.19	24.08	≤ 1	1
	1	0	24.23	24.18	24.13		
	1	7	24.32	24.35	24.23		
	1	14	24.29	24.31	24.17		2
	8	0	23.10	23.03	22.96		
	8	4	23.12	23.09	23.02		
64QAM	8	7	23.09	23.05	22.99	≤ 2	2
	15	0	23.04	23.06	22.93		
	1	0	23.13	23.13	23.12		
	1	7	23.30	23.29	23.14		
	1	14	23.18	23.21	22.84		
	64QAM	8	0	22.08	22.05		21.99
8		4	22.12	22.12	22.04		
8		7	22.09	22.08	21.99		
15		0	22.04	22.03	21.98	3	

Table 9.3.2.4 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.06	24.99	24.96	≤ 1	0
	1	2	25.13	25.15	25.03		
	1	5	25.06	25.04	24.98		
	3	0	25.07	25.04	24.94		0
	3	2	25.12	25.14	25.00		
	3	3	25.09	25.08	24.94		
16QAM	6	0	24.16	24.17	24.03	≤ 1	1
	1	0	24.22	24.14	24.08		
	1	2	24.29	24.31	24.23		
	1	5	24.20	24.22	24.07		1
	3	0	24.00	23.95	23.87		
	3	2	24.04	24.04	23.92		
64QAM	3	3	24.02	23.98	23.87	≤ 2	2
	6	0	23.03	23.02	22.92		
	1	0	23.19	23.13	23.06		
	1	2	23.21	23.21	23.07		
	1	5	23.14	23.14	23.01		
	64QAM	3	0	23.13	23.09		22.96
3		2	23.18	23.15	22.97		
3		3	23.13	23.14	22.90		
6		0	22.00	21.98	21.86	≤ 3	

Table 9.3.2.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 4	Maximum	23.7
	Nominal	23.2

Table 9.3.3.1 Nominal and Maximum Output Power Spec

3) LTE Band 4

LTE Band 4 (AWS) Conducted Power- 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			20175 (1732.5 MHz)	Conducted Power (dBm)		
QPSK	1	0		23.02	≤ 1	0
	1	50		23.09		
	1	99		23.00		
	50	0		22.18		1
	50	25		22.19		
	50	50		22.15		
16QAM	100	0		22.15	≤ 2	1
	1	0		22.20		
	1	50		22.26		
	1	99		22.15		2
	50	0		21.14		
	50	25		21.15		
64QAM	50	50		21.13	≤ 3	2
	100	0		21.07		
	1	0		21.16		
	1	50		21.24		2
	1	99		21.04		
	50	0		20.08		
64QAM	50	25		20.11	≤ 3	3
	50	50		20.10		
	100	0		20.03		

Table 9.3.3.2 LTE Conducted Power

Note: LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.
 Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 4 (AWS) Conducted Power- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
QPSK	1	0	23.03	23.03	23.04	≤ 1	0
	1	36	23.15	23.14	23.13		
	1	74	23.01	23.00	23.01		
	36	0	22.17	22.17	22.20		1
	36	18	22.23	22.22	22.21		
	36	37	22.17	22.18	22.18		
16QAM	75	0	22.20	22.16	22.15	≤ 2	1
	1	0	22.23	22.17	22.18		
	1	36	22.33	22.34	22.30		
	1	74	22.19	22.18	22.10		2
	36	0	21.15	21.15	21.17		
	36	18	21.22	21.16	21.25		
64QAM	36	37	21.16	21.15	21.17	≤ 3	2
	75	0	21.19	21.16	21.14		
	1	0	21.20	21.19	21.23		
	1	36	21.31	21.31	21.31		2
	1	74	21.19	21.18	21.20		
	36	0	20.13	20.12	20.13		
64QAM	36	18	20.22	20.17	20.24	≤ 3	3
	36	37	20.13	20.15	20.17		
	75	0	20.14	20.06	20.08		

Table 9.3.3.3 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
QPSK	1	0	23.06	23.05	23.07	≤ 1	0
	1	25	23.11	23.09	23.08		
	1	49	23.00	23.01	23.02		
	25	0	22.03	22.02	22.01		1
	25	12	22.04	22.03	22.02		
	25	25	22.02	22.01	22.00		
16QAM	50	0	22.09	22.04	22.03	≤ 2	1
	1	0	22.12	22.17	22.17		
	1	25	22.23	22.24	22.24		
	1	49	22.06	22.02	22.03		2
	25	0	21.06	21.06	21.00		
	25	12	21.09	21.11	21.03		
64QAM	25	25	21.04	21.04	21.00	≤ 3	2
	50	0	21.07	21.03	21.06		
	1	0	21.09	21.06	21.05		
	1	25	21.18	21.22	21.22		2
	1	49	21.03	21.07	21.03		
	25	0	20.08	20.02	20.00		
64QAM	25	12	20.12	20.10	20.01	≤ 3	3
	25	25	20.07	20.09	20.00		
	50	0	20.05	20.07	20.02		

Table 9.3.3.4 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.02	23.03	23.02	≤ 1	0
	1	12	23.10	23.06	23.04		
	1	24	23.00	23.02	23.01		
	12	0	22.09	22.04	22.08		1
	12	6	22.12	22.11	22.10		
	12	13	22.00	22.02	22.03		
	25	0	22.09	22.08	22.07		
16QAM	1	0	22.18	22.11	22.14	≤ 1	1
	1	12	22.21	22.17	22.16		
	1	24	22.12	22.10	22.13		
	12	0	21.11	21.06	21.11	≤ 2	2
	12	6	21.15	21.10	21.13		
	12	13	21.03	21.04	21.05		
	25	0	21.08	21.00	21.07		
64QAM	1	0	21.17	21.14	21.12	≤ 2	2
	1	12	21.21	21.20	21.13		
	1	24	21.05	21.07	21.06		
	12	0	20.09	20.04	20.09	≤ 3	3
	12	6	20.10	20.10	20.10		
	12	13	20.03	20.02	20.08		
	25	0	20.02	20.07	20.01		

Table 9.3.3.5 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.03	23.01	23.01	≤ 1	0
	1	7	23.11	23.07	23.05		
	1	14	23.02	23.00	23.00		
	8	0	22.12	22.04	22.08		1
	8	4	22.13	22.11	22.09		
	8	7	22.08	22.04	22.03		
	15	0	22.09	22.08	22.02		
16QAM	1	0	22.18	22.11	22.13	≤ 1	1
	1	7	22.31	22.18	22.15		
	1	14	22.17	22.08	22.05		
	8	0	21.14	21.10	21.14	≤ 2	2
	8	4	21.16	21.15	21.16		
	8	7	21.10	21.11	21.08		
	15	0	21.09	21.05	21.08		
64QAM	1	0	21.15	21.16	21.17	≤ 2	2
	1	7	21.30	21.23	21.18		
	1	14	21.18	21.19	21.08		
	8	0	20.14	20.03	20.06	≤ 3	3
	8	4	20.15	20.09	20.10		
	8	7	20.11	20.04	20.03		
	15	0	20.06	20.02	20.06		

Table 9.3.3.6 LTE Conducted Power

TE Band 4 (AWS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.04	23.01	23.03	≤ 1	0
	1	2	23.10	23.09	23.04		
	1	5	23.00	23.02	23.02		
	3	0	23.04	23.03	23.02		0
	3	2	23.08	23.07	23.03		
	3	3	23.03	23.04	23.00		
	6	0	22.13	22.12	22.09		
16QAM	1	0	22.23	22.12	22.10	≤ 1	1
	1	2	22.27	22.22	22.16		
	1	5	22.13	22.13	22.09		
	3	0	22.03	22.03	22.01		1
	3	2	22.04	22.04	22.05		
	3	3	22.00	22.02	22.00		
	6	0	21.07	21.08	21.03		
64QAM	1	0	21.20	21.18	21.15	≤ 2	2
	1	2	21.21	21.23	21.17		
	1	5	21.14	21.11	21.09		
	3	0	21.13	21.12	21.07	≤ 2	2
	3	2	21.19	21.19	21.15		
	3	3	21.11	21.09	21.04		
	6	0	20.09	20.08	20.07		

Table 9.3.3.7 LTE Conducted Power

Band & Mode	Modulated Average(dBm)
LTE Band 2(PCS)	Maximum
	Nominal

Table 9.3.4.1 Nominal and Maximum Output Power Spec

4) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.12	23.30	23.12	≤ 1	0
	1	50	23.02	23.03	23.08		
	1	99	23.00	23.00	23.01		
	50	0	22.06	22.08	22.05		1
	50	25	22.20	22.23	22.20		
	50	50	22.14	22.13	22.19		
	100	0	22.15	22.17	22.09		
16QAM	1	0	22.28	22.25	22.26	≤ 1	1
	1	50	22.18	22.21	22.20		
	1	99	22.13	22.20	22.21		
	50	0	21.10	21.08	21.09		≤ 2
	50	25	21.20	21.32	21.21		
	50	50	21.17	21.19	21.20		
	100	0	21.17	21.09	21.10		
64QAM	1	0	21.19	21.24	21.16	≤ 2	2
	1	50	21.06	21.11	21.13		
	1	99	21.08	21.06	21.15		
	50	0	20.13	20.12	20.12		≤ 3
	50	25	20.25	20.26	20.25		
	50	50	20.20	20.22	20.23		
	100	0	20.19	20.15	20.12		

Table 9.3.4.2 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.05	23.15	23.11	≤ 1	0
	1	36	23.01	23.00	23.05		
	1	74	23.00	23.00	23.03		
	36	0	22.08	22.11	22.09		1
	36	18	22.16	22.13	22.14		
	36	37	22.18	22.20	22.19		
	75	0	22.11	22.15	22.10		
16QAM	1	0	22.19	22.26	22.25	≤ 1	1
	1	36	22.10	22.20	22.19		
	1	74	22.05	22.19	22.23		
	36	0	21.10	21.11	21.07		≤ 2
	36	18	21.16	21.14	21.15		
	36	37	21.18	21.20	21.19		
	75	0	21.18	21.13	21.12		
64QAM	1	0	21.17	21.20	21.16	≤ 2	2
	1	36	21.10	21.14	21.14		
	1	74	21.12	21.10	21.15		
	36	0	20.10	20.16	20.16		≤ 3
	36	18	20.14	20.21	20.20		
	36	37	20.25	20.29	20.23		
	75	0	20.19	20.15	20.14		

Table 9.3.4.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.01	23.05	23.07	≤ 1	0
	1	25	23.06	23.09	23.08		
	1	49	23.00	23.02	23.07		
	25	0	22.05	22.02	22.03		1
	25	12	22.06	22.10	22.05		
	25	25	22.05	22.09	22.01		
	50	0	22.04	22.09	22.07		
16QAM	1	0	22.02	22.01	22.11	≤ 1	1
	1	25	22.09	22.11	22.18		
	1	49	22.05	22.06	22.05		
	25	0	21.07	21.03	21.06		≤ 2
	25	12	21.08	21.13	21.08		
	25	25	21.06	21.09	21.06		
	50	0	21.04	21.03	21.01		
64QAM	1	0	21.02	21.05	21.04	≤ 2	2
	1	25	21.08	21.11	21.09		
	1	49	21.01	21.07	21.03		
	25	0	20.01	20.07	20.00		≤ 3
	25	12	20.07	20.14	20.04		
	25	25	20.00	20.09	20.01		
	50	0	20.20	20.05	20.04		

Table 9.3.4.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.06	23.02	23.05	≤ 1	0	
	1	12	23.07	23.10	23.09			
	1	24	23.02	23.00	23.01			
	12	0	22.02	22.02	22.04		1	
	12	6	22.03	22.09	22.05			
	12	13	22.01	22.00	22.00			
16QAM	25	0	22.02	22.07	22.00	≤ 1	1	
	1	0	22.02	22.01	22.02			
	1	12	22.11	22.14	22.10			
	1	24	22.01	22.02	22.01		2	
	12	0	21.07	21.04	21.03			
	12	6	21.09	21.11	21.09			
64QAM	12	13	21.01	21.00	21.00	≤ 2	2	
	25	0	21.03	21.07	21.03			
	1	0	21.06	21.02	21.05			≤ 2
	1	12	21.07	21.08	21.07			
	1	24	21.02	21.03	21.02			
	64QAM	12	0	20.13	20.10		20.11	≤ 3
12		6	20.14	20.15	20.12			
12		13	20.04	20.06	20.05			
25		0	20.02	20.03	20.05	3		
1		0	20.10	20.12	20.11			
1		7	20.16	20.16	20.15			

Table 9.3.4.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.04	23.05	23.03	≤ 1	0	
	1	7	23.05	23.09	23.06			
	1	14	23.00	23.03	23.01			
	8	0	22.01	22.03	22.01		1	
	8	4	22.02	22.05	22.02			
	8	7	22.00	22.04	22.00			
16QAM	15	0	22.00	22.04	22.00	≤ 1	1	
	1	0	22.07	22.06	22.12			
	1	7	22.11	22.11	22.13			
	1	14	22.06	22.06	22.03		2	
	8	0	21.10	21.08	21.09			
	8	4	21.11	21.11	21.12			
64QAM	8	7	21.02	21.08	21.03	≤ 2	2	
	15	0	21.05	21.01	21.04			
	1	0	21.05	21.04	21.06			
	1	7	21.06	21.09	21.07		≤ 2	2
	1	14	21.04	21.02	21.04			
	8	0	20.10	20.12	20.11			
64QAM	8	4	20.16	20.16	20.15	≤ 3	3	
	8	7	20.07	20.12	20.04			
	15	0	20.04	20.02	20.06			

Table 9.3.4.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.03	23.06	23.02	≤ 1	0	
	1	2	23.06	23.07	23.05			
	1	5	23.04	23.05	23.03			
	3	0	23.02	23.05	23.01		0	
	3	2	23.05	23.06	23.04			
	3	3	23.01	23.03	23.01			
16QAM	6	0	22.02	22.03	22.01	≤ 1	1	
	1	0	22.08	22.03	22.01			
	1	2	22.14	22.10	22.04			
	1	5	22.03	22.01	22.00		1	
	3	0	22.05	22.03	22.02			
	3	2	22.10	22.04	22.03			
64QAM	3	3	22.01	22.00	22.01	≤ 2	2	
	6	0	21.03	21.06	21.01			
	1	0	21.04	21.03	21.04			
	1	2	21.12	21.14	21.10		≤ 2	2
	1	5	21.02	21.03	21.08			
	3	0	21.05	21.06	21.06			
64QAM	3	2	21.10	21.12	21.09	≤ 3	2	
	3	3	21.02	21.12	21.07			
	6	0	20.07	20.09	20.05			

Table 9.3.4.7 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1~2	15.5	14.5	15.5	14.5	-	-
		3~9	15.5	14.5	15.5	14.5	-	-
		10~11	15.5	14.5	15.5	14.5	-	-
		12	-4.0	-5.0	-4.0	-5.0	-	-
		13	-5.0	-6.0	-5.0	-6.0	-	-
	802.11g	1~2	15.5	14.5	15.5	14.5	18.5	17.5
		3~9	15.5	14.5	15.5	14.5	18.5	17.5
		10~11	15.5	14.5	15.5	14.5	18.5	17.5
		12	-4.0	-5.0	-4.0	-5.0	-1.0	-2.0
		13	-5.0	-6.0	-5.0	-6.0	-2.0	-3.0
	802.11n	1~2	15.5	14.5	15.5	14.5	18.5	17.5
		3~9	15.5	14.5	15.5	14.5	18.5	17.5
		10~11	13.5	12.5	13.5	12.5	16.5	15.5
		12	-4.0	-5.0	-4.0	-5.0	-1.0	-2.0
		13	-5.0	-6.0	-5.0	-6.0	-2.0	-3.0
	802.11ac	1~2	15.5	14.5	15.5	14.5	18.5	17.5
		3~9	15.5	14.5	15.5	14.5	18.5	17.5
		10~11	13.5	12.5	13.5	12.5	16.5	15.5
		12	-4.0	-5.0	-4.0	-5.0	-1.0	-2.0
	802.11ax OFDM	1~2	14.5	13.5	14.5	13.5	17.5	16.5
		3~9	14.5	13.5	14.5	13.5	17.5	16.5
		10~11	13.5	12.5	13.5	12.5	16.5	15.5
		12	-4.0	-5.0	-4.0	-5.0	-1.0	-2.0
		13	-5.0	-6.0	-5.0	-6.0	-2.0	-3.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11b	2412	1	15.03	15.17	-	-
	2437	6	15.10	15.07	-	-
	2462	11	15.26	15.38	-	-
	2467	12	-5.93	-5.14	-	-
	2472	13	-6.08	-5.03	-	-
802.11g	2412	1	15.17	14.43	17.82	-
	2437	6	15.44	14.27	17.90	-
	2462	11	15.26	14.40	17.86	-
	2467	12	-5.15	-5.02	-2.08	-
	2472	13	-6.98	-6.19	-3.56	-
802.11n (HT-20)	2412	1	14.91	14.70	17.82	17.58
	2437	6	15.14	14.73	17.95	17.62
	2462	11	13.00	12.72	15.87	15.67
	2467	12	-5.25	-4.62	-1.91	-1.84
	2472	13	-6.72	-5.78	-3.21	-3.22
802.11ac (VHT-20)	2412	1	14.88	14.71	17.81	17.56
	2437	6	15.14	14.70	17.94	17.64
	2462	11	12.97	12.71	15.85	15.65
	2467	12	-5.11	-4.83	-1.96	-1.91
	2472	13	-6.67	-5.80	-3.20	-3.10
802.11ax OFDM	2412	1	13.95	13.48	16.73	16.74
	2437	6	14.17	13.41	16.82	16.80
	2462	11	13.02	12.61	15.83	15.78
	2467	12	-5.02	-5.02	-2.01	-1.69
	2472	13	-6.57	-6.00	-3.26	-3.10

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
5 (UNII)	802.11a	36-165	16.0	15.0	16.0	15.0	19.0	18.0
	802.11n/ac/ax (20MHz)	36-165	15.0	14.0	15.0	14.0	18.0	17.0
	802.11n/ac/ax (40MHz)	38, 62, 102	11.5	10.5	11.5	10.5	14.5	13.5
		46-54, 110-159	15.0	14.0	15.0	14.0	18.0	17.0
	802.11ac/ax (80MHz)	42-58	11.5	10.5	11.5	10.5	14.5	13.5
106-155		13.5	12.5	13.5	12.5	16.5	15.5	

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11a	5180	36	15.52	15.57	18.56	-
	5200	40	15.58	15.65	18.63	-
	5220	44	15.51	15.61	18.57	-
	5240	48	15.41	15.76	18.60	-
	5260	52	15.61	15.68	18.65	-
	5280	56	15.61	15.53	18.58	-
	5300	60	15.41	15.55	18.49	-
	5320	64	15.59	15.60	18.60	-
	5500	100	15.51	15.29	18.41	-
	5600	120	15.93	15.70	18.82	-
	5660	132	15.91	15.56	18.75	-
	5720	144	15.98	15.26	18.65	-
	5745	149	15.95	15.20	18.60	-
	5785	157	15.96	15.08	18.55	-
	5825	165	15.78	15.29	18.55	-

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-20)	5180	36	14.65	14.58	17.62	17.65
	5200	40	14.55	14.62	17.59	17.67
	5220	44	14.38	14.53	17.46	17.54
	5240	48	14.36	14.60	17.49	17.63
	5260	52	14.37	14.60	17.50	17.59
	5280	56	14.35	14.25	17.31	17.43
	5300	60	14.49	14.41	17.46	17.55
	5320	64	14.37	14.43	17.41	17.50
	5500	100	14.74	14.16	17.47	17.56
	5600	120	14.69	14.56	17.64	17.75
	5660	132	14.80	14.54	17.68	17.72
	5720	144	14.96	14.20	17.61	17.63
	5745	149	14.91	14.14	17.55	17.54
	5785	157	14.83	14.07	17.48	17.45
	5825	165	14.54	14.26	17.41	17.39

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-20)	5180	36	14.51	14.41	17.47	17.68
	5200	40	14.42	14.50	17.47	17.73
	5220	44	14.24	14.38	17.32	17.60
	5240	48	14.29	14.50	17.40	17.71
	5260	52	14.28	14.47	17.39	17.67
	5280	56	14.19	14.15	17.18	17.47
	5300	60	14.36	14.28	17.33	17.62
	5320	64	14.24	14.28	17.27	17.58
	5500	100	14.61	14.08	17.37	17.46
	5600	120	14.59	14.45	17.53	17.59
	5660	132	14.72	14.45	17.59	17.62
	5720	144	14.92	14.09	17.53	17.54
	5745	149	14.83	14.01	17.45	17.62
	5785	157	14.76	13.95	17.38	17.54
	5825	165	14.41	14.16	17.30	17.44

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ax (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (20MHz)	5180	36	14.58	14.60	17.60	17.70
	5200	40	14.45	14.67	17.57	17.67
	5220	44	14.30	14.58	17.45	17.59
	5240	48	14.23	14.66	17.46	17.64
	5260	52	14.25	14.67	17.48	17.64
	5280	56	14.17	14.37	17.28	17.48
	5300	60	14.34	14.42	17.39	17.62
	5320	64	14.20	14.48	17.35	17.54
	5500	100	14.51	14.20	17.37	17.57
	5600	120	14.46	14.54	17.51	17.69
	5660	132	14.58	14.48	17.54	17.75
	5720	144	14.71	14.17	17.46	17.64
	5745	149	14.64	14.17	17.42	17.59
	5785	157	14.54	13.98	17.28	17.50
	5825	165	14.17	14.22	17.20	17.44

Table 9.4.7 IEEE 802.11ax Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-40)	5190	38	10.75	11.03	13.90	14.04
	5230	46	14.10	14.48	17.30	17.52
	5270	54	14.09	14.45	17.28	17.56
	5310	62	10.60	10.87	13.75	13.98
	5510	102	10.98	10.65	13.83	14.03
	5590	118	14.62	14.51	17.57	17.74
	5670	134	14.60	14.61	17.61	17.69
	5710	142	14.84	14.43	17.65	17.70
	5755	151	14.86	14.40	17.65	17.68
	5795	159	14.74	14.28	17.53	17.60

Table 9.4.8 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-40)	5190	38	10.74	11.01	13.88	14.09
	5230	46	14.08	14.52	17.32	17.51
	5270	54	14.11	14.49	17.31	17.52
	5310	62	10.68	10.89	13.80	13.96
	5510	102	11.05	10.70	13.89	14.02
	5590	118	14.59	14.55	17.58	17.70
	5670	134	14.55	14.62	17.59	17.67
	5710	142	14.80	14.42	17.62	17.67
	5755	151	14.79	14.32	17.57	17.61
	5795	159	14.73	14.25	17.50	17.53

Table 9.4.9 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ax (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (40MHz)	5190	38	10.50	10.39	13.45	13.37
	5230	46	13.89	13.79	16.85	16.85
	5270	54	13.83	13.79	16.82	16.85
	5310	62	10.33	10.21	13.28	13.33
	5510	102	10.64	9.90	13.29	13.39
	5590	118	14.28	13.75	17.03	17.04
	5670	134	14.16	13.81	17.00	17.03
	5710	142	14.39	13.60	17.03	17.04
	5755	151	14.40	13.53	17.00	17.04
	5795	159	14.29	13.48	16.92	16.91

Table 9.4.10 IEEE 802.11ax Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-80)	5210	42	10.92	10.24	13.60	13.59
	5290	58	10.50	10.23	13.38	13.46
	5530	106	13.04	12.11	15.61	15.66
	5610	122	13.18	12.19	15.72	15.76
	5690	138	13.01	12.21	15.64	15.64
	5775	155	13.02	11.78	15.45	15.47

Table 9.4.11 IEEE 802.11ac VHT80 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ax (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (80MHz)	5210	42	10.64	10.19	13.43	13.39
	5290	58	10.27	10.25	13.27	13.32
	5530	106	12.74	11.96	15.38	15.50
	5610	122	12.82	12.09	15.48	15.64
	5690	138	12.69	12.03	15.38	15.49
	5775	155	12.62	11.61	15.15	15.29

Table 9.4.12 IEEE 802.11ax Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, duo to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Burst Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	12.5
	Nominal	11.5
Bluetooth 2 Mbps	Maximum	12.5
	Nominal	11.5
Bluetooth 3 Mbps	Maximum	12.5
	Nominal	11.5
Bluetooth LE	Maximum	7.0
	Nominal	6.0

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	11.35
	Nominal	10.35
Bluetooth 2 Mbps	Maximum	11.35
	Nominal	10.35
Bluetooth 3 Mbps	Maximum	11.35
	Nominal	10.35
Bluetooth (LE / 1Mbps)	Maximum	6.30
	Nominal	5.30
Bluetooth (LE / 2Mbps)	Maximum	4.59
	Nominal	3.59

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	10.97	9.82	11.14	9.99	11.14	9.99
Mid	2441	10.81	9.66	10.82	9.67	10.84	9.69
High	2480	8.64	7.49	8.88	7.73	8.89	7.74

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	4.88	4.18	4.87	2.47
Mid	2440	4.94	4.24	4.79	2.39
High	2480	3.61	2.91	3.61	1.21

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(A).
- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum Burst power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(B).
- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- 4) Power levels were measured by a Power Meter.

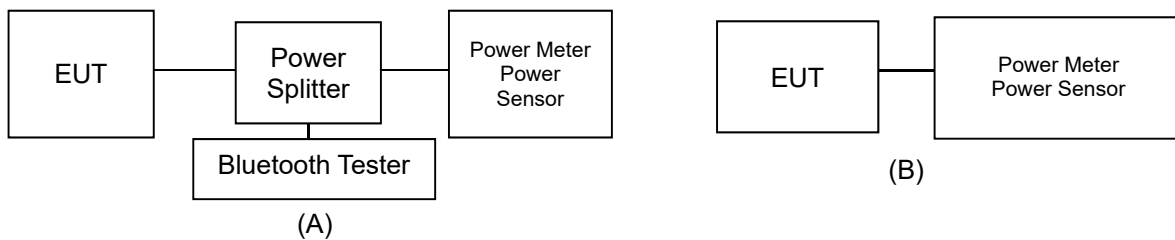


Figure 9.5.1 Average Power Measurement Setup

Bluetooth Transmission Plot

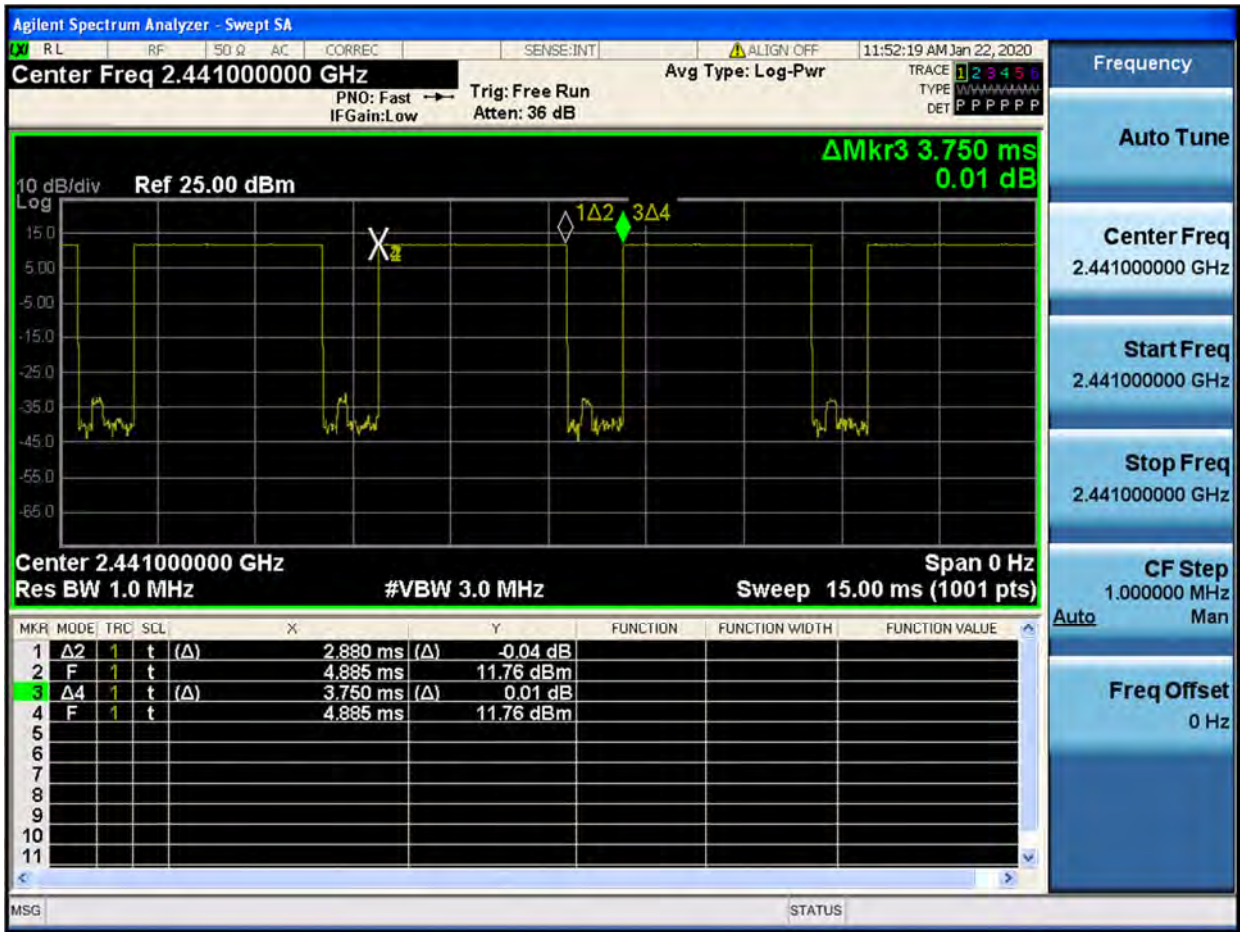


Figure 9.5.2 Bluetooth Transmission Plot

Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Dec.31. 2019	750 Head	21.2	21.8	707.5	42.129	0.887	41.168	0.857	-2.28	-3.38
				750.0	41.900	0.890	40.609	0.897	-3.08	0.79
Jan.02. 2020	750 Body	21.3	21.2	707.5	55.699	0.960	56.230	0.927	0.95	-3.44
				750.0	55.531	0.963	55.771	0.966	0.43	0.31
Dec. 27. 2019	835 Head	21.2	21.3	821.5	41.566	0.898	40.485	0.895	-2.60	-0.33
				824.2	41.552	0.899	40.467	0.898	-2.61	-0.11
				826.4	41.542	0.899	40.456	0.900	-2.61	0.11
				829.0	41.528	0.899	40.437	0.903	-2.63	0.44
				831.5	41.519	0.900	40.421	0.905	-2.64	0.56
				835.0	41.500	0.900	40.395	0.908	-2.66	0.89
				836.5	41.500	0.901	40.386	0.910	-2.68	1.00
				836.6	41.500	0.901	40.388	0.910	-2.68	1.00
				841.5	41.500	0.906	40.336	0.915	-2.80	0.99
				844.0	41.500	0.910	40.311	0.917	-2.87	0.77
				846.6	41.500	0.912	40.284	0.919	-2.93	0.77
848.8	41.500	0.914	40.254	0.921	-3.00	0.77				
Dec. 30. 2019	835 Body	22.1	22.0	821.5	55.255	0.969	56.483	0.935	2.22	-3.51
				824.2	55.243	0.969	56.456	0.937	2.20	-3.30
				826.4	55.235	0.969	56.451	0.939	2.20	-3.10
				829.0	55.223	0.970	56.434	0.942	2.19	-2.89
				831.5	55.216	0.970	56.422	0.944	2.18	-2.68
				835.0	55.200	0.970	56.405	0.947	2.18	-2.37
				836.5	55.197	0.971	56.392	0.948	2.16	-2.37
				836.6	55.197	0.971	56.391	0.949	2.16	-2.27
				841.5	55.182	0.977	56.352	0.953	2.12	-2.46
				844.0	55.172	0.981	56.326	0.956	2.09	-2.55
				846.6	55.166	0.984	56.304	0.958	2.06	-2.64
848.8	55.160	0.986	56.291	0.960	2.05	-2.64				
Dec. 31. 2019	1800 Head	21.0	20.8	1712.4	40.126	1.350	41.115	1.298	2.46	-3.85
				1720.0	40.114	1.354	41.062	1.303	2.36	-3.77
				1732.4	40.097	1.361	40.977	1.312	2.19	-3.60
				1732.5	40.097	1.361	40.976	1.312	2.19	-3.60
				1745.0	40.079	1.369	40.894	1.321	2.03	-3.51
				1752.6	40.069	1.373	40.849	1.328	1.95	-3.28
				1770.0	40.043	1.383	40.749	1.343	1.76	-2.89
				1800.0	40.000	1.400	40.597	1.370	1.49	-2.14
Jan. 02. 2020	1800 Body	21.0	21.1	1712.4	53.596	1.464	52.549	1.495	-1.95	2.12
				1720.0	53.580	1.469	52.519	1.501	-1.98	2.18
				1732.4	53.556	1.477	52.461	1.512	-2.04	2.37
				1732.5	53.556	1.477	52.459	1.512	-2.05	2.37
				1745.0	53.530	1.485	52.404	1.522	-2.10	2.49
				1752.6	53.516	1.489	52.370	1.528	-2.14	2.62
				1770.0	53.480	1.501	52.288	1.540	-2.23	2.60
1800.0	53.300	1.520	52.162	1.564	-2.14	2.89				
Dec. 27. 2019	1900 Head	21.1	21.0	1850.2	40.000	1.400	40.442	1.356	1.11	-3.14
				1852.4	40.000	1.400	40.436	1.358	1.09	-3.00
				1860.0	40.000	1.400	40.410	1.365	1.02	-2.50
				1880.0	40.000	1.400	40.339	1.383	0.85	-1.21
				1900.0	40.000	1.400	40.269	1.402	0.67	0.14
				1907.6	40.000	1.400	40.247	1.409	0.62	0.64
				1909.8	40.000	1.400	40.242	1.410	0.60	0.71
Dec. 30. 2019	1900 Body	21.2	21.2	1850.2	53.300	1.520	52.703	1.478	-1.12	-2.76
				1852.4	53.300	1.520	52.700	1.480	-1.13	-2.63
				1860.0	53.300	1.520	52.681	1.487	-1.16	-2.17
				1880.0	53.300	1.520	52.625	1.506	-1.27	-0.92
				1900.0	53.300	1.520	52.570	1.525	-1.37	0.33
				1907.6	53.300	1.520	52.551	1.531	-1.41	0.72
				1909.8	53.300	1.520	52.547	1.533	-1.41	0.86

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jan. 03. 2020	2450 Head	21.3	21.6	2402.0	39.282	1.757	40.503	1.797	3.11	2.28
				2412.0	39.265	1.766	40.469	1.809	3.07	2.43
				2437.0	39.222	1.788	40.392	1.837	2.98	2.74
				2441.0	39.215	1.792	40.379	1.842	2.97	2.79
				2450.0	39.200	1.800	40.353	1.852	2.94	2.89
				2462.0	39.184	1.813	40.321	1.865	2.90	2.87
				2467.0	39.177	1.818	40.304	1.870	2.88	2.86
				2472.0	39.171	1.823	40.288	1.875	2.85	2.85
2480.0	39.160	1.832	40.260	1.884	2.81	2.84				
Jan. 06. 2020	2450 Body	21.4	21.6	2402.0	52.764	1.904	51.116	1.866	-3.12	-2.00
				2412.0	52.751	1.914	51.089	1.879	-3.15	-1.83
				2437.0	52.717	1.938	51.026	1.909	-3.21	-1.50
				2441.0	52.712	1.941	51.016	1.913	-3.22	-1.44
				2450.0	52.700	1.950	50.995	1.924	-3.24	-1.33
				2462.0	52.685	1.967	50.968	1.937	-3.26	-1.53
				2467.0	52.678	1.974	50.954	1.942	-3.27	-1.62
				2472.0	52.672	1.981	50.940	1.948	-3.29	-1.67
2480.0	52.662	1.993	50.914	1.958	-3.32	-1.76				
Jan. 13. 2020	5200 Body	20.2	20.4	5180.0	49.041	5.276	50.803	5.146	3.59	-2.46
				5190.0	49.028	5.288	50.772	5.160	3.56	-2.42
				5200.0	49.014	5.299	50.749	5.176	3.54	-2.32
				5210.0	49.001	5.311	50.729	5.190	3.53	-2.28
				5220.0	48.987	5.323	50.707	5.202	3.51	-2.27
				5230.0	48.974	5.334	50.680	5.215	3.48	-2.23
				5240.0	48.960	5.346	50.650	5.229	3.45	-2.19
Jan. 08. 2020	5300 Head	20.4	20.6	5260.0	35.940	4.720	35.094	4.831	-2.35	2.35
				5270.0	35.930	4.730	35.083	4.842	-2.36	2.37
				5280.0	35.920	4.740	35.074	4.850	-2.36	2.32
				5290.0	35.910	4.750	35.055	4.857	-2.38	2.25
				5300.0	35.900	4.760	35.029	4.867	-2.43	2.25
				5310.0	35.890	4.770	35.005	4.880	-2.47	2.31
				5320.0	35.880	4.780	34.989	4.893	-2.48	2.36
Jan. 13. 2020	5300 Body	20.2	20.4	5260.0	48.933	5.369	50.590	5.258	3.39	-2.07
				5270.0	48.919	5.381	50.563	5.271	3.36	-2.04
				5280.0	48.906	5.393	50.538	5.282	3.34	-2.06
				5290.0	48.892	5.404	50.507	5.292	3.30	-2.07
				5300.0	48.879	5.416	50.476	5.306	3.27	-2.03
				5310.0	48.865	5.428	50.451	5.324	3.25	-1.92
5320.0	48.851	5.439	50.433	5.340	3.24	-1.82				

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jan. 09. 2020	5600 Head	20.8	21.0	5500.0	35.650	4.965	34.484	5.125	-3.27	3.22
				5510.0	35.635	4.976	34.482	5.133	-3.24	3.16
				5530.0	35.605	4.997	34.458	5.158	-3.22	3.22
				5550.0	35.575	5.018	34.444	5.179	-3.18	3.21
				5580.0	35.530	5.049	34.395	5.215	-3.19	3.29
				5600.0	35.500	5.070	34.383	5.238	-3.15	3.31
				5660.0	35.440	5.130	34.282	5.301	-3.27	3.33
				5670.0	35.430	5.140	34.257	5.311	-3.31	3.33
				5690.0	35.410	5.160	34.219	5.339	-3.36	3.47
				5710.0	35.390	5.180	34.201	5.361	-3.36	3.49
Jan. 14. 2020	5600 Body	21.0	20.8	5500.0	48.607	5.650	49.788	5.635	2.43	-0.27
				5510.0	48.594	5.661	49.755	5.647	2.39	-0.25
				5530.0	48.566	5.685	49.677	5.678	2.29	-0.12
				5550.0	48.539	5.708	49.609	5.708	2.20	0.00
				5580.0	48.499	5.743	49.514	5.762	2.09	0.33
				5600.0	48.471	5.766	49.477	5.792	2.08	0.45
				5660.0	48.390	5.836	49.265	5.871	1.81	0.60
				5670.0	48.376	5.848	49.229	5.889	1.76	0.70
				5690.0	48.349	5.872	49.173	5.928	1.70	0.95
				5710.0	48.322	5.895	49.143	5.958	1.70	1.07
Jan. 10. 2020	5800 Head	21.0	21.1	5745.0	35.355	5.215	34.252	5.399	-3.12	3.53
				5755.0	35.345	5.225	34.240	5.413	-3.13	3.60
				5775.0	35.325	5.245	34.206	5.432	-3.17	3.57
				5785.0	35.315	5.255	34.185	5.445	-3.20	3.62
				5795.0	35.305	5.265	34.465	5.459	-2.38	3.68
				5800.0	35.300	5.270	34.156	5.466	-3.24	3.72
Jan. 08. 2020	5800 Body	20.6	20.3	5825.0	35.275	5.296	34.137	5.492	-3.23	3.70
				5745.0	48.275	5.936	50.112	5.937	3.81	0.02
				5755.0	48.261	5.947	50.074	5.950	3.76	0.05
				5775.0	48.234	5.971	49.944	5.982	3.55	0.18
				5785.0	48.220	5.982	49.894	6.007	3.47	0.42
				5795.0	48.207	5.994	49.863	6.035	3.44	0.68
Jan. 08. 2020	5800 Body	20.6	20.3	5800.0	48.200	6.000	49.858	6.049	3.44	0.82
				5825.0	48.166	6.029	49.877	6.086	3.55	0.95

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r'(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
D	750	D750V3, SN:1049	Dec. 31. 2019	Head	21.2	21.8	3933	250	8.38	1.98	7.92	-5.49
D	750	D750V3, SN:1049	Jan. 02. 2020	Body	21.3	21.2	3933	250	8.70	2.19	8.76	0.69
D	835	D835V2, SN:464	Dec. 27. 2019	Head	21.2	21.3	3933	250	9.59	2.23	8.92	-6.99
D	835	D835V2, SN:464	Dec. 30. 2019	Body	22.1	22.0	3933	250	9.68	2.36	9.44	-2.48
C	1800	D1800V2, SN:2d047	Dec. 31. 2019	Head	21.0	20.8	7337	100	38.1	3.98	39.80	4.46
C	1800	D1800V2, SN:2d047	Jan. 02. 2020	Body	21.0	21.1	7337	100	38.0	3.79	37.90	-0.26
C	1900	D1900V2, SN:5d029	Dec. 27. 2019	Head	21.1	21.0	7337	100	40.4	4.13	41.30	2.23
C	1900	D1900V2, SN:5d029	Dec. 30. 2019	Body	21.2	21.2	7337	100	39.9	3.81	38.10	-4.51
D	2450	D2450V2, SN: 726	Jan. 03. 2020	Head	21.3	21.6	3933	100	51.2	5.06	50.60	-1.17
D	2450	D2450V2, SN: 726	Jan. 06. 2020	Body	21.4	21.6	3933	100	52.0	5.38	53.80	3.46
C	5200	D5GHZV2, SN:1103	Jan. 13. 2020	Body	20.2	20.4	7337	100	75.5	7.22	72.20	-4.37
C	5300	D5GHZV2, SN:1103	Jan. 08. 2020	Head	20.4	20.6	7337	100	82.4	8.31	83.10	0.85
C	5300	D5GHZV2, SN:1103	Jan. 13. 2020	Body	20.2	20.4	7337	100	74.4	7.37	73.70	-0.94
C	5500	D5GHZV2, SN:1103	Jan. 09. 2020	Head	20.8	21.0	7337	100	84.0	8.01	80.10	-4.64
C	5500	D5GHZV2, SN:1103	Jan. 14. 2020	Body	21.0	20.8	7337	100	79.6	7.82	78.20	-1.76
C	5800	D5GHZV2, SN:1103	Jan. 09. 2020	Head	20.8	21.0	7337	100	81.4	8.25	82.50	1.35
C	5800	D5GHZV2, SN:1103	Jan. 14. 2020	Body	21.0	20.8	7337	100	74.8	7.57	75.70	1.20
C	5800	D5GHZV2, SN:1103	Jan. 10. 2020	Head	21.0	21.1	7337	100	81.4	7.97	79.70	-2.09
D	5800	D5GHZV2, SN:1103	Jan. 08. 2020	Body	20.6	20.3	3933	100	74.8	7.39	73.90	-1.20

Table 10.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
C	5300	D5GHZV2, SN:1103	Jan. 13. 2020	Body	20.2	20.4	7337	100	20.9	2.12	21.20	1.44
C	5500	D5GHZV2, SN:1103	Jan. 14. 2020	Body	21.0	20.8	7337	100	22.1	2.28	22.80	3.17
C	5800	D5GHZV2, SN:1103	Jan. 14. 2020	Body	21.0	20.8	7337	100	20.9	2.20	22.00	5.26
D	5800	D5GHZV2, SN:1103	Jan. 08. 2020	Body	20.6	20.3	3933	100	20.9	2.03	20.30	-2.87

Note(s)

1. System Verification was measured with input 250 mW, 100 mW and normalized to 1W.
2. Full system validation status and results can be found in Appendix D.




Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.20	33.10	0.150	Left Touch	FCC #1	1	1:8.3	0.175	1.023	0.179	A1
836.6	190	GSM850	GSM	33.20	33.10	-0.010	Right Touch	FCC #1	1	1:8.3	0.099	1.023	0.101	
836.6	190	GSM850	GSM	33.20	33.10	-0.040	Left Tilt	FCC #1	1	1:8.3	0.094	1.023	0.096	
836.6	190	GSM850	GSM	33.20	33.10	0.180	Right Tilt	FCC #1	1	1:8.3	0.077	1.023	0.079	
836.6	190	GSM850	GPRS	31.20	31.20	-0.100	Left Touch	FCC #1	2	1:4.15	0.204	1.000	0.204	A2
836.6	190	GSM850	GPRS	31.20	31.20	0.110	Right Touch	FCC #1	2	1:4.15	0.130	1.000	0.130	
836.6	190	GSM850	GPRS	31.20	31.20	-0.070	Left Tilt	FCC #1	2	1:4.15	0.107	1.000	0.107	
836.6	190	GSM850	GPRS	31.20	31.20	-0.110	Right Tilt	FCC #1	2	1:4.15	0.097	1.000	0.097	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.20	30.10	0.060	Left Touch	FCC #1	1	1:8.3	0.032	1.023	0.033	A3
1880.0	661	PCS1900	PCS	30.20	30.10	-0.140	Right Touch	FCC #1	1	1:8.3	0.021	1.023	0.021	
1880.0	661	PCS1900	PCS	30.20	30.10	0.110	Left Tilt	FCC #1	1	1:8.3	0.021	1.023	0.021	
1880.0	661	PCS1900	PCS	30.20	30.10	-0.170	Right Tilt	FCC #1	1	1:8.3	0.018	1.023	0.018	
1880.0	661	PCS1900	GPRS	27.20	27.20	0.120	Left Touch	FCC #1	3	1:2.77	0.042	1.000	0.042	A4
1880.0	661	PCS1900	GPRS	27.20	27.20	0.050	Right Touch	FCC #1	3	1:2.77	0.030	1.000	0.030	
1880.0	661	PCS1900	GPRS	27.20	27.20	0.120	Left Tilt	FCC #1	3	1:2.77	0.025	1.000	0.025	
1880.0	661	PCS1900	GPRS	27.20	27.20	0.100	Right Tilt	FCC #1	3	1:2.77	0.026	1.000	0.026	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.180	Left Touch	FCC #1	1:1	0.283	1.002	0.284	A5
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.100	Right Touch	FCC #1	1:1	0.230	1.002	0.230	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.080	Left Tilt	FCC #1	1:1	0.159	1.002	0.159	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.010	Right Tilt	FCC #1	1:1	0.149	1.002	0.149	
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.080	Left Touch	FCC #1	1:1	0.158	1.002	0.158	
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.180	Left Touch	FCC #1	1:1	0.176	1.002	0.176	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.010	Left Touch	FCC #1	1:1	0.182	1.002	0.182	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram		

- Note(s):
 1. Blue entries represent additional Head SAR Test Position (#1: DD angle: 0 degree) with the worst case position.
 2. Green entries represent additional Head SAR Test Position (#2: DD angle: 180 degree) with the worst case position.
 3. Orange entries represent additional Head SAR Test Position (#3: DD angle: 360 degree) with the worst case position.

Table 11.1.4 WCDMA 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.080	Left Touch	FCC #1	1:1	0.079	1.007	0.080	A6
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	-0.030	Right Touch	FCC #1	1:1	0.059	1.007	0.059	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.170	Left Tilt	FCC #1	1:1	0.058	1.007	0.058	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.130	Right Tilt	FCC #1	1:1	0.054	1.007	0.054	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram		

Table 11.1.5 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.11	0.010	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.099	1.094	0.108	A7
707.5	23095	LTE B12	10	24.50	24.15	0.120	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.058	1.084	0.063	
707.5	23095	LTE B12	10	25.50	25.11	0.190	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.099	1.094	0.108	
707.5	23095	LTE B12	10	24.50	24.15	-0.010	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.059	1.084	0.064	
707.5	23095	LTE B12	10	25.50	25.11	-0.080	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.022	1.094	0.024	
707.5	23095	LTE B12	10	24.50	24.15	-0.190	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.016	1.084	0.017	
707.5	23095	LTE B12	10	25.50	25.11	-0.050	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.050	1.094	0.055	
707.5	23095	LTE B12	10	24.50	24.15	0.000	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.031	1.084	0.034	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.6 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.50	25.21	0.190	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.265	1.069	0.283	A8
836.5	20525	LTE B5	10	24.50	24.26	-0.190	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.172	1.057	0.182	
836.5	20525	LTE B5	10	25.50	25.21	0.180	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.264	1.069	0.282	
836.5	20525	LTE B5	10	24.50	24.26	-0.100	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.144	1.057	0.152	
836.5	20525	LTE B5	10	25.50	25.21	-0.160	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.149	1.069	0.159	
836.5	20525	LTE B5	10	24.50	24.26	0.160	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.104	1.057	0.110	
836.5	20525	LTE B5	10	25.50	25.21	-0.140	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.169	1.069	0.181	
836.5	20525	LTE B5	10	24.50	24.26	-0.030	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.104	1.057	0.110	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.7 LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	23.70	23.09	-0.000	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.046	1.151	0.053	A9
1732.5	20175	LTE B4	20	22.70	22.19	0.050	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.036	1.125	0.041	
1732.5	20175	LTE B4	20	23.70	23.09	0.030	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.029	1.151	0.033	
1732.5	20175	LTE B4	20	22.70	22.19	0.000	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.020	1.125	0.023	
1732.5	20175	LTE B4	20	23.70	23.09	0.050	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.018	1.151	0.021	
1732.5	20175	LTE B4	20	22.70	22.19	0.170	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.012	1.125	0.014	
1732.5	20175	LTE B4	20	23.70	23.09	-0.150	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.030	1.151	0.035	
1732.5	20175	LTE B4	20	22.70	22.19	0.000	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.019	1.125	0.021	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.8 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1880.0	18900	LTE B2	20	23.70	23.30	0.100	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.073	1.096	0.080	A10
1880.0	18900	LTE B2	20	22.70	22.23	0.120	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.061	1.114	0.068	
1880.0	18900	LTE B2	20	23.70	23.30	0.170	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.067	1.096	0.073	
1880.0	18900	LTE B2	20	22.70	22.23	-0.090	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.043	1.114	0.048	
1880.0	18900	LTE B2	20	23.70	23.30	0.170	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.055	1.096	0.060	
1880.0	18900	LTE B2	20	22.70	22.23	0.140	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.044	1.114	0.049	
1880.0	18900	LTE B2	20	23.70	23.30	0.070	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.062	1.096	0.068	
1880.0	18900	LTE B2	20	22.70	22.23	-0.050	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.039	1.114	0.043	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.9 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.010	Left Touch	FCC #2	0.105	1	99.4	0.103	1.057	1.006	0.110	A11
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.000	Right Touch	FCC #2	0.488	1	99.4	0.487	1.057	1.006	0.497	
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.020	Left Tilt	FCC #2	0.057	1	99.4	0.052	1.057	1.006	0.055	
2462.0	11	802.11b (Ant.1)	15.50	15.26	-0.020	Right Tilt	FCC #2	0.166	1	99.4	0.159	1.057	1.006	0.169	A12
2462.0	11	802.11b (Ant.2)	15.50	15.38	-0.170	Left Touch	FCC #2	0.089	1	99.5	0.090	1.028	1.005	0.093	
2462.0	11	802.11b (Ant.2)	15.50	15.38	-0.040	Right Touch	FCC #2	0.227	1	99.5	0.206	1.028	1.005	0.213	
2462.0	11	802.11b (Ant.2)	15.50	15.38	0.100	Left Tilt	FCC #2	0.126	1	99.5	0.126	1.028	1.005	0.130	A13
2462.0	11	802.11b (Ant.2)	15.50	15.38	0.060	Right Tilt	FCC #2	0.244	1	99.5	0.239	1.028	1.005	0.247	
2437.0	6	802.11g (MIMO)	18.50	17.90	-0.130	Left Touch	FCC #2	0.126	1	98.8	0.103	1.148	1.012	0.120	
2437.0	6	802.11g (MIMO)	18.50	17.90	0.090	Right Touch	FCC #2	0.507	1	98.8	0.464	1.148	1.012	0.539	A13
2437.0	6	802.11g (MIMO)	18.50	17.90	0.120	Left Tilt	FCC #2	0.171	1	98.8	0.170	1.148	1.012	0.198	
2437.0	6	802.11g (MIMO)	18.50	17.90	-0.020	Right Tilt	FCC #2	0.295	1	98.8	0.278	1.148	1.012	0.323	

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.497	2437	802.11g	OFDM	15.5	1.000	0.497	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.497	2437	802.11n	OFDM	15.5	1.000	0.497	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.497	2437	802.11ax	OFDM	15.5	1.000	0.497	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.497	2437	802.11ax	OFDM	14.5	0.794	0.395	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.247	2437	802.11g	OFDM	15.5	1.000	0.247	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.247	2437	802.11n	OFDM	15.5	1.000	0.247	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.247	2437	802.11ac	OFDM	15.5	1.000	0.247	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.247	2437	802.11ax	OFDM	14.5	0.794	0.196	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.539	2437	802.11n	OFDM	18.5	1.000	0.539	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.539	2437	802.11ac	OFDM	18.5	1.000	0.539	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.539	2437	802.11ax	OFDM	17.5	0.794	0.428	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
 1. SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
 2. Per April 2019 TCB Workshop Notes, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection.
 3. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

Table 11.1.10 UNII Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode (Antenna)	Dual Display Accessory Configuration	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch															
5280.0	56	802.11a (Ant.1)	-	16.00	15.61	0.120	Left Touch	FCC #2	0.079	6	98.7	0.088	1.094	1.013	0.098	A14
5280.0	56	802.11a (Ant.1)	-	16.00	15.61	0.190	Right Touch	FCC #2	0.344	6	98.7	0.335	1.094	1.013	0.371	
5280.0	56	802.11a (Ant.1)	-	16.00	15.61	-0.190	Left Tilt	FCC #2	0.075	6	98.7	0.080	1.094	1.013	0.089	
5280.0	56	802.11a (Ant.1)	-	16.00	15.61	-0.040	Right Tilt	FCC #2	0.234	6	98.7	0.249	1.094	1.013	0.276	A15
5260.0	52	802.11a (Ant.2)	-	16.00	15.68	0.080	Left Touch	FCC #2	0.219	6	98.8	0.277	1.076	1.012	0.302	
5260.0	52	802.11a (Ant.2)	-	16.00	15.68	0.090	Right Touch	FCC #2	0.424	6	98.8	0.477	1.076	1.012	0.519	
5260.0	52	802.11a (Ant.2)	-	16.00	15.68	0.080	Left Tilt	FCC #2	0.179	6	98.8	0.221	1.076	1.012	0.241	A16
5260.0	52	802.11a (Ant.2)	-	16.00	15.68	-0.050	Right Tilt	FCC #2	0.348	6	98.8	0.423	1.076	1.012	0.461	
5260.0	52	802.11a (MIMO)	-	19.00	18.65	0.110	Left Touch	FCC #2	0.291	6	99.1	0.359	1.094	1.009	0.396	
5260.0	52	802.11a (MIMO)	-	19.00	18.65	0.170	Right Touch	FCC #2	0.507	6	99.1	0.580	1.094	1.009	0.640	A16
5260.0	52	802.11a (MIMO)	-	19.00	18.65	0.030	Left Tilt	FCC #2	0.263	6	99.1	0.286	1.094	1.009	0.316	
5260.0	52	802.11a (MIMO)	-	19.00	18.65	-0.010	Right Tilt	FCC #2	0.397	6	99.1	0.456	1.094	1.009	0.503	
5260.0	52	802.11a (MIMO)	#1	19.00	18.65	-0.000	Right Touch	FCC #2	0.081	6	99.1	0.078	1.094	1.009	0.086	A16
5260.0	52	802.11a (MIMO)	#2	19.00	18.65	0.010	Right Touch	FCC #2	0.385	6	99.1	0.420	1.094	1.009	0.464	
5260.0	52	802.11a (MIMO)	#3	19.00	18.65	0.050	Right Touch	FCC #2	0.322	6	99.1	0.312	1.094	1.009	0.344	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):
 1. Blue entries represent additional Head SAR Test Position (#1: DD angle: 0 degree) with the worst case position.
 2. Green entries represent additional Head SAR Test Position (#2: DD angle: 180 degree) with the worst case position.
 3. Orange entries represent additional Head SAR Test Position (#3: DD angle: 360 degree) with the worst case position.

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5280.0	56	802.11a (Ant.1)	OFDM	16.0	0.371	5240	802.11a	OFDM	16.0	1.000	0.371	X
5260.0	52	802.11a (Ant.2)	OFDM	16.0	0.519	5180	802.11a	OFDM	16.0	1.000	0.519	X
5260.0	52	802.11a (MIMO)	OFDM	19.0	0.640	5240	802.11a	OFDM	19.0	1.000	0.640	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.11 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5720.0	144	802.11a (Ant.1)	16.00	15.98	0.040	Left Touch	FCC #2	0.089	6	98.7	0.073	1.005	1.013	0.074	
5720.0	144	802.11a (Ant.1)	16.00	15.98	0.100	Right Touch	FCC #2	0.300	6	98.7	0.307	1.005	1.013	0.313	A17
5720.0	144	802.11a (Ant.1)	16.00	15.98	-0.140	Left Tilt	FCC #2	0.094	6	98.7	0.086	1.005	1.013	0.088	
5720.0	144	802.11a (Ant.1)	16.00	15.98	-0.150	Right Tilt	FCC #2	0.157	6	98.7	0.164	1.005	1.013	0.167	
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.090	Left Touch	FCC #2	0.121	6	98.8	0.096	1.072	1.012	0.104	
5600.0	120	802.11a (Ant.2)	16.00	15.70	-0.080	Right Touch	FCC #2	0.362	6	98.8	0.414	1.072	1.012	0.449	A18
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.060	Left Tilt	FCC #2	0.187	6	98.8	0.184	1.072	1.012	0.200	
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.010	Right Tilt	FCC #2	0.263	6	98.8	0.298	1.072	1.012	0.323	
5600.0	120	802.11a (MIMO)	19.00	18.82	0.070	Left Touch	FCC #2	0.159	6	99.1	0.161	1.072	1.009	0.174	
5600.0	120	802.11a (MIMO)	19.00	18.82	0.100	Right Touch	FCC #2	0.449	6	99.1	0.464	1.072	1.009	0.502	A19
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.040	Left Tilt	FCC #2	0.234	6	99.1	0.239	1.072	1.009	0.259	
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.010	Right Tilt	FCC #2	0.259	6	99.1	0.299	1.072	1.009	0.323	
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.030	Left Touch	FCC #2	0.080	6	98.7	0.054	1.009	1.013	0.055	
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.000	Right Touch	FCC #2	0.311	6	98.7	0.324	1.009	1.013	0.331	A20
5785.0	157	802.11a (Ant.1)	16.00	15.96	-0.120	Left Tilt	FCC #2	0.079	6	98.7	0.058	1.009	1.013	0.059	
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.000	Right Tilt	FCC #2	0.132	6	98.7	0.136	1.009	1.013	0.139	
5825.0	165	802.11a (Ant.2)	16.00	15.29	0.100	Left Touch	FCC #2	0.142	6	98.8	0.118	1.178	1.012	0.141	
5825.0	165	802.11a (Ant.2)	16.00	15.29	-0.020	Right Touch	FCC #2	0.298	6	98.8	0.327	1.178	1.012	0.390	A21
5825.0	165	802.11a (Ant.2)	16.00	15.29	-0.100	Left Tilt	FCC #2	0.140	6	98.8	0.133	1.178	1.012	0.159	
5825.0	165	802.11a (Ant.2)	16.00	15.29	0.070	Right Tilt	FCC #2	0.197	6	98.8	0.229	1.178	1.012	0.273	
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.020	Left Touch	FCC #2	0.127	6	99.1	0.122	1.178	1.009	0.145	
5745.0	149	802.11a (MIMO)	19.00	18.60	0.170	Right Touch	FCC #2	0.315	6	99.1	0.322	1.178	1.009	0.383	A22
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.150	Left Tilt	FCC #2	0.153	6	99.1	0.147	1.178	1.009	0.175	
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.060	Right Tilt	FCC #2	0.276	6	99.1	0.303	1.178	1.009	0.360	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 11.1.12 Bluetooth Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2441.0	39	Bluetooth	11.35	9.66	0.000	Left Touch	FCC #2	1	76.8	0.047	1.476	1.302	0.090		
2441.0	39	Bluetooth	11.35	9.66	-0.150	Right Touch	FCC #2	1	76.8	0.170	1.476	1.302	0.327	A23	
2441.0	39	Bluetooth	11.35	9.66	0.000	Left Tilt	FCC #2	1	76.8	0.025	1.476	1.302	0.048		
2441.0	39	Bluetooth	11.35	9.66	0.020	Right Tilt	FCC #2	1	76.8	0.091	1.476	1.302	0.175		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.20	33.10	-0.080	10 mm [Front]	FCC #1	1	1:8.3	0.487	1.023	0.498	A24
836.6	190	GSM850	GSM	33.20	33.10	0.000	10 mm [Rear]	FCC #1	1	1:8.3	0.431	1.023	0.441	
836.6	190	GSM850	GPRS	31.20	31.20	-0.030	10 mm [Front]	FCC #1	2	1:4.15	0.508	1.000	0.508	A25
836.6	190	GSM850	GPRS	31.20	31.20	0.070	10 mm [Rear]	FCC #1	2	1:4.15	0.484	1.000	0.484	
1880.0	661	PCS1900	PCS	30.20	30.10	0.060	10 mm [Front]	FCC #1	1	1:8.3	0.234	1.023	0.239	A26
1880.0	661	PCS1900	PCS	30.20	30.10	-0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.228	1.023	0.233	
1880.0	661	PCS1900	GPRS	27.20	27.20	-0.170	10 mm [Front]	FCC #1	3	1:2.77	0.344	1.000	0.344	A27
1880.0	661	PCS1900	GPRS	27.20	27.20	-0.080	10 mm [Rear]	FCC #1	3	1:2.77	0.326	1.000	0.326	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.010	10 mm [Front]	FCC #1	N/A	1:1	0.544	1.002	0.545	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.610	1.002	0.611	A28
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	-0.040	10 mm [Front]	FCC #1	N/A	1:1	0.560	1.007	0.564	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.566	1.007	0.570	A29
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

Table 11.2.2 LTE B12, B5, B4, B2 Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode/ Band	BW [MHz]	Dual Display Accessory Configuration	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																	
707.5	23095	LTE B12	10	-	25.50	25.11	0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.193	1.094	0.211	
707.5	23095	LTE B12	10	-	24.50	24.15	0.020	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.120	1.084	0.130	
707.5	23095	LTE B12	10	-	25.50	25.11	0.000	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.240	1.094	0.263	A30
707.5	23095	LTE B12	10	-	24.50	24.15	0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.140	1.084	0.152	
836.5	20525	LTE B5	10	-	25.50	25.21	-0.040	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.735	1.069	0.786	
836.5	20525	LTE B5	10	-	24.50	24.26	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.493	1.057	0.521	
836.5	20525	LTE B5	10	-	24.50	24.21	0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.483	1.069	0.516	
836.5	20525	LTE B5	10	-	25.50	25.21	0.050	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.843	1.069	0.901	A31
836.5	20525	LTE B5	10	-	24.50	24.26	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.544	1.057	0.575	
836.5	20525	LTE B5	10	-	24.50	24.21	0.130	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.548	1.069	0.586	
836.5	20525	LTE B5	10	#1	25.50	25.21	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.720	1.069	0.770	
836.5	20525	LTE B5	10	#2	25.50	25.21	0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.710	1.069	0.759	
836.5	20525	LTE B5	10	#3	25.50	25.21	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.550	1.069	0.588	
836.5	20525	LTE B5	10	-	25.50	25.21	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.800	1.069	0.855	
1732.5	20175	LTE B4	20	-	23.70	23.09	0.000	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.338	1.151	0.389	
1732.5	20175	LTE B4	20	-	22.70	22.19	0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.288	1.125	0.324	
1732.5	20175	LTE B4	20	-	23.70	23.09	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.370	1.151	0.426	A32
1732.5	20175	LTE B4	20	-	22.70	22.19	-0.030	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.302	1.125	0.340	
1880.0	18900	LTE B2	20	-	23.70	23.30	-0.060	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.602	1.096	0.660	
1880.0	18900	LTE B2	20	-	22.70	22.23	-0.000	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.462	1.114	0.515	
1880.0	18900	LTE B2	20	-	23.70	23.30	-0.070	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.619	1.096	0.678	A33
1880.0	18900	LTE B2	20	-	22.70	22.23	-0.100	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.492	1.114	0.548	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram							

- Note(s):
- Blue entries represent additional Body-Worn SAR Test Position (#1: DD angle: 0 degree) with the worst case position.
 - Green entries represent additional Body-Worn SAR Test Position (#2: DD angle: 180 degree) with the worst case position.
 - Orange entries represent additional Body-Worn SAR Test Position (#3: DD angle: 360 degree) with the worst case position.
 - Yellow entries represent variability measurements.

Table 11.2.3 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.010	10 mm [Front]	FCC #2	0.085	1	99.4	0.087	1.057	1.006	0.093	A34
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.100	10 mm [Rear]	FCC #2	0.075	1	99.4	0.071	1.057	1.006	0.076	
2462.0	11	802.11b (Ant.2)	15.50	15.38	-0.130	10 mm [Front]	FCC #2	0.044	1	99.5	0.047	1.028	1.005	0.049	A35
2462.0	11	802.11b (Ant.2)	15.50	15.38	0.180	10 mm [Rear]	FCC #2	0.045	1	99.5	0.047	1.028	1.005	0.049	
2437.0	6	802.11g (MIMO)	18.50	17.90	0.020	10 mm [Front]	FCC #2	0.110	1	98.8	0.116	1.148	1.012	0.135	A36
2437.0	6	802.11g (MIMO)	18.50	17.90	0.110	10 mm [Rear]	FCC #2	0.079	1	98.8	0.078	1.148	1.012	0.091	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.093	2437	802.11g	OFDM	15.5	1.000	0.093	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.093	2437	802.11n	OFDM	15.5	1.000	0.093	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.093	2437	802.11ac	OFDM	15.5	1.000	0.093	X
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.093	2437	802.11ax	OFDM	14.5	0.794	0.074	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.049	2437	802.11g	OFDM	15.5	1.000	0.049	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.049	2437	802.11n	OFDM	15.5	1.000	0.049	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.049	2437	802.11ac	OFDM	15.5	1.000	0.049	X
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.049	2437	802.11ax	OFDM	14.5	0.794	0.039	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.135	2437	802.11n	OFDM	18.5	1.000	0.135	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.135	2437	802.11ac	OFDM	18.5	1.000	0.135	X
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.135	2437	802.11ax	OFDM	17.5	0.794	0.107	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram	

- Note(s):
- SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
 - Per April 2019 TCB Workshop Notes, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection.
 - Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

Table 11.2.4 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5280.0	56	802.11a (Ant.1)	16.00	15.81	-0.120	10 mm [Front]	FCC #2	0.062	6	98.7	0.047	1.094	1.013	0.052	
5280.0	56	802.11a (Ant.1)	16.00	15.81	0.100	10 mm [Rear]	FCC #2	0.128	6	98.7	0.112	1.094	1.013	0.124	A37
5260.0	52	802.11a (Ant.2)	16.00	15.68	0.120	10 mm [Front]	FCC #2	0.053	6	98.8	0.045	1.076	1.012	0.049	
5260.0	52	802.11a (Ant.2)	16.00	15.68	-0.070	10 mm [Rear]	FCC #2	0.149	6	98.8	0.150	1.076	1.012	0.163	A38
5260.0	52	802.11a (MIMO)	19.00	18.65	-0.040	10 mm [Front]	FCC #2	0.102	6	99.1	0.103	1.094	1.009	0.114	
5260.0	52	802.11a (MIMO)	19.00	18.65	-0.030	10 mm [Rear]	FCC #2	0.250	6	99.1	0.240	1.094	1.009	0.265	A39
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5280.0	56	802.11a (Ant.1)	OFDM	16.0	0.124	5240	802.11a	OFDM	16.0	1.000	0.124	X
5260.0	52	802.11a (Ant.2)	OFDM	16.0	0.163	5180	802.11a	OFDM	16.0	1.000	0.163	X
5260.0	52	802.11a (MIMO)	OFDM	19.0	0.265	5240	802.11a	OFDM	19.0	1.000	0.265	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram		

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5720.0	144	802.11a (Ant.1)	16.00	15.98	-0.120	10 mm [Front]	FCC #2	0.050	6	98.7	0.025	1.005	1.013	0.025	
5720.0	144	802.11a (Ant.1)	16.00	15.98	-0.170	10 mm [Rear]	FCC #2	0.155	6	98.7	0.153	1.005	1.013	0.156	A40
5600.0	120	802.11a (Ant.2)	16.00	15.70	-0.130	10 mm [Front]	FCC #2	0.054	6	98.8	0.033	1.072	1.012	0.036	
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.100	10 mm [Rear]	FCC #2	0.327	6	98.8	0.335	1.072	1.012	0.363	A41
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.070	10 mm [Front]	FCC #2	0.082	6	99.1	0.058	1.072	1.009	0.063	
5600.0	120	802.11a (MIMO)	19.00	18.82	0.110	10 mm [Rear]	FCC #2	0.417	6	99.1	0.426	1.072	1.009	0.461	A42
5785.0	157	802.11a (Ant.1)	16.00	15.96	-0.160	10 mm [Front]	FCC #2	0.036	6	98.7	0.026	1.009	1.013	0.027	
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.030	10 mm [Rear]	FCC #2	0.143	6	98.7	0.130	1.009	1.013	0.133	A43
5825.0	165	802.11a (Ant.2)	16.00	15.29	-0.050	10 mm [Front]	FCC #2	0.096	6	98.8	0.073	1.178	1.012	0.087	
5825.0	165	802.11a (Ant.2)	16.00	15.29	-0.000	10 mm [Rear]	FCC #2	0.371	6	98.8	0.403	1.178	1.012	0.481	A44
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.000	10 mm [Front]	FCC #2	0.075	6	99.1	0.054	1.178	1.009	0.064	
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.130	10 mm [Rear]	FCC #2	0.346	6	99.1	0.335	1.178	1.009	0.398	A45
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.2.6 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	11.35	9.66	-0.110	10 mm [Front]	FCC #2	1	76.8	0.032	1.476	1.302	0.062	A46
2441.0	39	Bluetooth	11.35	9.66	0.070	10 mm [Rear]	FCC #2	1	76.8	0.024	1.476	1.302	0.046	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram				

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

FREQUENCY		Mode/ Band	Service	MEASUREMENT RESULTS											
MHz	Ch			Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
836.6	190	GSM850	GPRS	31.20	31.20	0.000	10 mm [Bottom]	FCC #1	2	1.4.15	1.000	0.224	1.000	0.224	
836.6	190	GSM850	GPRS	31.20	31.20	-0.030	10 mm [Front]	FCC #1	2	1.4.15	1.000	0.508	1.000	0.508	A25
836.6	190	GSM850	GPRS	31.20	31.20	0.070	10 mm [Rear]	FCC #1	2	1.4.15	1.000	0.484	1.000	0.484	
836.6	190	GSM850	GPRS	31.20	31.20	-0.050	10 mm [Right]	FCC #1	2	1.4.15	1.000	0.141	1.000	0.141	
1880.0	661	PCS1900	GPRS	27.20	27.20	0.010	10 mm [Bottom]	FCC #1	3	1.2.77	1.000	0.478	1.000	0.478	A47
1880.0	661	PCS1900	GPRS	27.20	27.20	-0.170	10 mm [Front]	FCC #1	3	1.2.77	1.000	0.344	1.000	0.344	
1880.0	661	PCS1900	GPRS	27.20	27.20	-0.080	10 mm [Rear]	FCC #1	3	1.2.77	1.000	0.326	1.000	0.326	
1880.0	661	PCS1900	GPRS	27.20	27.20	0.120	10 mm [Left]	FCC #1	3	1.2.77	1.000	0.090	1.000	0.090	
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.070	10 mm [Bottom]	FCC #1	N/A	1:1	1.002	0.276	1.002	0.276	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.010	10 mm [Front]	FCC #1	N/A	1:1	1.002	0.544	1.002	0.544	
836.6	4183	WCDMA 850	RMC	25.20	25.19	-0.020	10 mm [Rear]	FCC #1	N/A	1:1	1.002	0.611	1.002	0.611	A28
836.6	4183	WCDMA 850	RMC	25.20	25.19	0.000	10 mm [Right]	FCC #1	N/A	1:1	1.002	0.197	1.002	0.197	
1852.4	9262	WCDMA 1900	RMC	23.70	23.65	0.020	10 mm [Bottom]	FCC #1	N/A	1:1	1.012	0.872	1.012	0.882	A48
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.020	10 mm [Bottom]	FCC #1	N/A	1:1	1.007	0.838	1.007	0.844	
1907.6	9538	WCDMA 1900	RMC	23.70	23.69	0.020	10 mm [Bottom]	FCC #1	N/A	1:1	1.002	0.798	1.002	0.800	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	-0.040	10 mm [Front]	FCC #1	N/A	1:1	1.007	0.560	1.007	0.564	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.020	10 mm [Rear]	FCC #1	N/A	1:1	1.007	0.566	1.007	0.570	
1880.0	9400	WCDMA 1900	RMC	23.70	23.67	0.090	10 mm [Left]	FCC #1	N/A	1:1	1.007	0.168	1.007	0.169	
1852.4	9262	WCDMA 1900	RMC	23.70	23.65	-0.020	10 mm [Bottom]	FCC #1	N/A	1:1	1.012	0.866	1.012	0.876	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Body 1.6 W/kg (mW/g) averaged over 1 gram				
Uncontrolled Exposure/General Population Exposure															

Note(s):
1. Yellow entries represent variability measurements.

Table 11.3.2 LTE B12, B5, B4, B2 Hotspot SAR

FREQUENCY		Mode/ Band	BW [MHz]	Dual Display Accessory Configuration	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																	
707.5	23095	LTE B12	10	-	25.50	25.11	-0.020	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.059	1.094	0.065	
707.5	23095	LTE B12	10	-	24.50	24.15	-0.160	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.040	1.084	0.043	
707.5	23095	LTE B12	10	-	25.50	25.11	0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.193	1.094	0.211	
707.5	23095	LTE B12	10	-	24.50	24.15	0.020	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.120	1.084	0.130	
707.5	23095	LTE B12	10	-	25.50	25.11	0.000	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.240	1.094	0.263	A30
707.5	23095	LTE B12	10	-	24.50	24.15	0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.140	1.084	0.152	
707.5	23095	LTE B12	10	-	25.50	25.11	-0.060	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.216	1.094	0.236	
707.5	23095	LTE B12	10	-	24.50	24.15	-0.050	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.149	1.084	0.162	
836.5	20525	LTE B5	10	-	25.50	25.21	0.080	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.364	1.069	0.389	
836.5	20525	LTE B5	10	-	24.50	24.26	0.100	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.234	1.057	0.247	
836.5	20525	LTE B5	10	-	25.50	25.21	-0.040	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.735	1.069	0.786	
836.5	20525	LTE B5	10	-	24.50	24.26	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.493	1.057	0.521	
836.5	20525	LTE B5	10	-	24.50	24.21	0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.483	1.069	0.516	
836.5	20525	LTE B5	10	-	25.50	25.21	0.050	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.843	1.069	0.901	A31
836.5	20525	LTE B5	10	-	24.50	24.26	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.544	1.057	0.575	
836.5	20525	LTE B5	10	-	24.50	24.21	0.130	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.548	1.069	0.586	
836.5	20525	LTE B5	10	-	25.50	25.21	-0.080	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.255	1.069	0.273	
836.5	20525	LTE B5	10	-	24.50	24.26	-0.080	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.165	1.057	0.174	
1732.5	20175	LTE B4	20	-	23.70	23.09	-0.070	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.563	1.151	0.648	A49
1732.5	20175	LTE B4	20	-	22.70	22.19	-0.040	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.475	1.125	0.534	
1732.5	20175	LTE B4	20	-	23.70	23.09	0.000	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.338	1.151	0.389	
1732.5	20175	LTE B4	20	-	22.70	22.19	0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.288	1.125	0.324	
1732.5	20175	LTE B4	20	-	23.70	23.09	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.370	1.151	0.426	
1732.5	20175	LTE B4	20	-	22.70	22.19	-0.030	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.302	1.125	0.340	
1732.5	20175	LTE B4	20	-	23.70	23.09	0.090	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.131	1.151	0.151	
1732.5	20175	LTE B4	20	-	22.70	22.19	0.140	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.100	1.125	0.113	
1860.0	18700	LTE B2	20	-	23.70	23.12	0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.870	1.143	0.994	A50
1880.0	18900	LTE B2	20	-	23.70	23.30	0.020	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.830	1.096	0.910	
1880.0	18900	LTE B2	20	-	22.70	22.23	0.020	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.662	1.114	0.737	
1880.0	18900	LTE B2	20	-	22.70	22.17	-0.190	1	10 mm [Bottom]	FCC #1	QPSK	100	0	1:1	0.550	1.130	0.622	
1900.0	19100	LTE B2	20	-	23.70	23.12	0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.777	1.143	0.888	
1880.0	18900	LTE B2	20	-	23.70	23.30	-0.060	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.602	1.096	0.660	
1880.0	18900	LTE B2	20	-	22.70	22.23	-0.000	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.462	1.114	0.515	
1880.0	18900	LTE B2	20	-	23.70	23.30	-0.070	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.619	1.096	0.678	
1880.0	18900	LTE B2	20	-	22.70	22.23	-0.100	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.492	1.114	0.548	
1880.0	18900	LTE B2	20	-	23.70	23.30	0.130	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.179	1.096	0.196	
1880.0	18900	LTE B2	20	-	22.70	22.23	0.100	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.137	1.114	0.153	
1860.0	18700	LTE B2	20	#1	23.70	23.12	0.050	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.494	1.143	0.565	
1860.0	18700	LTE B2	20	#2	23.70	23.12	-0.120	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.411	1.143	0.470	
1860.0	18700	LTE B2	20	#3	23.70	23.12	0.110	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.424	1.143	0.485	
1860.0	18700	LTE B2	20	-	23.70	23.12	0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.864	1.143	0.988	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Body 1.6 W/kg (mW/g) averaged over 1 gram							
Uncontrolled Exposure/General Population Exposure																		

Note(s):
1. Blue entries represent additional Hotspot SAR Test Position (#1: DD angle: 0 degree) with the worst case position.
2. Green entries represent additional Hotspot SAR Test Position (#2: DD angle: 180 degree) with the worst case position.
3. Orange entries represent additional Hotspot SAR Test Position (#3: DD angle: 360 degree) with the worst case position.
4. Yellow entries represent variability measurements.

Table 11.3.3 DTS Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #	
Mhz	Ch															
2462.0	11	802.11b (Ant.1)	15.50	15.26	-0.000	10 mm [Top]	FCC #2	0.052	1	99.4	0.051	1.057	1.006	0.054		
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.010	10 mm [Front]	FCC #2	0.085	1	99.4	0.087	1.057	1.006	0.093		
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.100	10 mm [Rear]	FCC #2	0.075	1	99.4	0.071	1.057	1.006	0.076		
2462.0	11	802.11b (Ant.1)	15.50	15.26	0.170	10 mm [Left]	FCC #2	0.154	1	99.4	0.156	1.057	1.006	0.166	A51	
2462.0	11	802.11b (Ant.2)	15.50	15.38	-0.030	10 mm [Top]	FCC #2	0.070	1	99.5	0.069	1.028	1.005	0.071	A52	
2462.0	11	802.11b (Ant.2)	15.50	15.38	-0.130	10 mm [Front]	FCC #2	0.044	1	99.5	0.047	1.028	1.005	0.049		
2462.0	11	802.11b (Ant.2)	15.50	15.38	0.180	10 mm [Rear]	FCC #2	0.045	1	99.5	0.047	1.028	1.005	0.049		
2462.0	11	802.11b (Ant.2)	15.50	15.38	0.000	10 mm [Left]	FCC #2	0.005	1	99.5	0.002	1.028	1.005	0.002		
2437.0	6	802.11g (MIMO)	18.50	17.90	0.050	10 mm [Top]	FCC #2	0.129	1	98.8	0.129	1.148	1.012	0.150		
2437.0	6	802.11g (MIMO)	18.50	17.90	0.020	10 mm [Front]	FCC #2	0.110	1	98.8	0.116	1.148	1.012	0.135		
2437.0	6	802.11g (MIMO)	18.50	17.90	0.110	10 mm [Rear]	FCC #2	0.079	1	98.8	0.078	1.148	1.012	0.091		
2437.0	6	802.11g (MIMO)	18.50	17.90	0.100	10 mm [Left]	FCC #2	0.156	1	98.8	0.161	1.148	1.012	0.187	A53	

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Adjusted SAR results for OFDM SAR													
FREQUENCY		Mode/Antenna	Service	Maximum Allowed Power (dBm)	1g Scaled SAR (W/kg)	FREQUENCY (MHz)	Mode	Service	Maximum Allowed Power (dBm)	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR	
Mhz	Ch												
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.166	2437	802.11g	OFDM	15.5	1.000	0.166	X	
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.166	2437	802.11n	OFDM	15.5	1.000	0.166	X	
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.166	2437	802.11ac	OFDM	15.5	1.000	0.166	X	
2462.0	11	802.11b (Ant.1)	DSSS	15.5	0.166	2437	802.11ax	OFDM	14.5	0.794	0.132	X	
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.071	2437	802.11g	OFDM	15.5	1.000	0.071	X	
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.071	2437	802.11n	OFDM	15.5	1.000	0.071	X	
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.071	2437	802.11ac	OFDM	15.5	1.000	0.071	X	
2462.0	11	802.11b (Ant.2)	DSSS	15.5	0.071	2437	802.11ax	OFDM	14.5	0.794	0.056	X	
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.187	2437	802.11n	OFDM	18.5	1.000	0.187	X	
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.187	2437	802.11ac	OFDM	18.5	1.000	0.187	X	
2437.0	6	802.11g (MIMO)	OFDM	18.5	0.187	2437	802.11ax	OFDM	17.5	0.794	0.148	X	

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Head
1.6 W/kg (mW/g)
averaged over 1 gram

Note(s):
 1. SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
 2. Per April 2019 TCB Workshop Notes, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection.
 3. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

Table 11.3.4 UNII Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
Mhz	Ch															
5200.0	40	802.11a (Ant.1)	16.00	15.58	-0.030	10 mm [Top]	FCC #2	0.034	6	98.7	0.024	1.102	1.013	0.027		
5200.0	40	802.11a (Ant.1)	16.00	15.58	0.040	10 mm [Front]	FCC #2	0.069	6	98.7	0.053	1.102	1.013	0.059		
5200.0	40	802.11a (Ant.1)	16.00	15.58	-0.090	10 mm [Rear]	FCC #2	0.140	6	98.7	0.120	1.102	1.013	0.134	A54	
5200.0	40	802.11a (Ant.1)	16.00	15.58	0.100	10 mm [Left]	FCC #2	0.027	6	98.7	0.022	1.102	1.013	0.025		
5240.0	48	802.11a (Ant.2)	16.00	15.76	-0.130	10 mm [Top]	FCC #2	0.097	6	98.8	0.091	1.057	1.012	0.097		
5240.0	48	802.11a (Ant.2)	16.00	15.76	-0.170	10 mm [Front]	FCC #2	0.060	6	98.8	0.057	1.057	1.012	0.061		
5240.0	48	802.11a (Ant.2)	16.00	15.76	-0.040	10 mm [Rear]	FCC #2	0.156	6	98.8	0.125	1.057	1.012	0.134	A55	
5240.0	48	802.11a (Ant.2)	16.00	15.76	0.150	10 mm [Left]	FCC #2	0.028	6	98.8	0.010	1.057	1.012	0.011		
5200.0	40	802.11a (MIMO)	19.00	18.63	-0.160	10 mm [Top]	FCC #2	0.111	6	99.1	0.107	1.102	1.009	0.119		
5200.0	40	802.11a (MIMO)	19.00	18.63	-0.060	10 mm [Front]	FCC #2	0.099	6	99.1	0.098	1.102	1.009	0.109		
5200.0	40	802.11a (MIMO)	19.00	18.63	0.040	10 mm [Rear]	FCC #2	0.251	6	99.1	0.246	1.102	1.009	0.274	A56	
5200.0	40	802.11a (MIMO)	19.00	18.63	-0.180	10 mm [Left]	FCC #2	0.029	6	99.1	0.020	1.102	1.009	0.022		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Table 11.3.5 UNII Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
Mhz	Ch															
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.110	10 mm [Top]	FCC #2	0.035	6	98.7	0.023	1.009	1.013	0.024		
5785.0	157	802.11a (Ant.1)	16.00	15.96	-0.160	10 mm [Front]	FCC #2	0.036	6	98.7	0.026	1.009	1.013	0.027		
5785.0	157	802.11a (Ant.1)	16.00	15.96	0.030	10 mm [Rear]	FCC #2	0.143	6	98.7	0.130	1.009	1.013	0.133	A43	
5785.0	157	802.11a (Ant.1)	16.00	15.96	-0.090	10 mm [Left]	FCC #2	0.038	6	98.7	0.031	1.009	1.013	0.032		
5745.0	149	802.11a (Ant.2)	16.00	15.20	0.010	10 mm [Top]	FCC #2	0.159	6	98.8	0.166	1.202	1.012	0.202		
5745.0	149	802.11a (Ant.2)	16.00	15.20	-0.160	10 mm [Front]	FCC #2	0.030	6	98.8	0.020	1.202	1.012	0.024		
5745.0	149	802.11a (Ant.2)	16.00	15.20	-0.040	10 mm [Rear]	FCC #2	0.289	6	98.8	0.270	1.202	1.012	0.328	A57	
5745.0	149	802.11a (Ant.2)	16.00	15.20	-0.130	10 mm [Left]	FCC #2	0.061	6	98.8	0.046	1.202	1.012	0.056		
5745.0	149	802.11a (MIMO)	19.00	18.60	0.000	10 mm [Top]	FCC #2	0.164	6	99.1	0.180	1.202	1.009	0.218		
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.000	10 mm [Front]	FCC #2	0.075	6	99.1	0.054	1.202	1.009	0.065		
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.130	10 mm [Rear]	FCC #2	0.346	6	99.1	0.335	1.202	1.009	0.406	A45	
5745.0	149	802.11a (MIMO)	19.00	18.60	-0.140	10 mm [Left]	FCC #2	0.077	6	99.1	0.059	1.202	1.009	0.072		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Note: UNII-3 Band CH 15(5785 MHz) is not support Hotspot mode as described on operational description, so other required CHs are tested.

Table 11.3.6 Bluetooth Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Rate (Mbps)	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #		
Mhz	Ch															
2441.0	39	Bluetooth	11.35	9.66	0.190	10 mm [Top]	FCC #2	1	76.8	0.015	1.476	1.302	0.029			
2441.0	39	Bluetooth	11.35	9.66	-0.110	10 mm [Front]	FCC #2	1	76.8	0.032	1.476	1.302	0.062			
2441.0	39	Bluetooth	11.35	9.66	0.070	10 mm [Rear]	FCC #2	1	76.8	0.024	1.476	1.302	0.046			
2441.0	39	Bluetooth	11.35	9.66	0.040	10 mm [Left]	FCC #2	1	76.8	0.053	1.476	1.302	0.102	A58		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Table 11.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY	Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
5280.0	56	802.11a (Ant.1)	16.00	15.61	-0.090	0 mm [Top]	FCC #2	0.049	6	98.7	0.042	1.094	1.013	0.047	
5280.0	56	802.11a (Ant.1)	16.00	15.61	-0.080	0 mm [Front]	FCC #2	0.179	6	98.7	0.185	1.094	1.013	0.205	
5280.0	56	802.11a (Ant.1)	16.00	15.61	-0.130	0 mm [Rear]	FCC #2	0.367	6	98.7	0.358	1.094	1.013	0.397	
5280.0	56	802.11a (Ant.1)	16.00	15.61	-0.020	0 mm [Left]	FCC #2	0.061	6	98.7	0.047	1.094	1.013	0.052	
5260.0	52	802.11a (Ant.2)	16.00	15.68	-0.190	0 mm [Top]	FCC #2	0.324	6	98.8	0.308	1.076	1.012	0.335	
5260.0	52	802.11a (Ant.2)	16.00	15.68	-0.020	0 mm [Front]	FCC #2	0.190	6	98.8	0.194	1.076	1.012	0.211	
5260.0	52	802.11a (Ant.2)	16.00	15.68	-0.140	0 mm [Rear]	FCC #2	0.382	6	98.8	0.401	1.076	1.012	0.437	
5260.0	52	802.11a (Ant.2)	16.00	15.68	-0.150	0 mm [Left]	FCC #2	0.066	6	98.8	0.056	1.076	1.012	0.061	
5260.0	52	802.11a (MIMO)	19.00	18.65	-0.130	0 mm [Top]	FCC #2	0.330	6	99.1	0.313	1.094	1.009	0.346	
5260.0	52	802.11a (MIMO)	19.00	18.65	-0.010	0 mm [Front]	FCC #2	0.570	6	99.1	0.559	1.094	1.009	0.617	
5260.0	52	802.11a (MIMO)	19.00	18.65	-0.010	0 mm [Rear]	FCC #2	0.527	6	99.1	0.554	1.094	1.009	0.612	
5260.0	52	802.11a (MIMO)	19.00	18.65	0.020	0 mm [Left]	FCC #2	0.103	6	99.1	0.097	1.094	1.009	0.107	
ANSI / IEEE C98.11-1992 - SAFETY LIMIT Spatial Peak										Phablet 4.0 W/kg (mW/g) averaged over 10 gram					
Uncontrolled Exposure/General Population Exposure															

Table 11.4.2 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY	Mode	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
5720.0	144	802.11a (Ant.1)	16.00	15.98	0.080	0 mm [Top]	FCC #2	0.070	6	98.7	0.052	1.005	1.019	0.053	
5720.0	144	802.11a (Ant.1)	16.00	15.98	0.150	0 mm [Front]	FCC #2	0.150	6	98.7	0.147	1.005	1.019	0.151	
5720.0	144	802.11a (Ant.1)	16.00	15.98	0.060	0 mm [Rear]	FCC #2	0.372	6	98.7	0.455	1.005	1.019	0.466	
5720.0	144	802.11a (Ant.1)	16.00	15.98	-0.070	0 mm [Left]	FCC #2	0.076	6	98.7	0.070	1.005	1.019	0.072	
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.070	0 mm [Top]	FCC #2	0.283	6	98.8	0.297	1.072	1.019	0.324	
5600.0	120	802.11a (Ant.2)	16.00	15.70	-0.120	0 mm [Front]	FCC #2	0.123	6	98.8	0.128	1.072	1.019	0.140	
5600.0	120	802.11a (Ant.2)	16.00	15.70	0.110	0 mm [Rear]	FCC #2	0.603	6	98.8	0.652	1.072	1.019	0.712	
5600.0	120	802.11a (Ant.2)	16.00	15.70	-0.170	0 mm [Left]	FCC #2	0.094	6	98.8	0.087	1.072	1.019	0.095	
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.130	0 mm [Top]	FCC #2	0.538	6	99.1	0.567	1.072	1.019	0.619	
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.100	0 mm [Front]	FCC #2	0.127	6	99.1	0.124	1.072	1.019	0.135	
5600.0	120	802.11a (MIMO)	19.00	18.82	-0.050	0 mm [Rear]	FCC #2	0.900	6	99.1	0.937	1.072	1.019	1.024	
5600.0	120	802.11a (MIMO)	19.00	18.82	0.010	0 mm [Left]	FCC #2	0.112	6	99.1	0.091	1.072	1.019	0.099	
ANSI / IEEE C98.11-1992 - SAFETY LIMIT Spatial Peak										Phablet 4.0 W/kg (mW/g) averaged over 10 gram					
Uncontrolled Exposure/General Population Exposure															

Table 11.4.3 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY	Mode	Dual Display Accessory Configuration	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift Power (dB)	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate (Mbps)	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5825.0	165	802.11a (Ant.1)	-	16.00	15.78	-0.190	0 mm [Top]	FCC #2	0.040	6	98.7	0.026	1.052	1.013	0.028
5825.0	165	802.11a (Ant.1)	-	16.00	15.78	-0.000	0 mm [Front]	FCC #2	0.188	6	98.7	0.183	1.052	1.013	0.195
5825.0	165	802.11a (Ant.1)	-	16.00	15.78	0.180	0 mm [Rear]	FCC #2	0.531	6	98.7	0.426	1.052	1.013	0.454
5825.0	165	802.11a (Ant.1)	-	16.00	15.78	-0.030	0 mm [Left]	FCC #2	0.100	6	98.7	0.104	1.052	1.013	0.111
5825.0	165	802.11a (Ant.2)	-	16.00	15.29	-0.030	0 mm [Top]	FCC #2	0.236	6	98.8	0.258	1.178	1.012	0.308
5825.0	165	802.11a (Ant.2)	-	16.00	15.29	0.020	0 mm [Front]	FCC #2	0.357	6	98.8	0.302	1.178	1.012	0.360
5825.0	165	802.11a (Ant.2)	-	16.00	15.29	-0.170	0 mm [Rear]	FCC #2	0.849	6	98.8	0.876	1.178	1.012	1.044
5825.0	165	802.11a (Ant.2)	-	16.00	15.29	-0.030	0 mm [Left]	FCC #2	0.092	6	98.8	0.078	1.178	1.012	0.093
5825.0	165	802.11a (MIMO)	-	19.00	18.55	0.020	0 mm [Top]	FCC #2	0.272	6	99.1	0.266	1.178	1.009	0.316
5825.0	165	802.11a (MIMO)	-	19.00	18.55	-0.050	0 mm [Front]	FCC #2	0.431	6	99.1	0.416	1.178	1.009	0.494
5825.0	165	802.11a (MIMO)	-	19.00	18.55	-0.000	0 mm [Rear]	FCC #2	1.010	6	99.1	1.010	1.178	1.009	1.201
5825.0	165	802.11a (MIMO)	-	19.00	18.55	0.080	0 mm [Left]	FCC #2	0.124	6	99.1	0.107	1.178	1.009	0.127
5825.0	165	802.11a (MIMO)	#1	19.00	18.55	-0.120	0 mm [Rear]	FCC #2	0.862	6	99.1	0.843	1.178	1.009	1.002
5825.0	165	802.11a (MIMO)	#2	19.00	18.55	0.170	0 mm [Rear]	FCC #2	0.857	6	99.1	0.832	1.178	1.009	0.989
5825.0	165	802.11a (MIMO)	#3	19.00	18.55	-0.110	0 mm [Rear]	FCC #2	0.584	6	99.1	0.555	1.178	1.009	0.660
ANSI / IEEE C98.11-1992 - SAFETY LIMIT Spatial Peak										Phablet 4.0 W/kg (mW/g) averaged over 10 gram					
Uncontrolled Exposure/General Population Exposure															

- Note(s):
- Blue entries represent additional Phablet SAR Test Position (#1: DD angle: 0 degree) with the worst case position.
 - Green entries represent additional Phablet SAR Test Position (#2: DD angle: 180 degree) with the worst case position.
 - Orange entries represent additional Phablet SAR Test Position (#3: DD angle: 360 degree) with the worst case position.
 - UNII-B Band CH 165 (5825 MHz) is not support Hotspot mode as described on operational description of this device, so phablet SAR is tested on this CH.

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > $\frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjusted SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by making a SAR measurement with both antennas transmitting simultaneously.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes ^A	Yes	N/A	Yes	^A Bluetooth Tethering is considered.
4	GSM Voice + Wi-Fi 2.4 GHz MIMO	Yes	Yes	N/A	Yes	
5	GSM Voice + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	
6	GSM Voice + Wi-Fi 2.4 GHz MIMO + Wi-Fi 5GHz MIMO	Yes	Yes	N/A	Yes	
7	GSM Voice + BT 2.4 GHz Ant.1 + Wi-Fi 2.4 GHz Ant.2	Yes ^A	Yes	N/A	Yes	^A Bluetooth Tethering is considered.
8	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes ^A	Yes	N/A	Yes	^A Bluetooth Tethering is considered.
9	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
11	WCDMA + Bluetooth 2.4 GHz	Yes ^A	Yes	Yes	Yes	^A Bluetooth Tethering is considered.
12	WCDMA + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
13	WCDMA + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes [^]	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
14	WCDMA + Wi-Fi 2.4 GHz MIMO + Wi-Fi 5GHz MIMO	Yes	Yes	Yes [^]	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	WCDMA + BT 2.4 GHz Ant.1 + Wi-Fi 2.4 GHz Ant.2	Yes ^A	Yes	Yes	Yes	^A Bluetooth Tethering is considered.
16	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes ^A	Yes	Yes [^]	Yes	^A Bluetooth Tethering is considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
17	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
18	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes [^]	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
19	LTE + Bluetooth 2.4 GHz	Yes ^A	Yes	Yes	Yes	^A Bluetooth Tethering is considered.
20	LTE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
21	LTE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes [^]	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
22	LTE + Wi-Fi 2.4 GHz MIMO + Wi-Fi 5GHz MIMO	Yes	Yes	Yes [^]	Yes	[^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
23	LTE + BT 2.4 GHz Ant.1 + Wi-Fi 2.4 GHz Ant.2	Yes ^A	Yes	Yes	Yes	^A Bluetooth Tethering is considered.
24	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes ^A	Yes	Yes [^]	Yes	^A Bluetooth Tethering is considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
25	GPRS + Wi-Fi 2.4 GHz	Yes [*]	Yes [*]	Yes	Yes	[*] Pre-installed VOIP applications are considered.
26	GPRS + Wi-Fi 5 GHz	Yes [*]	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
27	GPRS + Bluetooth 2.4 GHz	Yes ^{A*}	Yes [*]	Yes	Yes	[*] Pre-installed VOIP applications are considered. ^A Bluetooth Tethering is considered.
28	GPRS + Wi-Fi 2.4 GHz MIMO	Yes [*]	Yes [*]	Yes	Yes	[*] Pre-installed VOIP applications are considered.
29	GPRS + Wi-Fi 5 GHz MIMO	Yes [*]	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
30	GPRS + Wi-Fi 2.4 GHz MIMO + Wi-Fi 5GHz MIMO	Yes [*]	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
31	GPRS + BT 2.4 GHz Ant.1 + Wi-Fi 2.4 GHz Ant.2	Yes ^{A*}	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered. ^A Bluetooth Tethering is considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
32	GPRS + Bluetooth 2.4 GHz + Wi-Fi 5GHz MIMO	Yes ^{A*}	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered. ^A Bluetooth Tethering is considered. [^] Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
33	Wi-Fi 2.4GHz MIMO + Wi-Fi 5GHz MIMO	Yes	Yes	N/A	Yes	
34	Bluetooth 2.4GHz Ant.1 + Wi-Fi 2.4GHz Ant.2	Yes ^A	Yes	N/A	Yes	^A Bluetooth Tethering is considered.
35	Bluetooth 2.4GHz + Wi-Fi 5GHz MIMO	Yes ^A	Yes	N/A	Yes	^A Bluetooth Tethering is considered.

Notes:

1. Wi-Fi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
2. Wi-Fi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
3. LTE, WCDMA, GPRS is supported Hotspot.
4. VoIP is supported in LTE, WCDMA, GSM
5. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
6. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
7. Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

12.4 Head SAR Simultaneous Transmission Analysis

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN MIMO SAR (W/kg)			5.3G W-LAN MIMO SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3			
Head SAR	GSM 850	Left Touch	0.179	0.120	0.396	0.299	0.575	0.695			
		Right Touch	0.101	0.539	0.640	0.640	0.741	1.280			
		Left Tilt	0.096	0.198	0.316	0.294	0.412	0.610			
		Right Tilt	0.079	0.323	0.503	0.402	0.582	0.905			
	GPRS 850	Left Touch	0.204	0.120	0.396	0.324	0.600	0.720			
		Right Touch	0.130	0.539	0.640	0.669	0.770	1.309			
		Left Tilt	0.107	0.198	0.316	0.305	0.423	0.621			
		Right Tilt	0.097	0.323	0.503	0.420	0.600	0.923			
	GSM 1900	Left Touch	0.033	0.120	0.396	0.153	0.429	0.549			
		Right Touch	0.021	0.539	0.640	0.560	0.661	1.200			
		Left Tilt	0.021	0.198	0.316	0.219	0.337	0.535			
		Right Tilt	0.018	0.323	0.503	0.341	0.521	0.844			
	GPRS 1900	Left Touch	0.042	0.120	0.396	0.162	0.438	0.558			
		Right Touch	0.030	0.539	0.640	0.569	0.670	1.209			
		Left Tilt	0.025	0.198	0.316	0.223	0.341	0.539			
		Right Tilt	0.026	0.323	0.503	0.349	0.529	0.852			
	WCDMA 850	Left Touch	0.284	0.120	0.396	0.404	0.680	0.800			
		Right Touch	0.230	0.539	0.640	0.769	0.870	1.409			
		Left Tilt	0.159	0.198	0.316	0.357	0.475	0.753			
		Right Tilt	0.149	0.323	0.503	0.472	0.652	0.975			
	WCDMA 1900	Left Touch	0.080	0.120	0.396	0.200	0.476	0.596			
		Right Touch	0.059	0.539	0.640	0.598	0.699	1.238			
		Left Tilt	0.058	0.198	0.316	0.256	0.374	0.572			
		Right Tilt	0.054	0.323	0.503	0.377	0.557	0.880			
	LTE Band 12	Left Touch	0.108	0.120	0.396	0.228	0.504	0.624			
		Right Touch	0.108	0.539	0.640	0.647	0.748	1.287			
		Left Tilt	0.024	0.198	0.316	0.222	0.340	0.538			
		Right Tilt	0.055	0.323	0.503	0.378	0.558	0.881			
	LTE Band 5	Left Touch	0.283	0.120	0.396	0.403	0.679	0.799			
		Right Touch	0.282	0.539	0.640	0.821	0.922	1.451			
		Left Tilt	0.159	0.198	0.316	0.357	0.475	0.673			
		Right Tilt	0.181	0.323	0.503	0.504	0.684	1.007			
	LTE Band 4	Left Touch	0.053	0.120	0.396	0.173	0.449	0.569			
		Right Touch	0.033	0.539	0.640	0.572	0.673	1.212			
		Left Tilt	0.021	0.198	0.316	0.219	0.337	0.535			
		Right Tilt	0.035	0.323	0.503	0.358	0.538	0.861			
	LTE Band 2	Left Touch	0.080	0.120	0.396	0.200	0.476	0.596			
		Right Touch	0.073	0.539	0.640	0.612	0.713	1.252			
		Left Tilt	0.060	0.198	0.316	0.258	0.376	0.574			
		Right Tilt	0.068	0.323	0.503	0.391	0.571	0.894			

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN MIMO SAR (W/kg)			5.6G W-LAN MIMO SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3			
Head SAR	GSM 850	Left Touch	0.179	0.120	0.174	0.299	0.353	0.473			
		Right Touch	0.101	0.539	0.502	0.640	0.603	1.142			
		Left Tilt	0.096	0.198	0.259	0.294	0.355	0.553			
		Right Tilt	0.079	0.323	0.323	0.402	0.402	0.725			
	GPRS 850	Left Touch	0.204	0.120	0.174	0.324	0.378	0.498			
		Right Touch	0.130	0.539	0.502	0.669	0.632	1.171			
		Left Tilt	0.107	0.198	0.259	0.305	0.366	0.564			
		Right Tilt	0.097	0.323	0.323	0.420	0.420	0.743			
	GSM 1900	Left Touch	0.033	0.120	0.174	0.153	0.207	0.327			
		Right Touch	0.021	0.539	0.502	0.580	0.523	1.062			
		Left Tilt	0.021	0.198	0.259	0.219	0.280	0.478			
		Right Tilt	0.018	0.323	0.323	0.341	0.341	0.664			
	GPRS 1900	Left Touch	0.042	0.120	0.174	0.162	0.216	0.336			
		Right Touch	0.030	0.539	0.502	0.569	0.532	1.071			
		Left Tilt	0.025	0.198	0.259	0.223	0.284	0.482			
		Right Tilt	0.026	0.323	0.323	0.349	0.349	0.672			
	WCDMA 850	Left Touch	0.284	0.120	0.174	0.404	0.458	0.578			
		Right Touch	0.230	0.539	0.502	0.769	0.732	1.271			
		Left Tilt	0.159	0.198	0.259	0.357	0.418	0.616			
		Right Tilt	0.149	0.323	0.323	0.472	0.472	0.795			
	WCDMA 1900	Left Touch	0.080	0.120	0.174	0.200	0.254	0.374			
		Right Touch	0.059	0.539	0.502	0.598	0.561	1.100			
		Left Tilt	0.058	0.198	0.259	0.256	0.317	0.515			
		Right Tilt	0.054	0.323	0.323	0.377	0.377	0.700			
	LTE Band 12	Left Touch	0.108	0.120	0.174	0.228	0.282	0.402			
		Right Touch	0.108	0.539	0.502	0.647	0.610	1.149			
		Left Tilt	0.024	0.198	0.259	0.222	0.283	0.481			
		Right Tilt	0.055	0.323	0.323	0.378	0.378	0.701			
	LTE Band 5	Left Touch	0.283	0.120	0.174	0.403	0.457	0.577			
		Right Touch	0.282	0.539	0.502	0.821	0.784	1.323			
		Left Tilt	0.159	0.198	0.259	0.357	0.418	0.616			
		Right Tilt	0.181	0.323	0.323	0.504	0.504	0.827			
	LTE Band 4	Left Touch	0.053	0.120	0.174	0.173	0.227	0.347			
		Right Touch	0.033	0.539	0.502	0.572	0.535	1.074			
		Left Tilt	0.021	0.198	0.259	0.219	0.280	0.478			
		Right Tilt	0.035	0.323	0.323	0.358	0.358	0.681			
	LTE Band 2	Left Touch	0.080	0.120	0.174	0.200	0.254	0.374			
		Right Touch	0.073	0.539	0.502	0.612	0.575	1.114			
		Left Tilt	0.060	0.198	0.259	0.258	0.319	0.517			
		Right Tilt	0.068	0.323	0.323	0.391	0.391	0.714			

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN MIMO SAR (W/kg)			5.8G W-LAN MIMO SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3			
Head SAR	GSM 850	Left Touch	0.179	0.120	0.145	0.299	0.324	0.444			
		Right Touch	0.101	0.539	0.383	0.640	0.484	1.023			
		Left Tilt	0.096	0.198	0.175	0.294	0.271	0.469			
		Right Tilt	0.079	0.323	0.360	0.402	0.439	0.762			
	GPRS 850	Left Touch	0.204	0.120	0.145	0.324	0.349	0.469			
		Right Touch	0.130	0.539	0.383	0.669	0.513	1.052			
		Left Tilt	0.107	0.198	0.175	0.305	0.282	0.480			
		Right Tilt	0.097	0.323	0.360	0.420	0.457	0.780			
	GSM 1900	Left Touch	0.033	0.120	0.145	0.153	0.178	0.298			
		Right Touch	0.021	0.539	0.383	0.560	0.404	0.943			
		Left Tilt	0.021	0.198	0.175	0.219	0.196	0.394			
		Right Tilt	0.018	0.323	0.360	0.341	0.378	0.701			
	GPRS 1900	Left Touch	0.042	0.120	0.145	0.162	0.187	0.307			
		Right Touch	0.030	0.539	0.383	0.569	0.413	0.952			
		Left Tilt	0.025	0.198	0.175	0.223	0.200	0.398			
		Right Tilt	0.026	0.323	0.360	0.349	0.386	0.709			
	WCDMA 850	Left Touch	0.284	0.120	0.145	0.404	0.429	0.549			
		Right Touch	0.230	0.539	0.383	0.769	0.613	1.152			
		Left Tilt	0.159	0.198	0.175	0.357	0.334	0.532			
		Right Tilt	0.149	0.323	0.360	0.472	0.509	0.832			
	WCDMA 1900	Left Touch	0.080	0.120	0.145	0.200	0.225	0.345			
		Right Touch	0.059	0.539	0.383	0.598	0.442	0.981			
		Left Tilt	0.058	0.198	0.175	0.256	0.233	0.431			
		Right Tilt	0.054	0.323	0.360	0.377	0.414	0.737			
	LTE Band 12	Left Touch	0.108	0.120	0.145	0.228	0.253	0.373			
		Right Touch	0.108	0.539	0.383	0.647	0.491	1.030			
		Left Tilt	0.024	0.198	0.175	0.222	0.199	0.397			
		Right Tilt	0.055	0.323	0.360	0.378	0.415	0.738			
	LTE Band 5	Left Touch	0.283	0.120	0.145	0.403	0.428	0.548			
		Right Touch	0.282	0.539	0.383	0.821	0.665	1.204			
		Left Tilt	0.159	0.198	0.175	0.357	0.334	0.532			
		Right Tilt	0.181	0.323	0.360	0.504	0.541	0.864			
	LTE Band 4	Left Touch	0.053	0.120	0.145	0.173	0.198	0.318			
		Right Touch	0.033								

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant. 1 SAR (W/kg)		5.3G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2	1+2	1+2+3
Head SAR	GSM 850	Left Touch	0.179	0.090	0.396	0.396	0.269	0.575	0.665	
		Right Touch	0.101	0.327	0.640	0.428	0.741	1.068		
		Left Tilt	0.096	0.048	0.316	0.144	0.412	0.460		
		Right Tilt	0.079	0.175	0.503	0.254	0.582	0.757		
	GPRS 850	Left Touch	0.204	0.090	0.396	0.294	0.600	0.690		
		Right Touch	0.130	0.327	0.640	0.457	0.770	1.097		
		Left Tilt	0.107	0.048	0.316	0.155	0.423	0.471		
		Right Tilt	0.097	0.175	0.503	0.272	0.600	0.775		
	GSM 1900	Left Touch	0.033	0.090	0.396	0.396	0.123	0.429	0.519	
		Right Touch	0.021	0.327	0.640	0.348	0.661	0.988		
		Left Tilt	0.021	0.048	0.316	0.069	0.337	0.385		
		Right Tilt	0.018	0.175	0.503	0.193	0.521	0.696		
	GPRS 1900	Left Touch	0.042	0.090	0.396	0.132	0.438	0.528		
		Right Touch	0.030	0.327	0.640	0.357	0.670	0.997		
		Left Tilt	0.025	0.048	0.316	0.073	0.341	0.389		
		Right Tilt	0.026	0.175	0.503	0.201	0.529	0.704		
	WCDMA 850	Left Touch	0.284	0.090	0.396	0.374	0.680	0.770		
		Right Touch	0.230	0.327	0.640	0.557	0.870	1.197		
		Left Tilt	0.159	0.048	0.316	0.207	0.475	0.523		
		Right Tilt	0.149	0.175	0.503	0.324	0.652	0.827		
	WCDMA 1900	Left Touch	0.080	0.090	0.396	0.170	0.476	0.566		
		Right Touch	0.059	0.327	0.640	0.386	0.699	1.026		
		Left Tilt	0.058	0.048	0.316	0.106	0.374	0.422		
		Right Tilt	0.054	0.175	0.503	0.229	0.557	0.732		
	LTE Band 12	Left Touch	0.108	0.090	0.396	0.198	0.504	0.594		
		Right Touch	0.108	0.327	0.640	0.435	0.748	1.075		
		Left Tilt	0.024	0.048	0.316	0.072	0.340	0.388		
		Right Tilt	0.055	0.175	0.503	0.230	0.558	0.733		
	LTE Band 5	Left Touch	0.283	0.090	0.396	0.373	0.679	0.769		
		Right Touch	0.282	0.327	0.640	0.609	0.922	1.249		
		Left Tilt	0.159	0.048	0.316	0.207	0.475	0.523		
		Right Tilt	0.181	0.175	0.503	0.356	0.684	0.859		
	LTE Band 4	Left Touch	0.053	0.090	0.396	0.143	0.449	0.539		
		Right Touch	0.033	0.327	0.640	0.360	0.673	1.000		
		Left Tilt	0.021	0.048	0.316	0.069	0.337	0.385		
		Right Tilt	0.035	0.175	0.503	0.210	0.538	0.713		
	LTE Band 2	Left Touch	0.080	0.090	0.396	0.170	0.476	0.566		
		Right Touch	0.073	0.327	0.640	0.400	0.713	1.040		
		Left Tilt	0.060	0.048	0.316	0.108	0.376	0.424		
		Right Tilt	0.068	0.175	0.503	0.243	0.571	0.746		

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant. 1 SAR (W/kg)		5.6G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2	1+2	1+2+3
Head SAR	GSM 850	Left Touch	0.179	0.090	0.174	0.269	0.353	0.443		
		Right Touch	0.101	0.327	0.502	0.428	0.603	0.930		
		Left Tilt	0.096	0.048	0.259	0.144	0.355	0.403		
		Right Tilt	0.079	0.175	0.323	0.254	0.402	0.577		
	GPRS 850	Left Touch	0.204	0.090	0.174	0.294	0.378	0.468		
		Right Touch	0.130	0.327	0.502	0.457	0.632	0.959		
		Left Tilt	0.107	0.048	0.259	0.155	0.366	0.414		
		Right Tilt	0.097	0.175	0.323	0.272	0.420	0.595		
	GSM 1900	Left Touch	0.033	0.090	0.174	0.123	0.207	0.297		
		Right Touch	0.021	0.327	0.502	0.348	0.523	0.850		
		Left Tilt	0.021	0.048	0.259	0.069	0.280	0.328		
		Right Tilt	0.018	0.175	0.323	0.193	0.341	0.516		
	GPRS 1900	Left Touch	0.042	0.090	0.174	0.132	0.216	0.306		
		Right Touch	0.030	0.327	0.502	0.357	0.532	0.859		
		Left Tilt	0.025	0.048	0.259	0.073	0.284	0.332		
		Right Tilt	0.026	0.175	0.323	0.201	0.349	0.524		
	WCDMA 850	Left Touch	0.284	0.090	0.174	0.374	0.458	0.548		
		Right Touch	0.230	0.327	0.502	0.547	0.732	1.059		
		Left Tilt	0.159	0.048	0.259	0.207	0.418	0.466		
		Right Tilt	0.149	0.175	0.323	0.324	0.472	0.647		
	WCDMA 1900	Left Touch	0.080	0.090	0.174	0.170	0.254	0.344		
		Right Touch	0.059	0.327	0.502	0.386	0.561	0.888		
		Left Tilt	0.058	0.048	0.259	0.106	0.317	0.365		
		Right Tilt	0.054	0.175	0.323	0.229	0.377	0.552		
	LTE Band 12	Left Touch	0.108	0.090	0.174	0.198	0.282	0.372		
		Right Touch	0.108	0.327	0.502	0.435	0.610	0.937		
		Left Tilt	0.024	0.048	0.259	0.072	0.283	0.331		
		Right Tilt	0.055	0.175	0.323	0.230	0.378	0.553		
	LTE Band 5	Left Touch	0.283	0.090	0.174	0.373	0.457	0.547		
		Right Touch	0.282	0.327	0.502	0.609	0.784	1.111		
		Left Tilt	0.159	0.048	0.259	0.207	0.418	0.466		
		Right Tilt	0.181	0.175	0.323	0.356	0.504	0.679		
	LTE Band 4	Left Touch	0.053	0.090	0.174	0.143	0.227	0.317		
		Right Touch	0.033	0.327	0.502	0.360	0.535	0.862		
		Left Tilt	0.021	0.048	0.259	0.069	0.280	0.328		
		Right Tilt	0.035	0.175	0.323	0.210	0.358	0.533		
	LTE Band 2	Left Touch	0.080	0.090	0.174	0.170	0.254	0.344		
		Right Touch	0.073	0.327	0.502	0.400	0.575	0.902		
		Left Tilt	0.060	0.048	0.259	0.108	0.319	0.367		
		Right Tilt	0.068	0.175	0.323	0.243	0.391	0.566		

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant. 1 SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2	1+2	1+2+3
Head SAR	GSM 850	Left Touch	0.179	0.090	0.145	0.269	0.324	0.414		
		Right Touch	0.101	0.327	0.383	0.428	0.484	0.811		
		Left Tilt	0.096	0.048	0.175	0.144	0.271	0.319		
		Right Tilt	0.079	0.175	0.360	0.254	0.439	0.614		
	GPRS 850	Left Touch	0.204	0.090	0.145	0.294	0.349	0.439		
		Right Touch	0.130	0.327	0.383	0.457	0.513	0.840		
		Left Tilt	0.107	0.048	0.175	0.155	0.282	0.330		
		Right Tilt	0.097	0.175	0.360	0.272	0.457	0.632		
	GSM 1900	Left Touch	0.033	0.090	0.145	0.123	0.178	0.268		
		Right Touch	0.021	0.327	0.383	0.348	0.402	0.731		
		Left Tilt	0.021	0.048	0.175	0.069	0.196	0.244		
		Right Tilt	0.018	0.175	0.360	0.193	0.378	0.553		
	GPRS 1900	Left Touch	0.042	0.090	0.145	0.132	0.187	0.277		
		Right Touch	0.030	0.327	0.383	0.357	0.413	0.740		
		Left Tilt	0.025	0.048	0.175	0.073	0.200	0.248		
		Right Tilt	0.026	0.175	0.360	0.201	0.386	0.561		
	WCDMA 850	Left Touch	0.284	0.090	0.145	0.374	0.429	0.519		
		Right Touch	0.230	0.327	0.383	0.557	0.613	0.940		
		Left Tilt	0.159	0.048	0.175	0.207	0.334	0.382		
		Right Tilt	0.149	0.175	0.360	0.324	0.509	0.684		
	WCDMA 1900	Left Touch	0.080	0.090	0.145	0.170	0.225	0.315		
		Right Touch	0.059	0.327	0.383	0.386	0.442	0.769		
		Left Tilt	0.058	0.048	0.175	0.106	0.233	0.281		
		Right Tilt	0.054	0.175	0.360	0.229	0.414	0.589		
	LTE Band 12	Left Touch	0.108	0.090	0.145	0.198	0.253	0.343		
		Right Touch	0.108	0.327	0.383	0.435	0.491	0.818		
		Left Tilt	0.024	0.048	0.175	0.072	0.199	0.247		
		Right Tilt	0.055	0.175	0.360	0.230	0.415	0.590		
	LTE Band 5	Left Touch	0.283	0.090	0.145	0.373	0.428	0.518		
		Right Touch	0.282	0.327	0.383	0.609	0.665	0.992		
		Left Tilt	0.159	0.048	0.175	0.207	0.334	0.382		
		Right Tilt	0.181	0.175	0.360	0.356	0.541	0.716		
	LTE Band 4	Left Touch	0.053	0.090	0.145	0.143	0.198	0.288		
		Right Touch	0.033	0.327	0.383	0.360	0.416	0.743		
		Left Tilt	0.021	0.048	0.175	0.069	0.196	0.244		
		Right Tilt	0.035	0.175	0.360	0.210	0.350	0.520		
	LTE Band 2	Left Touch	0.080	0.090	0.145	0.170	0.225			

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant.1 SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1+2	1+2	1+2	1+2+3		
Head SAR	GSM 850	Left Touch	0.179	0.090	0.093	0.269	0.272	0.362		
		Right Touch	0.101	0.327	0.213	0.428	0.314	0.641		
		Left Tilt	0.096	0.048	0.130	0.144	0.226	0.274		
		Right Tilt	0.079	0.175	0.247	0.254	0.326	0.501		
	GPRS 850	Left Touch	0.204	0.090	0.093	0.294	0.297	0.387		
		Right Touch	0.130	0.327	0.213	0.457	0.343	0.670		
		Left Tilt	0.107	0.048	0.130	0.155	0.237	0.285		
		Right Tilt	0.097	0.175	0.247	0.272	0.344	0.519		
	GSM 1900	Left Touch	0.033	0.090	0.093	0.123	0.126	0.216		
		Right Touch	0.021	0.327	0.213	0.348	0.234	0.561		
		Left Tilt	0.021	0.048	0.130	0.069	0.151	0.199		
		Right Tilt	0.018	0.175	0.247	0.193	0.265	0.440		
	GPRS 1900	Left Touch	0.042	0.090	0.093	0.132	0.135	0.225		
		Right Touch	0.030	0.327	0.213	0.357	0.243	0.570		
		Left Tilt	0.025	0.048	0.130	0.073	0.155	0.203		
		Right Tilt	0.026	0.175	0.247	0.201	0.273	0.448		
	WCDMA 850	Left Touch	0.284	0.090	0.093	0.374	0.377	0.467		
		Right Touch	0.230	0.327	0.213	0.557	0.443	0.770		
		Left Tilt	0.159	0.048	0.130	0.207	0.289	0.337		
		Right Tilt	0.149	0.175	0.247	0.324	0.396	0.571		
	WCDMA 1900	Left Touch	0.080	0.090	0.093	0.170	0.173	0.263		
		Right Touch	0.059	0.327	0.213	0.386	0.272	0.599		
		Left Tilt	0.058	0.048	0.130	0.106	0.188	0.236		
		Right Tilt	0.054	0.175	0.247	0.229	0.301	0.476		
	LTE Band 12	Left Touch	0.108	0.090	0.093	0.198	0.201	0.291		
		Right Touch	0.108	0.327	0.213	0.435	0.321	0.648		
		Left Tilt	0.024	0.048	0.130	0.072	0.154	0.202		
		Right Tilt	0.055	0.175	0.247	0.230	0.302	0.477		
	LTE Band 5	Left Touch	0.283	0.090	0.093	0.373	0.376	0.466		
		Right Touch	0.282	0.327	0.213	0.609	0.495	0.822		
		Left Tilt	0.159	0.048	0.130	0.207	0.289	0.337		
		Right Tilt	0.181	0.175	0.247	0.356	0.428	0.603		
	LTE Band 4	Left Touch	0.053	0.090	0.093	0.143	0.146	0.236		
		Right Touch	0.033	0.327	0.213	0.360	0.246	0.573		
		Left Tilt	0.021	0.048	0.130	0.069	0.151	0.199		
		Right Tilt	0.035	0.175	0.247	0.110	0.282	0.457		
	LTE Band 2	Left Touch	0.080	0.090	0.093	0.170	0.173	0.263		
		Right Touch	0.073	0.327	0.213	0.400	0.286	0.613		
		Left Tilt	0.060	0.048	0.130	0.108	0.190	0.238		
		Right Tilt	0.068	0.175	0.247	0.243	0.315	0.490		

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1+2	1+2		
Head SAR	GSM 850	Left Touch	0.179	0.110	0.289			
		Right Touch	0.101	0.497	0.598			
		Left Tilt	0.096	0.055	0.151			
		Right Tilt	0.079	0.169	0.248			
	GPRS 850	Left Touch	0.204	0.110	0.314			
		Right Touch	0.130	0.497	0.627			
		Left Tilt	0.107	0.055	0.162			
		Right Tilt	0.097	0.169	0.266			
	GSM 1900	Left Touch	0.033	0.110	0.143			
		Right Touch	0.021	0.497	0.518			
		Left Tilt	0.021	0.055	0.076			
		Right Tilt	0.018	0.169	0.187			
	GPRS 1900	Left Touch	0.042	0.110	0.152			
		Right Touch	0.030	0.497	0.527			
		Left Tilt	0.025	0.055	0.080			
		Right Tilt	0.026	0.169	0.195			
	WCDMA 850	Left Touch	0.284	0.110	0.394			
		Right Touch	0.230	0.497	0.727			
		Left Tilt	0.159	0.055	0.214			
		Right Tilt	0.149	0.169	0.318			
	WCDMA 1900	Left Touch	0.080	0.110	0.190			
		Right Touch	0.059	0.497	0.556			
		Left Tilt	0.058	0.055	0.113			
		Right Tilt	0.054	0.169	0.223			
	LTE Band 12	Left Touch	0.108	0.110	0.218			
		Right Touch	0.108	0.497	0.605			
		Left Tilt	0.024	0.055	0.079			
		Right Tilt	0.055	0.169	0.224			
	LTE Band 5	Left Touch	0.283	0.110	0.393			
		Right Touch	0.282	0.497	0.779			
		Left Tilt	0.159	0.055	0.214			
		Right Tilt	0.181	0.169	0.350			
	LTE Band 4	Left Touch	0.053	0.110	0.163			
		Right Touch	0.033	0.497	0.530			
		Left Tilt	0.021	0.055	0.076			
		Right Tilt	0.035	0.169	0.204			
	LTE Band 2	Left Touch	0.080	0.110	0.190			
		Right Touch	0.073	0.497	0.570			
		Left Tilt	0.060	0.055	0.115			
		Right Tilt	0.068	0.169	0.237			

Table 12.4.9 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1+2	1+2		
Head SAR	GSM 850	Left Touch	0.179	0.093	0.272			
		Right Touch	0.101	0.213	0.314			
		Left Tilt	0.096	0.130	0.226			
		Right Tilt	0.079	0.247	0.326			
	GPRS 850	Left Touch	0.204	0.093	0.297			
		Right Touch	0.130	0.213	0.343			
		Left Tilt	0.107	0.130	0.237			
		Right Tilt	0.097	0.247	0.344			
	GSM 1900	Left Touch	0.033	0.093	0.126			
		Right Touch	0.021	0.213	0.234			
		Left Tilt	0.021	0.130	0.151			
		Right Tilt	0.018	0.247	0.285			
	GPRS 1900	Left Touch	0.042	0.093	0.135			
		Right Touch	0.030	0.213	0.243			
		Left Tilt	0.025	0.130	0.155			
		Right Tilt	0.026	0.247	0.273			
	WCDMA 850	Left Touch	0.284	0.093	0.377			
		Right Touch	0.230	0.213	0.443			
		Left Tilt	0.159	0.130	0.289			
		Right Tilt	0.149	0.247	0.396			
	WCDMA 1900	Left Touch	0.080	0.093	0.173			
		Right Touch	0.059	0.213	0.272			
		Left Tilt	0.058	0.130	0.188			
		Right Tilt	0.054	0.247	0.301			
	LTE Band 12	Left Touch	0.108	0.093	0.201			
		Right Touch	0.108	0.213	0.321			
		Left Tilt	0.024	0.130	0.154			
		Right Tilt	0.055	0.247	0.302			
	LTE Band 5	Left Touch	0.283	0.093	0.376			
		Right Touch	0.282	0.213	0.495			
		Left Tilt	0.159	0.130	0.289			
		Right Tilt	0.181	0.247	0.428			
	LTE Band 4	Left Touch	0.053	0.093	0.146			
		Right Touch	0.033	0.213	0.246			
		Left Tilt	0.021	0.130	0.151			
		Right Tilt	0.035	0.247	0.282			
	LTE Band 2	Left Touch	0.080	0.093	0.173			
		Right Touch	0.073	0.213	0.286			
		Left Tilt	0.060	0.130	0.190			
		Right Tilt	0.068	0.247	0.315			

Table 12.4.10 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	2	1	2	
Head SAR	GSM 850	Left Touch	0.179	0.120	0.120	0.299	
		Right Touch	0.101	0.539	0.539	0.640	
		Left Tilt	0.096	0.198	0.198	0.294	
		Right Tilt	0.079	0.323	0.323	0.402	
	GPRS 850	Left Touch	0.204	0.120	0.120	0.324	
		Right Touch	0.130	0.539	0.539	0.669	
		Left Tilt	0.107	0.198	0.198	0.305	
		Right Tilt	0.097	0.323	0.323	0.420	
	GSM 1900	Left Touch	0.033	0.120	0.120	0.153	
		Right Touch	0.021	0.539	0.539	0.560	
		Left Tilt	0.021	0.198	0.198	0.219	
		Right Tilt	0.018	0.323	0.323	0.341	
	GPRS 1900	Left Touch	0.042	0.120	0.120	0.162	
		Right Touch	0.030	0.539	0.539	0.569	
		Left Tilt	0.025	0.198	0.198	0.223	
		Right Tilt	0.026	0.323	0.323	0.349	
	WCDMA 850	Left Touch	0.284	0.120	0.120	0.404	
		Right Touch	0.230	0.539	0.539	0.769	
		Left Tilt	0.159	0.198	0.198	0.357	
		Right Tilt	0.149	0.323	0.323	0.472	
	WCDMA 1900	Left Touch	0.080	0.120	0.120	0.200	
		Right Touch	0.059	0.539	0.539	0.598	
		Left Tilt	0.058	0.198	0.198	0.256	
		Right Tilt	0.054	0.323	0.323	0.377	
	LTE Band 12	Left Touch	0.108	0.120	0.120	0.228	
		Right Touch	0.108	0.539	0.539	0.647	
		Left Tilt	0.024	0.198	0.198	0.222	
		Right Tilt	0.055	0.323	0.323	0.378	
	LTE Band 5	Left Touch	0.283	0.120	0.120	0.403	
		Right Touch	0.282	0.539	0.539	0.821	
		Left Tilt	0.159	0.198	0.198	0.357	
		Right Tilt	0.181	0.323	0.323	0.504	
	LTE Band 4	Left Touch	0.053	0.120	0.120	0.173	
		Right Touch	0.033	0.539	0.539	0.572	
		Left Tilt	0.021	0.198	0.198	0.219	
		Right Tilt	0.035	0.323	0.323	0.358	
	LTE Band 2	Left Touch	0.080	0.120	0.120	0.200	
		Right Touch	0.073	0.539	0.539	0.612	
		Left Tilt	0.060	0.198	0.198	0.258	
		Right Tilt	0.068	0.323	0.323	0.391	

Table 12.4.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)
			1	2	1	2	
Head SAR	GSM 850	Left Touch	0.179	0.098	0.098	0.277	
		Right Touch	0.101	0.371	0.371	0.472	
		Left Tilt	0.096	0.089	0.089	0.185	
		Right Tilt	0.079	0.276	0.276	0.355	
	GPRS 850	Left Touch	0.204	0.098	0.098	0.302	
		Right Touch	0.130	0.371	0.371	0.501	
		Left Tilt	0.107	0.089	0.089	0.196	
		Right Tilt	0.097	0.276	0.276	0.373	
	GSM 1900	Left Touch	0.033	0.098	0.098	0.131	
		Right Touch	0.021	0.371	0.371	0.392	
		Left Tilt	0.021	0.089	0.089	0.110	
		Right Tilt	0.018	0.276	0.276	0.294	
	GPRS 1900	Left Touch	0.042	0.098	0.098	0.140	
		Right Touch	0.030	0.371	0.371	0.401	
		Left Tilt	0.025	0.089	0.089	0.114	
		Right Tilt	0.026	0.276	0.276	0.302	
	WCDMA 850	Left Touch	0.284	0.098	0.098	0.382	
		Right Touch	0.230	0.371	0.371	0.601	
		Left Tilt	0.159	0.089	0.089	0.248	
		Right Tilt	0.149	0.276	0.276	0.425	
	WCDMA 1900	Left Touch	0.080	0.098	0.098	0.178	
		Right Touch	0.059	0.371	0.371	0.430	
		Left Tilt	0.058	0.089	0.089	0.147	
		Right Tilt	0.054	0.276	0.276	0.330	
	LTE Band 12	Left Touch	0.108	0.098	0.098	0.206	
		Right Touch	0.108	0.371	0.371	0.479	
		Left Tilt	0.024	0.089	0.089	0.113	
		Right Tilt	0.055	0.276	0.276	0.331	
	LTE Band 5	Left Touch	0.283	0.098	0.098	0.381	
		Right Touch	0.282	0.371	0.371	0.653	
		Left Tilt	0.159	0.089	0.089	0.248	
		Right Tilt	0.181	0.276	0.276	0.457	
	LTE Band 4	Left Touch	0.053	0.098	0.098	0.151	
		Right Touch	0.033	0.371	0.371	0.404	
		Left Tilt	0.021	0.089	0.089	0.110	
		Right Tilt	0.035	0.276	0.276	0.311	
	LTE Band 2	Left Touch	0.080	0.098	0.098	0.178	
		Right Touch	0.073	0.371	0.371	0.444	
		Left Tilt	0.060	0.089	0.089	0.149	
		Right Tilt	0.068	0.276	0.276	0.344	

Table 12.4.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)
			1	2	1	2	
Head SAR	GSM 850	Left Touch	0.179	0.302	0.302	0.481	
		Right Touch	0.101	0.519	0.519	0.620	
		Left Tilt	0.096	0.241	0.241	0.337	
		Right Tilt	0.079	0.461	0.461	0.540	
	GPRS 850	Left Touch	0.204	0.302	0.302	0.506	
		Right Touch	0.130	0.519	0.519	0.649	
		Left Tilt	0.107	0.241	0.241	0.348	
		Right Tilt	0.097	0.461	0.461	0.558	
	GSM 1900	Left Touch	0.033	0.302	0.302	0.335	
		Right Touch	0.021	0.519	0.519	0.540	
		Left Tilt	0.021	0.241	0.241	0.262	
		Right Tilt	0.018	0.461	0.461	0.479	
	GPRS 1900	Left Touch	0.042	0.302	0.302	0.344	
		Right Touch	0.030	0.519	0.519	0.549	
		Left Tilt	0.025	0.241	0.241	0.266	
		Right Tilt	0.026	0.461	0.461	0.487	
	WCDMA 850	Left Touch	0.284	0.302	0.302	0.586	
		Right Touch	0.230	0.519	0.519	0.749	
		Left Tilt	0.159	0.241	0.241	0.400	
		Right Tilt	0.149	0.461	0.461	0.610	
	WCDMA 1900	Left Touch	0.080	0.302	0.302	0.382	
		Right Touch	0.059	0.519	0.519	0.578	
		Left Tilt	0.058	0.241	0.241	0.299	
		Right Tilt	0.054	0.461	0.461	0.515	
	LTE Band 12	Left Touch	0.108	0.302	0.302	0.410	
		Right Touch	0.108	0.519	0.519	0.627	
		Left Tilt	0.024	0.241	0.241	0.265	
		Right Tilt	0.055	0.461	0.461	0.516	
	LTE Band 5	Left Touch	0.283	0.302	0.302	0.585	
		Right Touch	0.282	0.519	0.519	0.801	
		Left Tilt	0.159	0.241	0.241	0.400	
		Right Tilt	0.181	0.461	0.461	0.642	
	LTE Band 4	Left Touch	0.053	0.302	0.302	0.355	
		Right Touch	0.033	0.519	0.519	0.552	
		Left Tilt	0.021	0.241	0.241	0.252	
		Right Tilt	0.035	0.461	0.461	0.496	
	LTE Band 2	Left Touch	0.080	0.302	0.302	0.382	
		Right Touch	0.073	0.519	0.519	0.592	
		Left Tilt	0.060	0.241	0.241	0.301	
		Right Tilt	0.068	0.461	0.461	0.529	

Table 12.4.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Head SAR	GSM 850	Left Touch	0.179	0.396	0.620	0.575	0.800	0.971
		Right Touch	0.101	0.620	0.316	0.741	0.417	0.957
		Left Tilt	0.096	0.316	0.503	0.412	0.402	0.582
		Right Tilt	0.079	0.503	0.396	0.582	0.469	0.600
	GPRS 850	Left Touch	0.204	0.396	0.640	0.600	0.844	0.770
		Right Touch	0.130	0.640	0.316	0.770	0.452	0.922
		Left Tilt	0.107	0.316	0.503	0.423	0.417	0.600
		Right Tilt	0.097	0.503	0.396	0.600	0.499	0.661
	GSM 1900	Left Touch	0.033	0.396	0.640	0.661	0.673	0.661
		Right Touch	0.021	0.640	0.316	0.661	0.337	0.661
		Left Tilt	0.021	0.316	0.503	0.337	0.337	0.521
		Right Tilt	0.018	0.503	0.396	0.521	0.438	0.600
	GPRS 1900	Left Touch	0.042	0.396	0.640	0.670	0.680	0.670
		Right Touch	0.030	0.640	0.316	0.670	0.341	0.670
		Left Tilt	0.025	0.316	0.503	0.341	0.341	0.529
		Right Tilt	0.026	0.503	0.396	0.529	0.438	0.680
	WCDMA 850	Left Touch	0.284	0.396	0.640	0.680	0.924	0.670
		Right Touch	0.230	0.640	0.316	0.670	0.475	0.670
		Left Tilt	0.159	0.316	0.503	0.475	0.475	0.652
		Right Tilt	0.149	0.503	0.396	0.652	0.476	0.676
	WCDMA 1900	Left Touch	0.080	0.396	0.640	0.699	0.699	0.699
		Right Touch	0.059	0.640	0.316	0.699	0.374	0.699
		Left Tilt	0.058	0.316	0.503	0.374	0.374	0.557
		Right Tilt	0.054	0.503	0.396	0.557	0.504	0.674
	LTE Band 12	Left Touch	0.108	0.396	0.640	0.748	0.748	0.748
		Right Touch	0.108	0.640	0.316	0.748	0.340	0.748
		Left Tilt	0.024	0.316	0.503	0.340	0.340	0.558
		Right Tilt	0.055	0.503	0.396	0.558	0.679	0.679
	LTE Band 5	Left Touch	0.283	0.396	0.640	0.922	0.922	0.922
		Right Touch	0.282	0.640	0.316	0.922	0.475	0.922
		Left Tilt	0.159	0.316	0.503	0.475	0.475	0.684
		Right Tilt	0.181	0.503	0.396	0.684	0.449	0.673
	LTE Band 4	Left Touch	0.053	0.396	0.640	0.673	0.673	0.673
		Right Touch	0.033	0.640	0.316	0.673	0.337	0.673
		Left Tilt	0.021	0.316	0.503	0.337	0.337	0.538
		Right Tilt	0.035	0.503	0.396	0.538	0.476	0.476
	LTE Band 2	Left Touch	0.080	0.396	0.640	0.713	0.713	0.713
		Right Touch	0.073	0.640	0.316	0.713	0.376	0.713
		Left Tilt	0.060	0.316	0.503	0.376	0.376	0.571
		Right Tilt	0.068	0.503	0.396	0.571	0.571	0.571

Table 12.4.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Head SAR	GSM 850	Left Touch	0.179	0.074	0.313	0.253	0.493	0.414
		Right Touch	0.101	0.313	0.088	0.184	0.184	0.246
		Left Tilt	0.096	0.088	0.167	0.246	0.278	0.443
		Right Tilt	0.079	0.167	0.088	0.195	0.284	0.443
	GPRS 850	Left Touch	0.204	0.074	0.313	0.195	0.478	0.443
		Right Touch	0.130	0.313	0.088	0.195	0.284	0.443
		Left Tilt	0.107	0.088	0.167	0.195	0.195	0.443
		Right Tilt	0.097	0.167	0.088	0.195	0.195	0.443
	GSM 1900	Left Touch	0.033	0.074	0.313	0.334	0.334	0.334
		Right Touch	0.021	0.313	0.088	0.109	0.109	0.334
		Left Tilt	0.021	0.088	0.167	0.185	0.185	0.334
		Right Tilt	0.018	0.167	0.088	0.185	0.185	0.334
	GPRS 1900	Left Touch	0.042	0.074	0.313	0.343	0.343	0.343
		Right Touch	0.030	0.313	0.088	0.113	0.113	0.343
		Left Tilt	0.025	0.088	0.167	0.193	0.193	0.343
		Right Tilt	0.026	0.167	0.088	0.193	0.193	0.343
	WCDMA 850	Left Touch	0.284	0.074	0.313	0.358	0.358	0.358
		Right Touch	0.230	0.313	0.088	0.146	0.146	0.358
		Left Tilt	0.159	0.088	0.167	0.221	0.221	0.358
		Right Tilt	0.149	0.167	0.088	0.221	0.221	0.358
	WCDMA 1900	Left Touch	0.080	0.074	0.313	0.372	0.372	0.372
		Right Touch	0.059	0.313	0.088	0.146	0.146	0.372
		Left Tilt	0.058	0.088	0.167	0.221	0.221	0.372
		Right Tilt	0.054	0.167	0.088	0.221	0.221	0.372
	LTE Band 12	Left Touch	0.108	0.074	0.313	0.421	0.421	0.421
		Right Touch	0.108	0.313	0.088	0.112	0.112	0.421
		Left Tilt	0.024	0.088	0.167	0.222	0.222	0.421
		Right Tilt	0.055	0.167	0.088	0.222	0.222	0.421
	LTE Band 5	Left Touch	0.283	0.074	0.313	0.357	0.357	0.357
		Right Touch	0.282	0.313	0.088	0.247	0.247	0.357
		Left Tilt	0.159	0.088	0.167	0.348	0.348	0.357
		Right Tilt	0.181	0.167	0.088	0.348	0.348	0.357
	LTE Band 4	Left Touch	0.053	0.074	0.313	0.346	0.346	0.346
		Right Touch	0.033	0.313	0.088	0.109	0.109	0.346
		Left Tilt	0.021	0.088	0.167	0.232	0.232	0.346
		Right Tilt	0.035	0.167	0.088	0.232	0.232	0.346
	LTE Band 2	Left Touch	0.080	0.074	0.313	0.386	0.386	0.386
		Right Touch	0.073	0.313	0.088	0.148	0.148	0.386
		Left Tilt	0.060	0.088	0.167	0.235	0.235	0.386
		Right Tilt	0.068	0.167	0.088	0.235	0.235	0.386

Table 12.4.15 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Head SAR	GSM 850	Left Touch	0.179	0.104	0.449	0.283	0.623	0.550
		Right Touch	0.101	0.449	0.200	0.296	0.296	0.402
		Left Tilt	0.096	0.200	0.323	0.402	0.402	0.308
		Right Tilt	0.079	0.323	0.104	0.308	0.308	0.579
	GPRS 850	Left Touch	0.204	0.104	0.449	0.579	0.579	0.579
		Right Touch	0.130	0.449	0.200	0.307	0.307	0.420
		Left Tilt	0.107	0.200	0.323	0.420	0.420	0.137
		Right Tilt	0.097	0.323	0.104	0.470	0.470	0.221
	GSM 1900	Left Touch	0.033	0.104	0.449	0.470	0.470	0.470
		Right Touch	0.021	0.449	0.200	0.221	0.221	0.341
		Left Tilt	0.021	0.200	0.323	0.341	0.341	0.146
		Right Tilt	0.018	0.323	0.104	0.479	0.479	0.225
	GPRS 1900	Left Touch	0.042	0.104	0.449	0.479	0.479	0.479
		Right Touch	0.030	0.449	0.200	0.225	0.225	0.349
		Left Tilt	0.025	0.200	0.323	0.388	0.388	0.679
		Right Tilt	0.026	0.323	0.104	0.679	0.679	0.359
	WCDMA 850	Left Touch	0.284	0.104	0.449	0.359	0.359	0.472
		Right Touch	0.230	0.449	0.200	0.221	0.221	0.184
		Left Tilt	0.159	0.200	0.323	0.508	0.508	0.258
		Right Tilt	0.149	0.323	0.104	0.377	0.377	0.212
	WCDMA 1900	Left Touch	0.080	0.104	0.449	0.508	0.508	0.508
		Right Touch	0.059	0.449	0.200	0.258	0.258	0.377
		Left Tilt	0.058	0.200	0.323	0.377	0.377	0.212
		Right Tilt	0.054	0.323	0.104	0.522	0.522	0.391
	LTE Band 12	Left Touch	0.108	0.104	0.449	0.522	0.522	0.522
		Right Touch	0.108	0.449	0.200	0.224	0.224	0.378
		Left Tilt	0.024	0.200	0.323	0.378	0.378	0.387
		Right Tilt	0.055	0.323	0.104	0.522	0.522	0.387
	LTE Band 5	Left Touch	0.283	0.104	0.449	0.731	0.731	0.731
		Right Touch	0.282	0.449	0.200	0.359	0.359	0.504
		Left Tilt	0.159	0.200	0.323	0.504	0.504	0.157
		Right Tilt	0.181	0.323	0.104	0.482	0.482	0.221
	LTE Band 4	Left Touch	0.053	0.104	0.449	0.482	0.482	0.482
		Right Touch	0.033	0.449	0.200	0.221	0.221	0.358
		Left Tilt	0.021	0.200	0.323	0.358	0.358	0.184
		Right Tilt	0.035	0.323	0.104	0.522	0.522	0.260
	LTE Band 2	Left Touch	0.080	0.104	0.449	0.522	0.522	0.522
		Right Touch	0.073	0.449	0.200	0.260	0.260	0.391
		Left Tilt	0.060	0.200	0.323	0.391	0.391	0.391
		Right Tilt	0.068	0.323	0.104	0.522	0.522	0.391

Table 12.4.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.179	0.174	0.353
		Right Touch	0.101	0.502	0.603
		Left Tilt	0.096	0.259	0.355
		Right Tilt	0.079	0.323	0.402
	GPRS 850	Left Touch	0.204	0.174	0.378
		Right Touch	0.130	0.502	0.632
		Left Tilt	0.107	0.259	0.366
		Right Tilt	0.097	0.323	0.420
	GSM 1900	Left Touch	0.033	0.174	0.207
		Right Touch	0.021	0.502	0.523
		Left Tilt	0.021	0.259	0.280
		Right Tilt	0.018	0.323	0.341
	GPRS 1900	Left Touch	0.042	0.174	0.216
		Right Touch	0.030	0.502	0.532
		Left Tilt	0.025	0.259	0.284
		Right Tilt	0.026	0.323	0.349
	WCDMA 850	Left Touch	0.284	0.174	0.458
		Right Touch	0.230	0.502	0.732
		Left Tilt	0.159	0.259	0.418
		Right Tilt	0.149	0.323	0.472
	WCDMA 1900	Left Touch	0.080	0.174	0.254
		Right Touch	0.059	0.502	0.561
		Left Tilt	0.058	0.259	0.317
		Right Tilt	0.054	0.323	0.377
	LTE Band 12	Left Touch	0.108	0.174	0.282
		Right Touch	0.108	0.502	0.610
		Left Tilt	0.024	0.259	0.283
		Right Tilt	0.055	0.323	0.378
	LTE Band 5	Left Touch	0.283	0.174	0.457
		Right Touch	0.282	0.502	0.784
		Left Tilt	0.159	0.259	0.418
		Right Tilt	0.181	0.323	0.504
	LTE Band 4	Left Touch	0.053	0.174	0.227
		Right Touch	0.033	0.502	0.535
		Left Tilt	0.021	0.259	0.280
		Right Tilt	0.035	0.323	0.358
	LTE Band 2	Left Touch	0.080	0.174	0.254
		Right Touch	0.073	0.502	0.575
		Left Tilt	0.060	0.259	0.319
		Right Tilt	0.068	0.323	0.391

Table 12.4.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.179	0.055	0.234
		Right Touch	0.101	0.331	0.432
		Left Tilt	0.096	0.059	0.155
		Right Tilt	0.079	0.139	0.218
	GPRS 850	Left Touch	0.204	0.055	0.259
		Right Touch	0.130	0.331	0.461
		Left Tilt	0.107	0.059	0.166
		Right Tilt	0.097	0.139	0.236
	GSM 1900	Left Touch	0.033	0.055	0.088
		Right Touch	0.021	0.331	0.352
		Left Tilt	0.021	0.059	0.080
		Right Tilt	0.018	0.139	0.157
	GPRS 1900	Left Touch	0.042	0.055	0.097
		Right Touch	0.030	0.331	0.361
		Left Tilt	0.025	0.059	0.084
		Right Tilt	0.026	0.139	0.165
	WCDMA 850	Left Touch	0.284	0.055	0.339
		Right Touch	0.230	0.331	0.561
		Left Tilt	0.159	0.059	0.218
		Right Tilt	0.149	0.139	0.288
	WCDMA 1900	Left Touch	0.080	0.055	0.135
		Right Touch	0.059	0.331	0.390
		Left Tilt	0.058	0.059	0.117
		Right Tilt	0.054	0.139	0.193
	LTE Band 12	Left Touch	0.108	0.055	0.163
		Right Touch	0.108	0.331	0.439
		Left Tilt	0.024	0.059	0.083
		Right Tilt	0.055	0.139	0.194
	LTE Band 5	Left Touch	0.283	0.055	0.338
		Right Touch	0.282	0.331	0.613
		Left Tilt	0.159	0.059	0.218
		Right Tilt	0.181	0.139	0.320
	LTE Band 4	Left Touch	0.053	0.055	0.108
		Right Touch	0.033	0.331	0.364
		Left Tilt	0.021	0.059	0.080
		Right Tilt	0.035	0.139	0.174
	LTE Band 2	Left Touch	0.080	0.055	0.135
		Right Touch	0.073	0.331	0.404
		Left Tilt	0.060	0.059	0.119
		Right Tilt	0.068	0.139	0.207

Table 12.4.18 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.179	0.141	0.320
		Right Touch	0.101	0.390	0.491
		Left Tilt	0.096	0.159	0.255
		Right Tilt	0.079	0.273	0.352
	GPRS 850	Left Touch	0.204	0.141	0.345
		Right Touch	0.130	0.390	0.520
		Left Tilt	0.107	0.159	0.266
		Right Tilt	0.097	0.273	0.370
	GSM 1900	Left Touch	0.033	0.141	0.174
		Right Touch	0.021	0.390	0.411
		Left Tilt	0.021	0.159	0.180
		Right Tilt	0.018	0.273	0.291
	GPRS 1900	Left Touch	0.042	0.141	0.183
		Right Touch	0.030	0.390	0.420
		Left Tilt	0.025	0.159	0.184
		Right Tilt	0.026	0.273	0.299
	WCDMA 850	Left Touch	0.284	0.141	0.425
		Right Touch	0.230	0.390	0.620
		Left Tilt	0.159	0.159	0.318
		Right Tilt	0.149	0.273	0.422
	WCDMA 1900	Left Touch	0.080	0.141	0.221
		Right Touch	0.059	0.390	0.449
		Left Tilt	0.058	0.159	0.217
		Right Tilt	0.054	0.273	0.327
	LTE Band 12	Left Touch	0.108	0.141	0.249
		Right Touch	0.108	0.390	0.498
		Left Tilt	0.024	0.159	0.183
		Right Tilt	0.055	0.273	0.328
	LTE Band 5	Left Touch	0.283	0.141	0.424
		Right Touch	0.282	0.390	0.672
		Left Tilt	0.159	0.159	0.318
		Right Tilt	0.181	0.273	0.454
	LTE Band 4	Left Touch	0.053	0.141	0.194
		Right Touch	0.033	0.390	0.423
		Left Tilt	0.021	0.159	0.180
		Right Tilt	0.035	0.273	0.308
	LTE Band 2	Left Touch	0.080	0.141	0.221
		Right Touch	0.073	0.390	0.463
		Left Tilt	0.060	0.159	0.219
		Right Tilt	0.068	0.273	0.341

Table 12.4.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	1+2	1	1+2	
Head SAR	GSM 850	Left Touch	0.179	0.145	0.145	0.334	
		Right Touch	0.101	0.383	0.383	0.484	
		Left Tilt	0.096	0.175	0.175	0.271	
		Right Tilt	0.079	0.360	0.360	0.439	
	GPRS 850	Left Touch	0.204	0.145	0.145	0.349	
		Right Touch	0.130	0.383	0.383	0.513	
		Left Tilt	0.107	0.175	0.175	0.282	
		Right Tilt	0.097	0.360	0.360	0.457	
	GSM 1900	Left Touch	0.033	0.145	0.145	0.178	
		Right Touch	0.021	0.383	0.383	0.404	
		Left Tilt	0.021	0.175	0.175	0.196	
		Right Tilt	0.018	0.360	0.360	0.378	
	GPRS 1900	Left Touch	0.042	0.145	0.145	0.187	
		Right Touch	0.030	0.383	0.383	0.413	
		Left Tilt	0.025	0.175	0.175	0.200	
		Right Tilt	0.026	0.360	0.360	0.386	
	WCDMA 850	Left Touch	0.284	0.145	0.145	0.429	
		Right Touch	0.230	0.383	0.383	0.613	
		Left Tilt	0.159	0.175	0.175	0.334	
		Right Tilt	0.149	0.360	0.360	0.509	
	WCDMA 1900	Left Touch	0.080	0.145	0.145	0.225	
		Right Touch	0.059	0.383	0.383	0.442	
		Left Tilt	0.058	0.175	0.175	0.233	
		Right Tilt	0.054	0.360	0.360	0.414	
	LTE Band 12	Left Touch	0.108	0.145	0.145	0.253	
		Right Touch	0.108	0.383	0.383	0.491	
		Left Tilt	0.024	0.175	0.175	0.199	
		Right Tilt	0.055	0.360	0.360	0.415	
	LTE Band 5	Left Touch	0.283	0.145	0.145	0.428	
		Right Touch	0.282	0.383	0.383	0.665	
		Left Tilt	0.159	0.175	0.175	0.334	
		Right Tilt	0.181	0.360	0.360	0.541	
	LTE Band 4	Left Touch	0.053	0.145	0.145	0.198	
		Right Touch	0.033	0.383	0.383	0.416	
		Left Tilt	0.021	0.175	0.175	0.196	
		Right Tilt	0.035	0.360	0.360	0.395	
	LTE Band 2	Left Touch	0.080	0.145	0.145	0.225	
		Right Touch	0.073	0.383	0.383	0.456	
		Left Tilt	0.060	0.175	0.175	0.235	
		Right Tilt	0.068	0.360	0.360	0.428	

Table 12.4.20 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)		ΣSAR (W/kg)
			1	1+2	1	1+2	
Head SAR	GSM 850	Left Touch	0.179	0.090	0.090	0.269	
		Right Touch	0.101	0.327	0.327	0.428	
		Left Tilt	0.096	0.048	0.048	0.144	
		Right Tilt	0.079	0.175	0.175	0.254	
	GPRS 850	Left Touch	0.204	0.090	0.090	0.294	
		Right Touch	0.130	0.327	0.327	0.457	
		Left Tilt	0.107	0.048	0.048	0.155	
		Right Tilt	0.097	0.175	0.175	0.272	
	GSM 1900	Left Touch	0.033	0.090	0.090	0.123	
		Right Touch	0.021	0.327	0.327	0.348	
		Left Tilt	0.021	0.048	0.048	0.069	
		Right Tilt	0.018	0.175	0.175	0.193	
	GPRS 1900	Left Touch	0.042	0.090	0.090	0.132	
		Right Touch	0.030	0.327	0.327	0.357	
		Left Tilt	0.025	0.048	0.048	0.073	
		Right Tilt	0.026	0.175	0.175	0.201	
	WCDMA 850	Left Touch	0.284	0.090	0.090	0.374	
		Right Touch	0.230	0.327	0.327	0.557	
		Left Tilt	0.159	0.048	0.048	0.207	
		Right Tilt	0.149	0.175	0.175	0.324	
	WCDMA 1900	Left Touch	0.080	0.090	0.090	0.170	
		Right Touch	0.059	0.327	0.327	0.386	
		Left Tilt	0.058	0.048	0.048	0.106	
		Right Tilt	0.054	0.175	0.175	0.229	
	LTE Band 12	Left Touch	0.108	0.090	0.090	0.198	
		Right Touch	0.108	0.327	0.327	0.435	
		Left Tilt	0.024	0.048	0.048	0.072	
		Right Tilt	0.055	0.175	0.175	0.230	
	LTE Band 5	Left Touch	0.283	0.090	0.090	0.373	
		Right Touch	0.282	0.327	0.327	0.609	
		Left Tilt	0.159	0.048	0.048	0.207	
		Right Tilt	0.181	0.175	0.175	0.356	
	LTE Band 4	Left Touch	0.053	0.090	0.090	0.143	
		Right Touch	0.033	0.327	0.327	0.360	
		Left Tilt	0.021	0.048	0.048	0.069	
		Right Tilt	0.035	0.175	0.175	0.210	
	LTE Band 2	Left Touch	0.080	0.090	0.090	0.170	
		Right Touch	0.073	0.327	0.327	0.400	
		Left Tilt	0.060	0.048	0.048	0.108	
		Right Tilt	0.068	0.175	0.175	0.243	

Table 12.4.21 Simultaneous Transmission Scenario : 2.4 GHz W-LAN MIMO + 5 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2.4G W-LAN MIMO SAR (W/kg)		5G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	1+2	1	1+2	
Head SAR	5.2G W-LAN MIMO	Left Touch	0.120	0.396	0.396	0.516	
		Right Touch	0.539	0.640	0.640	1.179	
		Left Tilt	0.198	0.316	0.316	0.514	
		Right Tilt	0.323	0.503	0.503	0.826	
	5.6G W-LAN MIMO	Left Touch	0.120	0.174	0.174	0.294	
		Right Touch	0.539	0.502	0.502	1.041	
		Left Tilt	0.198	0.259	0.259	0.457	
		Right Tilt	0.323	0.323	0.323	0.646	
	5.8G W-LAN MIMO	Left Touch	0.120	0.145	0.145	0.265	
		Right Touch	0.539	0.383	0.383	0.922	
		Left Tilt	0.198	0.175	0.175	0.373	
		Right Tilt	0.323	0.360	0.360	0.683	

Table 12.4.22 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)		5G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	1+2	1	1+2	
Head SAR	5.2G W-LAN MIMO	Left Touch	0.090	0.396	0.396	0.486	
		Right Touch	0.327	0.640	0.640	0.967	
		Left Tilt	0.048	0.316	0.316	0.384	
		Right Tilt	0.175	0.503	0.503	0.678	
	5.6G W-LAN MIMO	Left Touch	0.090	0.174	0.174	0.264	
		Right Touch	0.327	0.502	0.502	0.829	
		Left Tilt	0.048	0.259	0.259	0.307	
		Right Tilt	0.175	0.323	0.323	0.498	
	5.8G W-LAN MIMO	Left Touch	0.090	0.145	0.145	0.235	
		Right Touch	0.327	0.383	0.383	0.710	
		Left Tilt	0.048	0.175	0.175	0.223	
		Right Tilt	0.175	0.360	0.360	0.535	

Table 12.4.23 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)
			1	1+2	1	1+2	
Head SAR	2.4G W-LAN Ant.2	Left Touch	0.090	0.090	0.090	0.180	
		Right Touch	0.327	0.327	0.327	0.654	
		Left Tilt	0.048	0.048	0.048	0.096	
		Right Tilt	0.175	0.175	0.175	0.350	

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)			
			1	2	1	2	1	2	1+2	1+3	1+2+3	
Body-Worn SAR	GSM 850	Front	0.498	0.135	0.063	0.114	0.633	0.612	0.747			
		Rear	0.441	0.091	0.265	0.114	0.532	0.706	0.706			
	GPRS 850	Front	0.508	0.135	0.114	0.114	0.643	0.622	0.757			
		Rear	0.484	0.091	0.265	0.114	0.575	0.749	0.840			
	GSM 1900	Front	0.239	0.135	0.114	0.114	0.374	0.353	0.488			
		Rear	0.233	0.091	0.265	0.114	0.324	0.498	0.589			
	GPRS 1900	Front	0.344	0.135	0.114	0.114	0.479	0.458	0.593			
		Rear	0.326	0.091	0.265	0.114	0.417	0.591	0.682			
	WCDMA 850	Front	0.545	0.135	0.114	0.114	0.680	0.659	0.794			
		Rear	0.611	0.091	0.265	0.114	0.702	0.876	0.967			
	WCDMA 1900	Front	0.564	0.135	0.114	0.114	0.699	0.678	0.813			
		Rear	0.570	0.091	0.265	0.114	0.661	0.835	0.926			
	LTE Band 12	Front	0.211	0.135	0.114	0.114	0.346	0.325	0.460			
		Rear	0.263	0.091	0.265	0.114	0.354	0.528	0.619			
	LTE Band 5	Front	0.786	0.135	0.114	0.114	0.921	0.900	1.035			
		Rear	0.901	0.091	0.265	0.114	0.992	1.166	1.257			
	LTE Band 4	Front	0.389	0.135	0.114	0.114	0.524	0.503	0.638			
		Rear	0.426	0.091	0.265	0.114	0.517	0.691	0.782			
LTE Band 2	Front	0.660	0.135	0.114	0.114	0.795	0.774	0.909				
	Rear	0.678	0.091	0.265	0.114	0.769	0.943	1.034				

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		5.6G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)		
			1	2	1	2	1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.135	0.063	0.114	0.633	0.612	0.747		
		Rear	0.441	0.091	0.265	0.114	0.532	0.706	0.706		
	GPRS 850	Front	0.508	0.135	0.063	0.114	0.643	0.571	0.708		
		Rear	0.484	0.091	0.265	0.114	0.575	0.749	1.036		
	GSM 1900	Front	0.239	0.135	0.063	0.114	0.374	0.302	0.437		
		Rear	0.233	0.091	0.265	0.114	0.324	0.498	0.785		
	GPRS 1900	Front	0.344	0.135	0.063	0.114	0.479	0.407	0.542		
		Rear	0.326	0.091	0.265	0.114	0.417	0.591	0.682		
	WCDMA 850	Front	0.545	0.135	0.063	0.114	0.680	0.608	0.743		
		Rear	0.611	0.091	0.265	0.114	0.702	0.876	1.163		
	WCDMA 1900	Front	0.564	0.135	0.063	0.114	0.699	0.627	0.762		
		Rear	0.570	0.091	0.265	0.114	0.661	0.835	1.122		
	LTE Band 12	Front	0.211	0.135	0.063	0.114	0.346	0.274	0.409		
		Rear	0.263	0.091	0.265	0.114	0.354	0.528	0.619		
	LTE Band 5	Front	0.786	0.135	0.063	0.114	0.921	0.849	0.984		
		Rear	0.901	0.091	0.265	0.114	0.992	1.166	1.257		
	LTE Band 4	Front	0.389	0.135	0.063	0.114	0.524	0.452	0.587		
		Rear	0.426	0.091	0.265	0.114	0.517	0.691	0.782		
LTE Band 2	Front	0.660	0.135	0.063	0.114	0.795	0.723	0.858			
	Rear	0.678	0.091	0.265	0.114	0.769	0.943	1.034			

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)		
			1	2	1	2	1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.135	0.063	0.114	0.633	0.612	0.747		
		Rear	0.441	0.091	0.265	0.114	0.532	0.706	0.706		
	GPRS 850	Front	0.508	0.135	0.063	0.114	0.643	0.572	0.707		
		Rear	0.484	0.091	0.265	0.114	0.575	0.749	1.036		
	GSM 1900	Front	0.239	0.135	0.063	0.114	0.374	0.303	0.438		
		Rear	0.233	0.091	0.265	0.114	0.324	0.498	0.785		
	GPRS 1900	Front	0.344	0.135	0.063	0.114	0.479	0.408	0.543		
		Rear	0.326	0.091	0.265	0.114	0.417	0.591	0.682		
	WCDMA 850	Front	0.545	0.135	0.063	0.114	0.680	0.609	0.744		
		Rear	0.611	0.091	0.265	0.114	0.702	0.876	1.109		
	WCDMA 1900	Front	0.564	0.135	0.063	0.114	0.699	0.628	0.763		
		Rear	0.570	0.091	0.265	0.114	0.661	0.835	1.069		
	LTE Band 12	Front	0.211	0.135	0.063	0.114	0.346	0.275	0.410		
		Rear	0.263	0.091	0.265	0.114	0.354	0.528	0.619		
	LTE Band 5	Front	0.786	0.135	0.063	0.114	0.921	0.850	0.985		
		Rear	0.901	0.091	0.265	0.114	0.992	1.166	1.257		
	LTE Band 4	Front	0.389	0.135	0.063	0.114	0.524	0.453	0.588		
		Rear	0.426	0.091	0.265	0.114	0.517	0.691	0.782		
LTE Band 2	Front	0.660	0.135	0.063	0.114	0.795	0.724	0.859			
	Rear	0.678	0.091	0.265	0.114	0.769	0.943	1.034			

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant.1 SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)		
			1	2	1	2	1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.135	0.062	0.114	0.560	0.612	0.674		
		Rear	0.441	0.091	0.265	0.114	0.487	0.706	0.752		
	GPRS 850	Front	0.508	0.135	0.062	0.114	0.570	0.622	0.684		
		Rear	0.484	0.091	0.265	0.114	0.530	0.749	0.795		
	GSM 1900	Front	0.239	0.135	0.062	0.114	0.301	0.353	0.415		
		Rear	0.233	0.091	0.265	0.114	0.279	0.498	0.544		
	GPRS 1900	Front	0.344	0.135	0.062	0.114	0.406	0.458	0.520		
		Rear	0.326	0.091	0.265	0.114	0.372	0.591	0.637		
	WCDMA 850	Front	0.545	0.135	0.062	0.114	0.607	0.659	0.721		
		Rear	0.611	0.091	0.265	0.114	0.657	0.876	0.922		
	WCDMA 1900	Front	0.564	0.135	0.062	0.114	0.626	0.678	0.740		
		Rear	0.570	0.091	0.265	0.114	0.616	0.835	0.881		
	LTE Band 12	Front	0.211	0.135	0.062	0.114	0.273	0.325	0.387		
		Rear	0.263	0.091	0.265	0.114	0.273	0.528	0.574		
	LTE Band 5	Front	0.786	0.135	0.062	0.114	0.848	0.860	0.962		
		Rear	0.901	0.091	0.265	0.114	0.947	1.166	1.212		
	LTE Band 4	Front	0.389	0.135	0.062	0.114	0.451	0.503	0.565		
		Rear	0.426	0.091	0.265	0.114	0.472	0.691	0.737		
LTE Band 2	Front	0.660	0.135	0.062	0.114	0.722	0.774	0.836			
	Rear	0.678	0.091	0.265	0.114	0.724	0.943	0.989			

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant.1 SAR (W/kg)		5.6G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)		
			1	2	1	2	1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.135	0.062	0.114	0.560	0.561	0.623		
		Rear	0.441	0.091	0.265	0.114	0.487	0.706	0.748		
	GPRS 850	Front	0.508	0.135	0.062	0.114	0.570	0.571	0.633		
		Rear	0.484	0.091	0.265	0.114	0.530	0.749	0.791		
	GSM 1900	Front	0.239	0.135	0.062	0.114	0.301	0.302	0.364		
		Rear	0.233	0.091	0.265	0.114	0.279	0.498	0.540		
	GPRS 1900	Front	0.344	0.135	0.062	0.114	0.406	0.407	0.469		
		Rear	0.326	0.091	0.265	0.114	0.372	0.591	0.633		
	WCDMA 850	Front	0.545	0.135	0.062	0.114	0.607	0.608	0.670		
		Rear	0.611	0.091	0.265	0.114	0.657	0.876	0.922		
	WCDMA 1900	Front	0.564	0.135	0.062	0.114	0.626	0.627	0.689		
		Rear	0.570	0.091	0.265	0.114	0.616	0.835	0.881		
	LTE Band 12	Front	0.211	0.135	0.062	0.114	0.273	0.274	0.336		
		Rear	0.263	0.091	0.265	0.114	0.273	0.528	0.570		
	LTE Band 5	Front	0.786	0.135	0.062	0.114	0.848	0.849	0.911		
		Rear	0.901	0.091	0.265	0.114	0				

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant.1 SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2	1+2	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.062	0.064	0.560	0.562	0.624	
		Rear	0.441	0.046	0.046	0.398	0.487	0.839	0.885	
	GPRS 850	Front	0.508	0.062	0.062	0.064	0.570	0.572	0.634	
		Rear	0.484	0.046	0.046	0.398	0.530	0.882	0.928	
	GSM 1900	Front	0.239	0.062	0.062	0.064	0.301	0.303	0.365	
		Rear	0.233	0.046	0.046	0.398	0.279	0.631	0.677	
	GPRS 1900	Front	0.344	0.062	0.062	0.064	0.406	0.408	0.470	
		Rear	0.326	0.046	0.046	0.398	0.372	0.724	0.770	
	WCDMA 850	Front	0.545	0.062	0.062	0.064	0.607	0.609	0.671	
		Rear	0.611	0.046	0.046	0.398	0.657	1.009	1.055	
	WCDMA 1900	Front	0.564	0.062	0.062	0.064	0.626	0.628	0.690	
		Rear	0.570	0.046	0.046	0.398	0.616	0.968	1.014	
	LTE Band 12	Front	0.211	0.062	0.062	0.064	0.273	0.275	0.337	
		Rear	0.263	0.046	0.046	0.398	0.309	0.661	0.707	
	LTE Band 5	Front	0.786	0.062	0.062	0.064	0.848	0.850	0.912	
		Rear	0.901	0.046	0.046	0.398	0.947	1.299	1.345	
	LTE Band 4	Front	0.389	0.062	0.062	0.064	0.451	0.453	0.515	
		Rear	0.426	0.046	0.046	0.398	0.472	0.824	0.870	
	LTE Band 2	Front	0.660	0.062	0.062	0.064	0.722	0.724	0.786	
		Rear	0.678	0.046	0.046	0.398	0.724	1.076	1.122	

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth Ant.1 SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2	1+2	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.062	0.049	0.560	0.547	0.609	
		Rear	0.441	0.046	0.046	0.049	0.487	0.490	0.536	
	GPRS 850	Front	0.508	0.062	0.062	0.049	0.570	0.557	0.619	
		Rear	0.484	0.046	0.046	0.049	0.530	0.533	0.579	
	GSM 1900	Front	0.239	0.062	0.062	0.049	0.301	0.288	0.350	
		Rear	0.233	0.046	0.046	0.049	0.279	0.282	0.328	
	GPRS 1900	Front	0.344	0.062	0.062	0.049	0.406	0.393	0.455	
		Rear	0.326	0.046	0.046	0.049	0.372	0.375	0.421	
	WCDMA 850	Front	0.545	0.062	0.062	0.049	0.607	0.594	0.656	
		Rear	0.611	0.046	0.046	0.049	0.657	0.660	0.706	
	WCDMA 1900	Front	0.564	0.062	0.062	0.049	0.626	0.613	0.675	
		Rear	0.570	0.046	0.046	0.049	0.616	0.619	0.665	
	LTE Band 12	Front	0.211	0.062	0.062	0.049	0.273	0.260	0.322	
		Rear	0.263	0.046	0.046	0.049	0.309	0.312	0.358	
	LTE Band 5	Front	0.786	0.062	0.062	0.049	0.848	0.835	0.897	
		Rear	0.901	0.046	0.046	0.049	0.947	0.950	0.996	
	LTE Band 4	Front	0.389	0.062	0.062	0.049	0.451	0.438	0.500	
		Rear	0.426	0.046	0.046	0.049	0.472	0.475	0.521	
	LTE Band 2	Front	0.660	0.062	0.062	0.049	0.722	0.709	0.771	
		Rear	0.678	0.046	0.046	0.049	0.724	0.727	0.773	

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1+2	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.093	0.093	0.591	
		Rear	0.441	0.046	0.076	0.076	0.517	
	GPRS 850	Front	0.508	0.062	0.093	0.093	0.601	
		Rear	0.484	0.046	0.076	0.076	0.560	
	GSM 1900	Front	0.239	0.062	0.093	0.093	0.332	
		Rear	0.233	0.046	0.076	0.076	0.309	
	GPRS 1900	Front	0.344	0.062	0.093	0.093	0.437	
		Rear	0.326	0.046	0.076	0.076	0.402	
	WCDMA 850	Front	0.545	0.062	0.093	0.093	0.638	
		Rear	0.611	0.046	0.076	0.076	0.687	
	WCDMA 1900	Front	0.564	0.062	0.093	0.093	0.657	
		Rear	0.570	0.046	0.076	0.076	0.646	
	LTE Band 12	Front	0.211	0.062	0.093	0.093	0.304	
		Rear	0.263	0.046	0.076	0.076	0.339	
	LTE Band 5	Front	0.786	0.062	0.093	0.093	0.879	
		Rear	0.901	0.046	0.076	0.076	0.977	
	LTE Band 4	Front	0.389	0.062	0.093	0.093	0.482	
		Rear	0.426	0.046	0.076	0.076	0.502	
	LTE Band 2	Front	0.660	0.062	0.093	0.093	0.753	
		Rear	0.678	0.046	0.076	0.076	0.754	

Table 12.5.9 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1+2	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.049	0.049	0.547	
		Rear	0.441	0.046	0.049	0.049	0.490	
	GPRS 850	Front	0.508	0.062	0.049	0.049	0.557	
		Rear	0.484	0.046	0.049	0.049	0.533	
	GSM 1900	Front	0.239	0.062	0.049	0.049	0.288	
		Rear	0.233	0.046	0.049	0.049	0.282	
	GPRS 1900	Front	0.344	0.062	0.049	0.049	0.393	
		Rear	0.326	0.046	0.049	0.049	0.375	
	WCDMA 850	Front	0.545	0.062	0.049	0.049	0.594	
		Rear	0.611	0.046	0.049	0.049	0.660	
	WCDMA 1900	Front	0.564	0.062	0.049	0.049	0.613	
		Rear	0.570	0.046	0.049	0.049	0.619	
	LTE Band 12	Front	0.211	0.062	0.049	0.049	0.260	
		Rear	0.263	0.046	0.049	0.049	0.312	
	LTE Band 5	Front	0.786	0.062	0.049	0.049	0.835	
		Rear	0.901	0.046	0.049	0.049	0.950	
	LTE Band 4	Front	0.389	0.062	0.049	0.049	0.438	
		Rear	0.426	0.046	0.049	0.049	0.475	
	LTE Band 2	Front	0.660	0.062	0.049	0.049	0.709	
		Rear	0.678	0.046	0.049	0.049	0.727	

Table 12.5.10 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1+2	1+2+3
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.135	0.135	0.633	
		Rear	0.441	0.046	0.091	0.091	0.532	
	GPRS 850	Front	0.508	0.062	0.135	0.135	0.643	
		Rear	0.484	0.046	0.091	0.091	0.575	
	GSM 1900	Front	0.239	0.062	0.135	0.135	0.374	
		Rear	0.233	0.046	0.091	0.091	0.324	
	GPRS 1900	Front	0.344	0.062	0.135	0.135	0.479	
		Rear	0.326	0.046	0.091	0.091	0.417	
	WCDMA 850	Front	0.545	0.062	0.135	0.135	0.680	
		Rear	0.611	0.046	0.091	0.091	0.702	
	WCDMA 1900	Front	0.564	0.062	0.135	0.135	0.699	
		Rear	0.570	0.046	0.091	0.091	0.661	
	LTE Band 12	Front	0.211	0.062	0.135	0.135	0.346	
		Rear	0.263	0.046	0.091	0.091	0.354	
	LTE Band 5	Front	0.786	0.062	0.135	0.135	0.921	
		Rear	0.901	0.046	0.091	0.091	0.992	
	LTE Band 4	Front	0.389	0.062	0.135	0.135	0.524	
		Rear	0.426	0.046	0.091	0.091	0.517	
	LTE Band 2	Front	0.660	0.062	0.135	0.135	0.795	
		Rear	0.678	0.046	0.091	0.091	0.769	

Table 12.5.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Body-Worn SAR	GSM 850	Front	0.498	0.498	0.052	0.052	0.550	0.550
		Rear	0.441	0.441	0.124	0.124	0.565	0.565
	GPRS 850	Front	0.508	0.508	0.052	0.052	0.560	0.560
		Rear	0.484	0.484	0.124	0.124	0.608	0.608
	GSM 1900	Front	0.239	0.239	0.052	0.052	0.291	0.291
		Rear	0.233	0.233	0.124	0.124	0.357	0.357
	GPRS 1900	Front	0.344	0.344	0.052	0.052	0.396	0.396
		Rear	0.326	0.326	0.124	0.124	0.450	0.450
	WCDMA 850	Front	0.545	0.545	0.052	0.052	0.597	0.597
		Rear	0.611	0.611	0.124	0.124	0.735	0.735
	WCDMA 1900	Front	0.564	0.564	0.052	0.052	0.616	0.616
		Rear	0.570	0.570	0.124	0.124	0.694	0.694
	LTE Band 12	Front	0.211	0.211	0.052	0.052	0.263	0.263
		Rear	0.263	0.263	0.124	0.124	0.387	0.387
	LTE Band 5	Front	0.786	0.786	0.052	0.052	0.838	0.838
		Rear	0.901	0.901	0.124	0.124	1.025	1.025
	LTE Band 4	Front	0.389	0.389	0.052	0.052	0.441	0.441
		Rear	0.426	0.426	0.124	0.124	0.550	0.550
	LTE Band 2	Front	0.660	0.660	0.052	0.052	0.712	0.712
		Rear	0.678	0.678	0.124	0.124	0.802	0.802

Table 12.5.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Body-Worn SAR	GSM 850	Front	0.498	0.498	0.049	0.049	0.547	0.547
		Rear	0.441	0.441	0.163	0.163	0.604	0.604
	GPRS 850	Front	0.508	0.508	0.049	0.049	0.557	0.557
		Rear	0.484	0.484	0.163	0.163	0.647	0.647
	GSM 1900	Front	0.239	0.239	0.049	0.049	0.288	0.288
		Rear	0.233	0.233	0.163	0.163	0.396	0.396
	GPRS 1900	Front	0.344	0.344	0.049	0.049	0.393	0.393
		Rear	0.326	0.326	0.163	0.163	0.489	0.489
	WCDMA 850	Front	0.545	0.545	0.049	0.049	0.594	0.594
		Rear	0.611	0.611	0.163	0.163	0.774	0.774
	WCDMA 1900	Front	0.564	0.564	0.049	0.049	0.613	0.613
		Rear	0.570	0.570	0.163	0.163	0.733	0.733
	LTE Band 12	Front	0.211	0.211	0.049	0.049	0.260	0.260
		Rear	0.263	0.263	0.163	0.163	0.426	0.426
	LTE Band 5	Front	0.786	0.786	0.049	0.049	0.835	0.835
		Rear	0.901	0.901	0.163	0.163	1.064	1.064
	LTE Band 4	Front	0.389	0.389	0.049	0.049	0.438	0.438
		Rear	0.426	0.426	0.163	0.163	0.589	0.589
	LTE Band 2	Front	0.660	0.660	0.049	0.049	0.709	0.709
		Rear	0.678	0.678	0.163	0.163	0.841	0.841

Table 12.5.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.3G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Body-Worn SAR	GSM 850	Front	0.498	0.498	0.114	0.114	0.612	0.612
		Rear	0.441	0.441	0.265	0.265	0.706	0.706
	GPRS 850	Front	0.508	0.508	0.114	0.114	0.622	0.622
		Rear	0.484	0.484	0.265	0.265	0.749	0.749
	GSM 1900	Front	0.239	0.239	0.114	0.114	0.353	0.353
		Rear	0.233	0.233	0.265	0.265	0.498	0.498
	GPRS 1900	Front	0.344	0.344	0.114	0.114	0.458	0.458
		Rear	0.326	0.326	0.265	0.265	0.591	0.591
	WCDMA 850	Front	0.545	0.545	0.114	0.114	0.659	0.659
		Rear	0.611	0.611	0.265	0.265	0.876	0.876
	WCDMA 1900	Front	0.564	0.564	0.114	0.114	0.678	0.678
		Rear	0.570	0.570	0.265	0.265	0.835	0.835
	LTE Band 12	Front	0.211	0.211	0.114	0.114	0.325	0.325
		Rear	0.263	0.263	0.265	0.265	0.528	0.528
	LTE Band 5	Front	0.786	0.786	0.114	0.114	0.900	0.900
		Rear	0.901	0.901	0.265	0.265	1.166	1.166
	LTE Band 4	Front	0.389	0.389	0.114	0.114	0.503	0.503
		Rear	0.426	0.426	0.265	0.265	0.691	0.691
	LTE Band 2	Front	0.660	0.660	0.114	0.114	0.774	0.774
		Rear	0.678	0.678	0.265	0.265	0.943	0.943

Table 12.5.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Body-Worn SAR	GSM 850	Front	0.498	0.498	0.025	0.025	0.523	0.523
		Rear	0.441	0.441	0.156	0.156	0.597	0.597
	GPRS 850	Front	0.508	0.508	0.025	0.025	0.533	0.533
		Rear	0.484	0.484	0.156	0.156	0.640	0.640
	GSM 1900	Front	0.239	0.239	0.025	0.025	0.264	0.264
		Rear	0.233	0.233	0.156	0.156	0.389	0.389
	GPRS 1900	Front	0.344	0.344	0.025	0.025	0.369	0.369
		Rear	0.326	0.326	0.156	0.156	0.482	0.482
	WCDMA 850	Front	0.545	0.545	0.025	0.025	0.570	0.570
		Rear	0.611	0.611	0.156	0.156	0.767	0.767
	WCDMA 1900	Front	0.564	0.564	0.025	0.025	0.589	0.589
		Rear	0.570	0.570	0.156	0.156	0.736	0.736
	LTE Band 12	Front	0.211	0.211	0.025	0.025	0.236	0.236
		Rear	0.263	0.263	0.156	0.156	0.419	0.419
	LTE Band 5	Front	0.786	0.786	0.025	0.025	0.811	0.811
		Rear	0.901	0.901	0.156	0.156	1.057	1.057
	LTE Band 4	Front	0.389	0.389	0.025	0.025	0.414	0.414
		Rear	0.426	0.426	0.156	0.156	0.582	0.582
	LTE Band 2	Front	0.660	0.660	0.025	0.025	0.685	0.685
		Rear	0.678	0.678	0.156	0.156	0.834	0.834

Table 12.5.15 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2	1	2
Body-Worn SAR	GSM 850	Front	0.498	0.498	0.036	0.036	0.534	0.534
		Rear	0.441	0.441	0.363	0.363	0.804	0.804
	GPRS 850	Front	0.508	0.508	0.036	0.036	0.544	0.544
		Rear	0.484	0.484	0.363	0.363	0.847	0.847
	GSM 1900	Front	0.239	0.239	0.036	0.036	0.275	0.275
		Rear	0.233	0.233	0.363	0.363	0.596	0.596
	GPRS 1900	Front	0.344	0.344	0.036	0.036	0.380	0.380
		Rear	0.326	0.326	0.363	0.363	0.689	0.689
	WCDMA 850	Front	0.545	0.545	0.036	0.036	0.581	0.581
		Rear	0.611	0.611	0.363	0.363	0.974	0.974
	WCDMA 1900	Front	0.564	0.564	0.036	0.036	0.600	0.600
		Rear	0.570	0.570	0.363	0.363	0.933	0.933
	LTE Band 12	Front	0.211	0.211	0.036	0.036	0.247	0.247
		Rear	0.263	0.263	0.363	0.363	0.626	0.626
	LTE Band 5	Front	0.786	0.786	0.036	0.036	0.822	0.822
		Rear	0.901	0.901	0.363	0.363	1.264	1.264
	LTE Band 4	Front	0.389	0.389	0.036	0.036	0.425	0.425
		Rear	0.426	0.426	0.363	0.363	0.789	0.789
	LTE Band 2	Front	0.660	0.660	0.036	0.036	0.696	0.696
		Rear	0.678	0.678	0.363	0.363	1.041	1.041

Table 12.5.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.6G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.498	0.063	0.561		
		Rear	0.441	0.461	0.902		
	GPRS 850	Front	0.508	0.063	0.571		
		Rear	0.484	0.461	0.945		
	GSM 1900	Front	0.239	0.063	0.302		
		Rear	0.233	0.461	0.694		
	GPRS 1900	Front	0.344	0.063	0.407		
		Rear	0.326	0.461	0.787		
	WCDMA 850	Front	0.545	0.063	0.608		
		Rear	0.611	0.461	1.072		
	WCDMA 1900	Front	0.564	0.063	0.627		
		Rear	0.570	0.461	1.031		
	LTE Band 12	Front	0.211	0.063	0.274		
		Rear	0.263	0.461	0.724		
	LTE Band 5	Front	0.786	0.063	0.849		
		Rear	0.901	0.461	1.362		
	LTE Band 4	Front	0.389	0.063	0.452		
		Rear	0.426	0.461	0.887		
	LTE Band 2	Front	0.660	0.063	0.723		
		Rear	0.678	0.461	1.138		

Table 12.5.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN Ant.1 SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.498	0.027	0.525		
		Rear	0.441	0.133	0.574		
	GPRS 850	Front	0.508	0.027	0.535		
		Rear	0.484	0.133	0.617		
	GSM 1900	Front	0.239	0.027	0.266		
		Rear	0.233	0.133	0.366		
	GPRS 1900	Front	0.344	0.027	0.371		
		Rear	0.326	0.133	0.459		
	WCDMA 850	Front	0.545	0.027	0.572		
		Rear	0.611	0.133	0.744		
	WCDMA 1900	Front	0.564	0.027	0.591		
		Rear	0.570	0.133	0.703		
	LTE Band 12	Front	0.211	0.027	0.238		
		Rear	0.263	0.133	0.396		
	LTE Band 5	Front	0.786	0.027	0.813		
		Rear	0.901	0.133	1.034		
	LTE Band 4	Front	0.389	0.027	0.416		
		Rear	0.426	0.133	0.559		
	LTE Band 2	Front	0.660	0.027	0.687		
		Rear	0.678	0.133	0.811		

Table 12.5.18 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.498	0.087	0.585		
		Rear	0.441	0.481	0.922		
	GPRS 850	Front	0.508	0.087	0.595		
		Rear	0.484	0.481	0.965		
	GSM 1900	Front	0.239	0.087	0.326		
		Rear	0.233	0.481	0.714		
	GPRS 1900	Front	0.344	0.087	0.431		
		Rear	0.326	0.481	0.807		
	WCDMA 850	Front	0.545	0.087	0.632		
		Rear	0.611	0.481	1.092		
	WCDMA 1900	Front	0.564	0.087	0.651		
		Rear	0.570	0.481	1.051		
	LTE Band 12	Front	0.211	0.087	0.298		
		Rear	0.263	0.481	0.744		
	LTE Band 5	Front	0.786	0.087	0.873		
		Rear	0.901	0.481	1.382		
	LTE Band 4	Front	0.389	0.087	0.476		
		Rear	0.426	0.481	0.907		
	LTE Band 2	Front	0.660	0.087	0.747		
		Rear	0.678	0.481	1.159		

Table 12.5.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)
			1	2	1+2		
Body-Worn SAR	GSM 850	Front	0.498	0.064	0.562		
		Rear	0.441	0.398	0.839		
	GPRS 850	Front	0.508	0.064	0.572		
		Rear	0.484	0.398	0.882		
	GSM 1900	Front	0.239	0.064	0.303		
		Rear	0.233	0.398	0.631		
	GPRS 1900	Front	0.344	0.064	0.408		
		Rear	0.326	0.398	0.724		
	WCDMA 850	Front	0.545	0.064	0.609		
		Rear	0.611	0.398	1.009		
	WCDMA 1900	Front	0.564	0.064	0.628		
		Rear	0.570	0.398	0.968		
	LTE Band 12	Front	0.211	0.064	0.275		
		Rear	0.263	0.398	0.661		
	LTE Band 5	Front	0.786	0.064	0.850		
		Rear	0.901	0.398	1.299		
	LTE Band 4	Front	0.389	0.064	0.453		
		Rear	0.426	0.398	0.824		
	LTE Band 2	Front	0.660	0.064	0.724		
		Rear	0.678	0.398	1.076		

Table 12.5.20 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.498	0.062	0.560
		Rear	0.441	0.046	0.487
	GPRS 850	Front	0.508	0.062	0.570
		Rear	0.484	0.046	0.530
	GSM 1900	Front	0.239	0.062	0.301
		Rear	0.233	0.046	0.279
	GPRS 1900	Front	0.344	0.062	0.406
		Rear	0.326	0.046	0.372
	WCDMA 850	Front	0.545	0.062	0.607
		Rear	0.611	0.046	0.657
	WCDMA 1900	Front	0.564	0.062	0.626
		Rear	0.570	0.046	0.616
	LTE Band 12	Front	0.211	0.062	0.273
		Rear	0.263	0.046	0.309
	LTE Band 5	Front	0.786	0.062	0.848
		Rear	0.901	0.046	0.947
	LTE Band 4	Front	0.389	0.062	0.451
		Rear	0.426	0.046	0.472
	LTE Band 2	Front	0.660	0.062	0.722
		Rear	0.678	0.046	0.724

Table 12.5.21 Simultaneous Transmission Scenario : 2.4 GHz W-LAN MIMO + 5 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN MIMO SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.2G W-LAN MIMO	Front	0.135	0.114	0.249
		Rear	0.091	0.265	0.356
	5.6G W-LAN MIMO	Front	0.135	0.063	0.198
		Rear	0.081	0.461	0.552
	5.8G W-LAN MIMO	Front	0.135	0.064	0.199
		Rear	0.091	0.398	0.489

Table 12.5.22 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN MIMO	Front	0.062	0.114	0.176
		Rear	0.046	0.265	0.311
	5.6G W-LAN MIMO	Front	0.062	0.063	0.125
		Rear	0.046	0.461	0.507
	5.8G W-LAN MIMO	Front	0.062	0.064	0.126
		Rear	0.046	0.398	0.444

Table 12.5.23 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN MIMO	Front	0.062	0.049	0.111
		Rear	0.046	0.049	0.095

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN MIMO SAR (W/kg)			5.2G W-LAN MIMO SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3						
Hotspot SAR	GPRS 850	Top	-	0.150	0.119	0.150	0.119	0.269	0.224	0.224	0.224	0.224	0.224	
		Bottom	0.224	-	-	0.224	-	-	0.224	0.224	0.224	0.224	0.224	
		Front	0.508	0.135	0.109	0.643	0.167	0.172	0.810	0.643	0.573	0.708	0.811	
		Rear	0.484	0.091	0.274	0.575	0.728	0.849	0.849	0.575	0.728	0.849	0.849	
		Right	0.141	-	-	0.141	-	-	0.141	0.141	0.141	0.141	0.141	
	GPRS 1900	Top	-	0.150	0.119	0.150	0.119	0.269	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.478	-	-	0.478	-	-	0.478	0.478	0.478	0.478	0.478	
		Front	0.344	0.135	0.109	0.479	0.453	0.588	0.588	0.479	0.453	0.588	0.588	
		Rear	0.328	0.091	0.274	0.417	0.600	0.691	0.691	0.417	0.600	0.691	0.691	
		Right	0.090	-	-	0.090	-	-	0.090	0.090	0.090	0.090	0.090	
	WCDMA 850	Top	-	0.150	0.119	0.150	0.119	0.269	0.277	0.277	0.277	0.277	0.277	
		Bottom	0.277	-	-	0.277	-	-	0.277	0.277	0.277	0.277	0.277	
		Front	0.545	0.135	0.109	0.680	0.654	0.789	0.789	0.680	0.654	0.789	0.789	
		Rear	0.611	0.091	0.274	0.702	0.885	0.976	0.976	0.702	0.885	0.976	0.976	
		Right	0.197	-	-	0.197	-	-	0.197	0.197	0.197	0.197	0.197	
	WCDMA 1900	Top	-	0.150	0.119	0.150	0.119	0.269	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.882	-	-	0.882	-	-	0.882	0.882	0.882	0.882	0.882	
		Front	0.584	0.135	0.109	0.689	0.663	0.800	0.800	0.689	0.663	0.800	0.800	
		Rear	0.570	0.091	0.274	0.661	0.844	0.935	0.935	0.661	0.844	0.935	0.935	
		Right	0.189	-	-	0.189	-	-	0.189	0.189	0.189	0.189	0.189	
	LTE Band 12	Top	-	0.150	0.119	0.150	0.119	0.269	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.065	-	-	0.065	-	-	0.065	0.065	0.065	0.065	0.065	
		Front	0.271	0.135	0.109	0.346	0.320	0.451	0.451	0.271	0.320	0.451	0.451	
		Rear	0.263	0.091	0.274	0.334	0.377	0.428	0.428	0.263	0.377	0.428	0.428	
		Right	0.236	-	-	0.236	-	-	0.236	0.236	0.236	0.236	0.236	
	LTE Band 5	Top	-	0.150	0.119	0.150	0.119	0.269	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.389	-	-	0.389	-	-	0.389	0.389	0.389	0.389	0.389	
		Front	0.788	0.135	0.109	0.921	0.895	1.030	1.030	0.788	0.895	1.030	1.030	
		Rear	0.901	0.091	0.274	0.992	1.175	1.266	1.266	0.901	1.175	1.266	1.266	
		Right	0.273	-	-	0.273	-	-	0.273	0.273	0.273	0.273	0.273	
	LTE Band 4	Top	-	0.150	0.119	0.150	0.119	0.269	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.648	-	-	0.648	-	-	0.648	0.648	0.648	0.648	0.648	
		Front	0.389	0.135	0.109	0.468	0.442	0.573	0.573	0.389	0.442	0.573	0.573	
		Rear	0.428	0.091	0.274	0.524	0.498	0.633	0.633	0.428	0.498	0.633	0.633	
		Right	0.151	-	-	0.151	-	-	0.151	0.151	0.151	0.151	0.151	
	LTE Band 2	Top	-	0.150	0.119	0.150	0.119	0.269	0.338	0.338	0.338	0.338	0.338	
		Bottom	0.994	-	-	0.994	-	-	0.994	0.994	0.994	0.994	0.994	
		Front	0.660	0.135	0.109	0.795	0.769	0.904	0.904	0.660	0.769	0.904	0.904	
		Rear	0.678	0.091	0.274	0.769	0.952	1.043	1.043	0.678	0.952	1.043	1.043	
		Right	0.196	-	-	0.196	-	-	0.196	0.196	0.196	0.196	0.196	

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN MIMO SAR (W/kg)			5.8G W-LAN MIMO SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3						
Hotspot SAR	GPRS 850	Top	-	0.150	0.218	0.150	0.218	0.368	0.224	0.224	0.224	0.224	0.224	
		Bottom	0.224	-	-	0.224	-	-	0.224	0.224	0.224	0.224	0.224	
		Front	0.508	0.135	0.065	0.643	0.573	0.708	0.708	0.643	0.573	0.708	0.708	
		Rear	0.484	0.091	0.406	0.575	0.800	0.811	0.811	0.575	0.800	0.811	0.811	
		Right	0.141	-	-	0.141	-	-	0.141	0.141	0.141	0.141	0.141	
	GPRS 1900	Top	-	0.150	0.218	0.150	0.218	0.368	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.478	-	-	0.478	-	-	0.478	0.478	0.478	0.478	0.478	
		Front	0.344	0.135	0.065	0.479	0.459	0.544	0.544	0.479	0.459	0.544	0.544	
		Rear	0.328	0.091	0.406	0.417	0.732	0.833	0.833	0.417	0.732	0.833	0.833	
		Right	0.090	-	-	0.090	-	-	0.090	0.090	0.090	0.090	0.090	
	WCDMA 850	Top	-	0.150	0.218	0.150	0.218	0.368	0.277	0.277	0.277	0.277	0.277	
		Bottom	0.277	-	-	0.277	-	-	0.277	0.277	0.277	0.277	0.277	
		Front	0.545	0.135	0.065	0.680	0.610	0.745	0.745	0.680	0.610	0.745	0.745	
		Rear	0.611	0.091	0.406	0.702	0.917	1.068	1.068	0.702	0.917	1.068	1.068	
		Right	0.197	-	-	0.197	-	-	0.197	0.197	0.197	0.197	0.197	
	WCDMA 1900	Top	-	0.150	0.218	0.150	0.218	0.368	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.882	-	-	0.882	-	-	0.882	0.882	0.882	0.882	0.882	
		Front	0.584	0.135	0.065	0.689	0.629	0.764	0.764	0.689	0.629	0.764	0.764	
		Rear	0.570	0.091	0.406	0.661	0.978	1.067	1.067	0.661	0.978	1.067	1.067	
		Right	0.189	-	-	0.189	-	-	0.189	0.189	0.189	0.189	0.189	
	LTE Band 12	Top	-	0.150	0.218	0.150	0.218	0.368	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.065	-	-	0.065	-	-	0.065	0.065	0.065	0.065	0.065	
		Front	0.211	0.135	0.065	0.336	0.276	0.411	0.411	0.211	0.276	0.411	0.411	
		Rear	0.263	0.091	0.406	0.354	0.669	0.760	0.760	0.263	0.669	0.760	0.760	
		Right	0.236	-	-	0.236	-	-	0.236	0.236	0.236	0.236	0.236	
	LTE Band 5	Top	-	0.150	0.218	0.150	0.218	0.368	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.389	-	-	0.389	-	-	0.389	0.389	0.389	0.389	0.389	
		Front	0.788	0.135	0.065	0.921	0.851	0.986	0.986	0.788	0.851	0.986	0.986	
		Rear	0.901	0.091	0.406	0.992	1.307	1.398	1.398	0.901	1.307	1.398	1.398	
		Right	0.273	-	-	0.273	-	-	0.273	0.273	0.273	0.273	0.273	
	LTE Band 4	Top	-	0.150	0.218	0.150	0.218	0.368	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.648	-	-	0.648	-	-	0.648	0.648	0.648	0.648	0.648	
		Front	0.389	0.135	0.065	0.468	0.442	0.573	0.573	0.389	0.442	0.573	0.573	
		Rear	0.428	0.091	0.406	0.524	0.832	0.923	0.923	0.428	0.832	0.923	0.923	
		Right	0.151	-	-	0.151	-	-	0.151	0.151	0.151	0.151	0.151	
	LTE Band 2	Top	-	0.150	0.218	0.150	0.218	0.368	0.338	0.338	0.338	0.338	0.338	
		Bottom	0.994	-	-	0.994	-	-	0.994	0.994	0.994	0.994	0.994	
		Front	0.660	0.135	0.065	0.795	0.769	0.904	0.904	0.660	0.769	0.904	0.904	
		Rear	0.678	0.091	0.406	0.769	1.084	1.175	1.175	0.678	1.084	1.175	1.175	
		Right	0.196	-	-	0.196	-	-	0.196	0.196	0.196	0.196	0.196	

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth Ant.1 SAR (W/kg)			5.2G W-LAN MIMO SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3						
Hotspot SAR	GPRS 850	Top	-	0.029	0.119	0.029	0.119	0.148	0.224	0.224	0.224	0.224	0.224	
		Bottom	0.224	-	-	0.224	-	-	0.224	0.224	0.224	0.224	0.224	
		Front	0.508	0.062	0.109	0.670	0.617	0.724	0.724	0.508	0.617	0.724	0.724	
		Rear	0.484	0.046	0.274	0.574	0.758	0.804	0.804	0.484	0.758	0.804	0.804	
		Right	0.141	-	-	0.141	-	-	0.141	0.141	0.141	0.141	0.141	
	GPRS 1900	Top	-	0.029	0.119	0.029	0.119	0.148	0.187	0.022	0.209	0.209	0.209	
		Bottom	0.478	-										

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth Ant.1 SAR (W/kg)			5.8G W-LAN MIMO SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3						
Hotspot SAR	GPRS 850	Top	-	0.029	0.218	0.029	0.218	0.247						
		Bottom	0.224	-	0.224	0.224	0.224	0.224						
		Front	0.508	0.062	0.508	0.062	0.570	0.632						
		Rear	0.484	0.046	0.484	0.046	0.530	0.576						
	GPRS 1900	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.478	0.029	0.218	0.029	0.218	0.247						
		Front	0.344	0.062	0.388	0.062	0.406	0.471						
		Rear	0.328	0.046	0.406	0.046	0.372	0.418						
	WCDMA 850	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.277	-	0.277	0.277	0.277	0.277						
		Front	0.545	0.062	0.607	0.062	0.610	0.672						
		Rear	0.611	0.046	0.657	0.046	0.657	0.719						
	WCDMA 1900	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.882	-	0.882	0.882	0.882	0.882						
		Front	0.564	0.062	0.626	0.062	0.629	0.691						
		Rear	0.570	0.046	0.616	0.046	0.616	0.678						
	LTE Band 12	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.065	-	0.065	0.065	0.065	0.065						
		Front	0.211	0.062	0.273	0.062	0.276	0.338						
		Rear	0.263	0.046	0.309	0.046	0.269	0.315						
	LTE Band 5	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.389	-	0.389	0.389	0.389	0.389						
		Front	0.786	0.062	0.848	0.062	0.851	0.913						
		Rear	0.901	0.046	0.947	0.046	0.947	1.009						
	LTE Band 4	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.648	-	0.648	0.648	0.648	0.648						
		Front	0.389	0.062	0.451	0.062	0.454	0.516						
		Rear	0.428	0.046	0.474	0.046	0.474	0.536						
	LTE Band 2	Top	-	0.102	0.072	0.102	0.072	0.174						
		Bottom	0.984	-	0.984	0.984	0.984	0.984						
		Front	0.660	0.062	0.722	0.062	0.725	0.787						
		Rear	0.678	0.046	0.724	0.046	0.724	0.786						

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth Ant.1 SAR (W/kg)			2.4G W-LAN Ant.2 SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3						
Hotspot SAR	GPRS 850	Top	-	0.029	0.071	0.029	0.071	0.100						
		Bottom	0.224	-	0.224	0.224	0.224	0.224						
		Front	0.508	0.062	0.570	0.062	0.570	0.632						
		Rear	0.484	0.046	0.530	0.046	0.530	0.592						
	GPRS 1900	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.478	-	0.478	0.478	0.478	0.478						
		Front	0.344	0.062	0.406	0.062	0.399	0.455						
		Rear	0.328	0.046	0.406	0.046	0.372	0.421						
	WCDMA 850	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.277	-	0.277	0.277	0.277	0.277						
		Front	0.545	0.062	0.607	0.062	0.599	0.655						
		Rear	0.611	0.046	0.657	0.046	0.657	0.713						
	WCDMA 1900	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.882	-	0.882	0.882	0.882	0.882						
		Front	0.564	0.062	0.626	0.062	0.619	0.675						
		Rear	0.570	0.046	0.616	0.046	0.616	0.672						
	LTE Band 12	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.065	-	0.065	0.065	0.065	0.065						
		Front	0.211	0.062	0.273	0.062	0.273	0.335						
		Rear	0.263	0.046	0.309	0.046	0.269	0.315						
	LTE Band 5	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.389	-	0.389	0.389	0.389	0.389						
		Front	0.786	0.062	0.848	0.062	0.851	0.913						
		Rear	0.901	0.046	0.947	0.046	0.947	1.009						
	LTE Band 4	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.648	-	0.648	0.648	0.648	0.648						
		Front	0.389	0.062	0.451	0.062	0.454	0.516						
		Rear	0.428	0.046	0.474	0.046	0.474	0.536						
	LTE Band 2	Top	-	0.102	0.002	0.102	0.002	0.104						
		Bottom	0.984	-	0.984	0.984	0.984	0.984						
		Front	0.660	0.062	0.722	0.062	0.725	0.787						
		Rear	0.678	0.046	0.724	0.046	0.724	0.786						

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			2.4G W-LAN Ant.1 SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3			
Hotspot SAR	GPRS 850	Top	-	0.029	0.054	0.029	0.054	0.073			
		Bottom	0.224	-	0.224	0.224	0.224	0.224			
		Front	0.508	0.062	0.562	0.062	0.562	0.624			
		Rear	0.484	0.046	0.520	0.046	0.520	0.576			
	GPRS 1900	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.478	-	0.478	0.478	0.478	0.478			
		Front	0.344	0.062	0.406	0.062	0.406	0.468			
		Rear	0.328	0.046	0.406	0.046	0.372	0.428			
	WCDMA 850	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.277	-	0.277	0.277	0.277	0.277			
		Front	0.545	0.062	0.607	0.062	0.607	0.669			
		Rear	0.611	0.046	0.657	0.046	0.657	0.719			
	WCDMA 1900	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.882	-	0.882	0.882	0.882	0.882			
		Front	0.564	0.062	0.626	0.062	0.626	0.688			
		Rear	0.570	0.046	0.616	0.046	0.616	0.678			
	LTE Band 12	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.065	-	0.065	0.065	0.065	0.065			
		Front	0.211	0.062	0.273	0.062	0.273	0.335			
		Rear	0.263	0.046	0.309	0.046	0.269	0.315			
	LTE Band 5	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.389	-	0.389	0.389	0.389	0.389			
		Front	0.786	0.062	0.848	0.062	0.851	0.913			
		Rear	0.901	0.046	0.947	0.046	0.947	1.009			
	LTE Band 4	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.648	-	0.648	0.648	0.648	0.648			
		Front	0.389	0.062	0.451	0.062	0.454	0.516			
		Rear	0.428	0.046	0.474	0.046	0.474	0.536			
	LTE Band 2	Top	-	0.102	0.002	0.102	0.002	0.104			
		Bottom	0.984	-	0.984	0.984	0.984	0.984			
		Front	0.660	0.062	0.722	0.062	0.725	0.787			
		Rear	0.678	0.046	0.724	0.046	0.724	0.786			

Table 12.6.7 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		Σ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.224	-	0.224	0.224	0.224
		Front	0.508	0.049	0.557	0.557	0.557
		Rear	0.484	0.049	0.533	0.533	0.533
		Right	0.141	-	0.141	0.141	0.141
		Left	-	0.002	0.002	0.002	0.002
	GPRS 1900	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.478	-	0.478	0.478	0.478
		Front	0.344	0.049	0.393	0.393	0.393
		Rear	0.328	0.049	0.377	0.377	0.377
		Right	-	-	-	-	-
		Left	0.090	-	0.090	0.090	0.090
	WCDMA 850	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.277	-	0.277	0.277	0.277
		Front	0.545	0.049	0.594	0.594	0.594
		Rear	0.611	0.049	0.660	0.660	0.660
		Right	0.197	-	0.197	0.197	0.197
		Left	-	0.002	0.002	0.002	0.002
	WCDMA 1900	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.882	-	0.882	0.882	0.882
		Front	0.564	0.049	0.613	0.613	0.613
		Rear	0.570	0.049	0.619	0.619	0.619
		Right	-	-	-	-	-
		Left	0.169	-	0.169	0.169	0.169
	LTE Band 12	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.065	-	0.065	0.065	0.065
		Front	0.211	0.049	0.260	0.260	0.260
		Rear	0.263	0.049	0.312	0.312	0.312
		Right	-	-	-	-	-
		Left	0.236	-	0.236	0.236	0.236
	LTE Band 5	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.389	-	0.389	0.389	0.389
		Front	0.786	0.049	0.835	0.835	0.835
		Rear	0.901	0.049	0.950	0.950	0.950
		Right	0.273	-	0.273	0.273	0.273
		Left	-	0.002	0.002	0.002	0.002
	LTE Band 4	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.648	-	0.648	0.648	0.648
		Front	0.389	0.049	0.438	0.438	0.438
		Rear	0.426	0.049	0.475	0.475	0.475
		Right	-	-	-	-	-
		Left	0.151	-	0.151	0.151	0.151
	LTE Band 2	Top	-	0.071	0.071	0.142	0.142
		Bottom	0.994	-	0.994	0.994	0.994
		Front	0.660	0.049	0.709	0.709	0.709
		Rear	0.678	0.049	0.727	0.727	0.727
		Right	-	-	-	-	-
		Left	0.196	-	0.196	0.196	0.196

Table 12.6.8 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN MIMO SAR (W/kg)		Σ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.224	-	0.224	0.224	0.224
		Front	0.508	0.135	0.643	0.643	0.643
		Rear	0.484	0.091	0.575	0.575	0.575
		Right	0.141	-	0.141	0.141	0.141
		Left	-	0.187	0.187	0.187	0.187
	GPRS 1900	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.478	-	0.478	0.478	0.478
		Front	0.344	0.135	0.479	0.479	0.479
		Rear	0.328	0.091	0.417	0.417	0.417
		Right	-	-	-	-	-
		Left	0.090	-	0.090	0.090	0.090
	WCDMA 850	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.277	-	0.277	0.277	0.277
		Front	0.545	0.135	0.680	0.680	0.680
		Rear	0.611	0.091	0.702	0.702	0.702
		Right	0.197	-	0.197	0.197	0.197
		Left	-	0.187	0.187	0.187	0.187
	WCDMA 1900	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.882	-	0.882	0.882	0.882
		Front	0.564	0.135	0.699	0.699	0.699
		Rear	0.570	0.091	0.661	0.661	0.661
		Right	-	-	-	-	-
		Left	0.169	-	0.169	0.169	0.169
	LTE Band 12	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.065	-	0.065	0.065	0.065
		Front	0.211	0.135	0.346	0.346	0.346
		Rear	0.263	0.091	0.354	0.354	0.354
		Right	-	-	-	-	-
		Left	0.236	-	0.236	0.236	0.236
	LTE Band 5	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.389	-	0.389	0.389	0.389
		Front	0.786	0.135	0.921	0.921	0.921
		Rear	0.901	0.091	0.992	0.992	0.992
		Right	0.273	-	0.273	0.273	0.273
		Left	-	0.187	0.187	0.187	0.187
	LTE Band 4	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.648	-	0.648	0.648	0.648
		Front	0.389	0.135	0.524	0.524	0.524
		Rear	0.426	0.091	0.517	0.517	0.517
		Right	-	-	-	-	-
		Left	0.151	-	0.151	0.151	0.151
	LTE Band 2	Top	-	0.150	0.150	0.150	0.150
		Bottom	0.994	-	0.994	0.994	0.994
		Front	0.660	0.135	0.795	0.795	0.795
		Rear	0.678	0.091	0.769	0.769	0.769
		Right	-	-	-	-	-
		Left	0.196	-	0.196	0.196	0.196

Table 12.6.9 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.2G W-LAN Ant.1 SAR (W/kg)		Σ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.224	-	0.224	0.224	0.224
		Front	0.508	0.059	0.567	0.567	0.567
		Rear	0.484	0.134	0.618	0.618	0.618
		Right	0.141	-	0.141	0.141	0.141
		Left	-	0.025	0.025	0.025	0.025
	GPRS 1900	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.478	-	0.478	0.478	0.478
		Front	0.344	0.059	0.403	0.403	0.403
		Rear	0.328	0.134	0.460	0.460	0.460
		Right	-	-	-	-	-
		Left	0.090	-	0.090	0.090	0.090
	WCDMA 850	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.277	-	0.277	0.277	0.277
		Front	0.545	0.059	0.604	0.604	0.604
		Rear	0.611	0.134	0.745	0.745	0.745
		Right	0.197	-	0.197	0.197	0.197
		Left	-	0.025	0.025	0.025	0.025
	WCDMA 1900	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.882	-	0.882	0.882	0.882
		Front	0.564	0.059	0.623	0.623	0.623
		Rear	0.570	0.134	0.704	0.704	0.704
		Right	-	-	-	-	-
		Left	0.169	-	0.169	0.169	0.169
	LTE Band 12	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.065	-	0.065	0.065	0.065
		Front	0.211	0.059	0.270	0.270	0.270
		Rear	0.263	0.134	0.397	0.397	0.397
		Right	-	-	-	-	-
		Left	0.236	-	0.236	0.236	0.236
	LTE Band 5	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.389	-	0.389	0.389	0.389
		Front	0.786	0.059	0.845	0.845	0.845
		Rear	0.901	0.134	1.035	1.035	1.035
		Right	0.273	-	0.273	0.273	0.273
		Left	-	0.025	0.025	0.025	0.025
	LTE Band 4	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.648	-	0.648	0.648	0.648
		Front	0.389	0.059	0.448	0.448	0.448
		Rear	0.426	0.134	0.560	0.560	0.560
		Right	-	-	-	-	-
		Left	0.151	-	0.151	0.151	0.151
	LTE Band 2	Top	-	0.027	0.027	0.027	0.027
		Bottom	0.994	-	0.994	0.994	0.994
		Front	0.660	0.059	0.719	0.719	0.719
		Rear	0.678	0.134	0.812	0.812	0.812
		Right	-	-	-	-	-
		Left	0.196	-	0.196	0.196	0.196

Table 12.6.10 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.2G W-LAN Ant.2 SAR (W/kg)		Δ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.224	-	0.224	-	0.224
		Front	0.508	0.061	0.569	0.061	0.569
		Rear	0.484	0.134	0.618	0.134	0.618
		Left	0.141	-	0.141	-	0.141
	GPRS 1900	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.478	-	0.478	-	0.478
		Front	0.344	0.061	0.405	0.061	0.405
		Rear	0.328	0.134	0.460	0.134	0.460
		Left	0.090	0.011	0.101	0.011	0.101
	WCDMA 850	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.277	-	0.277	-	0.277
		Front	0.545	0.061	0.606	0.061	0.606
		Rear	0.611	0.134	0.745	0.134	0.745
		Left	0.197	-	0.197	-	0.197
	WCDMA 1900	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.882	-	0.882	-	0.882
		Front	0.564	0.061	0.625	0.061	0.625
		Rear	0.570	0.134	0.704	0.134	0.704
		Left	0.169	0.011	0.180	0.011	0.180
	LTE Band 12	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.065	-	0.065	-	0.065
		Front	0.211	0.061	0.272	0.061	0.272
		Rear	0.263	0.134	0.397	0.134	0.397
		Left	0.236	-	0.236	-	0.236
	LTE Band 5	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.389	-	0.389	-	0.389
		Front	0.786	0.061	0.847	0.061	0.847
		Rear	0.901	0.134	1.035	0.134	1.035
		Left	0.273	0.011	0.284	0.011	0.284
	LTE Band 4	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.648	-	0.648	-	0.648
		Front	0.389	0.061	0.450	0.061	0.450
		Rear	0.426	0.134	0.560	0.134	0.560
		Left	0.151	0.011	0.162	0.011	0.162
	LTE Band 2	Top	-	0.097	0.097	0.097	0.097
		Bottom	0.994	-	0.994	-	0.994
		Front	0.660	0.061	0.721	0.061	0.721
		Rear	0.678	0.134	0.812	0.134	0.812
		Left	0.196	0.011	0.207	0.011	0.207

Table 12.6.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.2G W-LAN MIMO SAR (W/kg)		Δ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.224	-	0.224	-	0.224
		Front	0.508	0.109	0.617	0.109	0.617
		Rear	0.484	0.274	0.758	0.274	0.758
		Left	0.141	0.022	0.141	0.022	0.141
	GPRS 1900	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.478	-	0.478	-	0.478
		Front	0.344	0.109	0.453	0.109	0.453
		Rear	0.328	0.274	0.600	0.274	0.600
		Left	0.090	0.022	0.112	0.022	0.112
	WCDMA 850	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.277	-	0.277	-	0.277
		Front	0.545	0.061	0.606	0.061	0.606
		Rear	0.611	0.274	0.885	0.274	0.885
		Left	0.197	0.022	0.197	0.022	0.197
	WCDMA 1900	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.882	-	0.882	-	0.882
		Front	0.564	0.109	0.673	0.109	0.673
		Rear	0.570	0.274	0.844	0.274	0.844
		Left	0.169	0.022	0.169	0.022	0.169
	LTE Band 12	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.065	-	0.065	-	0.065
		Front	0.211	0.109	0.320	0.109	0.320
		Rear	0.263	0.274	0.537	0.274	0.537
		Left	0.236	0.022	0.236	0.022	0.236
	LTE Band 5	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.389	-	0.389	-	0.389
		Front	0.786	0.109	0.895	0.109	0.895
		Rear	0.901	0.274	1.175	0.274	1.175
		Left	0.273	0.022	0.273	0.022	0.273
	LTE Band 4	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.648	-	0.648	-	0.648
		Front	0.389	0.109	0.498	0.109	0.498
		Rear	0.426	0.274	0.700	0.274	0.700
		Left	0.151	0.022	0.151	0.022	0.151
	LTE Band 2	Top	-	0.119	0.119	0.119	0.119
		Bottom	0.994	-	0.994	-	0.994
		Front	0.660	0.109	0.769	0.109	0.769
		Rear	0.678	0.274	0.952	0.274	0.952
		Left	0.196	0.022	0.218	0.022	0.218

Table 12.6.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN Ant.1 SAR (W/kg)		Δ SAR (W/kg)
			1	2	1+2	1+2	
Hotspot SAR	GPRS 850	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.224	-	0.224	-	0.224
		Front	0.508	0.027	0.535	0.027	0.535
		Rear	0.484	0.133	0.617	0.133	0.617
		Left	0.141	-	0.141	-	0.141
	GPRS 1900	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.478	-	0.478	-	0.478
		Front	0.344	0.027	0.371	0.027	0.371
		Rear	0.328	0.133	0.460	0.133	0.460
		Left	0.090	0.032	0.122	0.032	0.122
	WCDMA 850	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.277	-	0.277	-	0.277
		Front	0.545	0.027	0.572	0.027	0.572
		Rear	0.611	0.133	0.744	0.133	0.744
		Left	0.197	-	0.197	-	0.197
	WCDMA 1900	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.882	-	0.882	-	0.882
		Front	0.564	0.027	0.591	0.027	0.591
		Rear	0.570	0.133	0.703	0.133	0.703
		Left	0.169	0.032	0.201	0.032	0.201
	LTE Band 12	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.065	-	0.065	-	0.065
		Front	0.211	0.027	0.238	0.027	0.238
		Rear	0.263	0.133	0.396	0.133	0.396
		Left	0.236	0.032	0.236	0.032	0.236
	LTE Band 5	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.389	-	0.389	-	0.389
		Front	0.786	0.027	0.813	0.027	0.813
		Rear	0.901	0.133	1.034	0.133	1.034
		Left	0.273	0.032	0.273	0.032	0.273
	LTE Band 4	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.648	-	0.648	-	0.648
		Front	0.389	0.027	0.416	0.027	0.416
		Rear	0.426	0.133	0.559	0.133	0.559
		Left	0.151	0.032	0.183	0.032	0.183
	LTE Band 2	Top	-	0.024	0.024	0.024	0.024
		Bottom	0.994	-	0.994	-	0.994
		Front	0.660	0.027	0.687	0.027	0.687
		Rear	0.678	0.133	0.811	0.133	0.811
		Left	0.196	0.032	0.228	0.032	0.228

Table 12.6.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN Ant.2 SAR (W/kg)	
			1	2	1+2	1+2
Hotspot SAR	GPRS 850	Top	-	0.202	0.202	
		Bottom	0.224	0.224	0.224	
		Front	0.508	0.024	0.532	
		Rear	0.484	0.328	0.812	
		Right	0.141	-	0.141	
		Left	-	0.056	0.056	
	GPRS 1900	Top	-	0.202	0.202	
		Bottom	0.478	0.024	0.478	
		Front	0.344	0.328	0.368	
		Rear	0.328	0.328	0.654	
		Right	-	0.056	0.056	
		Left	0.090	-	0.148	
	WCDMA 850	Top	-	0.202	0.202	
		Bottom	0.277	0.024	0.277	
		Front	0.545	0.024	0.569	
		Rear	0.611	0.328	0.939	
		Right	0.197	-	0.197	
		Left	-	0.056	0.056	
	WCDMA 1900	Top	-	0.202	0.202	
		Bottom	0.862	0.024	0.882	
		Front	0.564	0.024	0.588	
		Rear	0.570	0.328	0.898	
		Right	-	0.056	0.056	
		Left	0.169	-	0.225	
	LTE Band 12	Top	-	0.202	0.202	
		Bottom	0.065	0.024	0.065	
		Front	0.211	0.024	0.235	
		Rear	0.283	0.328	0.611	
		Right	0.238	-	0.238	
		Left	-	0.056	0.056	
	LTE Band 5	Top	-	0.202	0.202	
		Bottom	0.389	0.389	0.389	
		Front	0.786	0.024	0.810	
		Rear	0.901	0.328	1.229	
		Right	0.273	-	0.273	
		Left	-	0.056	0.056	
	LTE Band 4	Top	-	0.202	0.202	
		Bottom	0.648	-	0.648	
		Front	0.389	0.024	0.413	
		Rear	0.428	0.328	0.754	
		Right	-	-	-	
		Left	0.161	-	0.207	
	LTE Band 2	Top	-	0.202	0.202	
		Bottom	0.994	-	0.994	
		Front	0.660	0.024	0.684	
		Rear	0.678	0.328	1.006	
		Right	-	-	-	
		Left	0.198	-	0.252	

Table 12.6.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		5.8G W-LAN MIMO SAR (W/kg)	
			1	2	1+2	1+2
Hotspot SAR	GPRS 850	Top	-	0.218	0.218	
		Bottom	0.224	0.224	0.224	
		Front	0.508	0.065	0.573	
		Rear	0.484	0.406	0.890	
		Right	0.141	-	0.141	
		Left	-	0.072	0.072	
	GPRS 1900	Top	-	0.218	0.218	
		Bottom	0.478	0.065	0.478	
		Front	0.344	0.406	0.450	
		Rear	0.328	0.406	0.732	
		Right	-	0.072	0.072	
		Left	0.090	-	0.162	
	WCDMA 850	Top	-	0.218	0.218	
		Bottom	0.277	-	0.277	
		Front	0.545	0.065	0.610	
		Rear	0.611	0.406	1.017	
		Right	0.197	-	0.197	
		Left	-	0.072	0.072	
	WCDMA 1900	Top	-	0.218	0.218	
		Bottom	0.882	-	0.882	
		Front	0.564	0.065	0.629	
		Rear	0.570	0.406	0.976	
		Right	-	-	-	
		Left	0.169	-	0.241	
	LTE Band 12	Top	-	0.218	0.218	
		Bottom	0.065	0.065	0.065	
		Front	0.211	0.065	0.276	
		Rear	0.283	0.406	0.689	
		Right	0.238	-	0.238	
		Left	-	0.072	0.072	
	LTE Band 5	Top	-	0.218	0.218	
		Bottom	0.389	0.389	0.389	
		Front	0.786	0.065	0.851	
		Rear	0.901	0.406	1.307	
		Right	0.273	-	0.273	
		Left	-	0.072	0.072	
	LTE Band 4	Top	-	0.218	0.218	
		Bottom	0.648	-	0.648	
		Front	0.389	0.065	0.454	
		Rear	0.428	0.406	0.832	
		Right	-	-	-	
		Left	0.161	-	0.223	
	LTE Band 2	Top	-	0.218	0.218	
		Bottom	0.984	-	0.984	
		Front	0.660	0.065	0.725	
		Rear	0.678	0.406	1.084	
		Right	-	-	-	
		Left	0.196	-	0.268	

Table 12.6.15 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	
			1	2	1+2	1+2
Hotspot SAR	GPRS 850	Top	-	0.029	0.029	
		Bottom	0.224	0.224	0.224	
		Front	0.508	0.062	0.570	
		Rear	0.484	0.046	0.530	
		Right	0.141	-	0.141	
		Left	-	0.102	0.102	
	GPRS 1900	Top	-	0.029	0.029	
		Bottom	0.478	0.029	0.478	
		Front	0.344	0.062	0.406	
		Rear	0.328	0.046	0.372	
		Right	-	0.102	0.102	
		Left	0.090	-	0.192	
	WCDMA 850	Top	-	0.029	0.029	
		Bottom	0.277	-	0.277	
		Front	0.545	0.062	0.607	
		Rear	0.611	0.046	0.657	
		Right	0.197	-	0.197	
		Left	-	0.102	0.102	
	WCDMA 1900	Top	-	0.029	0.029	
		Bottom	0.882	-	0.882	
		Front	0.564	0.062	0.626	
		Rear	0.570	0.046	0.616	
		Right	-	-	-	
		Left	0.169	-	0.271	
	LTE Band 12	Top	-	0.029	0.029	
		Bottom	0.065	0.065	0.065	
		Front	0.211	0.062	0.273	
		Rear	0.283	0.046	0.309	
		Right	0.238	-	0.238	
		Left	-	0.102	0.102	
	LTE Band 5	Top	-	0.029	0.029	
		Bottom	0.389	0.389	0.389	
		Front	0.786	0.062	0.848	
		Rear	0.901	0.046	0.947	
		Right	0.273	-	0.273	
		Left	-	0.102	0.102	
	LTE Band 4	Top	-	0.029	0.029	
		Bottom	0.648	-	0.648	
		Front	0.389	0.062	0.451	
		Rear	0.428	0.046	0.472	
		Right	-	-	-	
		Left	0.161	-	0.263	
	LTE Band 2	Top	-	0.029	0.029	
		Bottom	0.984	-	0.984	
		Front	0.660	0.062	0.722	
		Rear	0.678	0.046	0.724	
		Right	-	-	-	
		Left	0.198	-	0.298	

Table 12.6.16 Simultaneous Transmission Scenario : 2.4 GHz W-LAN MIMO + 5 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN MIMO SAR (W/kg)		5G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2		
Hotspot SAR	5.2G W-LAN MIMO	Top	-	-	0.150	0.119	0.269	
		Bottom	-	-	-	-	-	
		Front	-	-	0.135	0.109	0.244	
		Rear	-	-	0.091	0.214	0.305	
		Right	-	-	-	-	-	
		Left	-	-	0.187	0.022	0.209	
	5.8G W-LAN MIMO	Top	-	-	0.150	0.218	0.368	
		Bottom	-	-	-	-	-	
		Front	-	-	0.135	0.085	0.220	
		Rear	-	-	0.091	0.466	0.487	
		Right	-	-	-	-	-	
		Left	-	-	0.187	0.072	0.259	
		Σ						
		1.2						

Table 12.6.17 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)		5G W-LAN MIMO SAR (W/kg)		ΣSAR (W/kg)	
			1	2	1	2		
Hotspot SAR	5.2G W-LAN MIMO	Top	-	-	0.029	0.119	0.148	
		Bottom	-	-	-	-	-	
		Front	-	-	0.062	0.109	0.171	
		Rear	-	-	0.046	0.274	0.320	
		Right	-	-	-	-	-	
		Left	-	-	0.102	0.022	0.124	
	5.8G W-LAN MIMO	Top	-	-	0.029	0.218	0.247	
		Bottom	-	-	-	-	-	
		Front	-	-	0.062	0.065	0.127	
		Rear	-	-	0.046	0.400	0.452	
		Right	-	-	-	-	-	
		Left	-	-	0.102	0.072	0.174	
		Σ						
		1.2						

Table 12.6.18 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)		2.4G W-LAN Ant.2 SAR (W/kg)		ΣSAR (W/kg)
			1	2	1	2	
Hotspot SAR	2.4G W-LAN Ant.2	Top	-	-	0.102	0.011	0.110
		Bottom	-	-	-	-	-
		Front	-	-	0.062	0.049	0.111
		Rear	-	-	0.046	0.045	0.095
		Right	-	-	-	-	-
		Left	-	-	0.102	0.002	0.104

12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 13.1 Body-Worn SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
836.5	20525	LTE B5	-	-	10 mm [Rear]	0.843	0.800	1.05	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 13.2 Hotspot SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1852.4	9262	WCDMA 1900	RMC	-	10 mm [Bottom]	0.872	0.866	1.01	-	-	-	-
1860.0	18700	LTE B2	-	-	10 mm [Bottom]	0.870	0.864	1.01	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/>	Robot	SPEAG	TX90XL	N/A	N/A	F13/5P9GA1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5P9GA1/C/01
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-1320090
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-12450905
<input checked="" type="checkbox"/>	Intel Core i7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Intel Core i7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1782
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1783
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1785
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1786
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2019-04-18	2020-04-18	1391
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2019-03-20	2020-03-20	1394
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2019-09-27	2020-09-27	3933
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2019-11-27	2020-11-27	7337
<input checked="" type="checkbox"/>	750MHz SAR Dipole	SPEAG	D750V3	2019-01-25	2021-01-25	1049
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SPEAG	D835V2	2019-07-18	2020-07-18	464
<input checked="" type="checkbox"/>	1800MHz SAR Dipole	SPEAG	D1800V2	2019-04-24	2021-04-24	2d047
<input checked="" type="checkbox"/>	1900MHz SAR Dipole	SPEAG	D1900V2	2019-07-17	2020-07-17	5d029
<input checked="" type="checkbox"/>	2450MHz SAR Dipole	SPEAG	D2450V2	2019-09-19	2021-09-19	726
<input checked="" type="checkbox"/>	5GHz SAR Dipole	SPEAG	D5GHzV2	2019-02-28	2021-02-28	1103
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2019-06-24	2020-06-24	MY46106970
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	2019-06-24	2020-06-24	US41461520
<input checked="" type="checkbox"/>	Amplifier	RFBAY.Inc	MPA-40-40	2019-12-16	2020-12-16	21151801
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2019-06-24	2020-06-24	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2019-06-24	2020-06-24	1005
<input checked="" type="checkbox"/>	Power Meter	HP	HPM-442A	2019-12-18	2020-12-18	GB37170267
<input checked="" type="checkbox"/>	Power Meter	HP	HPM-442A	2019-12-16	2020-12-16	GB37170413
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2019-12-16	2020-12-16	US37294267
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2019-12-18	2020-12-18	3318A96566
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2019-12-18	2020-12-18	2702A65976
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2019-12-17	2020-12-17	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	772D	2019-06-24	2020-06-24	2889A01064
<input checked="" type="checkbox"/>	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2019-06-24	2020-06-24	165
<input checked="" type="checkbox"/>	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2019-06-24	2020-06-24	2
<input checked="" type="checkbox"/>	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2019-06-24	2020-06-24	2
<input checked="" type="checkbox"/>	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2019-12-17	2020-12-17	03942
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHTEL	23-10-34	2019-12-17	2020-12-17	BP4387
<input checked="" type="checkbox"/>	Attenuators	Cernexwave	CFADC2603U5	2019-06-27	2020-06-27	C11740
<input checked="" type="checkbox"/>	Dielectric Probe kit	SPEAG	DAK-3.5	2019-11-19	2020-11-19	1092
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2019-06-28	2020-06-28	GB41321164
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2019-12-16	2020-12-16	101414
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2019-03-06	2020-03-06	127323
<input checked="" type="checkbox"/>	Radio Communication Analyzer	Agilent	E5515E	2019-06-28	2020-06-28	MY52113012
<input checked="" type="checkbox"/>	Power Splitter	Anritsu	K241B	2019-12-16	2020-12-16	1301183
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000C	2019-06-24	2020-06-24	3000C000563

NOTE(S):

1. The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

2. CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**



Client **DT&C (Dymstec)**

Certificate No: **EX3-3933_Sep19**

CALIBRATION CERTIFICATE

Object	EX3DV4 - SN:3933
Calibration procedure(s)	QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7 Calibration procedure for dosimetric E-field probes
Calibration date:	September 27, 2019
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.	
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.	
Calibration Equipment used (M&TE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
			Issued: September 30, 2019
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3933

September 27, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.49	0.52	0.19	± 10.1 %
DCP (mV) ^B	105.1	100.3	95.6	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max dev.	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	163.3	± 2.2 %	± 4.7 %
		Y	0.00	0.00	1.00		166.6		
		Z	0.00	0.00	1.00		158.8		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	15.00	90.30	22.21	10.00	60.0	± 3.2 %	± 9.6 %
		Y	15.00	89.45	22.16		60.0		
		Z	15.00	90.07	22.52		60.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	15.00	93.23	22.50	6.99	80.0	± 2.1 %	± 9.6 %
		Y	15.00	90.02	21.08		80.0		
		Z	15.00	92.33	21.94		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	15.00	102.11	25.43	3.98	95.0	± 2.4 %	± 9.6 %
		Y	15.00	91.85	20.31		95.0		
		Z	15.00	161.21	54.32		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	15.00	127.83	36.23	2.22	120.0	± 3.0 %	± 9.6 %
		Y	15.00	100.88	23.08		120.0		
		Z	0.11	60.00	30.00		120.0		
10387-AAA	QPSK Waveform, 1 MHz	X	15.00	94.61	19.88	0.00	150.0	± 4.9 %	± 9.6 %
		Y	0.98	66.33	11.74		150.0		
		Z	0.03	60.00	30.00		150.0		
10388-AAA	QPSK Waveform, 10 MHz	X	4.47	82.57	22.97	0.00	150.0	± 4.7 %	± 9.6 %
		Y	2.77	72.49	18.16		150.0		
		Z	15.00	116.88	37.35		150.0		
10396-AAA	64-QAM Waveform, 100 kHz	X	3.14	73.89	21.30	3.01	150.0	± 3.7 %	± 9.6 %
		Y	3.97	75.80	21.70		150.0		
		Z	15.00	121.14	42.19		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	4.01	70.75	18.20	0.00	150.0	± 3.5 %	± 9.6 %
		Y	3.70	68.48	16.76		150.0		
		Z	6.59	83.14	25.05		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	4.96	67.04	16.71	0.00	150.0	± 4.5 %	± 9.6 %
		Y	4.95	66.11	16.05		150.0		
		Z	5.53	71.03	19.84		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3933

September 27, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 ms. V^{-2}	T2 ms. V^{-1}	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	37.1	274.02	35.44	16.09	0.81	5.10	0.05	0.40	1.01
Y	48.6	371.39	37.26	21.32	1.16	5.10	0.67	0.53	1.01
Z	27.0	217.61	42.23	8.67	1.66	5.07	0.00	0.24	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	76.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3933

September 27, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.68	10.68	10.68	0.45	0.86	± 12.0 %
835	41.5	0.90	10.32	10.32	10.32	0.41	0.90	± 12.0 %
900	41.5	0.97	10.01	10.01	10.01	0.52	0.80	± 12.0 %
1750	40.1	1.37	8.87	8.87	8.87	0.34	0.87	± 12.0 %
1900	40.0	1.40	8.57	8.57	8.57	0.30	0.87	± 12.0 %
2300	39.5	1.67	8.19	8.19	8.19	0.29	0.90	± 12.0 %
2450	39.2	1.80	7.84	7.84	7.84	0.33	0.90	± 12.0 %
2600	39.0	1.96	7.62	7.62	7.62	0.25	0.90	± 12.0 %
3500	37.9	2.91	7.27	7.27	7.27	0.30	1.35	± 13.1 %
3700	37.7	3.12	6.99	6.99	6.99	0.30	1.35	± 13.1 %
5200	36.0	4.66	5.29	5.29	5.29	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.10	5.10	5.10	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.95	4.95	4.95	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.80	4.80	4.80	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.75	4.75	4.75	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3933

September 27, 2019

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.44	10.44	10.44	0.45	0.80	± 12.0 %
835	55.2	0.97	10.24	10.24	10.24	0.40	0.80	± 12.0 %
900	55.0	1.05	10.14	10.14	10.14	0.47	0.80	± 12.0 %
1750	53.4	1.49	8.64	8.64	8.64	0.40	0.87	± 12.0 %
1900	53.3	1.52	8.15	8.15	8.15	0.40	0.87	± 12.0 %
2300	52.9	1.81	7.94	7.94	7.94	0.39	0.90	± 12.0 %
2450	52.7	1.95	7.75	7.75	7.75	0.38	0.90	± 12.0 %
2600	52.5	2.16	7.57	7.57	7.57	0.31	0.90	± 12.0 %
3500	51.3	3.31	6.88	6.88	6.88	0.40	1.35	± 13.1 %
3700	51.0	3.55	6.82	6.82	6.82	0.40	1.35	± 13.1 %
5200	49.0	5.30	4.66	4.66	4.66	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.56	4.56	4.56	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.20	4.20	4.20	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.05	4.05	4.05	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.13	4.13	4.13	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 27, 2019

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

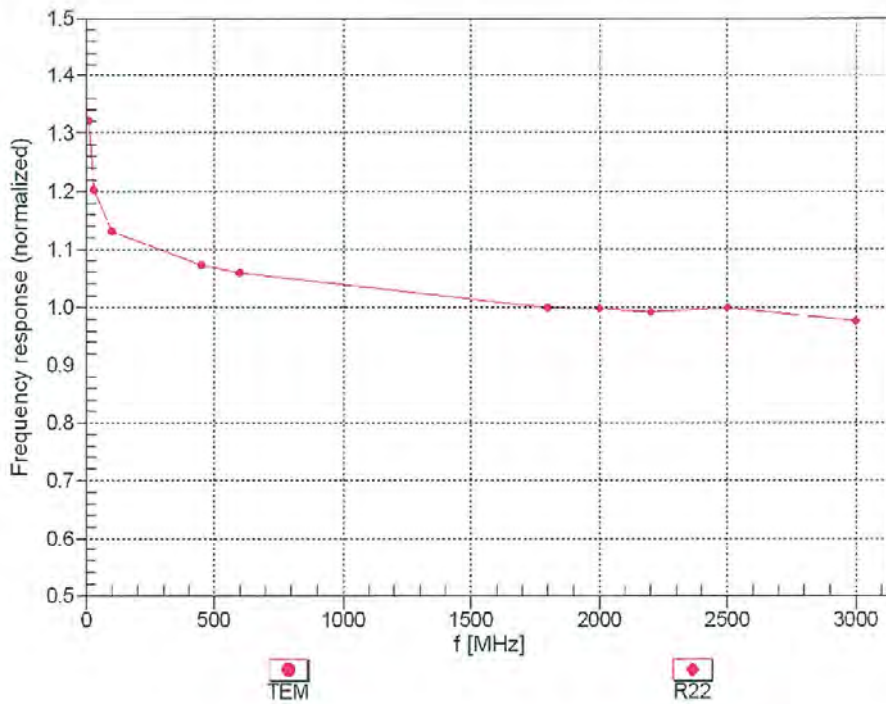

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)


EX3DV4- SN:3933

September 27, 2019

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22


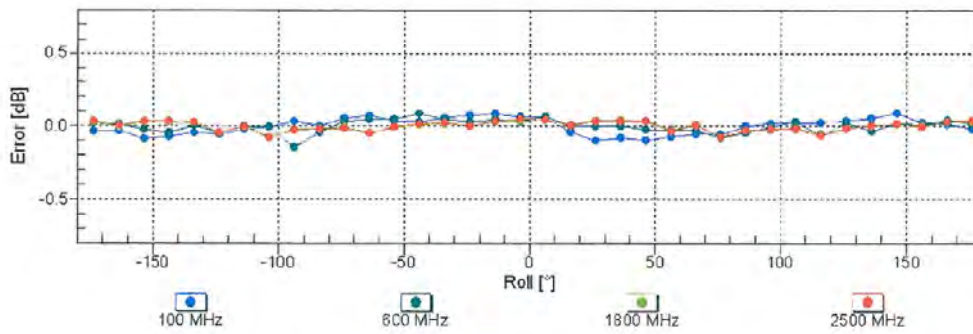


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3933

September 27, 2019

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

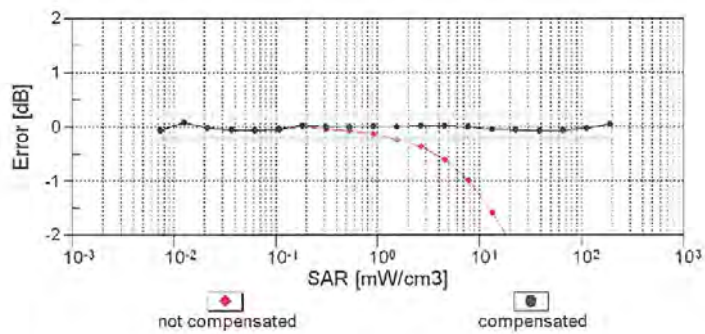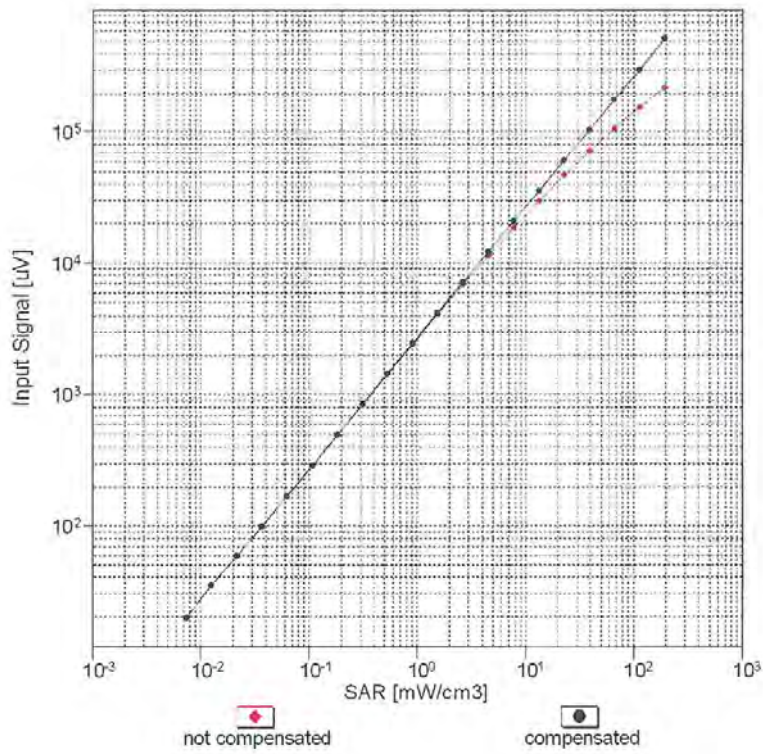


Uncertainty of Linearity Assessment: ± 0.6% (k=2)


EX3DV4- SN:3933

September 27, 2019

Conversion Factor Assessment

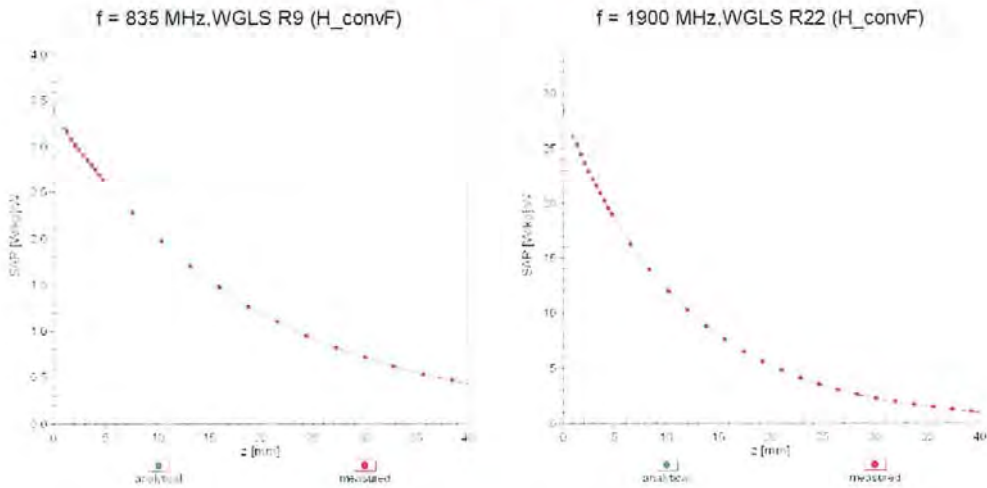

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

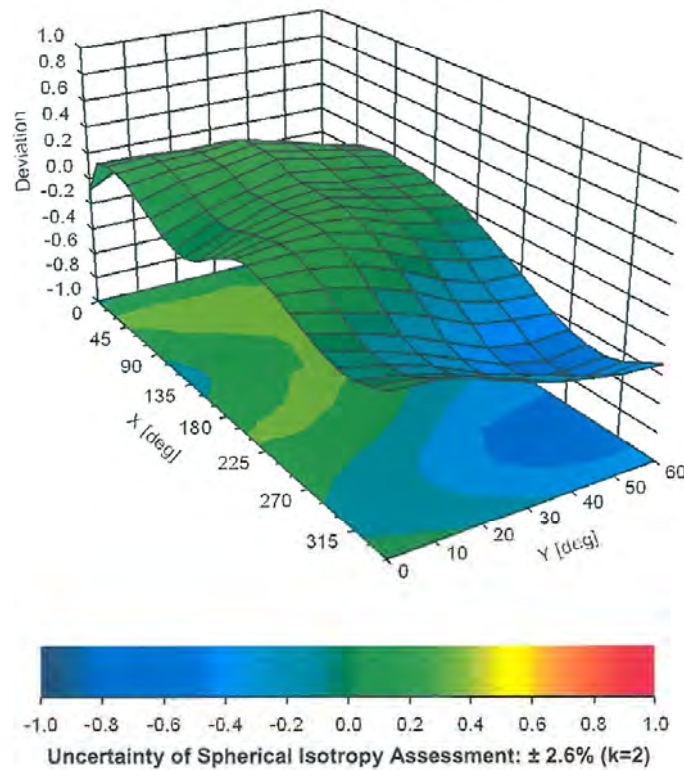

EX3DV4- SN:3933

September 27, 2019

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAB	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	CAB	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %

EX3DV4-- SN:3933

September 27, 2019

10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %

EX3DV4- SN:3933

September 27, 2019

10220	CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
10223	CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAB	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %
10260	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAA	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %