




PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC PART 15.407 / IC RSS-210 802.11a/n (UNII)

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
Nov. 28- Dec. 7, 2012
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1212181830.ZNF

FCC ID: ZNFVS870
APPLICANT: LG Electronics MobileComm U.S.A

Application Type: Certification
Model(s): VS870, LG-VS870, LGVS870
EUT Type: Portable Handset
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407
IC Specification(s): RSS-210 Issue 8
Test Procedure(s): ANSI C63.10-2009, KDB 789033 v01r02

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	20.277	13.07
	2	20	5260 - 5320	21.184	13.26
	3	20	5500 - 5700	21.727	13.37
802.11n	1	20	5180 - 5240	14.962	11.75
	2	20	5260 - 5320	15.959	12.03
	3	20	5500 - 5700	16.368	12.14
802.11n	1	40	5190 - 5230	16.368	12.14
	2	40	5270 - 5310	17.258	12.37
	3	40	5510 - 5670	18.239	12.61

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 -2009 and KDB 7 89033. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez
President



FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 1 of 78

TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST.....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 AC LINE CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS.....		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS.....		10
6.1 SUMMARY.....		10
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N.....		11
6.3 UNII OUTPUT POWER MEASUREMENT – 802.11A/N.....		25
6.4 PEAK POWER SPECTRAL DENSITY – 802.11A/N.....		27
6.5 PEAK EXCURSION RATIO – 802.11A/N.....		42
6.6 FREQUENCY STABILITY.....		45
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		48
6.8 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW).....		58
6.9 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW).....		65
6.10 LINE-CONDUCTED TEST DATA.....		72
7.0 CONCLUSION.....		78

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 2 of 78



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

IC SPECIFICATION(S): RSS-210 Issue 8

MODEL NAME: VS870, LG-VS870, LGVS870

FCC ID: ZNFVS870

Test Device Serial No.: WiFi#2, WiFi RSE Production Pre-Production Engineering

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: Nov. 28- Dec. 7, 2012



TEST REPORT S/N: 0Y1212181830.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 3 of 78

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

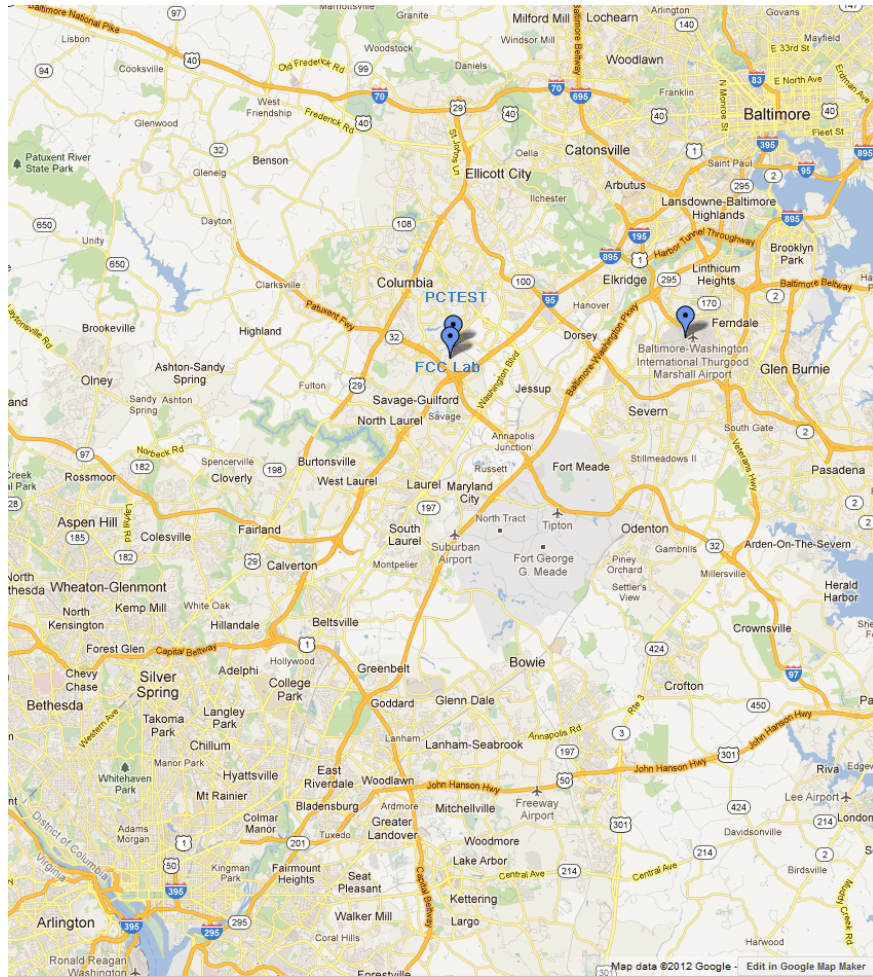




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 4 of 78	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFVS870**. The test data contained in this report pertains only to the emissions due to the EUT's NII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), Band 13 LTE, 802.11a/b/g/n WLAN (DTS/NII), Bluetooth (1x,EDR, LE)

2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFVS870 was tested per the guidance of ANSI C63.10-2009 and KDB 789033. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

Per KDB 648474 D03 v01r01, spurious emissions measurement data was also investigated with the wireless charging battery cover. The handset was placed on the representative charging pad under normal conditions and in a simulated call configuration. Only worst case emissions are shown in this report. Line conducted emissions testing was performed with the EUT's standard battery cover and its wireless charging battery cover. Only worst case emissions are reported. Worst case setup for radiated spurious emissions was with the standard battery cover. Worst case setup for AC line conducted emissions was with wireless charging enabled.

Note: 5GHz 802.11n transmission in this device supports 20MHz and 40MHz channel bandwidths.

2.4 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 5 of 78	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 were used in the measurement of **LG Portable Handset FCC ID: ZNFVS870**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80 cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 6 of 78	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1 GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions. To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 7 of 78	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **LG Portable Handset FCC ID: ZNFVS870** unit complies with the requirement of §15.203.

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700

Table 4-1. 802.11a Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	116	5580
:	:	:	:	:	:
48	5240	64	5320	140	5700

Table 4-2. 802.11n (20MHz BW) Frequency / Channel Operations

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510
:	:	:	:	:	:
46	5230	62	5310	110	5550
:	:	:	:	:	:
				134	5670



Table 4-3. 802.11n (40MHz BW) Frequency / Channel Operations

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	WL25-1	Conducted WLAN Cable Set (25GHz)	2/13/2012	Annual	2/13/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/10/2012	Annual	10/10/2013	1039008
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Annual	5/30/2013	135427
Mini-Circuits	VHF-8400+	3.4GHz - 9.9GHz High Pass Filter	2/28/2012	Annual	2/28/2013	31048
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	RS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU40	EMI Test Receiver	12/1/2012	Annual	12/1/2013	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFVS870	 FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 9 of 78

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFVS870
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	< 4 + 10log ₁₀ (BW) dBm (5150-5250MHz) [FCC] < 10 + 10log ₁₀ (BW) dBm (5150-5250MHz) [IC] < 11 + 10log ₁₀ (B) dBm (5250-5350MHz) < 11 + 10log ₁₀ (B) dBm (5470 – 5725MHz)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10dBm/MHz (5150-5250) [IC] < 11dBm/MHz (5250-5350) < 11dBm/MHz (5470-5725)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.6
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)		RADIATED	PASS
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report	PASS		See DFS Test Report
15.205, 15.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)	PASS		Section 6.8
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.10

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized i s PCTEST “UNII Automation,” Version 1.5.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 10 of 78

6.2 26dB Bandwidth Measurement – 802.11a/n

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 26dB bandwidth. **The 26dB bandwidth is used to determine the conducted power limits.**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	18.66
	5200	40	a	6	18.52
	5240	48	a	6	18.72
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.03
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	19.01
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	18.90
	5190	38	n (40MHz)	13.5/15 (MCS0)	43.01
	5230	46	n (40MHz)	13.5/15 (MCS0)	42.68
Band II	5260	52	a	6	18.60
	5280	56	a	6	18.74
	5320	64	a	6	18.59
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	18.96
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	18.97
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	18.96
	5270	54	n (40MHz)	13.5/15 (MCS0)	43.18
	5310	62	n (40MHz)	13.5/15 (MCS0)	43.33
Band III	5500	100	a	6	18.68
	5580	116	a	6	18.72
	5700	140	a	6	18.59
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	18.99
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	19.06
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	19.05
	5510	102	n (40MHz)	13.5/15 (MCS0)	44.21
	5550	110	n (40MHz)	13.5/15 (MCS0)	42.98
5670	134	n (40MHz)	13.5/15 (MCS0)	43.69	

Table 6-2. Conducted Bandwidth Measurements





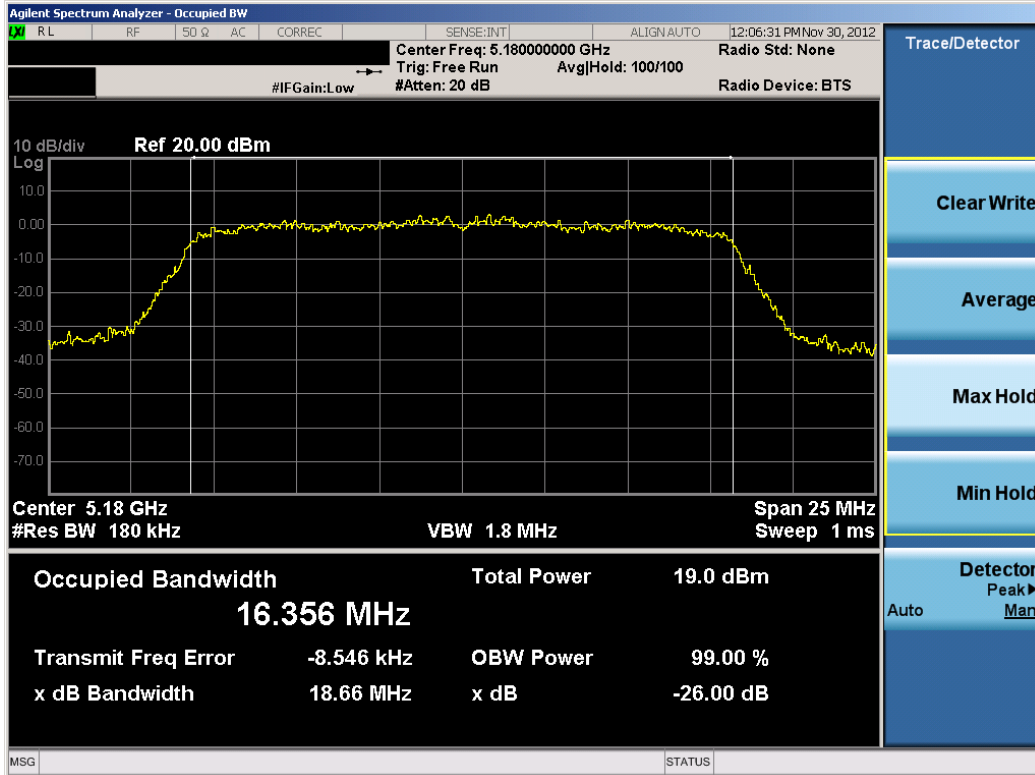


Figure 6-1. Test Instrument & Measurement Setup

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 11 of 78	

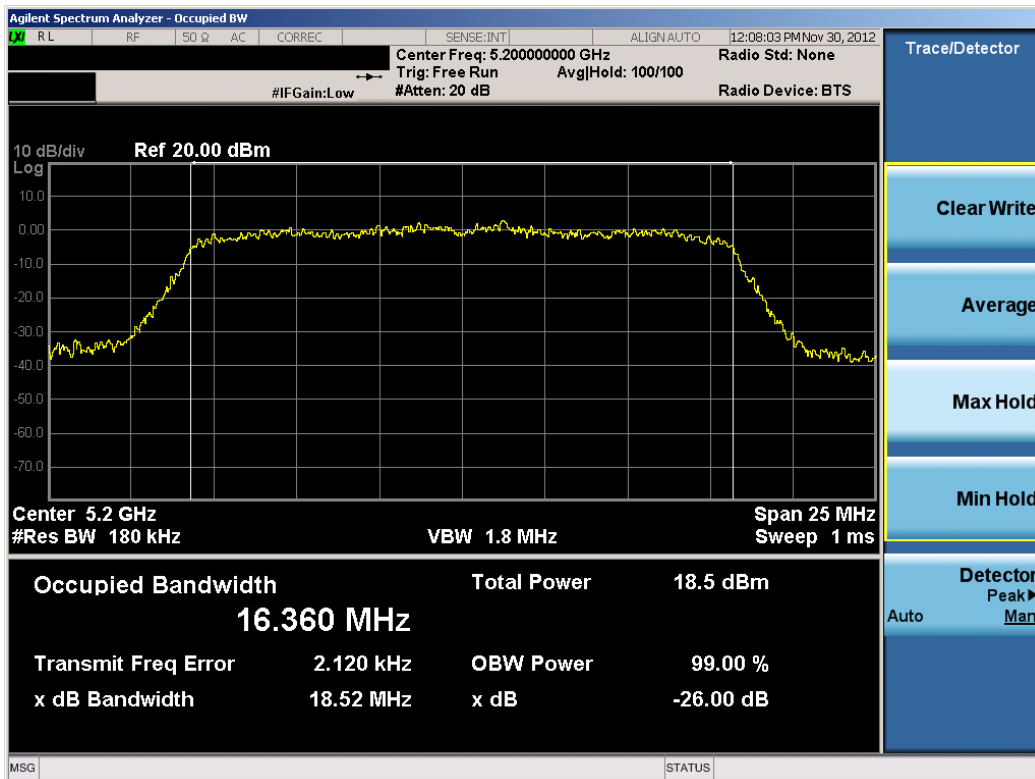


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)




Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 12 of 78

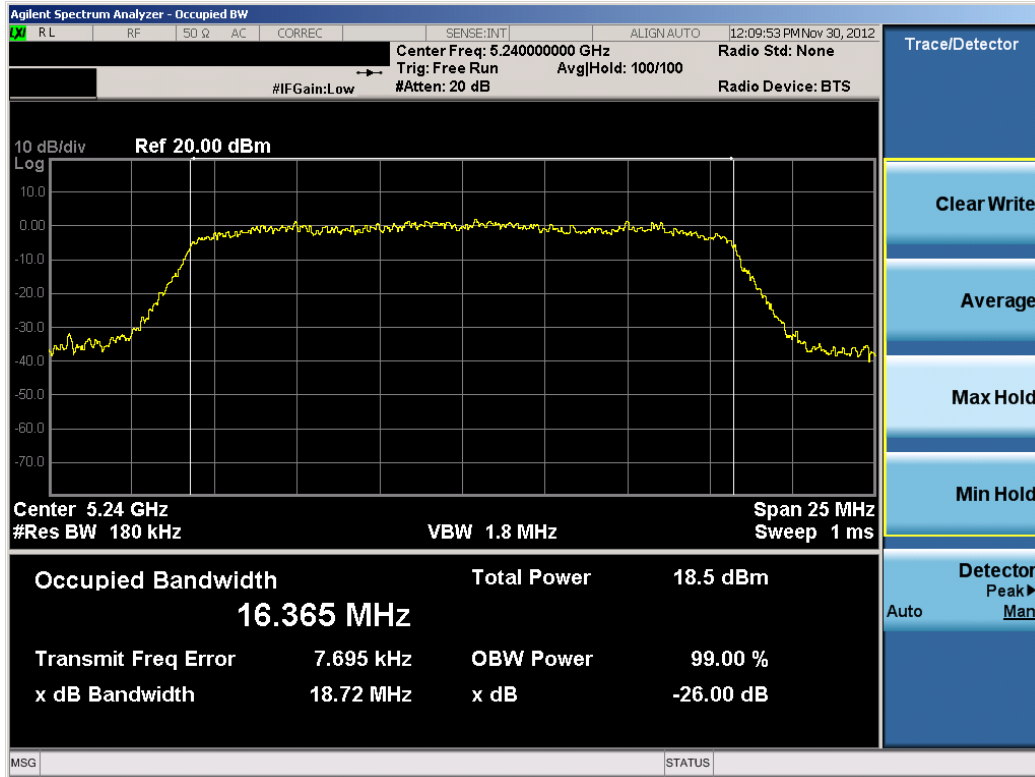


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

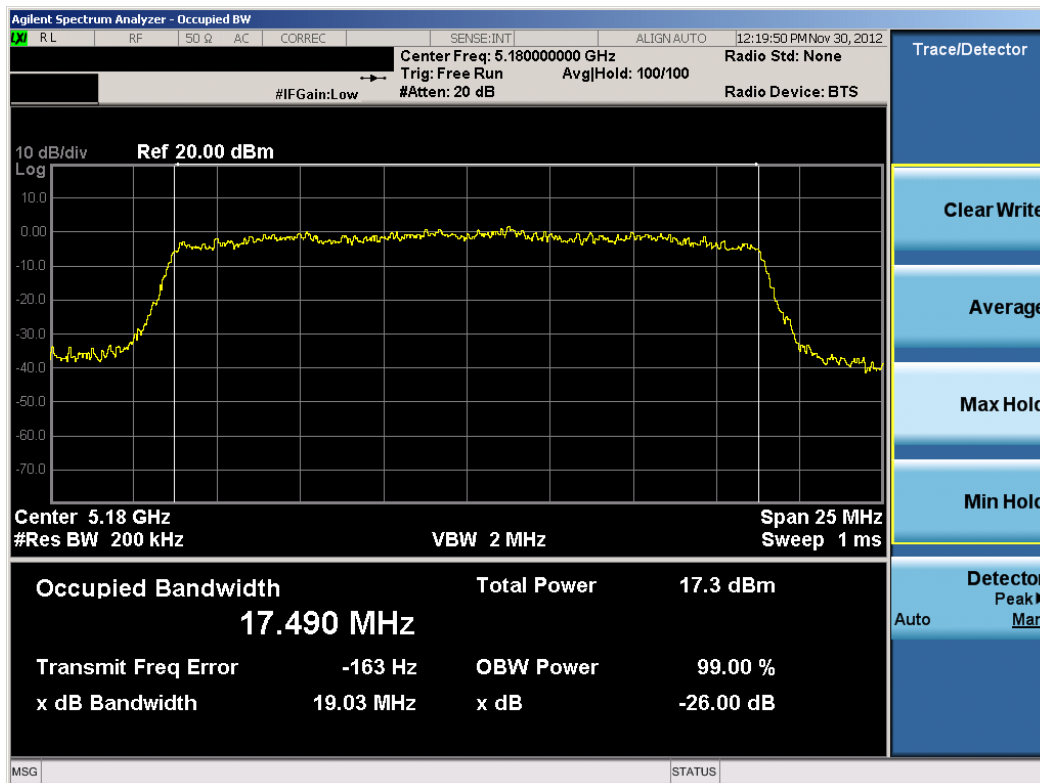


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 13 of 78

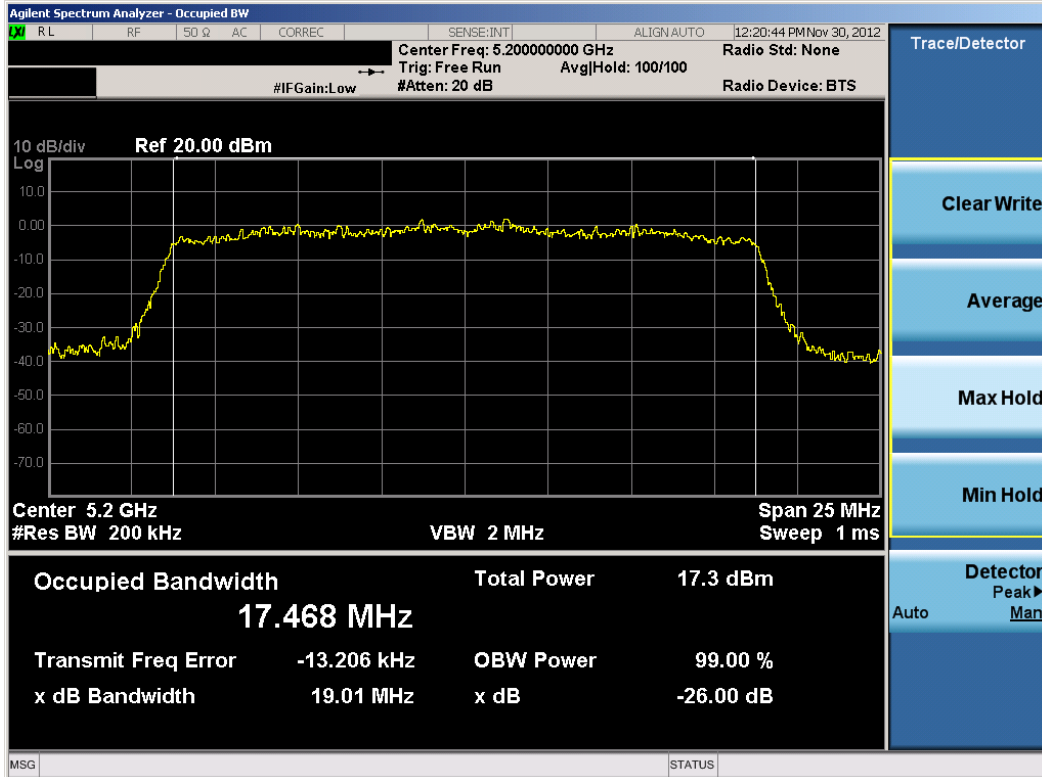


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

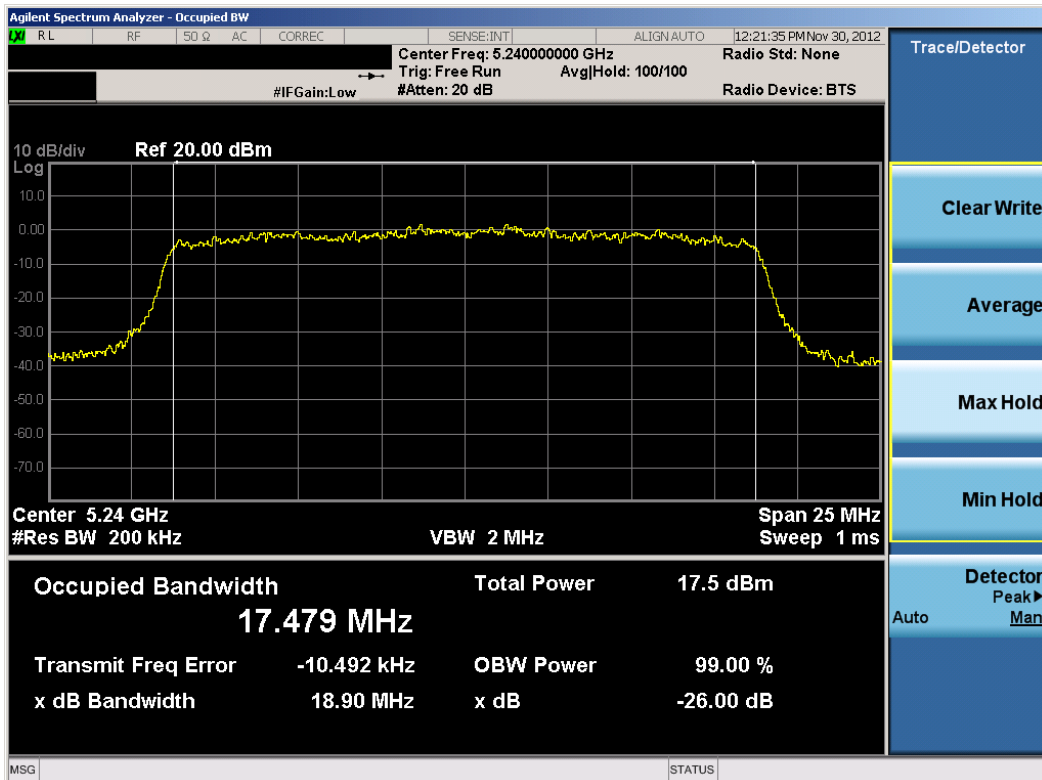


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 14 of 78

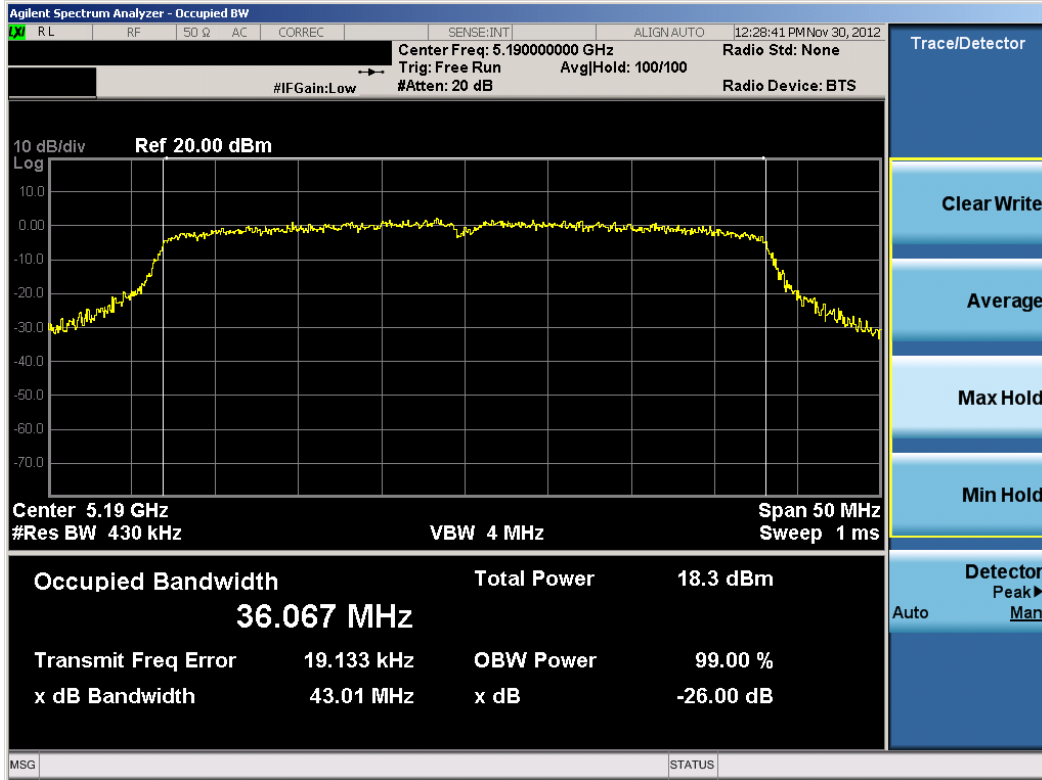


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

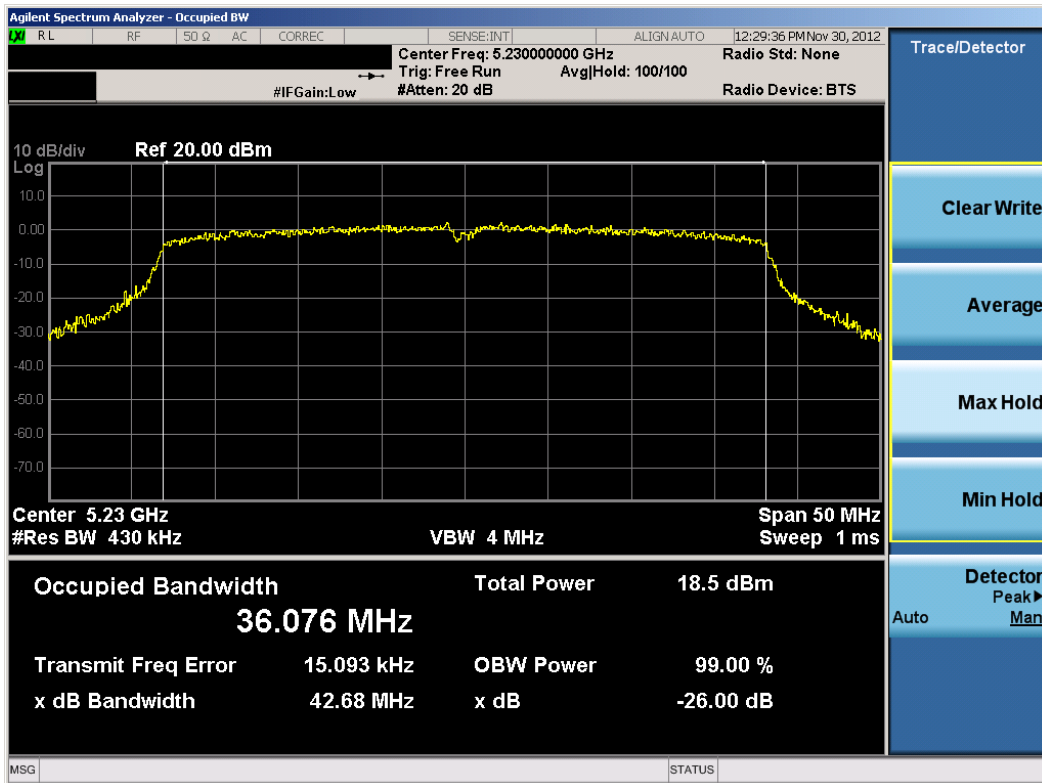


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 15 of 78

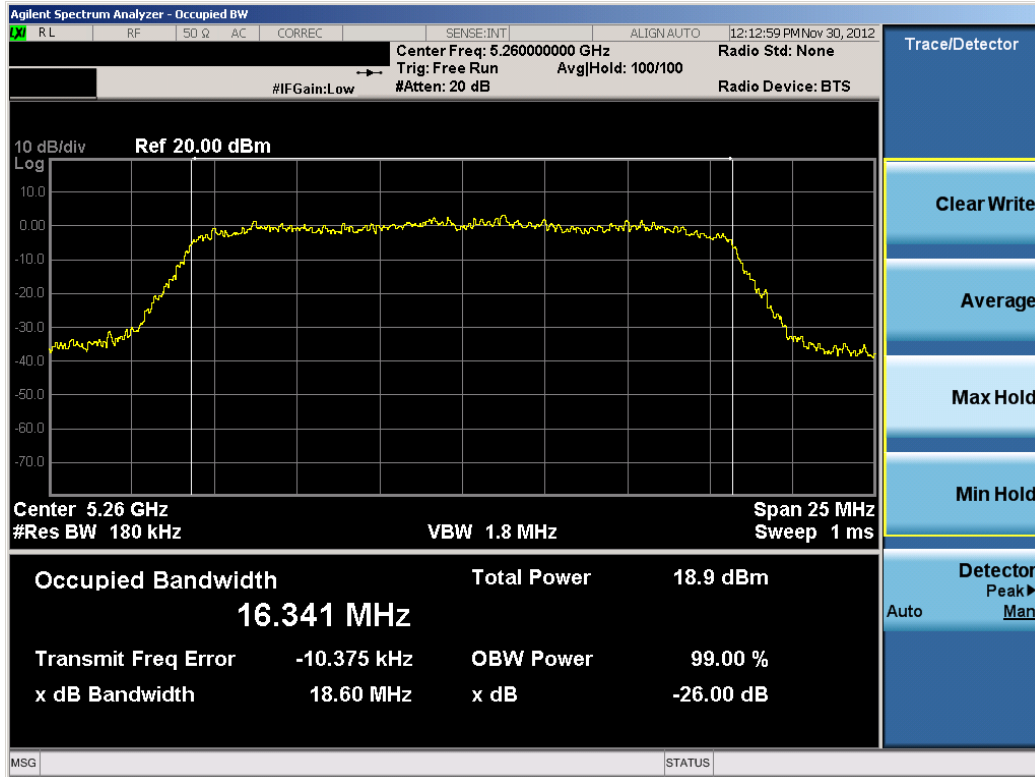


Plot 6-9. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

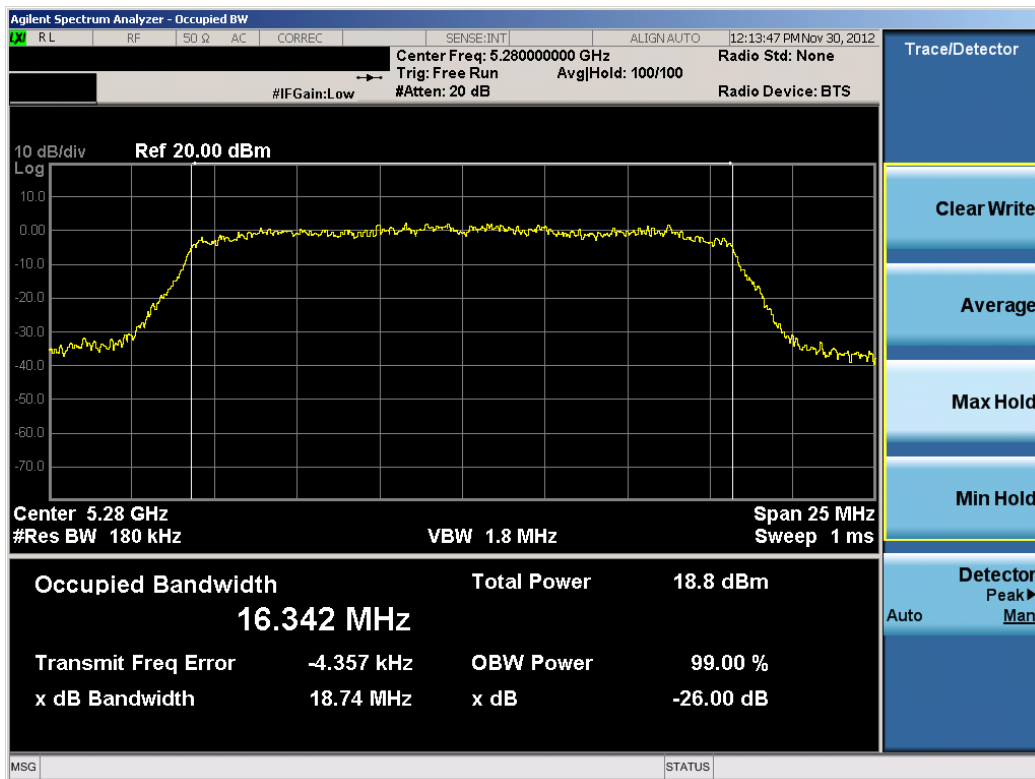


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 16 of 78

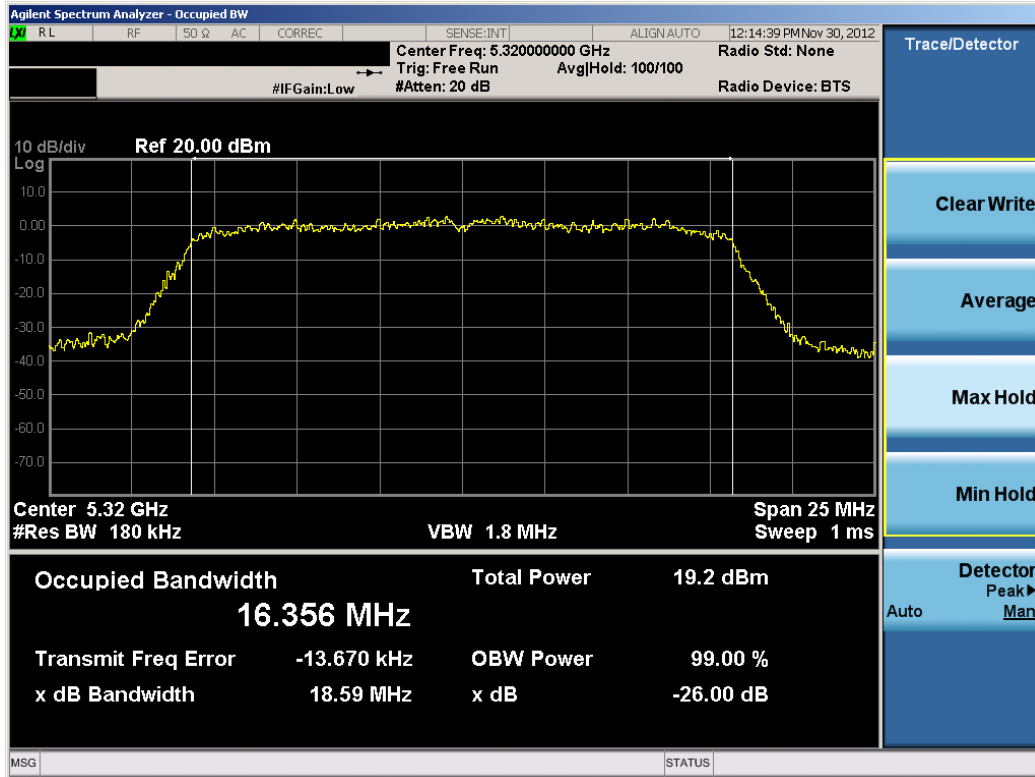


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

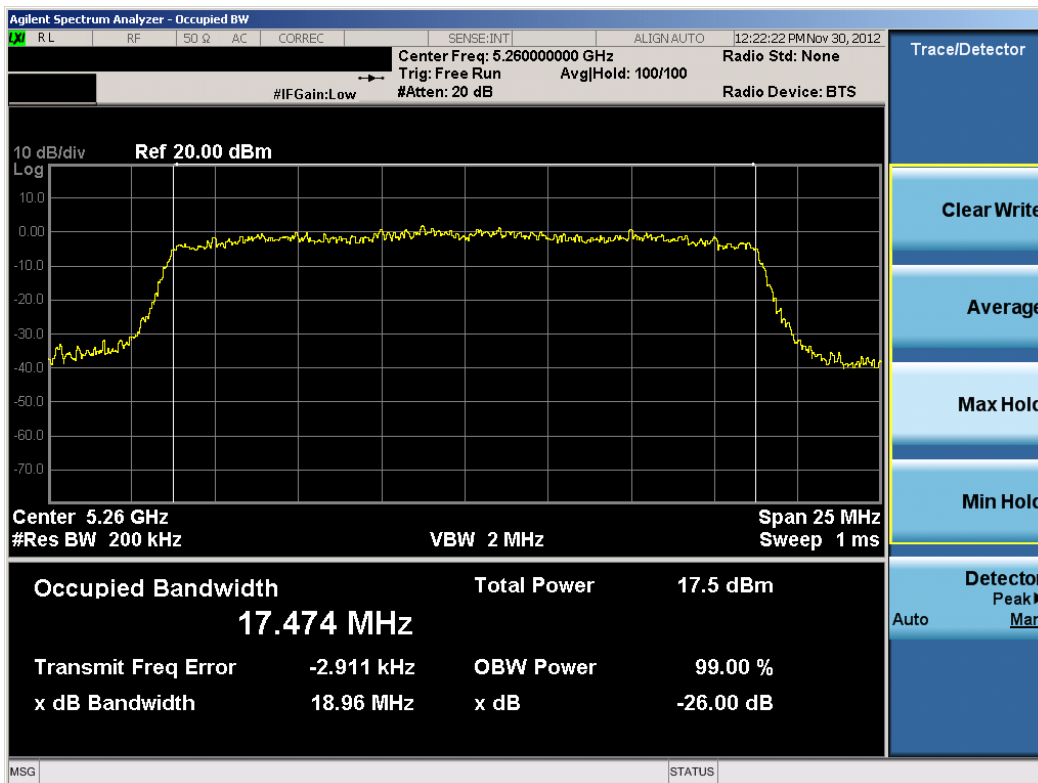


Plot 6-12. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 17 of 78

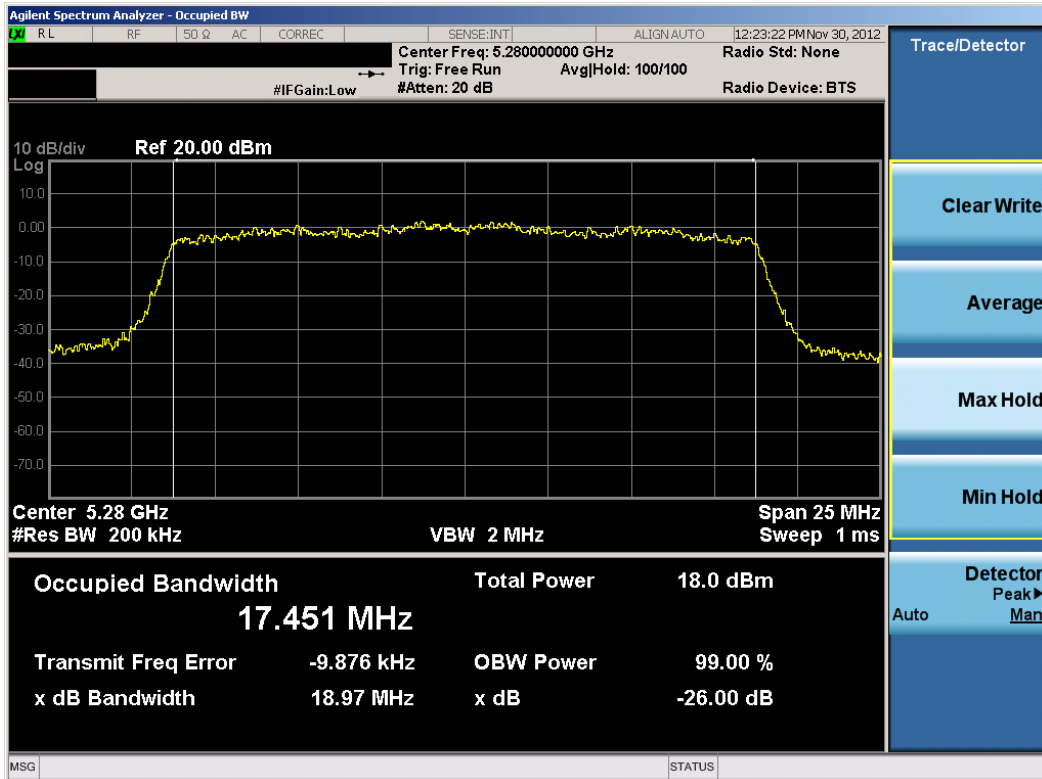


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

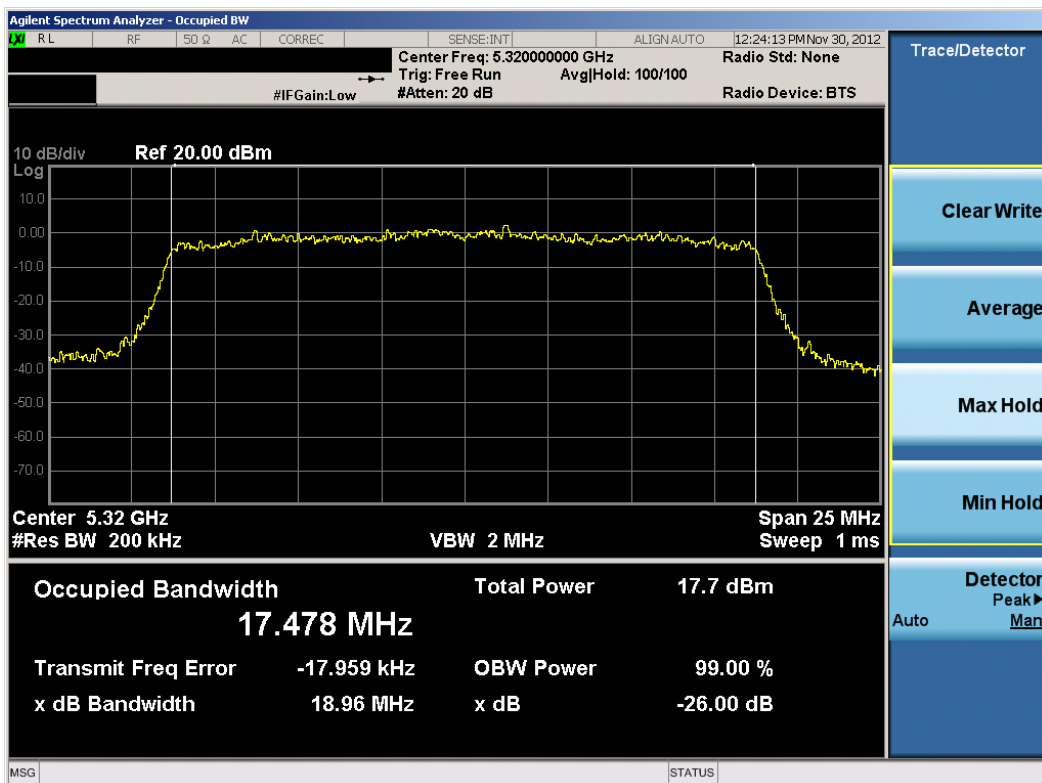


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 18 of 78

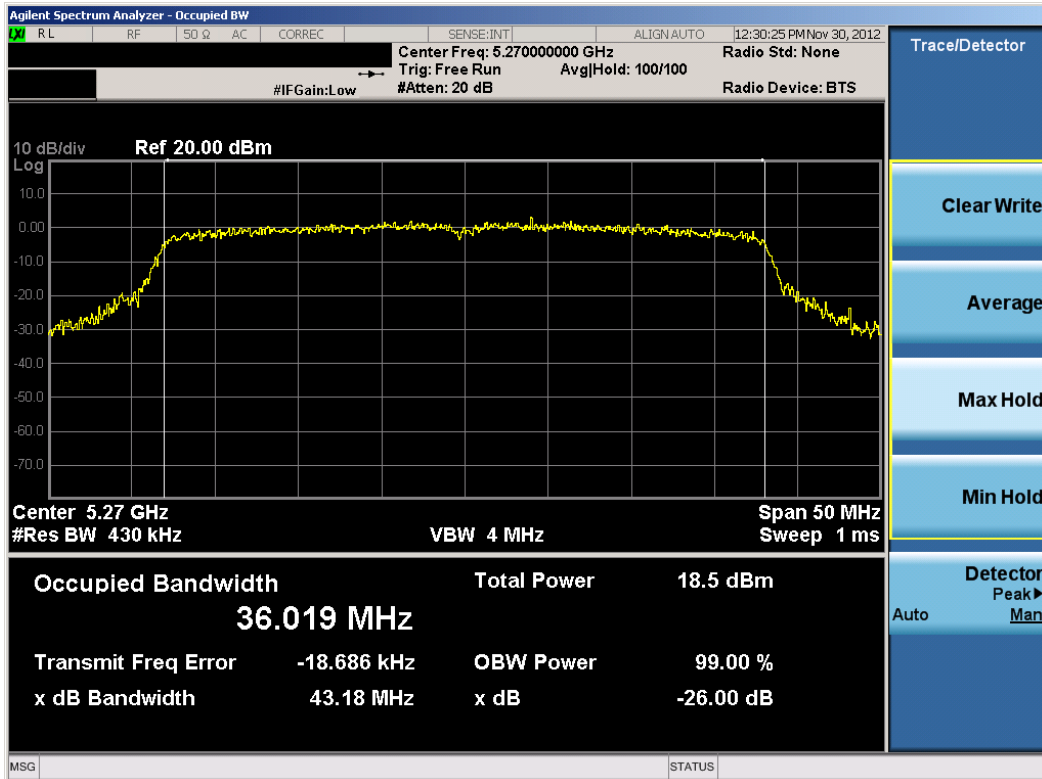


Plot 6-15. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

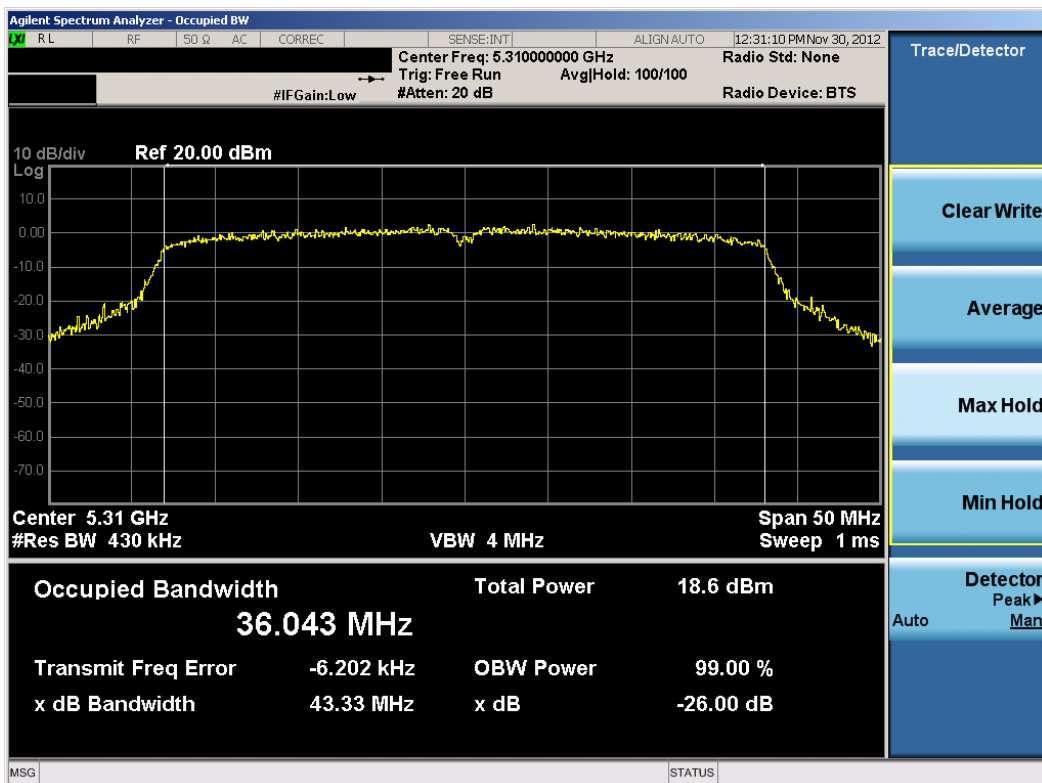


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 19 of 78

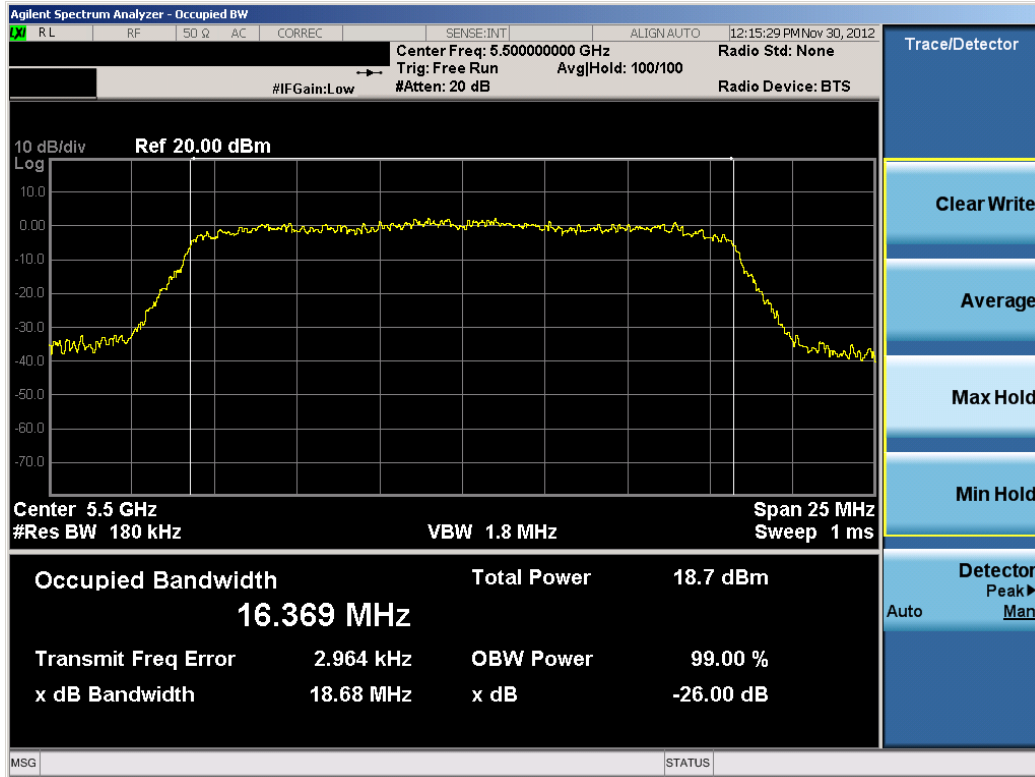


Plot 6-17. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

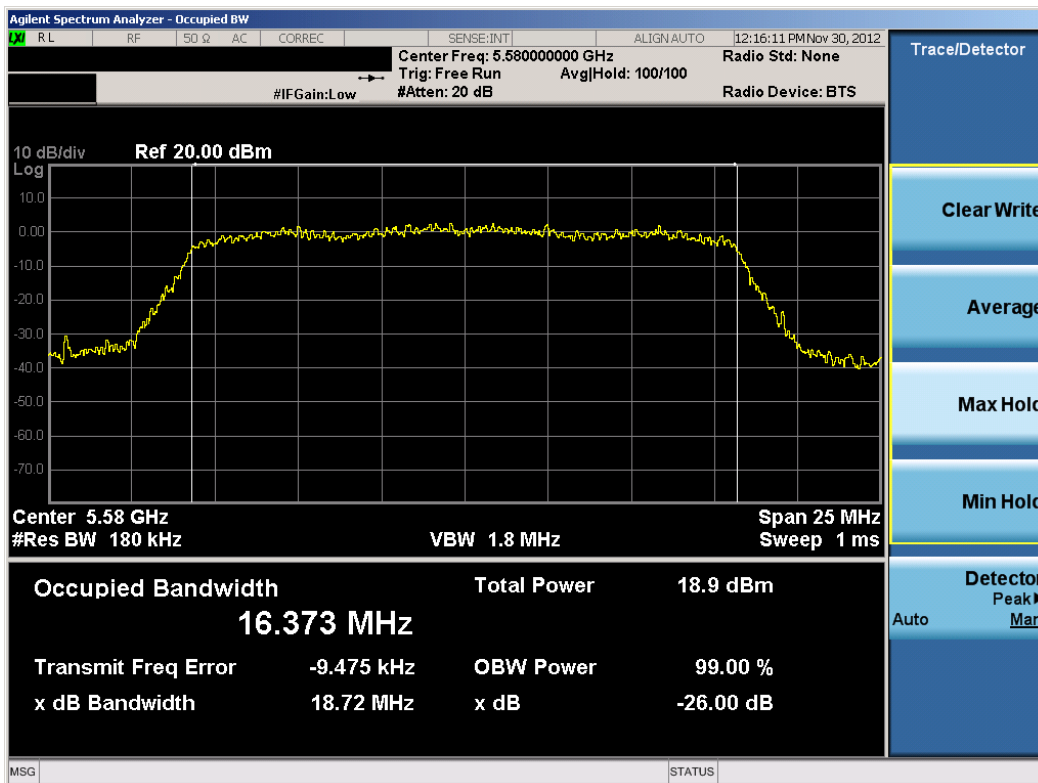


Plot 6-18. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 20 of 78

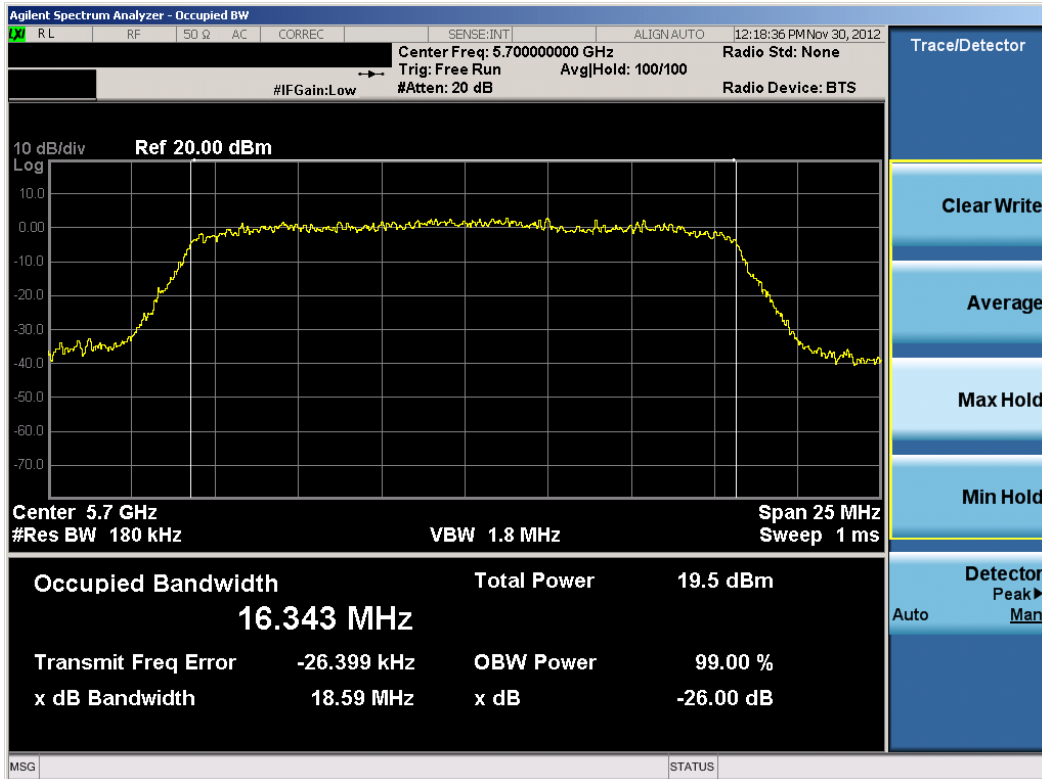


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 140)

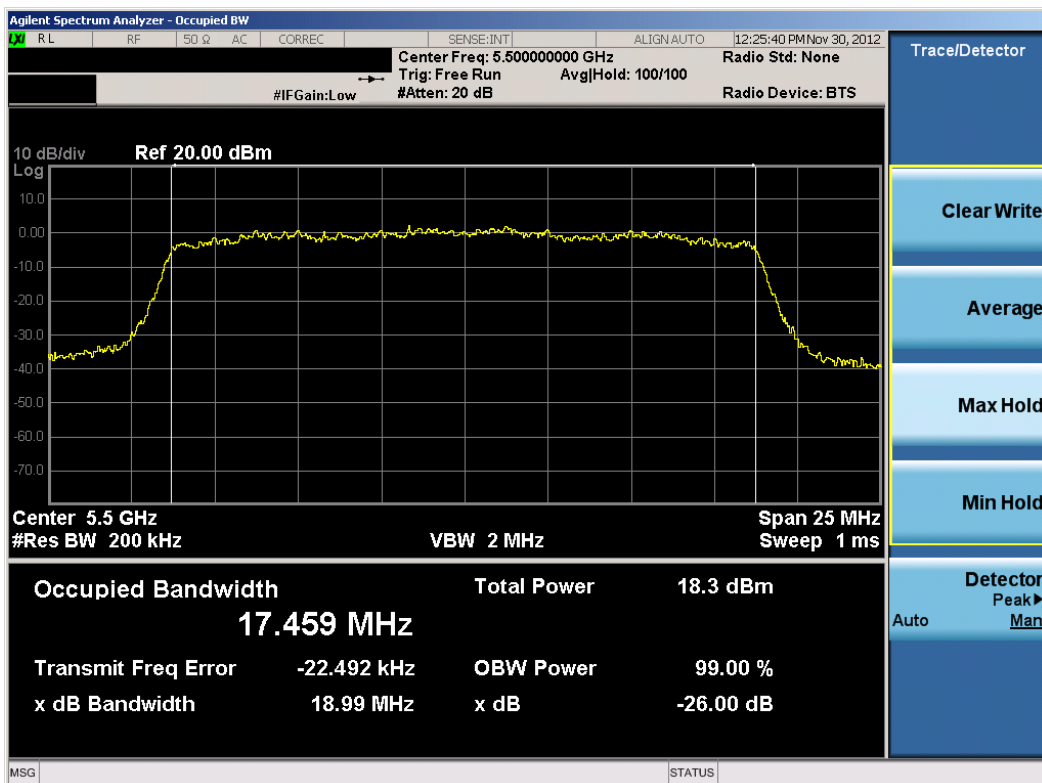


Plot 6-20. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 21 of 78

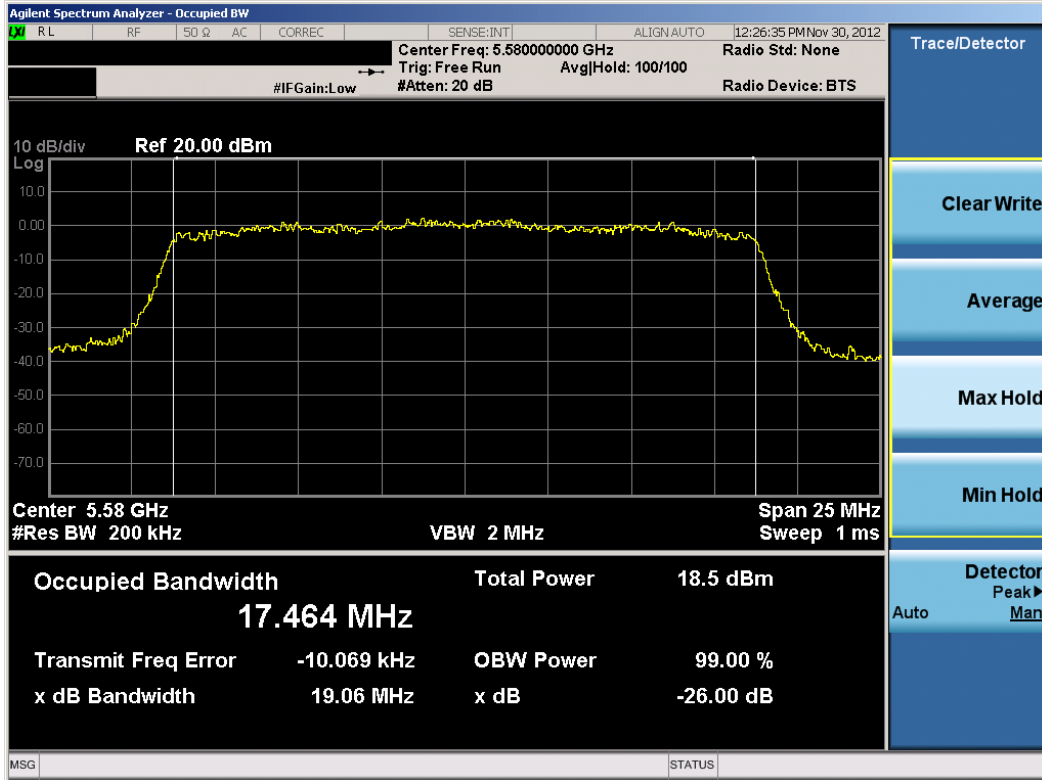


Plot 6-21. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

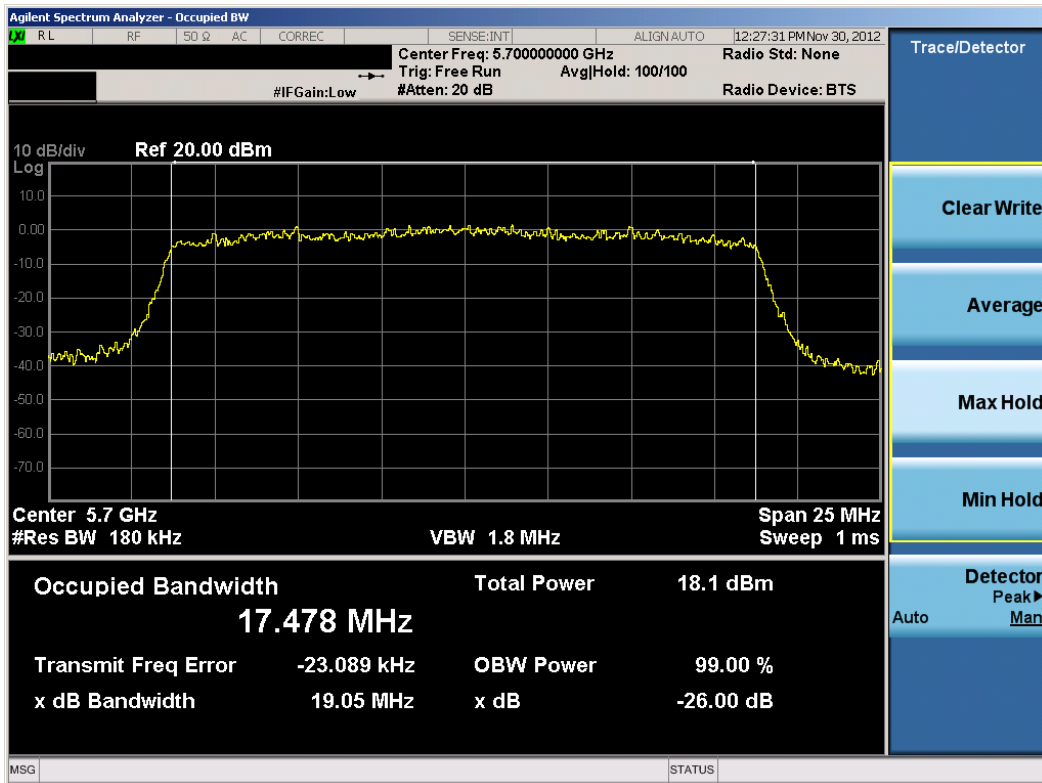


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 22 of 78

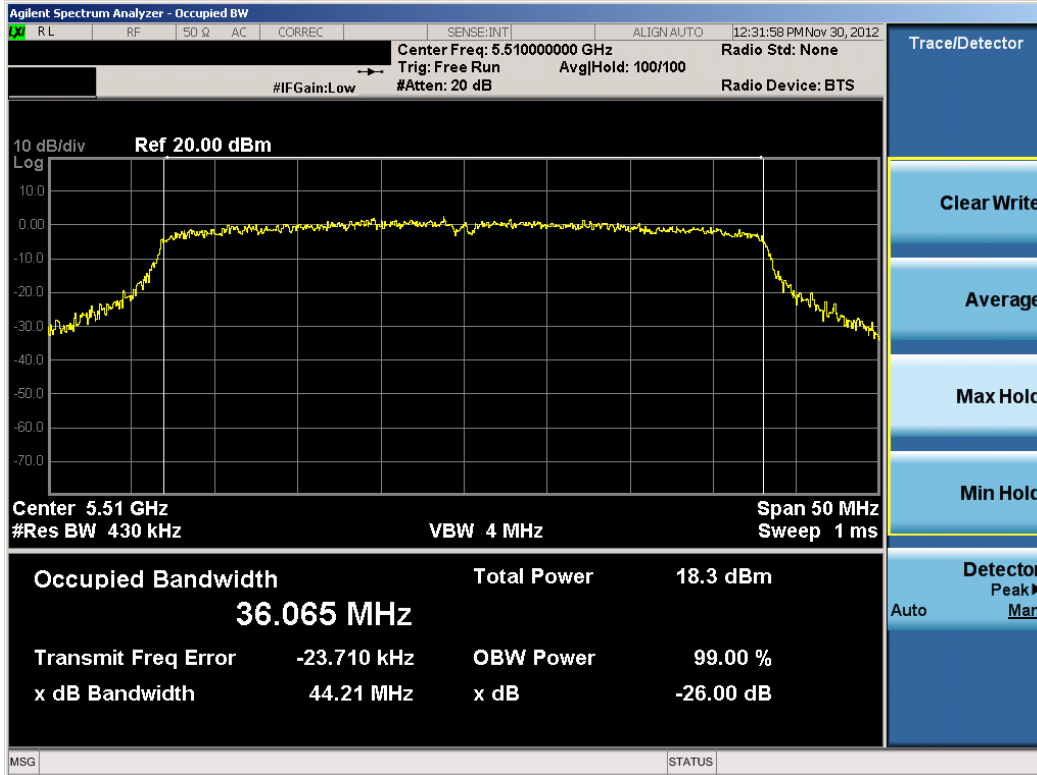


Plot 6-23. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

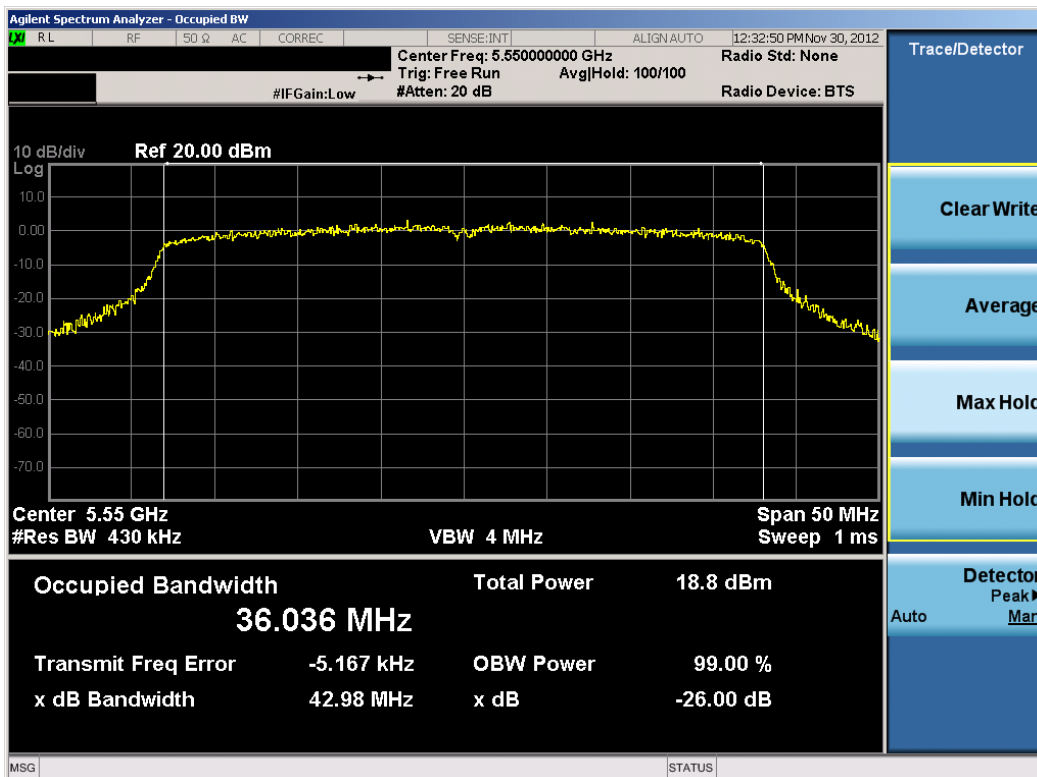

Plot 6-24. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 23 of 78

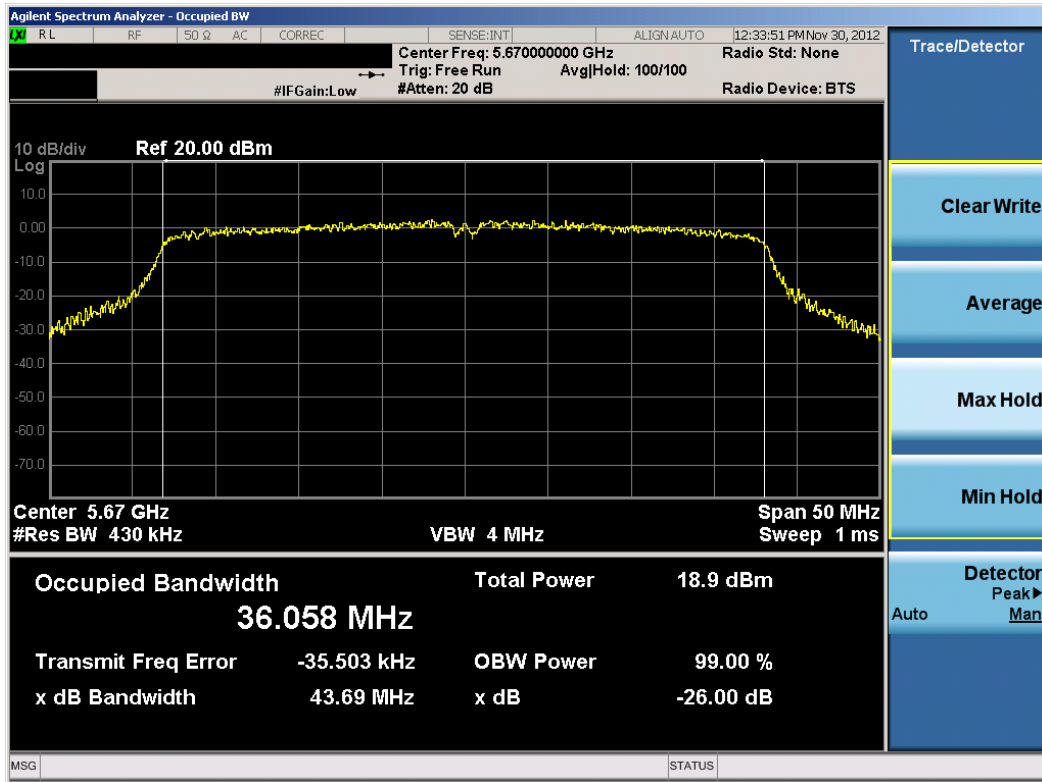

Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 24 of 78

6.3 UNII Output Power Measurement – 802.11a/n §15.407 (a)(1); RSS-210 [A9.2]

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband average power meter while the EUT is operating continuously at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies.



In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4 \text{ dBm} + 10\log_{10}(18.52) = 16.68\text{dBm}$.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(18.59) = 23.69\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(18.59) = 23.69\text{dBm}$.

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	12.84	12.93	12.92	12.86	12.63	12.59	12.60	12.60
802.11a	5200	40	AVG	12.95	12.83	12.89	12.85	12.81	12.73	12.78	12.78
802.11a	5220	44	AVG	12.99	12.97	12.93	12.96	13.00	12.96	12.93	12.84
802.11a	5240	48	AVG	12.86	13.05	13.07	13.07	12.95	12.99	12.93	12.91
802.11a	5260	52	AVG	13.01	12.63	12.73	12.65	12.57	12.61	12.53	12.52
802.11a	5280	56	AVG	13.05	12.71	12.61	12.71	12.69	12.67	12.64	12.55
802.11a	5300	60	AVG	13.12	13.17	13.10	13.11	13.08	13.07	13.09	12.99
802.11a	5320	64	AVG	13.19	13.26	13.16	13.08	13.06	13.22	13.26	13.11
802.11a	5500	100	AVG	12.81	12.71	12.75	12.74	12.72	12.84	12.64	12.59
802.11a	5520	104	AVG	12.55	12.43	12.40	12.55	12.50	12.55	12.49	12.80
802.11a	5540	108	AVG	12.84	12.82	12.86	12.84	12.86	12.75	12.80	12.75
802.11a	5560	112	AVG	12.87	12.86	12.81	12.83	12.76	12.78	12.58	12.57
802.11a	5580	116	AVG	12.74	12.67	12.74	12.64	12.62	12.58	12.53	12.54
802.11a	5660	132	AVG	13.21	13.34	13.19	13.16	12.99	13.02	12.98	12.85
802.11a	5680	136	AVG	12.99	13.00	12.93	12.98	12.93	13.05	13.12	13.01
802.11a	5700	140	AVG	13.26	13.17	13.34	13.29	13.27	13.37	13.32	13.23

Table 6-3. 802.11a (UNII) Maximum Conducted Output Power

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 25 of 78

Mode	Freq [MHz]	Channel	Detector	20MHz 802.11n (5GHz) Conducted Power [dBm]								
				Data Rate [Mbps]								
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2	
802.11n	5180	36	AVG	11.45	11.39	11.50	11.51	11.28	11.36	11.37	11.34	
802.11n	5200	40	AVG	11.52	11.46	11.41	11.39	11.36	11.32	11.31	11.35	
802.11n	5220	44	AVG	11.52	11.56	11.56	11.46	11.45	11.43	11.49	11.45	
802.11n	5240	48	AVG	11.64	11.64	11.65	11.62	11.73	11.69	11.56	11.75	
802.11n	5260	52	AVG	11.72	11.62	11.63	11.55	11.58	11.54	11.59	11.58	
802.11n	5280	56	AVG	11.83	11.80	11.75	11.85	11.72	11.71	11.79	11.85	
802.11n	5300	60	AVG	11.85	11.86	12.03	11.81	11.80	11.79	11.78	11.76	
802.11n	5320	64	AVG	11.89	11.74	11.75	11.77	11.66	11.67	11.70	11.63	
802.11n	5500	100	AVG	11.61	11.65	11.57	11.59	11.57	11.61	11.52	11.53	
802.11n	5520	104	AVG	11.68	11.55	11.57	11.66	11.53	11.44	11.50	11.35	
802.11n	5540	108	AVG	11.76	11.79	11.69	11.60	11.61	11.56	11.52	11.46	
802.11n	5560	112	AVG	11.77	11.72	11.73	11.77	11.64	11.70	11.67	11.71	
802.11n	5580	116	AVG	11.81	11.70	11.76	11.59	11.55	11.51	11.53	11.51	
802.11n	5660	132	AVG	11.92	11.89	11.83	11.71	11.78	11.75	11.75	11.69	
802.11n	5680	136	AVG	12.06	12.05	12.01	11.98	11.92	11.94	11.91	11.81	
802.11n	5700	140	AVG	12.13	12.14	12.14	12.05	12.05	11.99	12.01	11.97	

Table 6-4. 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]								
				Data Rate [Mbps]								
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150	
802.11n	5190	38	AVG	12.01	11.89	11.90	11.89	11.93	11.88	11.87	11.73	
802.11n	5230	46	AVG	12.14	12.11	12.01	12.04	11.95	11.94	11.96	11.93	
802.11n	5270	54	AVG	12.25	12.15	12.07	12.11	12.09	12.01	12.06	11.93	
802.11n	5310	62	AVG	12.37	12.29	12.30	12.20	12.17	12.14	12.24	12.09	
802.11n	5510	102	AVG	12.19	12.09	12.03	12.01	12.03	12.00	12.04	11.91	
802.11n	5550	110	AVG	12.26	12.17	12.18	12.07	12.10	12.04	12.14	12.06	
802.11n	5670	134	AVG	12.61	12.50	12.42	12.41	12.34	12.34	12.41	12.25	

Table 6-5. 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

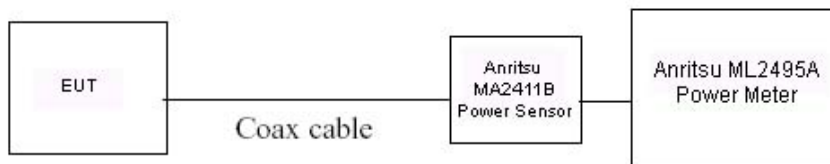


Figure 6-2. Test Instrument & Measurement Setup

6.4 Peak Power Spectral Density – 802.11a/n §15.407 (a)(1),(5) / RSS-210 [A9.2]

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. Method SA-2, as defined in KDB 789033, was used to measure the power spectral density.

Due to software restrictions, the maximum achievable duty cycle was < 98%. Therefore Method SA-2 per KDB 789033 v01r02 was used to account for the non-continuous transmission.

For 20MHz bandwidth signals, the maximum achievable duty cycle was found to be 95.4%. An RMS detector was used to average 100 traces. The measured power is offset by $10 \cdot \log(1/\text{duty cycle}) = 0.20 \text{ dB}$. The minimum number of sweep points required to ensure bin-to-bin spacing is such that narrowband emissions are not lost is equal to $2 \cdot \text{Span} / \text{RBW} = 50$ sweep points.

For 40MHz bandwidth signals, the maximum achievable duty cycle was found to be 90.8%. An RMS detector was used to average 100 traces. The measured power is offset by $10 \cdot \log(1/\text{duty cycle}) = 0.42 \text{ dB}$. The minimum number of sweep points required to ensure that the bin-to-bin spacing is such that narrowband emissions are not lost is equal to $2 \cdot \text{Span} / \text{RBW} = 2 \cdot 40\text{MHz} / 1\text{MHz} = 80$ sweep points.

The maximum permissible peak power spectral density is 4dBm/MHz in the 5.15GHz – 5.25GHz band and 11dBm/MHz in the 5.25GHz – 5.35 GHz and 5.47 – 5.725GHz bands.









Figure 6-3. Test Instrument & Measurement Setup

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 27 of 78	


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	2.285	4.0	-1.72
	5200	40	a	6	2.372	4.0	-1.63
	5240	48	a	6	2.298	4.0	-1.70
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	1.084	4.0	-2.92
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	1.080	4.0	-2.92
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	1.246	4.0	-2.75
	5190	38	n (40MHz)	13.5/15 (MCS0)	-1.484	4.0	-5.48
	5230	46	n (40MHz)	13.5/15 (MCS0)	-1.406	4.0	-5.41
Band II	5260	52	a	6	2.449	11.0	-8.55
	5280	56	a	6	2.738	11.0	-8.26
	5320	64	a	6	2.839	11.0	-8.16
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	1.131	11.0	-9.87
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	1.198	11.0	-9.80
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	1.294	11.0	-9.71
	5270	54	n (40MHz)	13.5/15 (MCS0)	-1.666	11.0	-12.67
	5310	62	n (40MHz)	13.5/15 (MCS0)	-1.068	11.0	-12.07
Band III	5500	100	a	6	2.874	11.0	-8.13
	5580	116	a	6	3.096	11.0	-7.90
	5700	140	a	6	3.467	11.0	-7.53
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	1.658	11.0	-9.34
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	1.733	11.0	-9.27
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	2.565	11.0	-8.44
	5510	102	n (40MHz)	13.5/15 (MCS0)	-1.241	11.0	-12.24
	5550	110	n (40MHz)	13.5/15 (MCS0)	-1.439	11.0	-12.44
	5670	134	n (40MHz)	13.5/15 (MCS0)	-1.036	11.0	-12.04

Table 6-6. Conducted Power Spectral Density Measurements

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 28 of 78

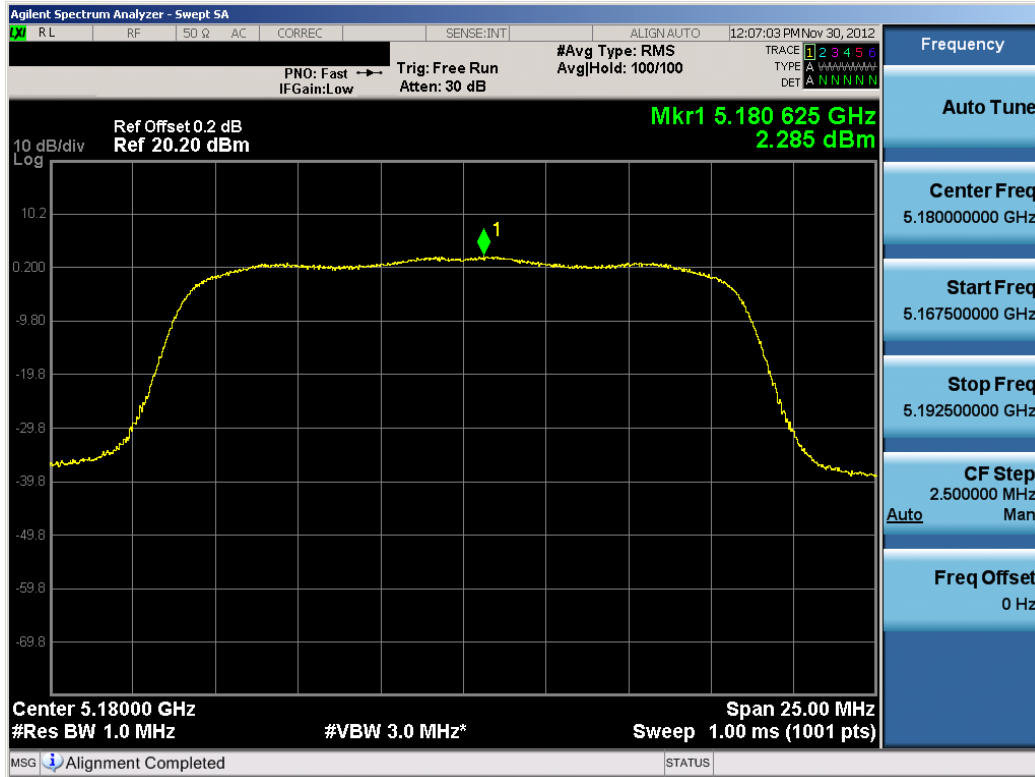


Plot 6-26. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

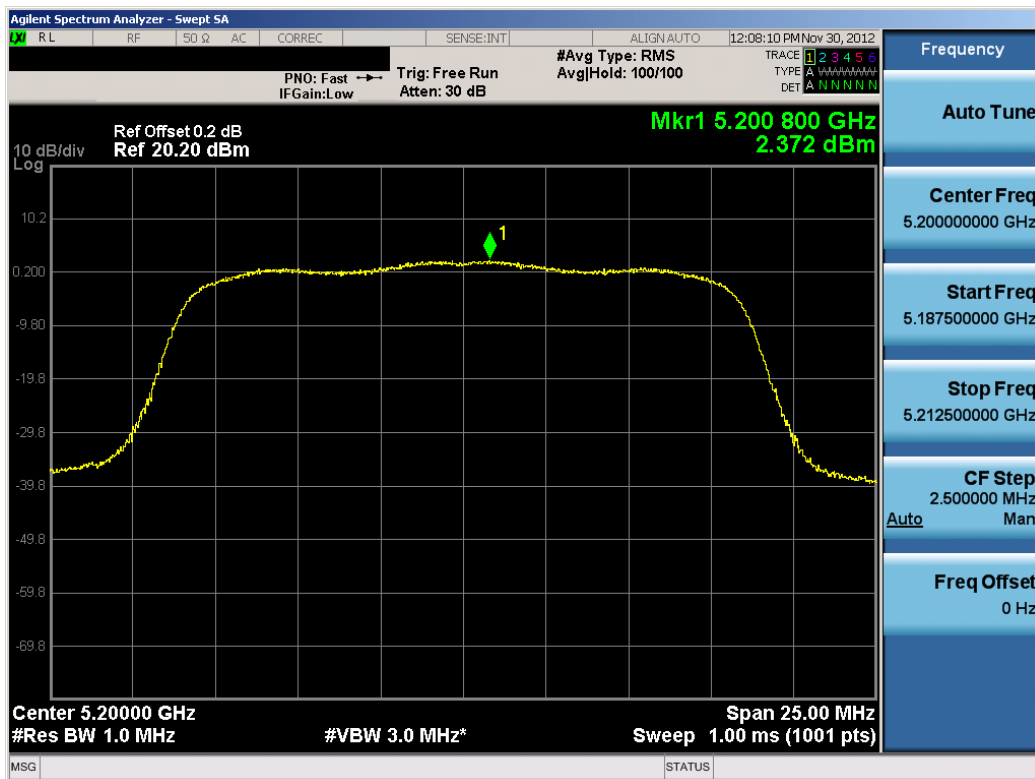


Plot 6-27. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 29 of 78

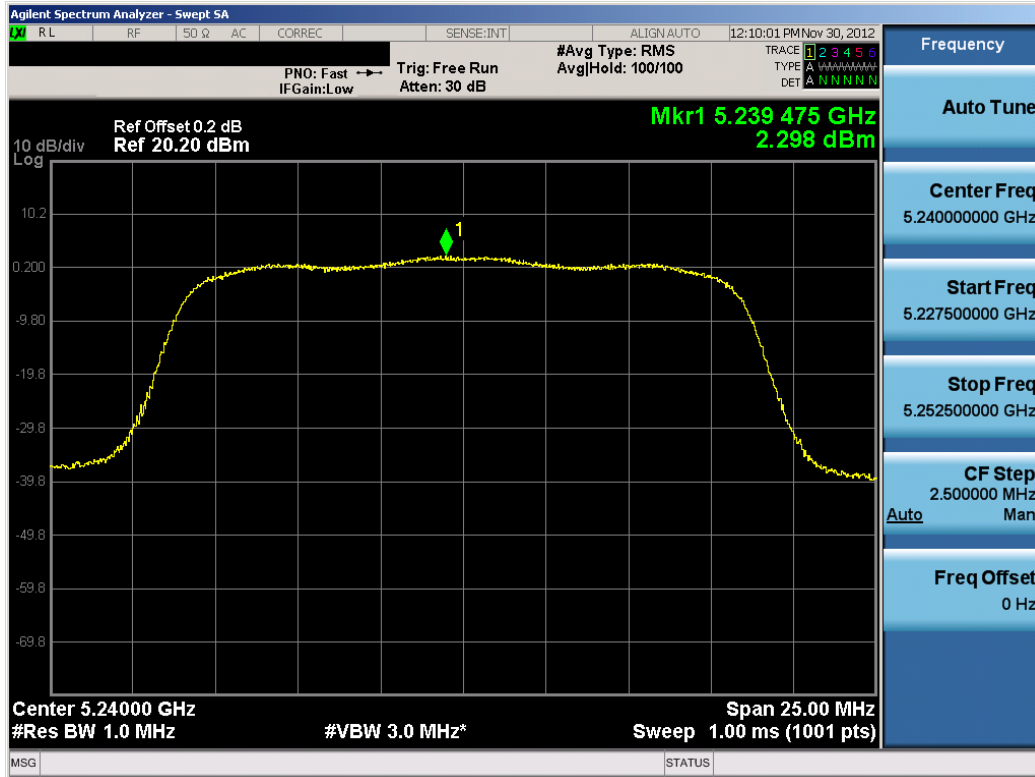


Plot 6-28. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

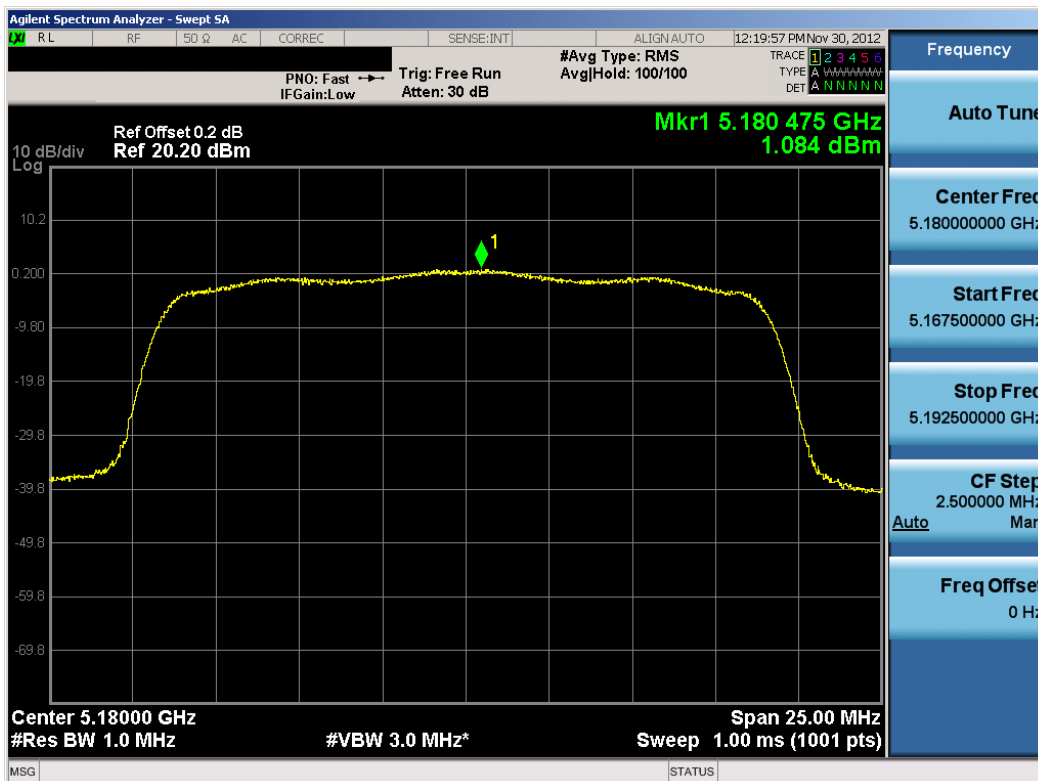


Plot 6-29. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 30 of 78

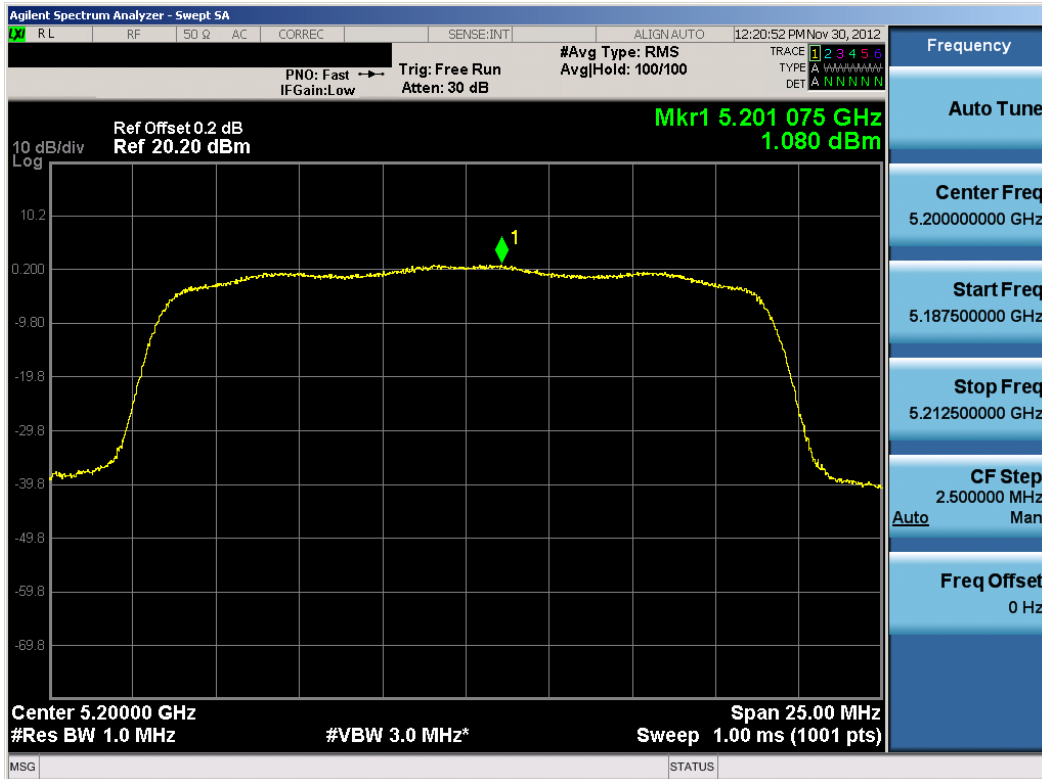


Plot 6-30. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

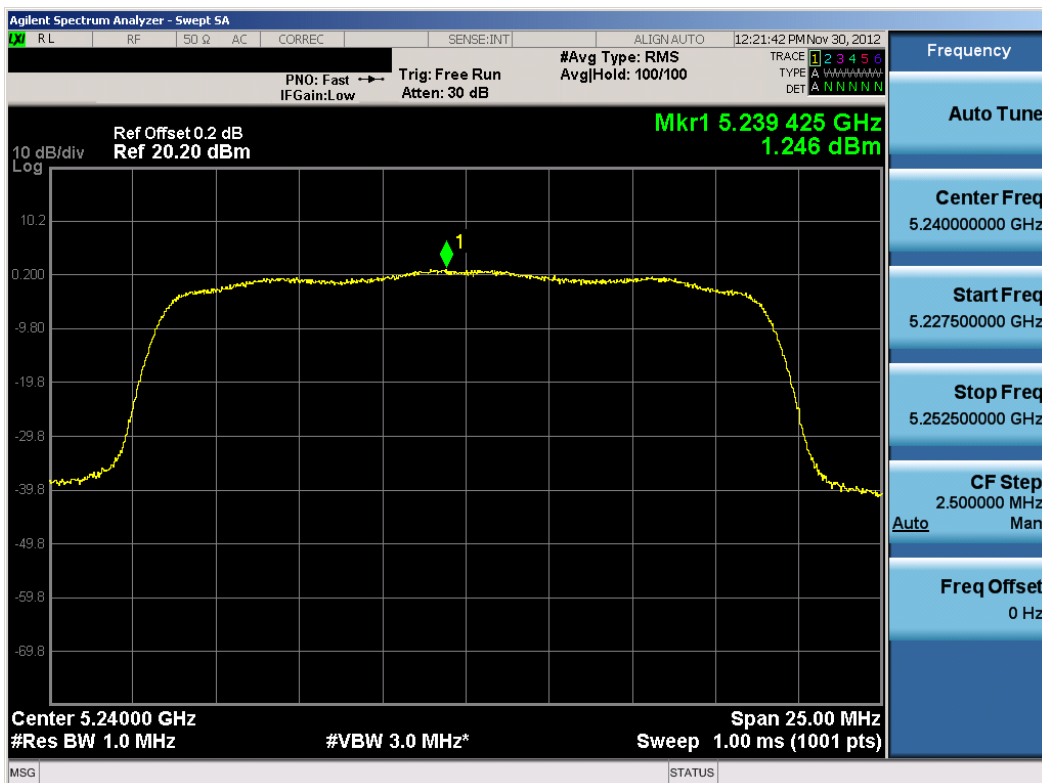


Plot 6-31. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 31 of 78

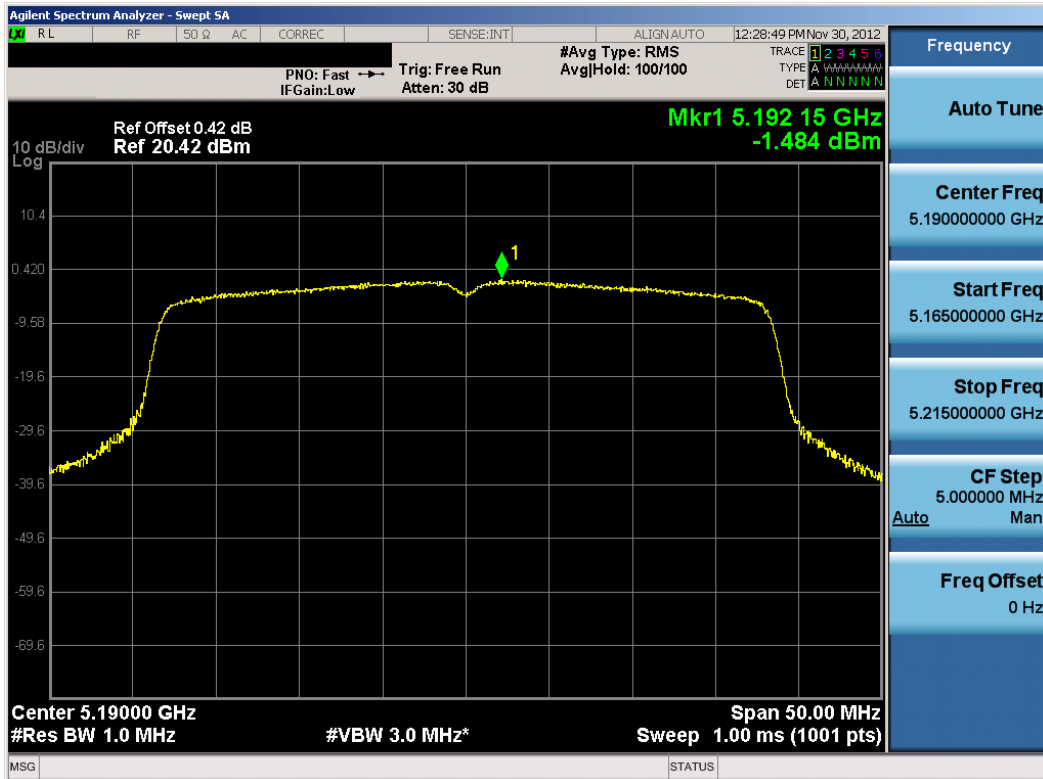


Plot 6-32. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

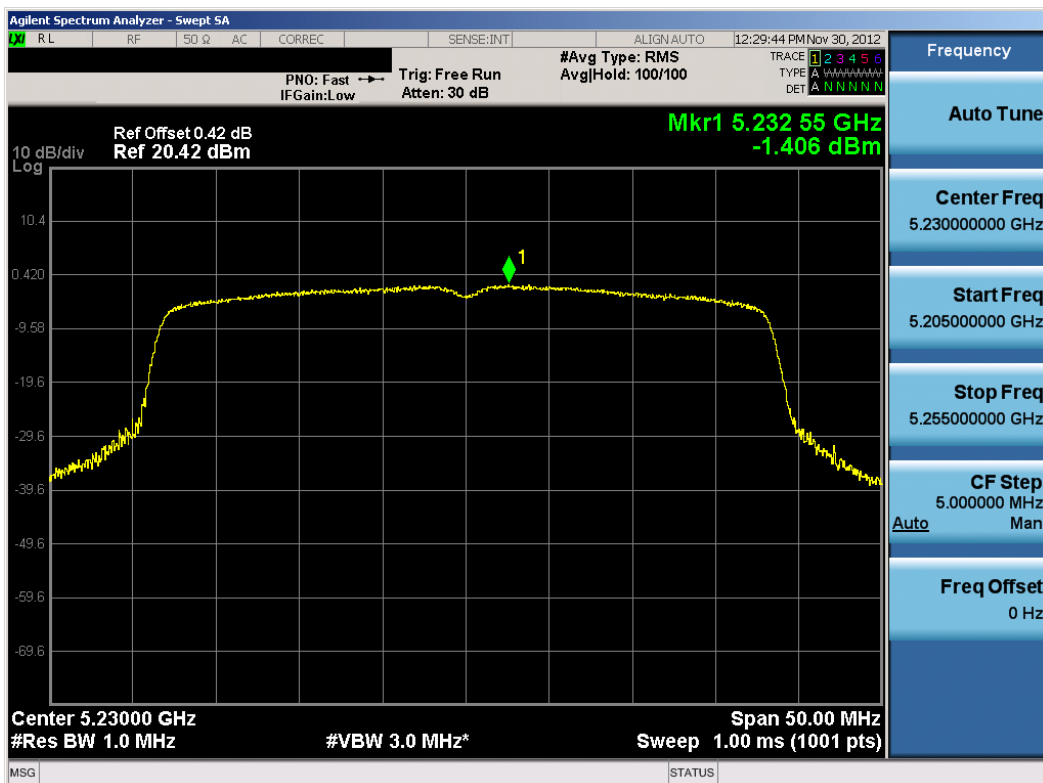


Plot 6-33. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 32 of 78

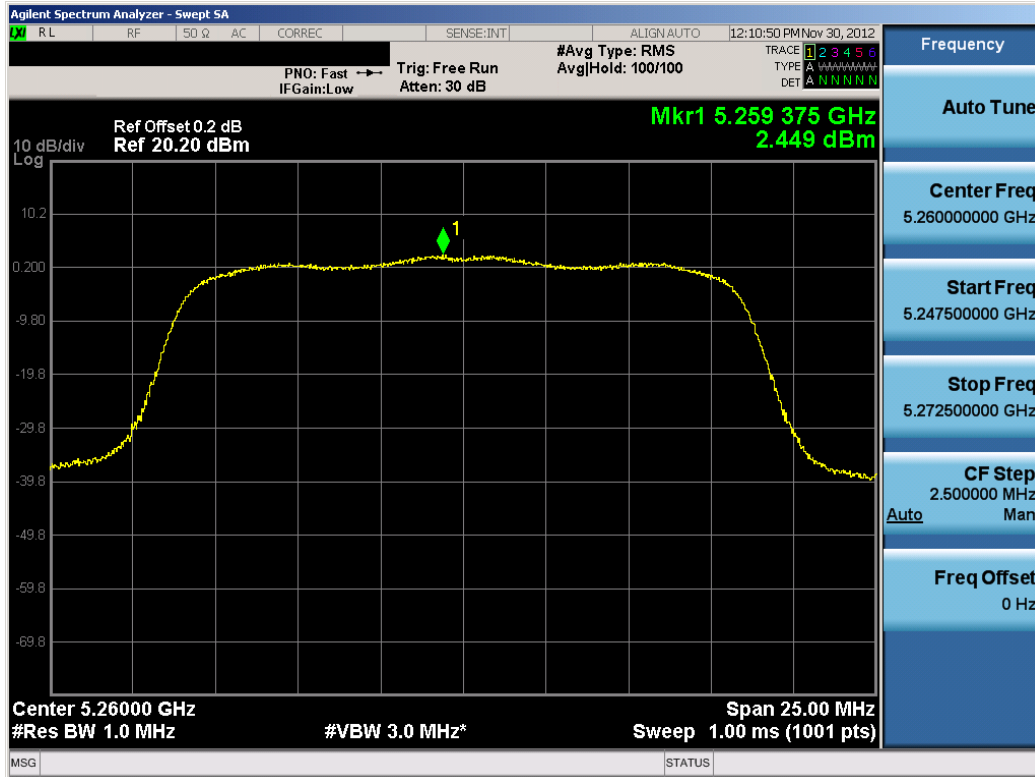


Plot 6-34. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

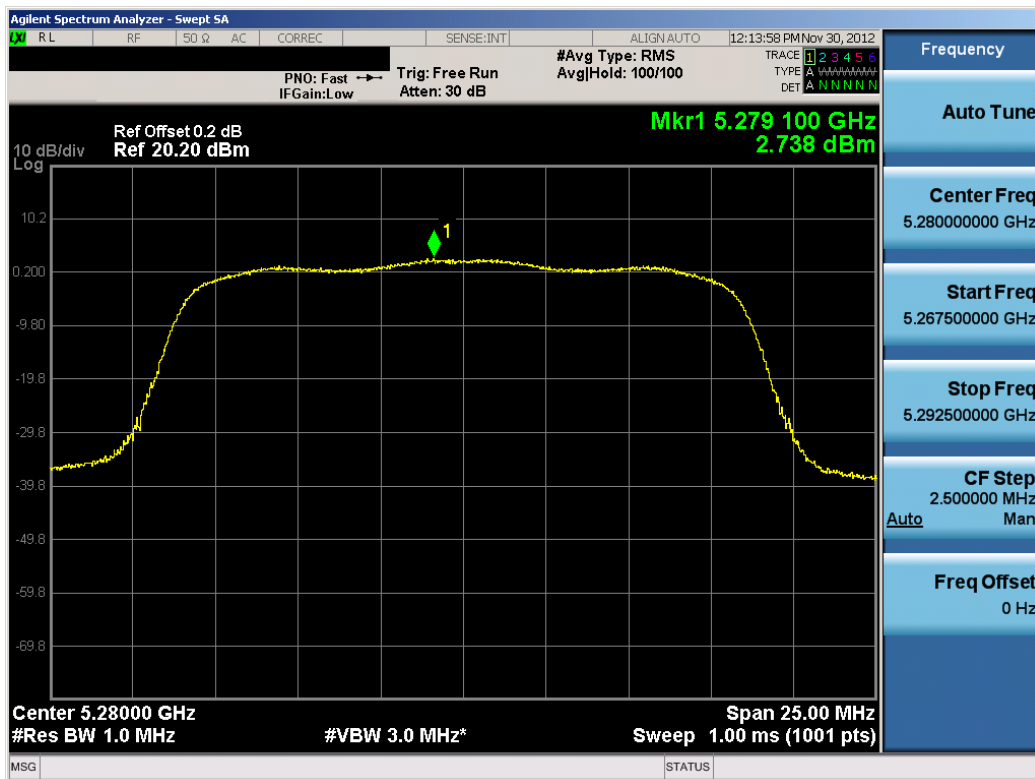


Plot 6-35. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 33 of 78

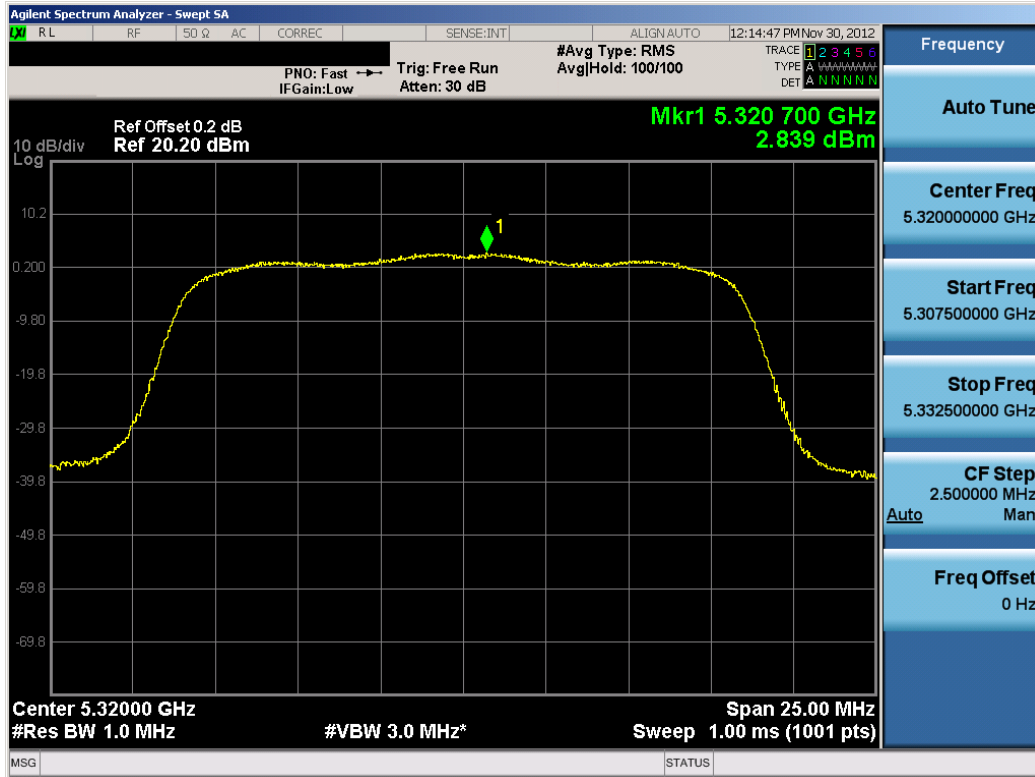


Plot 6-36. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

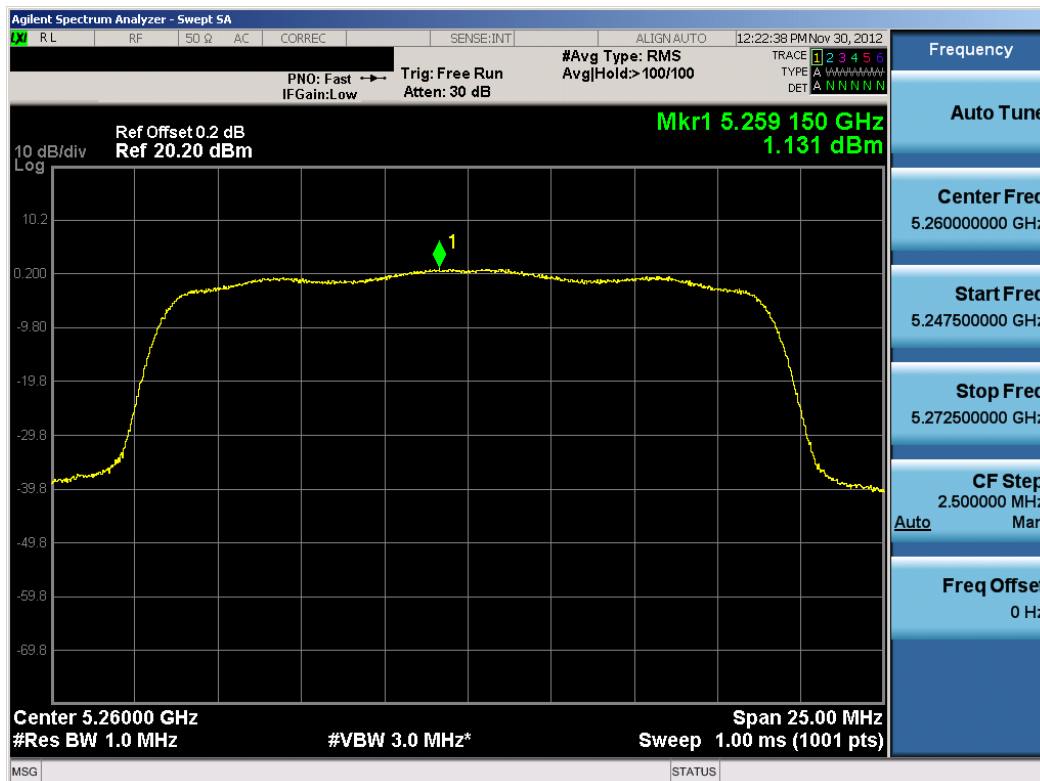


Plot 6-37. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 34 of 78

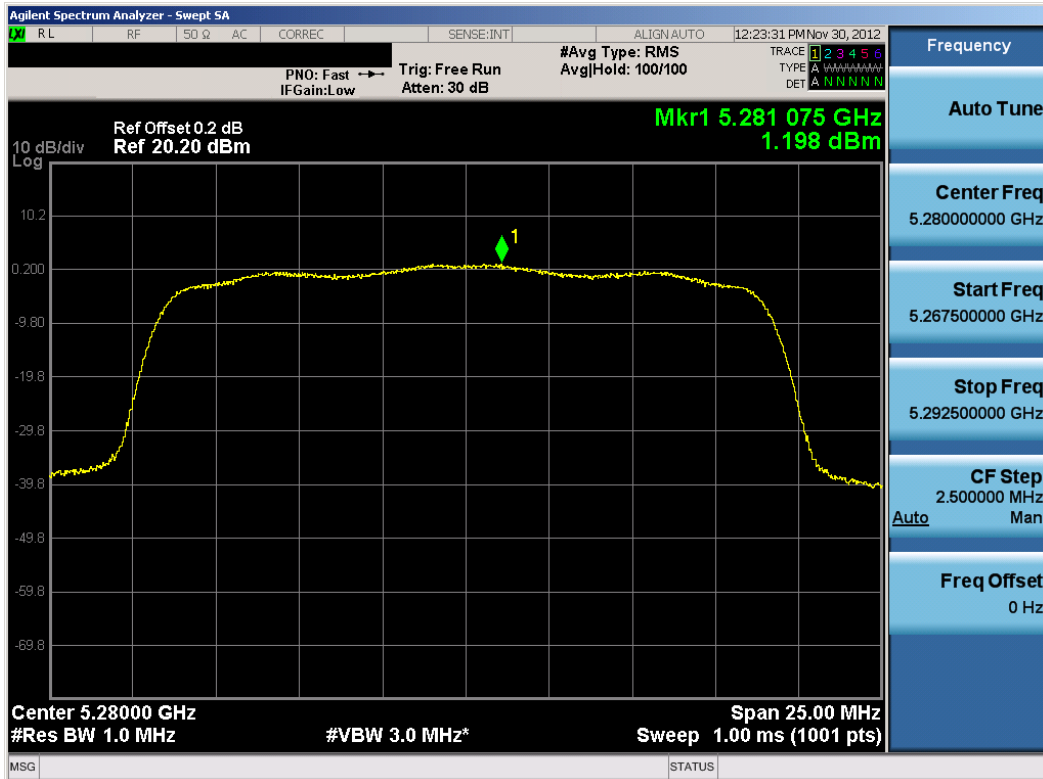


Plot 6-38. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

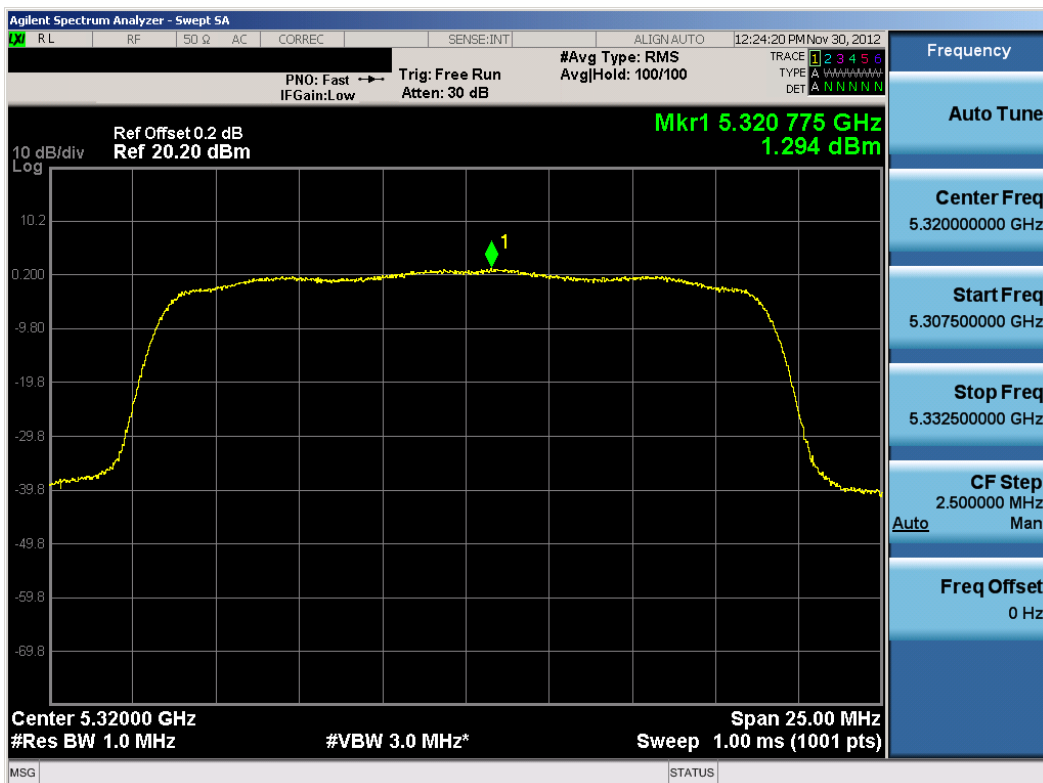


Plot 6-39. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 35 of 78

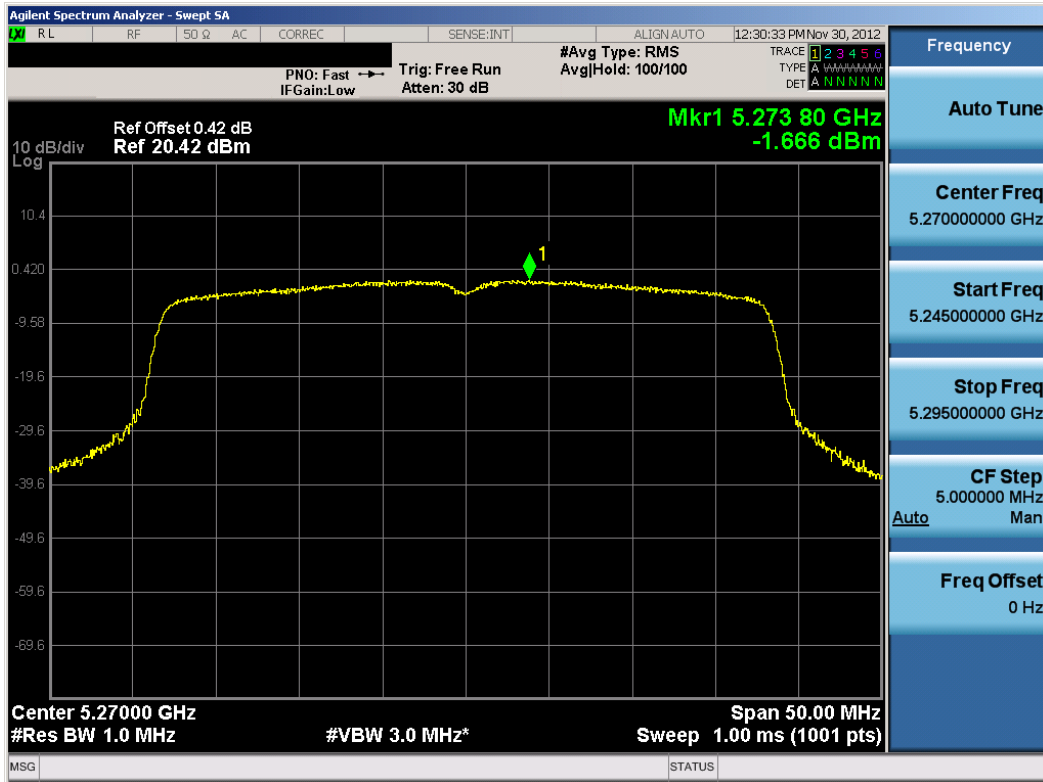


Plot 6-40. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

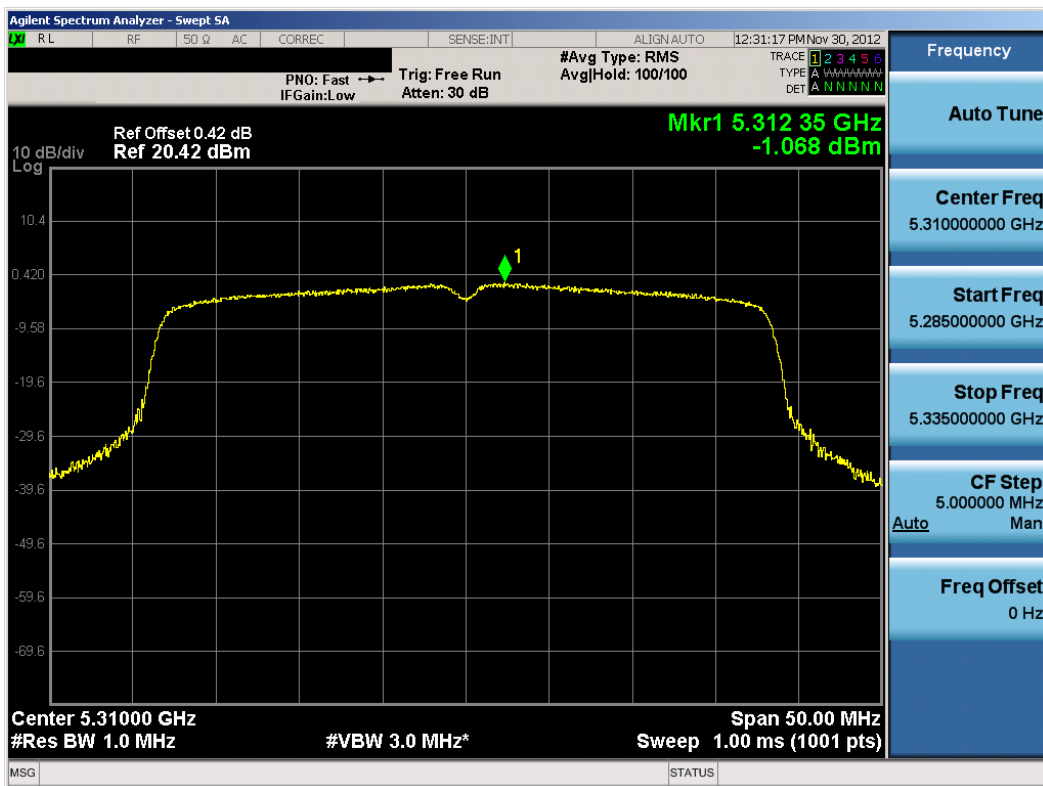


Plot 6-41. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)

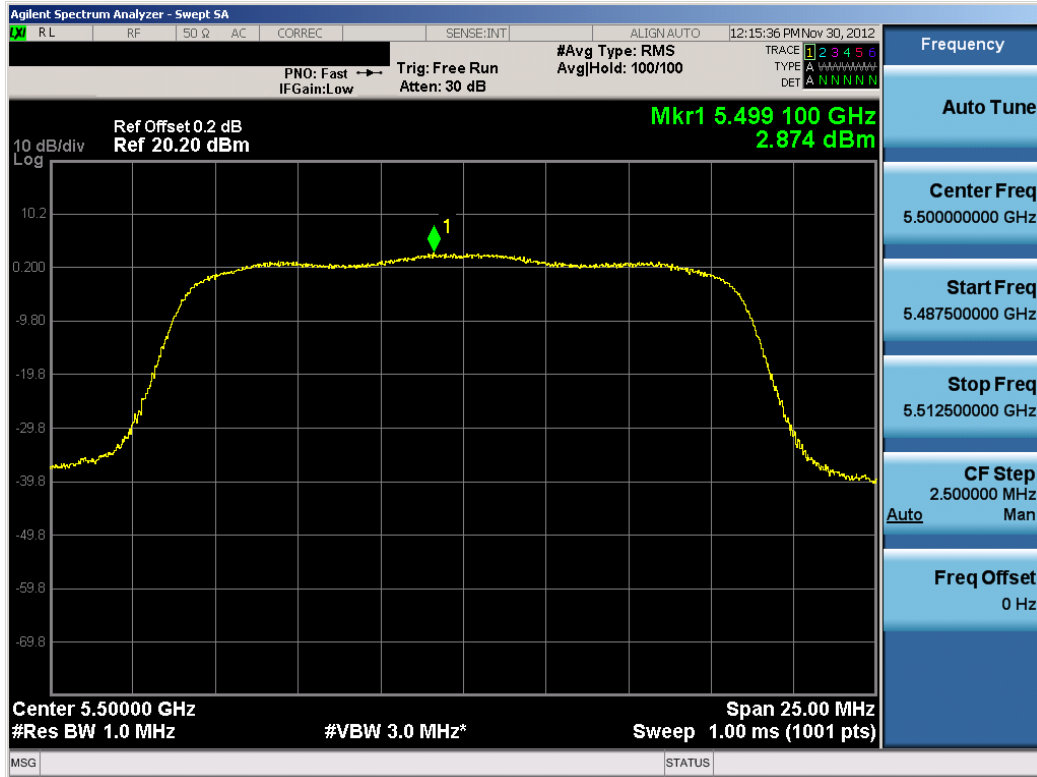

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 36 of 78

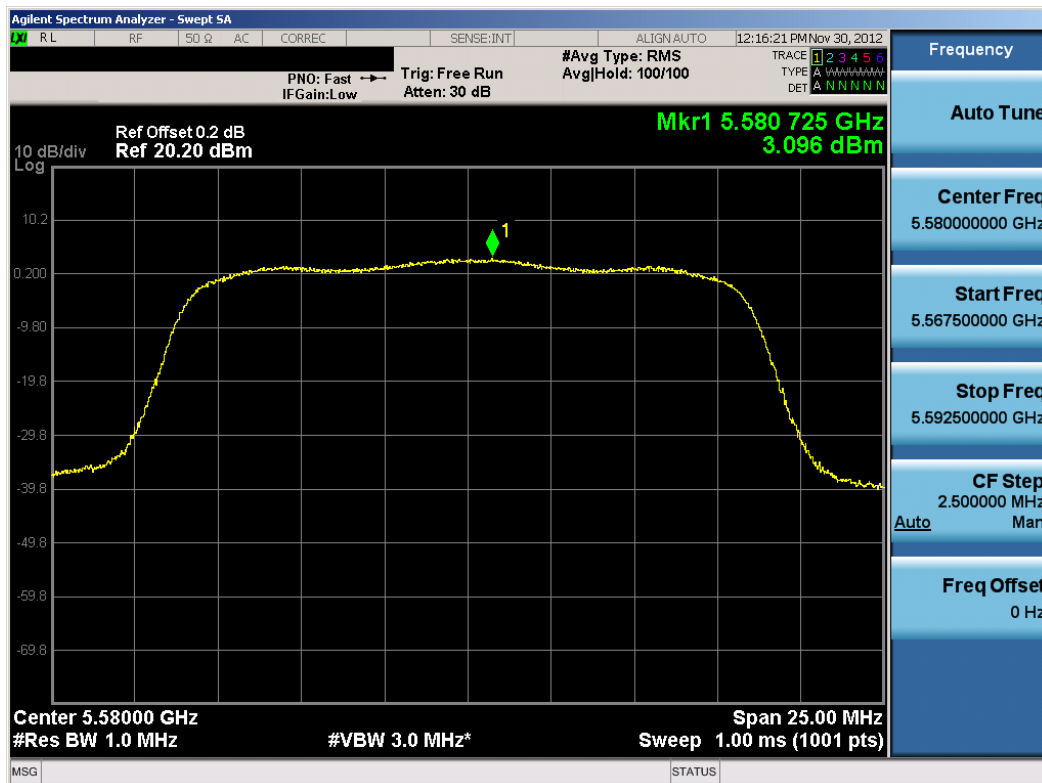


Plot 6-42. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)




Plot 6-43. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 37 of 78

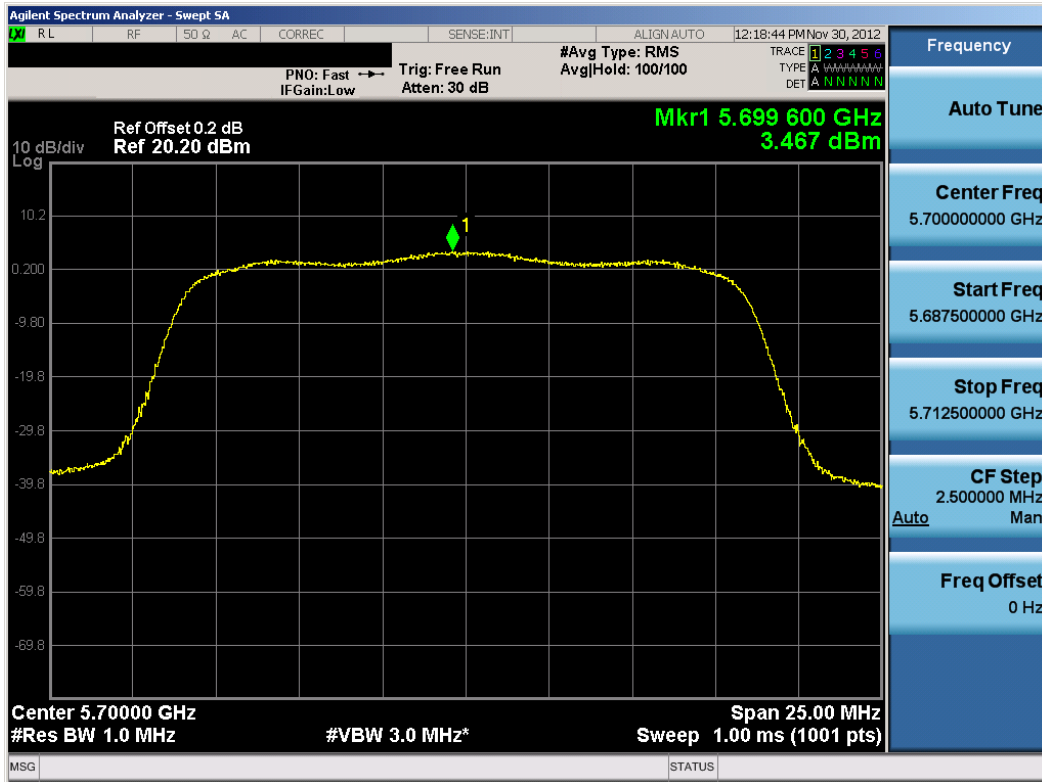


Plot 6-44. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)

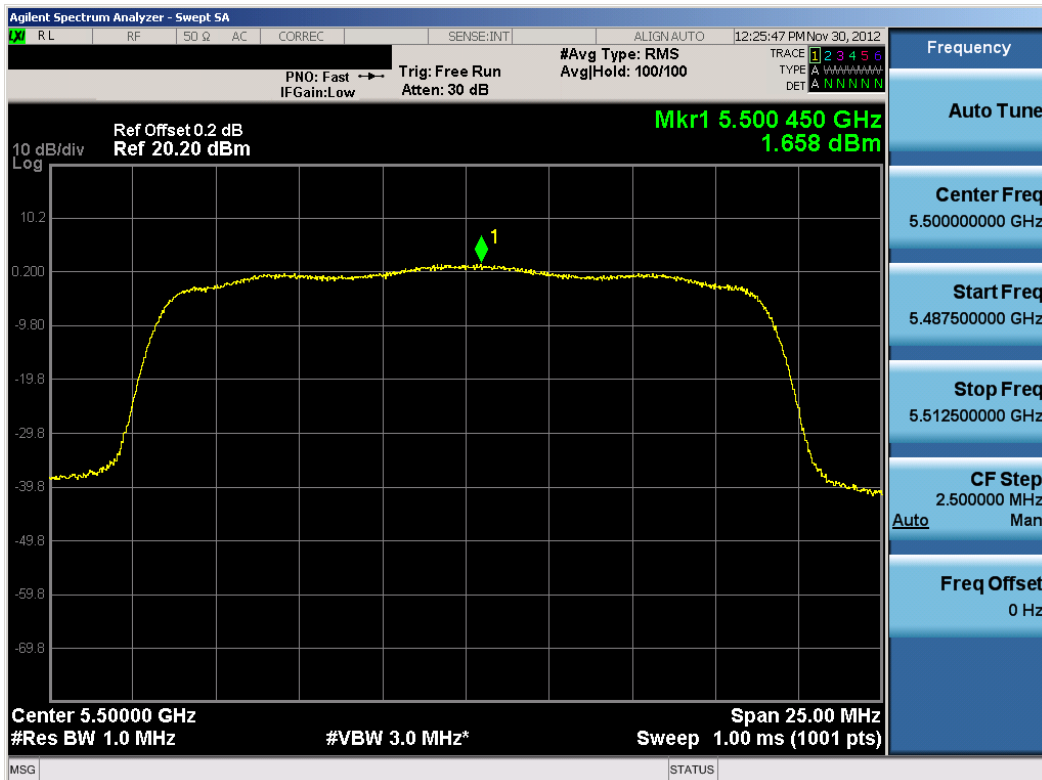


Plot 6-45. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 38 of 78

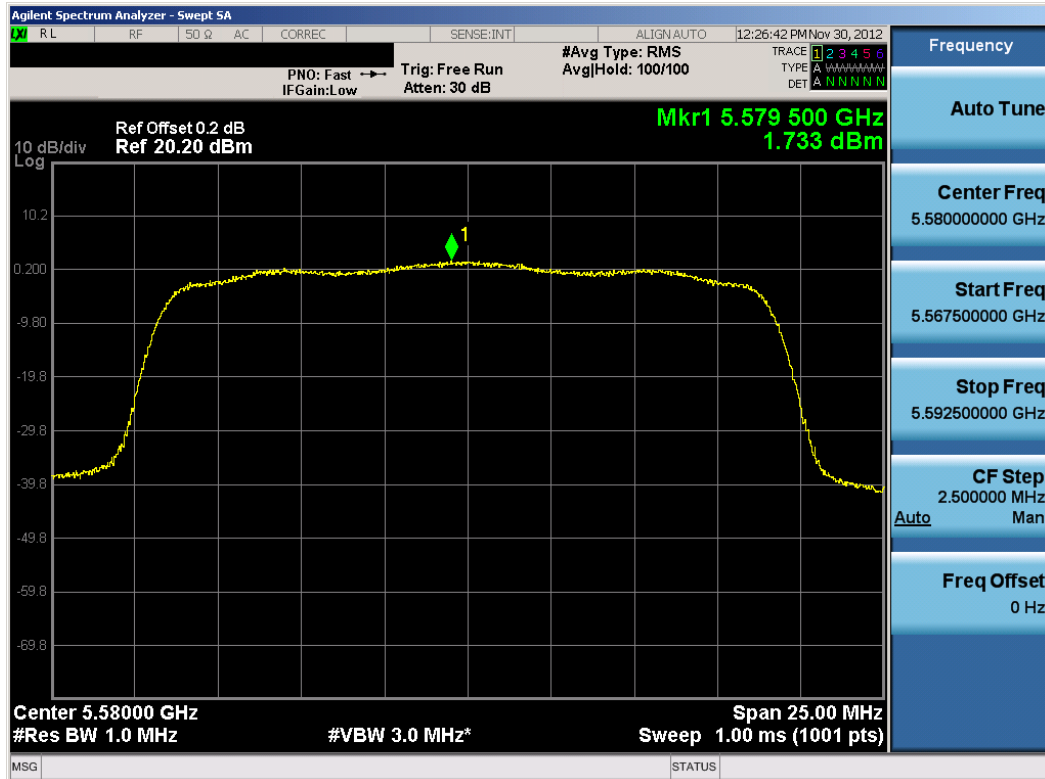


Plot 6-46. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

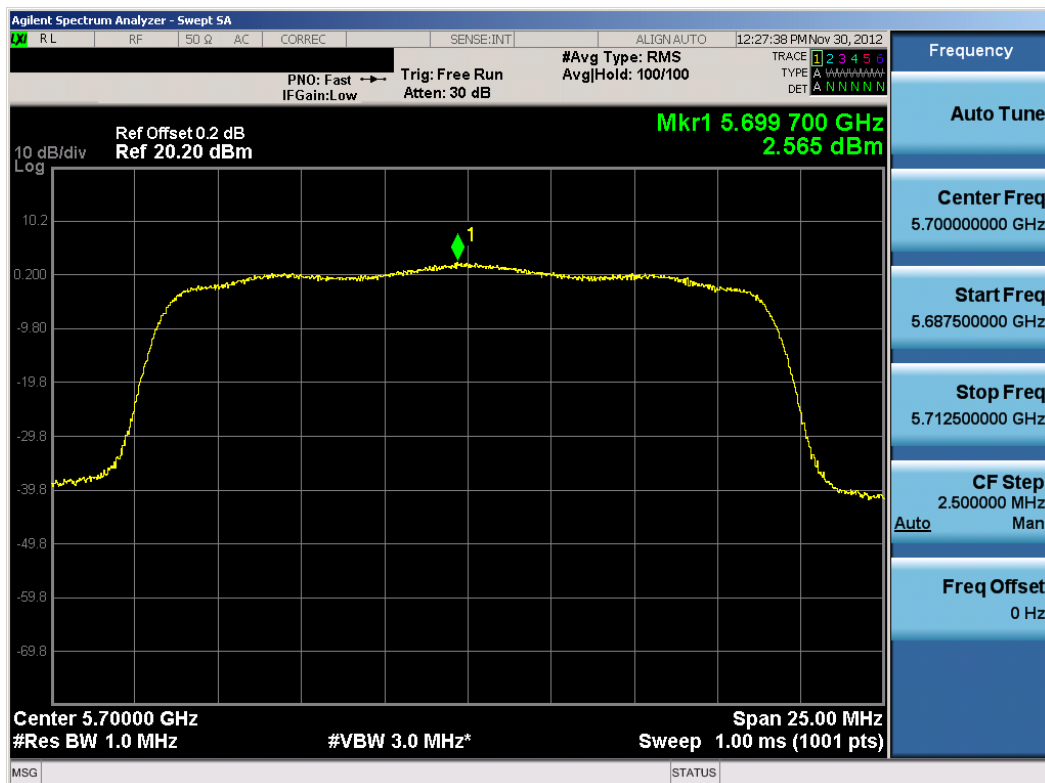


Plot 6-47. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 140)

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 39 of 78

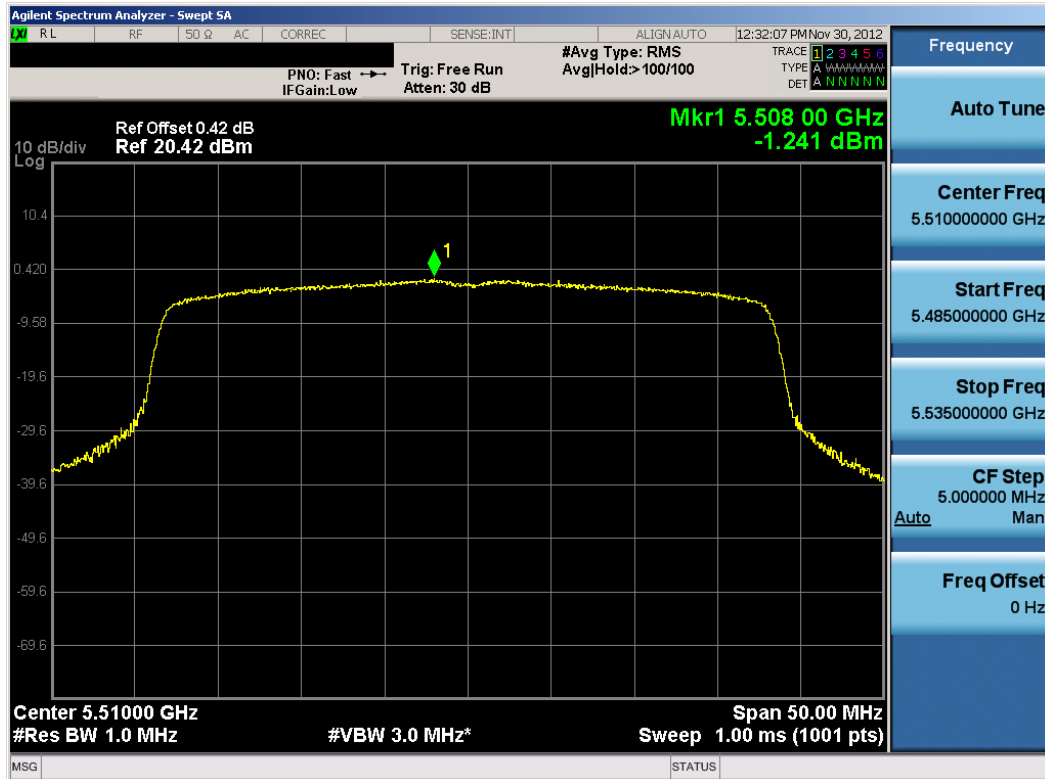


Plot 6-48. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)

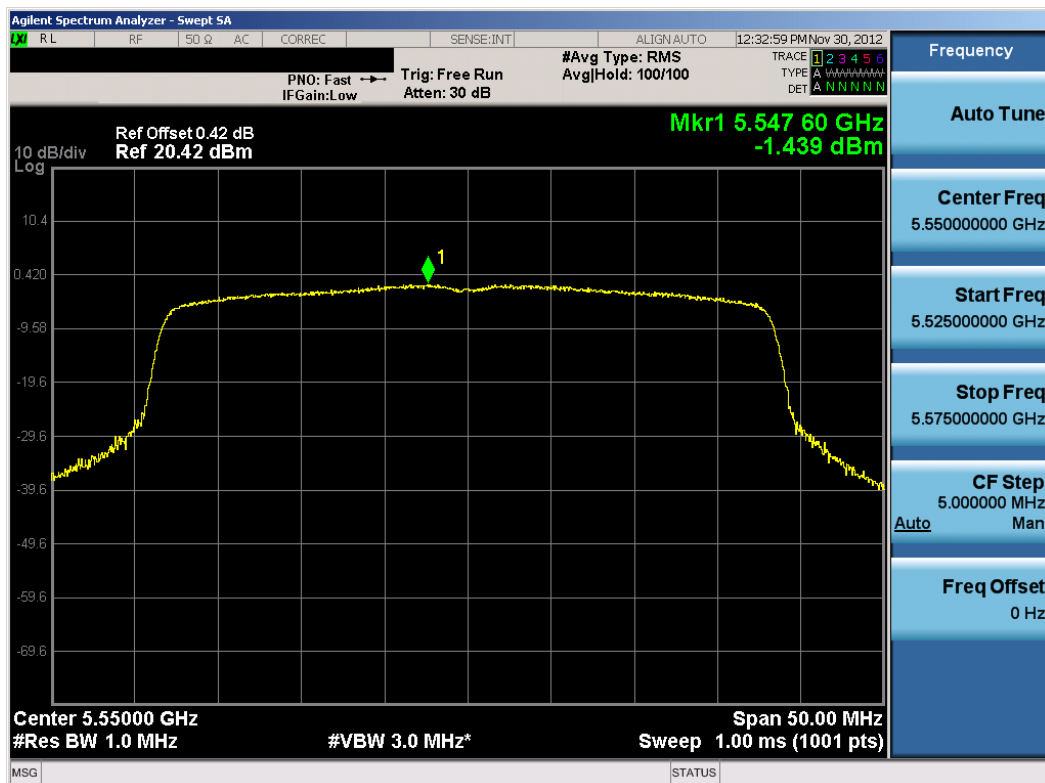



Plot 6-49. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

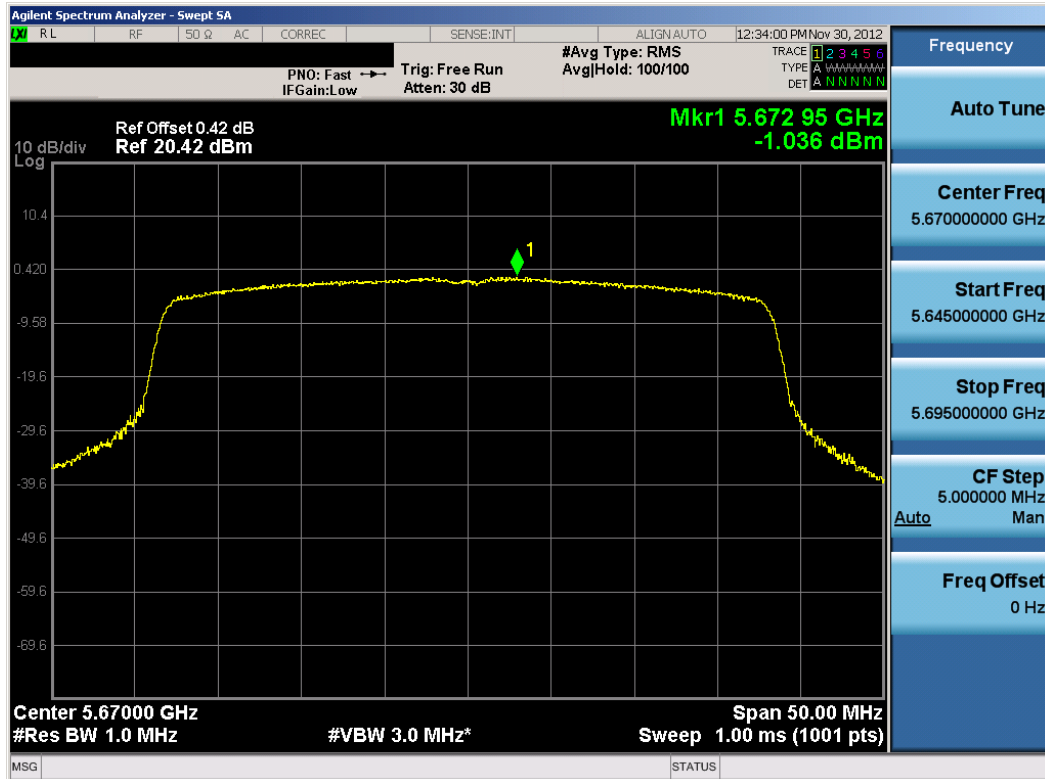FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 40 of 78



Plot 6-50. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 41 of 78	

6.5 Peak Excursion Ratio – 802.11a/n §15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies.

Due to software restrictions, the maximum achievable duty cycle was < 98%. Therefore Method SA-2 per KDB 789033 v01r02 was used to account for the non-continuous transmission.

Method SA-2, as defined in KDB 789 033 v01r02 and with the settings described in Section 6.4 of this test report, was used to generate the average signal trace and the procedure outlined in section F) was used to generate the peak signal trace. The maximum achievable duty cycle was found to be 95.4% for 20MHz bandwidth and 90.8% for 40MHz bandwidth. The measured power is offset by $10 * \log (1 / \text{duty cycle}) = 0.20$ and 0.42 dB for 20 and 40MHz bandwidth respectively. A minimum of 100 trace averages were used for the average signal. The peak and average traces are then used to determine the peak excursion. Each channel was investigated; worst case peak excursion ratios are shown below.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum conducted output power is 13 dBm/MHz.

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5180	36	a	6	9.04	13.0	-3.96
5200	40	n (20MHz)	6.5/7.2 (MCS0)	8.05	13.0	-4.95
5670	134	n (40MHz)	13.5/15 (MCS0)	8.38	13.0	-4.62

Table 6-7. Conducted Peak Excursion Ratio Measurements





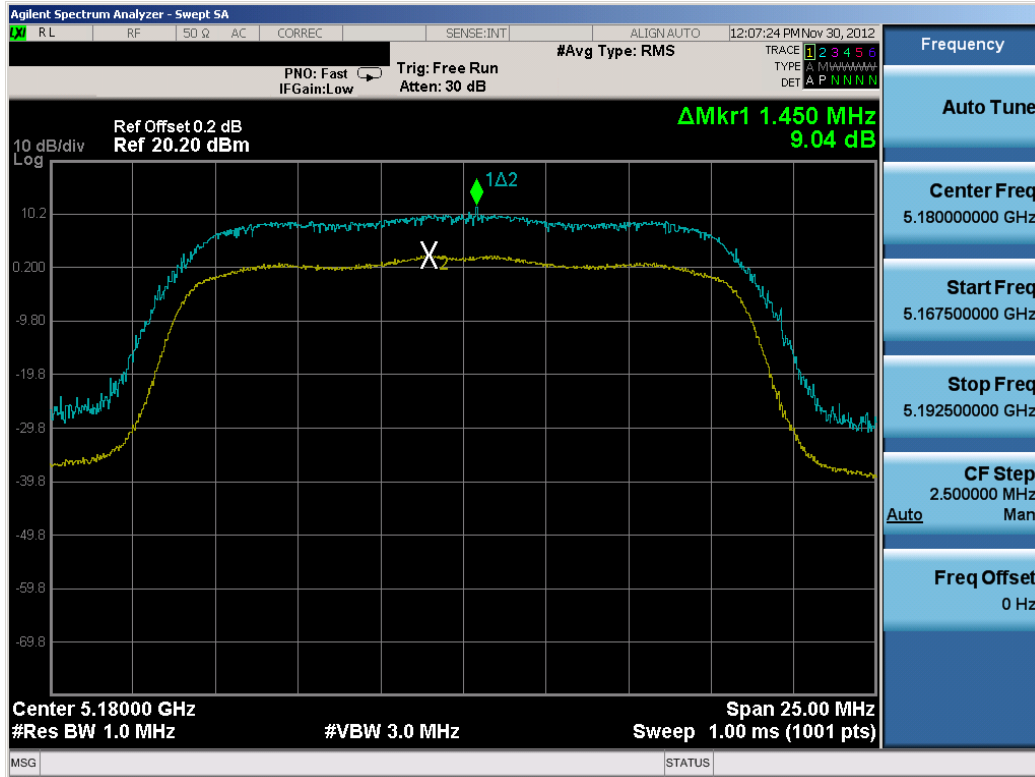


Figure 6-4. Test Instrument & Measurement Setup

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 42 of 78	

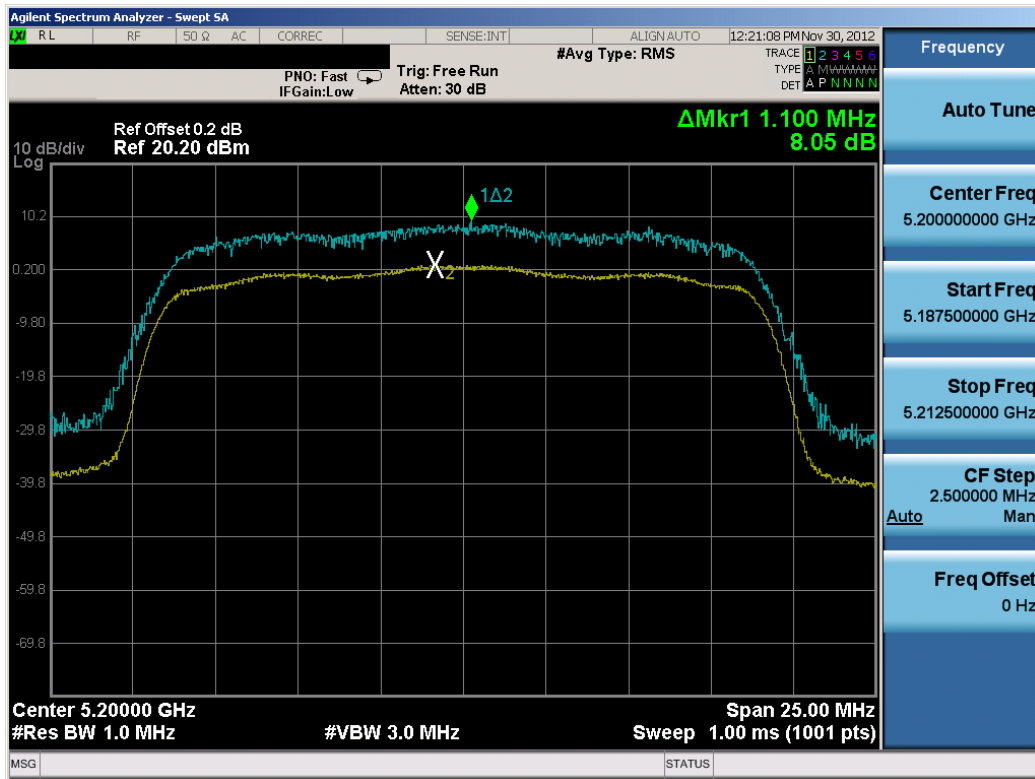


Plot 6-51. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 36)



Plot 6-52. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 43 of 78

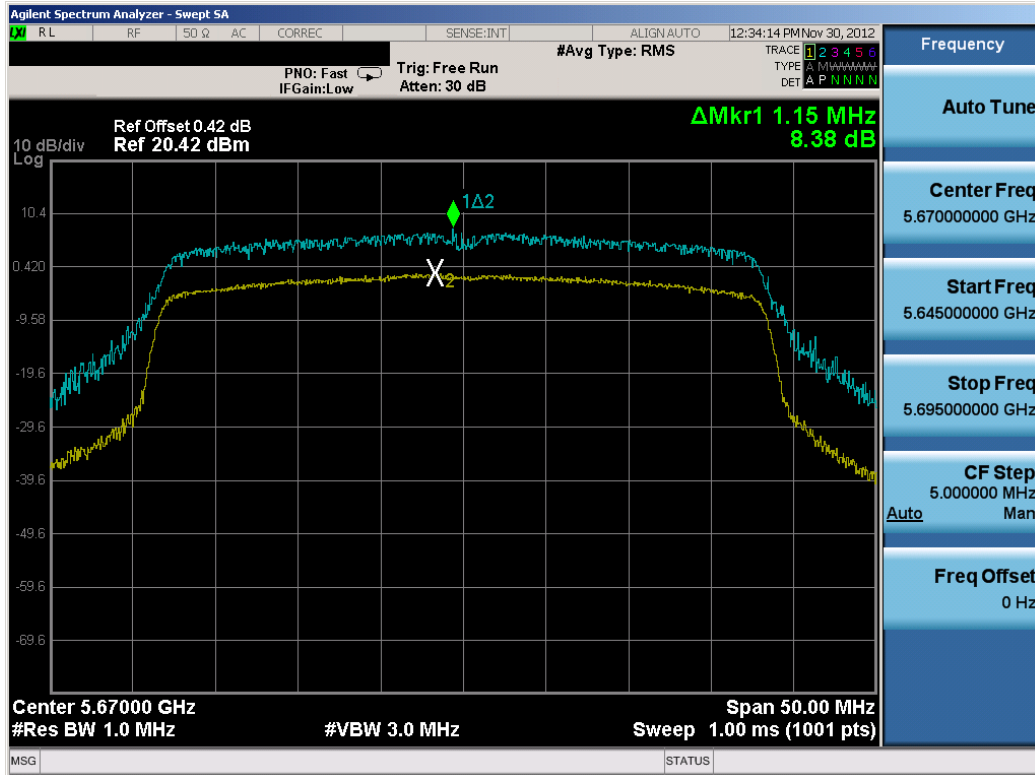

Plot 6-53. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 134)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 44 of 78

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.



OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,998	-2	-0.00000004
100 %		- 30	5,180,000,019	19	0.00000037
100 %		- 20	5,180,000,029	29	0.00000056
100 %		- 10	5,179,999,989	-11	-0.00000021
100 %		0	5,180,000,028	28	0.00000054
100 %		+ 10	5,180,000,033	33	0.00000064
100 %		+ 20	5,180,000,011	11	0.00000021
100 %		+ 30	5,180,000,028	28	0.00000054
100 %		+ 40	5,180,000,024	24	0.00000046
100 %		+ 50	5,180,000,035	35	0.00000068
115 %	4.37	+ 20	5,180,000,020	20	0.00000039
BATT. ENDPOINT	3.20	+ 20	5,179,999,986	-14	-0.00000027

Table 6-8. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 45 of 78	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.



OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,989	-11	-0.0000021
100 %		- 30	5,179,999,996	-4	-0.0000008
100 %		- 20	5,179,999,981	-19	-0.0000037
100 %		- 10	5,180,000,012	12	0.0000023
100 %		0	5,180,000,034	34	0.0000066
100 %		+ 10	5,180,000,003	3	0.0000006
100 %		+ 20	5,180,000,007	7	0.0000014
100 %		+ 30	5,179,999,997	-3	-0.0000006
100 %		+ 40	5,180,000,032	32	0.0000062
100 %		+ 50	5,180,000,021	21	0.0000041
115 %	4.37	+ 20	5,179,999,982	-18	-0.0000035
BATT. ENDPOINT	3.20	+ 20	5,180,000,029	29	0.0000056

Table 6-9. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 46 of 78	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.



OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,997	-3	-0.0000006
100 %		- 30	5,179,999,980	-20	-0.0000039
100 %		- 20	5,180,000,016	16	0.0000031
100 %		- 10	5,180,000,023	23	0.0000044
100 %		0	5,180,000,001	1	0.0000002
100 %		+ 10	5,180,000,017	17	0.0000033
100 %		+ 20	5,180,000,032	32	0.0000062
100 %		+ 30	5,179,999,988	-12	-0.0000023
100 %		+ 40	5,179,999,990	-10	-0.0000019
100 %		+ 50	5,180,000,034	34	0.0000066
115 %	4.37	+ 20	5,180,000,010	10	0.0000019
BATT. ENDPOINT	3.20	+ 20	5,180,000,006	6	0.0000012

Table 6-10. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 47 of 78	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

The EUT was tested from 9kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, peak measurements were taken using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 789033 and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-11 per Section 15.209.



All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. All measurements shown in this section were obtained using traditional radiated test methods as defined in C63.10-2009. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 789033 were not used to evaluate this device.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-11. Radiated Limits

Sample Calculation

- Field Strength Level [$\text{dB}\mu\text{V/m}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [$\text{dB}\mu\text{V/m}$] – Limit [$\text{dB}\mu\text{V/m}$]

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 48 of 78	

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
1 & 3
 Distance of Measurements: Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-99.27	Peak	H	45.89	0.00	53.63	68.20	-14.57
* 15540.00	-135.00	Average	H	58.35	0.00	30.35	53.98	-23.63
* 15540.00	-125.00	Peak	H	58.35	0.00	40.35	73.98	-33.63
* 20720.00	-103.78	Average	H	44.02	-9.54	37.70	53.98	-16.28
* 20720.00	-95.45	Peak	H	44.02	-9.54	46.03	73.98	-27.95
25900.00	-125.00	Peak	H	44.85	0.00	26.85	68.20	-41.35

Table 6-12. Radiated Measurements @ 1 & 3 meters

NOTES:

1. All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
3. For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
6. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
8. Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
9. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 49 of 78	

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10400.00	-99.87	Peak	H	45.98	0.00	53.11	68.20	-15.09
* 15600.00	-135.00	Average	H	58.64	0.00	30.64	53.98	-23.34
* 15600.00	-125.00	Peak	H	58.64	0.00	40.64	73.98	-33.34
* 20800.00	-105.52	Average	H	44.00	-9.54	35.93	53.98	-18.05
* 20800.00	-98.03	Peak	H	44.00	-9.54	43.42	73.98	-30.56
26000.00	-125.00	Peak	H	44.88	0.00	26.88	68.20	-41.32

Table 6-13. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 50 of 78	

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5240MHz



Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10480.00	-100.26	Peak	H	46.14	0.00	52.88	68.20	-15.32
* 15720.00	-135.00	Average	H	59.21	0.00	31.21	53.98	-22.77
* 15720.00	-125.00	Peak	H	59.21	0.00	41.21	73.98	-32.77
* 20960.00	-105.13	Average	H	43.99	-9.54	36.32	53.98	-17.66
* 20960.00	-99.74	Peak	H	43.99	-9.54	41.71	73.98	-32.27
26200.00	-125.00	Peak	H	44.82	0.00	26.82	68.20	-41.38

Table 6-14. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 51 of 78

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5260MHz



Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10520.00	-99.27	Peak	H	46.23	0.00	53.95	68.20	-14.25
* 15780.00	-135.00	Average	H	59.53	0.00	31.53	53.98	-22.45
* 15780.00	-125.00	Peak	H	59.53	0.00	41.53	73.98	-32.45
* 21040.00	-105.84	Average	H	44.01	-9.54	35.63	53.98	-18.35
* 21040.00	-100.25	Peak	H	44.01	-9.54	41.22	73.98	-32.76
26300.00	-125.00	Peak	H	44.87	0.00	26.87	68.20	-41.33

Table 6-15. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 52 of 78

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5280MHz



Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10560.00	-100.27	Peak	H	46.32	0.00	53.06	68.20	-15.14
* 15840.00	-135.00	Average	H	59.88	0.00	31.88	53.98	-22.09
* 15840.00	-125.00	Peak	H	59.88	0.00	41.88	73.98	-32.09
* 21120.00	-105.39	Average	H	44.00	-9.54	36.07	53.98	-17.91
* 21120.00	-99.33	Peak	H	44.00	-9.54	42.13	73.98	-31.85
26400.00	-125.00	Peak	H	44.81	0.00	26.81	68.20	-41.39

Table 6-16. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 53 of 78

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5320MHz



Channel: 64

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
*	10640.00	-112.02	Average	H	46.52	0.00	41.49	53.98	-12.48
*	10640.00	-100.22	Peak	H	46.52	0.00	53.29	73.98	-20.68
*	15960.00	-135.00	Average	H	62.27	0.00	34.27	53.98	-19.71
*	15960.00	-125.00	Peak	H	62.27	0.00	44.27	73.98	-29.71
*	21280.00	-106.09	Average	H	44.02	-9.54	35.39	53.98	-18.59
*	21280.00	-100.84	Peak	H	44.02	-9.54	40.64	73.98	-33.34
	26600.00	-125.00	Peak	H	44.70	0.00	26.70	68.20	-41.50

Table 6-17. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 54 of 78

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5500MHz



Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
*	11000.00	-110.25	Average	H	46.98	0.00	43.73	53.98	-10.25
*	11000.00	-99.49	Peak	H	46.98	0.00	54.49	73.98	-19.49
	16500.00	-125.00	Peak	H	60.10	0.00	42.10	68.20	-26.10
	22000.00	-97.24	Peak	H	44.30	-9.54	44.52	68.20	-23.68
	27500.00	-125.00	Peak	H	44.10	0.00	26.10	68.20	-42.10

Table 6-18. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 55 of 78

Radiated Spurious Emission Measurements (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-110.16	Average	H	49.42	0.00	46.27	53.98	-7.71
*	11160.00	-99.32	Peak	H	49.42	0.00	57.11	73.98	-16.87
	16740.00	-125.00	Peak	H	58.53	0.00	40.53	68.20	-27.67
*	22320.00	-101.85	Average	H	44.40	-9.54	40.01	53.98	-13.97
*	22320.00	-97.81	Peak	H	44.40	-9.54	44.05	73.98	-29.93
	27900.00	-125.00	Peak	H	43.94	0.00	25.94	68.20	-42.26

Table 6-19. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 56 of 78

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 1 & 3 Meters

Operating Frequency: 5700MHz



Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
*	11400.00	-111.48	Average	H	47.61	0.00	43.13	53.98	-10.85
*	11400.00	-99.72	Peak	H	47.61	0.00	54.89	73.98	-19.09
	17100.00	-125.00	Peak	H	56.08	0.00	38.08	68.20	-30.12
*	22800.00	-102.20	Average	H	44.45	-9.54	39.71	53.98	-14.27
*	22800.00	-95.99	Peak	H	44.45	-9.54	45.92	73.98	-28.06
	28500.00	-125.00	Peak	H	43.63	0.00	25.63	68.20	-42.57

Table 6-20. Radiated Measurements @ 1 & 3 meters

NOTES:

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
- All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-11.
- For frequencies above 1GHz, peak emissions are measured using RBW = 1MHz and VBW = 3MHz. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation ("Method AD") per KDB 789033.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. Emissions whose levels were not within 20dB of the respective limits were not reported. Worst case setup was with the standard battery cover.
- Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
- Emissions below 18GHz were measured at a 3 meter test distance and emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- Above 960MHz the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: ZNFVS870	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 57 of 78

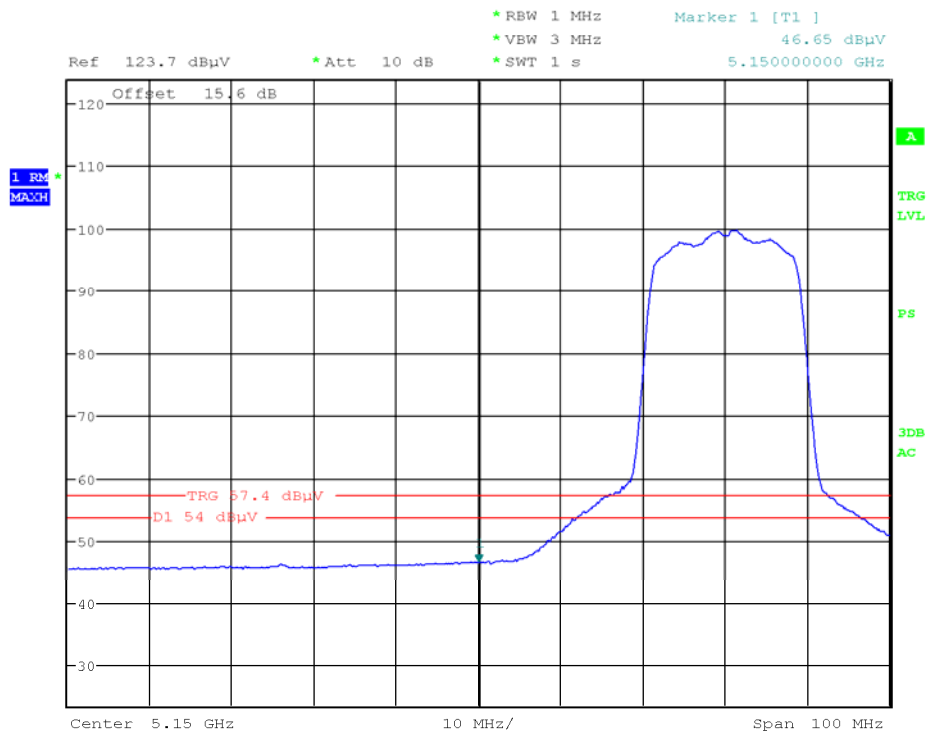
6.8 Radiated Band Edge Measurements (20MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 15.6 \text{ dB}$$

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36




Date: 3.DEC.2012 16:33:49

Plot 6-54. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 58 of 78

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

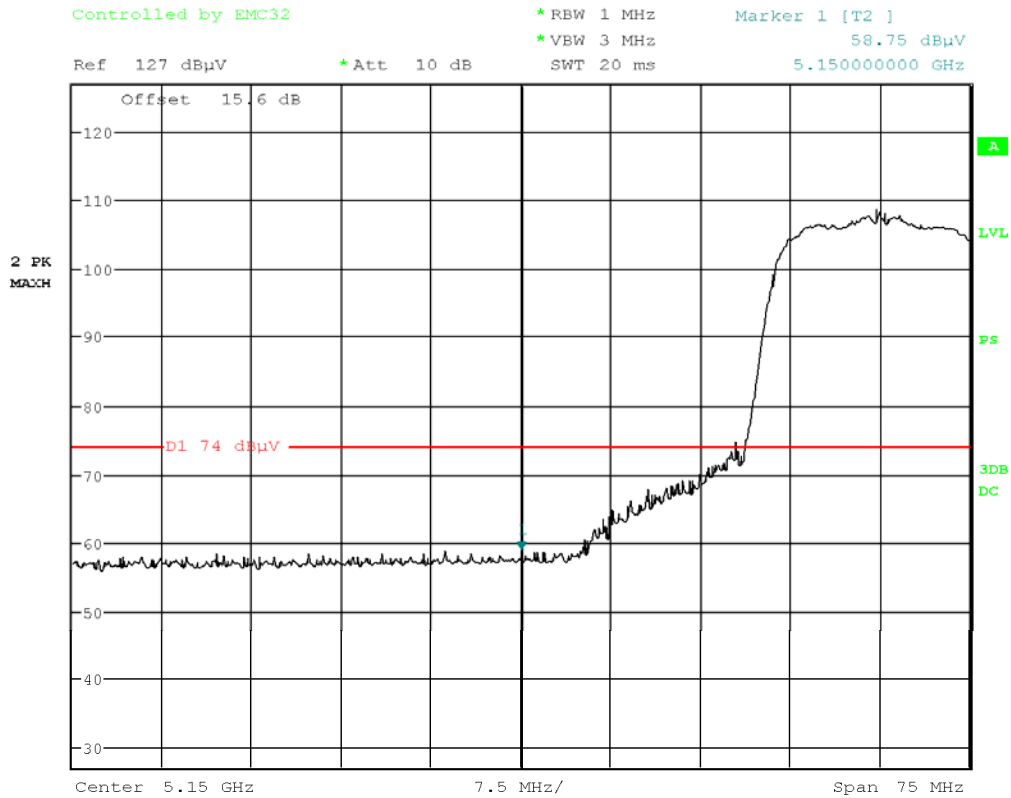§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 28.NOV.2012 17:33:52

Plot 6-55. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.


FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 59 of 78

Radiated Band Edge Measurements (20MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.1 \text{ dB}$$

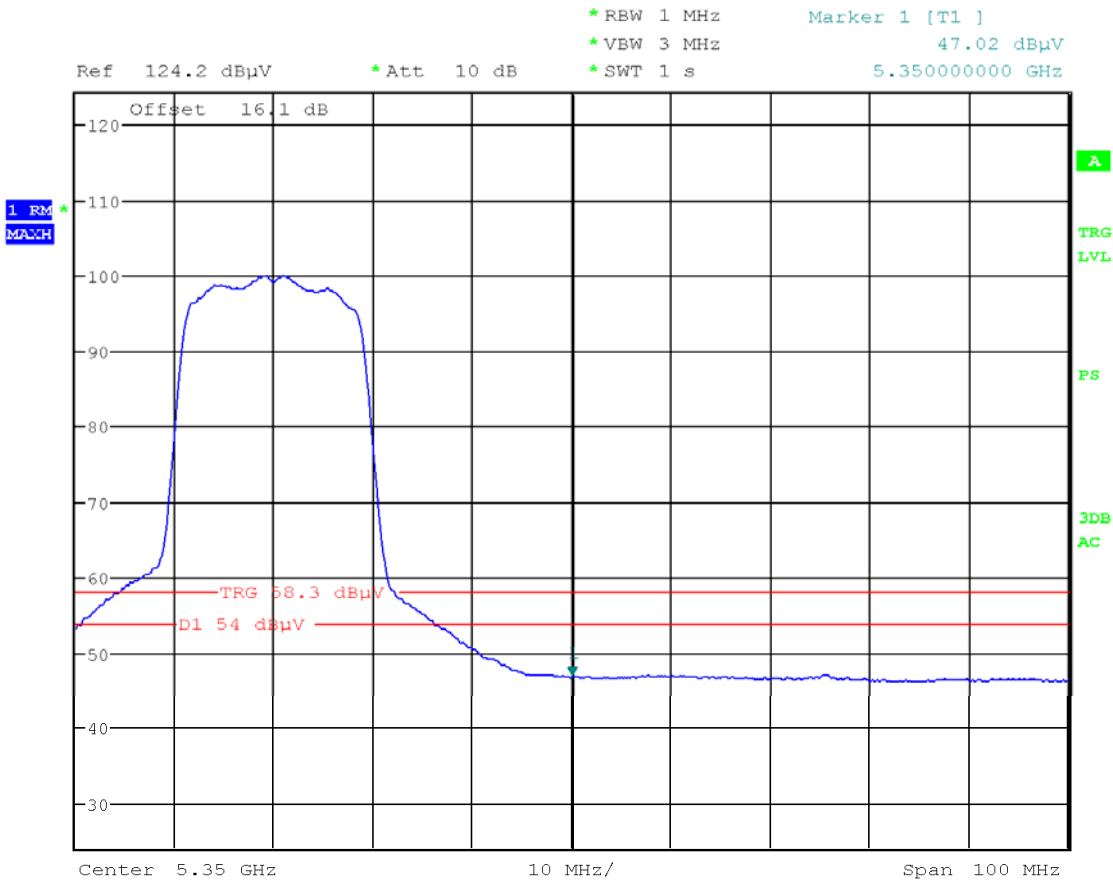Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64




Date: 3.DEC.2012 16:37:05

Plot 6-56. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 60 of 78

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

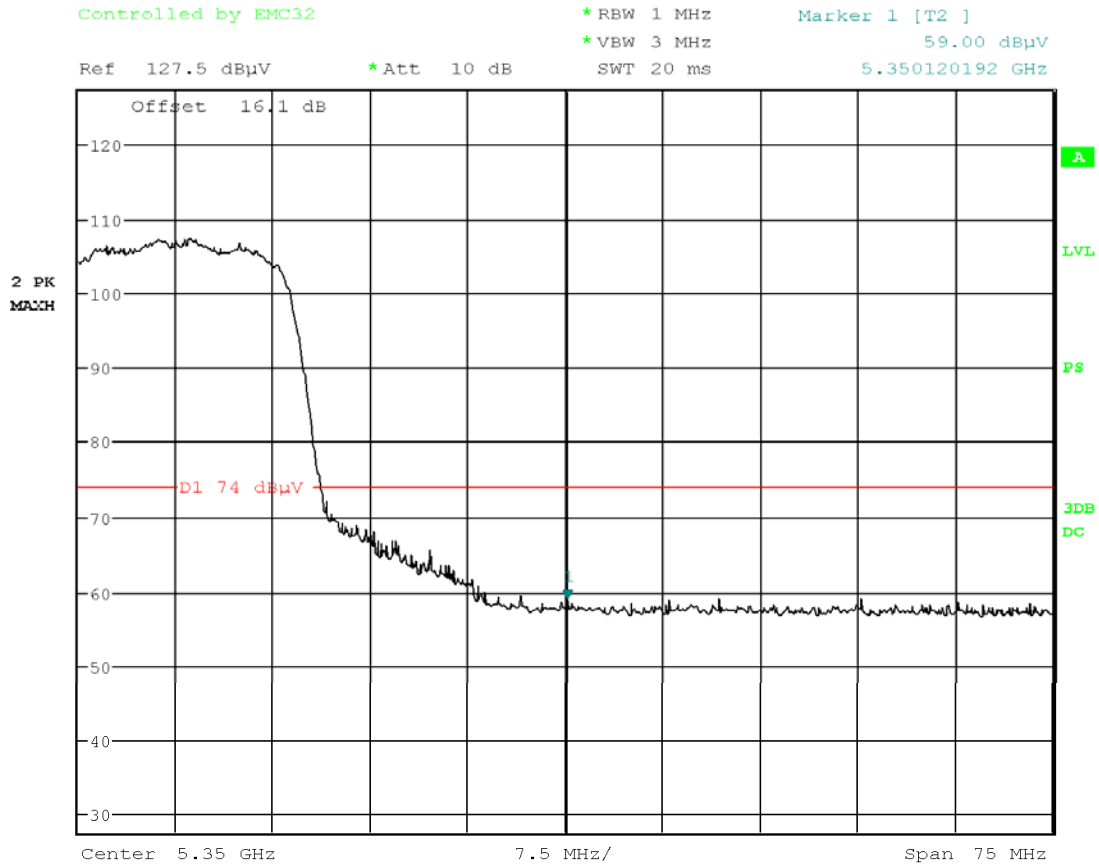§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 28.NOV.2012 17:41:04

Plot 6-57. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 61 of 78	

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.2 \text{ dB}$$

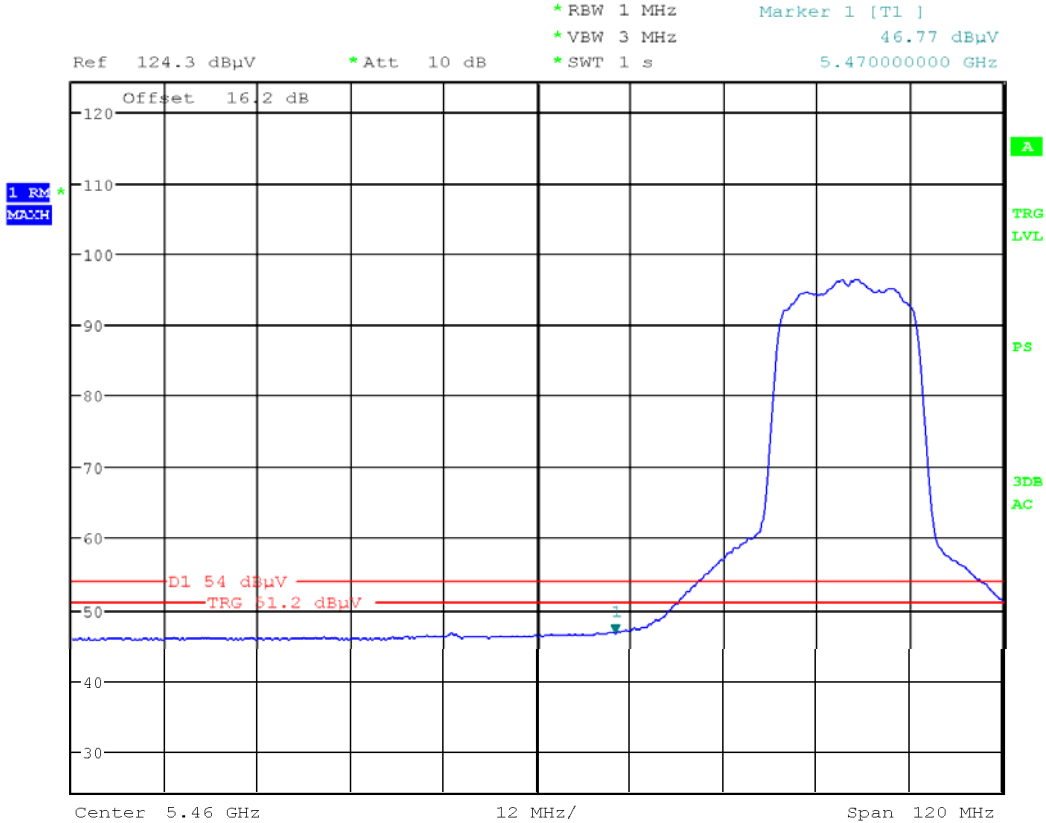
Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100




Date: 3.DEC.2012 16:41:53

Plot 6-58. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 62 of 78

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

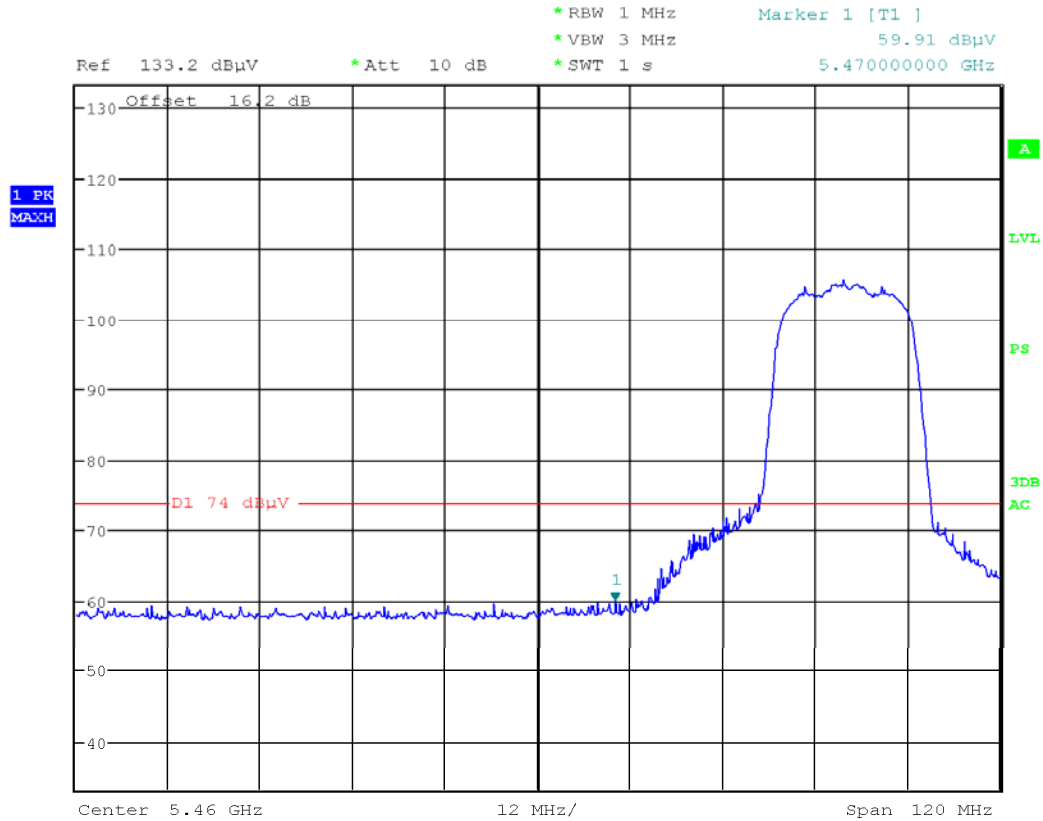§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 3.DEC.2012 16:55:36

Plot 6-59. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 63 of 78

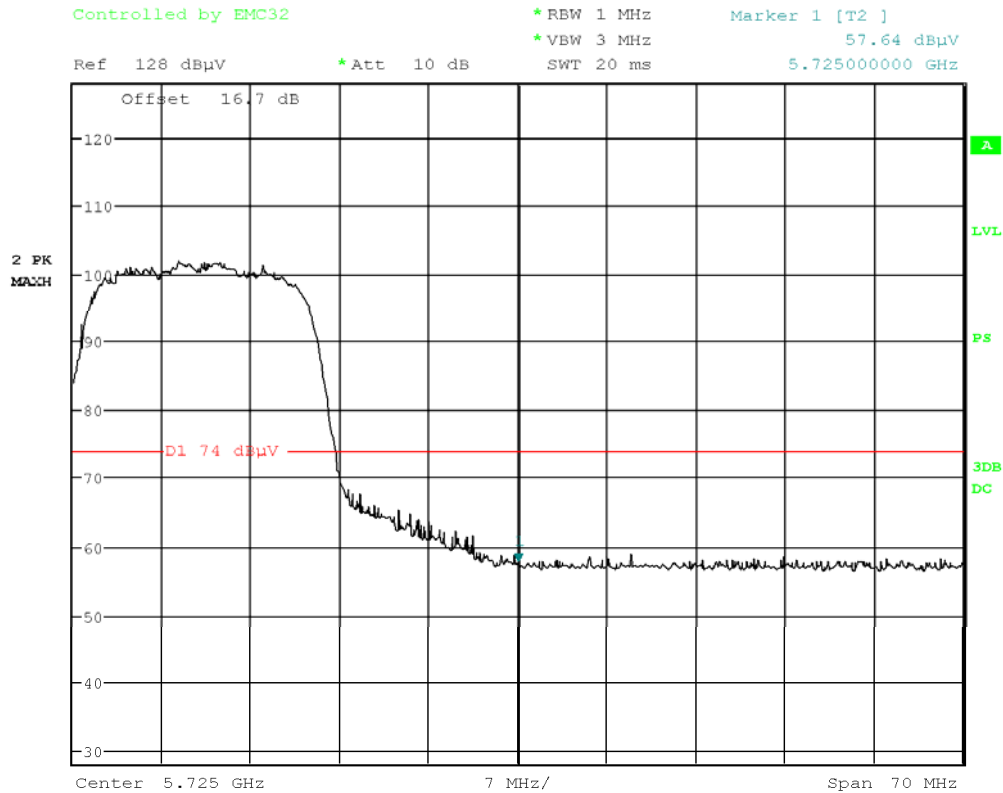
Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plot was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.7 \text{ dB}$$

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140



Date: 28.NOV.2012 18:17:14

Plot 6-60. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

NOTES:

1. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 64 of 78

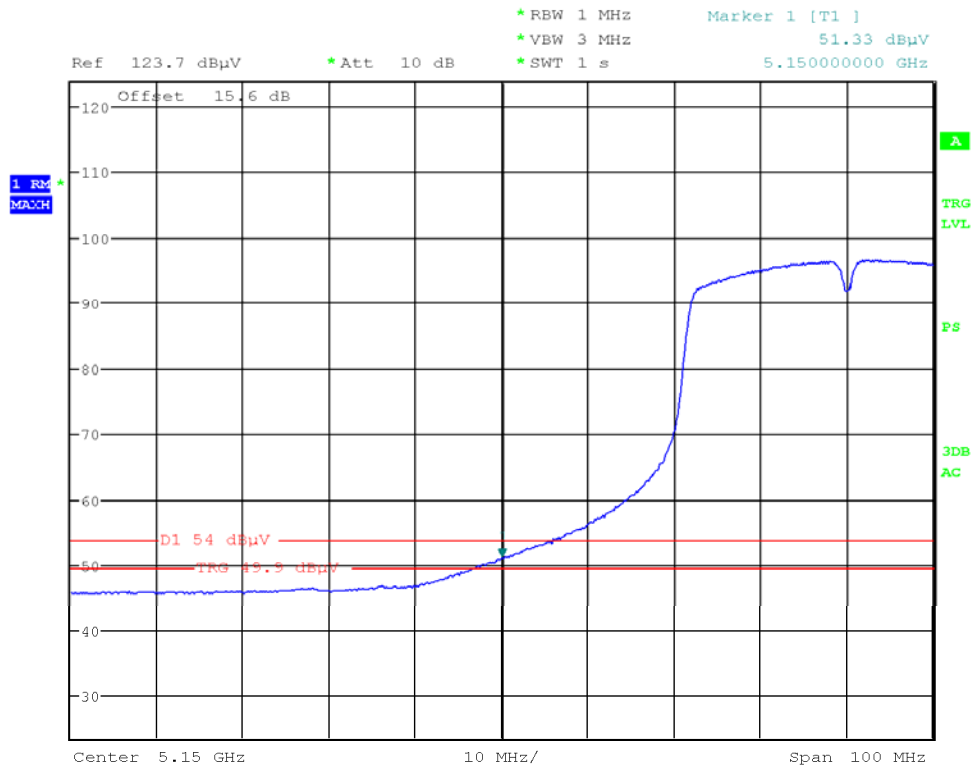
6.9 Radiated Band Edge Measurements (40MHz BW) §15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 15.6 \text{ dB}$$

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38




Date: 3.DEC.2012 16:45:04

Plot 6-61. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 65 of 78

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

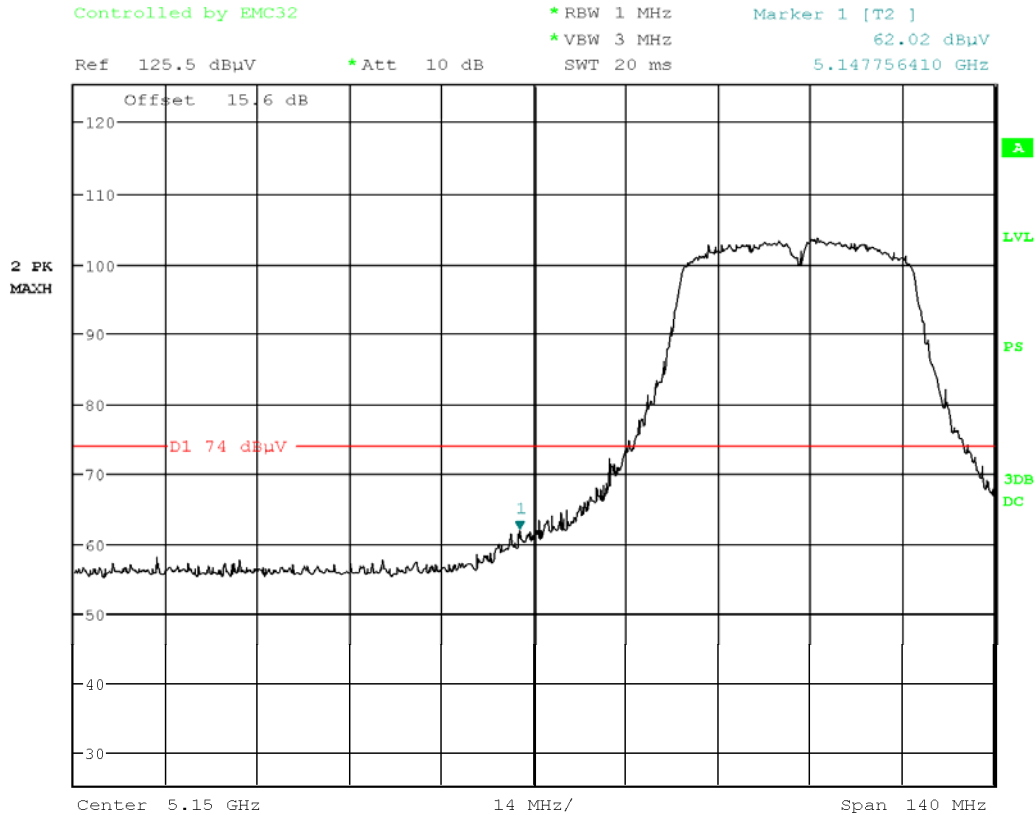§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 28.NOV.2012 19:13:53

Plot 6-62. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.


FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 66 of 78	

Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.1 \text{ dB}$$

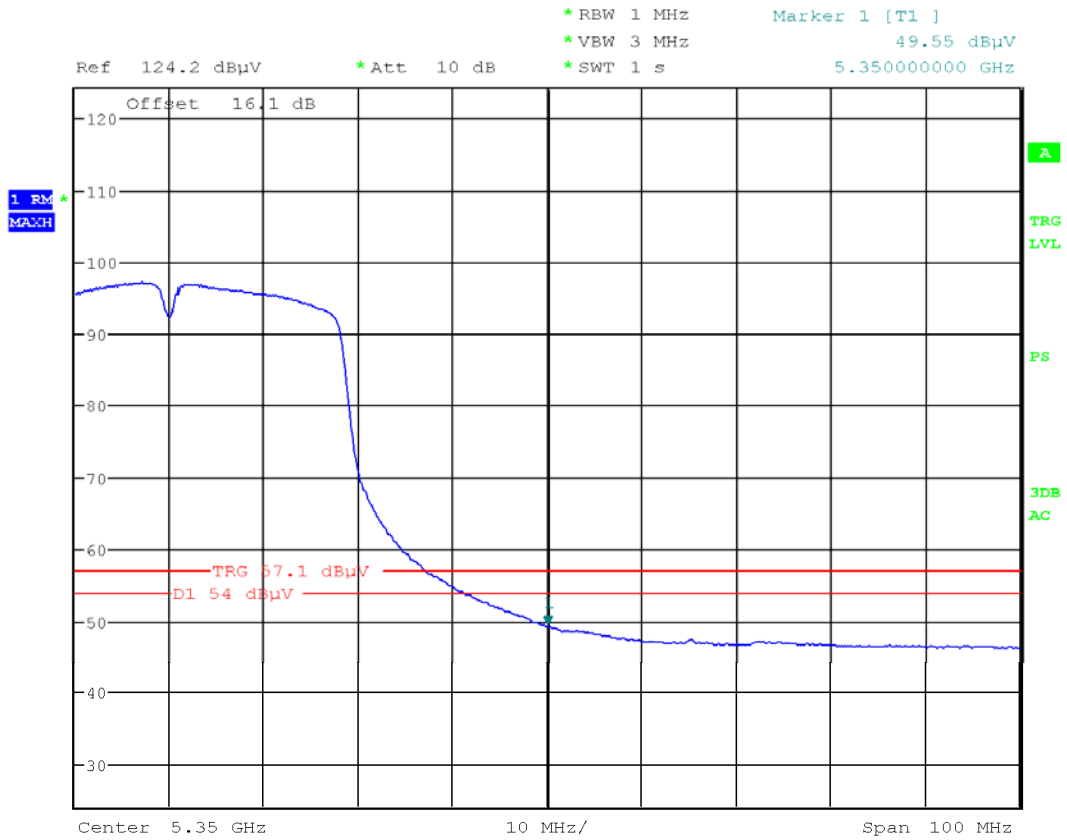Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62




Date: 3.DEC.2012 16:48:00

Plot 6-63. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 67 of 78

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

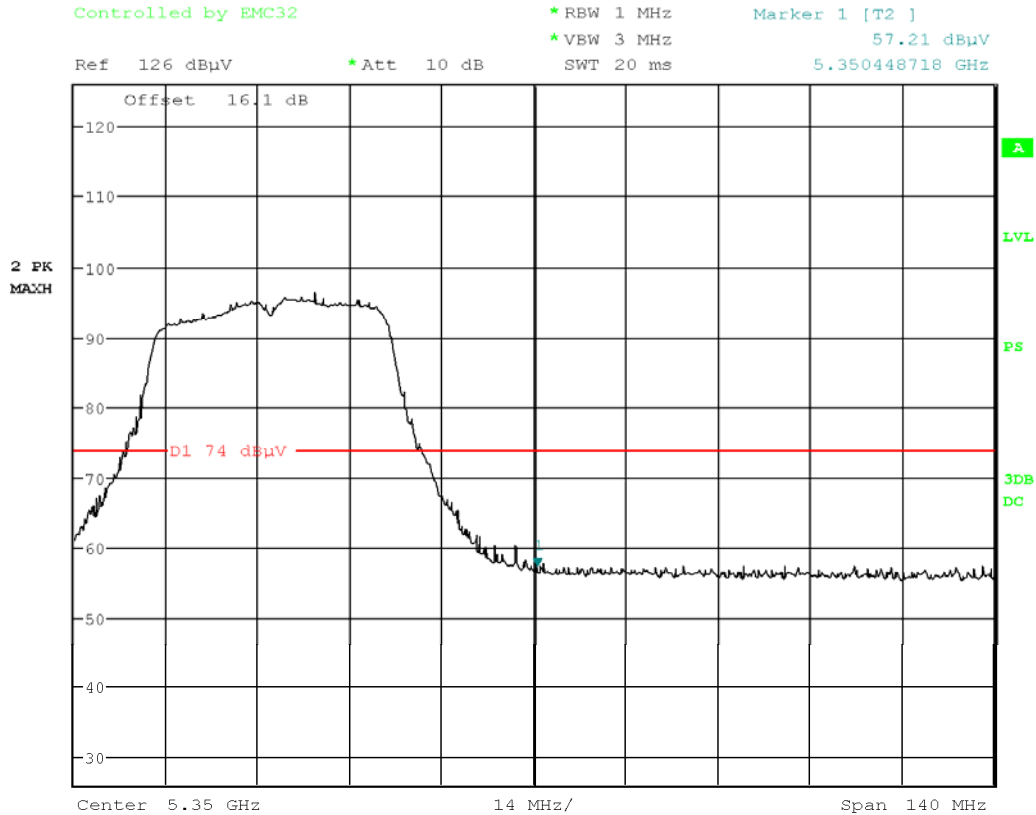§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 28.NOV.2012 19:07:51

Plot 6-64. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.


FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 68 of 78

Radiated Band Edge Measurements (40MHz BW) (Cont'd)
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.2 \text{ dB}$$

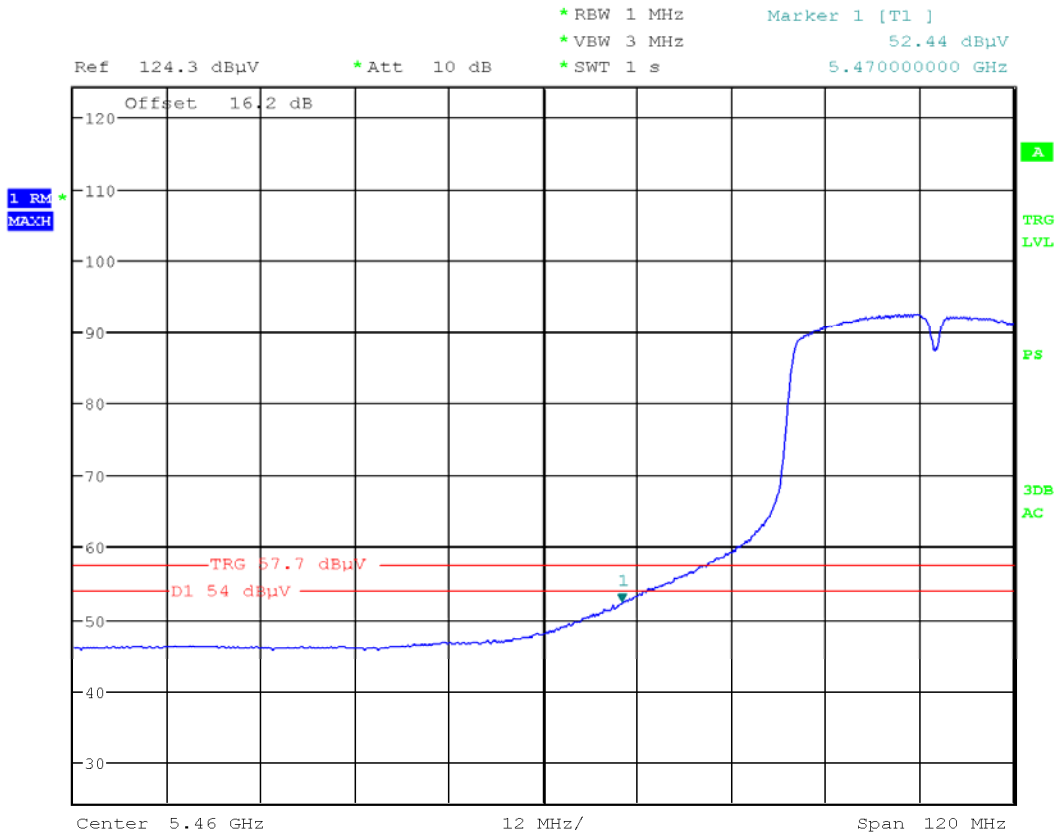Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102




Date: 3.DEC.2012 16:50:49

Plot 6-65. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 3)

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 69 of 78

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

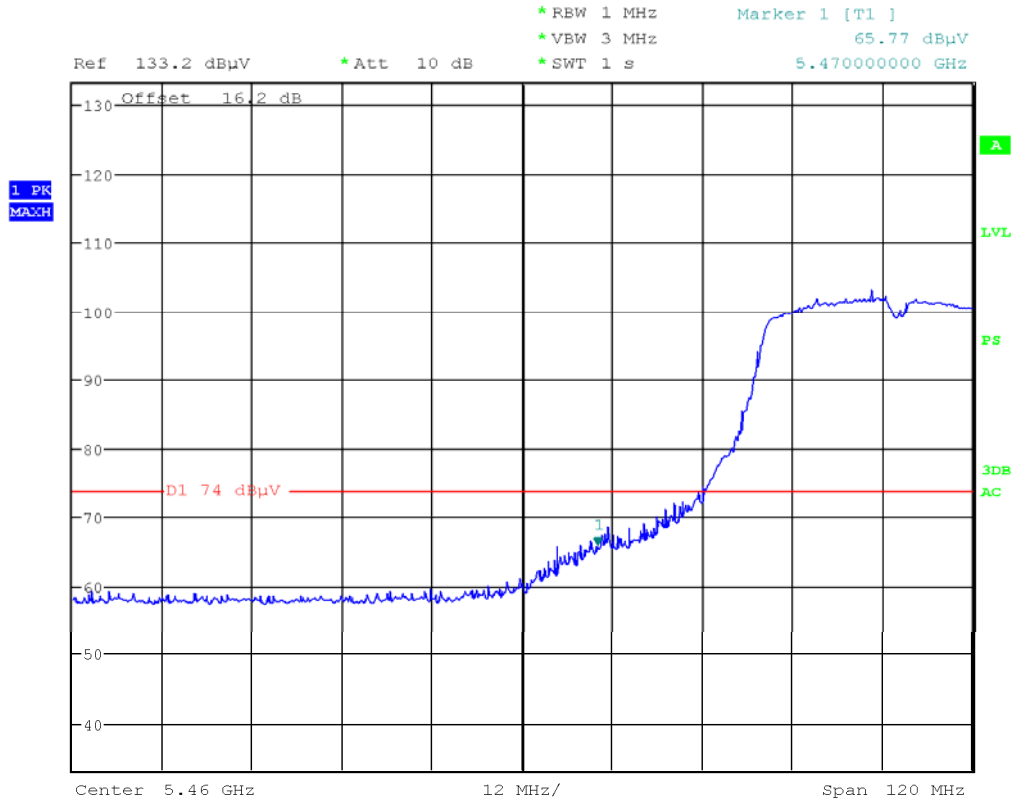§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Date: 3.DEC.2012 16:53:20

Plot 6-66. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 3)

NOTES:

1. Average emissions are measured using RBW = 1MHz, VBW = 3MHz, RMS detector, and 105 trace averages under continuous operation (“Method AD”) per KDB 7890 33. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The highest attainable duty cycle due to software restrictions was found to be < 98%. A video trigger was implemented on average measurements to ensure that data was collected only during periods when the EUT is transmitting at its maximum power control level.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 70 of 78

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

The amplitude offset shown in the following plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain} = 16.7 \text{ dB}$$

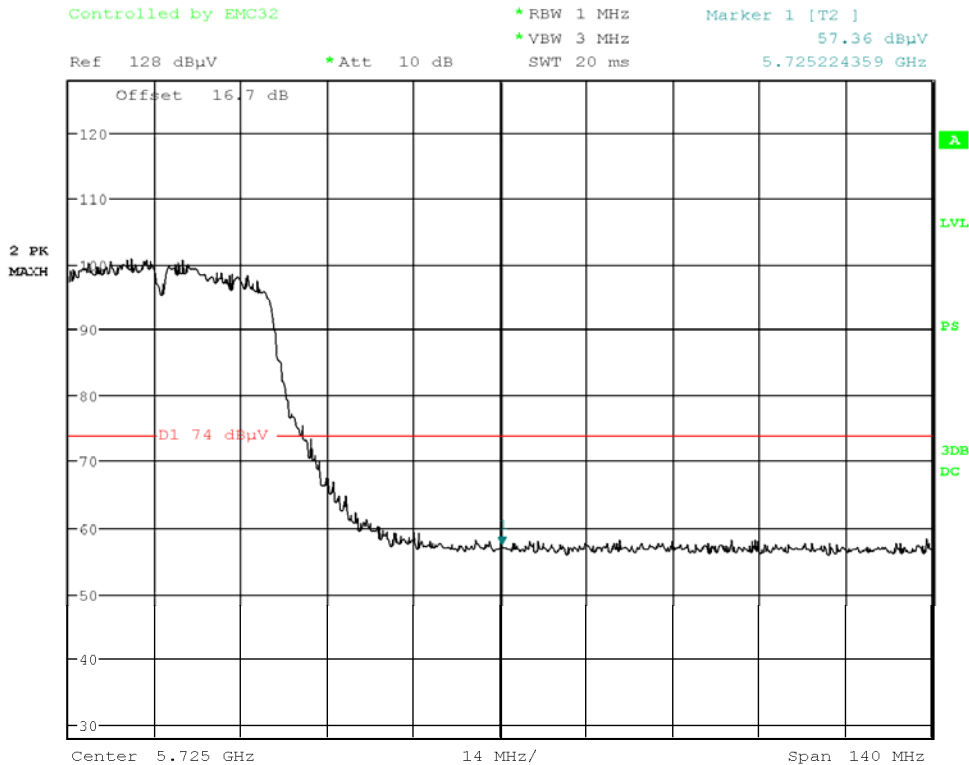
Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134



Date: 28.NOV.2012 18:38:04

Plot 6-67. Radiated Upper Band Edge Plot (Peak – UNII Band 3)


NOTES:

1. Peak emissions are measured using RBW = 1MHz and VBW = 3MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes. Worst case setup was with the standard battery cover.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 71 of 78

6.10 Line-Conducted Test Data

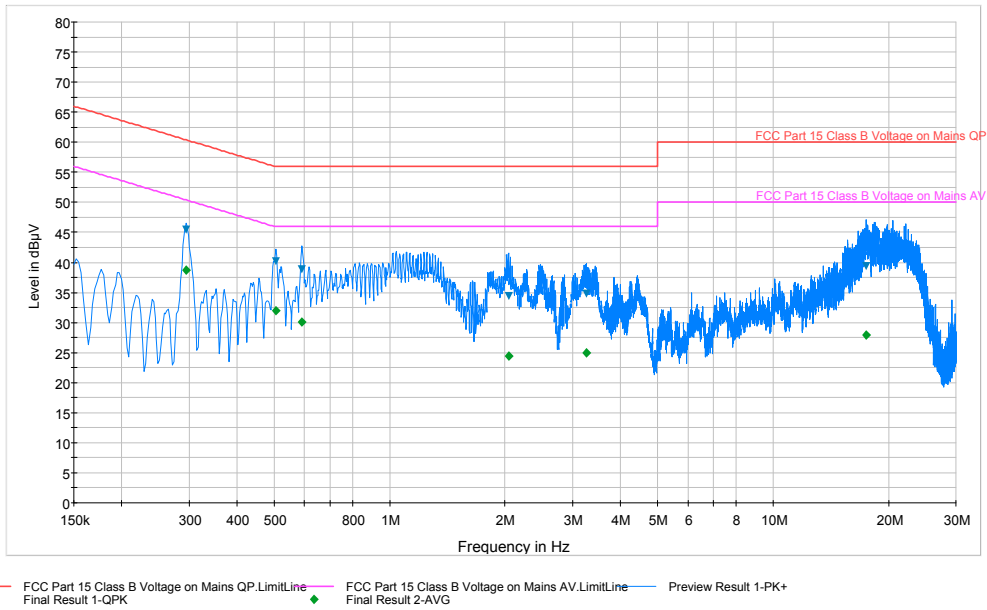§15.207; RSS-Gen [7.2.2]



Plot 6-68. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	45.50	60.40	14.90	38.80	50.40	11.60
0.506	L1	0.1	40.20	56.00	15.80	32.00	46.00	14.00
0.591	L1	0.1	38.80	56.00	17.20	30.10	46.00	15.90
2.042	L1	0.2	34.40	56.00	21.60	24.40	46.00	21.60
3.260	L1	0.2	34.80	56.00	21.20	24.90	46.00	21.10
17.527	L1	0.6	39.40	60.00	20.60	27.90	50.00	22.10

Table 6-21. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 72 of 78

Line-Conducted Test Data (Cont'd)

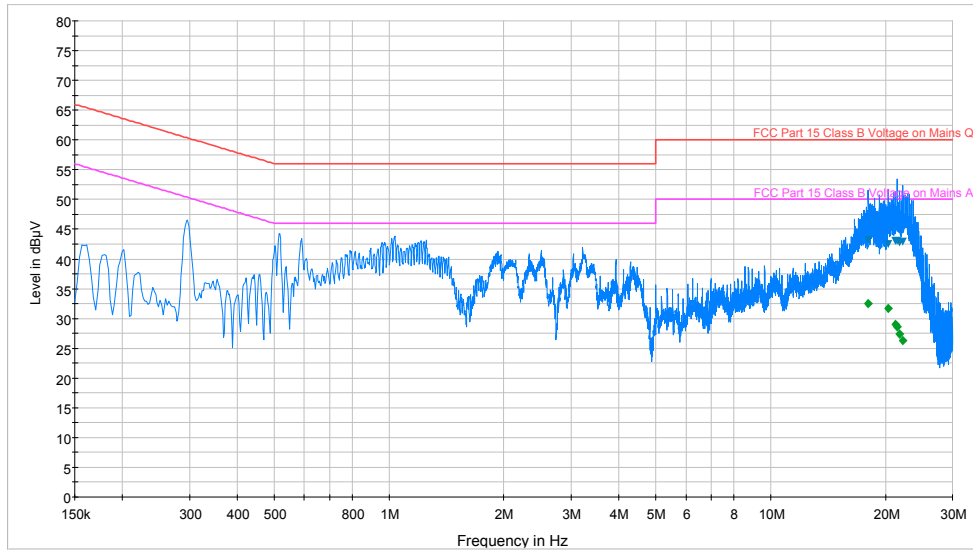§15.207; RSS-Gen [7.2.2]



— FCC Part 15 Class B Voltage on Mains QP.LimitLine — FCC Part 15 Class B Voltage on Mains AV.LimitLine — Preview Result 1-PK+
▼ Final Result 1-QPK ◆ Final Result 2-AVG

Plot 6-69. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
18.058	N	0.7	43.20	60.00	16.80	32.50	50.00	17.50
20.380	N	0.8	42.60	60.00	17.40	31.60	50.00	18.40
21.271	N	0.8	43.00	60.00	17.00	29.00	50.00	21.00
21.451	N	0.8	43.10	60.00	16.90	28.50	50.00	21.50
21.811	N	0.8	42.80	60.00	17.20	27.40	50.00	22.60
22.166	N	0.8	42.90	60.00	17.10	26.40	50.00	23.60

Table 6-22. Line Conducted Data with 802.11a UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 73 of 78

Line-Conducted Test Data (Cont'd)

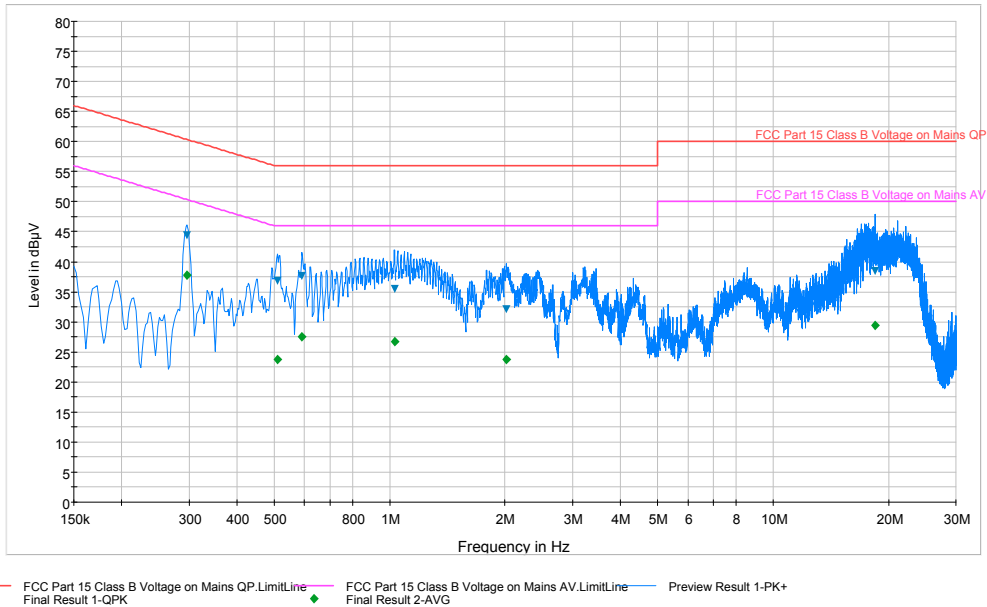§15.207; RSS-Gen [7.2.2]



Plot 6-70. Line Conducted Plot with 802.11a UNII Band 2 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.296	L1	0.1	44.40	60.30	15.90	37.80	50.30	12.50
0.510	L1	0.1	36.80	56.00	19.20	23.80	46.00	22.20
0.591	L1	0.1	37.70	56.00	18.30	27.50	46.00	18.50
1.030	L1	0.2	35.50	56.00	20.50	26.70	46.00	19.30
2.018	L1	0.2	32.10	56.00	23.90	23.80	46.00	22.20
18.440	L1	0.7	38.50	60.00	21.50	29.40	50.00	20.60

Table 6-23. Line Conducted Data with 802.11a UNII Band 2 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 74 of 78

Line-Conducted Test Data (Cont'd)

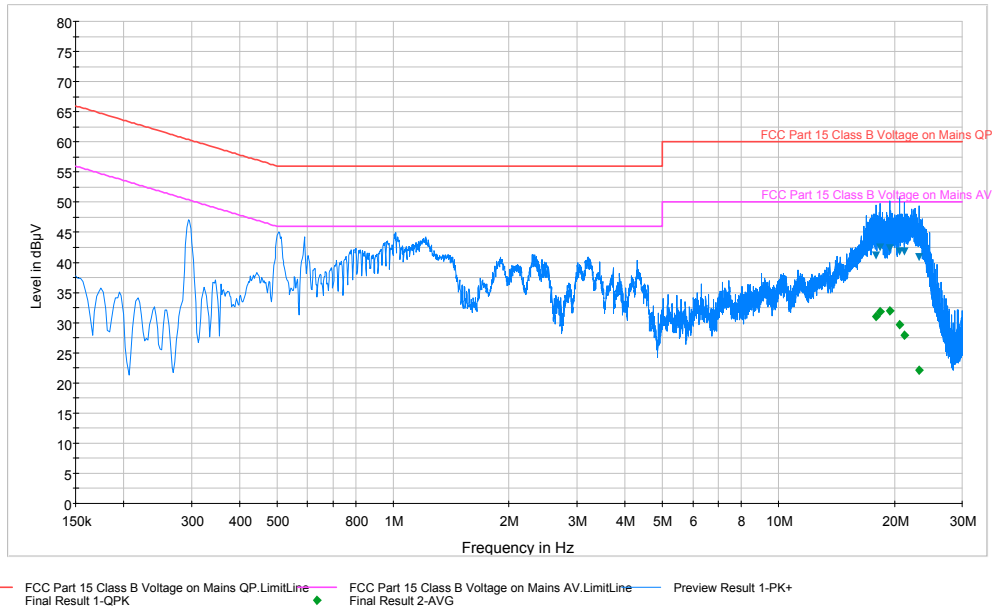§15.207; RSS-Gen [7.2.2]



Plot 6-71. Line Conducted Plot with 802.11a UNII Band 2 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
17.930	N	0.7	41.20	60.00	18.80	31.00	50.00	19.00
18.357	N	0.7	42.50	60.00	17.50	31.90	50.00	18.10
19.502	N	0.7	42.40	60.00	17.60	31.90	50.00	18.10
20.650	N	0.8	41.90	60.00	18.10	29.70	50.00	20.30
21.221	N	0.8	41.90	60.00	18.10	27.90	50.00	22.10
23.233	N	0.8	40.90	60.00	19.10	22.20	50.00	27.80

Table 6-24. Line Conducted Data with 802.11a UNII Band 2 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 75 of 78

Line-Conducted Test Data (Cont'd)

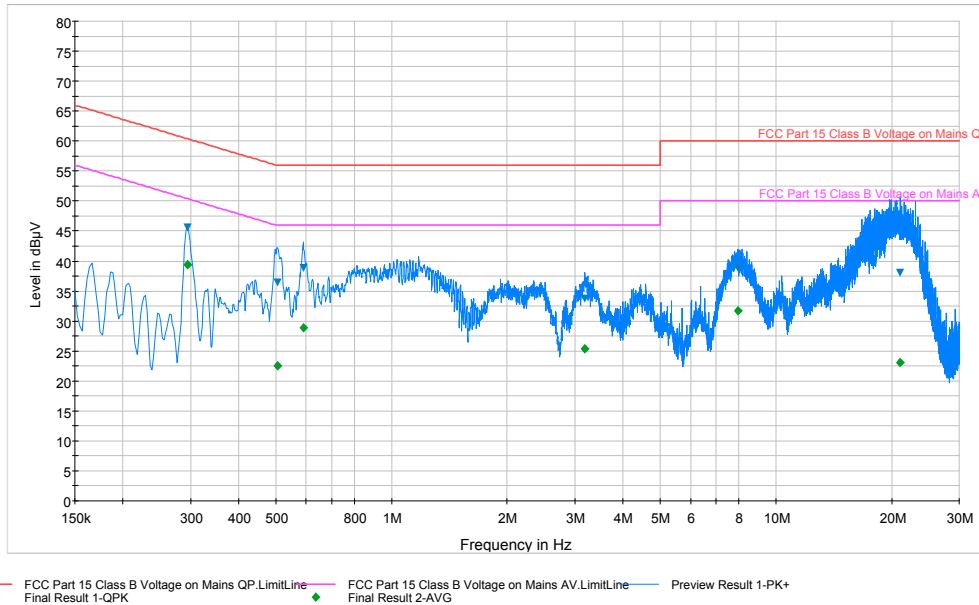§15.207; RSS-Gen [7.2.2]



Plot 6-72. Line Conducted Plot with 802.11a UNII Band 3 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	45.70	60.40	14.70	39.40	50.40	11.00
0.506	L1	0.1	36.50	56.00	19.50	22.50	46.00	23.50
0.589	L1	0.1	38.80	56.00	17.20	28.80	46.00	17.20
3.179	L1	0.2	33.70	56.00	22.30	25.40	46.00	20.60
7.967	L1	0.3	38.90	60.00	21.10	31.70	50.00	18.30
21.095	L1	0.8	38.10	60.00	21.90	23.00	50.00	27.00

Table 6-25. Line Conducted Plot with 802.11a UNII Band 3 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 76 of 78

Line-Conducted Test Data (Cont'd)

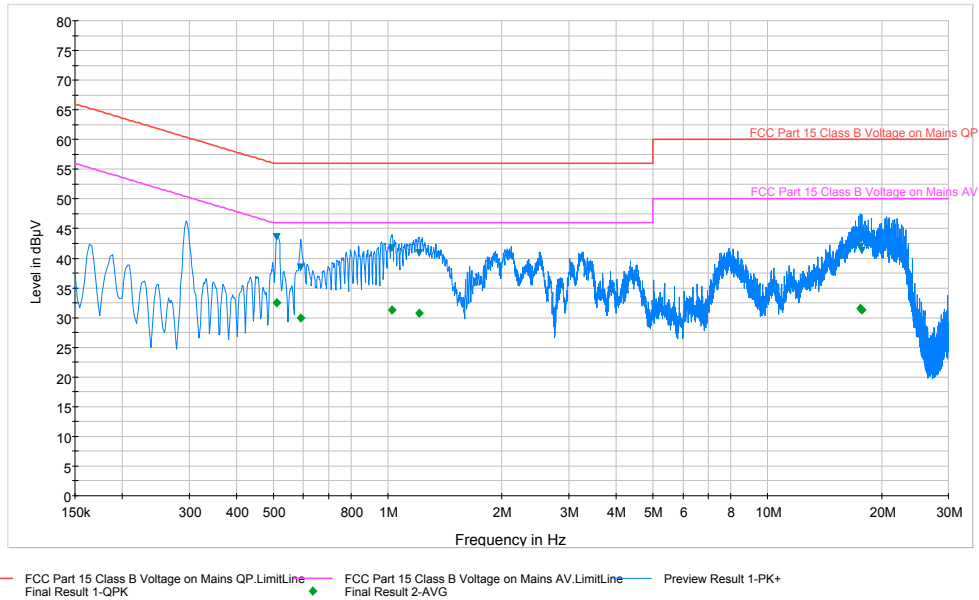§15.207; RSS-Gen [7.2.2]



Plot 6-73. Line Conducted Plot with 802.11a UNII Band 3 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.510	N	0.1	43.60	56.00	12.40	32.50	46.00	13.50
0.591	N	0.1	38.40	56.00	17.60	29.90	46.00	16.10
1.028	N	0.2	41.70	56.00	14.30	31.30	46.00	14.70
1.212	N	0.2	40.80	56.00	15.20	30.70	46.00	15.30
17.608	N	0.7	41.90	60.00	18.10	31.60	50.00	18.40
17.779	N	0.7	41.30	60.00	18.70	31.20	50.00	18.80

Table 6-26. Line Conducted Data with 802.11a UNII Band 3 (N)



Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100 with wireless charging enabled. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFVS870	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset		Page 77 of 78

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFVS870** is in compliance with Part 15E of the FCC Rules and RSS-210 of the Industry Canada Rules.

FCC ID: ZNFVS870		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1212181830.ZNF	Test Dates: Nov. 28- Dec. 7, 2012	EUT Type: Portable Handset	Page 78 of 78	