



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC

MODEL NUMBER: LG-VS876, LGVS876, VS876, LG-AS876, AS876 and LGAS876

FCC ID: ZNFVS876

REPORT NUMBER: 13U16594-2, Revision A

ISSUE DATE: January 21, 2014

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
100 SYLVAN AVENUE
ENGWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/10/14	Initial Issue	P. Kim
A	1/21/14	Add Models LG-AS876, AS876 and LGAS876	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>MAXIMUM OUTPUT POWER</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY TABLE	11
8. ANTENNA PORT TEST RESULTS	12
8.1. <i>20 dB AND 99% BANDWIDTH</i>	12
8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i>	12
8.1.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	12
8.2. <i>HOPPING FREQUENCY SEPARATION</i>	21
8.3. <i>NUMBER OF HOPPING CHANNELS</i>	23
8.4. <i>AVERAGE TIME OF OCCUPANCY</i>	26
8.5. <i>OUTPUT POWER</i>	30
8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i>	30
8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	30
8.6. <i>AVERAGE POWER</i>	35
8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i>	35
8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION</i>	35
8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	36
8.7. <i>CONDUCTED SPURIOUS EMISSIONS</i>	37
8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	38
8.7.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	42
9. RADIATED TEST RESULTS	46
9.1. <i>LIMITS AND PROCEDURE</i>	46

9.2. TRANSMITTER ABOVE 1 GHz	47
9.2.1. BASIC DATA RATE GFSK MODULATION.....	47
9.2.2. ENHANCED DATA RATE 8PSK MODULATION	60
9.3. WORST-CASE BELOW 1 GHz	73
10. AC POWER LINE CONDUCTED EMISSIONS	76
LINE 2 RESULTS	80
11. SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC
MODEL: LG-VS876, LGVS876, VS876, LG-AS876, AS876 & LGAS876
SERIAL NUMBER: 1792206-VS
DATE TESTED: DECEMBER 27, 2013- JANUARY 9, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WiSE PROGRAM MANAGER
UL Verification Services Inc.

CHARLES VERGONIO
WiSE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	9.41	8.73
2402 - 2480	Enhanced 8PSK	10.54	11.32

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.09 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WD	DA3Y0035121	N/A
Earphone	LG	EAB62209201	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

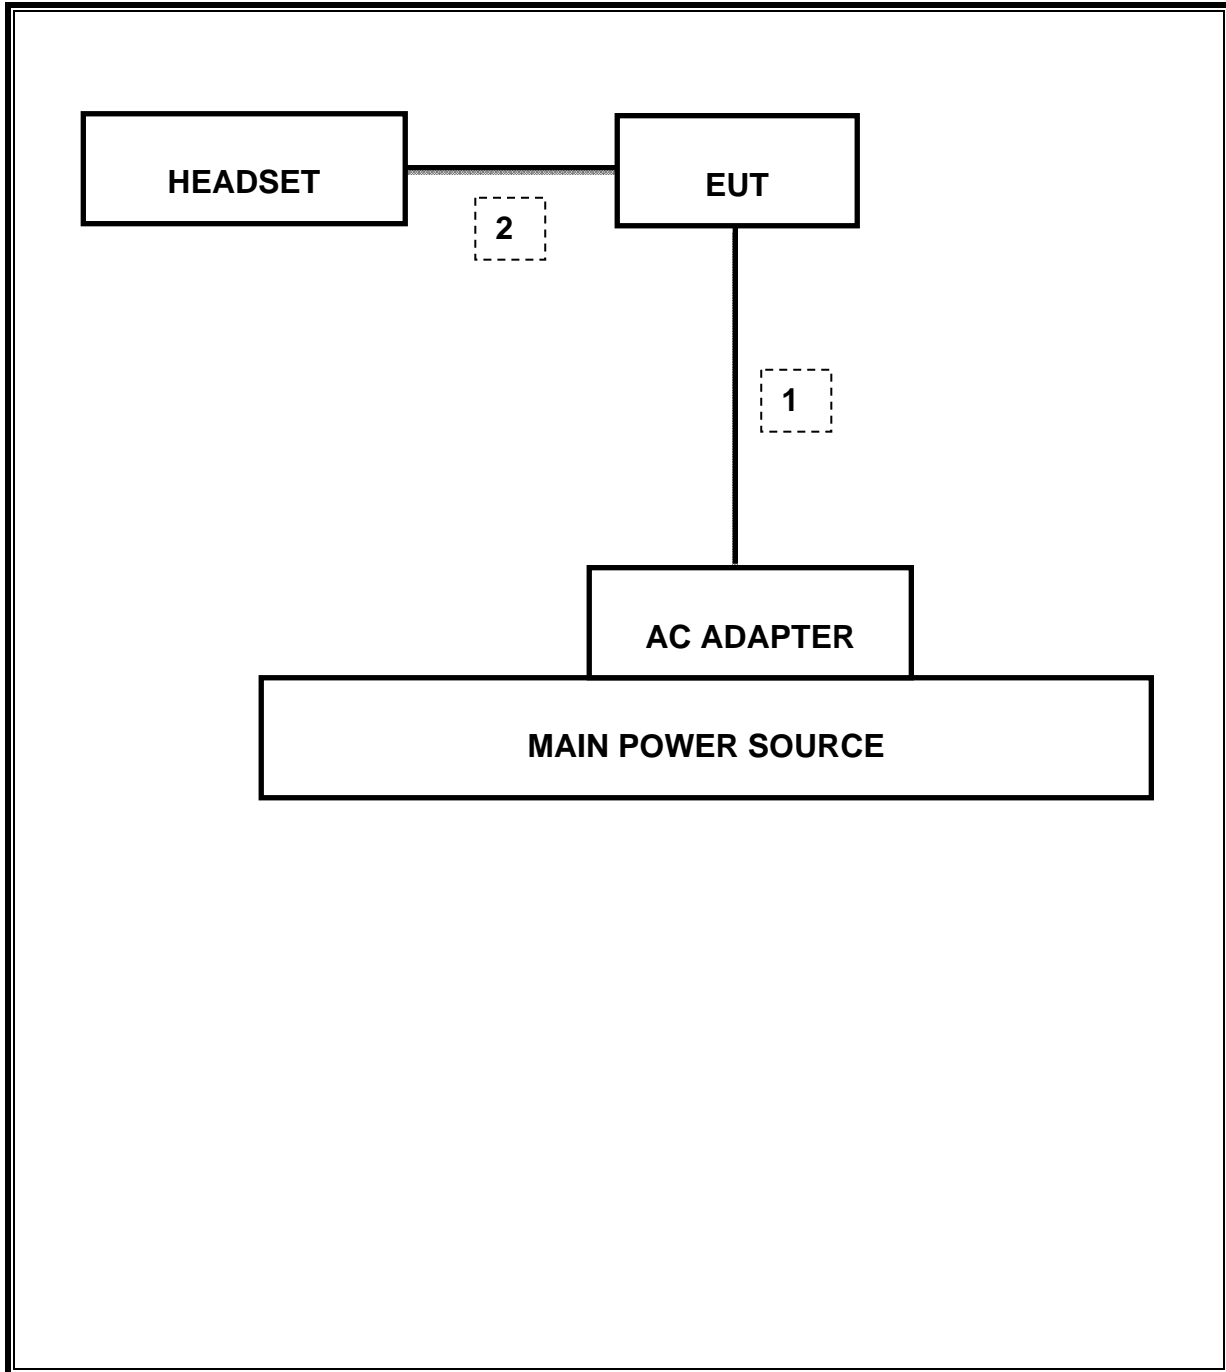

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	03/23/13	02/13/14
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/13	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/13	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/13	01/28/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/13	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/13	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/13	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/13	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/13	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/13	01/14/14
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR	CNR

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.208MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-62.14dBc
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.54dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.288sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	28.07dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	40.66dBuV

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.954	0.832
Middle	2441	0.922	0.884
High	2480	0.926	0.908
Worst		0.954	0.908

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.302	1.208
Middle	2441	1.303	1.172
High	2480	1.303	1.193
Worst		1.303	1.208


GFSK 20 dB BANDWIDTH

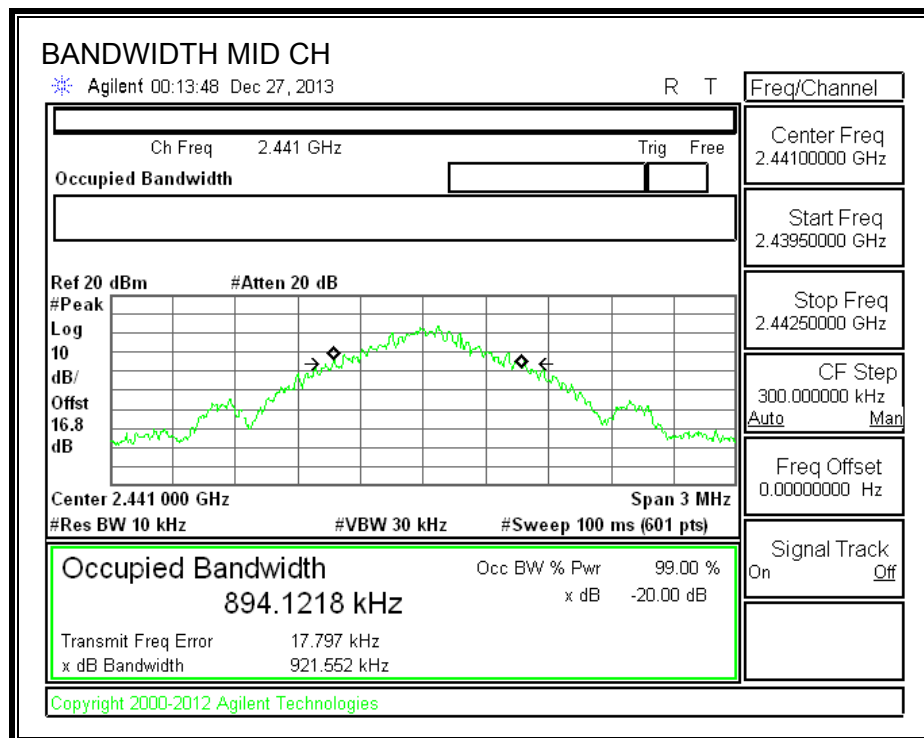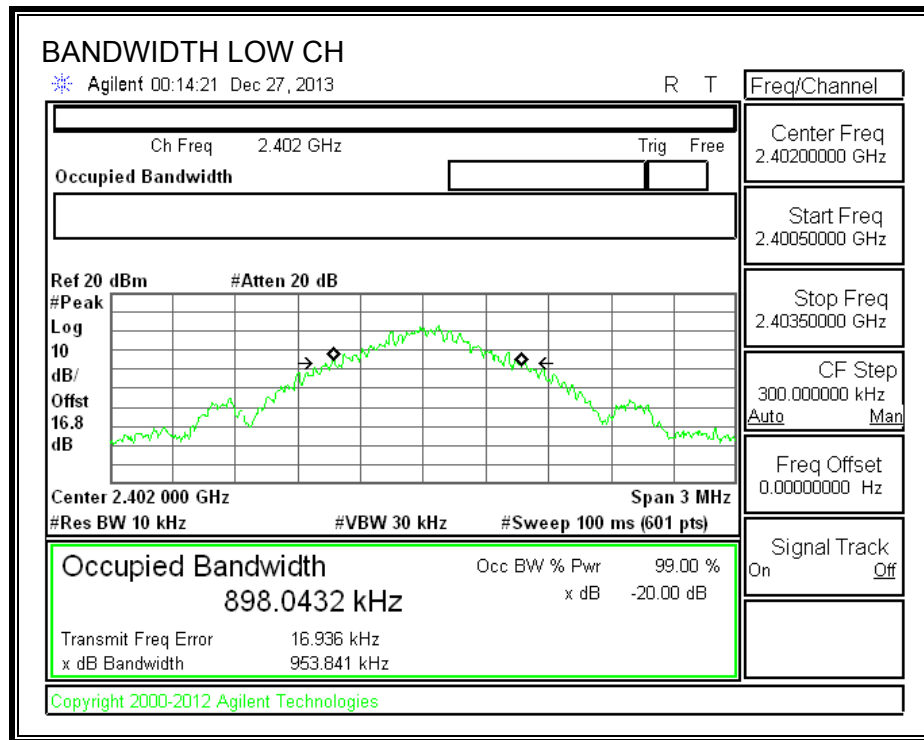


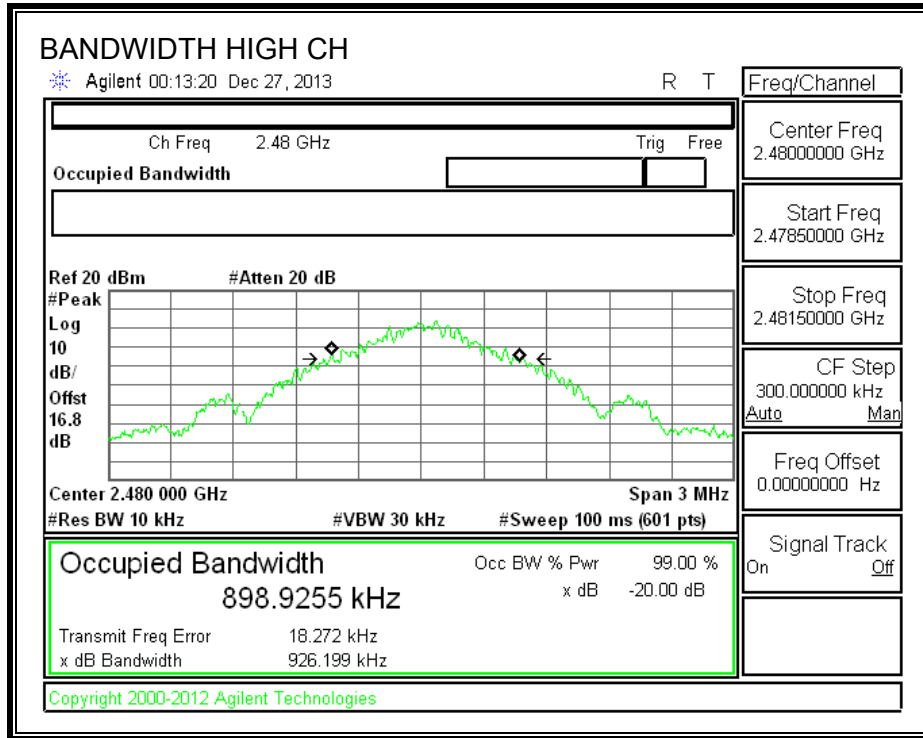



GFSK 99% BANDWIDTH

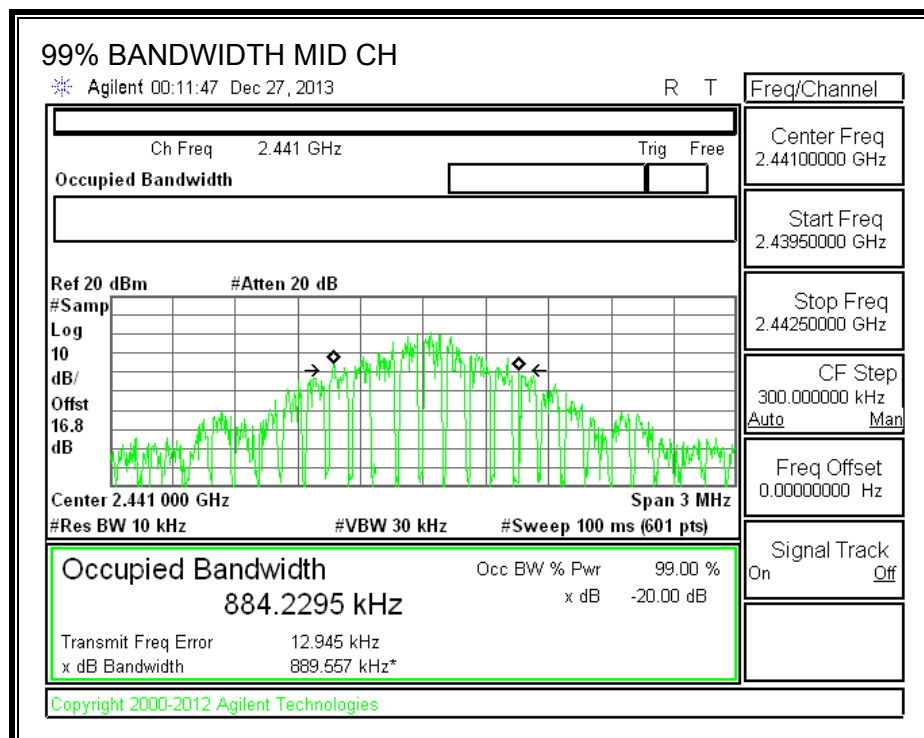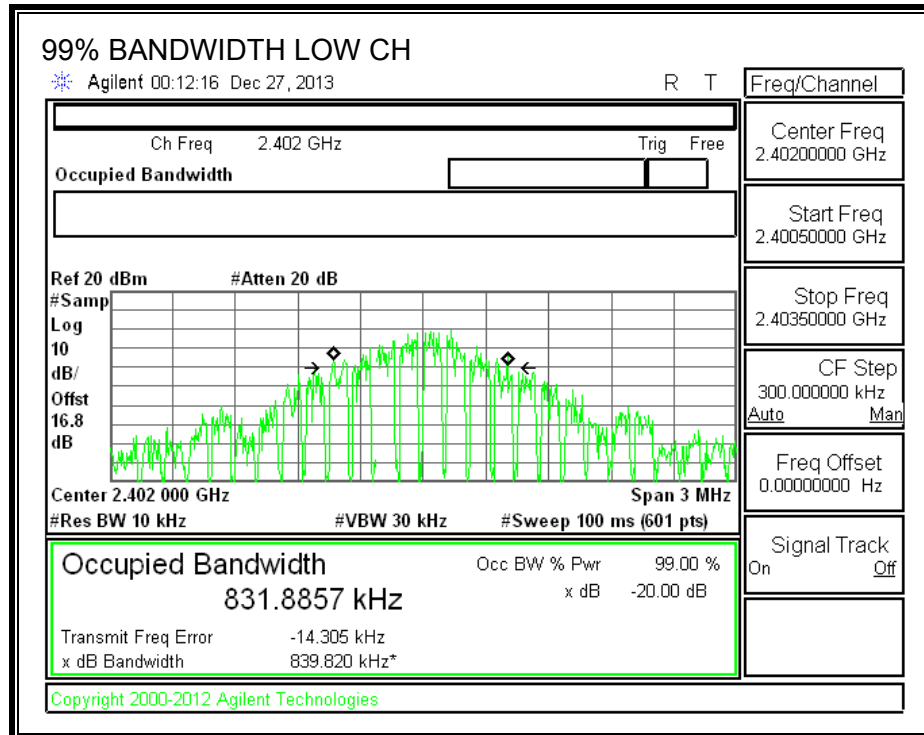


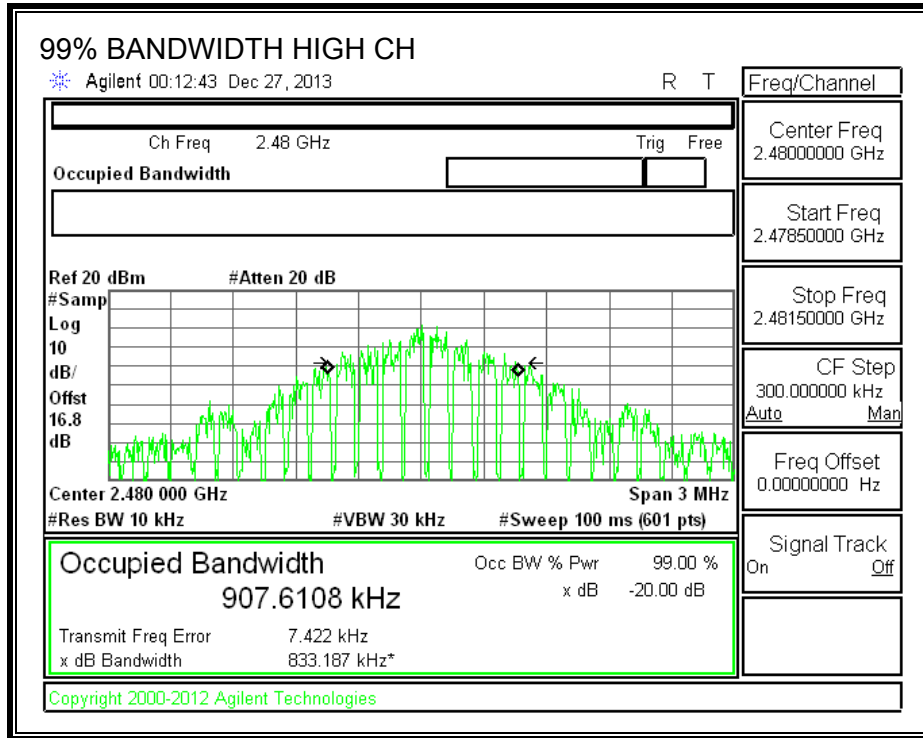



8PSK 20 dB BANDWIDTH

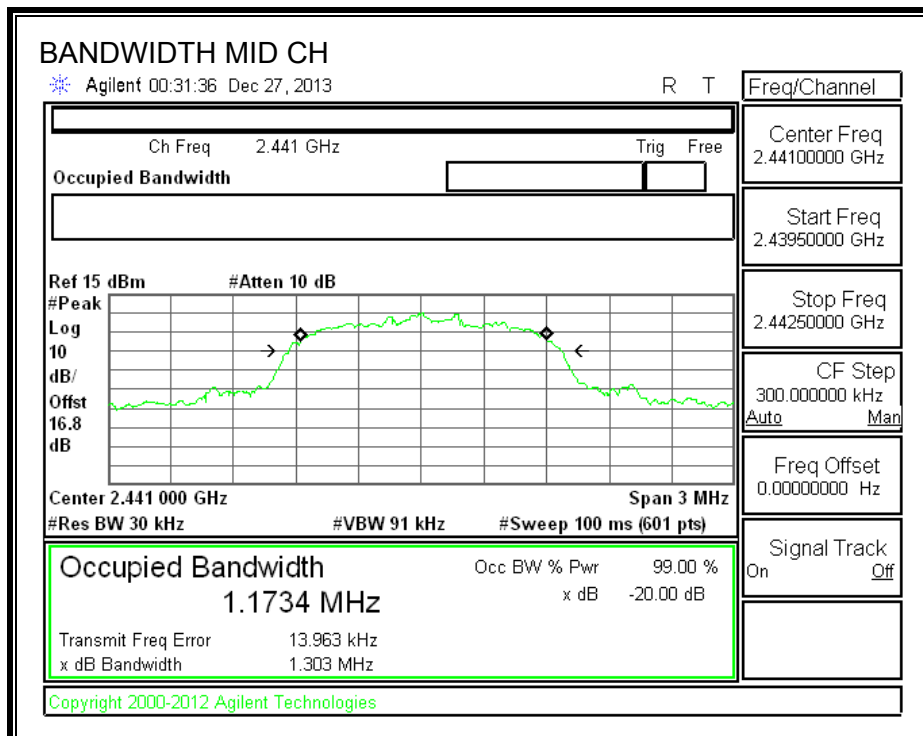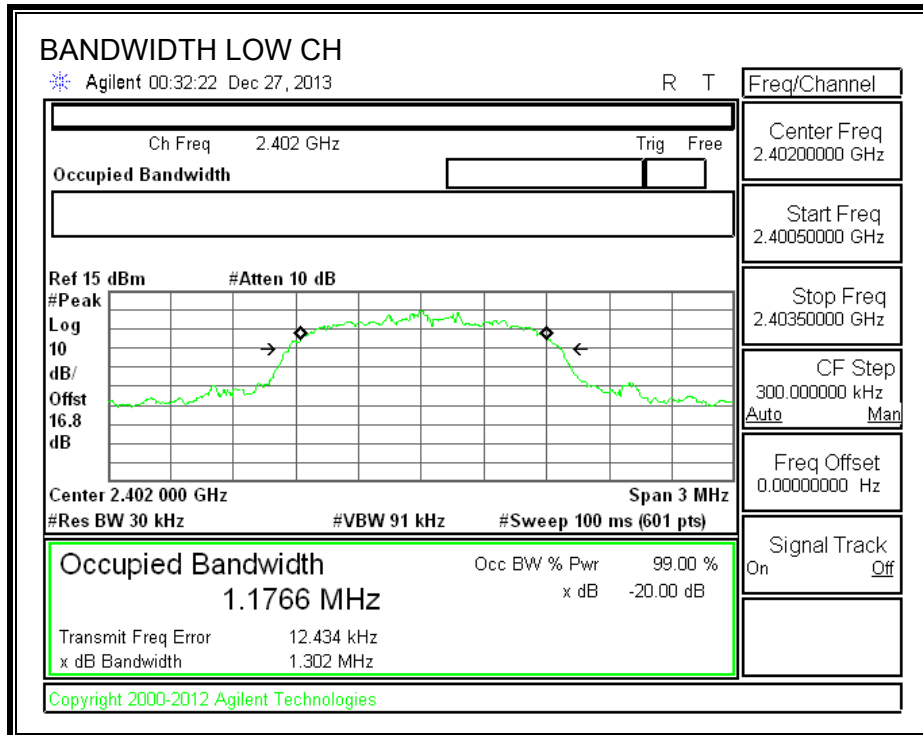

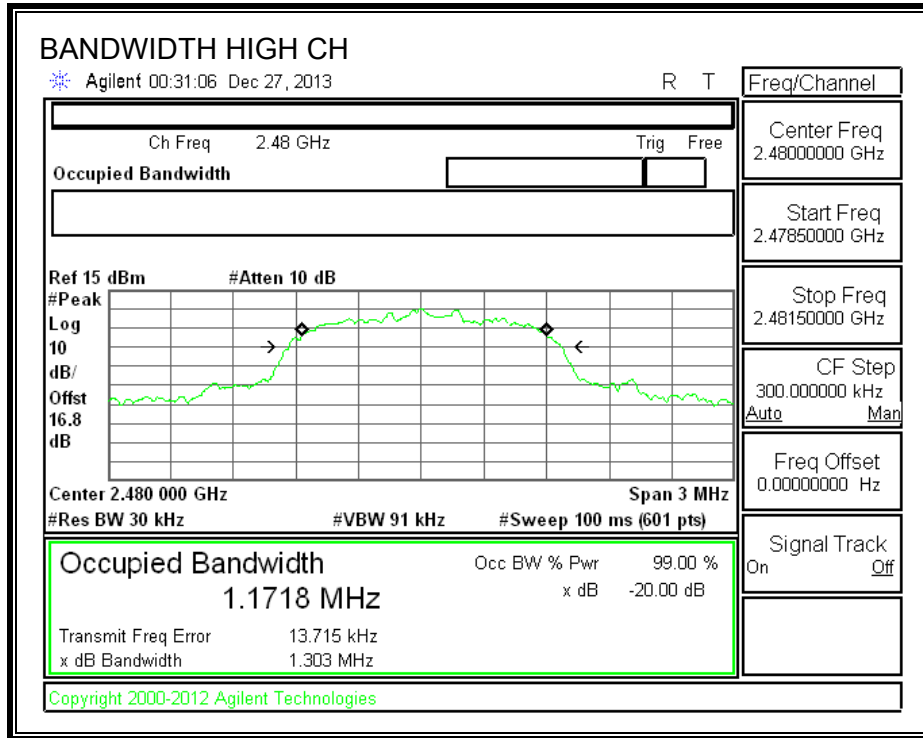

8PSK 99% BANDWIDTH

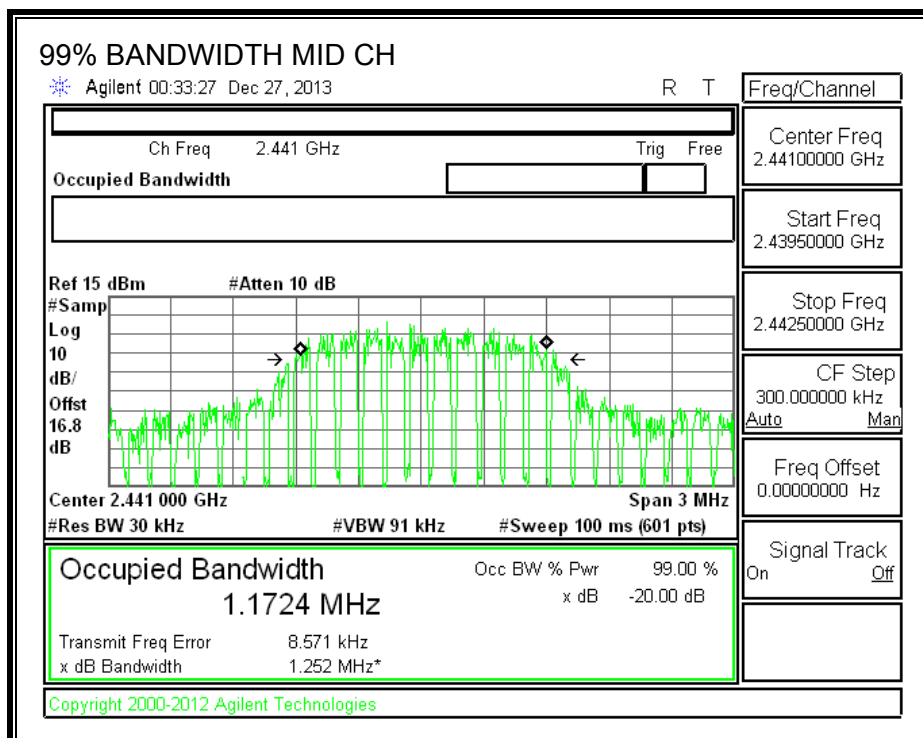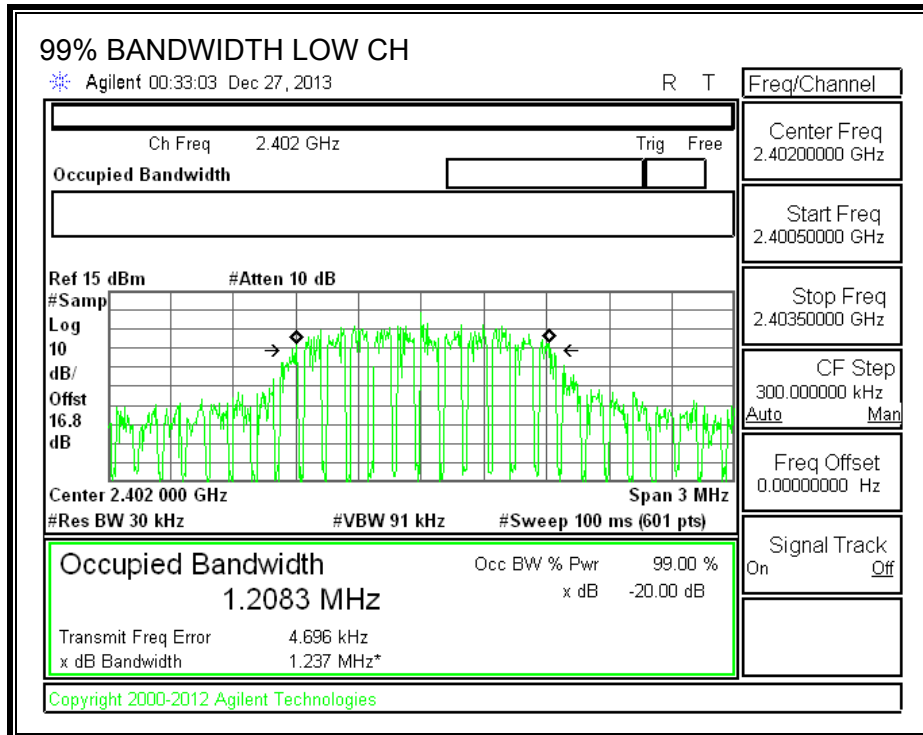

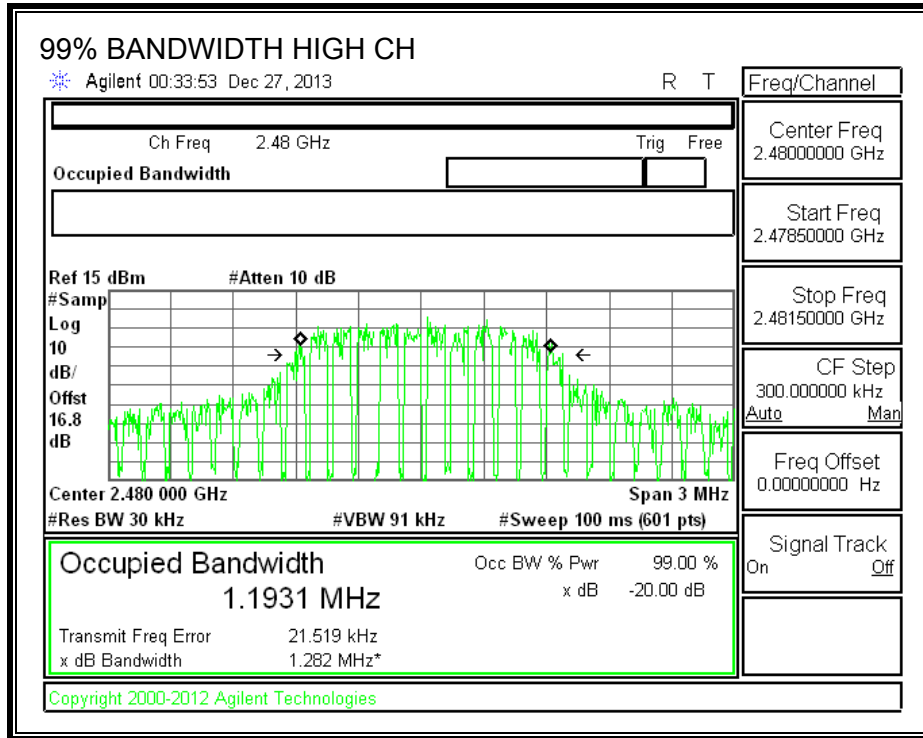

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Note: EDR data has been verified to display the worst case set of data in this report.

HOPPING FREQUENCY SEPARATION

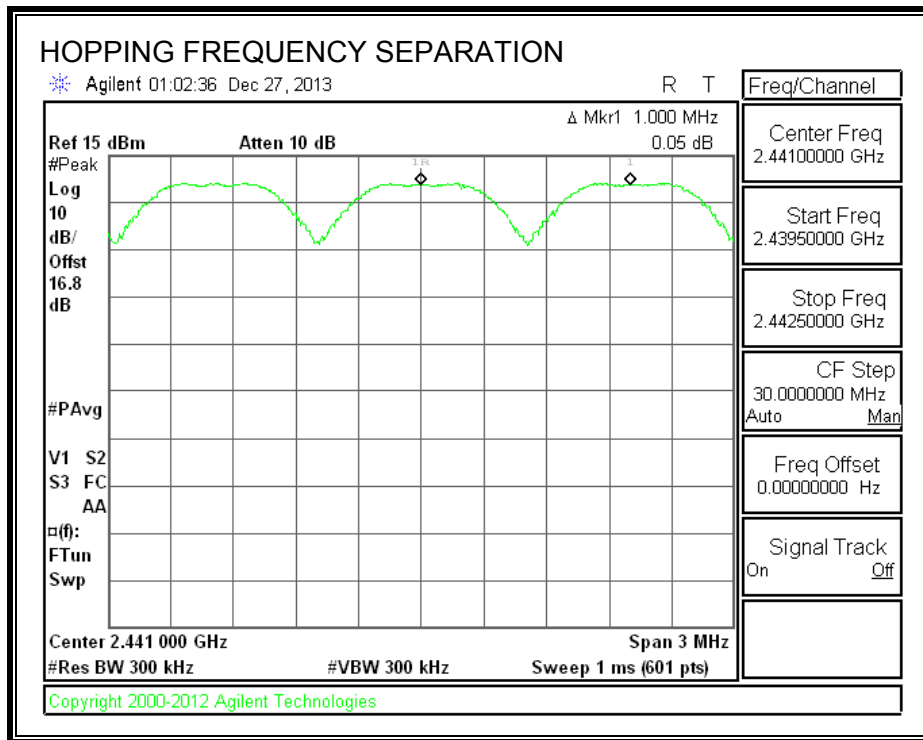

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.



RESULTS

Normal Mode: 79 Channels observed.

Note: EDR data has been verified to display the worst case set of data in this report.

NUMBER OF HOPPING CHANNELS

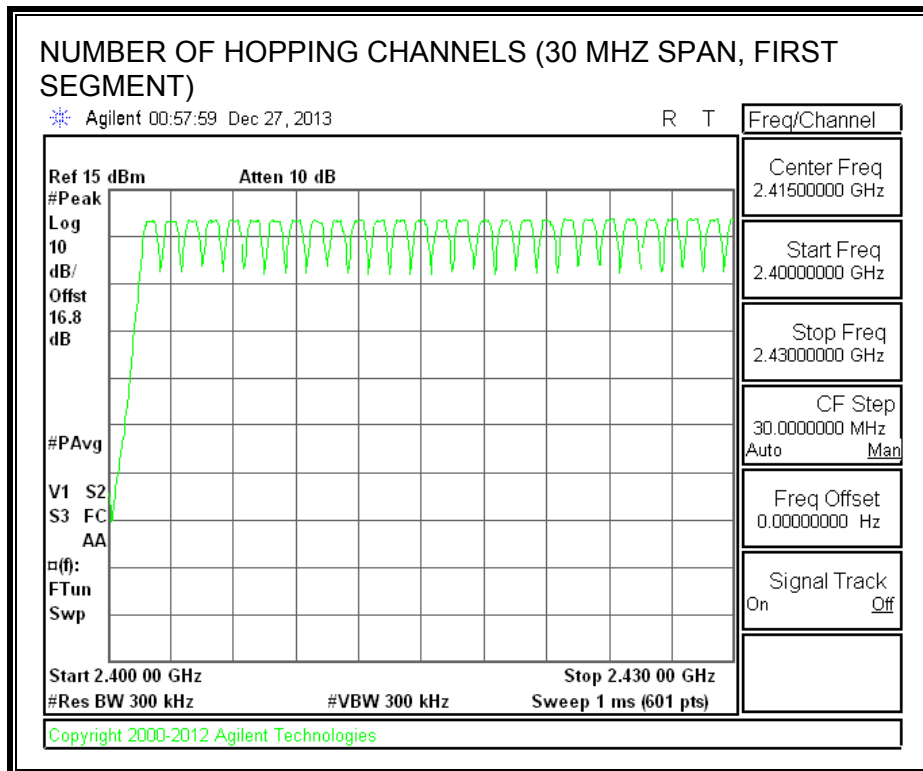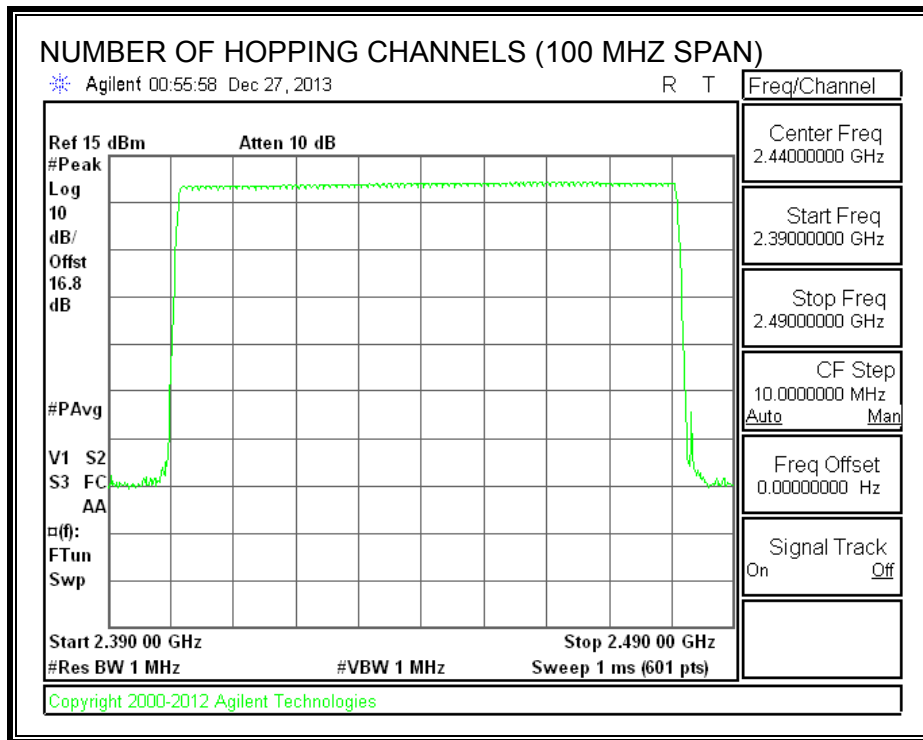

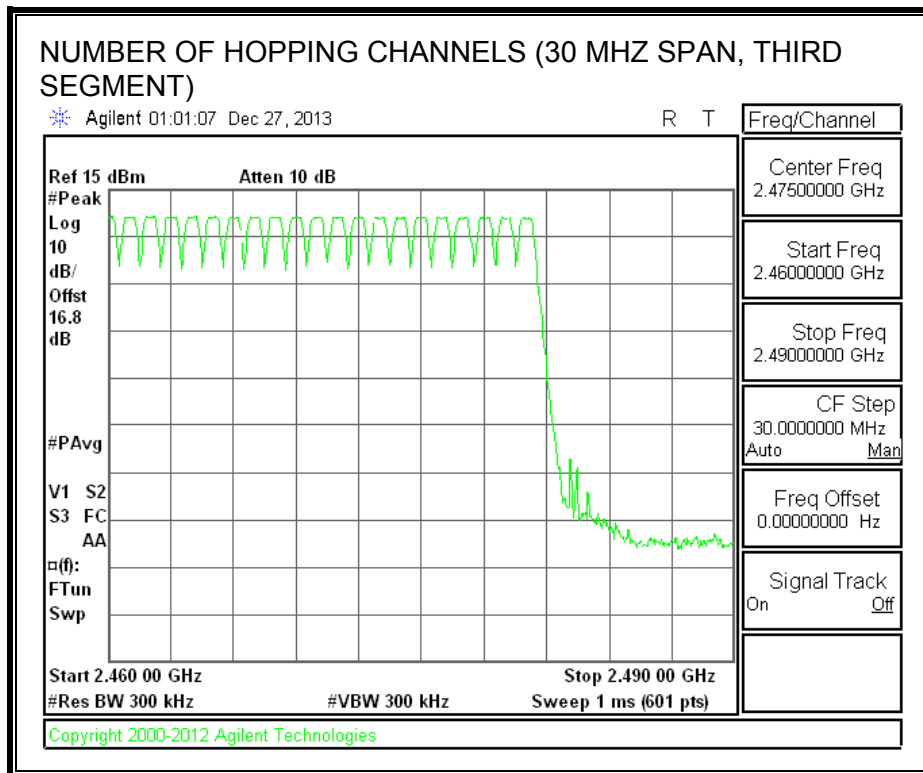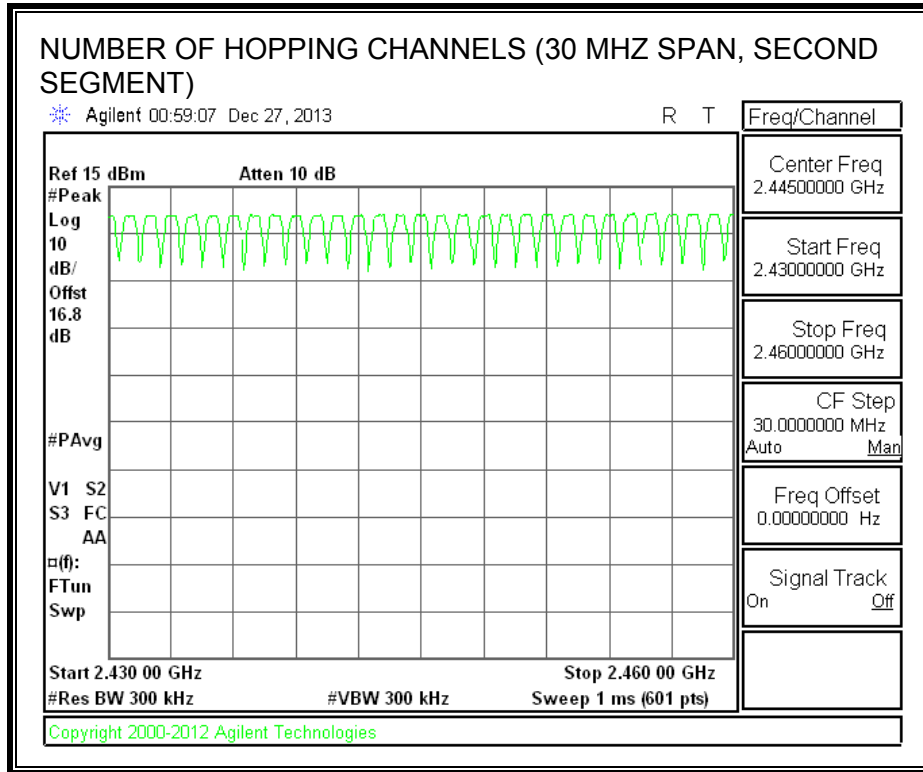

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

RESULTS


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.365	32	0.117	0.4	-0.283
DH3	1.635	12	0.196	0.4	-0.204
DH5	2.875	10	0.288	0.4	-0.113
GFSK AFH Mode					
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.365	8	0.029	0.4	-0.371
DH3	1.635	3	0.049	0.4	-0.351
DH5	2.875	3	0.086	0.4	-0.314

Note: EDR data has been verified to display the worst case set of data in this report.


PULSE WIDTH - DH1

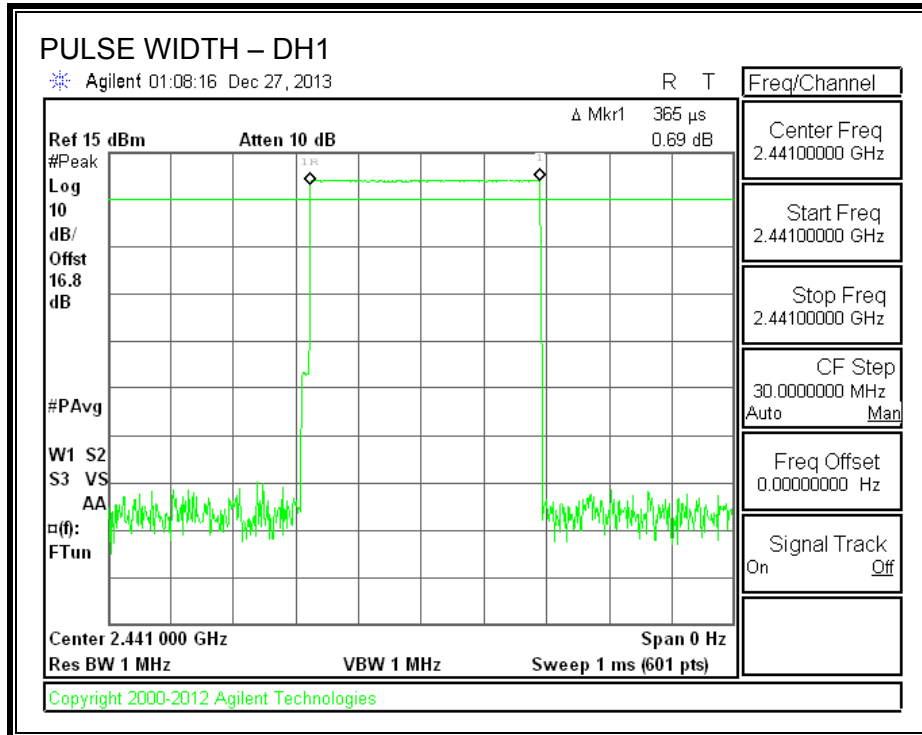


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

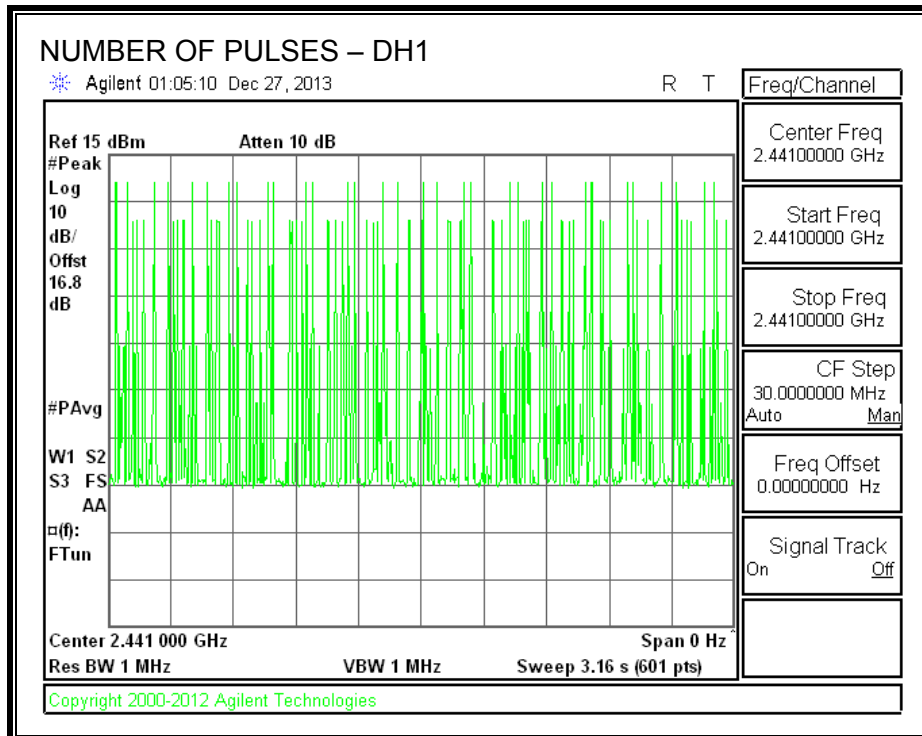


PULSE WIDTH – DH3

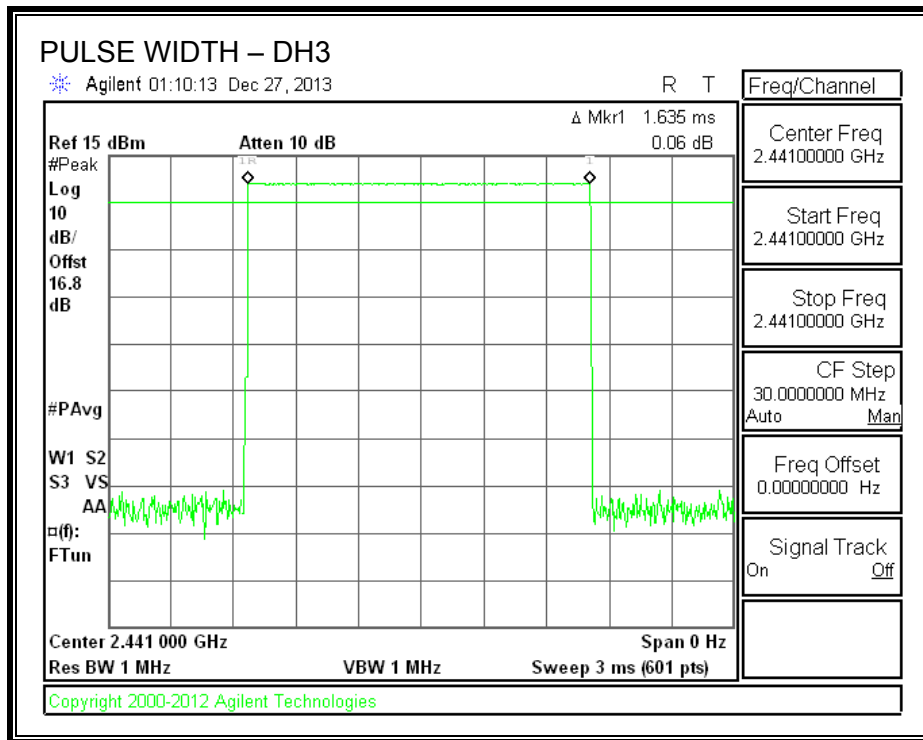


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

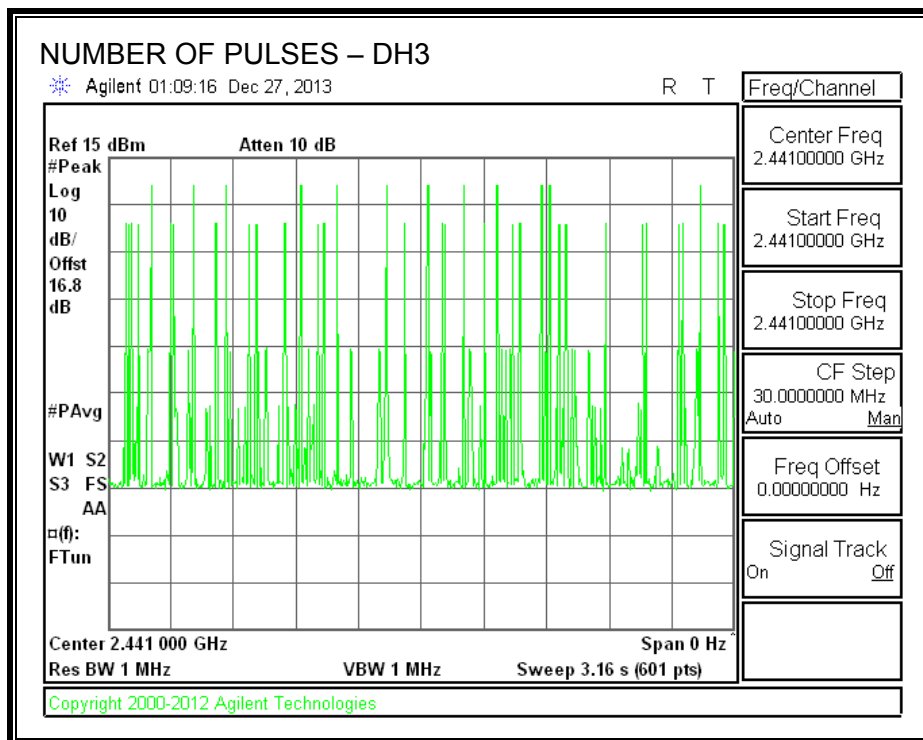

PULSE WIDTH – DH5

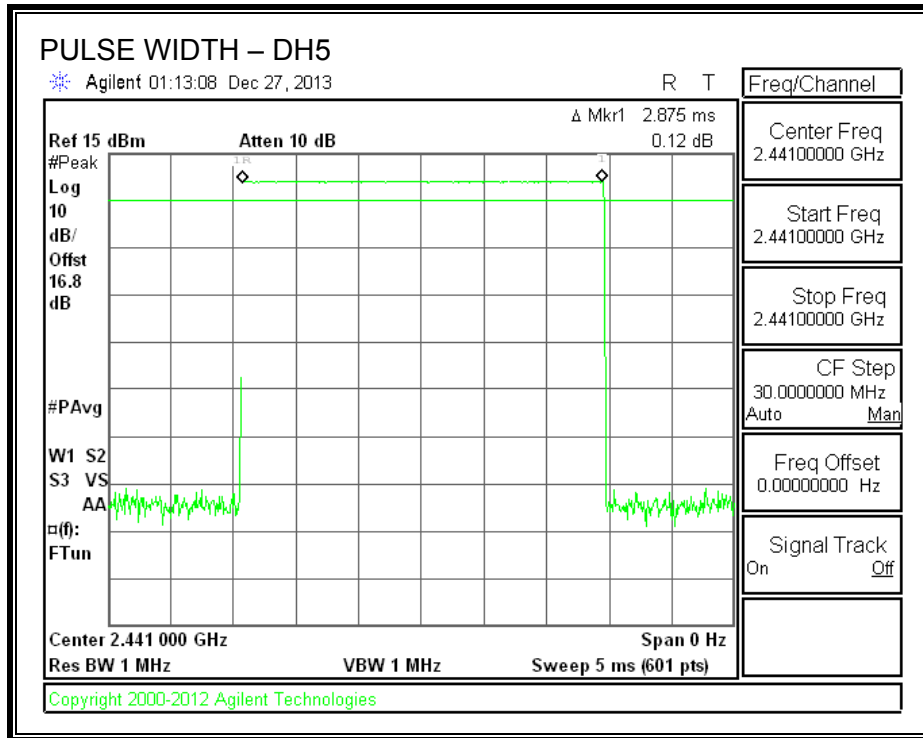

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

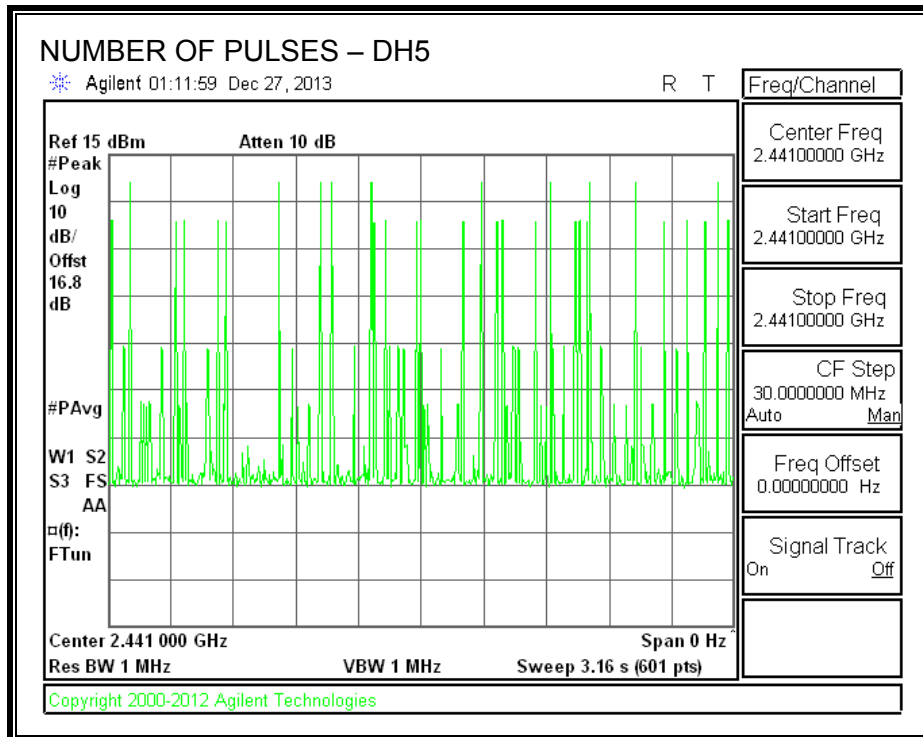

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.62	21	-12.38
Middle	2441	9.39	21	-11.61
High	2480	9.41	21	-11.59
Worst		9.41		-11.59

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.88	21	-11.12
Middle	2441	10.51	21	-10.49
High	2480	10.54	21	-10.46
Worst		10.54		-10.46


GFSK OUTPUT POWER

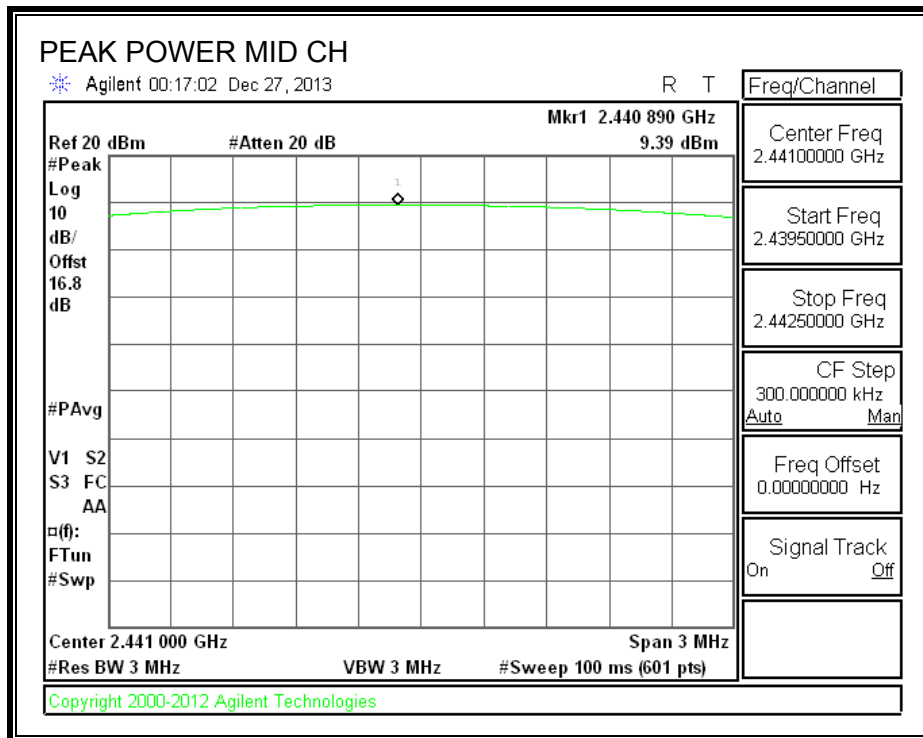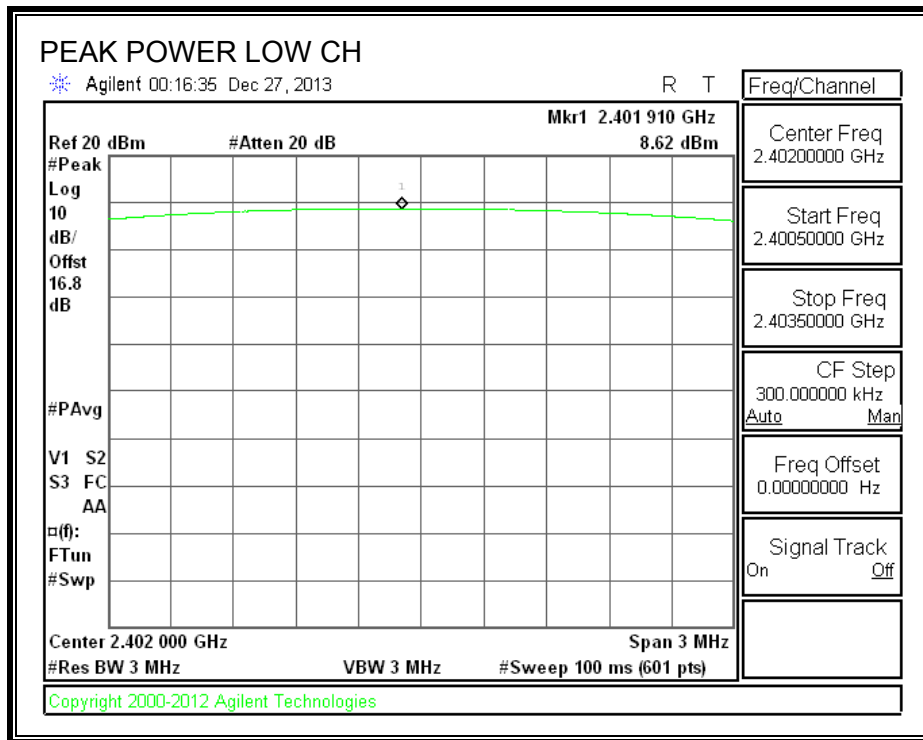

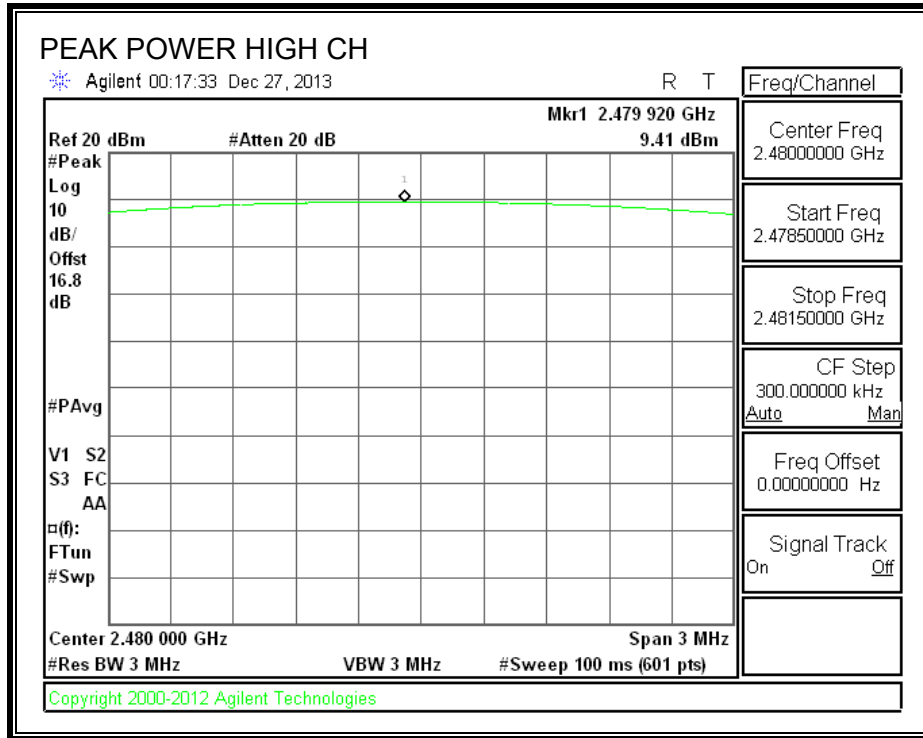

8PSK OUTPUT POWER

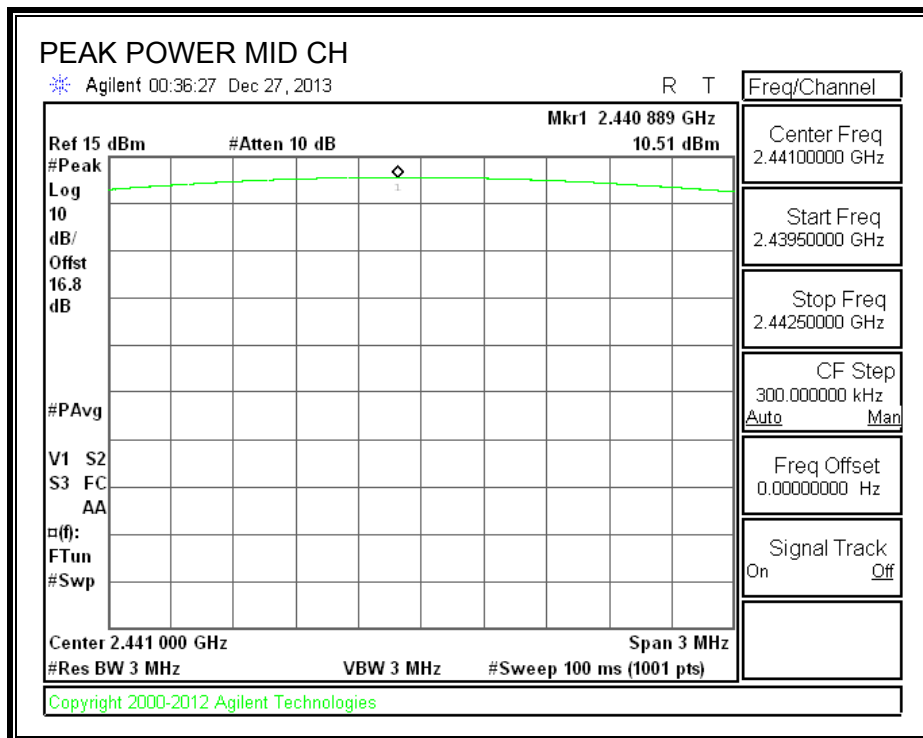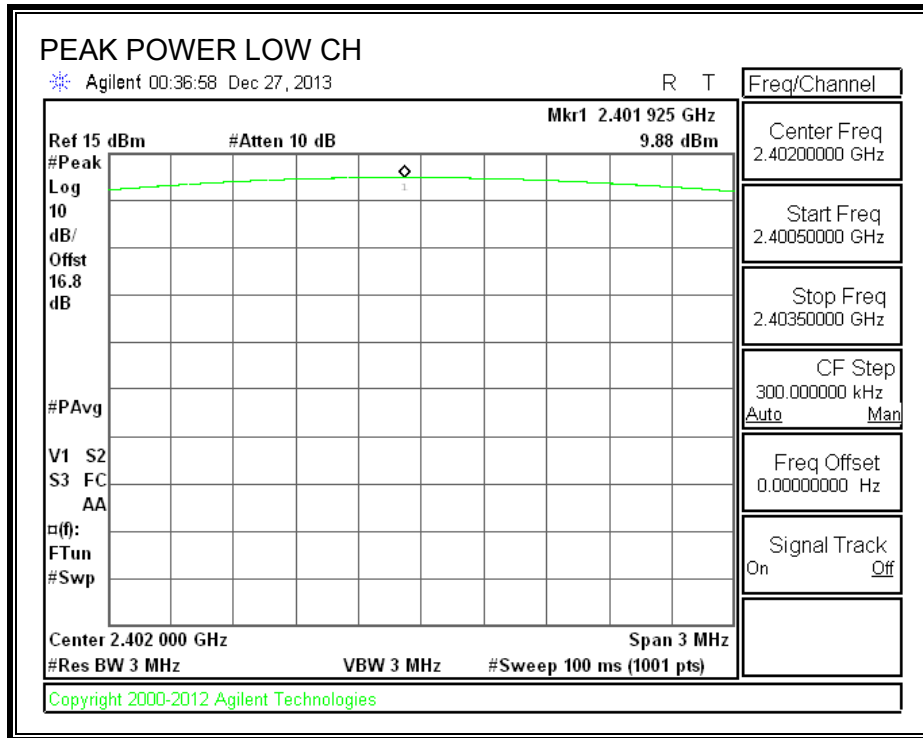

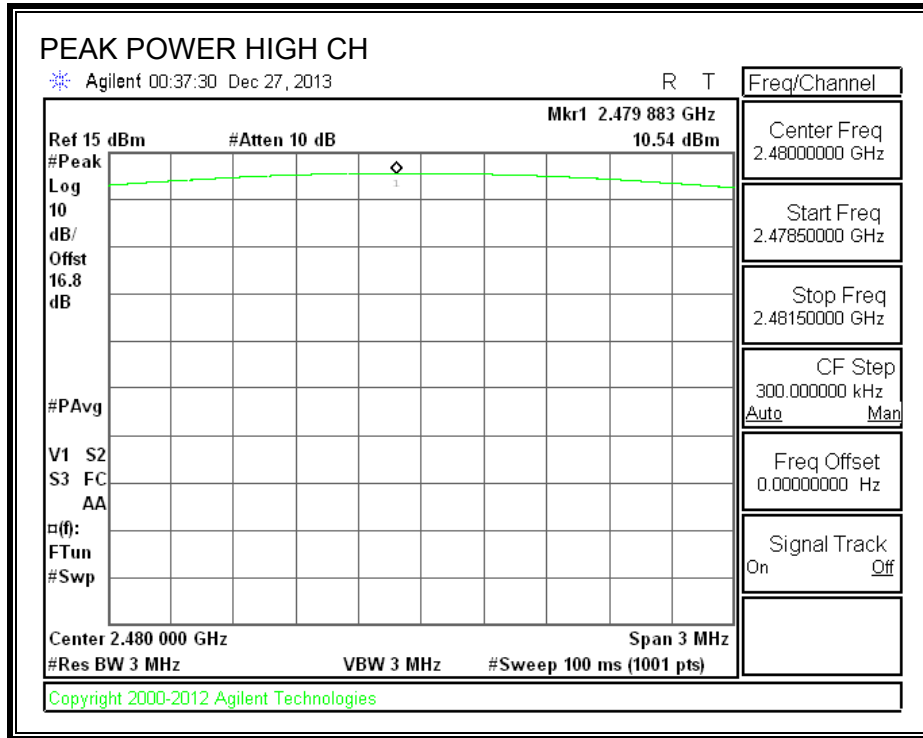

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.50
Middle	2441	9.10
High	2480	9.30
Worst		9.30

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.00
Middle	2441	6.90
High	2480	6.30
Worst		6.90

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.50
Middle	2441	8.00
High	2480	8.10
Worst		8.10

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

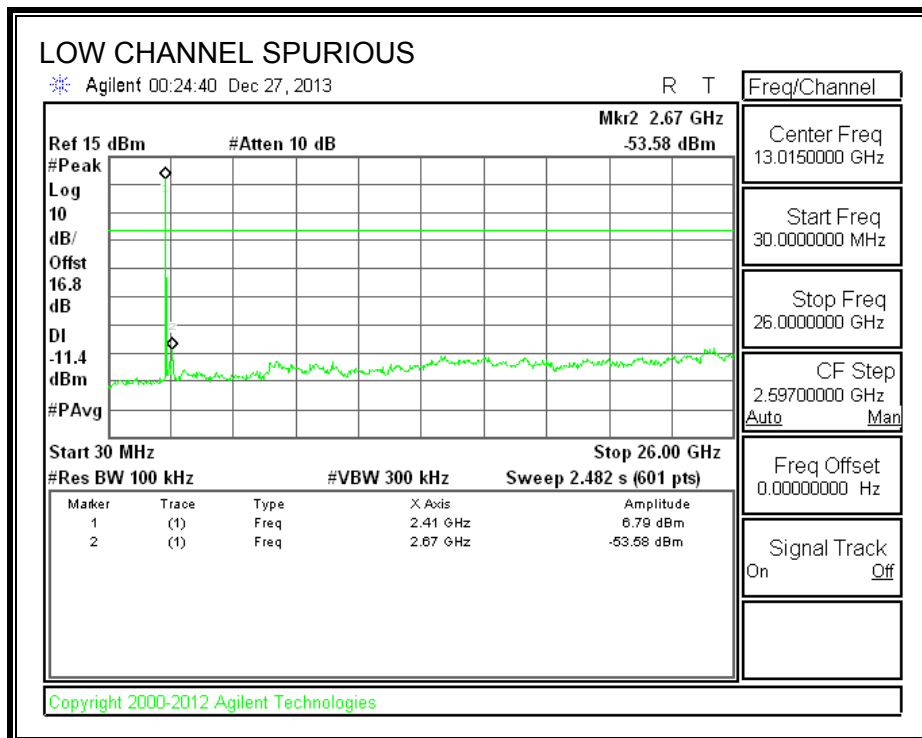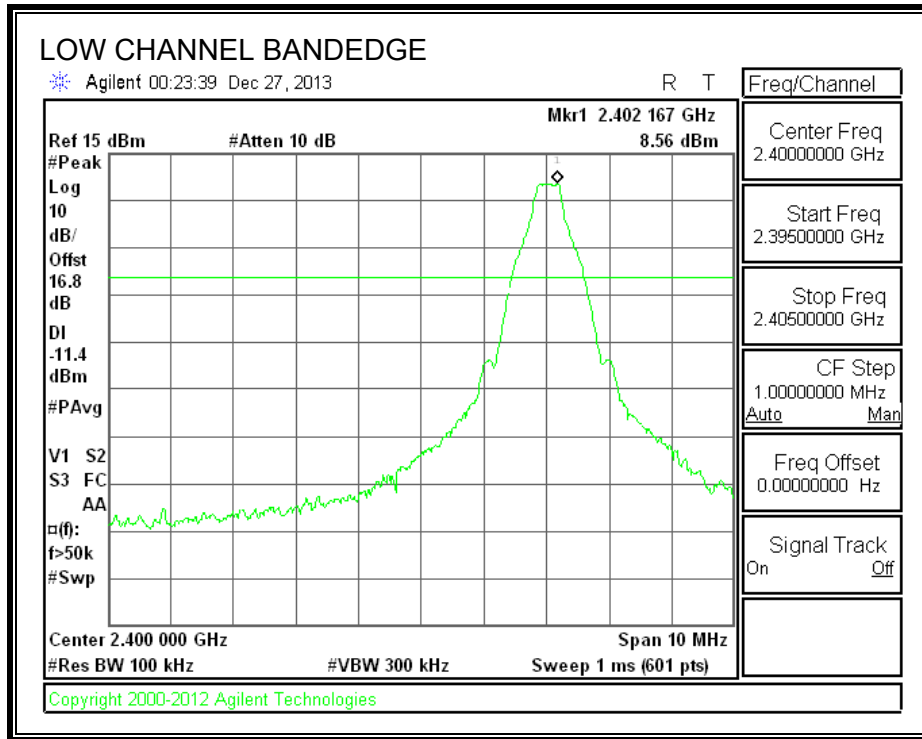



SPURIOUS EMISSIONS, MID CHANNEL

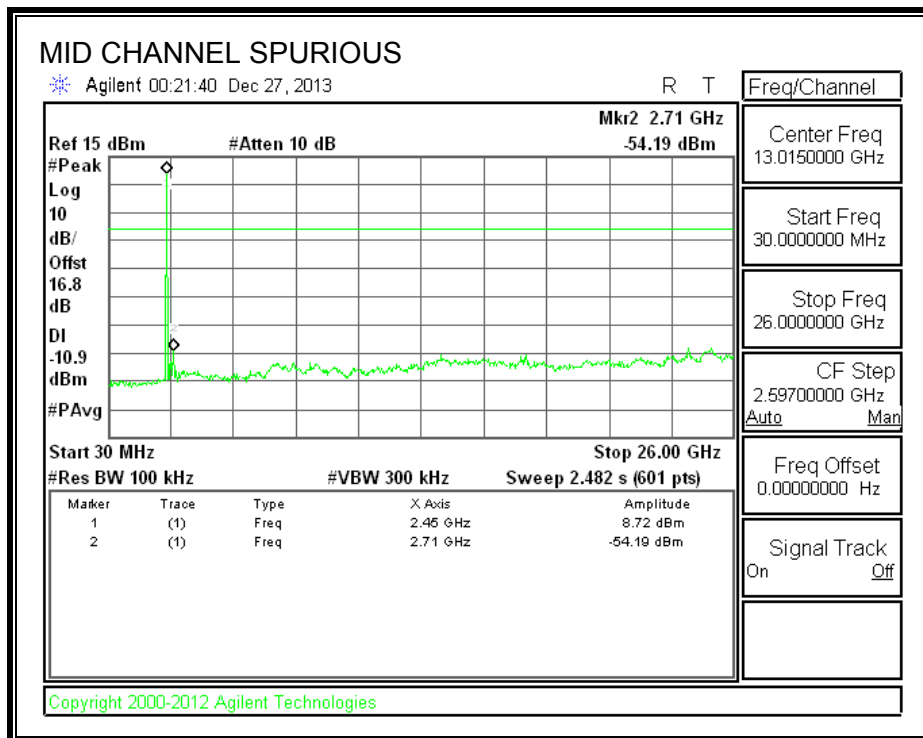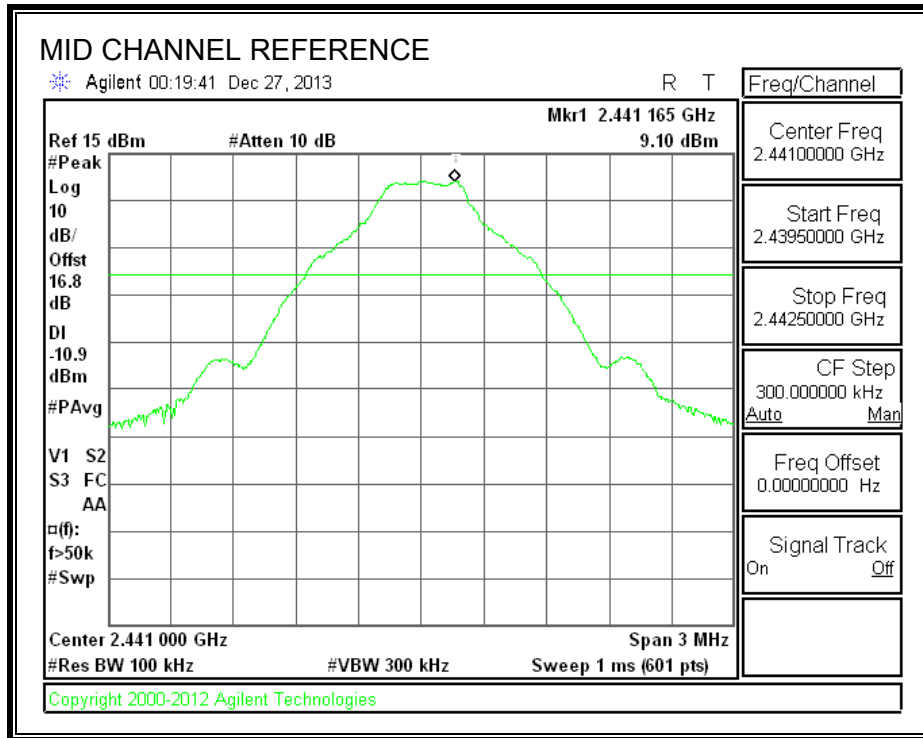

SPURIOUS EMISSIONS, HIGH CHANNEL

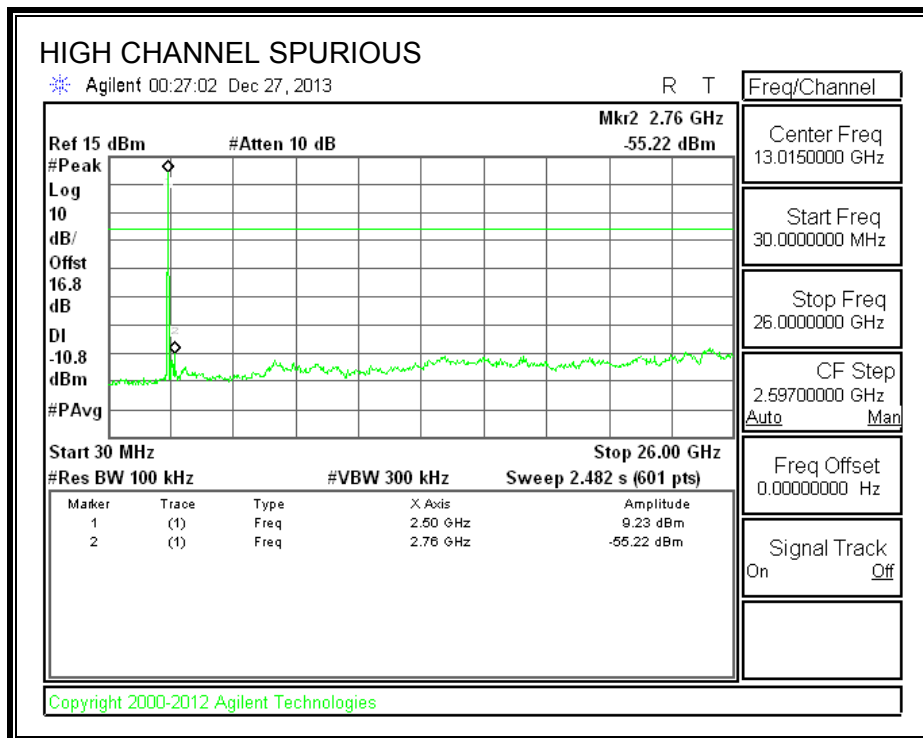
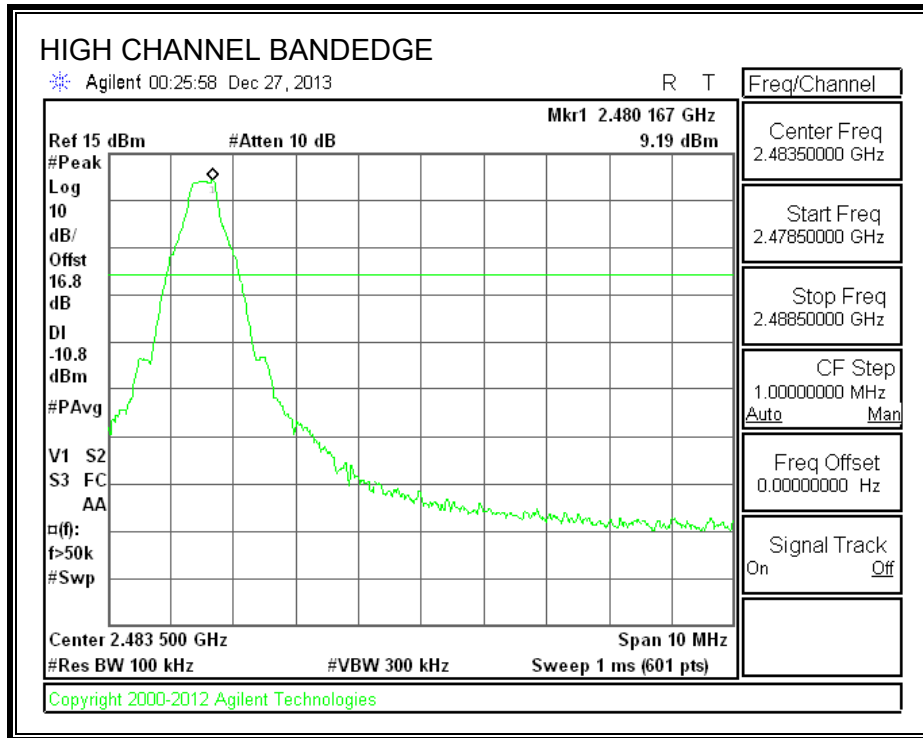


GFSK SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

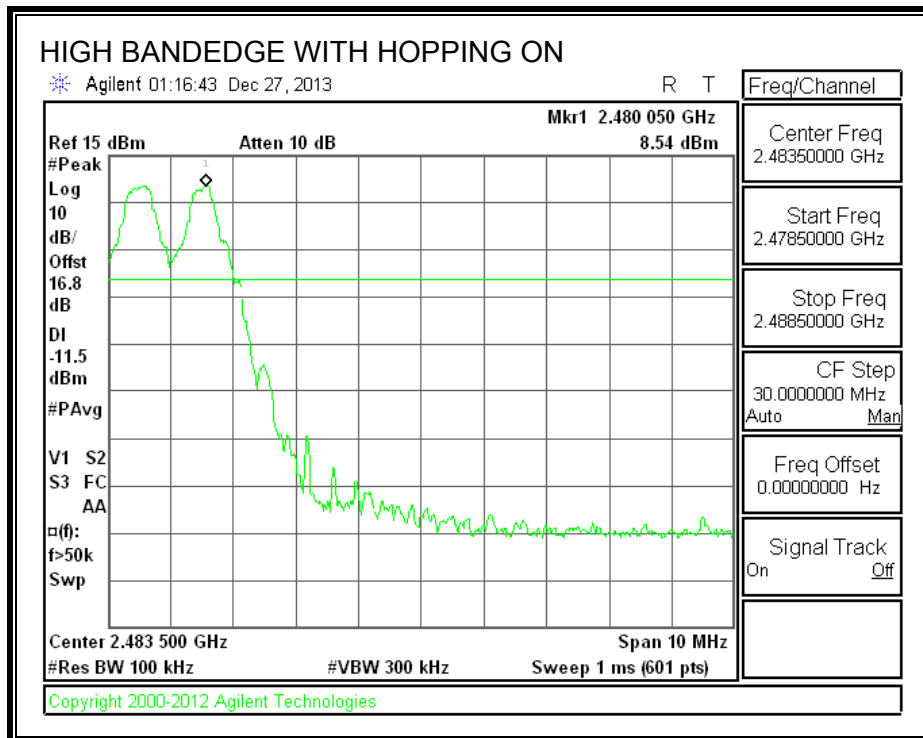
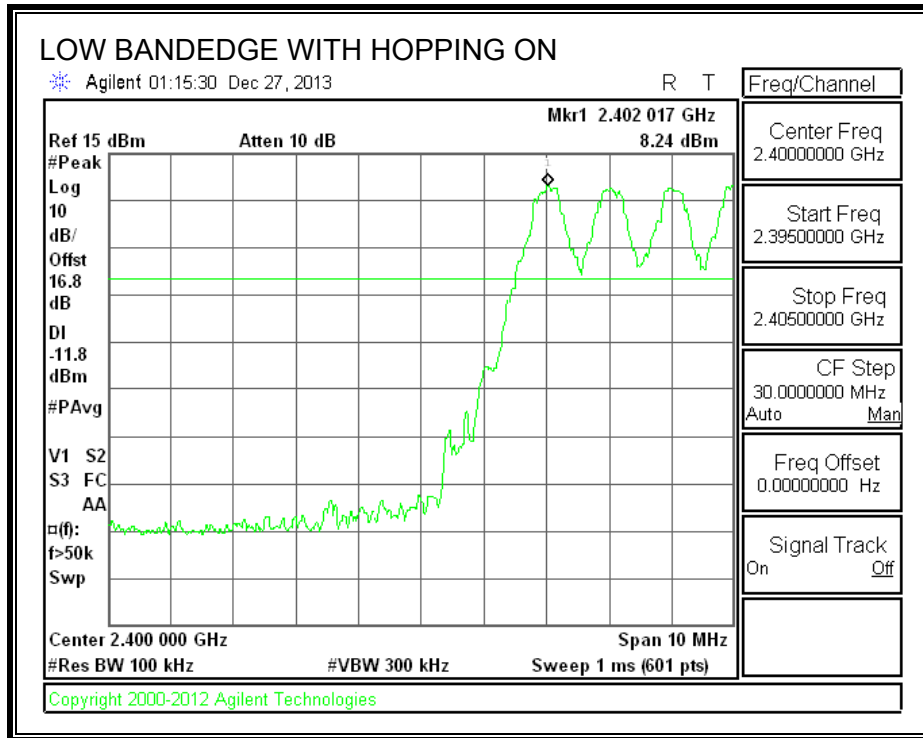


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

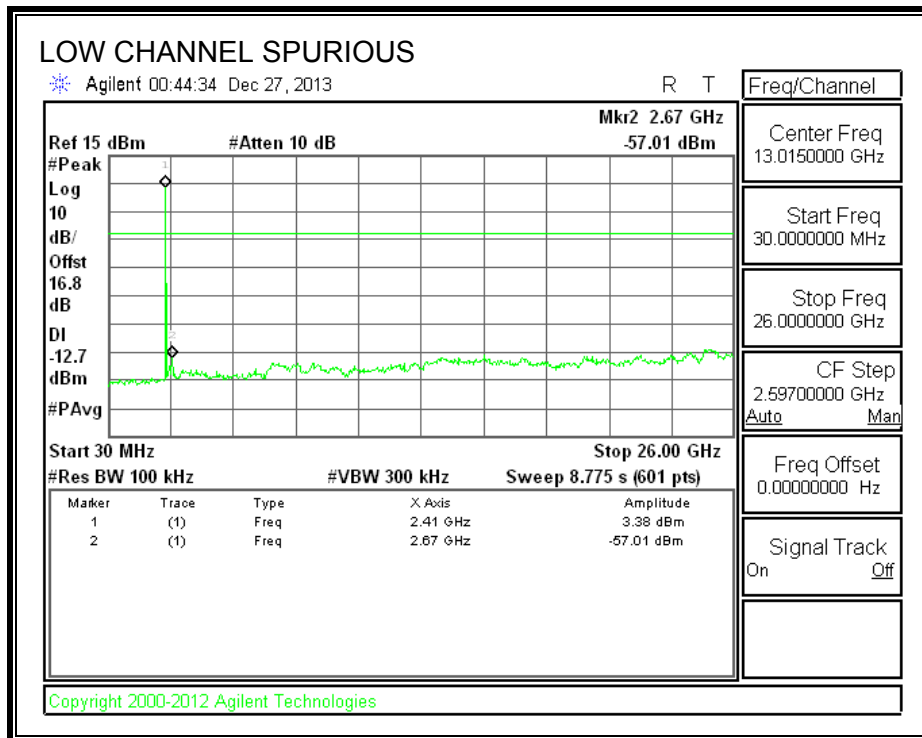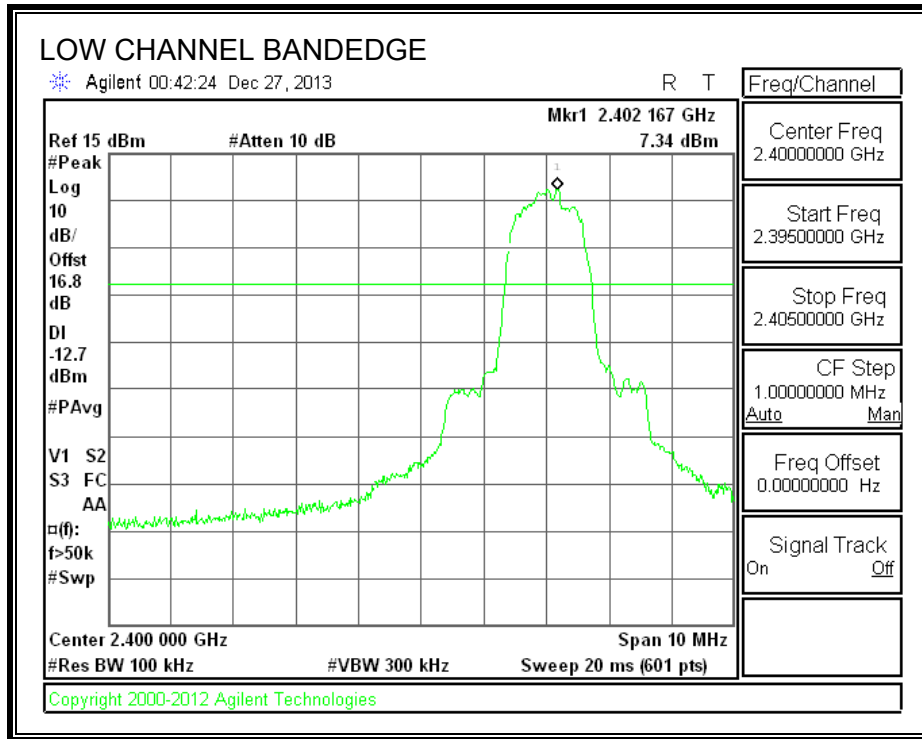



SPURIOUS EMISSIONS, MID CHANNEL

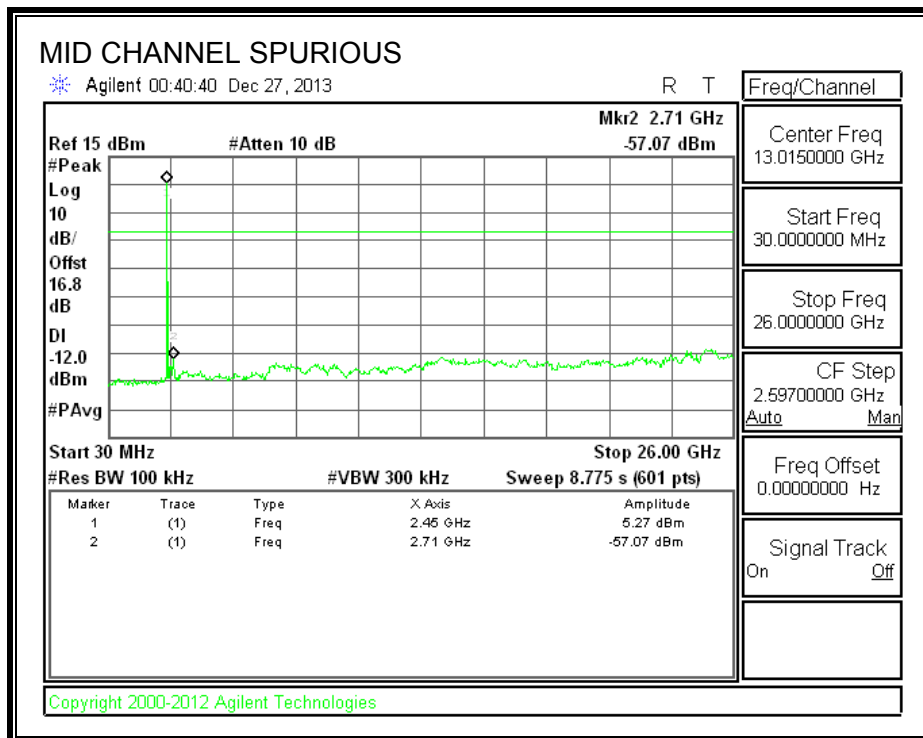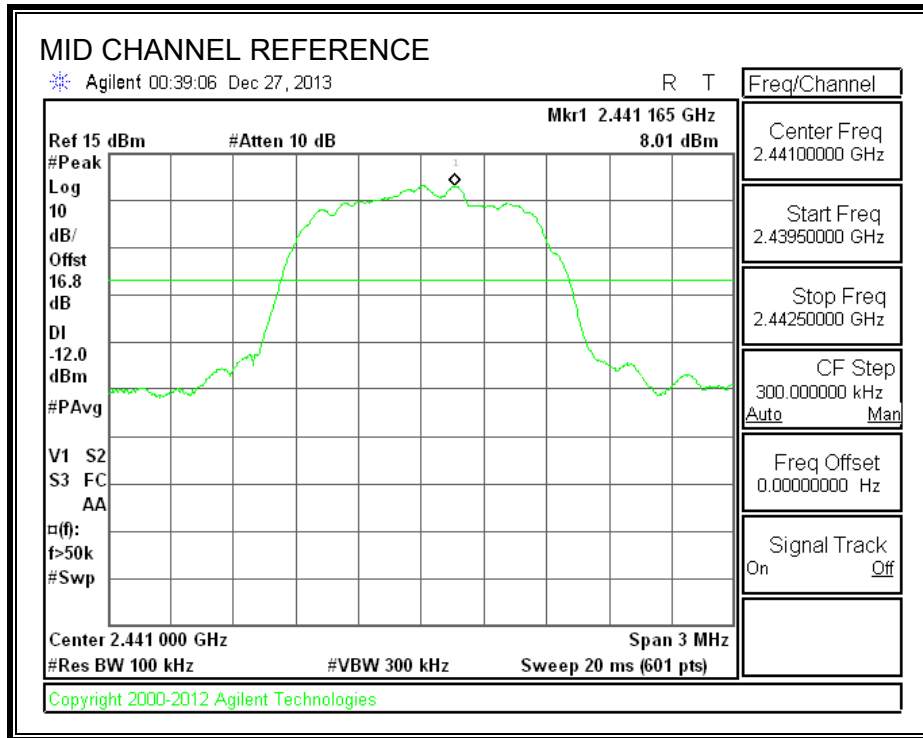

SPURIOUS EMISSIONS, HIGH CHANNEL

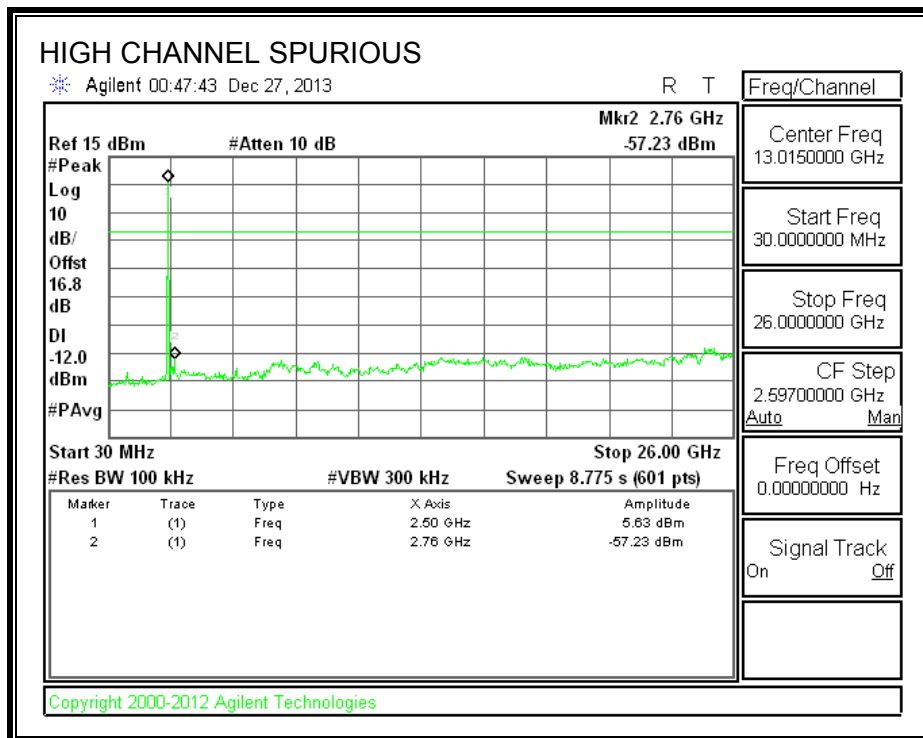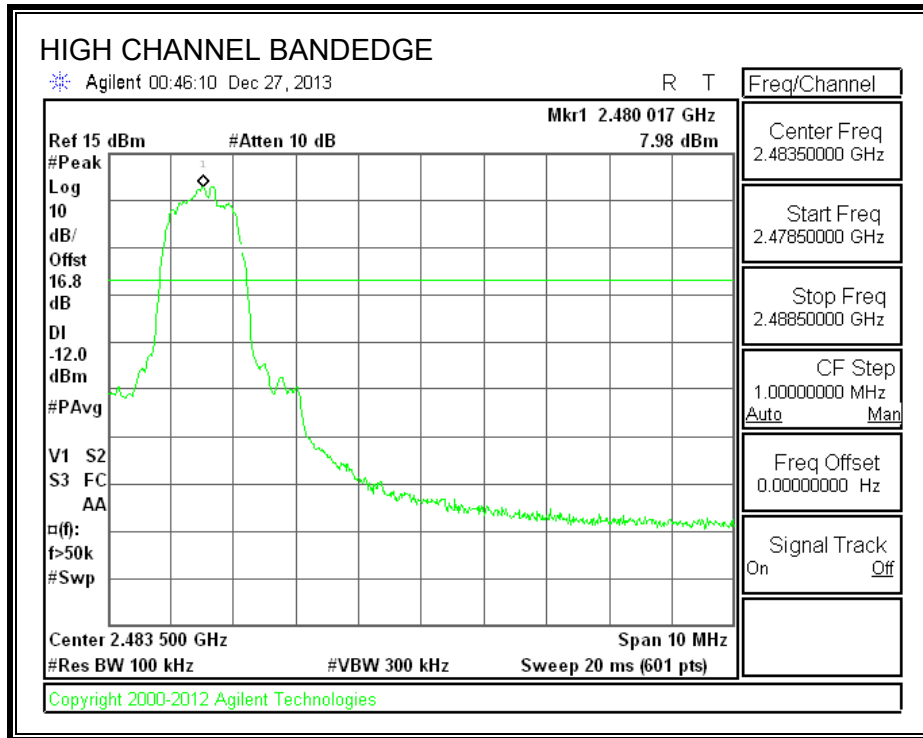

8PSK SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

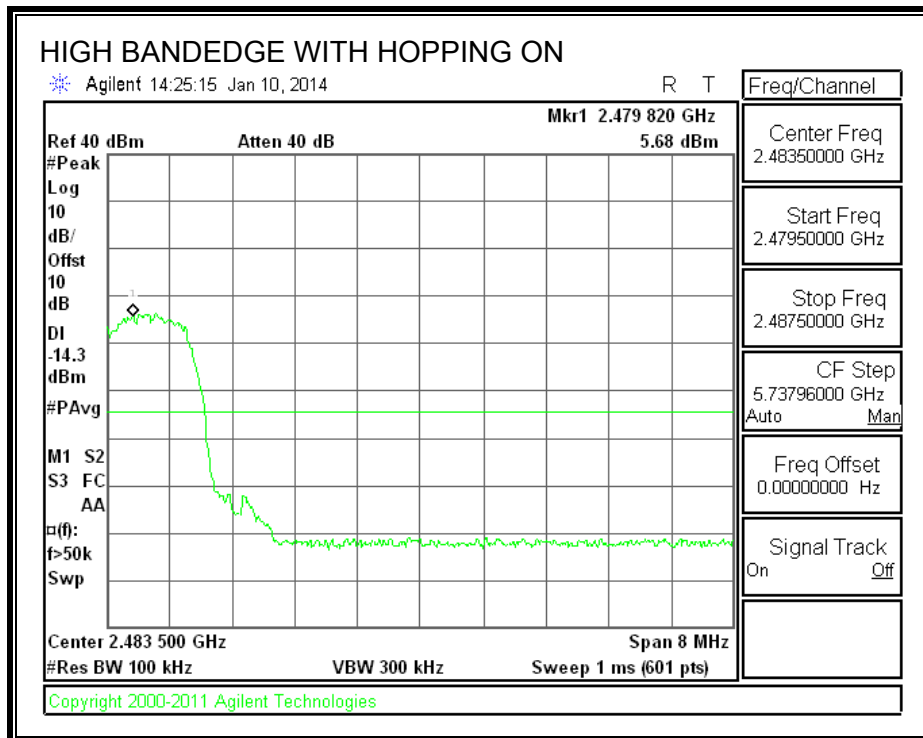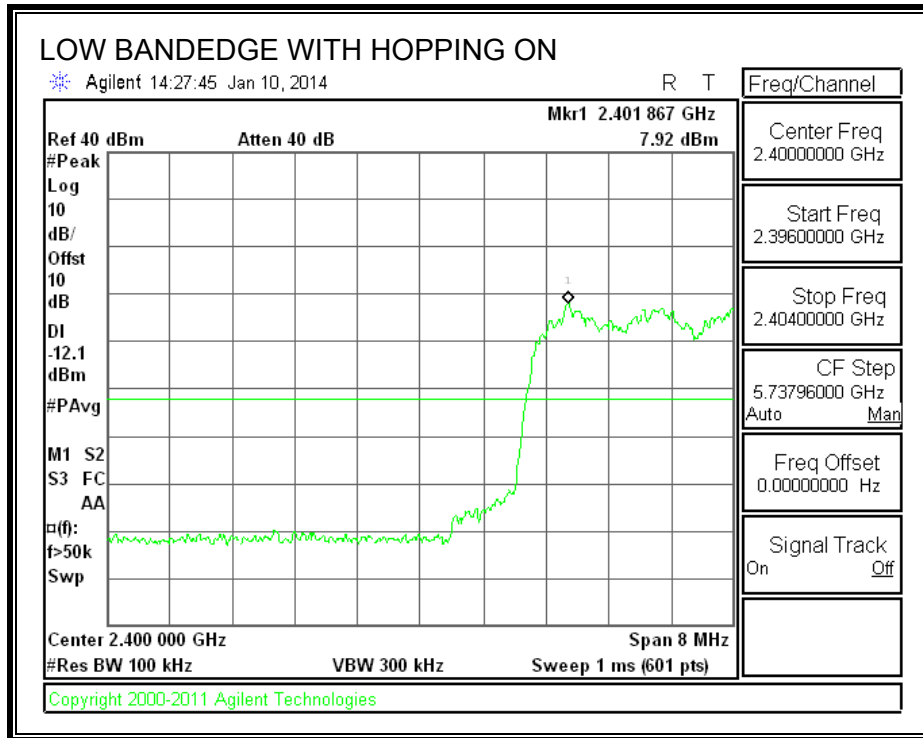

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK = 1/T = 360Hz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

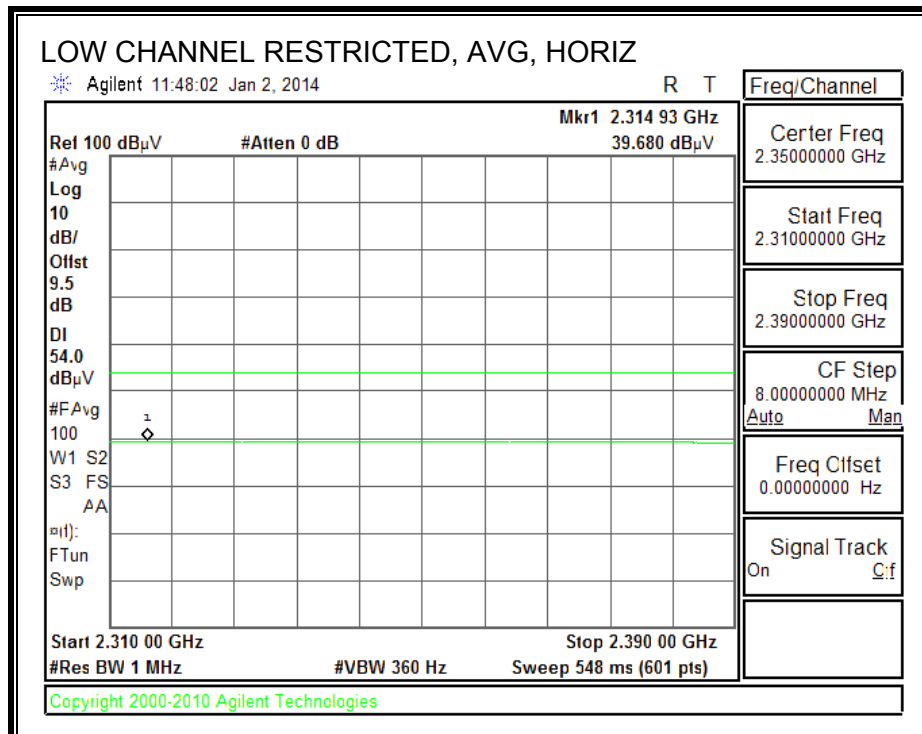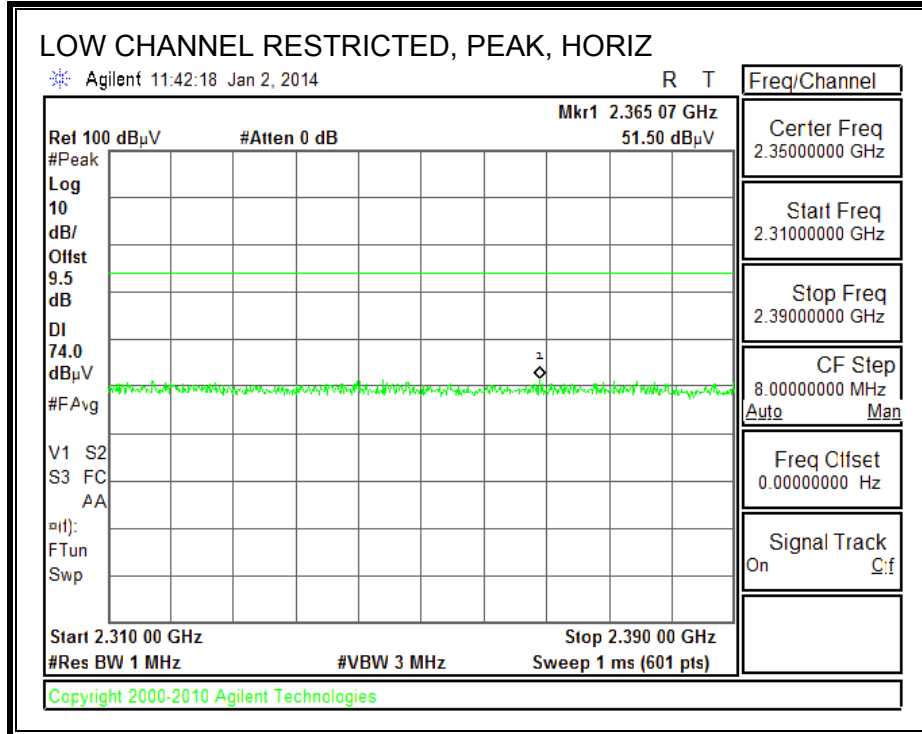



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

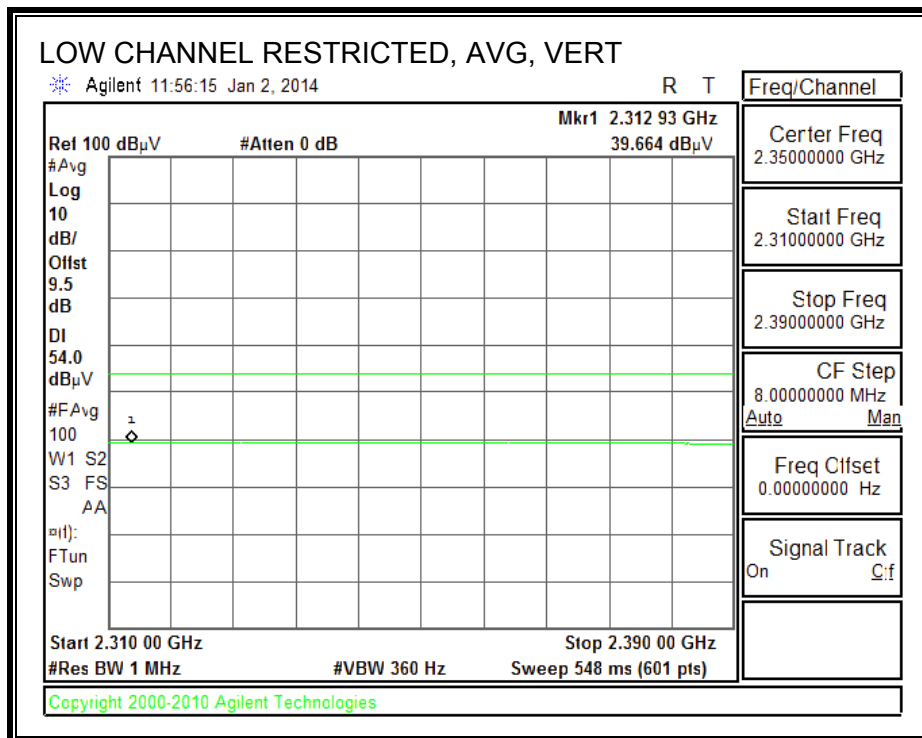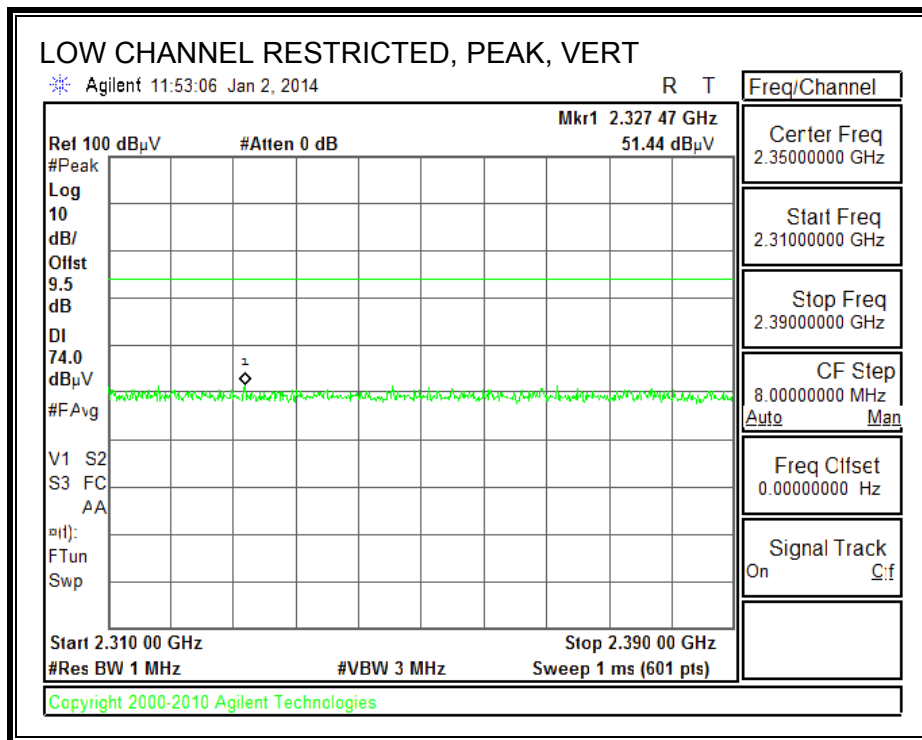

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

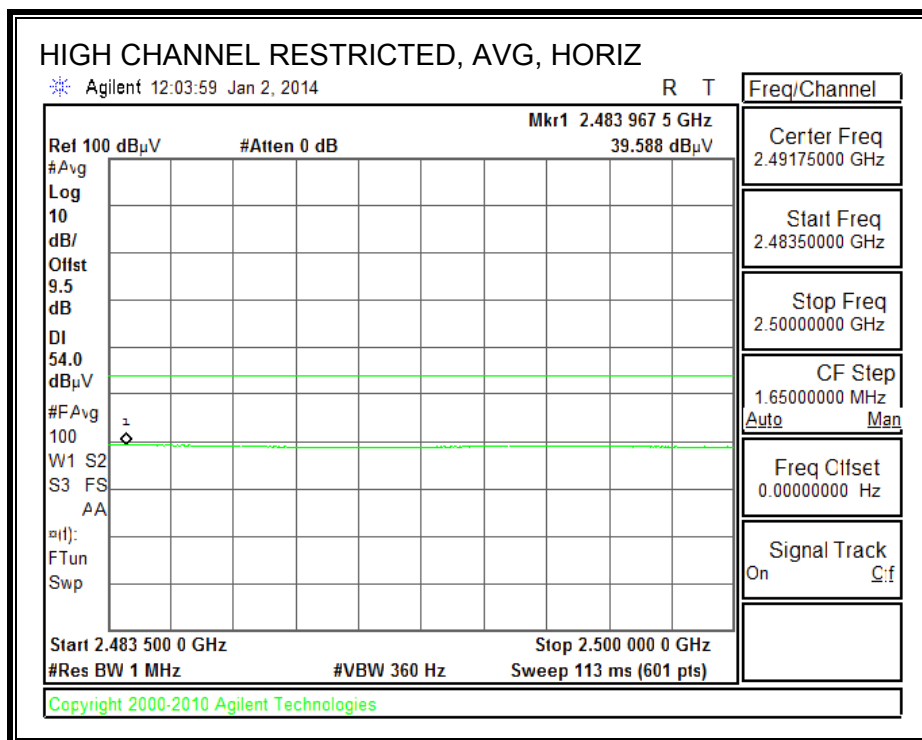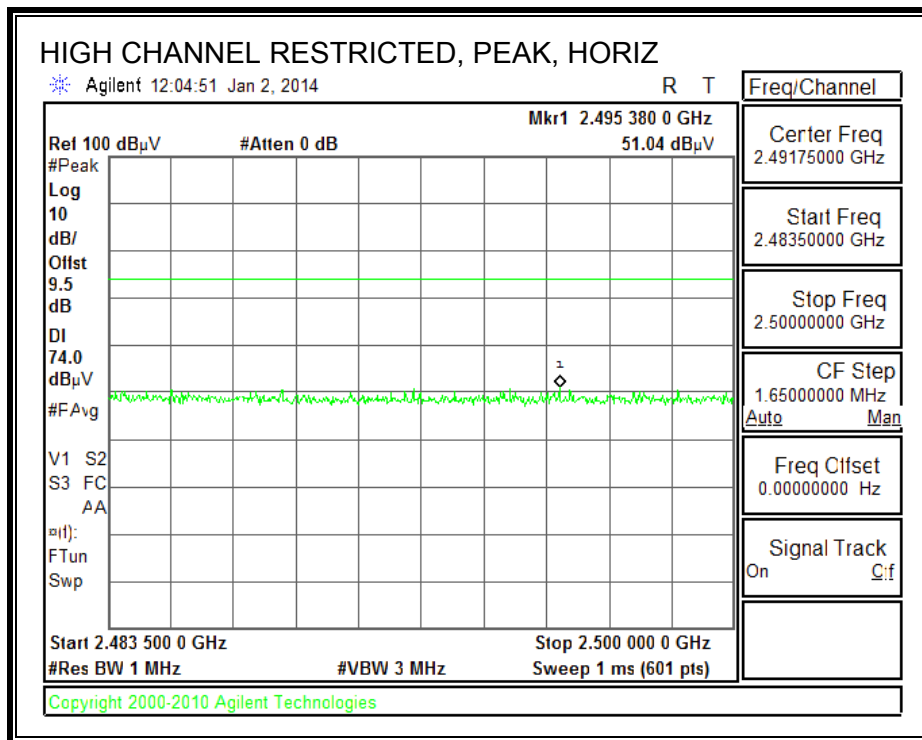


RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

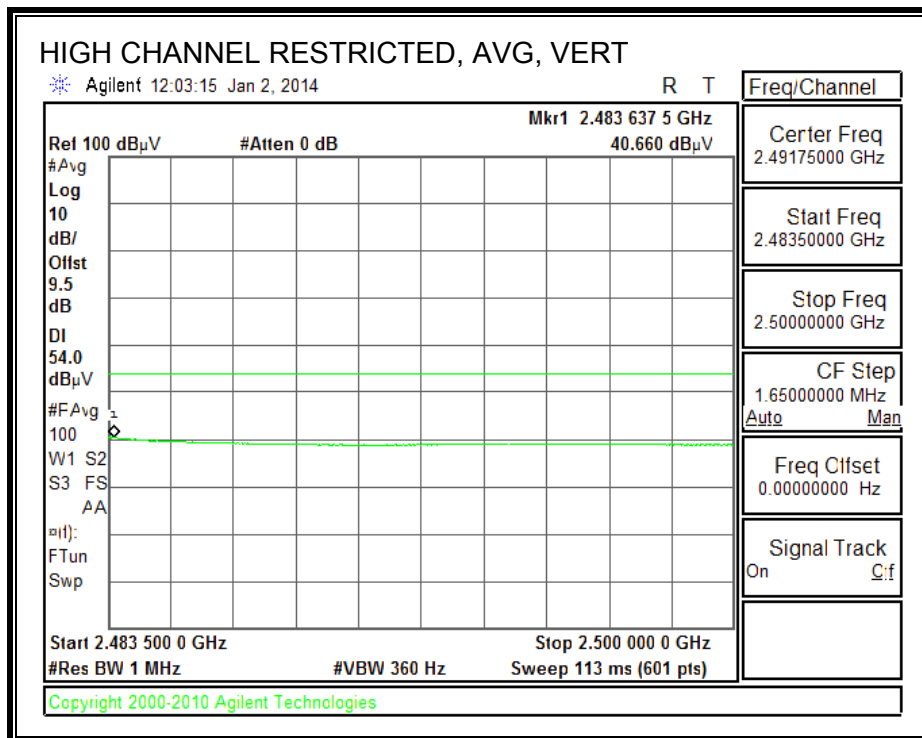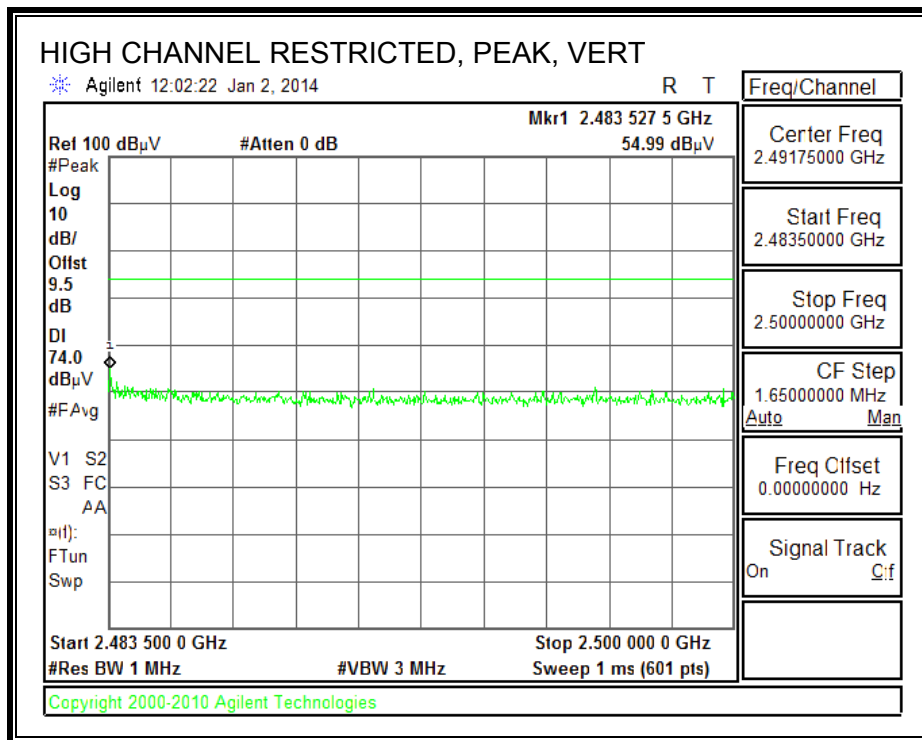


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

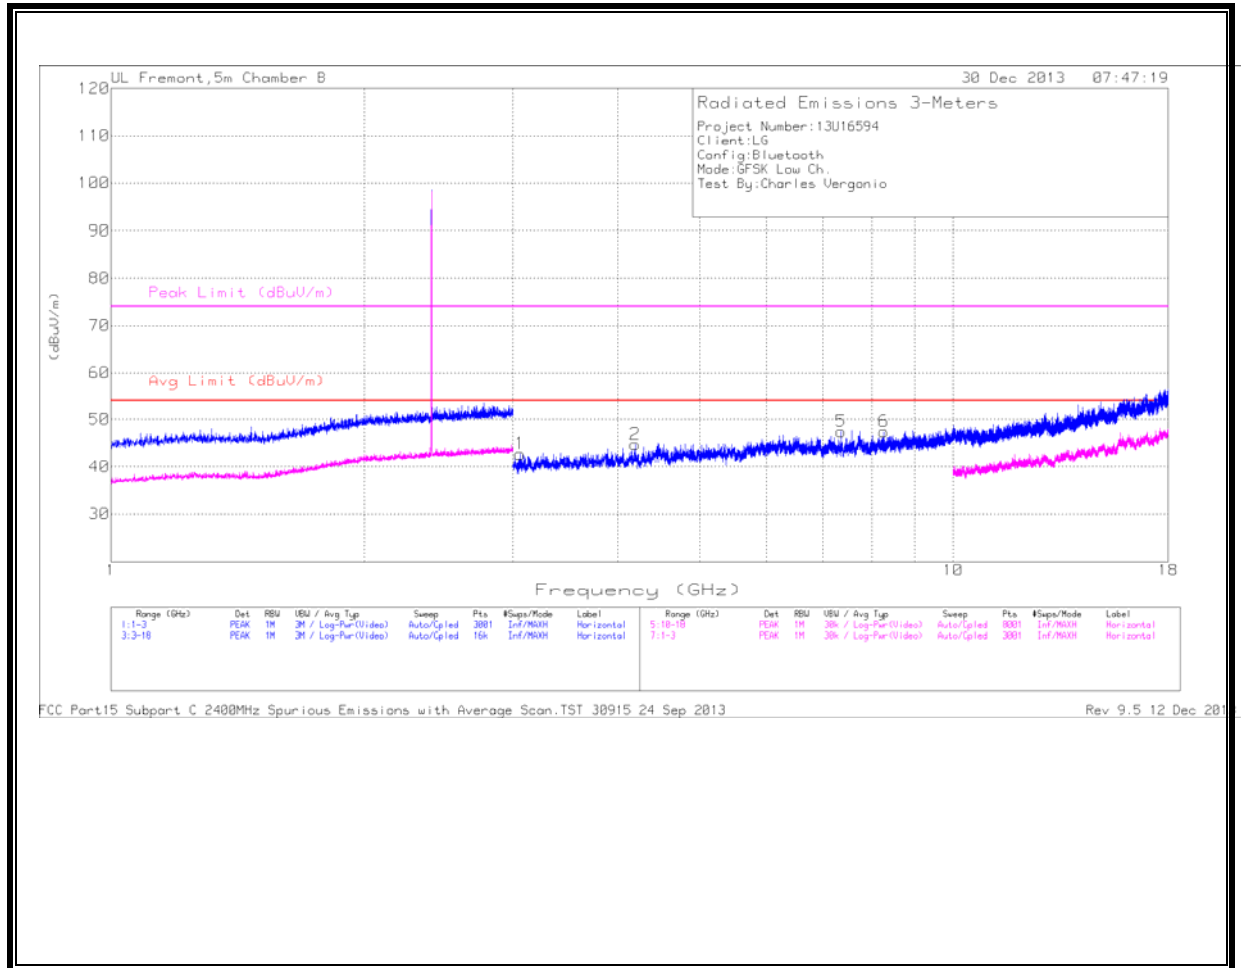

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

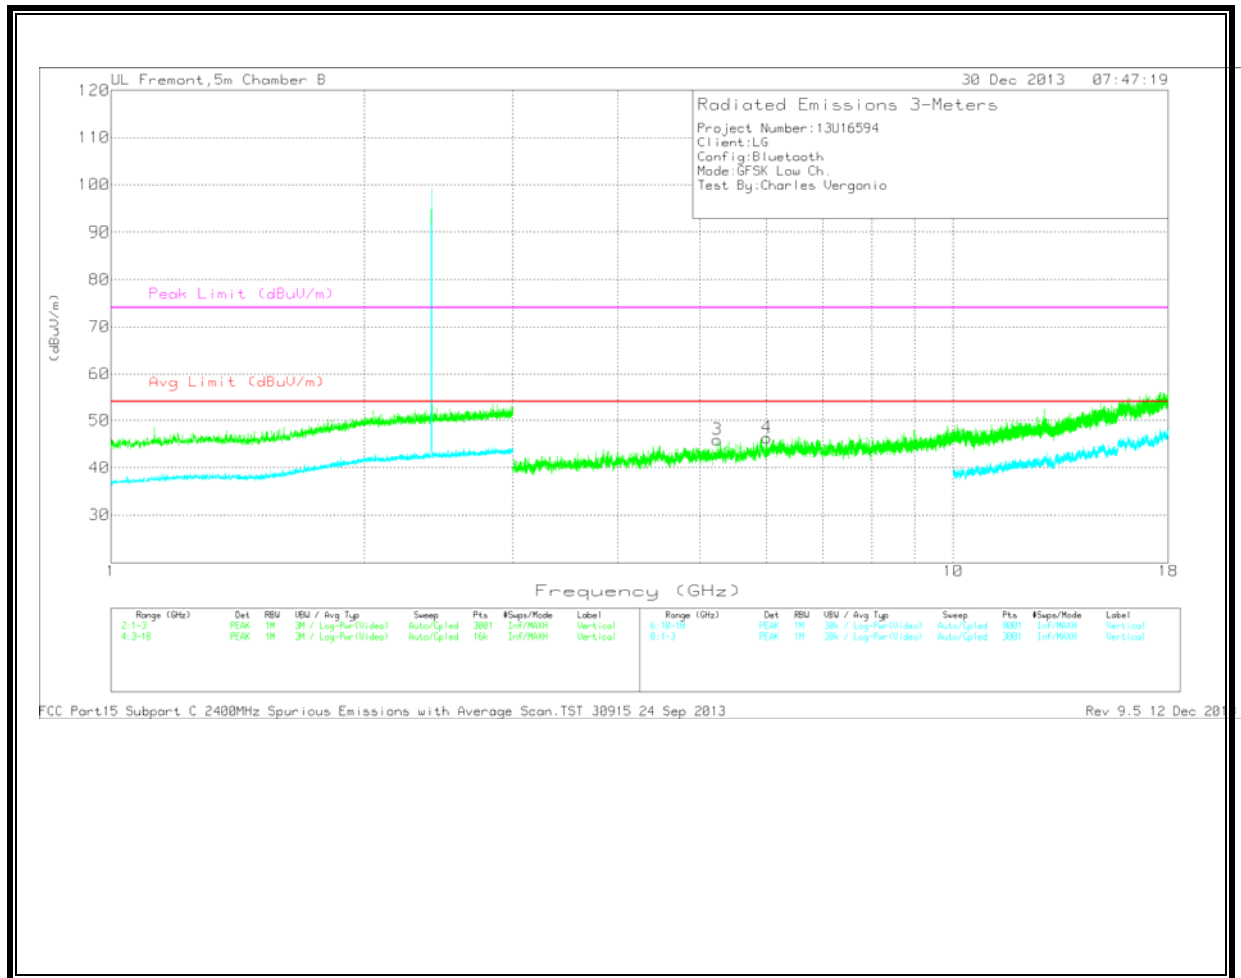

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.06	41.36	PK	33.1	-31.8	42.66	53.97	-11.31	74	-31.34	0-360	99	H
2	4.192	40.37	PK	34.1	-29.8	44.67	53.97	-9.3	74	-29.33	0-360	99	H
3	5.245	40.93	PK	34.9	-29.9	45.93	53.97	-8.04	74	-28.07	0-360	202	V
4	6.008	38.89	PK	35.9	-28.5	46.29	53.97	-7.68	74	-27.71	0-360	99	V
5	7.36	39.52	PK	35.9	-28	47.42	53.97	-6.55	74	-26.58	0-360	201	H
6	8.274	38.01	PK	36.1	-26.7	47.41	53.97	-6.56	74	-26.59	0-360	201	H

PK - Peak detector


FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12 Dec 2013

MID CHANNEL
 HORIZONTAL

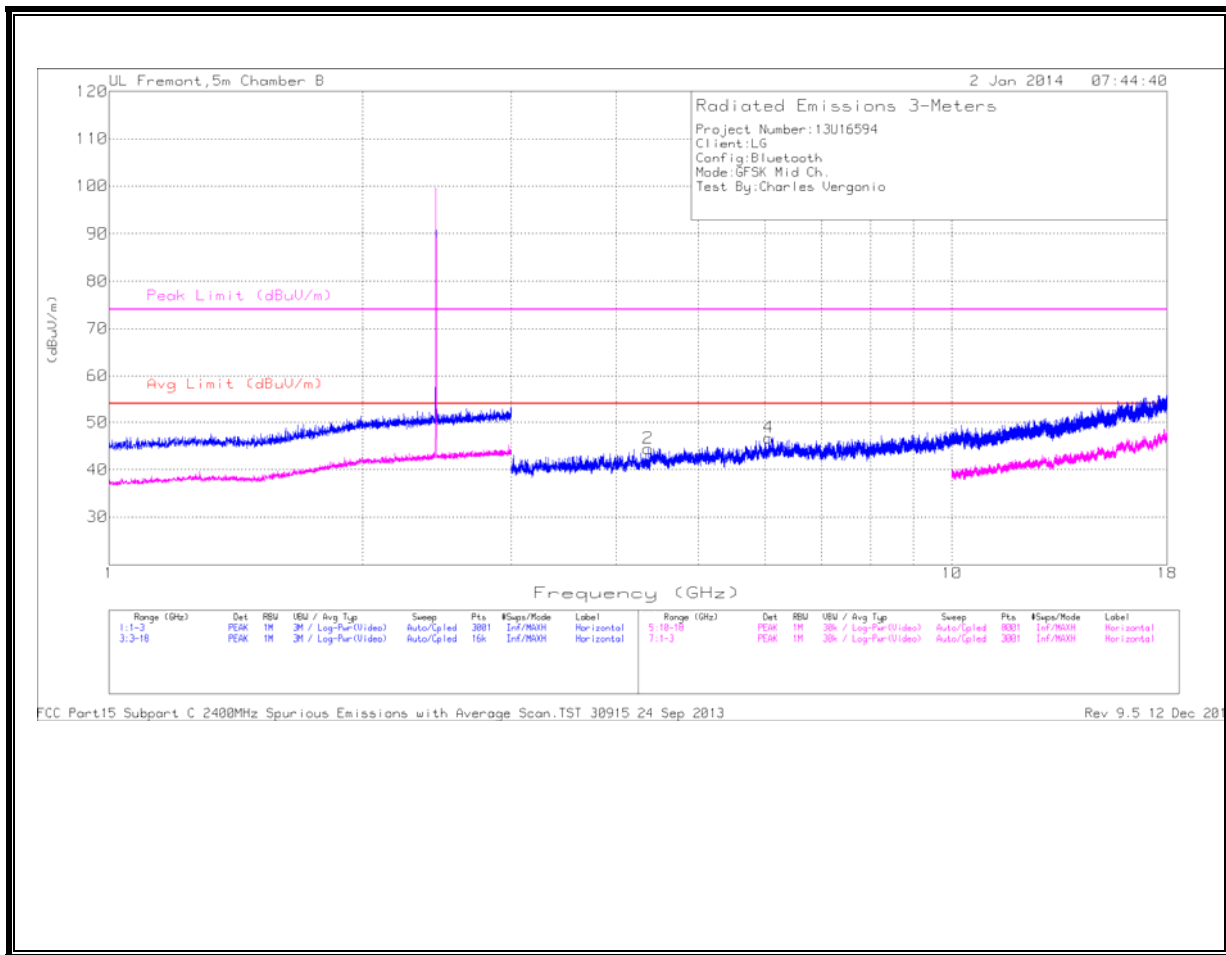

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

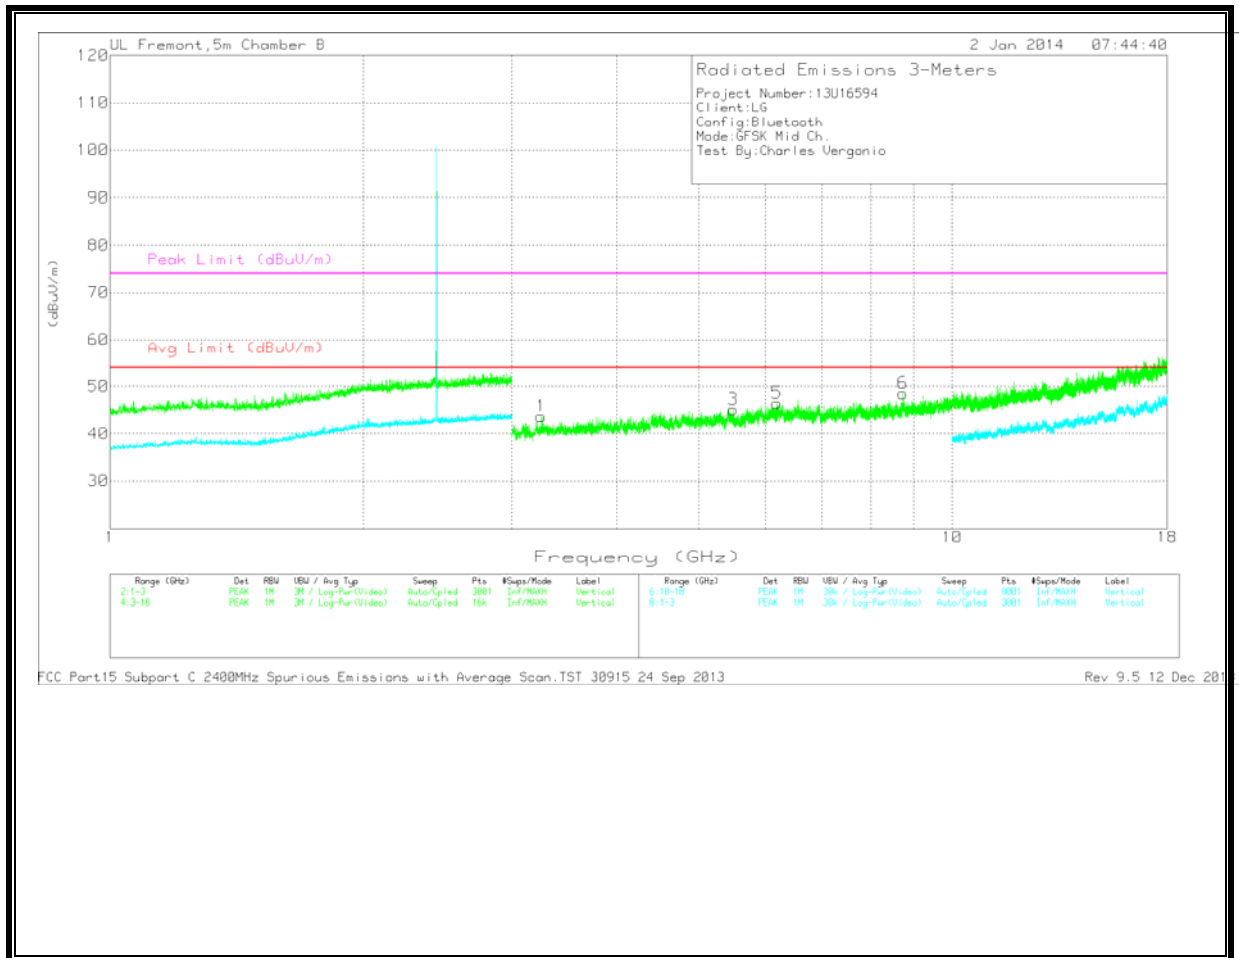

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.25	41.27	PK	33.3	-30.9	43.67	53.97	-10.3	74	-30.33	0-360	202	V
2	4.362	40.97	PK	34.3	-30.8	44.47	53.97	-9.5	74	-29.53	0-360	99	H
3	5.495	40.11	PK	34.9	-29.9	45.11	53.97	-8.86	74	-28.89	0-360	202	V
4	6.06	40.13	PK	35.9	-29.3	46.73	53.97	-7.24	74	-27.27	0-360	201	H
5	6.192	38.63	PK	36	-28.2	46.43	53.97	-7.54	74	-27.57	0-360	99	V
6	8.739	37.22	PK	36.4	-25.1	48.52	53.97	-5.45	74	-25.48	0-360	99	V

PK - Peak detector


FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12 Dec 2013

HIGH CHANNEL
 HORIZONTAL

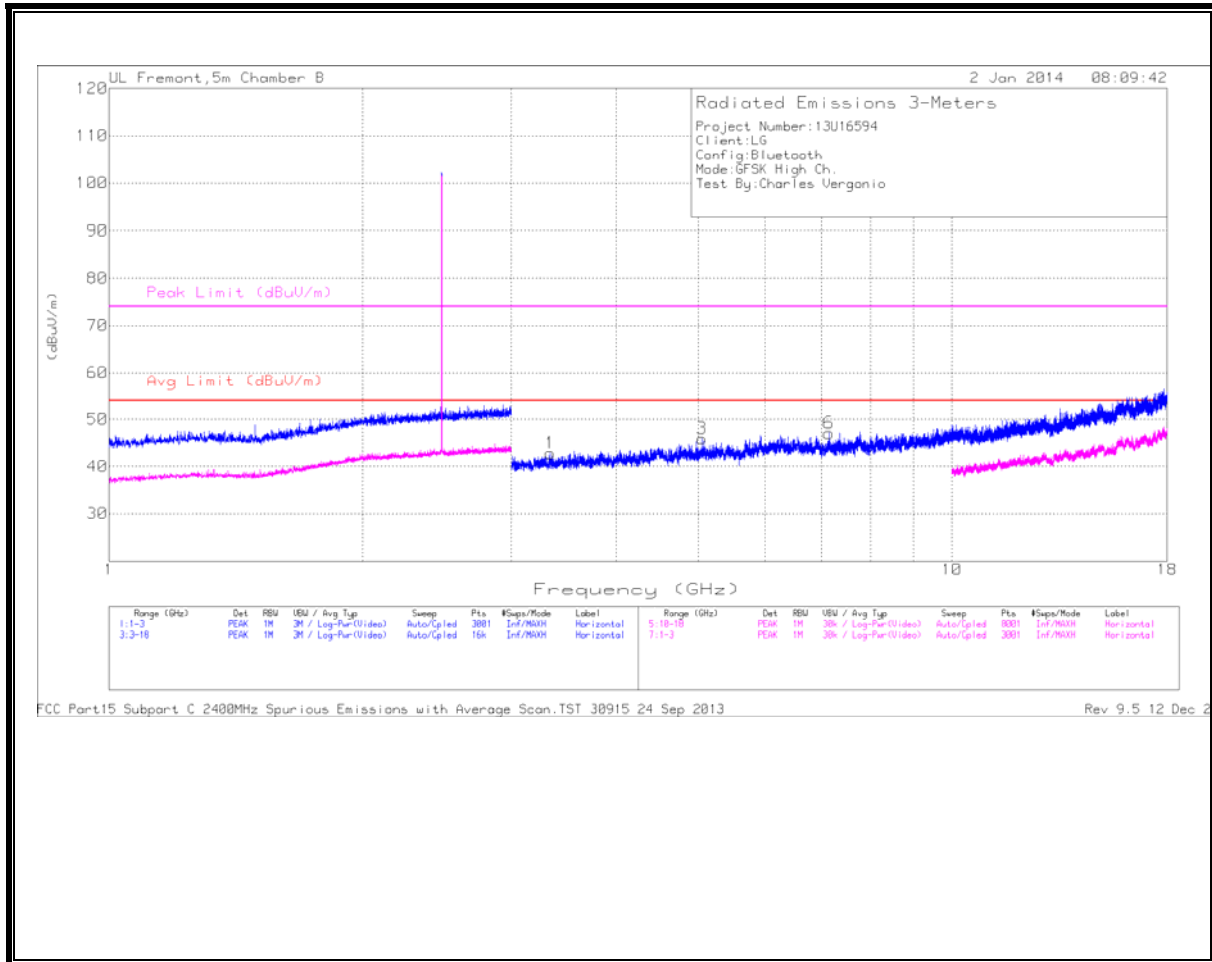

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

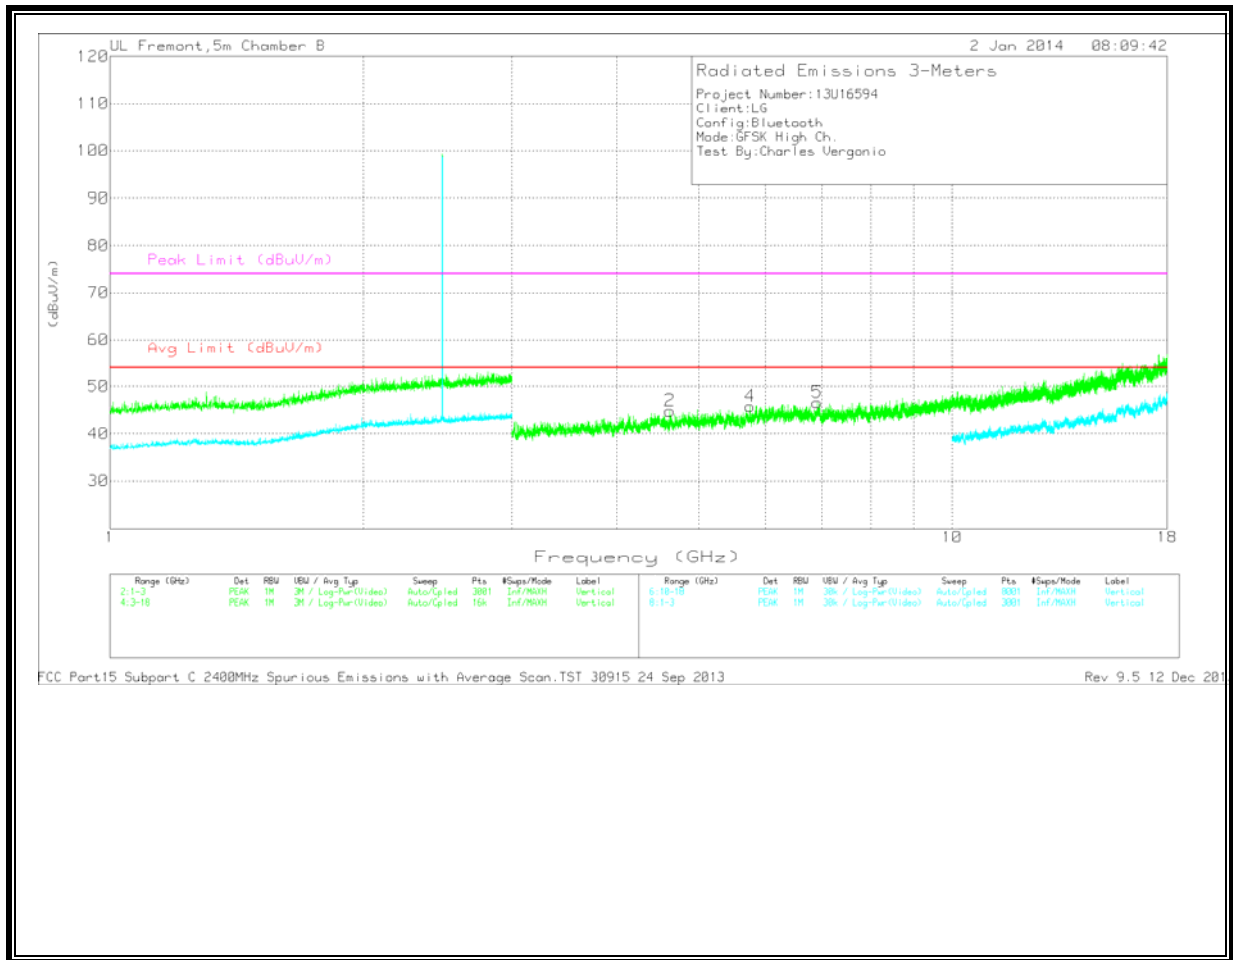

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.337	40.99	PK	33.3	-31.5	42.79	53.97	-11.18	74	-31.21	0-360	99	H
2	4.622	41.1	PK	34.6	-30.9	44.8	53.97	-9.17	74	-29.2	0-360	99	V
3	5.053	40	PK	34.7	-28.8	45.9	53.97	-8.07	74	-28.1	0-360	201	H
4	5.756	39.74	PK	35.2	-29.2	45.74	53.97	-8.23	74	-28.26	0-360	99	V
5	6.915	37.98	PK	35.9	-27.3	46.58	53.97	-7.39	74	-27.42	0-360	202	V
6	7.144	38.63	PK	35.8	-27.4	47.03	53.97	-6.94	74	-26.97	0-360	99	H

PK - Peak detector



FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12 Dec 2013

9.2.2. ENHANCED DATA RATE 8PSK MODULATION



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

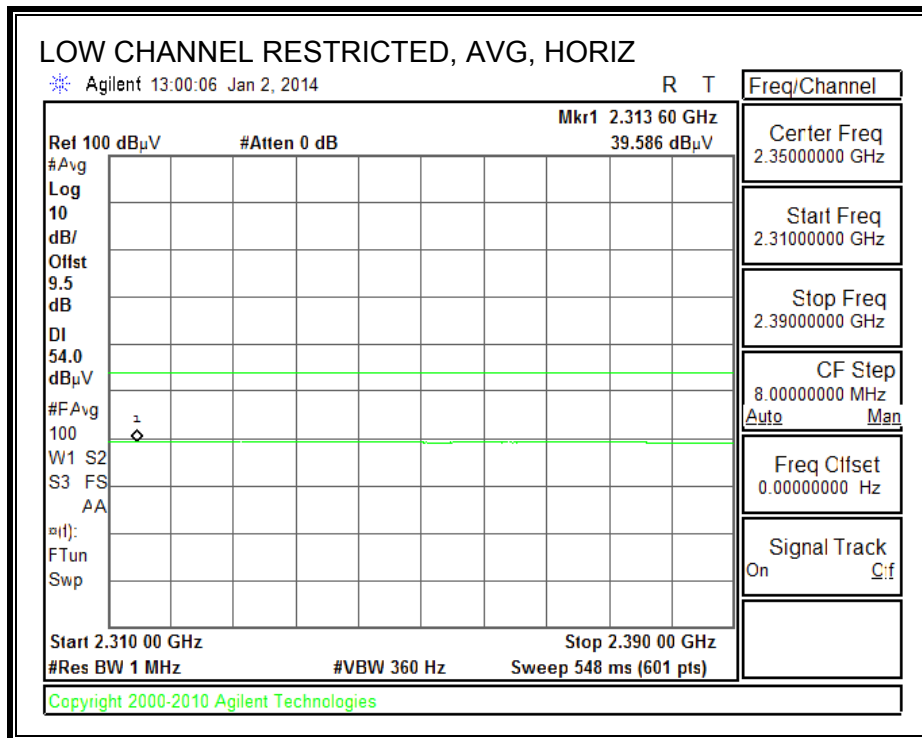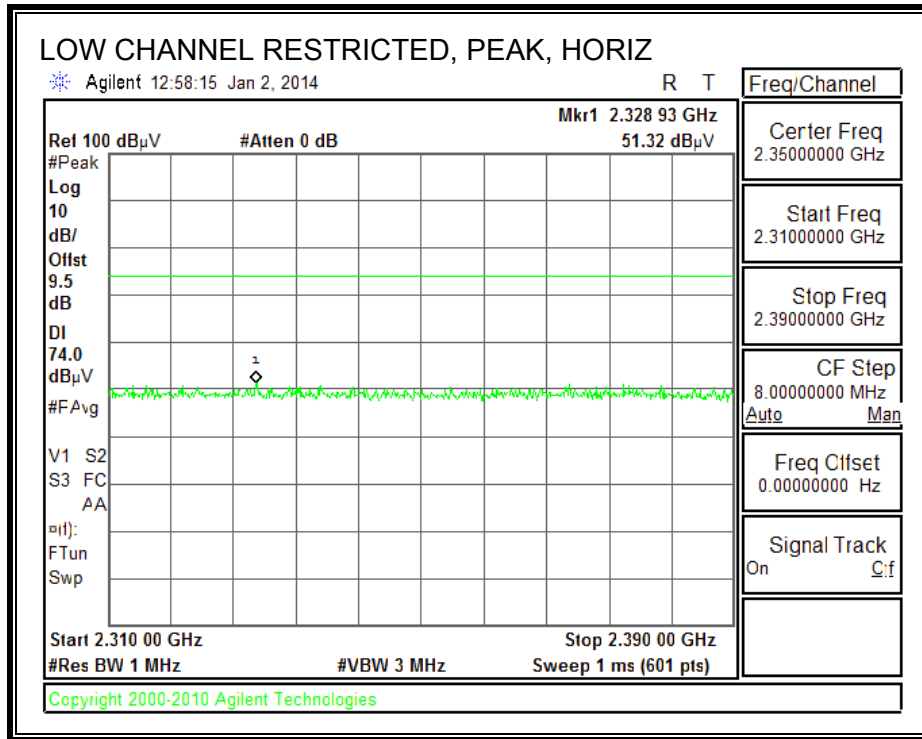



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

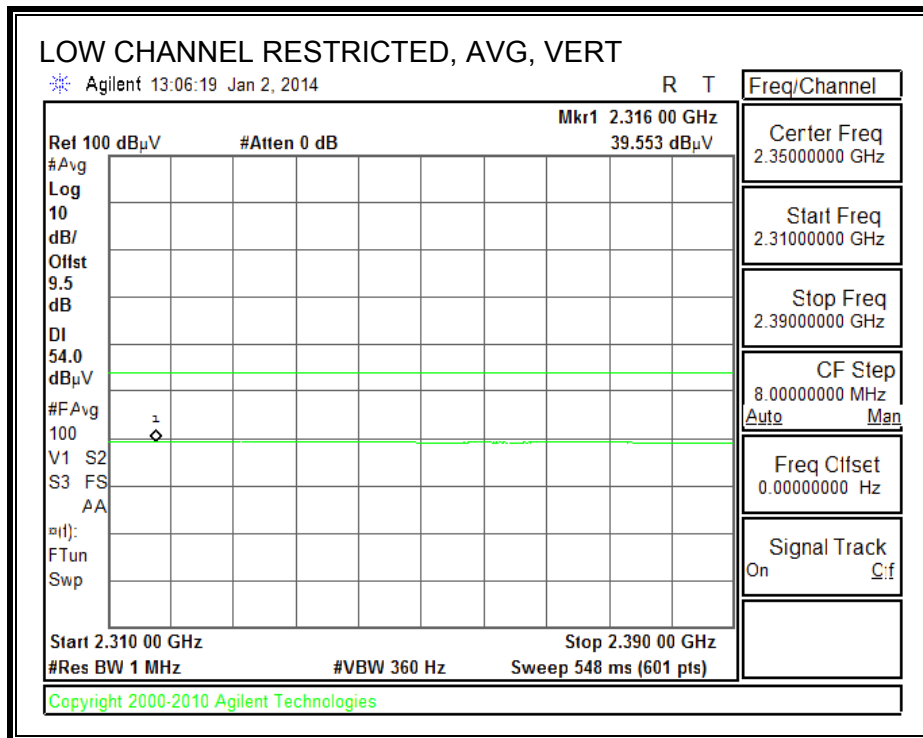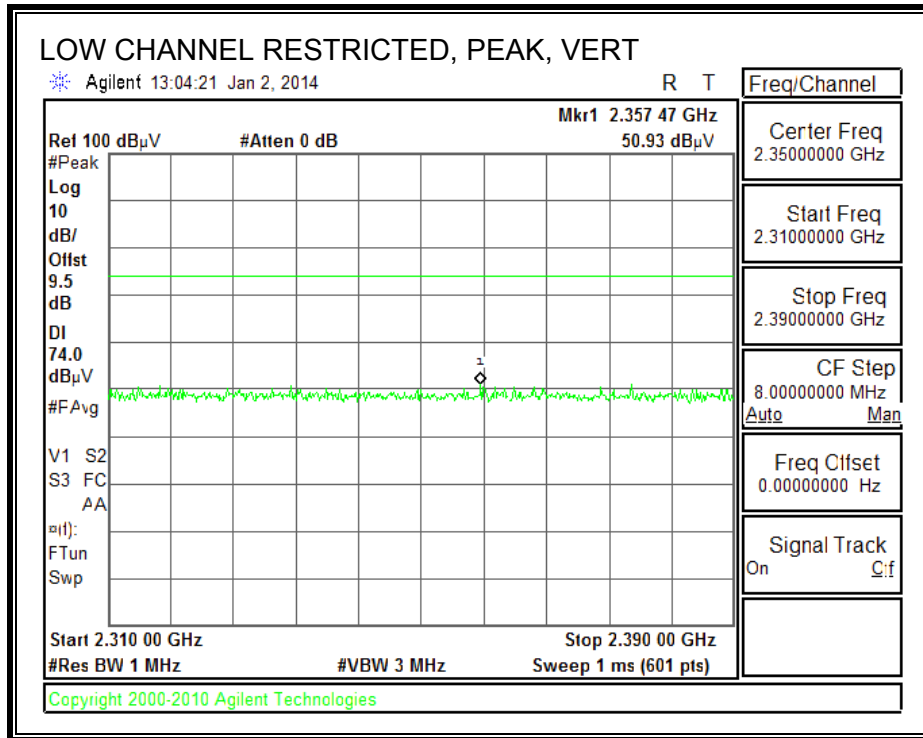

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

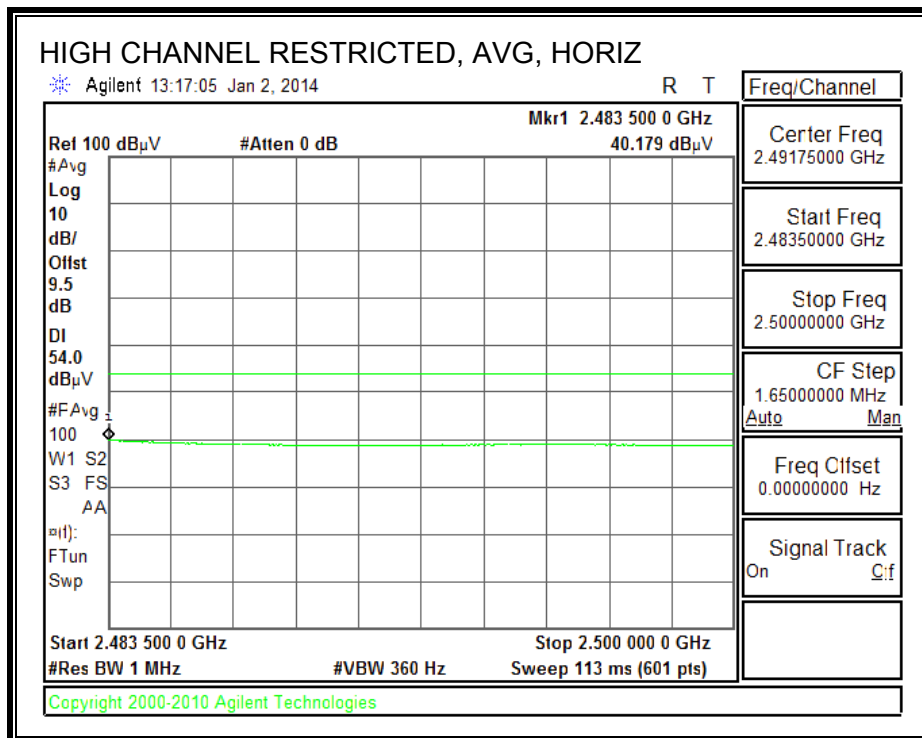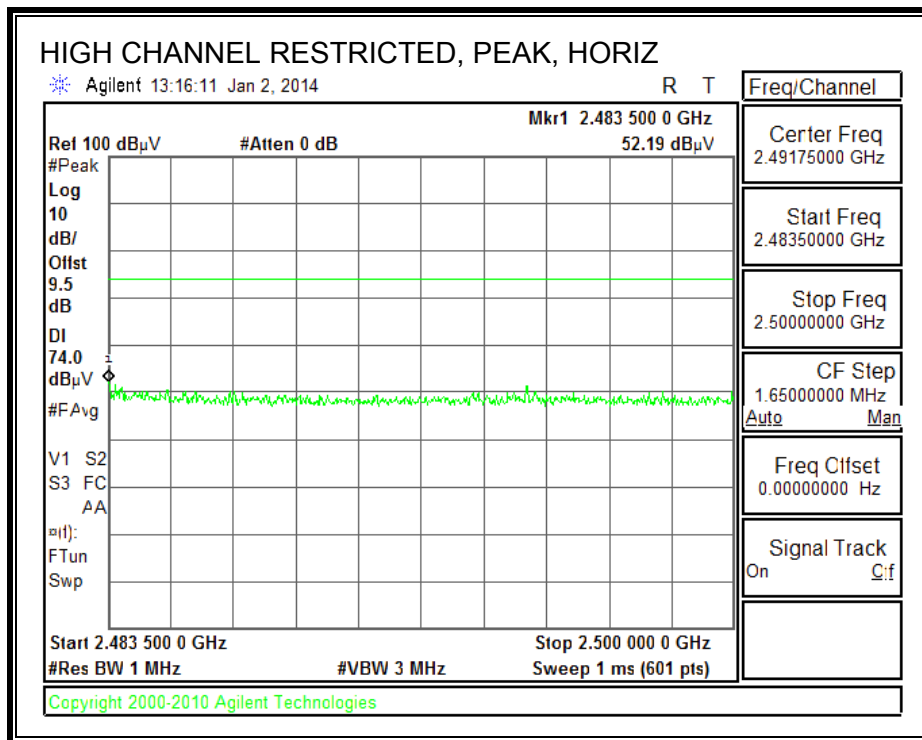


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

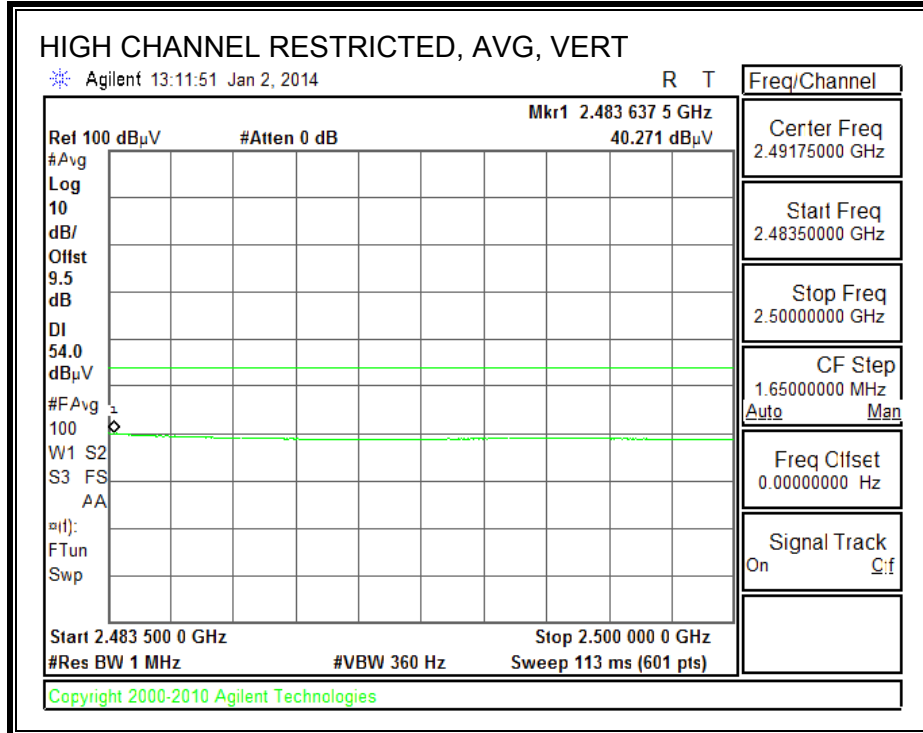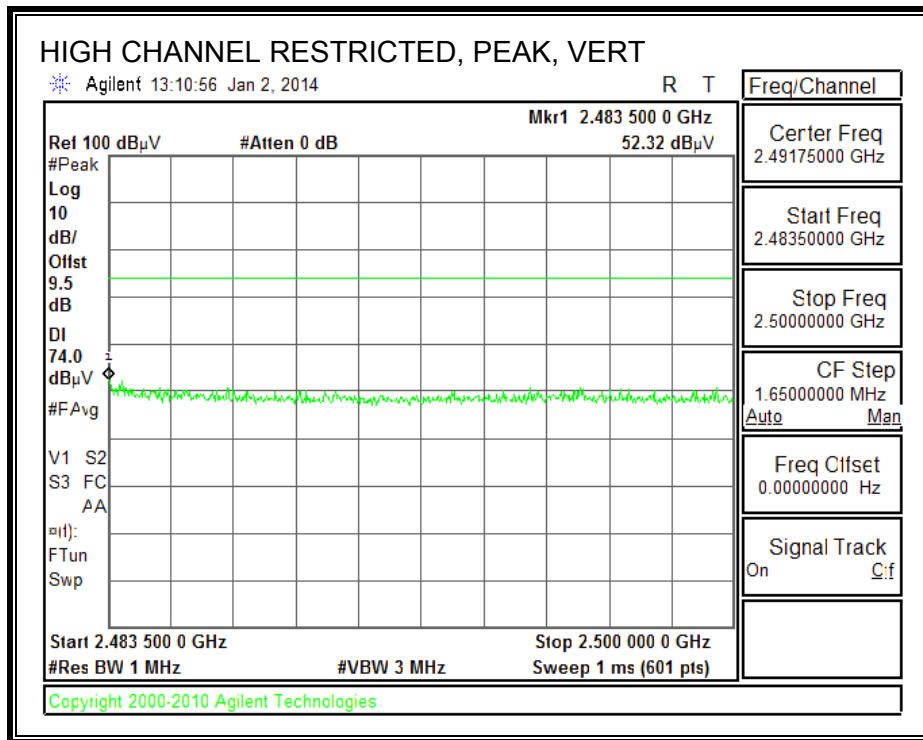


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

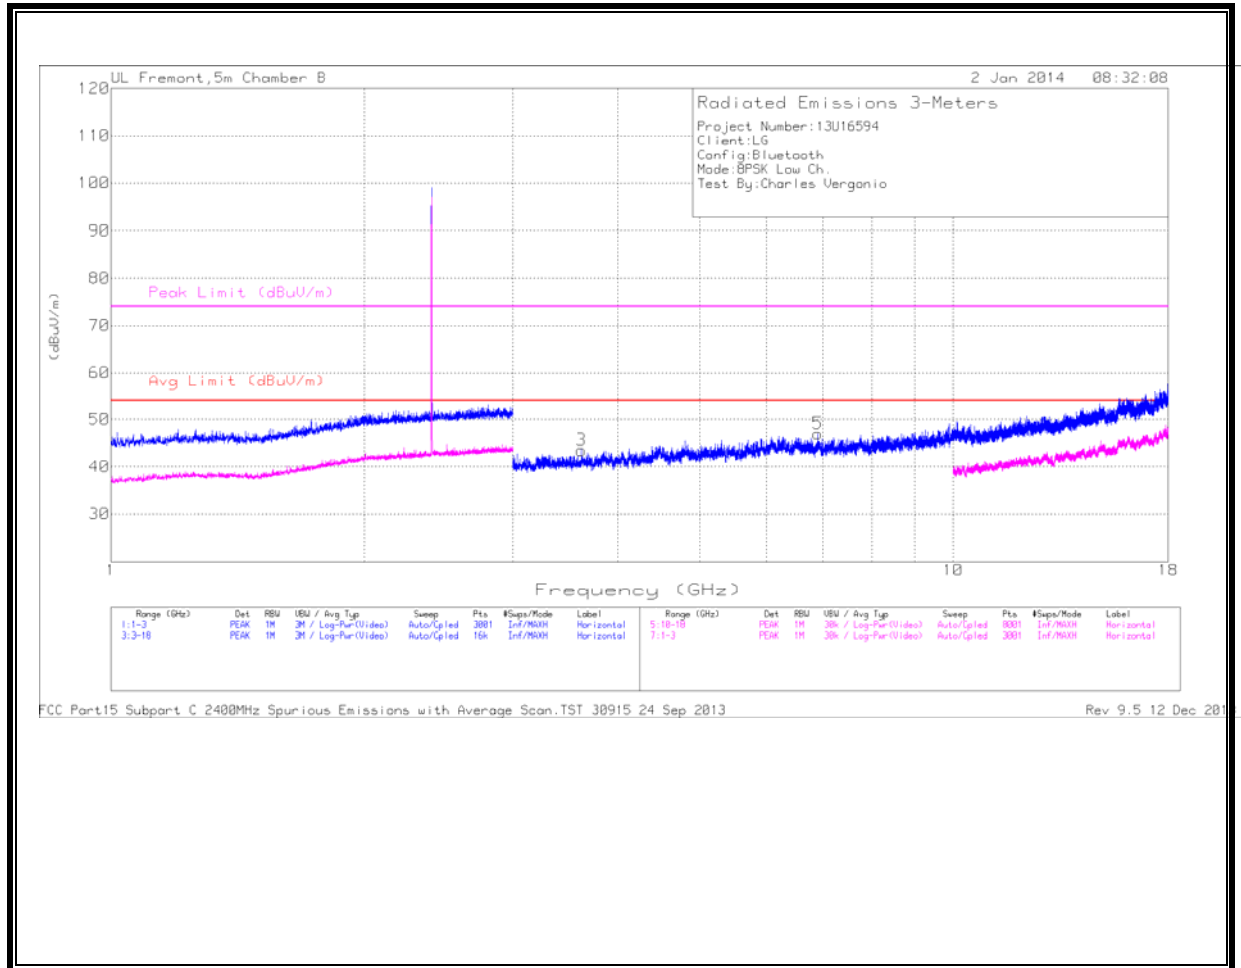

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

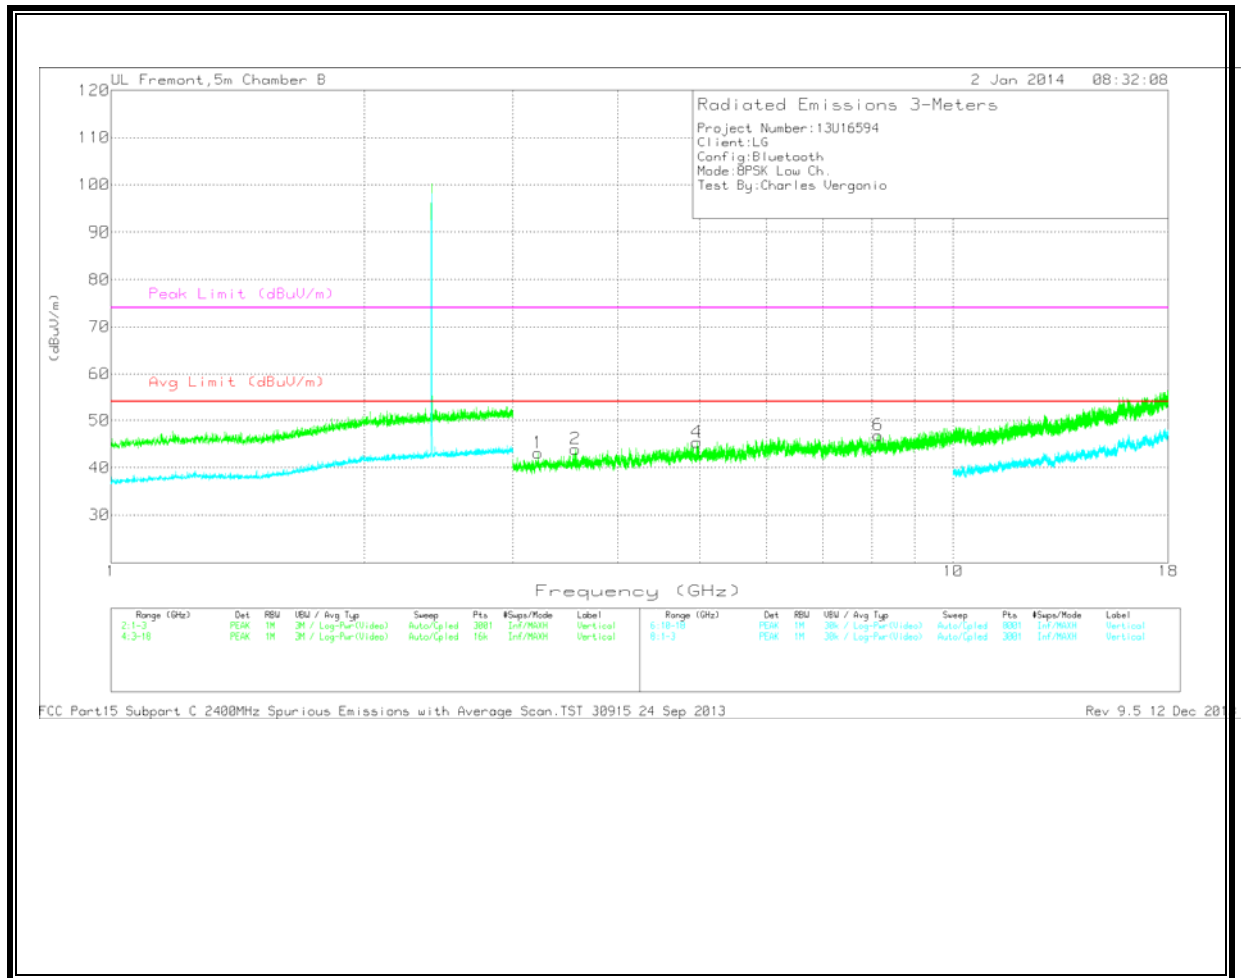

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.214	40.9	PK	33.3	-31.1	43.1	53.97	-10.87	74	-30.9	0-360	202	V
2	3.561	41.73	PK	33.3	-31.1	43.93	53.97	-10.04	74	-30.07	0-360	99	V
3	3.62	41.15	PK	33.5	-31.2	43.45	53.97	-10.52	74	-30.55	0-360	202	H
4	4.96	40.95	PK	34.6	-30.2	45.35	53.97	-8.62	74	-28.65	0-360	99	V
5	6.907	38.15	PK	35.9	-27.1	46.95	53.97	-7.02	74	-27.05	0-360	99	H
6	8.146	37.37	PK	36.1	-26.6	46.87	53.97	-7.1	74	-27.13	0-360	202	V

PK - Peak detector


FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12
 Dec 2013

MID CHANNEL
 HORIZONTAL

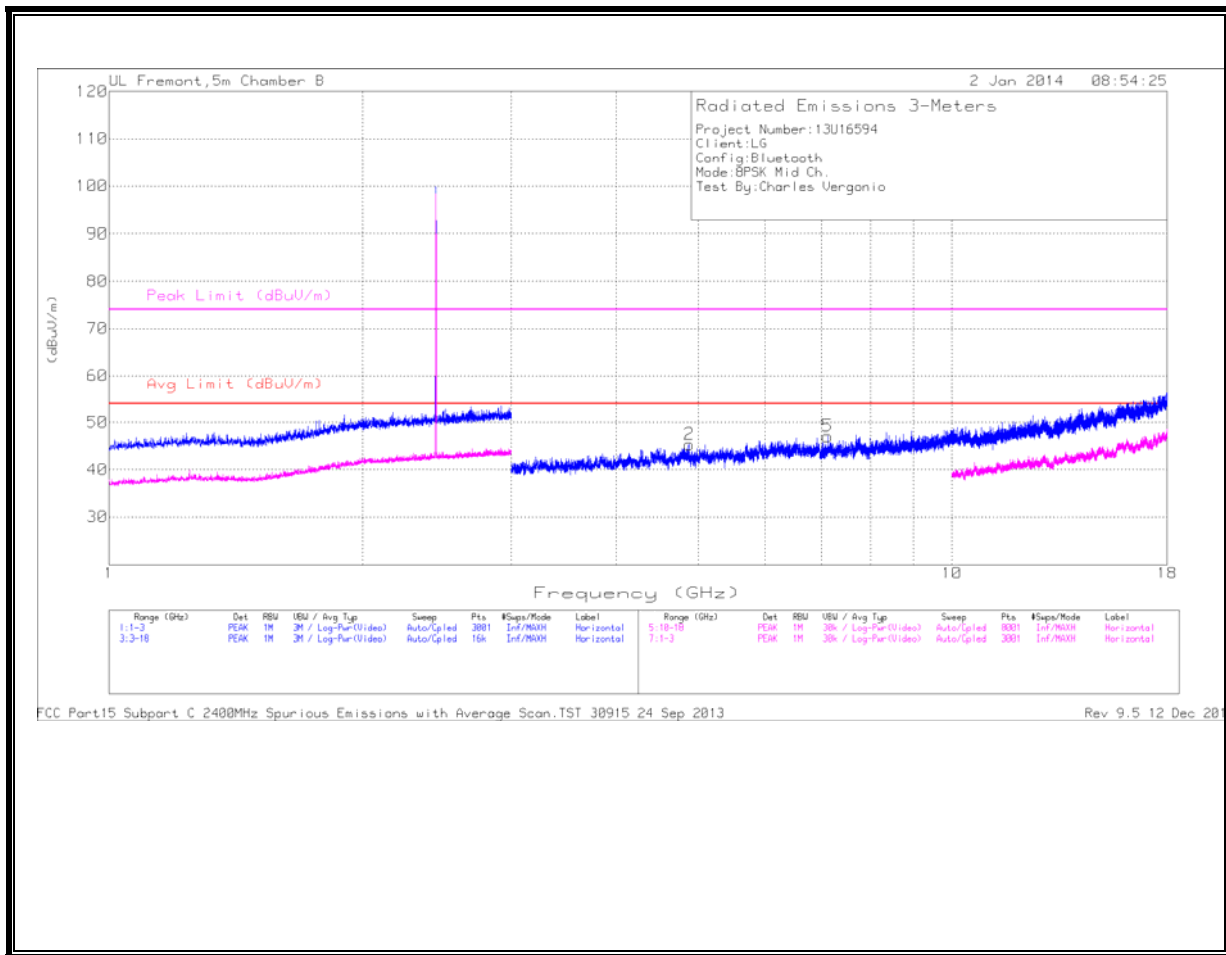

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

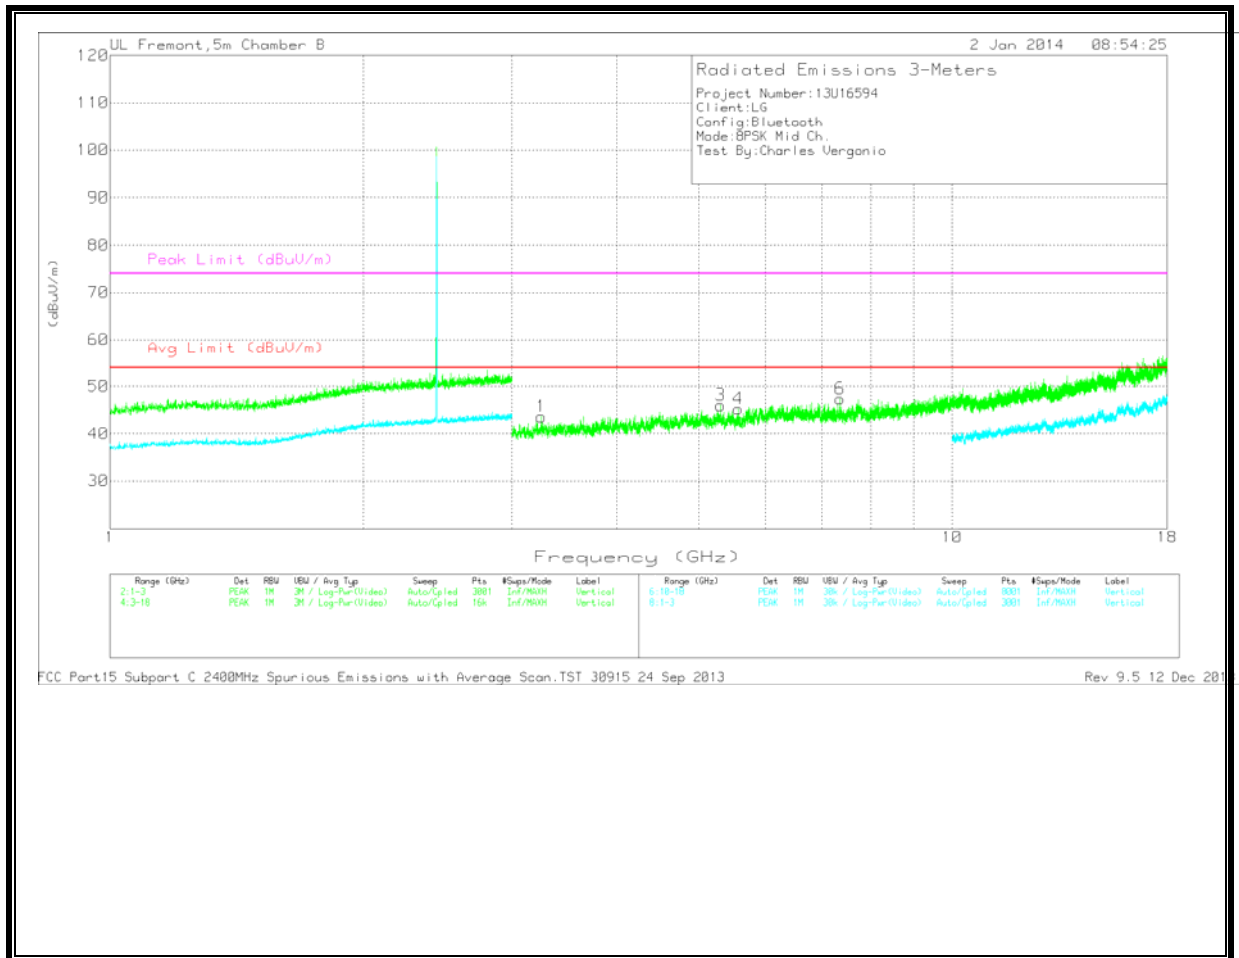

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.253	41.19	PK	33.3	-30.9	43.59	53.97	-10.38	74	-30.41	0-360	99	V
2	4.881	41.3	PK	34.6	-30.6	45.3	53.97	-8.67	74	-28.7	0-360	201	H
3	5.307	39.79	PK	34.9	-28.7	45.99	53.97	-7.98	74	-28.01	0-360	99	V
4	5.573	39.72	PK	35	-29.5	45.22	53.97	-8.75	74	-28.78	0-360	99	V
5	7.118	38.23	PK	35.9	-27.1	47.03	53.97	-6.94	74	-26.97	0-360	99	H
6	7.359	39.43	PK	35.9	-28	47.33	53.97	-6.64	74	-26.67	0-360	99	V

PK - Peak detector


FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12
 Dec 2013

HIGH CHANNEL
 HORIZONTAL

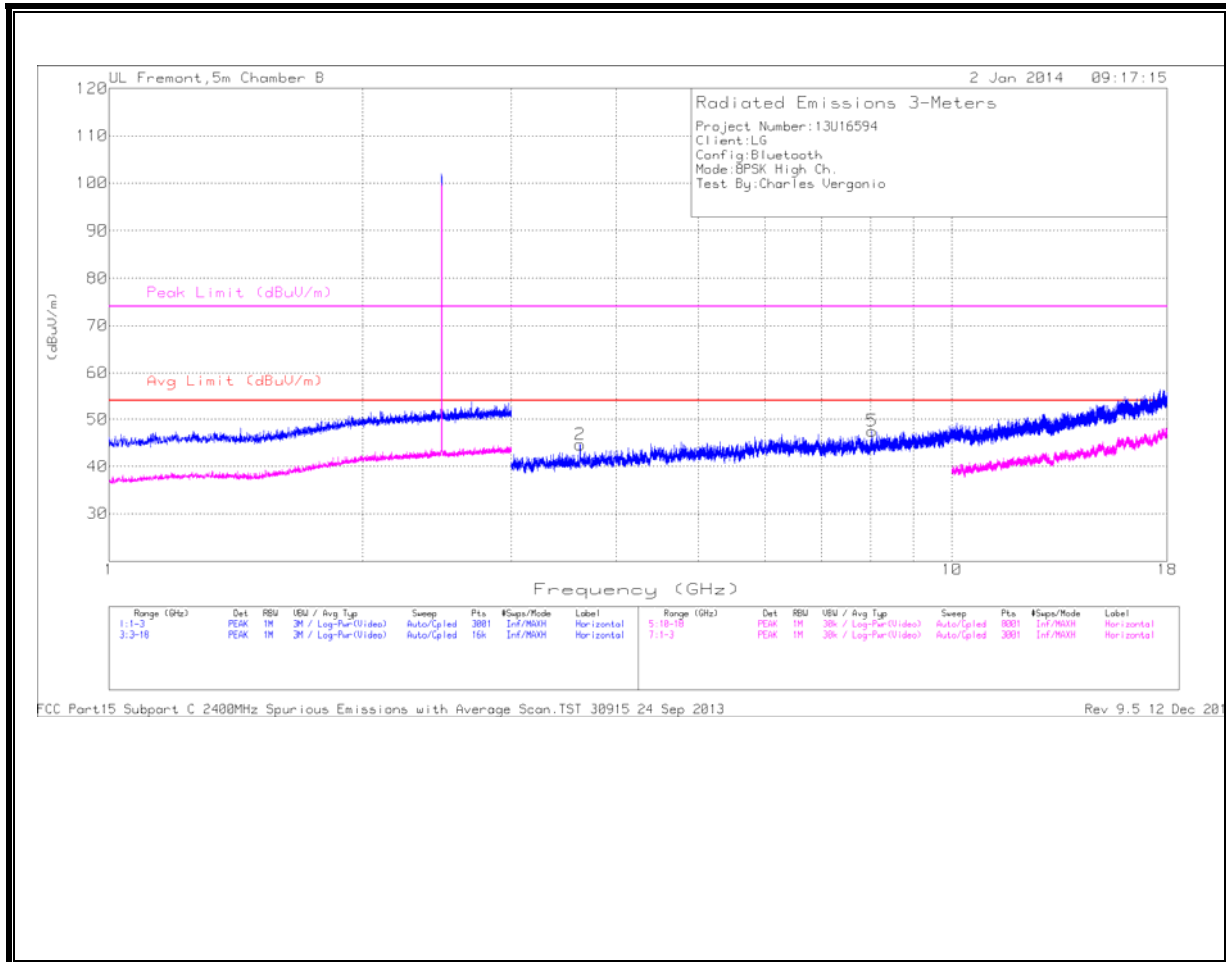

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

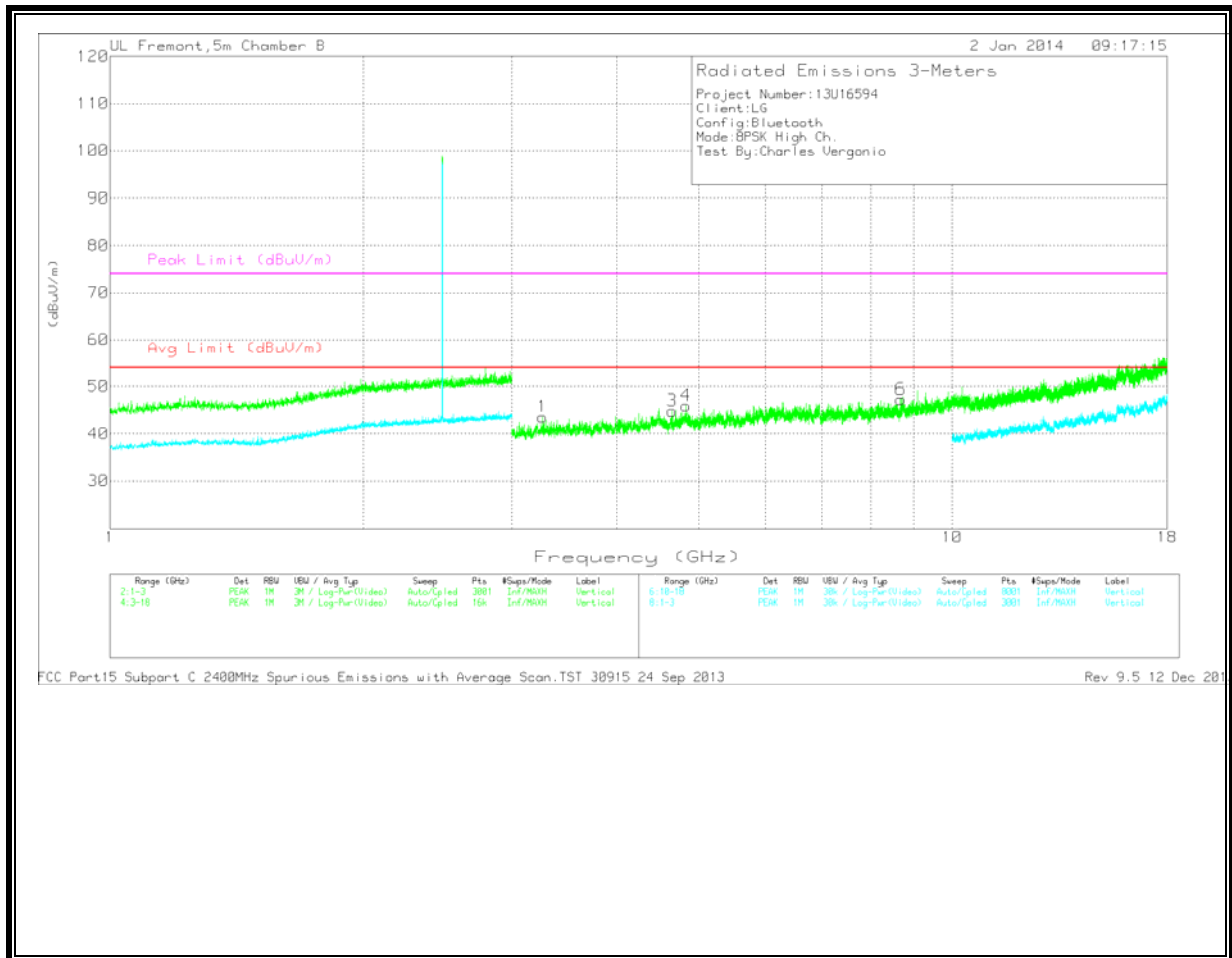

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.262	41.45	PK	33.3	-31.2	43.55	53.97	-10.42	74	-30.45	0-360	99	V
2	3.621	42.33	PK	33.5	-31.2	44.63	53.97	-9.34	74	-29.37	0-360	202	H
3	4.649	40.6	PK	34.6	-30.4	44.8	53.97	-9.17	74	-29.2	0-360	99	V
4	4.831	40.7	PK	34.7	-29.5	45.9	53.97	-8.07	74	-28.1	0-360	202	V
5	8.04	37.68	PK	36.1	-26.3	47.48	53.97	-6.49	74	-26.52	0-360	99	H
6	8.687	36.5	PK	36.3	-25.6	47.2	53.97	-6.77	74	-26.8	0-360	99	V


PK - Peak detector

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 12
 Dec 2013

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

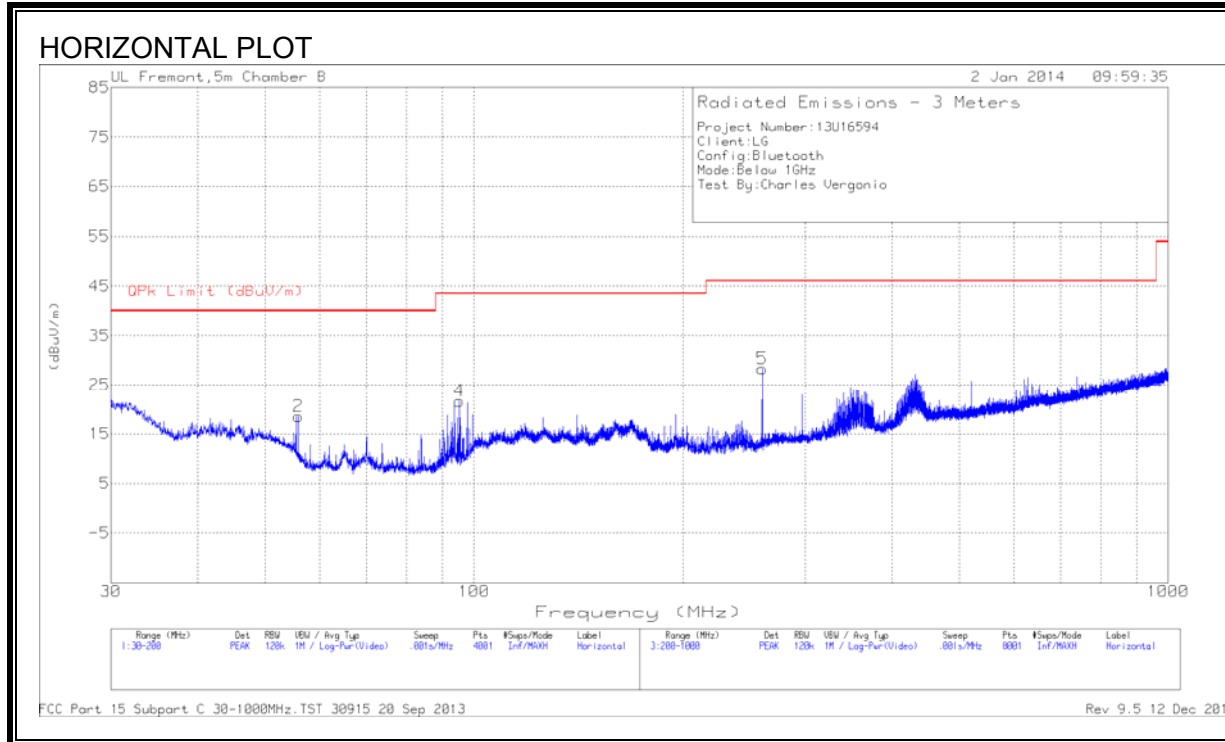

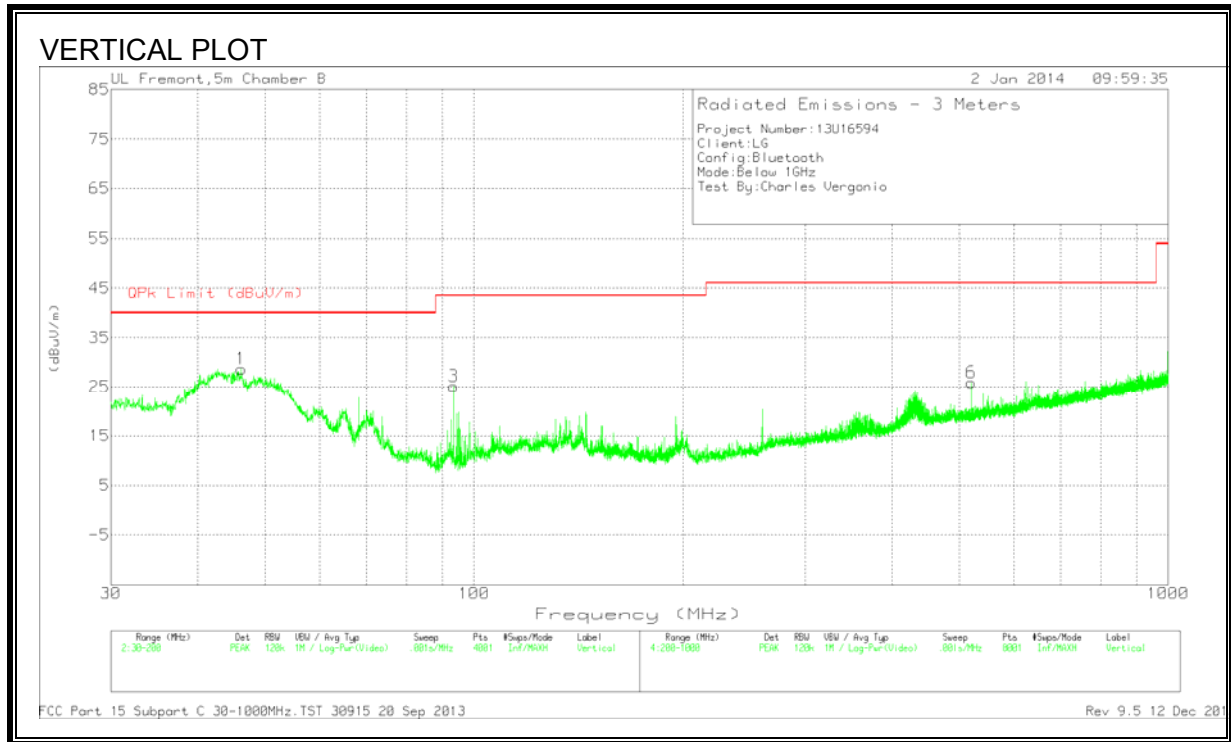

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	46.235	47.98	PK	9.4	-28.7	28.68	40	-11.32	0-360	101	V
2	55.84	40.22	PK	6.9	-28.6	18.52	40	-21.48	0-360	300	H
3	93.4525	45.01	PK	8.2	-28.1	25.11	43.52	-18.41	0-360	101	V
4	95.3225	40.96	PK	8.8	-28.1	21.66	43.52	-21.86	0-360	200	H
5	260.2	42.58	PK	12.1	-26.4	28.28	46.02	-17.74	0-360	101	H
6	520.3	33.9	PK	17.7	-25.7	25.9	46.02	-20.12	0-360	101	V

PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 20 Sep 2013 Rev 9.5 12 Dec 2013

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

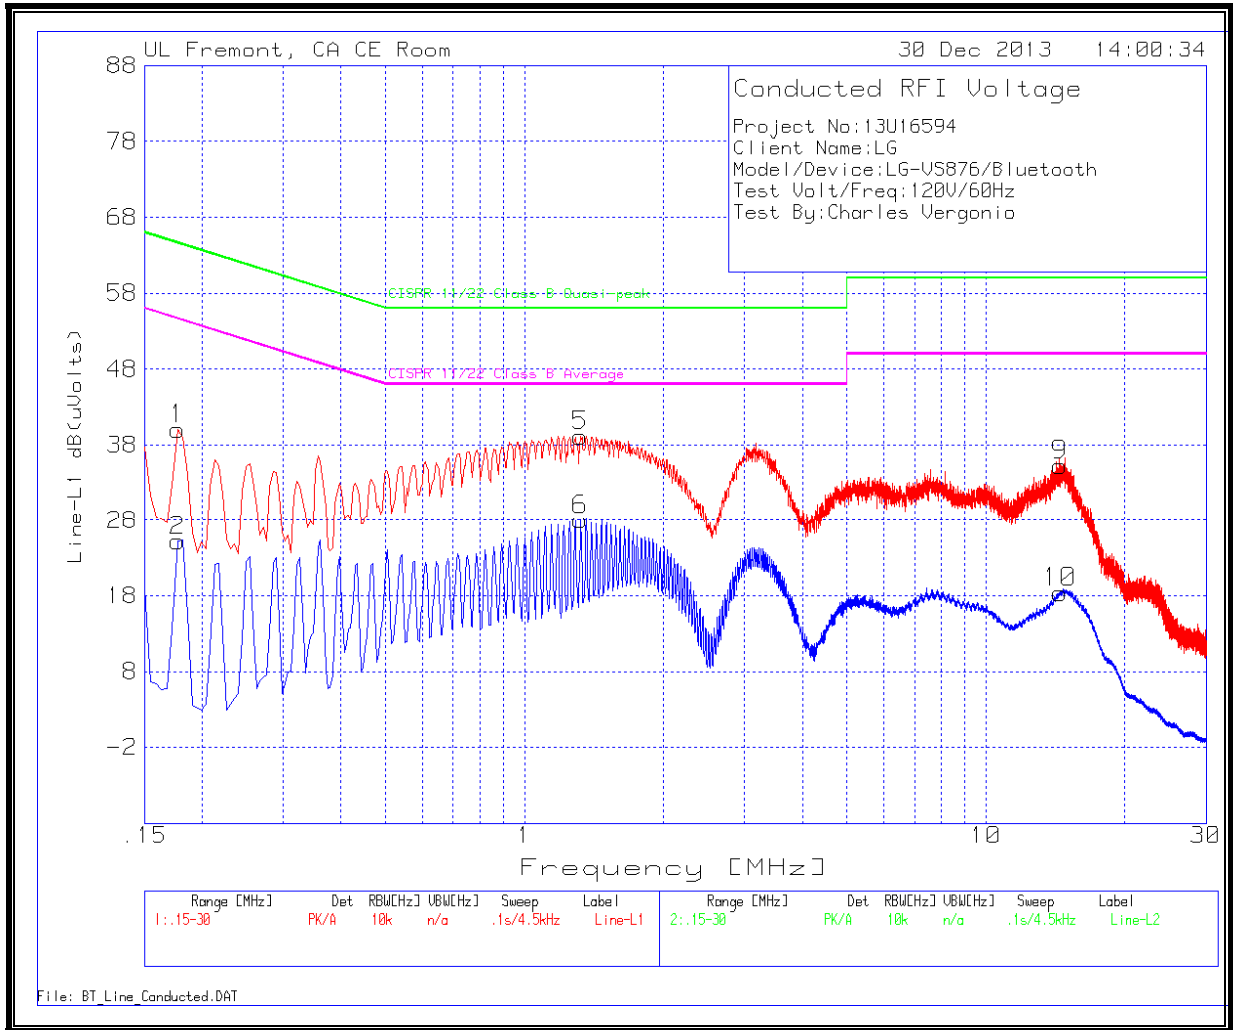


LINE 1 RESULTS

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.177	39.93	PK	.1	0	40.03	64.6	-24.57	-	-
2	.177	25.07	Av	.1	0	25.17	-	-	54.6	-29.43
5	1.3245	38.93	PK	.1	.1	39.13	56	-16.87	-	-
6	1.3245	27.87	Av	.1	.1	28.07	-	-	46	-17.93
9	14.487	34.83	PK	.2	.2	35.23	60	-24.77	-	-
10	14.487	17.94	Av	.2	.2	18.34	-	-	50	-31.66

LINE 2 RESULTS

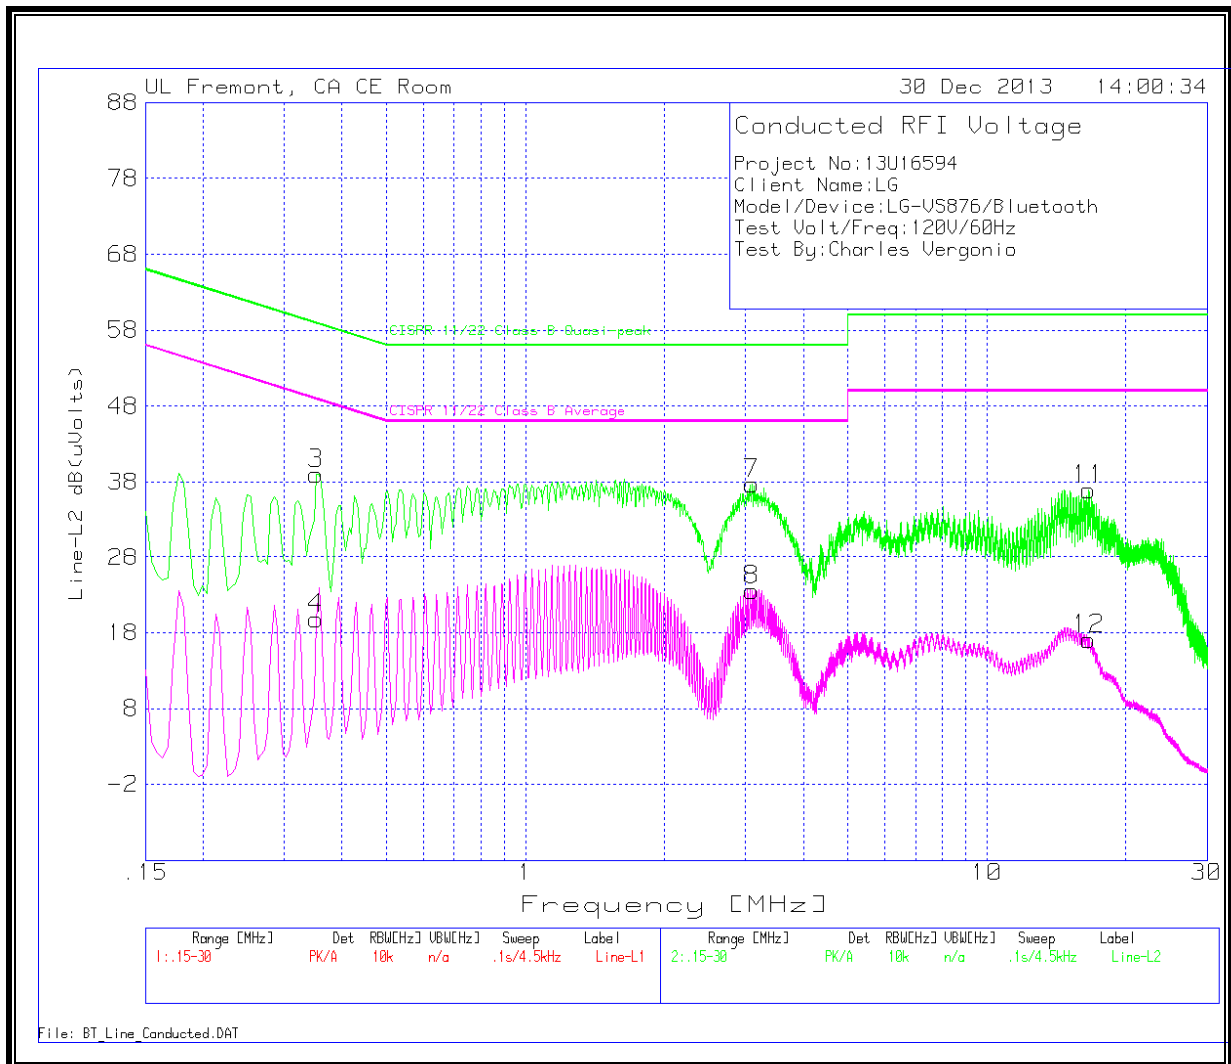

LINE 2 RESULTS

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
3	.3525	38.95	PK	.1	0	39.05	58.9	-19.85	-	-
4	.3525	19.75	Av	.1	0	19.85	-	-	48.9	-29.05
7	3.102	37.57	PK	.1	.1	37.77	56	-18.23	-	-
8	3.102	23.39	Av	.1	.1	23.59	-	-	46	-22.41
11	16.6335	36.51	PK	.2	.2	36.91	60	-23.09	-	-
12	16.6335	16.69	Av	.2	.2	17.09	-	-	50	-32.91

PK - Peak detector

Av - average detection