



Report No.: AGC01303131102FE02
Page 1 of 61

FCC Part 90 Test Report

Report No.: AGC01303131102FE02

FCC ID : ZP5UV-B5
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Walkie Talkie
BRAND NAME : BAOFENG
MODEL NAME : UV-B5
CLIENT : FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD.
DATE OF ISSUE : Dec.02, 2013
STANDARD(S) : FCC Part 90 Rules
REPORT VERSION : V 1.01

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.01	/	Dec.02, 2013	Valid	Original Report

VERIFICATION OF COMPLIANCE


Applicant:	FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD. CHANGFU INDUSTRIAL ZONE, XIAMEI, NAN'AN, QUANZHOU, FUJIAN, CHINA
Manufacturer:	FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD. CHANGFU INDUSTRIAL ZONE, XIAMEI, NAN'AN, QUANZHOU, FUJIAN, CHINA
Product Description:	Walkie Talkie
Brand Name:	BAOFENG
Model Name:	UV-B5
Date of Test:	Nov.24, 2013 to Nov.29, 2013

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared By



Wall Huang

Dec.02, 2013

Checked By



Kidd Yang

Dec.02, 2013

Authorized By



Solger Zhang

Dec.02, 2013

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION.....	6
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY	7
1.5 SPECIAL ACCESSORIES.....	7
1.6 EQUIPMENT MODIFICATIONS.....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 EUT CONFIGURATION	8
2.2 EUT EXERCISE	8
2.3 GENERAL TECHNICAL REQUIREMENTS.....	8
2.4 CONFIGURATION OF TESTED SYSTEM	8
3. SUMMARY OF TEST RESULTS.....	9
4. DESCRIPTION OF TEST MODES	10
5. CONDUCTED LIMITS	11
5.1 PROVISIONS APPLICABLE	11
5.2 MEASUREMENT PROCEDURE	11
5.3 TEST SETUP BLOCK DIAGRAM	12
5.4 TEST EQUIPMENT USED	12
5.5 TEST RESULT	13
6. FREQUENCY TOLERANCE	15
6.1 PROVISIONS APPLICABLE	15
6.2 MEASUREMENT PROCEDURE	15
6.3 TEST SETUP BLOCK DIAGRAM.....	16
6.4 TEST EQUIPMENT USED:.....	16
6.5 TEST RESULT	16
7. EMISSION BANDWIDTH	23
7.1 PROVISIONS APPLICABLE	23
7.2 MEASUREMENT PROCEDURE	23
7.3 TEST SETUP BLOCK DIAGRAM	23
7.4 MEASUREMENT EQUIPMENT USED:.....	23
7.5 MEASUREMENT RESULT:	24
8. UNWANTED RADIATION.....	26
8.1 PROVISIONS APPLICABLE	26
8.2 MEASUREMENT PROCEDURE	26

8.3 TEST SETUP BLOCK DIAGRAM	27
8.4 MEASUREMENT EQUIPMENT USED:.....	29
8.5 MEASUREMENT RESULTS:.....	29
8.6 EMISSION MASK PLOT	32
9. MODULATION CHARACTERISTICS	34
9.1 PROVISIONS APPLICABLE	34
9.2 MEASUREMENT METHOD.....	34
9.3 MEASUREMENT INSTRUMENTS	34
9.4 MEASUREMENT RESULT.....	35
10. MAXIMUMM TRANSMITTER POWER (CONDUCTED OUTPUT POWER).....	38
AND CONDUCTED SPURIOUS EMISSION	38
10.1 PROVISIONS APPLICABLE	38
10.2 TEST PROCEDURE	38
10.3 TEST INSTRUMENTS	38
10.4 TEST CONFIGURATION	38
10.5 TEST RESULT.....	41
10.6 CONDUCT SPURIOUS PLOT	42
11. TRANSMITTER FREQUENCY BEHAVIOR.....	45
11.1 PROVISIONS APPLICABLE	45
11.2 TEST METHOD	45
11.3 TEST INSTRUMENTS.....	45
12. RADIATED EMISSION ON RECEIVING MODE.....	49
12.1 PROVISIONS APPLICABLE	49
12.2 TEST METHOD.....	49
12.3 TEST INSTRUMENTS	49
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS).....	50
13. AUDIO LOW PASS FILTER RESPONSE	52
13.1 LIMITS	52
13.2. METHOD OF MEASUREMENTS	52
13.3 TEST DATA.....	52
APPENDIX I	55
PHOTOGRAPHS OF SETUP	55
APPENDIX II	56
EXTERNAL VIEW OF EUT	56

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	F3E
Channel Separation:	12.5KHz
Emission Bandwidth	VHF: 10.06KHz UHF: 10.39KHz
Peak Frequency Deviation	1.84KHz
Audio Frequency Response	3KHz
Rated Output Power	Hi: 5W, Lo: 1W (It was fixed by the manufacturer; any individual can't arbitrarily change it.)
Maximum Transmitter Power	Hi: VHF: 36.96dBm UHF: 36.95dBm Lo: VHF: 29.98dBm UHF: 29.97dBm
Antenna Designation	Detachable
Power Supply	DC 7.40V, 1200mAh(by battery)
Adapter parameter	Input: AC 100~240V, 50/60Hz Output: DC 10V, 500mA
Operation Frequency Range and Channel	Frequency Range: VHF: 136MHz to 174MHz UHF: 400MHz to 470MHz
	VHF: Bottom Channel: 136.025MHz, Centre Channel: 155.000MHz, Top Channel: 173.975MHz, UHF: Bottom Channel: 400.025MHz, Centre Channel: 435.000MHz, Top Channel: 469.975MHz,
Frequency Tolerance	VHF: 0.989ppm UHF: 0.912ppm

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZP5UV-B5**, filing to comply with the FCC Part 90 requirements.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 .

FCC register No.: 259865

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior
- (8). Section 15.109: Radiated Emission

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Walkie Talkie	UV-B5	FCC ID: ZP5UV-B5	EUT
2	Charger	UV-B5	Input: AC 100~240V, 50/60Hz Output: DC-10V, 500mA	Accessory
3	Battery	UV-B5	7.40V, 1200mAh	Accessory

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conducted Emission	Compliant
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant
§15.109	Radiated Emission	Compliant

4. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (Walkie Talkie) has been tested under normal operating condition. (The Low Channel, the Middle Channel and The High Channel) are chosen for testing at each channel separation (12.5 KHz).

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report if no any other data.

EMC TEST MODES

No.	TEST MODES
1	Standby Mode + Charging

Note: Only the result of the worst case was recorded in the report.

5. CONDUCTED LIMITS

5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50


* Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

5.3 TEST SETUP BLOCK DIAGRAM

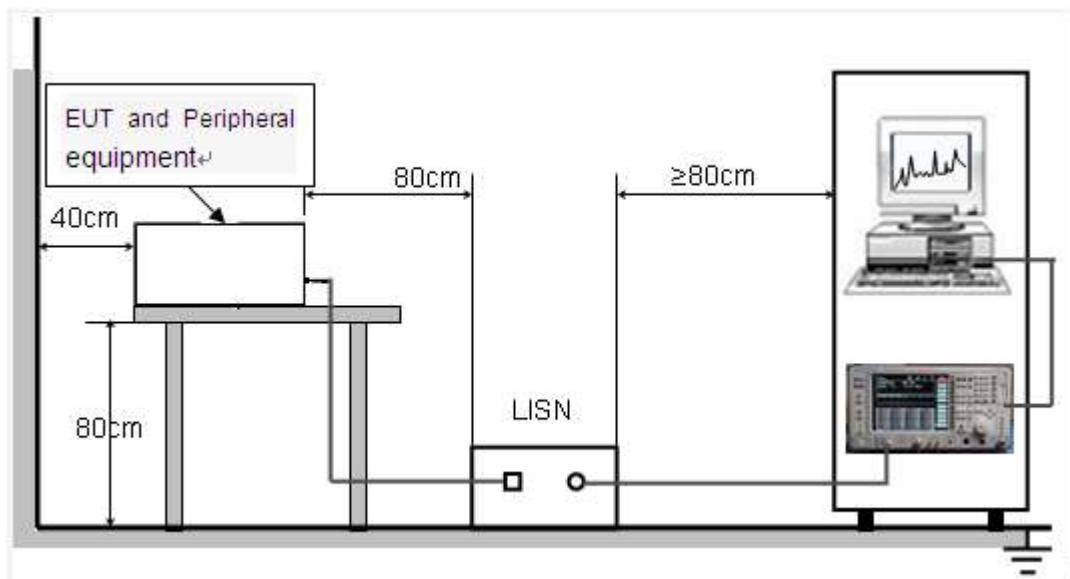


5.4 TEST EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due.
TEST RECEIVER	R&S	ESCI	100694	July 17, 2013	July 16, 2014
LISN	R&S	ESH3-Z5	8389791009	July 17, 2013	July 16, 2014

5.5 TEST RESULT


LINE CONDUCTED EMISSION TEST-L

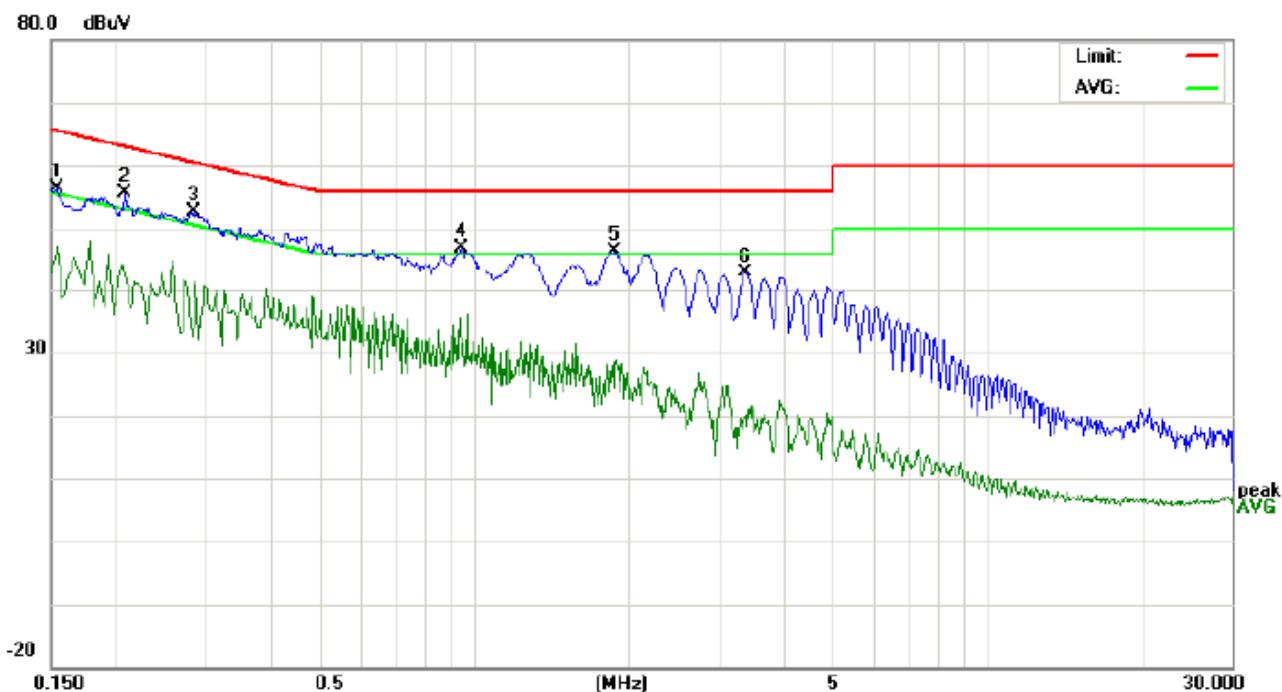

Site: Conduction Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: Walkie Talkie
 M/N: UV-B5
 Mode: Mode 1
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1539	46.33		36.92	10.16	56.49		47.08	65.78	55.78	-9.29	-8.70	P	
2	0.2083	45.51		32.31	10.22	55.73		42.53	63.27	53.27	-7.54	-10.74	P	
3	0.2860	42.45		31.11	10.28	52.73		41.39	60.64	50.64	-7.91	-9.25	P	
4	0.9460	36.56		18.91	10.39	46.95		29.30	56.00	46.00	-9.05	-16.70	P	
5	1.8700	36.01		13.99	10.26	46.27		24.25	56.00	46.00	-9.73	-21.75	P	
6	3.3660	32.36		9.32	10.52	42.88		19.84	56.00	46.00	-13.12	-26.16	P	

LINE CONDUCTED EMISSION TEST-N

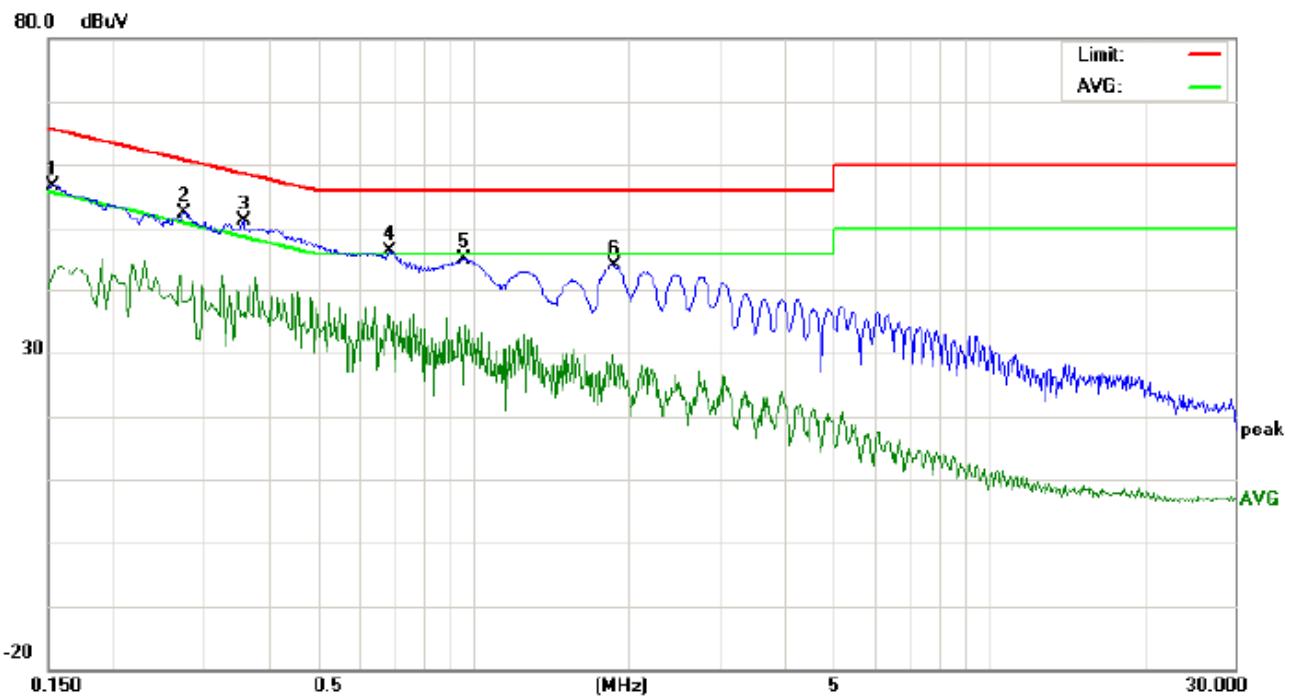

Site: Conduction Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: Walkie Talkie
 M/N: UV-B5
 Mode: Mode 1
 Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	Avg	QP	Avg	QP	Avg		
1	0.1524	46.58		31.84	10.16	56.74		42.00	65.86	55.86	-9.12	-13.86	P	
2	0.2743	42.03		27.92	10.28	52.31		38.20	60.98	50.98	-8.67	-12.78	P	
3	0.3580	40.72		26.10	10.31	51.03		36.41	58.77	48.77	-7.74	-12.36	P	
4	0.6863	36.03		25.46	10.34	46.37		35.80	56.00	46.00	-9.63	-10.20	P	
5	0.9620	34.84		14.76	10.39	45.23		25.15	56.00	46.00	-10.77	-20.85	P	
6	1.8740	33.86		17.40	10.26	44.12		27.66	56.00	46.00	-11.88	-18.34	P	

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 2.5 ppm in the 421–512 MHz band.
- d). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 5.0 ppm in the 150-174 MHz band.

6.2 MEASUREMENT PROCEDURE

6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 8.4V
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 TEST SETUP BLOCK DIAGRAM

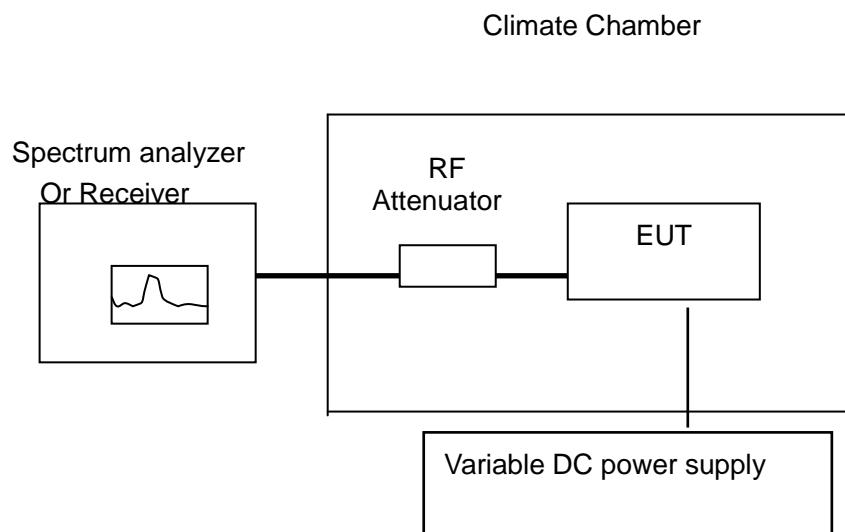


Figure 1

6.4 TEST EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
Receiver	R&S	ESCI	100694	July 17, 2013	July 16, 2014
Climate Chamber	Albatross	--	--	July 17, 2013	July 16, 2014

6.5 TEST RESULT

VHF TEST RESULT (Hi Power)

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	136.025104	0.765
40	7.4	136.025068	0.500
30	7.4	136.025042	0.309
20	7.4	136.025063	0.463
10	7.4	136.025075	0.551
0	7.4	136.025083	0.610
-10	7.4	136.025057	0.419
-20	7.4	136.025114	0.838
-30	7.4	136.025112	0.823

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	155.000135	0.871
40	7.4	155.000138	0.890
30	7.4	155.000126	0.813
20	7.4	155.000122	0.787
10	7.4	155.000136	0.877
0	7.4	155.000121	0.781
-10	7.4	155.000117	0.755
-20	7.4	155.00012	0.774
-30	7.4	155.000122	0.787

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	173.975163	0.937
40	7.4	173.975159	0.914
30	7.4	173.975144	0.828
20	7.4	173.975152	0.874
10	7.4	173.975158	0.908
0	7.4	173.975132	0.759
-10	7.4	173.975125	0.718
-20	7.4	173.975124	0.713
-30	7.4	173.975159	0.914

(2) Frequency stability versus input voltage (Battery limiting voltage is 6.29V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	136.025114	0.838
40	6.29	136.025079	0.581
30	6.29	136.025073	0.537
20	6.29	136.025052	0.382
10	6.29	136.025051	0.375
0	6.29	136.025064	0.471
-10	6.29	136.025046	0.338
-20	6.29	136.025113	0.831
-30	6.29	136.025105	0.772

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	155.000134	0.865
40	6.29	155.000126	0.813
30	6.29	155.000122	0.787
20	6.29	155.000118	0.761
10	6.29	155.000107	0.690
0	6.29	155.000112	0.723
-10	6.29	155.000115	0.742
-20	6.29	155.000118	0.761
-30	6.29	155.000125	0.806

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	173.975172	0.989
40	6.29	173.975165	0.948
30	6.29	173.975156	0.897
20	6.29	173.975137	0.787
10	6.29	173.975141	0.810
0	6.29	173.975119	0.684
-10	6.29	173.975143	0.822
-20	6.29	173.975145	0.833
-30	6.29	173.975142	0.816

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	136.025106	0.779
40	8.51	136.025075	0.551
30	8.51	136.025068	0.500
20	8.51	136.025031	0.228
10	8.51	136.025024	0.176
0	8.51	136.025023	0.169
-10	8.51	136.025032	0.235
-20	8.51	136.025111	0.816
-30	8.51	136.025114	0.838

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	155.000137	0.884
40	8.51	155.000131	0.845
30	8.51	155.000128	0.826
20	8.51	155.000123	0.794
10	8.51	155.00011	0.710
0	8.51	155.000115	0.742
-10	8.51	155.000124	0.800
-20	8.51	155.000126	0.813
-30	8.51	155.000131	0.845

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	173.975135	0.776
40	8.51	173.975151	0.868
30	8.51	173.975147	0.845
20	8.51	173.975141	0.810
10	8.51	173.975123	0.707
0	8.51	173.975118	0.678
-10	8.51	173.975136	0.782
-20	8.51	173.975147	0.845
-30	8.51	173.975154	0.885

UHF TEST RESULT (Hi Power)

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	400.025304	0.760
40	7.4	400.025313	0.782
30	7.4	400.025288	0.720
20	7.4	400.025282	0.705
10	7.4	400.025265	0.662
0	7.4	400.025225	0.562
-10	7.4	400.025327	0.817
-20	7.4	400.025338	0.845
-30	7.4	400.025302	0.755

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.000 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	435.000355	0.816
40	7.4	435.000292	0.671
30	7.4	435.000284	0.653
20	7.4	435.000275	0.632
10	7.4	435.000266	0.611
0	7.4	435.000254	0.584
-10	7.4	435.000263	0.605
-20	7.4	435.000274	0.630
-30	7.4	435.000282	0.648

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	7.4	469.975369	0.785
40	7.4	469.975357	0.760
30	7.4	469.975352	0.749
20	7.4	469.975337	0.717
10	7.4	469.975335	0.713
0	7.4	469.975333	0.709
-10	7.4	469.975347	0.738
-20	7.4	469.975345	0.734
-30	7.4	469.975364	0.775

(2) Frequency stability versus input voltage (Battery limiting voltage is 6.29V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	400.025311	0.777
40	6.29	400.025316	0.790
30	6.29	400.025289	0.722
20	6.29	400.025284	0.710
10	6.29	400.025262	0.655
0	6.29	400.025227	0.567
-10	6.29	400.02533	0.825
-20	6.29	400.025341	0.852
-30	6.29	400.025331	0.827

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.000 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	435.000359	0.825
40	6.29	435.000287	0.660
30	6.29	435.000275	0.632
20	6.29	435.000282	0.648
10	6.29	435.000264	0.607
0	6.29	435.000262	0.602
-10	6.29	435.000266	0.611
-20	6.29	435.000278	0.639
-30	6.29	435.000283	0.651

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	6.29	469.975366	0.779
40	6.29	469.975357	0.760
30	6.29	469.975378	0.804
20	6.29	469.975338	0.719
10	6.29	469.975334	0.711
0	6.29	469.975324	0.689
-10	6.29	469.975335	0.713
-20	6.29	469.975347	0.738
-30	6.29	469.975355	0.755

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	400.025365	0.912
40	8.51	400.025317	0.792
30	8.51	400.025285	0.712
20	8.51	400.025276	0.690
10	8.51	400.025258	0.645
0	8.51	400.025247	0.617
-10	8.51	400.025351	0.877
-20	8.51	400.025346	0.865
-30	8.51	400.025357	0.892

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	435.000 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	435.000356	0.818
40	8.51	435.000291	0.669
30	8.51	435.000284	0.653
20	8.51	435.000276	0.634
10	8.51	435.000268	0.616
0	8.51	435.000255	0.586
-10	8.51	435.000253	0.582
-20	8.51	435.000278	0.639
-30	8.51	435.000286	0.657

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	469.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	8.51	469.975365	0.777
40	8.51	469.975354	0.753
30	8.51	469.975343	0.730
20	8.51	469.975339	0.721
10	8.51	469.975347	0.738
0	8.51	469.975356	0.757
-10	8.51	469.975351	0.747
-20	8.51	469.975358	0.762
-30	8.51	469.975364	0.775

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

7. EMISSION BANDWIDTH


7.1 PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 3.0 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) .
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

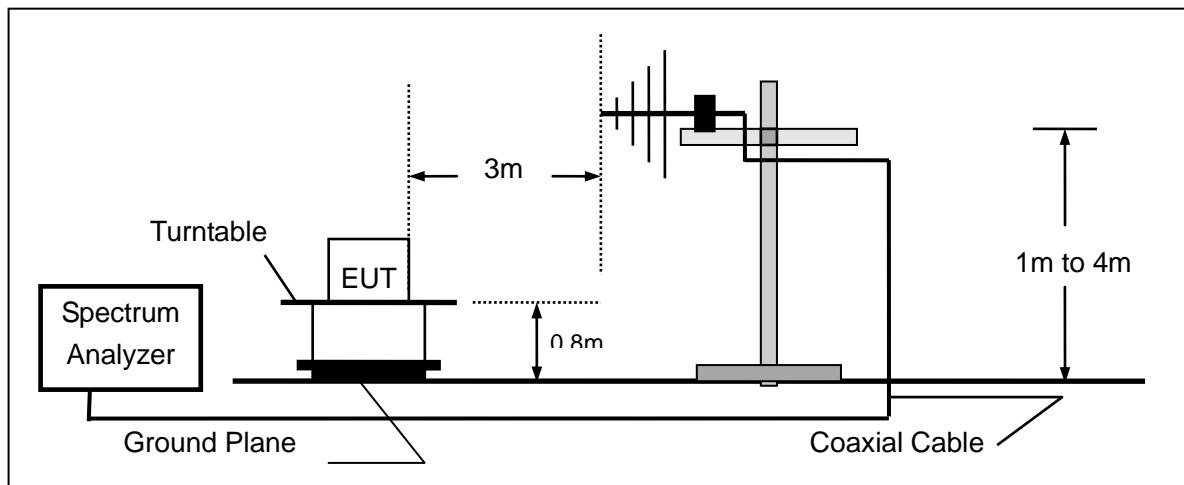

7.4 MEASUREMENT EQUIPMENT USED:


Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	07/17/2013	07/16/2014
MODULATION ANALYZER	HP	8901B	3104A03367	07/17/2013	07/16/2014
BROADBAND ANT.	R&S	HL562	A0304224	06/07/2013	06/06/2014

7.5 MEASUREMENT RESULT:

TEST RESULT FOR VHF (Hi Power)

26 dB Bandwidth Measurement Result			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	10.02KHz	11.25 KHz	Pass
155.000MHz	10.06KHz	11.25 KHz	Pass
173.975MHz	10.04KHz	11.25 KHz	Pass


Occupied bandwidth of Middle Channel (Maximum)

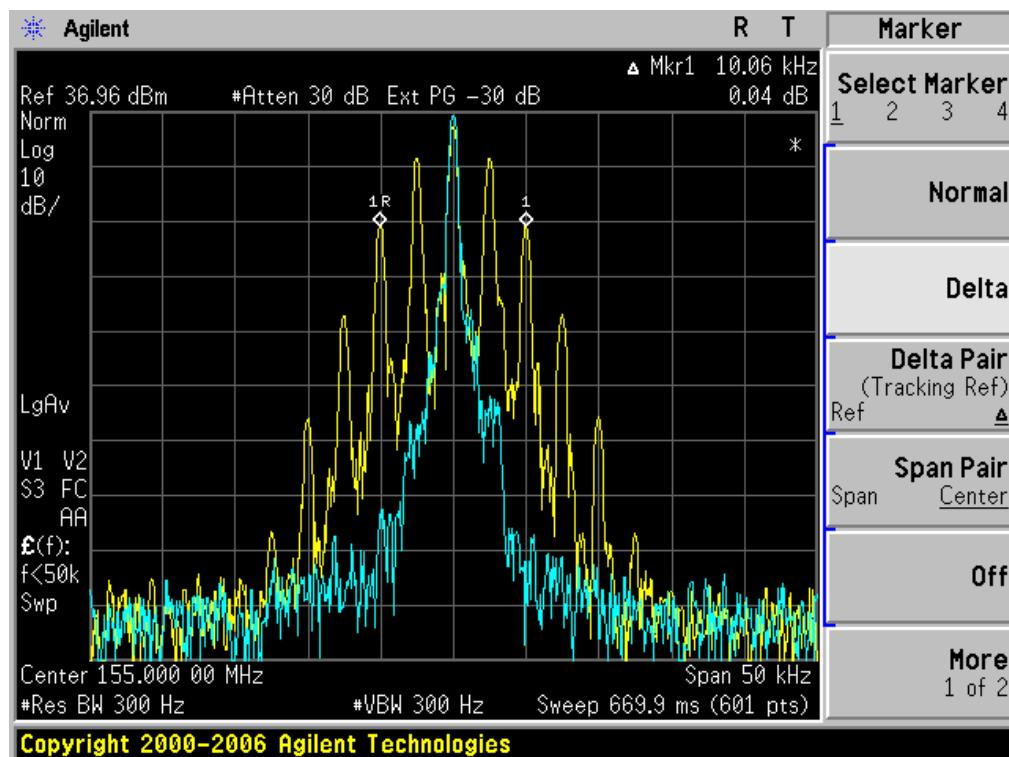

TEST RESULT FOR UHF (Hi Power)

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	10.35KHz	11.25 KHz	Pass
440.000MHz	10.39KHz	11.25 KHz	Pass
479.975MHz	10.37KHz	11.25 KHz	Pass

Occupied bandwidth of Middle Channel (Maximum)

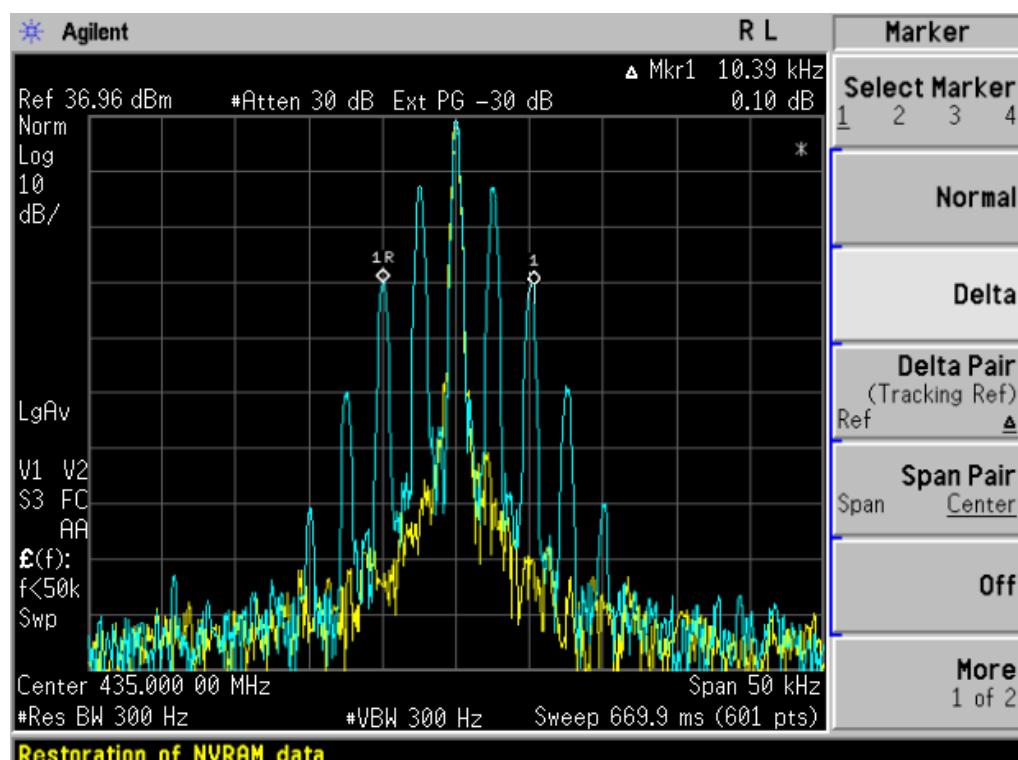

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report if no any other data.

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1).On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement frequency(f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d-2.88 \text{ KHz})$ dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

8.2 MEASUREMENT PROCEDURE

- (1)On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2)The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4)The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5)The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8)The maximum signal level detected by the measuring receiver shall be noted.
- (9)The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12)The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that


the maximum signal is received.

(15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

(16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.


(17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 TEST SETUP BLOCK DIAGRAM

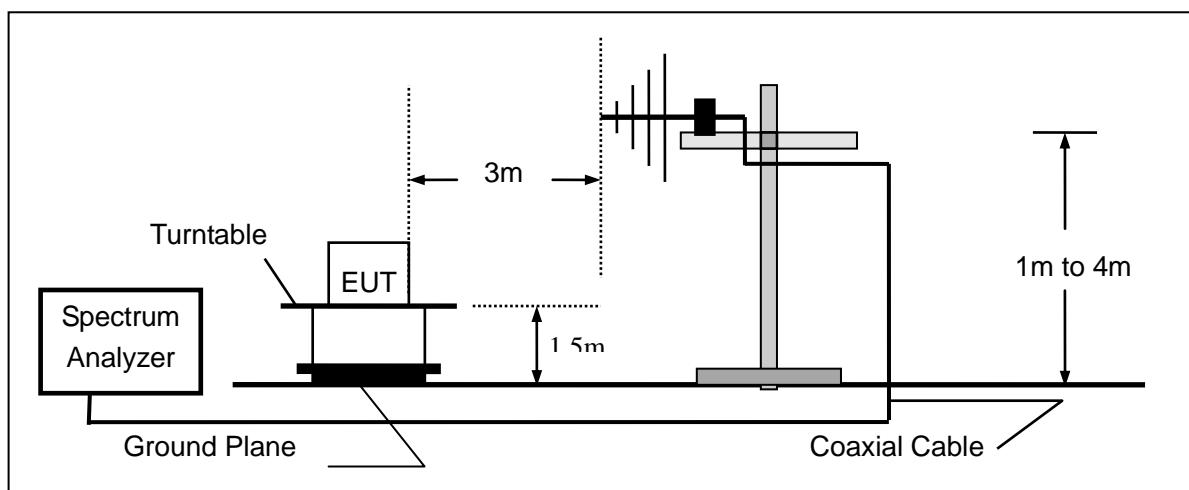


SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

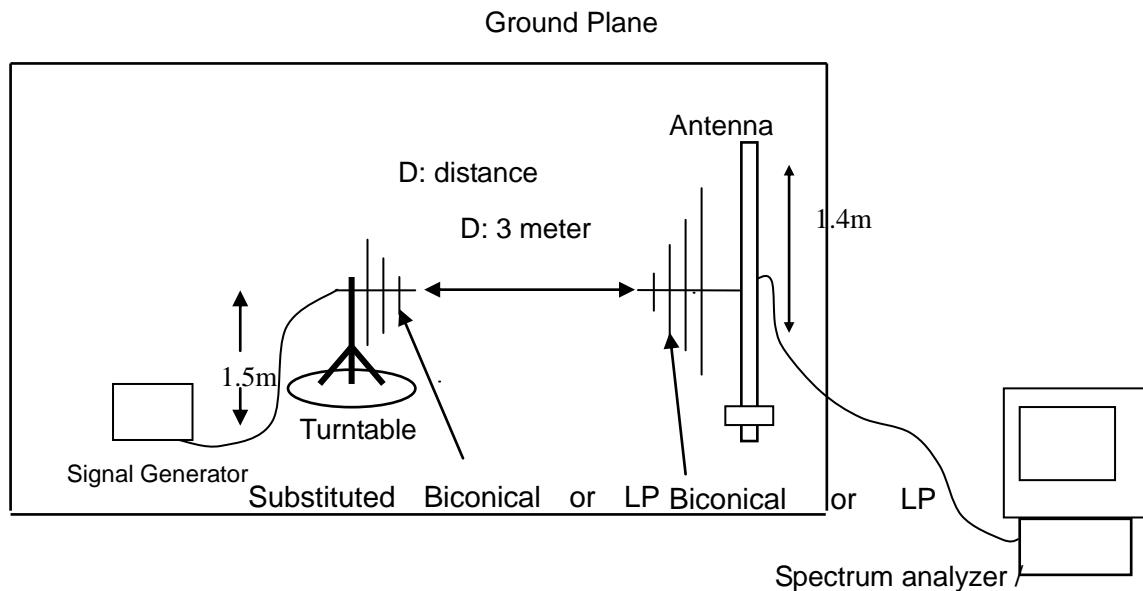

Radiated Above 1 GHz

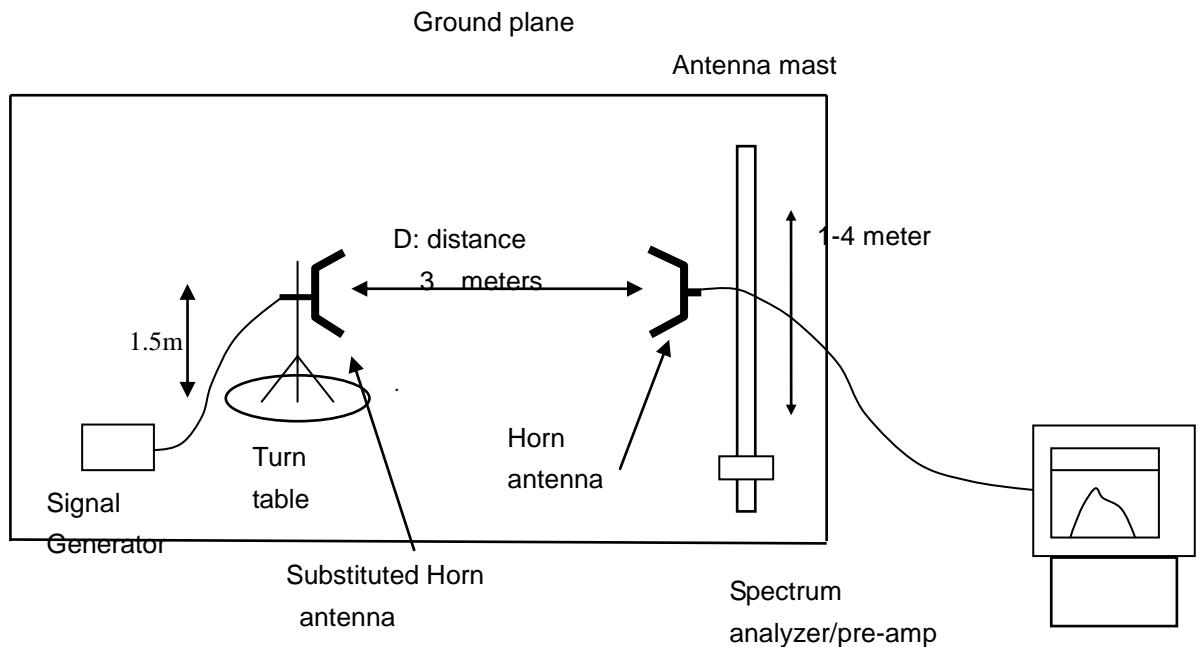

8.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	July 17, 2013	July 16, 2014
TEST RECEIVER	R&S	ESCI	100694	July 17, 2013	July 16, 2014
LOOP ANTENNA	R&S	HFH2-Z2	SEL0097	July 17, 2013	July 16, 2014
HORN ANTENNA	EM	EM-AH-10180	67	Apr.20, 2013	Apr.19, 2014
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	Jun.07,2013	Jun.06,2014

8.5 MEASUREMENT RESULTS:

Measurement Result for 12.5 KHz Channel Separation-5W

On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

VHF: Limit: At least $50+10 \log (P) = 50+10\log(5)=57(\text{dBc})$

UHF: Limit: At least $50+10 \log (P) = 50+10\log(5)=57(\text{dBc})$

Measurement Result for 12.5 KHz Channel Separation-1W

On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

VHF: Limit: At least $50+10 \log (P) = 50+10\log(1)=50(\text{dBc})$

UHF: Limit: At least $50+10 \log (P) = 50+10\log(1)=50(\text{dBc})$

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

TEST RESULT FOR VHF (Hi Power)

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
150.775	V	0		pass
301.550	V	68.14(-31.15dBm)	57	pass
452.33	V	74.28(-37.29dBm)	57	pass
603.100	V	79.38	57	pass
753.875	V	81.15	57	pass
904.650	V	83.25	57	pass
1055.425	V	87.69	57	pass
1206.200	V	90.85	57	pass
1356.975	V	91.94	57	pass
1507.750	V	92.88	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.000MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	67.82(-30.83dBm)	57	pass
465.000	V	72.54	57	pass
620.000	V	75.89	57	pass
775.000	V	77.57	57	pass
930.000	V	78.78	57	pass
1085.000	V	90.69	57	pass
1240.000	V	89.82	57	pass
1395.000	V	91.72	57	pass
1550.000	V	93.52	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	72.52(-35.53dBm)	57	pass
521.925	V	74.26	57	pass
695.900	V	76.33	57	pass
869.875	V	85.72	57	pass
1043.850	V	87.32	57	pass
1217.825	V	89.66	57	pass
1391.800	V	90.73	57	pass
1565.775	V	91.55	57	pass
1739.750	V	92.03	50	pass

TEST RESULT FOR UHF (Hi Power)

Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.075	V	0		pass
800.150	V	68.33(-31.34dBm)	57	pass
1200.23	V	74.39(-37.40dBm)	57	pass
1600.300	V	78.66	57	pass
2000.375	V	82.74	57	pass
2400.450	V	84.72	57	pass
2800.525	V	86.69	57	pass
3200.600	V	89.76	57	pass
3600.675	V	91.59	57	pass
4000.750	V	92.84	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 435.000MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
435.000	V	0		pass
870.000	V	71.67(-34.68dBm)	57	pass
1305.000	V	76.72	57	pass
1740.000	V	79.85	57	pass
2175.000	V	82.56	57	pass
2610.000	V	85.71	57	pass
3045.000	V	89.88	57	pass
3480.000	V	90.66	57	pass
3915.000	V	91.02	57	pass
4350.000	V	91.88	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
469.075	V	0		pass
938.150	V	72.58(-35.59dBm)	57	pass
1407.225	V	76.47	57	pass
1876.300	V	80.25	57	pass
2345.375	V	86.72	57	pass
2814.450	V	89.33	57	pass
3283.525	V	90.43	57	pass
3752.600	V	91.28	57	pass
4221.675	V	92.31	57	pass
4690.750	V	93.22	50	pass

Notes: The emissions were scanned from 30 MHz to 10th harmonics.


8.6 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing)


TEST RESULT FOR VHF (Hi Power)

The Worst Emission Mask for 12.5 KHz channel Separation (5W)

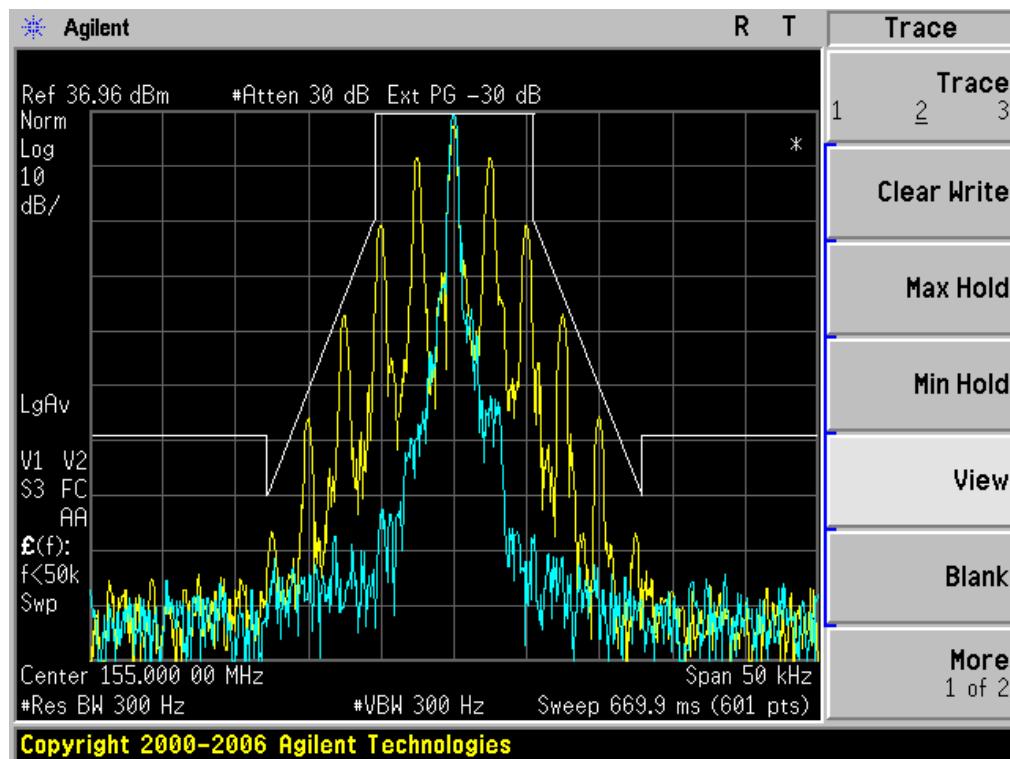

TEST RESULT FOR UHF (Hi Power)

The Worst Emission Mask for 12.5 KHz channel Separation (5W)

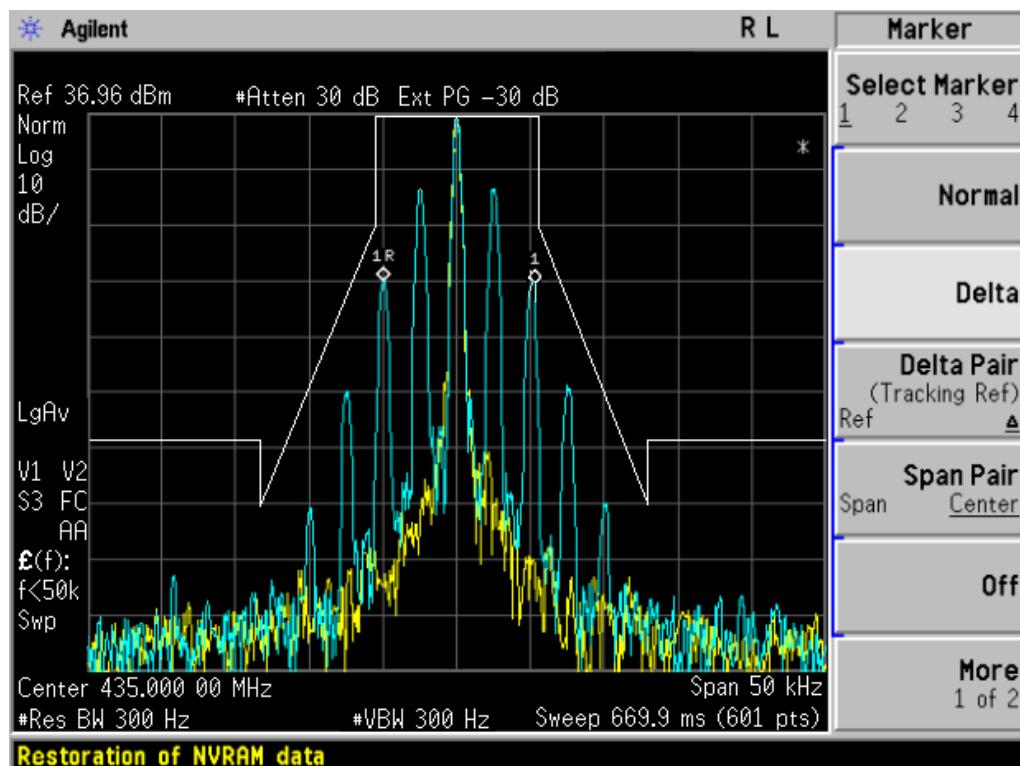

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$.

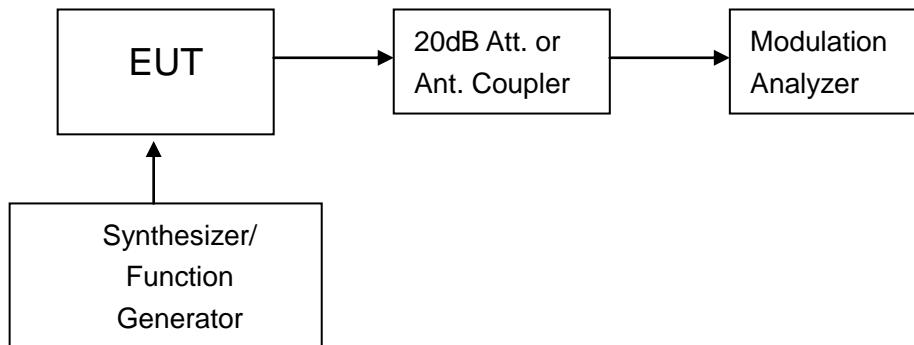


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Modulation Analyzer	HP	8920B	3104A03367	07/17/2013	07/16/2014

NOTE: 8920B can generate audio modulation frequency.


9.4 MEASUREMENT RESULT FOR HI POWER

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

(a). Modulation Limit:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 1500 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)
-20	0.23	0.73	0.83	0.85
-15	0.35	0.87	0.94	0.98
-10	0.42	1.23	1.27	1.35
-5	0.64	1.37	1.39	1.44
0	0.76	1.44	1.52	1.57
5	0.88	1.75	1.77	1.84
10	0.94	1.73	1.79	1.81
15	0.85	1.67	1.72	1.75
20	0.78	1.58	1.66	1.69

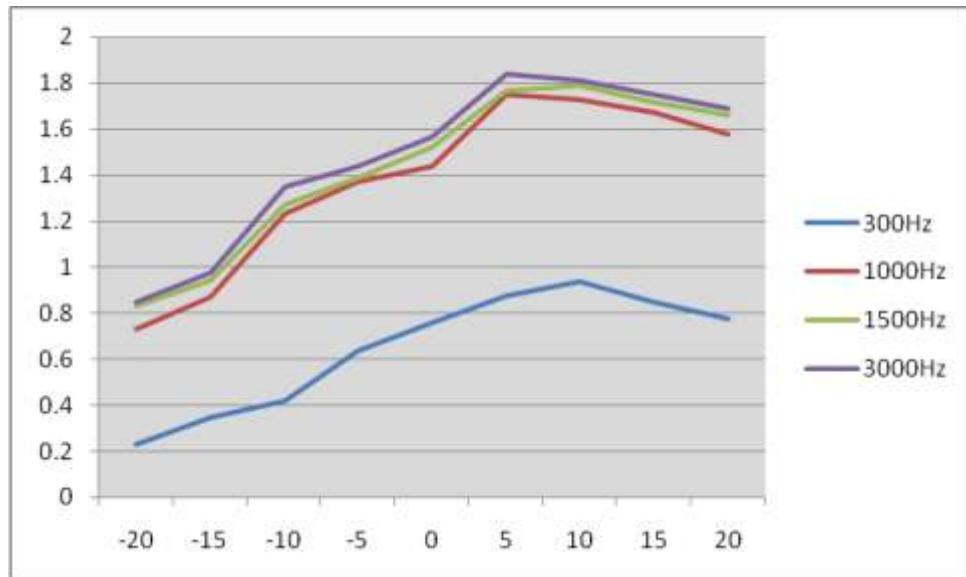


(b). Audio Frequency Response:

12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.13	-11.70
400	0.15	-10.46
500	0.19	-8.40
600	0.25	-6.02
700	0.32	-3.88
800	0.37	-2.62
900	0.43	-1.31
1000	0.54	0.67
1200	0.64	2.14
1400	0.68	2.67
1600	0.85	4.61
1800	1.04	6.36
2000	1.16	7.31
2400	1.43	9.13
2500	1.67	10.47
2800	1.74	10.83
3000	1.83	11.27
3200	1.78	11.03
3600	1.58	9.99
4000	1.12	7.00
4500	0.79	3.97
5000	0.71	3.05
5500	0.63	2.01
6000	0.37	-2.62
6500	0.15	-10.46
7000	0.09	-14.89
7500	0.03	-24.44
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel

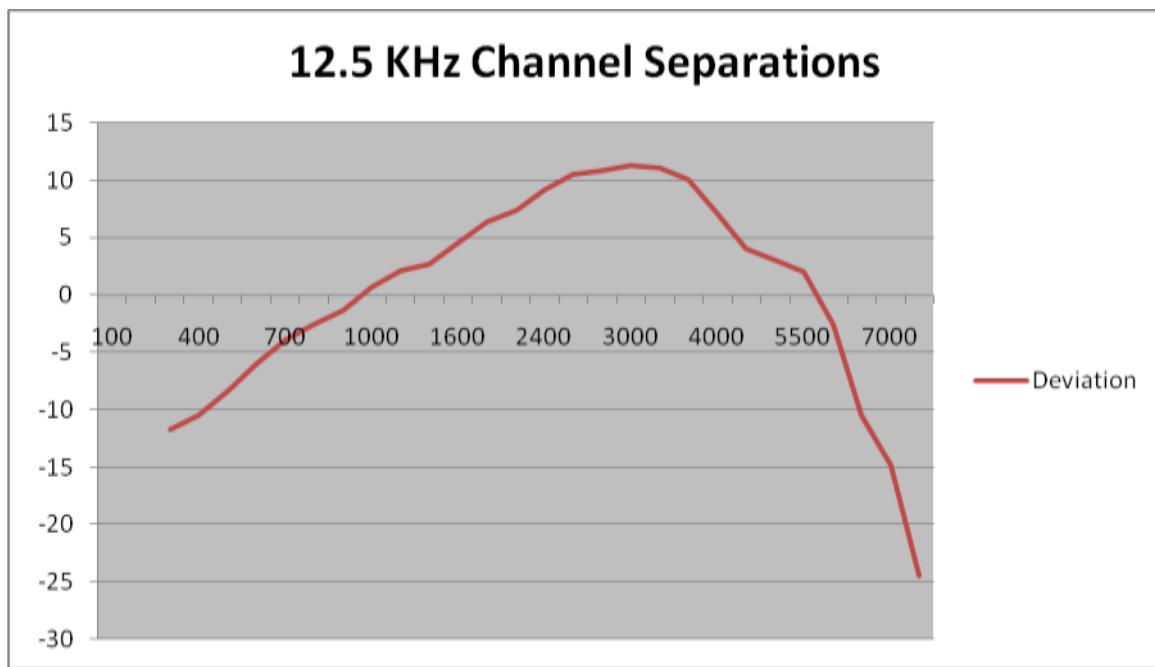

10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER) AND CONDUCTED SPURIOUS EMISSION

10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

RS-119 and §5.4: The output power shall be within ± 1.0 dB of the manufacturer's rated power.

10.2 TEST PROCEDURE

The RF output of Two-way Radio was connected to a spectrum analyzer through an appropriate attenuator.

The transmitter shall be modulated by a 2.5 kHz audio signal,

The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing)


Measure and record the transmitter output power, using a measurement (resolution) bandwidth at least two to three times the occupied bandwidth for transmitters equipped to capture the true peak emission of the equipment under test.

10.3 TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	07/17/2013	07/16/2014



10.4 TEST CONFIGURATION

Conducted Output Power:


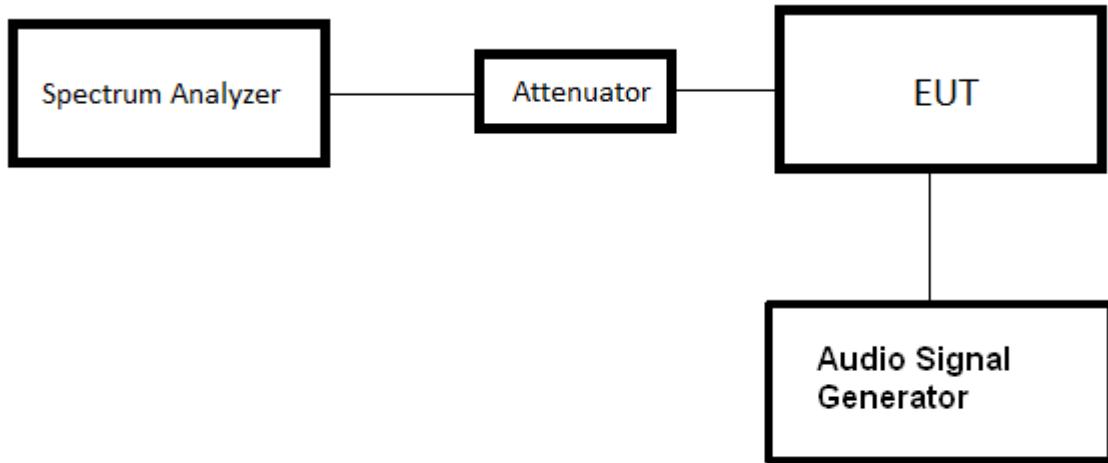


Effective Radiated Power measurement

Below 1GHz

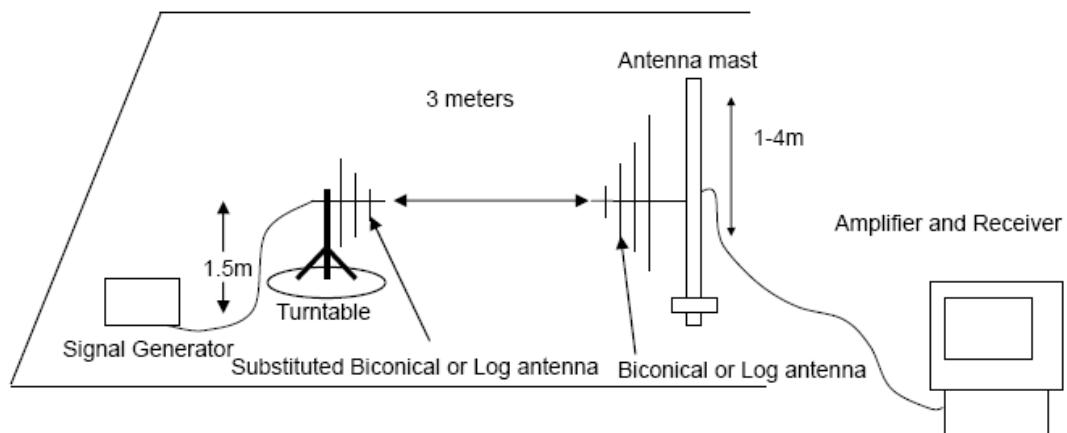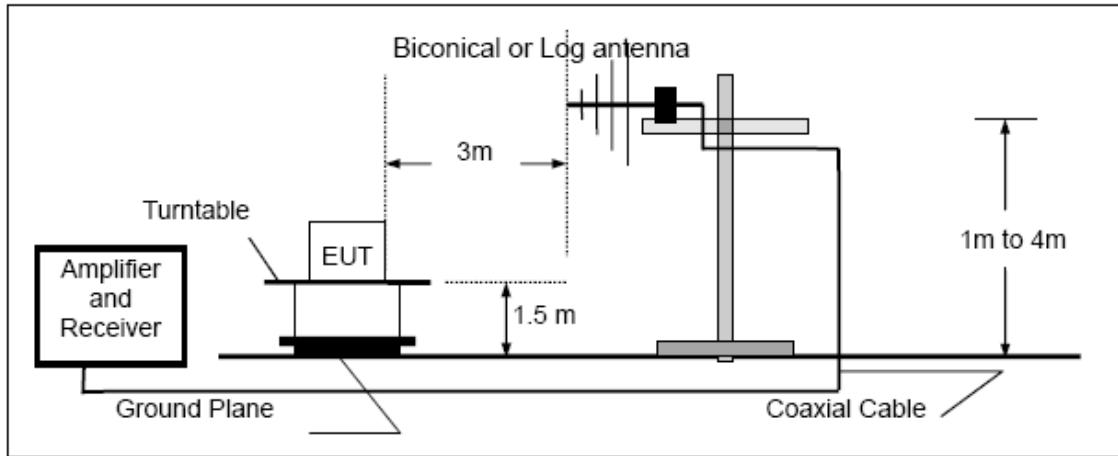

Above 1GHz

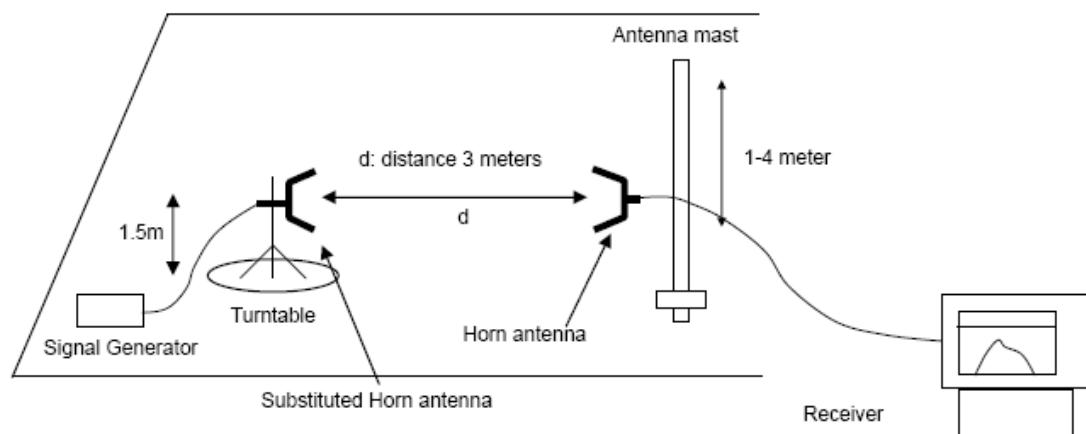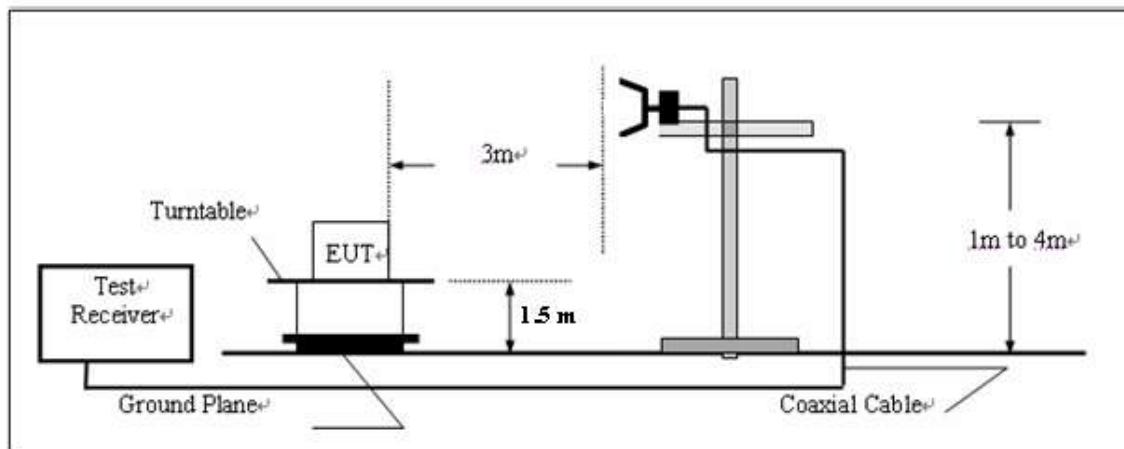

10.5 TEST RESULT

The maximum Conducted Power (Hi) (CP) is
5 W for 12.5 KHz Channel Separation (VHF)
5 W for 12.5 KHz Channel Separation (UHF)

TESTED RESULT FOR VHF (Hi Power)

Measurement Results				
Channel Separation	Channel	Measurement Result (dBm)	Average power (dBm)	E.R.P (dBm)
12.5 KHz	Bottom(136.025MHz)	36.94	34.66	36.33
	Middle(155.000MHz)	36.96	34.71	36.38
	Top (173.975MHz)	36.93	34.64	36.30

TESTED RESULT FOR UHF (Hi Power)

Measurement Results				
Channel Separation	Channel	Measurement Result (dBm)	Average power (dBm)	E.R.P (dBm)
12.5 KHz	Bottom(400.025MHz)	36.93	34.67	36.35
	Middle(435.000MHz)	36.95	34.73	36.37
	Top (469.975MHz)	36.94	34.66	36.33

The maximum Conducted Power (Lo) (CP) is
1 W for 12.5 KHz Channel Separation (VHF)
1 W for 12.5 KHz Channel Separation (UHF)

TESTED RESULT FOR VHF (Lo Power)

Measurement Results				
Channel Separation	Channel	Measurement Result (dBm)	Average power (dBm)	E.R.P (dBm)
12.5 KHz	Bottom(136.025MHz)	29.95	28.12	29.42
	Middle(155.000MHz)	29.98	28.15	29.46
	Top (173.975MHz)	29.93	28.08	29.40


TESTED RESULT FOR UHF (Lo Power)

Measurement Results				
Channel Separation	Channel	Measurement Result (dBm)	Average power (dBm)	E.R.P (dBm)
12.5 KHz	Bottom(400.025MHz)	29.94	28.13	29.45
	Middle(435.000MHz)	29.97	28.16	29.48
	Top (469.975MHz)	29.91	28.10	29.42


10.6 CONDUCT SPURIOUS PLOT

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

TEST RESULT OF VHF (Hi Power)
Conducted Spurious Emission(worst) @ 155.00MHz (30MHz-1GHz)

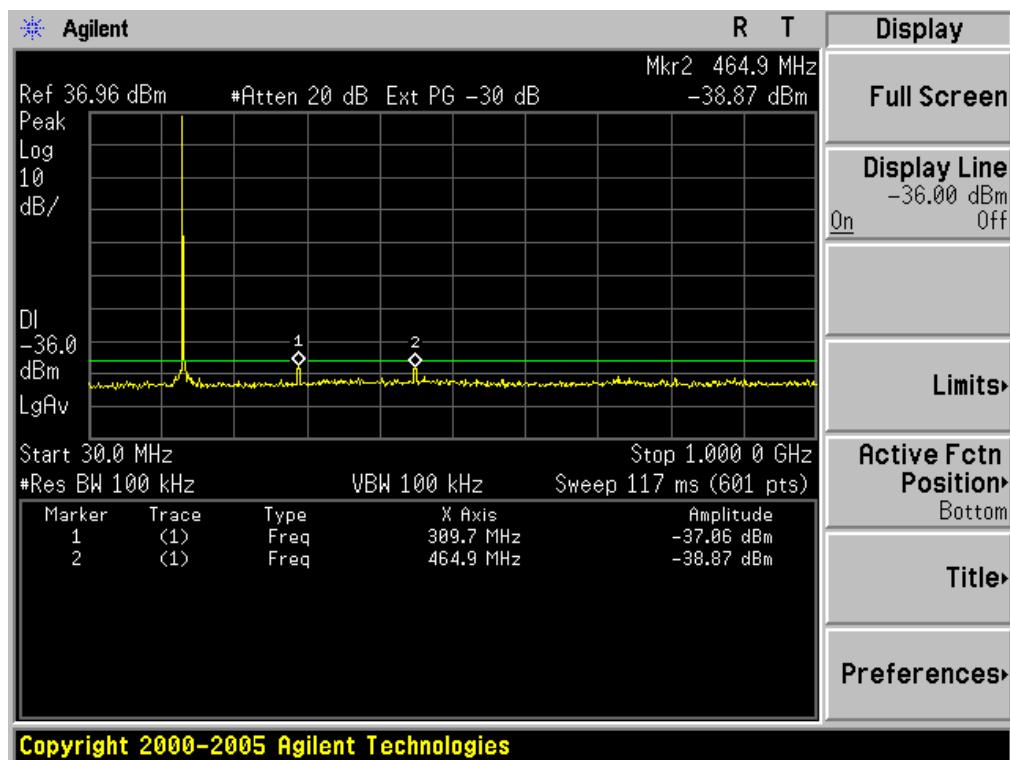


Conduct Spurious Emission(worst) @ 155.000MHz (1GHz-12.75GHz)

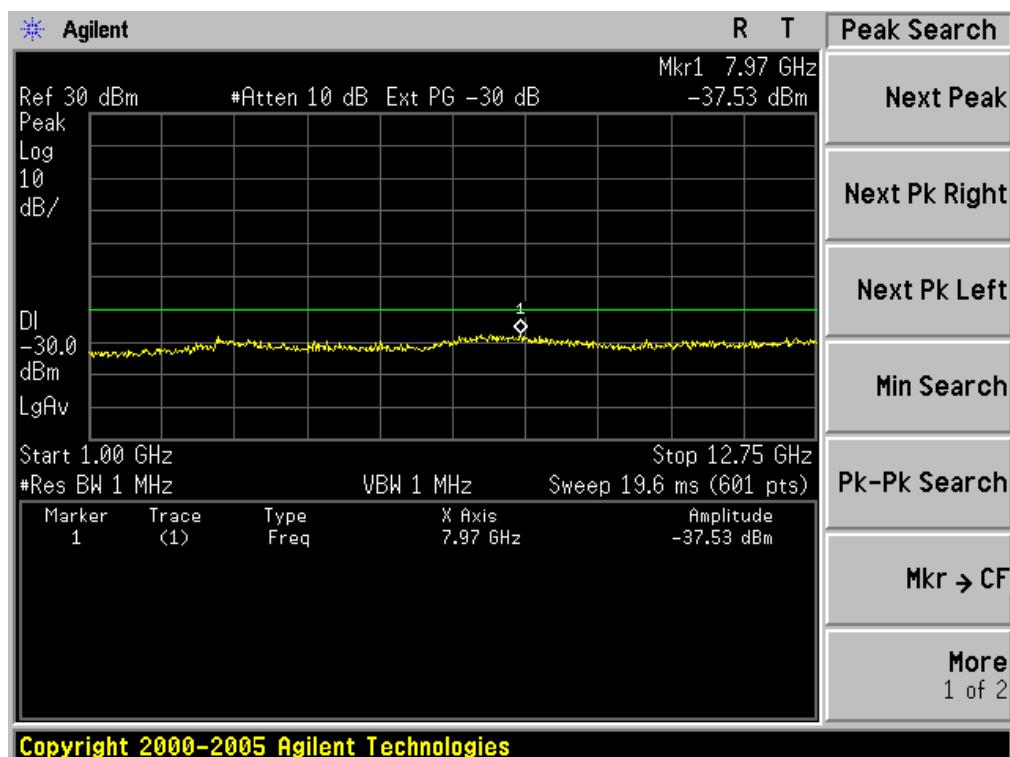


TEST RESULT OF UHF (Hi Power)

Conduct Spurious Emission(worst) @ 435.000MHz (30MHz-1GHz)

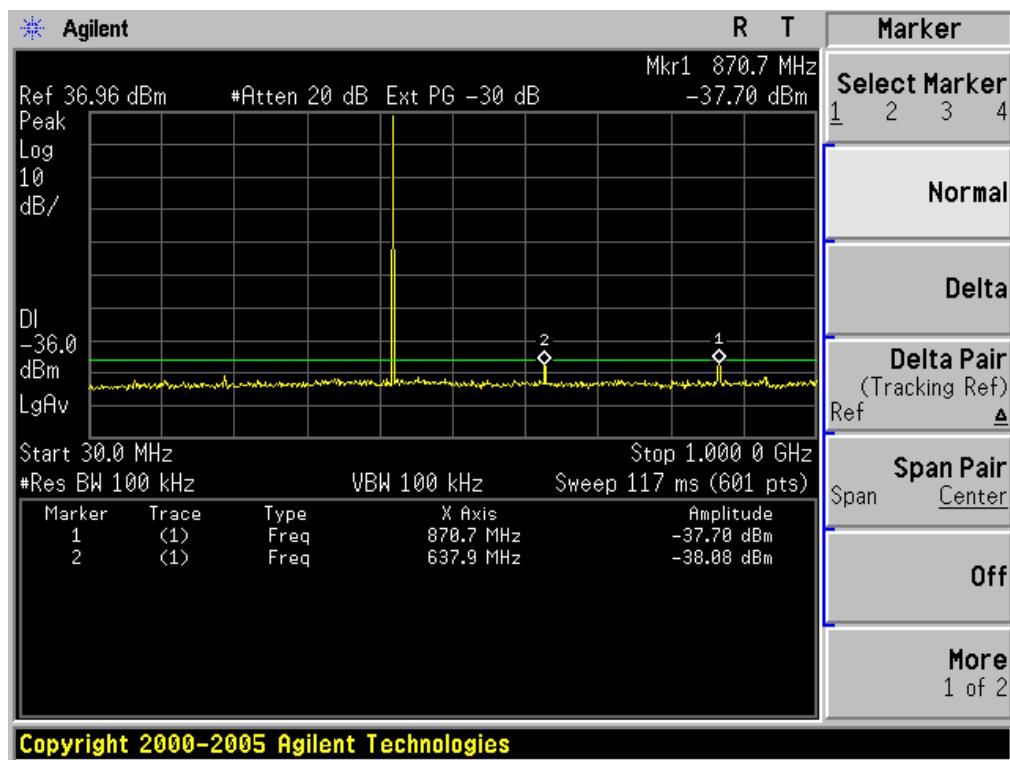

Conduct Spurious Emission(worst) @ 435.000MHz (1GHz-12.75GHz)

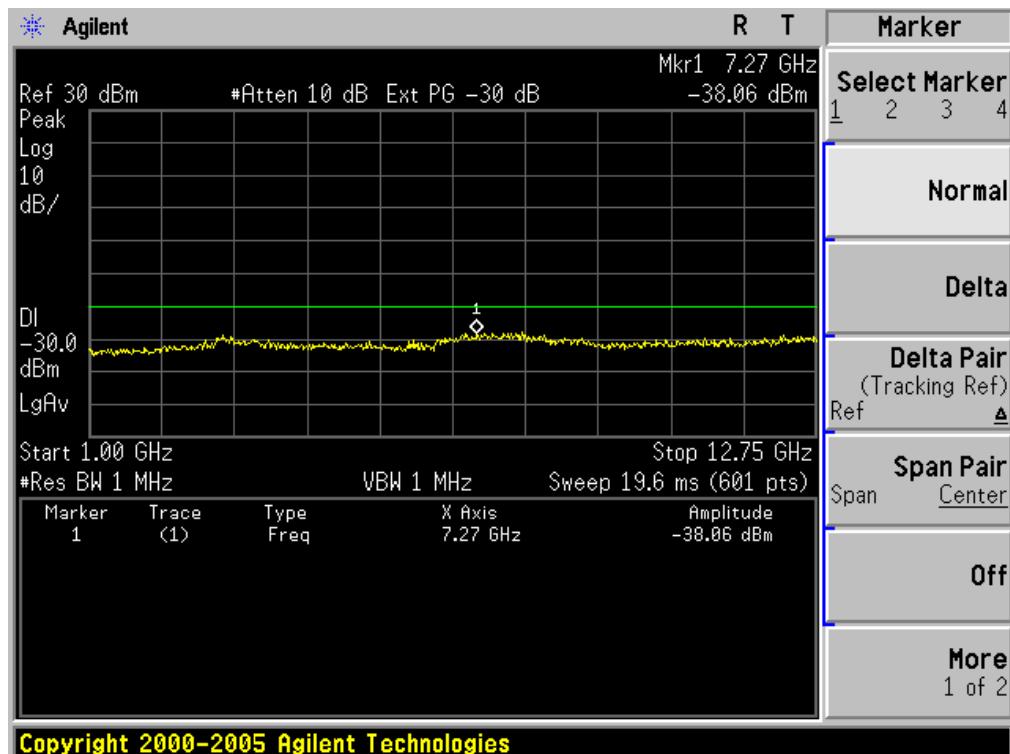

11. TRANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1 ⁴	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3 ⁴	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1 ⁴	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3 ⁴	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1 ⁴	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3 ⁴	± 6.25 kHz	5.0 ms	10.0 ms

¹ t_{off} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

² t_1 is the time period immediately following t_{off} .

³ t_2 is the time period immediately following t_1 .

⁴ t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

⁵ t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 TEST METHOD

TIA/EIA-603 2.2.19

11.3 TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Signal Generator	R&S	SMT02	A0304261	2013.06.26	2014.06.25
Storage Oscilloscope	Tektronix	TDS3052	B017447	2013.06.26	2014.06.25

11.4 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).


t1: period of time starting at ton and finishing according to above 11.1

t2: period of time starting at the end of t1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).


t3: period of time that finishing at toff and starting according to above 11.1

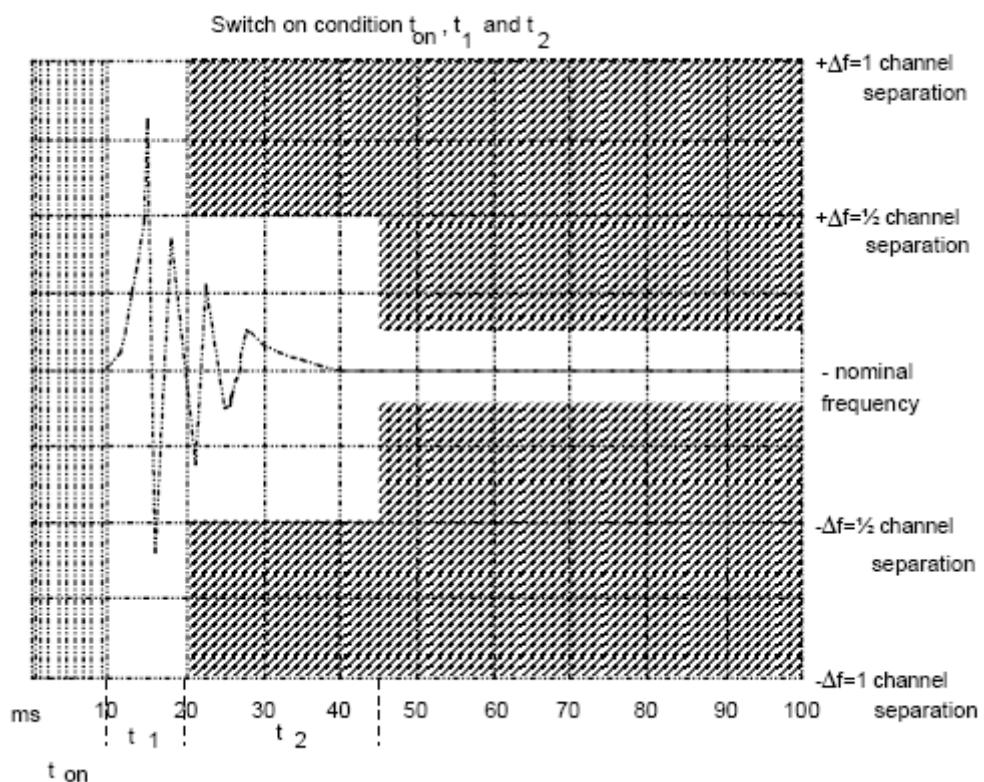

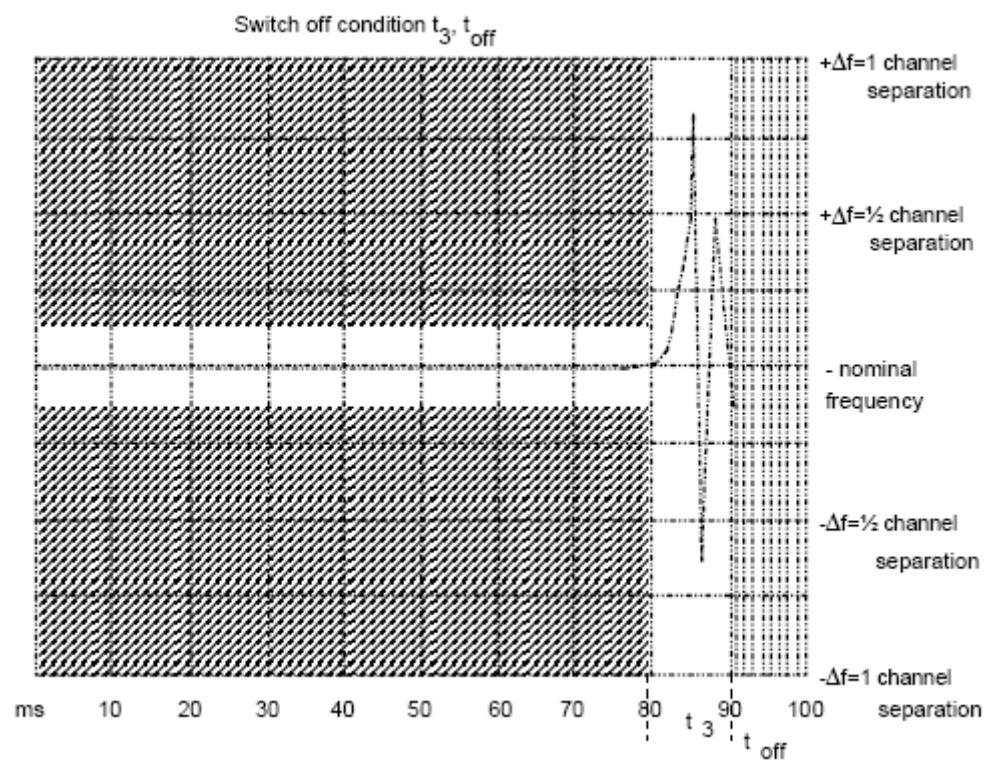


11.5 MEASURE RESULT

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

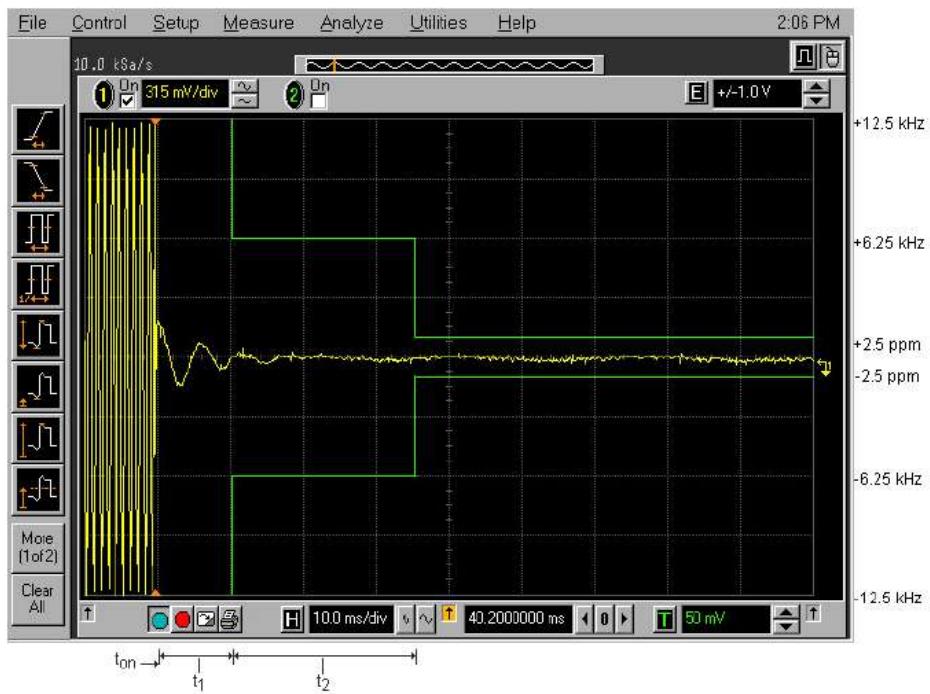

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

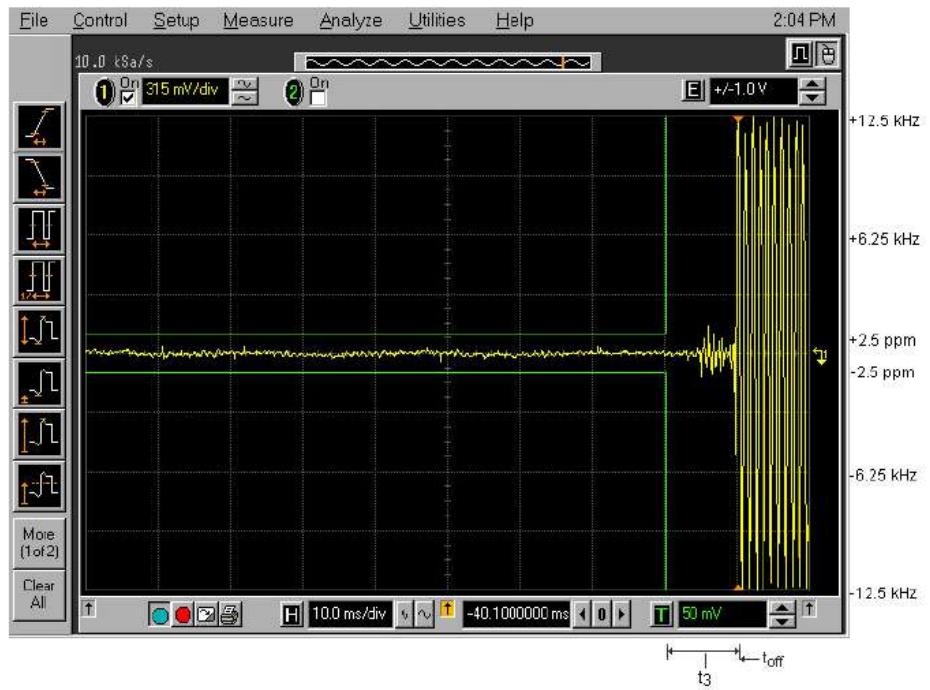

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

12. RADIATED EMISSION ON RECEIVING MODE

12.1 PROVISIONS APPLICABLE

FCC Part 15 Subpart B Section 15.109

12.2 TEST METHOD


ANSI C 63.4: 2003

12.3 TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440a	Us41421290	July 17, 2013	July 16, 2014
TEST RECEIVER	R&S	Esci	100694	July 17, 2013	July 16, 2014
LOOP ANTENNA	R&S	Zn30900n	Sel0097	July 17, 2013	July 16, 2014
HORN ANT.	EM	Em-Ah-10180	67	Apr.20, 2013	Apr.19, 2014
BROADBAND ANT.	R&S	Sas-521-4	A0304224	Jun.07,2013	Jun.06,2014

12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

RADIATED EMISSION TEST RESULTS – HORIZONTAL

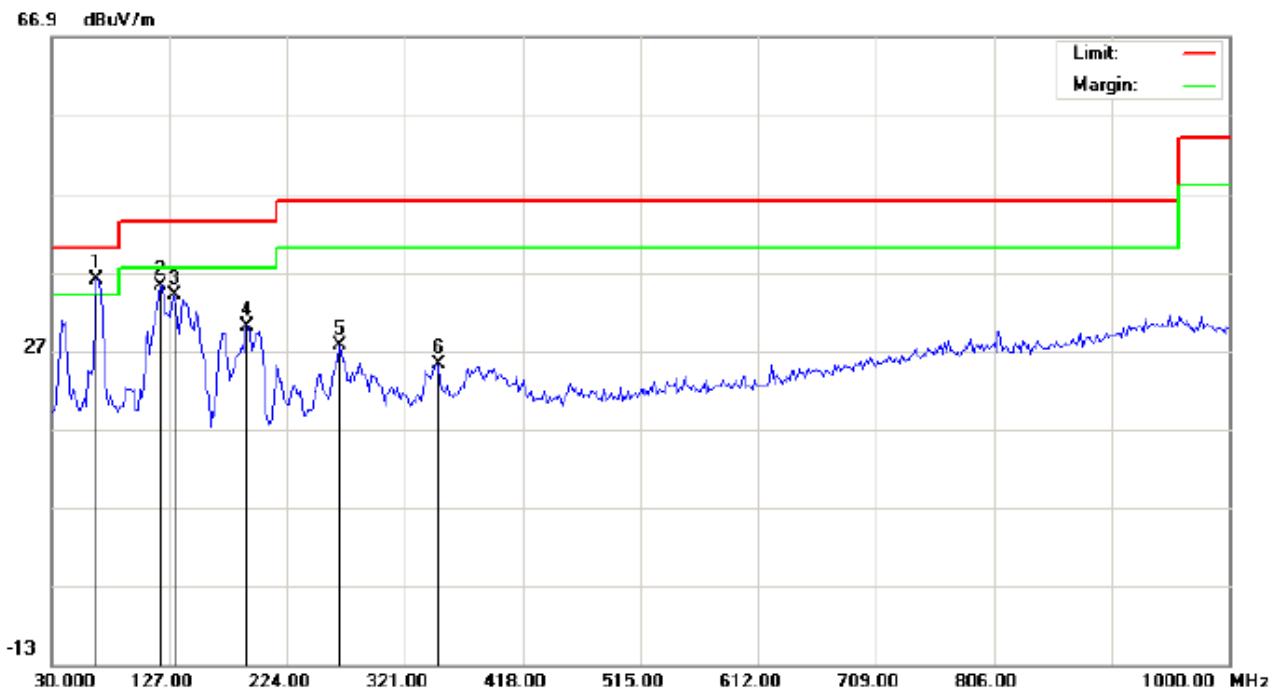

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %
EUT: Walkie Talkie Distance: 3m
M/N: UV-B5
Mode: Mode 1
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	67.1833	30.66	5.36	36.02	40.00	-3.98	peak			
2		120.5332	28.17	7.08	35.25	43.50	-8.25	peak			
3		131.8499	22.13	11.80	33.93	43.50	-9.57	peak			
4		191.6666	18.98	11.11	30.09	43.50	-13.41	peak			
5		267.6499	13.18	14.43	27.61	46.00	-18.39	peak			
6		348.4832	6.63	18.64	25.27	46.00	-20.73	peak			

RADIATED EMISSION TEST RESULTS – VERTICAL



Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation Power: Humidity: 60 %
EUT: Walkie Talkie Distance: 3m
M/N: UV-B5
Mode: Mode 1
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	18.63	11.51	30.14	40.00	-9.86	peak			
2	*	67.1833	24.09	10.51	34.60	40.00	-5.40	peak			
3	!	114.0665	26.53	11.45	37.98	43.50	-5.52	peak			
4		144.7831	17.53	15.23	32.76	43.50	-10.74	peak			
5		272.5000	17.88	14.58	32.46	46.00	-13.54	peak			
6		893.2998	3.35	28.44	31.79	46.00	-14.21	peak			

Note: All the modes had been tested, but only the worst data recorded in the report.

13. AUDIO LOW PASS FILTER RESPONSE

13.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 – 20 KHz	$60 \log_{10}(f/3) \text{ dB}$ where f is in KHz
20 – 30 KHz	50dB

13.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

13.3 TEST DATA

12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States


Frequency (KHz)	Audio In (dBV)	Audio out (dBV)	Attenuation (Out_In) dB	Attenuation Rel. to 3 KHz (dB)	Recommended Attenuation (dB)
0.1	-75.79	-30.33	45.2	-36.2	
0.2	-75.79	-18.72	57.3	-25.3	
0.4	-75.79	-5.36	70.2	-12.2	
0.6	-75.79	0.28	76.5	-6.6	
0.8	-75.79	4.15	79.4	-2.5	
1.0	-75.79	6.72	82.2	0.0	
1.5	-75.79	8.84	84.6	2.3	
2.0	-75.79	8.69	84.2	1.5	
2.5	-75.79	7.57	82.7	0.6	
3.0	-75.79	5.39	81.5	-1.4	0
3.5	-75.79	2.35	77.7	-4.6	-5
4.0	-75.79	-2.56	73.3	-9.3	-8
4.5	-75.79	-8.42	67.7	-15.2	-11
5.0	-75.79	-14.05	61.5	-20.5	-14
6.0	-75.79	-22.68	53.7	-29.5	-18
7.0	-75.79	-30.62	45.6	-37.7	-23
8.0	-75.79	-38.95	36.5	-45.3	-26
9.0	-75.79	-60.00	15.7	-66.6	-29
10.0	-75.79	-60.00	15.7	-66.6	-31
12.0	-75.79	-60.00	15.7	-66.6	-37
14.0	-75.79	-60.00	15.7	-66.6	-40
16.0	-75.79	-60.00	15.7	-66.6	-45
18.0	-75.79	-60.00	15.7	-66.6	-47
20.0	-75.79	-60.00	15.7	-66.6	-50
25.0	-75.79	-60.00	15.7	-66.6	-50
30.0	-75.79	-60.00	15.7	-66.6	-50
35.0	-75.79	-60.00	15.7	-66.6	-50
40.0	-75.79	-60.00	15.7	-66.6	-50
45.0	-75.79	-60.00	15.7	-66.6	-50
50.0	-75.79	-60.00	15.7	-66.6	-50

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

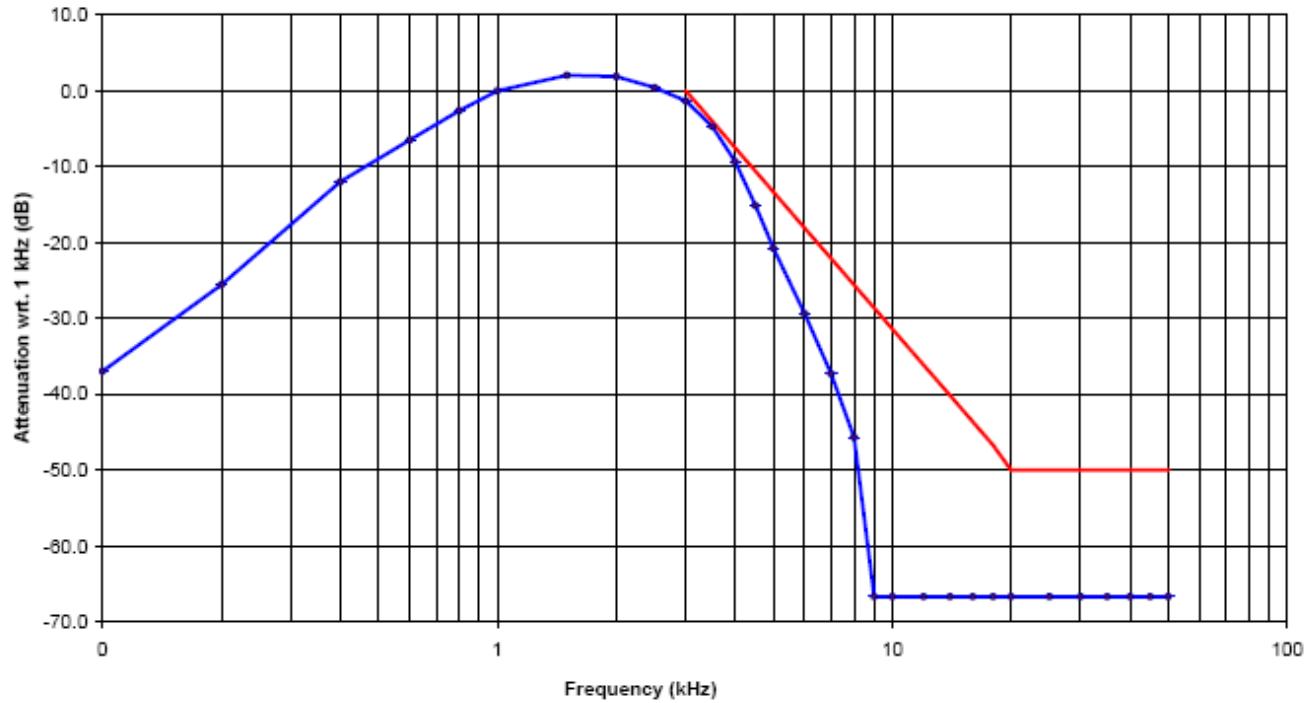

Note: All the modes and power (Hi and Lo) had been tested, but only the worst data recorded in the report.

APPENDIX I
PHOTOGRAPHS OF SETUP
RADIATED TEST SETUP

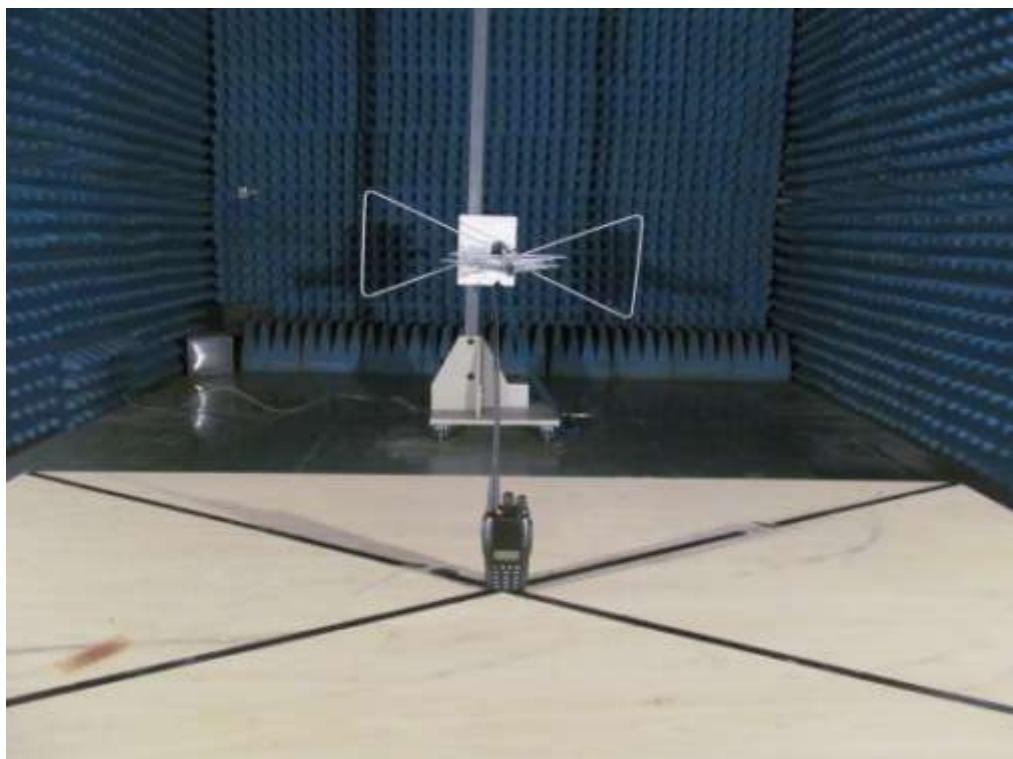

APPENDIX II
EXTERNAL VIEW OF EUT
WHOLE VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




OPEN VIEW OF EUT




INTERNAL VIEW-1 OF EUT



INTERNAL VIEW-2 OF EUT

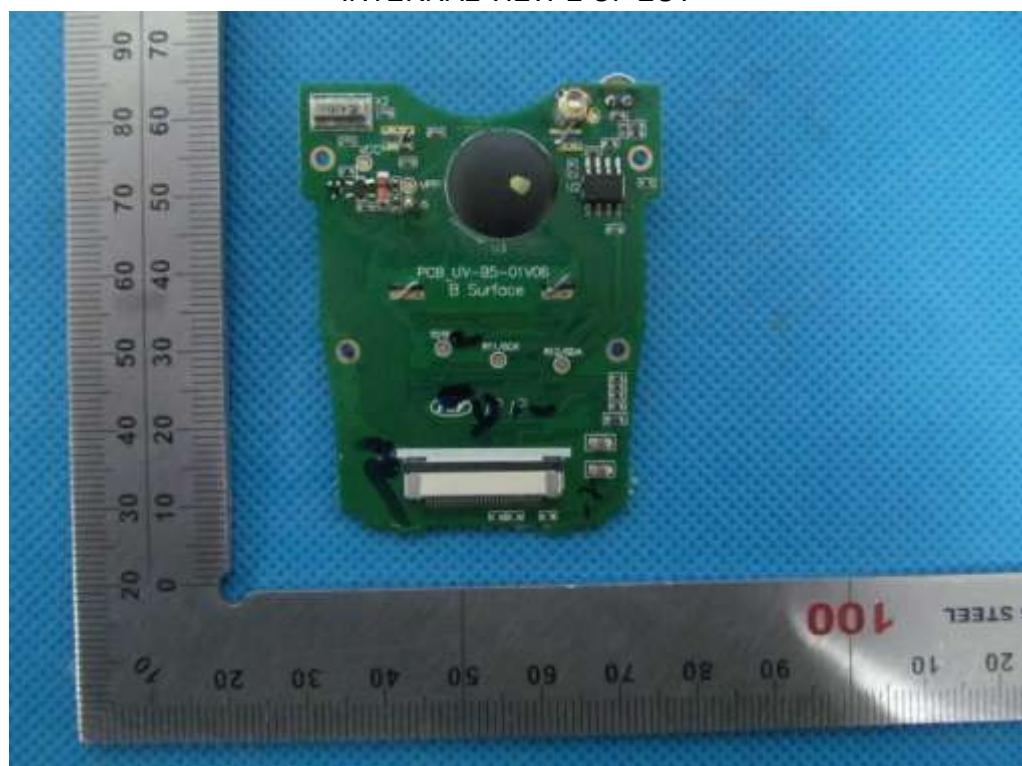

INTERNAL VIEW-3 OF EUT

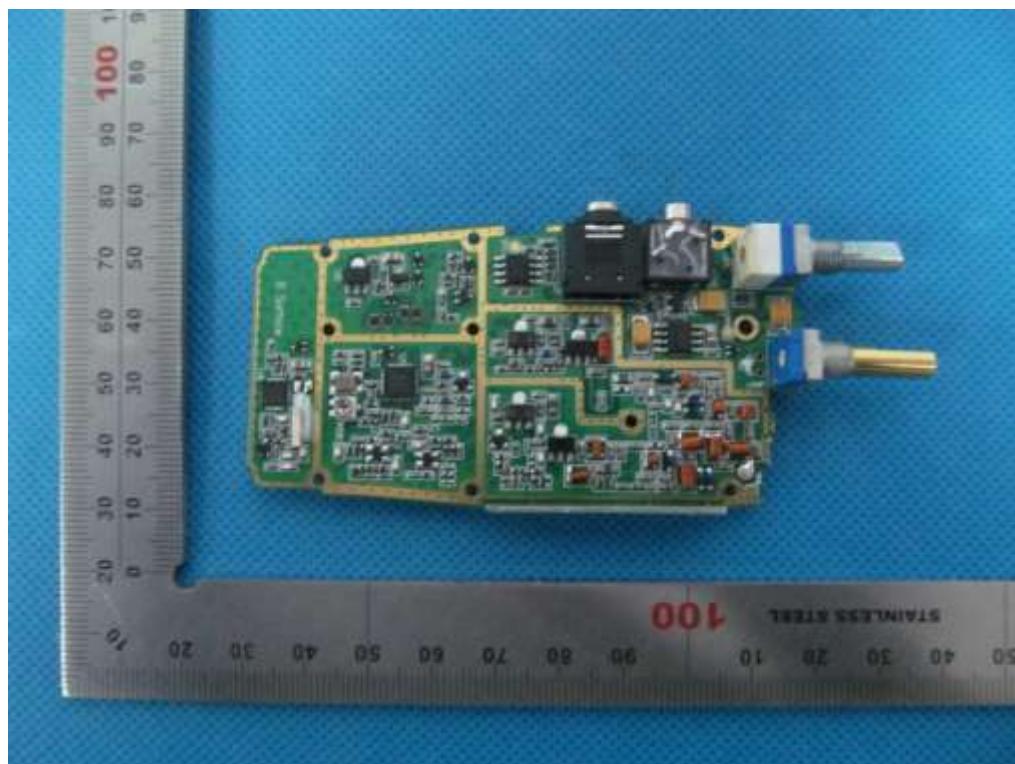

INTERNAL VIEW-4 OF EUT



----END OF REPORT----