

## FCC 47 CFR PART 15 SUBPART C

Product Type : JukeBlox Networked Media Module  
Applicant : STANDARD MICROSYSTEMS CORPORATION  
Address : 3930, EAST RAY ROAD SUITE 200, PHOENIX, ARIZONA,  
85044-7176, UNITED STATES  
Trade Name : PICO Module  
Model Number : CX875-3PB  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Receive Date : Dec. 27, 2012  
Test Period : Jan. 02 ~ Jan. 08, 2013  
Issue Date : Jan. 24, 2013

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Jan. 16, 2013	Initial Issue	
01	Jan. 24, 2013	Revised Antenna description	Nico Peng

## Verification of Compliance

Issued Date: 01/24/2013

Product Type : JukeBlox Networked Media Module  
Applicant : STANDARD MICROSYSTEMS CORPORATION  
Address : 3930, EAST RAY ROAD SUITE 200, PHOENIX, ARIZONA,  
85044-7176, UNITED STATES  
Trade Name : PICO Module  
Model Number : CX875-3PB  
FCC ID : ZQO-CX8753PB  
IC : 2581A-CX8753PB  
EUT Rated Voltage : DC 1.2V / 1.9V / 3.3V  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009


Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>




The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : 

(Manager)

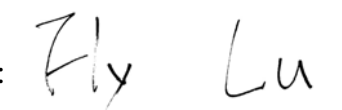Reviewed By : 

(Testing Engineer)

(Fly Lu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information</b> .....	<b>6</b>
<b>2</b>	<b>EUT Description</b> .....	<b>7</b>
<b>3</b>	<b>Test Methodology</b> .....	<b>8</b>
	3.1. Mode of Operation .....	8
	3.2. EUT Exercise Software .....	8
	3.3. Configuration of Test System Details .....	9
	3.4. Test Site Environment .....	9
<b>4</b>	<b>Conducted Emission Measurement</b> .....	<b>10</b>
	4.1. Limit .....	10
	4.2. Test Instruments .....	10
	4.3. Test Setup .....	10
	4.4. Test Procedure .....	11
	4.5. Test Result .....	12
<b>5</b>	<b>Radiated Emission Measurement</b> .....	<b>14</b>
	5.1. Limit .....	14
	5.2. Test Instruments .....	14
	5.3. Setup .....	15
	5.4. Test Procedure .....	16
	5.5. Test Result .....	18
<b>6</b>	<b>Maximum Conducted Output Power Measurement</b> .....	<b>23</b>
	6.1. Limit .....	23
	6.2. Test Setup .....	23
	6.3. Test Instruments .....	23
	6.4. Test Procedure .....	23
	6.5. Test Result .....	24
<b>7</b>	<b>6dB RF Bandwidth Measurement</b> .....	<b>25</b>
	7.1. Limit .....	25
	7.2. Test Setup .....	25
	7.3. Test Instruments .....	25
	7.4. Test Procedure .....	25
	7.5. Test Result .....	26
	7.6. Test Graphs .....	27

<b>8</b>	<b>Maximum Power Density Measurement .....</b>	<b>29</b>
8.1.	Limit .....	29
8.2.	Test Setup.....	29
8.3.	Test Instruments .....	29
8.4.	Test Procedure .....	29
8.5.	Test Result.....	30
8.6.	Test Graphs .....	31
<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>33</b>
9.1.	Limit .....	33
9.2.	Test Setup.....	33
9.3.	Test Instruments .....	33
9.4.	Test Procedure .....	33
9.5.	Test Graphs .....	34
<b>10</b>	<b>Band Edges Measurement .....</b>	<b>36</b>
10.1.	Limit .....	36
10.2.	Test Setup.....	36
10.3.	Test Instruments .....	36
10.4.	Test Procedure .....	36
10.5.	Test Result.....	37
10.6.	Test Graphs .....	39
<b>11</b>	<b>99 % Occupied Bandwidth Measurement.....</b>	<b>43</b>
11.1.	Limit .....	43
11.2.	Test Setup.....	43
11.3.	Test Instruments .....	43
11.4.	Test Procedure .....	43
11.5.	Test Result.....	44
11.6.	Test Graphs .....	45
<b>12</b>	<b>Antenna Measurement.....</b>	<b>47</b>
12.1.	Limit .....	47
12.2.	Antenna Connector Construction .....	47

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	----
----	6	Receiver Radiated Emissions	PASS	----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	----
15.247(b)(3)	A8.4	Max. Output Power	PASS	----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	----
15.247(d)	A8.5	Band Edge Measurement	PASS	----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	----
15.203	-	Antenna Requirement	PASS	----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	JukeBlox Networked Media Module
Trade Name	PICO Module
Model No.	CX875-3PB
Applicant	STANDARD MICROSYSTEMS CORPORATION 3930, EAST RAY ROAD SUITE 200, PHOENIX, ARIZONA, 85044-7176, UNITED STATES
Manufacturer	DONG GUAN G-COM COMPUTER CO., LTD 1st Row, Yin Shan Road, Yin Hwu Industrial Area, Qingxi Town, DongGuan City, GuangDong, China
FCC ID	ZQO-CX8753PB
IC	2581A-CX8753PB
Frequency Range	IEEE 802.11b / 802.11g: 2412 ~ 2462 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM
Antenna used	Trade name: MAG.LAYERS, Model number: EDA-8709-2G4C1-A66
Antenna Type	External Antenna
Antenna Gain	2.0 dBi
RF Output Power	IEEE 802.11b: 0.108 W / 20.34 dBm IEEE 802.11g: 0.253 W / 24.03 dBm

### EUT Different Description :

This device has four versions, the different descriptions see below table.

Parts	Model Number	A1	A2	A3	A4
SDRAM	Winbond W9812G6JH-6		✓		✓
	ESMT M12L128168A-6TG2N	✓		✓	
NOR Flash	MXIC MX29GL640EHT2I-70G		✓		✓
	Winbond W29GL064CH7T	✓		✓	
C196 Capacitor	15pF			✓	✓
	18pF	✓	✓		
C197 Capacitor	15pF			✓	✓
	12pF	✓	✓		

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: A1, Normal Operation Mode
Mode 2: A1, IEEE 802.11b Link Mode
Mode 3: A1, IEEE 802.11g Link Mode
Mode 4: A1, Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode (CON 2):

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode (CON 1):


Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

#### 3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.



### 3.3. Configuration of Test System Details

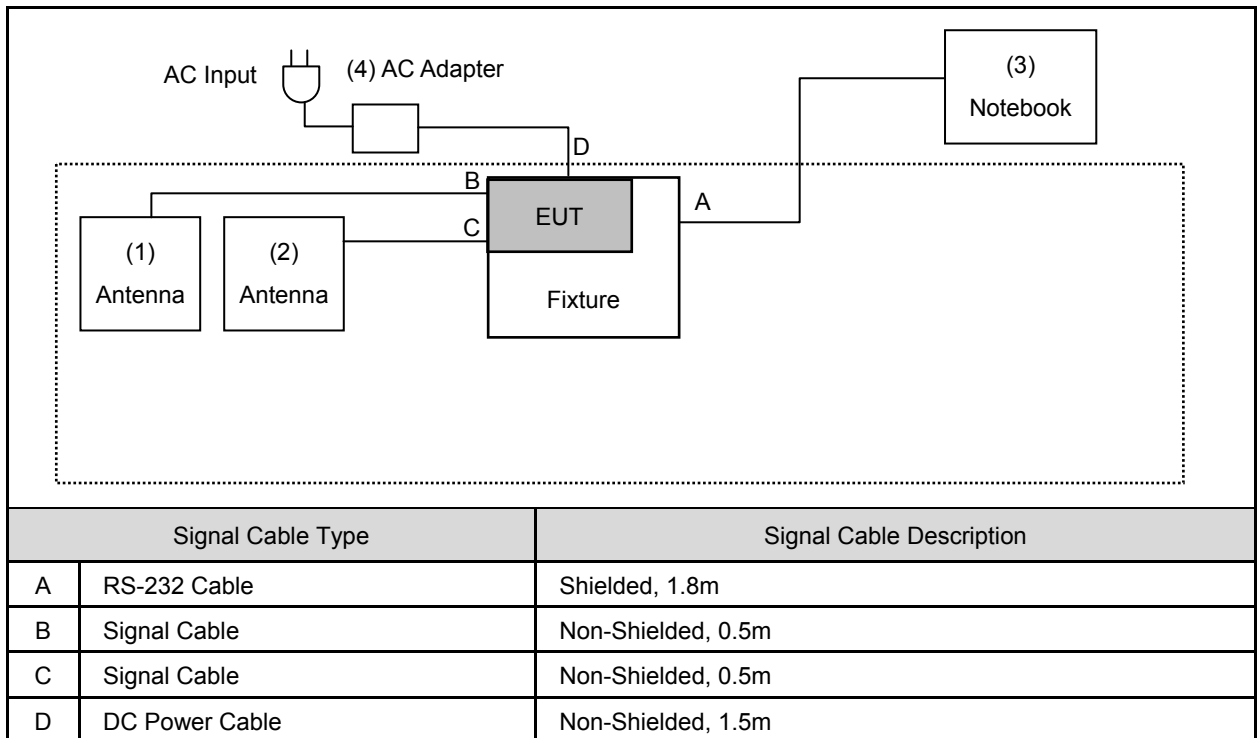

Devices Description					
Product	Manufacturer	Model Number	Serial Number	Power Cord	
(1)	Antenna	MAG.LAYERS	EDA-8709-2G4C1-A66	N/A	N/A
(2)	Antenna	MAG.LAYERS	EDA-8709-2G4C1-A66	N/A	N/A
(3)	Notebook	DELL	D531	CN-OXM006-48643 -87A-3398	Non-Shielded, 2.0m
(4)	AC Adapter	APD	WA-247E12	N/A	Non-Shielded, 1.5m

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/18/2012	(1)
LISN	R&S	ENV216	101040	03/07/2012	(1)
LISN	R&S	ENV216	101041	03/07/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 4.3. Test Setup

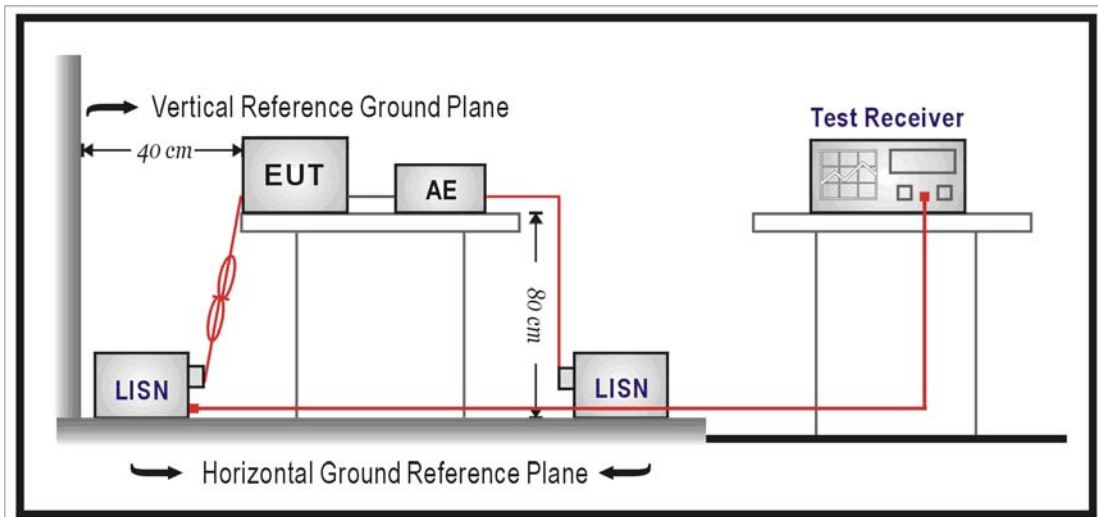

#### 4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


#### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	CX875-3PB	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/03/2013
		Test By:	Fly Lu
Description:			

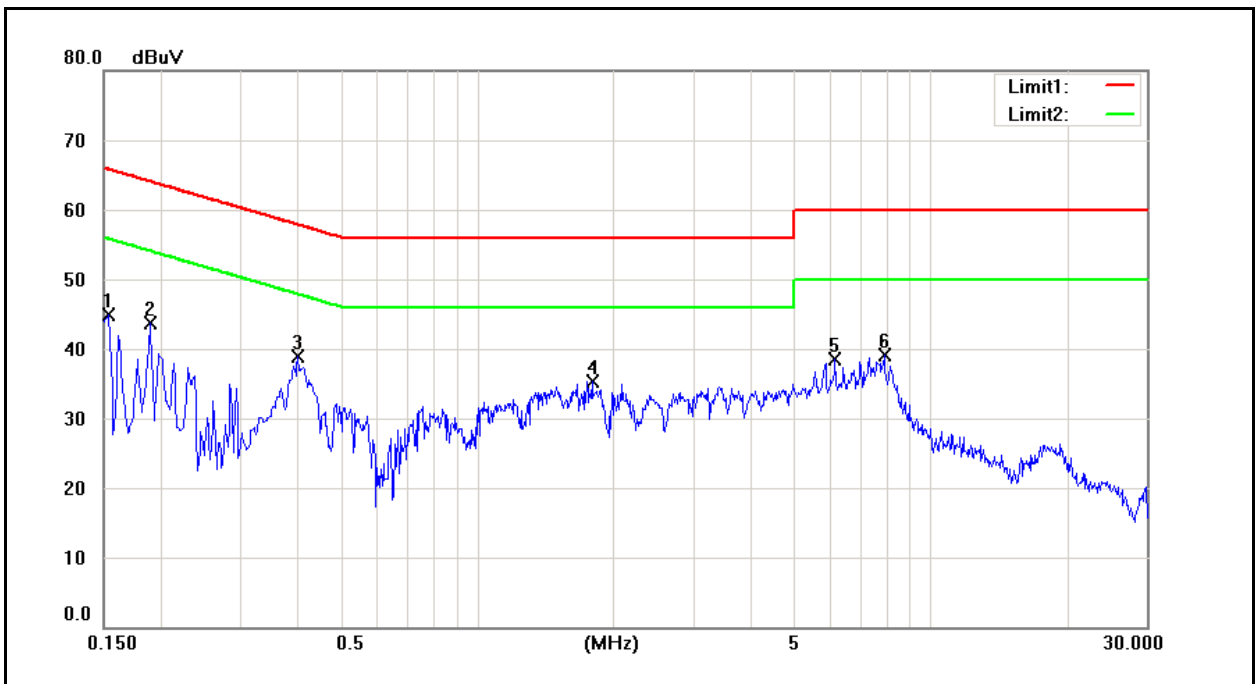

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	33.78	17.64	9.72	43.50	27.36	65.78	55.78	-22.28	-28.42	Pass
2	0.1900	25.30	12.50	9.72	35.02	22.22	64.04	54.04	-29.02	-31.82	Pass
3	0.4020	28.06	18.02	9.72	37.78	27.74	57.81	47.81	-20.03	-20.07	Pass
4	1.7980	22.03	15.36	9.78	31.81	25.14	56.00	46.00	-24.19	-20.86	Pass
5	6.1540	24.25	18.52	9.88	34.13	28.40	60.00	50.00	-25.87	-21.60	Pass
6	7.9060	23.95	18.17	10.11	34.06	28.28	60.00	50.00	-25.94	-21.72	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	CX875-3PB	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/03/2013
		Test By:	Fly Lu
Description:			

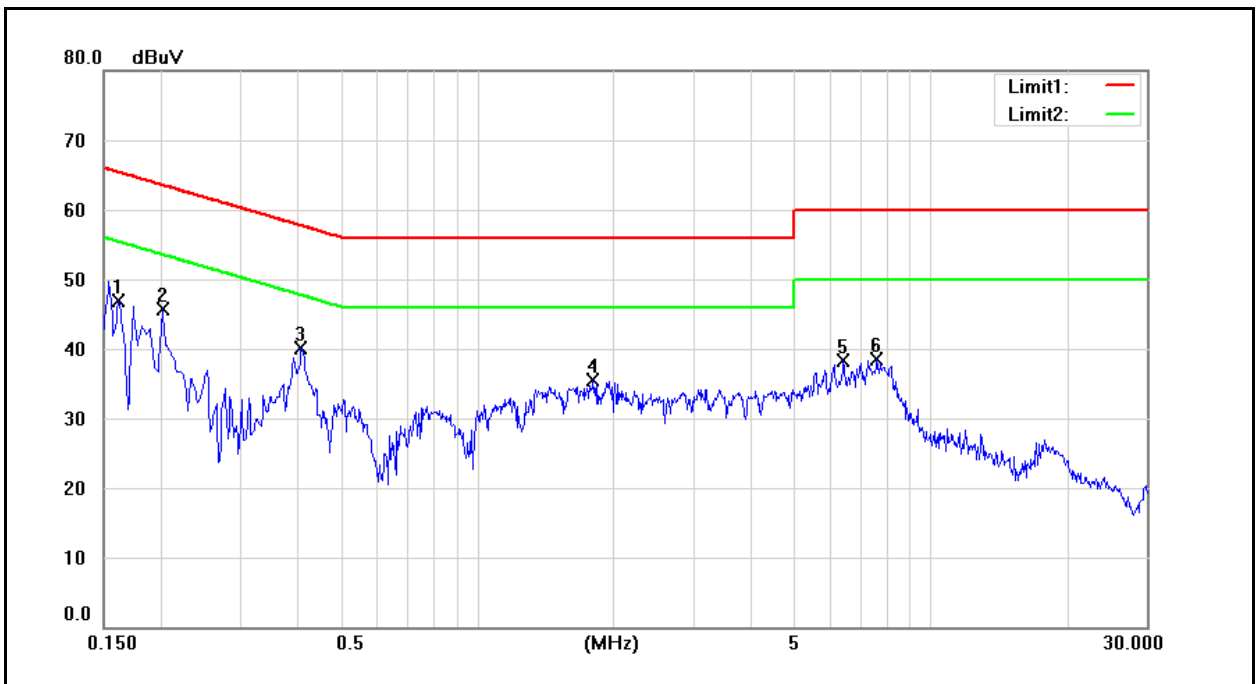

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	37.20	37.20	9.65	46.85	46.85	65.36	55.36	-18.51	-8.51	Pass
2	0.2020	36.12	36.12	9.64	45.76	45.76	63.53	53.53	-17.77	-7.77	Pass
3	0.4100	30.38	30.38	9.64	40.02	40.02	57.65	47.65	-17.63	-7.63	Pass
4	1.8060	25.80	25.80	9.71	35.51	35.51	56.00	46.00	-20.49	-10.49	Pass
5	6.4220	28.35	28.35	9.88	38.23	38.23	60.00	50.00	-21.77	-11.77	Pass
6	7.6260	28.52	28.52	10.04	38.56	38.56	60.00	50.00	-21.44	-11.44	Pass

## 5 Radiated Emission Measurement

### 5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### 5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/16/2012	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/16/2012	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/22/2012	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/22/2012	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/29/2012	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/15/2012	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/21/2012	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/18/2012	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

### 5.3. Setup

Below 1GHz

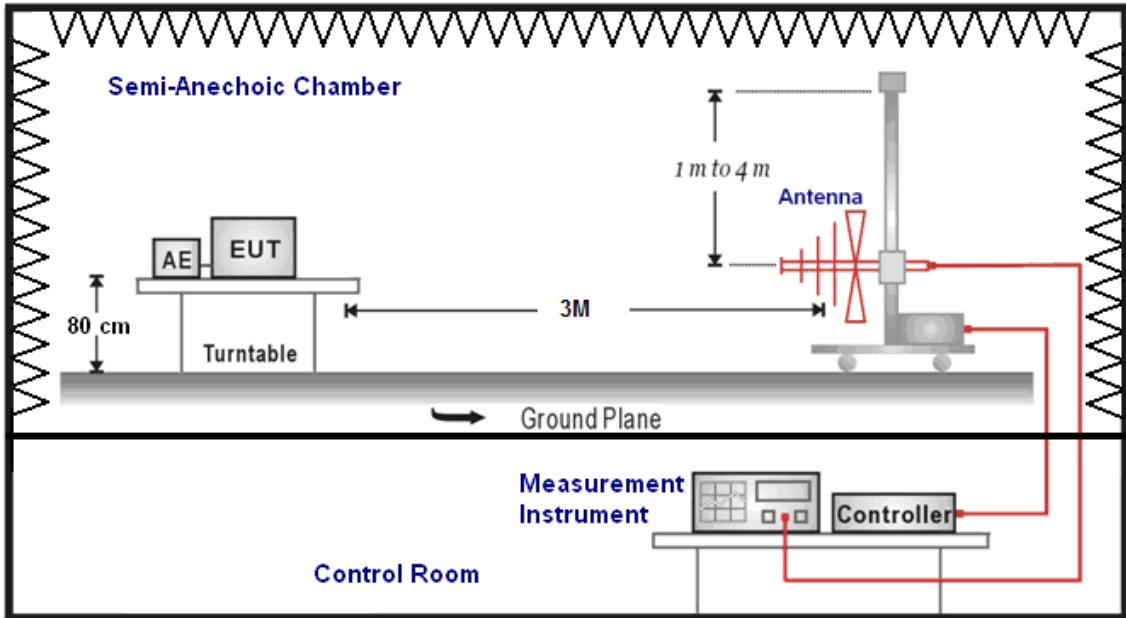

Above 1GHz

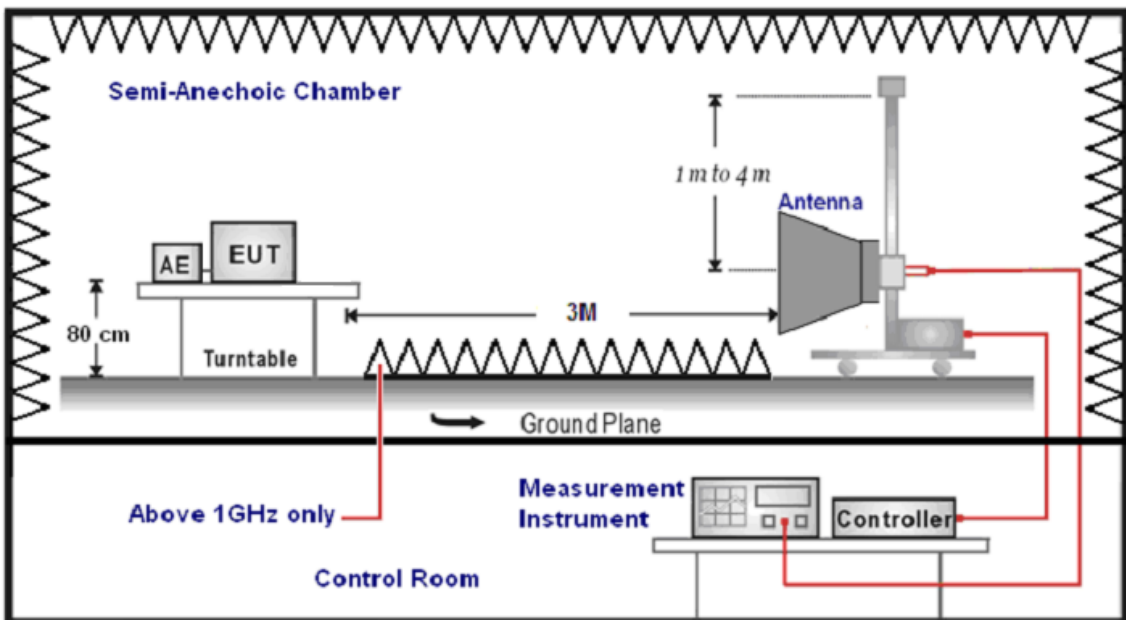

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 5.5. Test Result

### Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	CX875-3PB	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/02/2013
		Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
79.5000	44.88	-18.59	26.29	40.00	-13.71	QP	H
199.5000	42.96	-13.88	29.08	43.50	-14.42	QP	H
303.5000	45.53	-10.40	35.13	46.00	-10.87	QP	H
480.5000	33.99	-7.27	26.72	46.00	-19.28	QP	H
663.5000	40.94	-3.97	36.97	46.00	-9.03	QP	H
800.0000	34.19	-1.55	32.64	46.00	-13.36	QP	H
156.5000	44.53	-17.06	27.47	43.50	-16.03	QP	V
306.0000	40.80	-10.32	30.48	46.00	-15.52	QP	V
476.0000	39.08	-7.36	31.72	46.00	-14.28	QP	V
533.0000	40.03	-6.63	33.40	46.00	-12.60	QP	V
666.0000	41.36	-3.96	37.40	46.00	-8.60	QP	V
800.0000	33.22	-1.55	31.67	46.00	-14.33	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

**Above 1GHz**

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	CX875-3PB	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	01/02/2013
Frequency:	2412MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2967.000	37.34	5.82	43.16	74.00	-30.84	peak	H
4542.000	35.33	10.99	46.32	74.00	-27.68	peak	H
5830.000	33.58	15.36	48.94	74.00	-25.06	peak	H
3128.000	38.25	6.19	44.44	74.00	-29.56	peak	V
4647.000	35.55	11.25	46.80	74.00	-27.20	peak	V
6089.000	32.56	16.15	48.71	74.00	-25.29	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	CX875-3PB	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	01/02/2013
Frequency:	2437MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2939.000	36.62	5.75	42.37	74.00	-31.63	peak	H
4549.000	35.04	11.01	46.05	74.00	-27.95	peak	H
6019.000	33.57	15.94	49.51	74.00	-24.49	peak	H
2897.000	36.72	5.64	42.36	74.00	-31.64	peak	V
4874.000	38.86	11.84	50.70	74.00	-23.30	peak	V
6005.000	33.51	15.90	49.41	74.00	-24.59	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	CX875-3PB			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/02/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3079.000	36.89	6.08	42.97	74.00	-31.03	peak	H
4605.000	35.86	11.15	47.01	74.00	-26.99	peak	H
6103.000	33.60	16.19	49.79	74.00	-24.21	peak	H
3142.000	38.04	6.22	44.26	74.00	-29.74	peak	V
4924.000	39.89	11.97	51.86	74.00	-22.14	peak	V
5914.000	33.31	15.61	48.92	74.00	-25.08	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	CX875-3PB			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/02/2013		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	37.73	5.97	43.70	74.00	-30.30	peak	H
4577.000	36.11	11.07	47.18	74.00	-26.82	peak	H
5648.000	34.28	14.80	49.08	74.00	-24.92	peak	H
3198.000	37.61	6.34	43.95	74.00	-30.05	peak	V
4598.000	35.50	11.14	46.64	74.00	-27.36	peak	V
5977.000	34.77	15.81	50.58	74.00	-23.42	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	CX875-3PB			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/02/2013		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2995.000	38.29	5.90	44.19	74.00	-29.81	peak	H
4591.000	36.02	11.11	47.13	74.00	-26.87	peak	H
5928.000	34.78	15.66	50.44	74.00	-23.56	peak	H
3149.000	37.95	6.24	44.19	74.00	-29.81	peak	V
4591.000	36.22	11.11	47.33	74.00	-26.67	peak	V
5998.000	34.80	15.88	50.68	74.00	-23.32	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	CX875-3PB			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/02/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3065.000	37.79	6.06	43.85	74.00	-30.15	peak	H
4563.000	34.74	11.05	45.79	74.00	-28.21	peak	H
5963.000	33.41	15.76	49.17	74.00	-24.83	peak	H
3170.000	38.46	6.28	44.74	74.00	-29.26	peak	V
4605.000	37.23	11.15	48.38	74.00	-25.62	peak	V
6131.000	33.37	16.29	49.66	74.00	-24.34	peak	V


Standard:	FCC Part 15C			Test Distance:	3m			
Test item:	Radiated Emission			Power:	AC 120V/60Hz			
Model Number:	CX875-3PB			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	4			Date:	01/02/2013			
Modulation:	IEEE 802.11b			Test By:	Fly Lu			
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Peak (dBuV/m)	AVG. (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3107.000	38.59	6.14	44.73	74.00	54.00	-29.27	peak	H
4451.000	35.48	10.71	46.19	74.00	54.00	-27.81	peak	H
6061.000	33.91	16.07	49.98	74.00	54.00	-24.02	peak	H
2995.000	37.27	5.90	43.17	74.00	54.00	-30.83	peak	V
4549.000	33.46	11.01	44.47	74.00	54.00	-29.53	peak	V
5893.000	32.90	15.55	48.45	74.00	54.00	-25.55	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

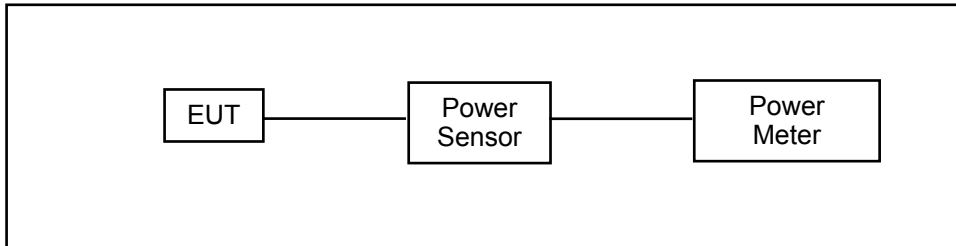

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	01/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	01/19/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Model Number	CX875-3PB									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11b Link Mode									
Date of Test	01/02/2013					Test Site		TE05		
Frequency (MHz)	Data Rate	CON 1				CON 2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1	17.38	0.055	20.01	0.100	17.46	0.056	20.18	0.104	< 30
2437		---	---	---	---	17.53	0.057	20.27	0.106	< 30
2462		---	---	---	---	17.65	0.058	<b>20.34</b>	<b>0.108</b>	< 30

Model Number	CX875-3PB									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11g Link Mode									
Date of Test	01/02/2013					Test Site		TE05		
Frequency (MHz)	Data Rate	CON 1				CON 2				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1	15.99	0.040	<b>24.03</b>	<b>0.253</b>	15.79	0.038	23.85	0.243	< 30
2437		15.89	0.039	23.86	0.243	---	---	---	---	< 30
2462		12.85	0.019	22.59	0.182	---	---	---	---	< 30

Note: Find worst case between CON 1 and CON 2, and check with lowest data rate.




## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

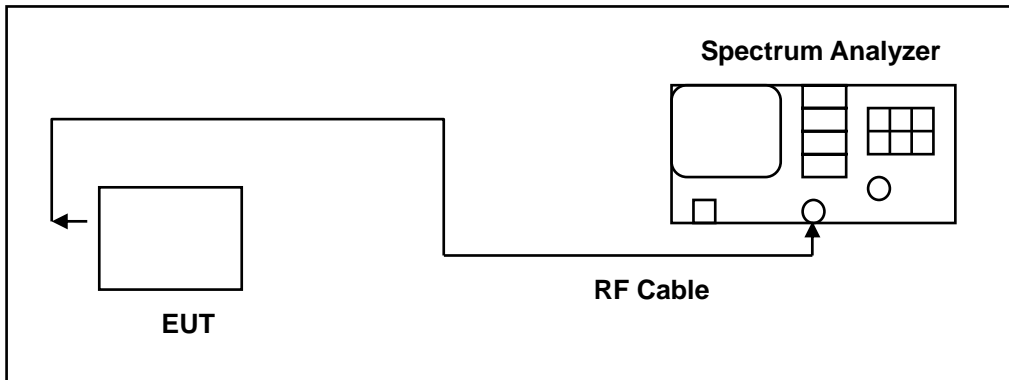

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

**7.5. Test Result**




Model Number	CX875-3PB		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	01/08/2013	Test Site	TE05
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	12084	> 500	
2437	12053	> 500	
2462	11156	> 500	

Model Number	CX875-3PB		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	01/08/2013	Test Site	TE06
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2412	16385	> 500	
2437	16425	> 500	
2462	15745	> 500	

**7.6. Test Graphs**

Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.5 dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.0572 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -18.937 kHz</p> <p>x dB Bandwidth 12.084 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.5 dB</p> <p>Start 2.422 00 GHz Stop 2.452 00 GHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.0380 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -14.936 kHz</p> <p>x dB Bandwidth 12.053 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 10.5 dB</p> <p>Start 2.447 00 GHz Stop 2.477 00 GHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.0539 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.073 kHz</p> <p>x dB Bandwidth 11.156 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode

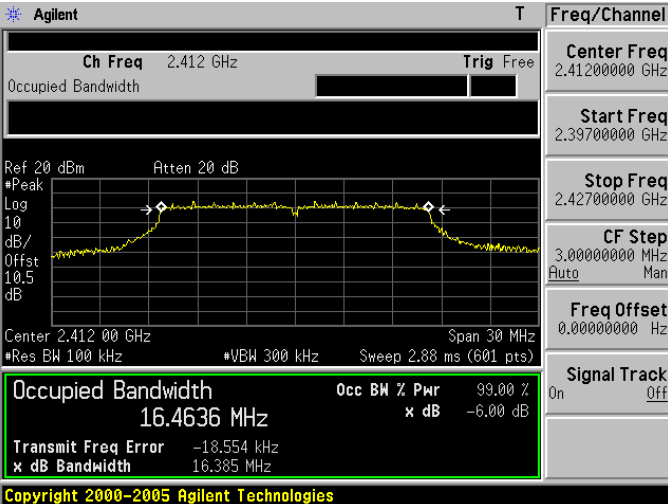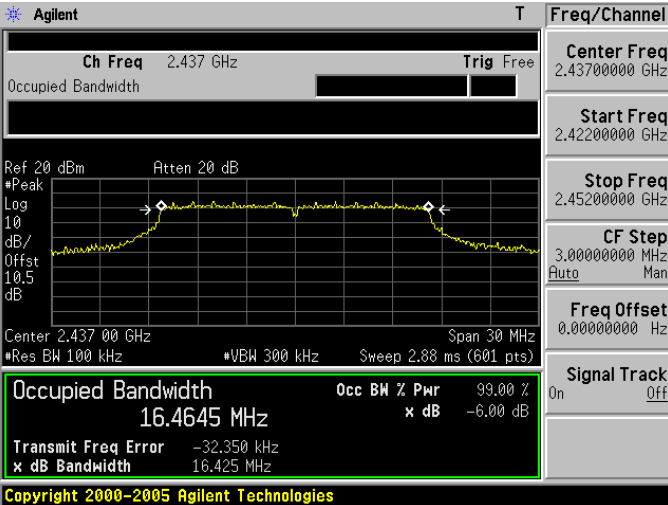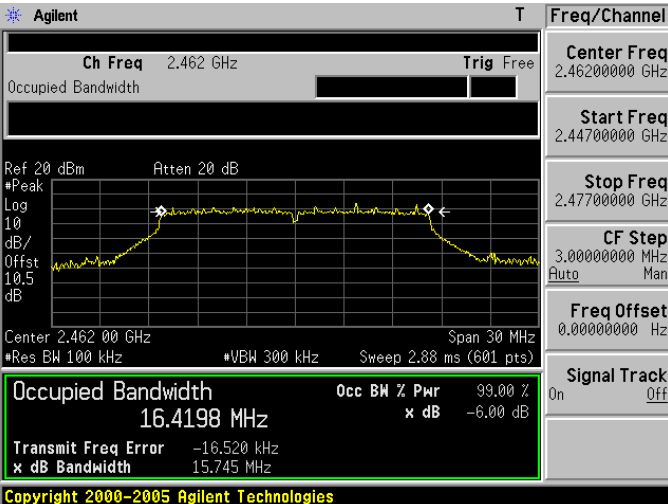
2412	 <p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4636 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -18.554 kHz x dB Bandwidth 16.385 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4645 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -32.350 kHz x dB Bandwidth 16.425 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4198 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.520 kHz x dB Bandwidth 15.745 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

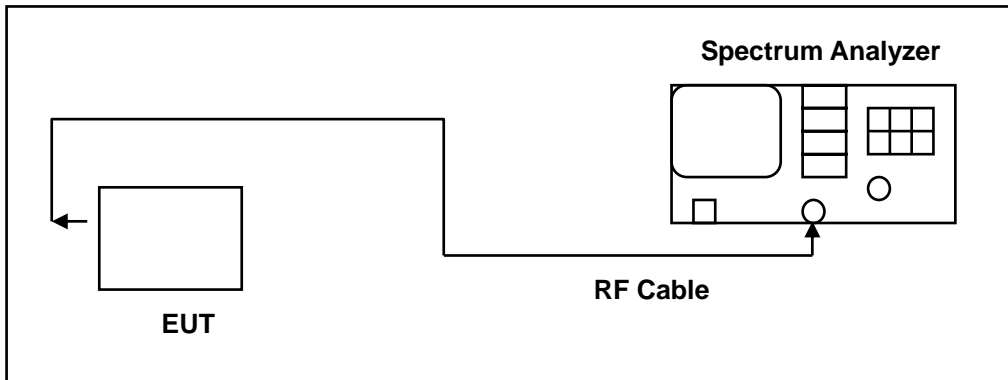

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

- 1) The EUT was directly connectd to the spectrum analyzer and antenna output port as show in the block diagram below,
- 2) Spectrum Setting: RBW=100KHz, VBW=300KHz, Sweep time=Auto. Span to 5-30% greater than EBW
- 3) Scale the observed power level to an equivalent value in 3kHz by adjusting(reducing) the measured power by a bandwidth correction factor(BWCF) where  $BWCF=10\log(3\text{kHz}/100\text{kHz}=-15.2\text{dB})$ .
- 4) Use peak detector+BWCF.
- 5) The resulting peak PSD level must be  $\leq 8\text{dBm}$ .

**8.5. Test Result**




Model Number	CX875-3PB			
Test Item	Maximum Power Density			
Test Mode	Mode 2: IEEE 802.11b Link Mode			
Date of Test	01/08/2013		Test Site	TE05
Frequency (MHz)	Reading (dBm/100KHz)	BWCF (dB)	Results (dBm/3KHz)	Limit (dBm)
2412	7.11	-15.30	-8.19	< 8
2437	7.29	-15.30	-8.01	< 8
2462	7.38	-15.30	-7.92	< 8

Model Number	CX875-3PB			
Test Item	Maximum Power Density			
Test Mode	Mode 3: IEEE 802.11g Link Mode			
Date of Test	01/08/2013		Test Site	TE05
Frequency (MHz)	Reading (dBm/100KHz)	BWCF (dB)	Results (dBm/3KHz)	Limit (dBm)
2412	4.56	-15.30	-10.74	< 8
2437	4.40	-15.30	-10.90	< 8
2462	3.51	-15.30	-11.79	< 8

**8.6. Test Graphs**

Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.412 98 GHz 7.11 dBm</p> <p>*Peak Center Freq 2.41200000 GHz</p> <p>Log Start Freq 2.40250000 GHz</p> <p>10 dB/ Stop Freq 2.42150000 GHz</p> <p>Offst 10.5 dB</p> <p>LgAv CF Step 1.90000000 MHz</p> <p>M1 S2 Auto Man</p> <p>S3 FC Freq Offset 0.00000000 Hz</p> <p>AL</p> <p>Σ(f): Signal Track</p> <p>FTun On Off</p> <p>Swp</p> <p>Center 2.412 00 GHz Span 19 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 1.84 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.435 99 GHz 7.29 dBm</p> <p>*Peak Center Freq 2.43700000 GHz</p> <p>Log Start Freq 2.42750000 GHz</p> <p>10 dB/ Stop Freq 2.44650000 GHz</p> <p>Offst 10.5 dB</p> <p>LgAv CF Step 1.90000000 MHz</p> <p>M1 S2 Auto Man</p> <p>S3 FC Freq Offset 0.00000000 Hz</p> <p>AL</p> <p>Σ(f): Signal Track</p> <p>FTun On Off</p> <p>Swp</p> <p>Center 2.437 00 GHz Span 19 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 1.84 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.462 98 GHz 7.38 dBm</p> <p>*Peak Center Freq 2.46200000 GHz</p> <p>Log Start Freq 2.45250000 GHz</p> <p>10 dB/ Stop Freq 2.47150000 GHz</p> <p>Offst 10.5 dB</p> <p>LgAv CF Step 1.90000000 MHz</p> <p>M1 S2 Auto Man</p> <p>S3 FC Freq Offset 0.00000000 Hz</p> <p>AL</p> <p>Σ(f): Signal Track</p> <p>FTun On Off</p> <p>Swp</p> <p>Center 2.462 00 GHz Span 19 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 1.84 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 3: IEEE 802.11g Link Mode

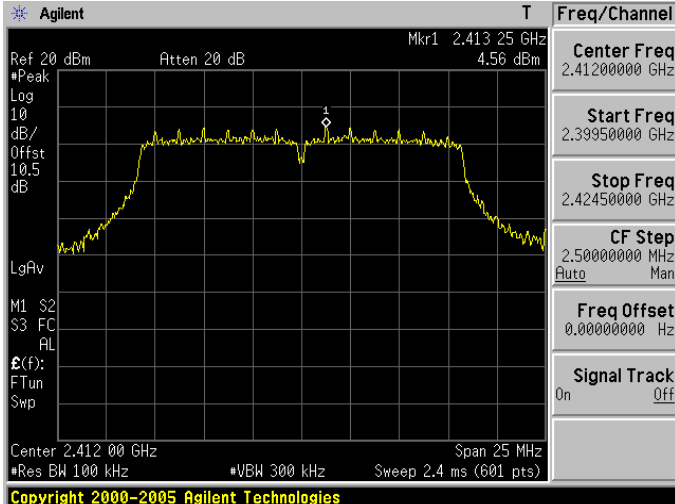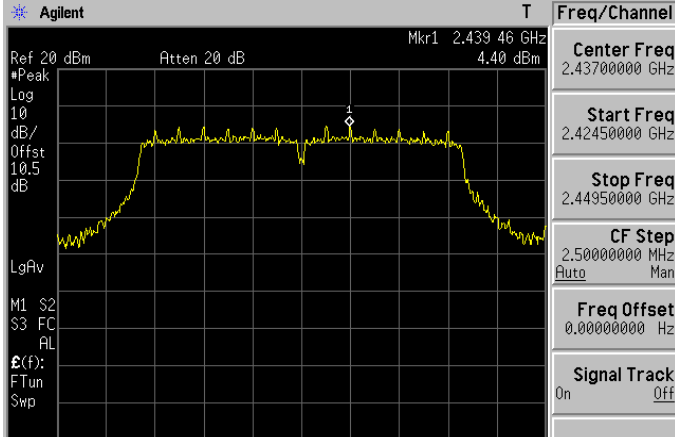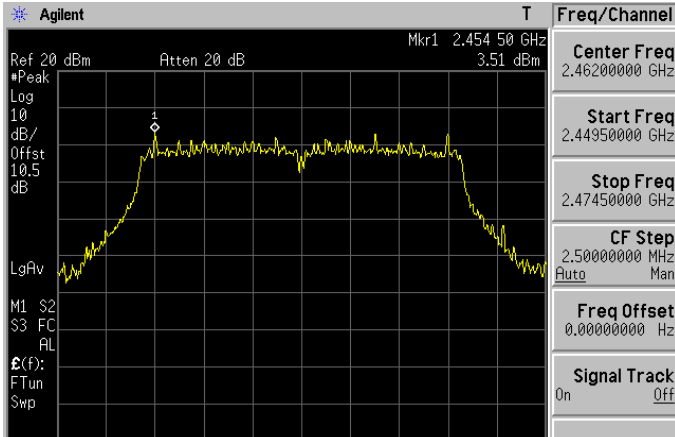2412	 <p><b>Agilent</b> T</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.413 25 GHz 4.56 dBm</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>10.5</p> <p>dB</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AL</p> <p>Ⓔ(f):</p> <p>FTun</p> <p>Swp</p> <p>Center 2.412 00 GHz Span 25 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.4 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.41200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.39950000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.42450000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.50000000 MHz</td> </tr> <tr> <td></td> <td>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.41200000 GHz	Start Freq	2.39950000 GHz	Stop Freq	2.42450000 GHz	CF Step	2.50000000 MHz		Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel																	
Center Freq	2.41200000 GHz																
Start Freq	2.39950000 GHz																
Stop Freq	2.42450000 GHz																
CF Step	2.50000000 MHz																
	Auto Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																
2437	 <p><b>Agilent</b> T</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.439 46 GHz 4.40 dBm</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>10.5</p> <p>dB</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AL</p> <p>Ⓔ(f):</p> <p>FTun</p> <p>Swp</p> <p>Center 2.437 00 GHz Span 25 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.4 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.43700000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.42450000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.44950000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.50000000 MHz</td> </tr> <tr> <td></td> <td>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.43700000 GHz	Start Freq	2.42450000 GHz	Stop Freq	2.44950000 GHz	CF Step	2.50000000 MHz		Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel																	
Center Freq	2.43700000 GHz																
Start Freq	2.42450000 GHz																
Stop Freq	2.44950000 GHz																
CF Step	2.50000000 MHz																
	Auto Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																
2462	 <p><b>Agilent</b> T</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.454 50 GHz 3.51 dBm</p> <p>*Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>10.5</p> <p>dB</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AL</p> <p>Ⓔ(f):</p> <p>FTun</p> <p>Swp</p> <p>Center 2.462 00 GHz Span 25 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.4 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.46200000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.44950000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.47450000 GHz</td> </tr> <tr> <td>CF Step</td> <td>2.50000000 MHz</td> </tr> <tr> <td></td> <td>Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.46200000 GHz	Start Freq	2.44950000 GHz	Stop Freq	2.47450000 GHz	CF Step	2.50000000 MHz		Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel																	
Center Freq	2.46200000 GHz																
Start Freq	2.44950000 GHz																
Stop Freq	2.47450000 GHz																
CF Step	2.50000000 MHz																
	Auto Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																




## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

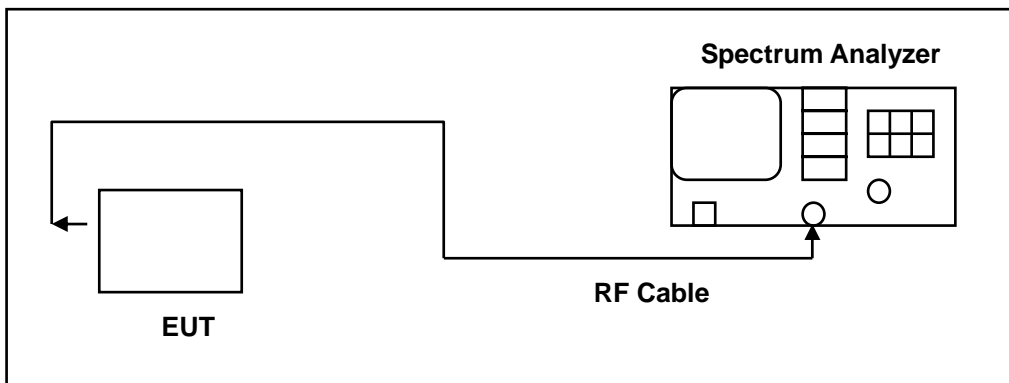

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/09/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.




### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.


The test was performed at 3 channels (Channel 1, 6, 11)

**9.5. Test Graphs**

Mode 2: IEEE 802.11b Link Mode																																					
2412	 <table border="1" data-bbox="646 705 1220 862"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.412 GHz</td> <td>3.913 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>4.821 GHz</td> <td>-49.677 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>7.230 GHz</td> <td>-44.244 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.412 GHz	3.913 dBm				2	N	f	f	4.821 GHz	-49.677 dBm				3	N	f	f	7.230 GHz	-44.244 dBm			
MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	f	f	2.412 GHz	3.913 dBm																																
2	N	f	f	4.821 GHz	-49.677 dBm																																
3	N	f	f	7.230 GHz	-44.244 dBm																																
2437	 <table border="1" data-bbox="646 1243 1220 1400"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.437 GHz</td> <td>4.603 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>4.874 GHz</td> <td>-43.806 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>7.309 GHz</td> <td>-43.64 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.437 GHz	4.603 dBm				2	N	f	f	4.874 GHz	-43.806 dBm				3	N	f	f	7.309 GHz	-43.64 dBm			
MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	f	f	2.437 GHz	4.603 dBm																																
2	N	f	f	4.874 GHz	-43.806 dBm																																
3	N	f	f	7.309 GHz	-43.64 dBm																																
2462	 <table border="1" data-bbox="646 1758 1220 1915"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.462 GHz</td> <td>3.069 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>4.927 GHz</td> <td>-45.876 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>7.369 GHz</td> <td>-43.818 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.462 GHz	3.069 dBm				2	N	f	f	4.927 GHz	-45.876 dBm				3	N	f	f	7.369 GHz	-43.818 dBm			
MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	f	f	2.462 GHz	3.069 dBm																																
2	N	f	f	4.927 GHz	-45.876 dBm																																
3	N	f	f	7.369 GHz	-43.818 dBm																																

Mode 3: IEEE 802.11g Link Mode


2412

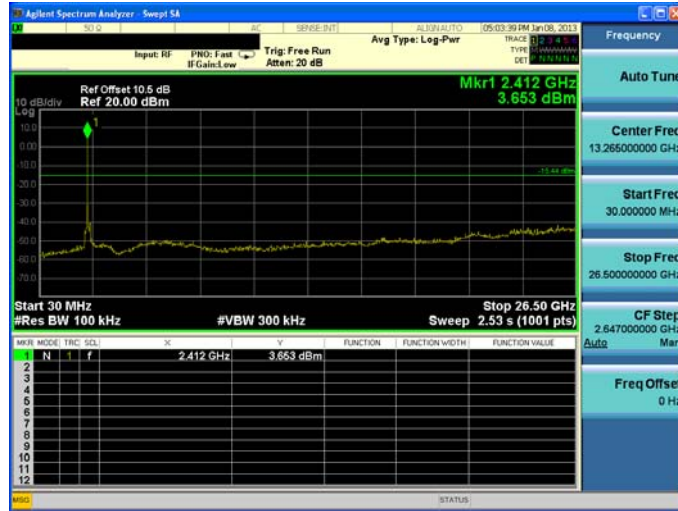

2437



2462

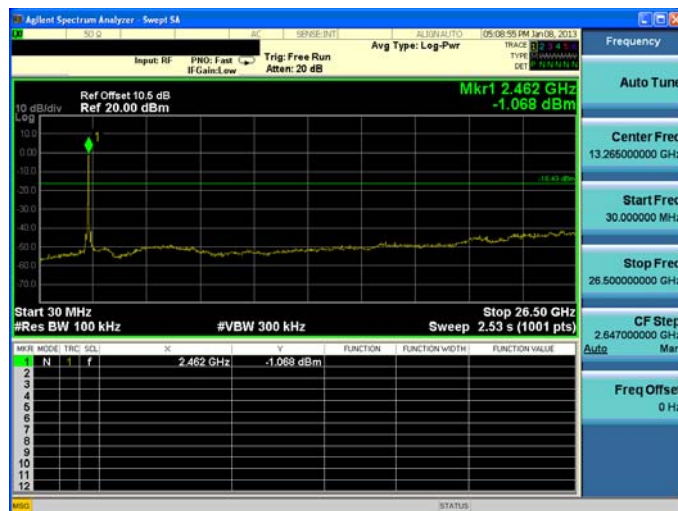


## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

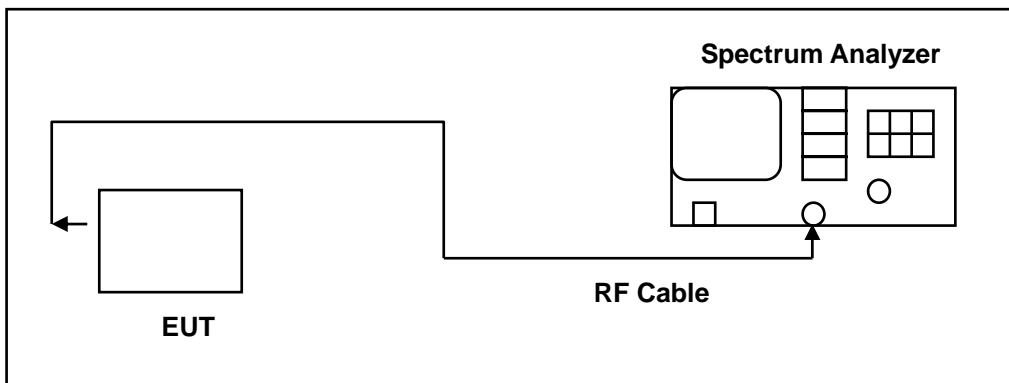

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

**10.5. Test Result**

Model Number	CX875-3PB								
Test Item	Band Edges								
Test Mode	Mode 2: IEEE 802.11b Link Mode								
Date of Test	01/08/2013	Test Site	TE05						
Fundamental Field Strength									
Ant. Polar.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Detector				
Horizontal	2412.00	94.62	4.03	98.65	Peak				
	2412.00	88.14	4.03	92.17	Average				
Vertical	2412.00	100.20	4.03	104.23	Peak				
	2412.00	94.80	4.03	98.83	Average				
Horizontal	2462.00	92.53	4.37	96.90	Peak				
	2462.00	89.31	4.37	93.68	Average				
Vertical	2462.00	101.17	4.37	105.54	Peak				
	2462.00	95.22	4.37	99.59	Average				
Bandedge Test Data									
Ant. Polar.	Test Frequency (MHz)	Conducted Fundamental (dB/m)	Conducted Bandedge (dB/m)	$\Delta$ (dB)	Result (dBuV/m)	Bandedge Field Strength Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Horizontal	2385.50	10.39	-37.97	48.36	98.65	50.29	74.00	-23.71	Peak
	2386.17	8.00	-42.60	50.60	92.17	41.57	54.00	-12.43	Average
Vertical	2385.50	10.39	-37.97	48.36	104.23	55.87	74.00	-18.13	Peak
	2386.17	8.00	-42.60	50.60	98.83	48.23	54.00	-5.77	Average
Horizontal	2488.67	10.65	-38.16	48.81	96.90	48.09	74.00	-25.91	Peak
	2487.67	8.37	-41.37	49.74	93.68	43.94	54.00	-10.06	Average
Vertical	2488.67	10.65	-38.16	48.81	105.54	56.73	74.00	-17.27	Peak
	2487.67	8.37	-41.37	49.74	99.59	49.85	54.00	-4.15	Average

Note: The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge

Measurements per the Marker-Delta Method with the following formula:

$$\text{Band Edge field Strength} = F - \Delta$$

F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

Model Number	CX875-3PB								
Test Item	Band Edges								
Test Mode	Mode 3: IEEE 802.11g Link Mode								
Date of Test	01/08/2013	Test Site	TE05						
Fundamental Field Strength									
Ant. Polar.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Detector				
Horizontal	2412.00	93.44	4.02	97.46	Peak				
	2412.00	83.18	4.02	87.20	Average				
Vertical	2412.00	100.45	4.06	104.51	Peak				
	2412.00	90.31	4.06	94.37	Average				
Horizontal	2462.00	95.12	4.38	99.50	Peak				
	2462.00	83.79	4.38	88.17	Average				
Vertical	2462.00	102.59	4.35	106.94	Peak				
	2462.00	90.49	4.35	94.84	Average				
Bandedge Test Data									
Ant. Polar.	Test Frequency (MHz)	Conducted Fundamental (dB/m)	Conducted Bandedge (dB/m)	$\Delta$ (dB)	Result (dBuV/m)	Bandedge Field Strength Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Horizontal	2390.00	12.74	-23.60	36.34	97.46	61.12	74.00	-12.88	Peak
	2390.00	4.65	-39.35	44.00	87.20	43.20	54.00	-10.80	Average
Vertical	2390.00	12.74	-23.60	36.34	104.51	68.17	74.00	-5.83	Peak
	2390.00	4.65	-39.35	44.00	94.37	50.37	54.00	-3.63	Average
Horizontal	2483.50	11.19	-28.76	39.95	99.50	59.55	74.00	-14.45	Peak
	2483.50	1.76	-42.51	44.27	88.17	43.90	54.00	-10.10	Average
Vertical	2483.50	11.19	-28.76	39.95	106.94	66.99	74.00	-7.01	Peak
	2483.50	1.76	-42.51	44.27	94.84	50.57	54.00	-3.43	Average


Note: The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge Measurements per the Marker-Delta Method with the following formula:

$$\text{Band Edge field Strength} = F - \Delta$$

F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)


**10.6. Test Graphs**

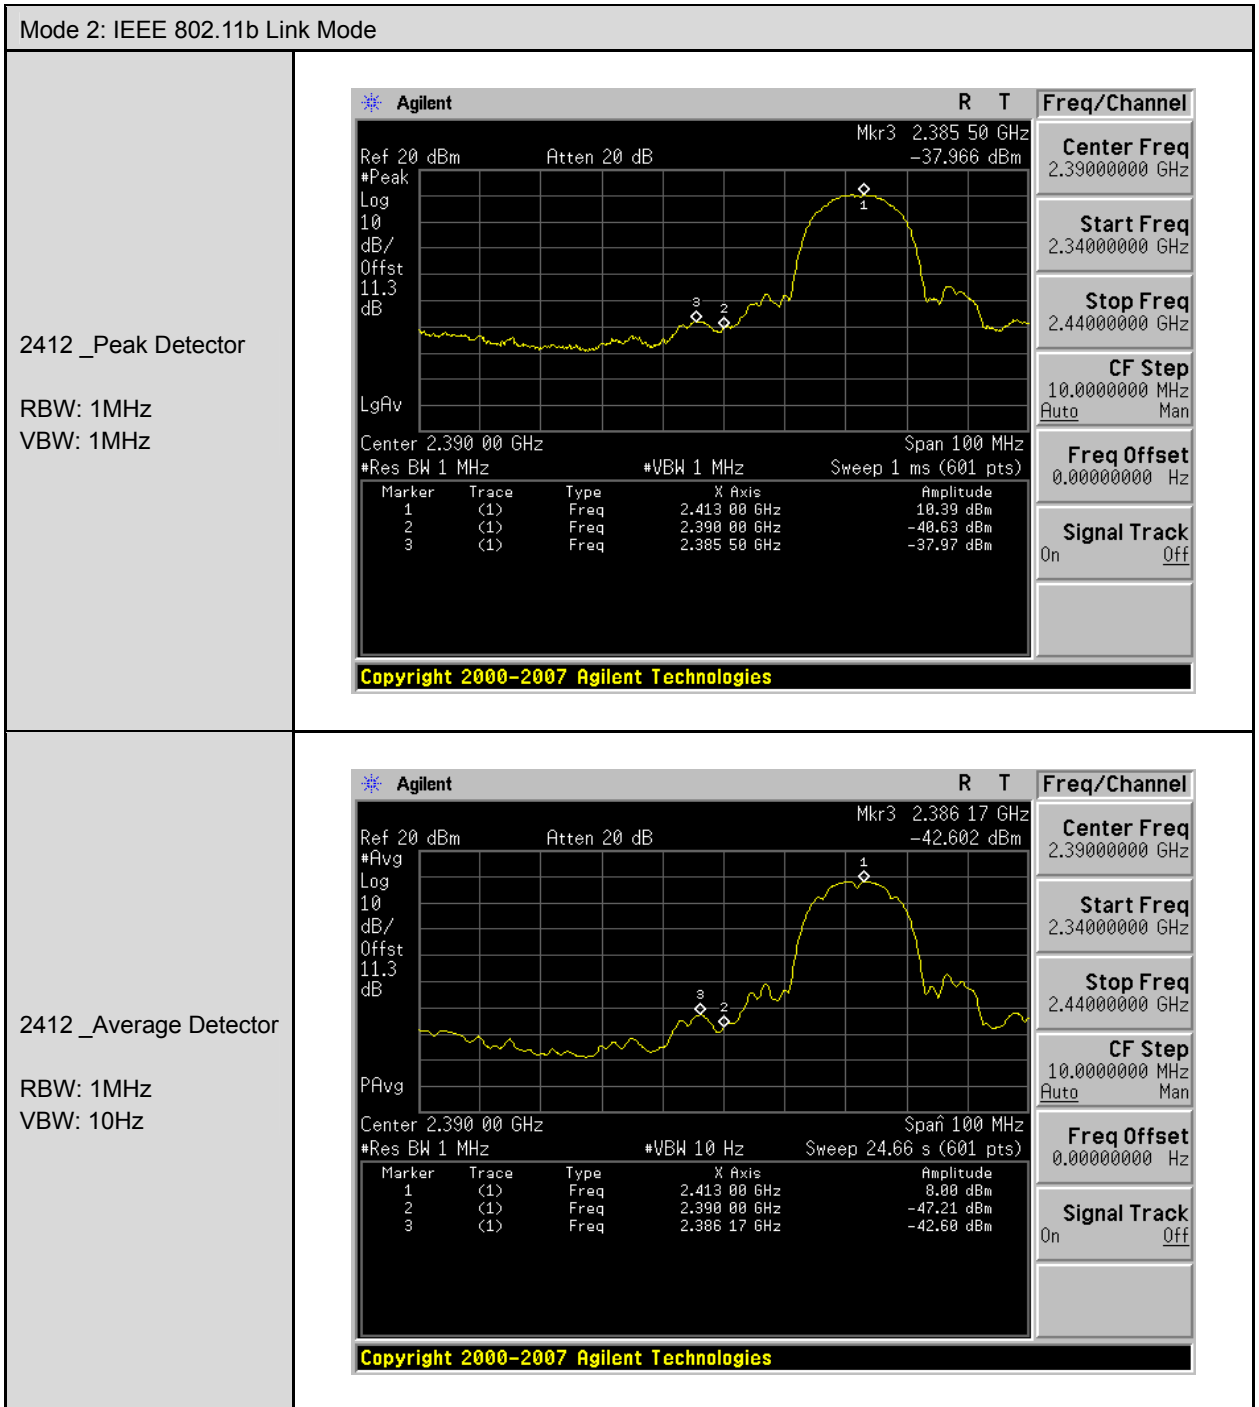

Mode 2: IEEE 802.11b Link Mode


2462 \_Peak Detector

RBW: 1MHz  
VBW: 1MHz

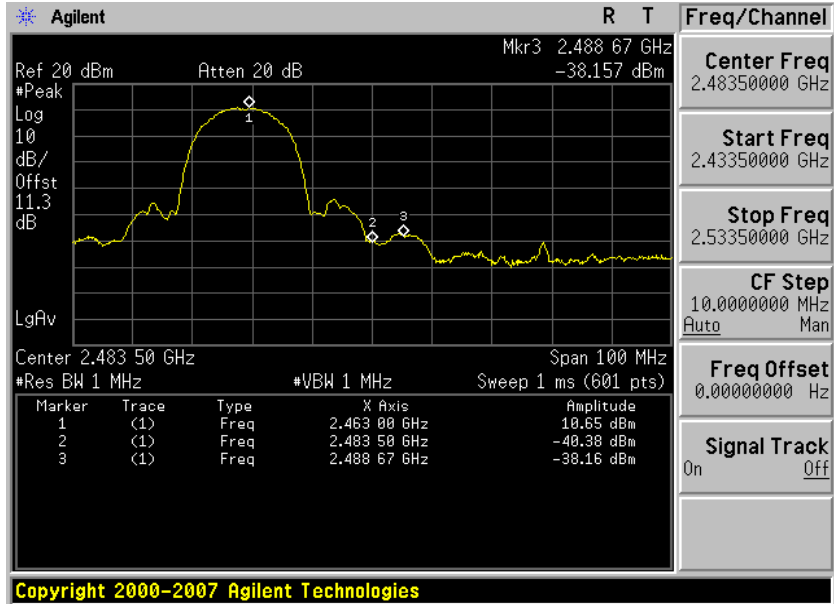

2462 \_Average Detector

RBW: 1MHz  
VBW: 10Hz

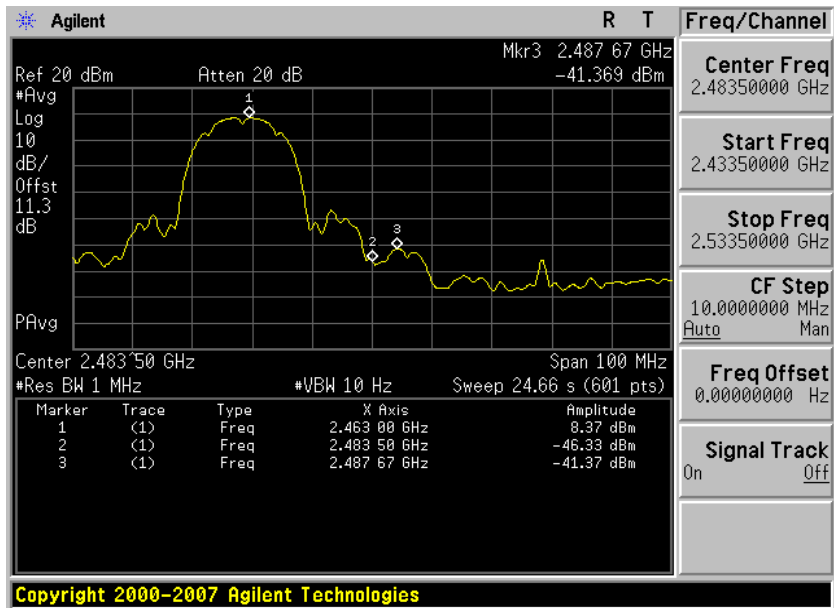




Mode 3: IEEE 802.11g Link Mode


2412\_Peak Detector

RBW: 1MHz  
VBW: 1MHz

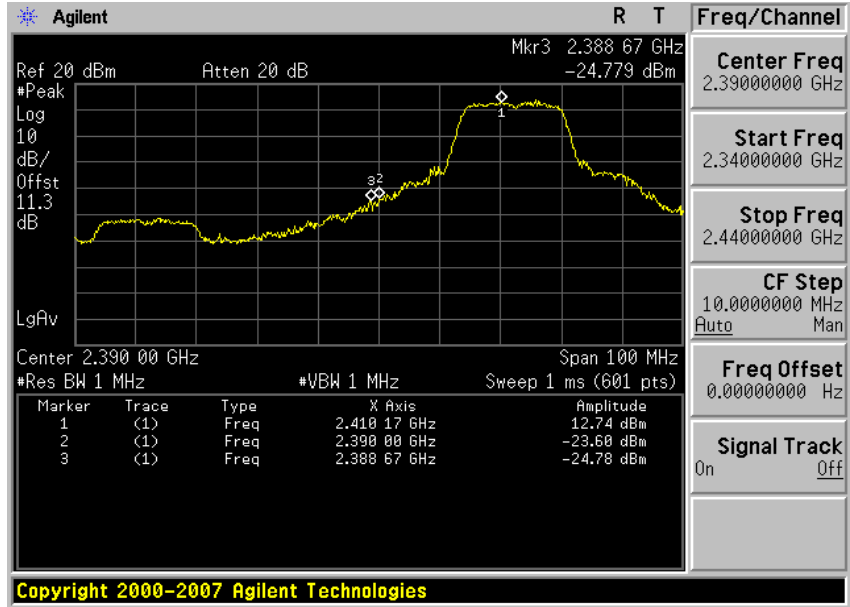

2412\_Average Detector


RBW: 1MHz  
VBW: 10Hz

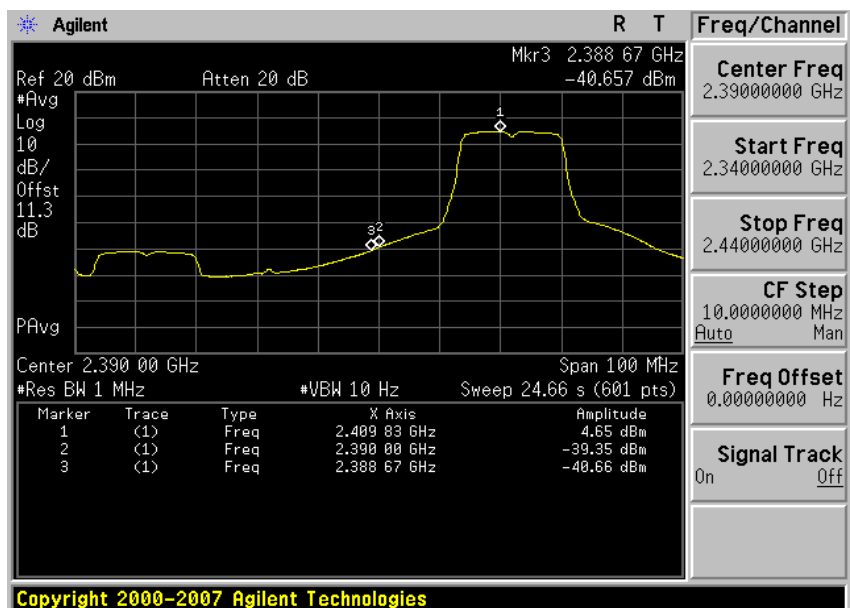

Mode 3: IEEE 802.11g Link Mode


2462 \_Peak Detector

RBW: 1MHz  
VBW: 1MHz

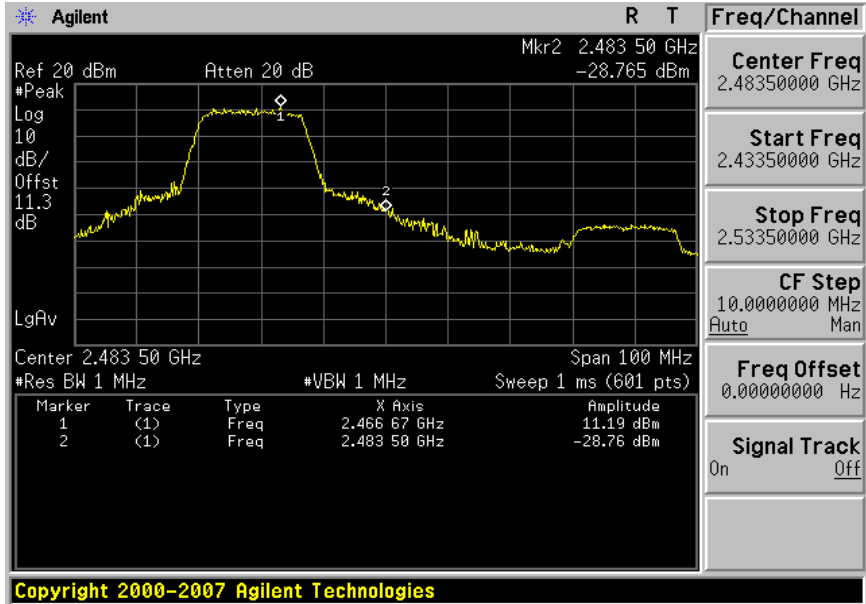

2462 \_Average Detector

RBW: 1MHz  
VBW: 10Hz

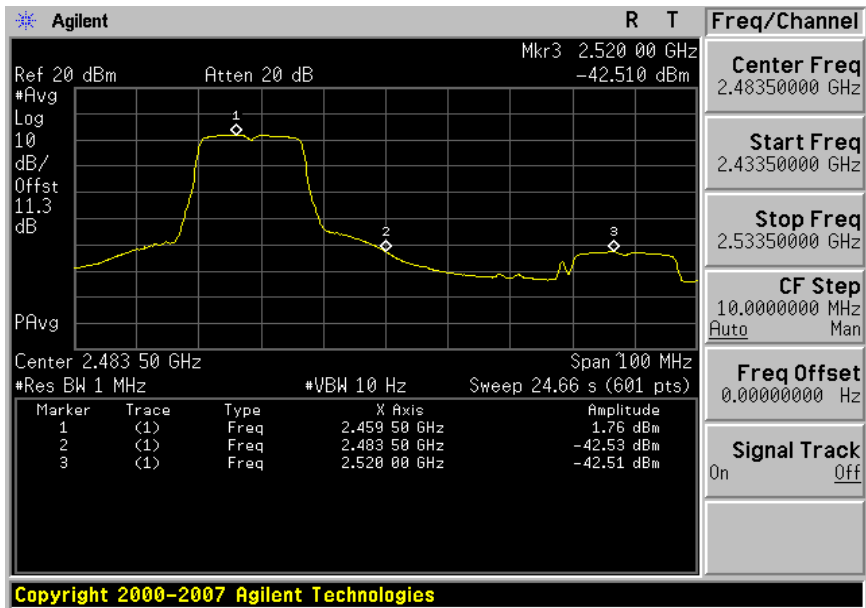


## 11 99 % Occupied Bandwidth Measurement

### 11.1.Limit

N/A

### 11.2.Test Setup

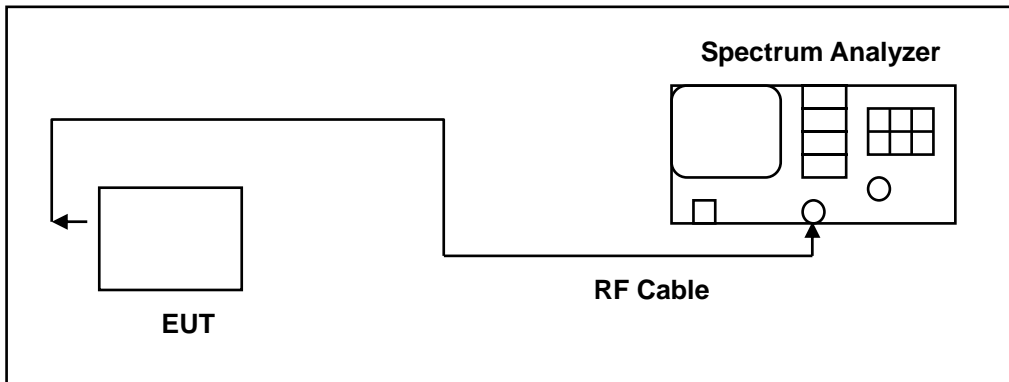

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**11.5. Test Result**




Model Number	CX875-3PB		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	01/08/2013	Test Site	TE05
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	16.0572	-----
	2437	16.0380	-----
	2462	16.0539	-----

Model Number	CX875-3PB		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	01/08/2013	Test Site	TE05
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	16.4636	-----
	2437	16.4645	-----
	2462	16.4198	-----

**11.6. Test Graphs**

Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.0572 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -18.937 kHz x dB Bandwidth 12.084 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.0380 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -14.936 kHz x dB Bandwidth 12.053 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.0539 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.073 kHz x dB Bandwidth 11.156 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 3: IEEE 802.11g Link Mode

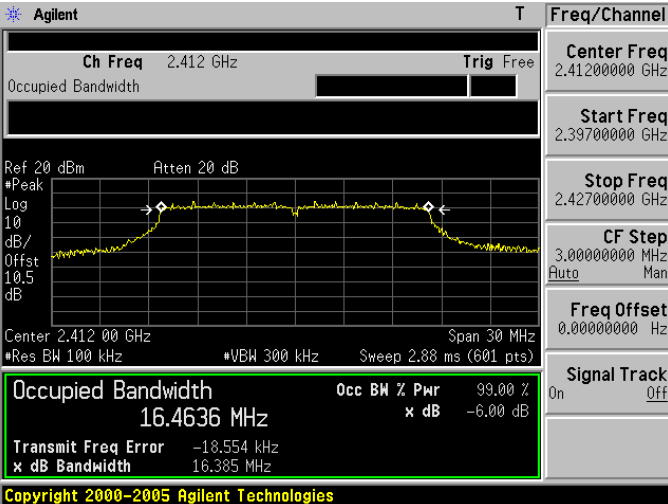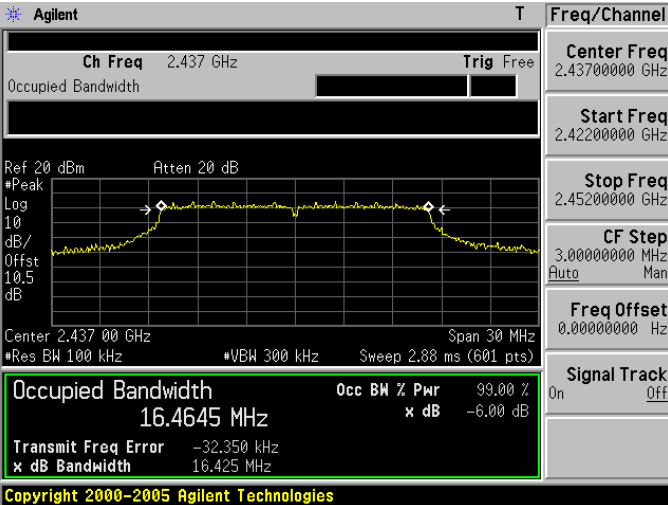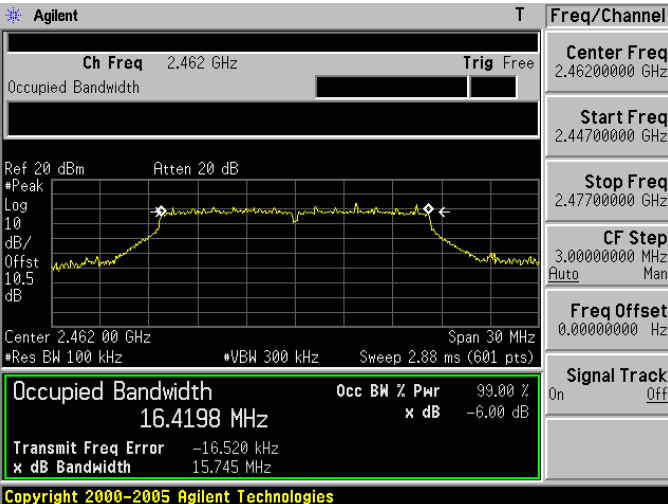2412	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4636 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -18.554 kHz x dB Bandwidth 16.385 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4645 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -32.350 kHz x dB Bandwidth 16.425 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 16.4198 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.520 kHz x dB Bandwidth 15.745 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

## **12 Antenna Measurement**

### **12.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2.Antenna Connector Construction**

The antenna used in this product is External antenna. And the maximum Gain of this antenna is only 2.0 dBi.