


FCC RF Test Report

(WCDMA)

Applicant: SHENZHEN KENXINDA TECHNOLOGY CO., LTD
Address of Applicant: 18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV
7006, SHENZHEN, CHINA
Equipment Under Test (EUT)
Product Name: 4G Smartphone
Model No.: X60Pro
Trade Mark: EL, E&L, KXD, Kenxinda, Ken mobile
FCC ID: ZSHX60PRO
Applicable Standards: FCC CFR Title 47 Part 2, 22H, 24E
Date of Sample Receipt: 08 Sep., 2021
Date of Test: 09 Sep., 2021 to 25 Apr., 2022
Date of Report Issued: 26 Apr., 2022
Test Result: PASS

Tested by: Maier Qiu **Date:** 26 Apr., 2022
Reviewed by: Wenwen Zhang **Date:** 26 Apr., 2022
Approved by: Wenwen Zhang **Date:** 26 Apr., 2022
Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	26 Apr., 2022	Original

3. Contents

	Page
1. Cover Page	1
2. Version	2
3. Contents	3
4. General Information	4
4.1 Client Information	4
4.2 General Description of E.U.T.	4
4.3 Test Model and Environment	5
4.4 Description of Test Auxiliary Equipment.....	5
4.5 Measurement Uncertainty.....	5
4.6 Additions to, Deviations, or Exclusions from the Method.....	5
4.7 Laboratory Facility.....	5
4.8 Laboratory Location	6
4.9 Test Instruments List	6
5. Measurement Setup and Procedure	7
5.1 Test Channel	7
5.2 Test Setup.....	8
5.3 Test Procedure	9
6. Test Results	10
6.1 Summary	10
6.2 Field Strength of Spurious Radiation Measurement.....	12

4. General Information

4.1 Client Information

Applicant:	SHENZHEN KENXINDA TECHNOLOGY CO., LTD
Address:	18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV 7006, SHENZHEN, CHINA
Manufacturer:	SHENZHEN EL COMMUNICATION CO., LTD
Address:	5F, Block A, Building 12, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen
Factory:	Sichuan Southwest Prosperity Communication Technology Limited Company
Address:	Southwest liansheng industrial park, 98 xintianwan road, lingang economic development zone, cuiping district, yibin city, sichuan province

4.2 General Description of E.U.T.

Product Name:	4G Smartphone	
Model No.:	X60Pro	
Operation Frequency Range:	WCADM band II:	1852.4 MHz - 1907.6 MHz
	WCADM band V:	826.4 MHz - 846.6 MHz
Modulation Type:	<input checked="" type="checkbox"/> RMC(QPSK) <input checked="" type="checkbox"/> HSUPA(QPSK) <input checked="" type="checkbox"/> HSDPA(QPSK,16QAM)	
Antenna Type:	Internal Antenna	
Antenna Gain:	WCADM band II:	1.0 dBi (declare by Applicant)
	WCADM band V:	0.3 dBi (declare by Applicant)
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.85V, 4000mAh	
AC Adapter:	Model No.:FYJH-R9 Input: AC100-240V, 50/60Hz 0.3A Output: DC 5.0V, 2000mA	
Test Sample Condition:	The test samples were provided in good working order with no visible defects.	

4.3 Test Model and Environment

Test Mode:	
RMC mode:	Keep the EUT communication with simulated station in RMC mode
HSDPA mode:	Keep the EUT communication with simulated station in HSDPA mode
HSUPA mode:	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.85 Vdc, Extreme: Low 3.50 Vdc, High 4.40 Vdc

4.4 Description of Test Auxiliary Equipment

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	±5.34 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.6 Additions to, Deviations, or Exclusions from the Method

No

4.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments List

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	01-19-2021	01-18-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	06-20-2021	06-19-2022
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	06-18-2021	06-17-2022
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXG001-7	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXG001-3	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXG001-9	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	07-02-2021	07-01-2022
Simulated Station	Anritsu	MT8820C	WXJ008-4	03-03-2021	03-02-2023
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Coaxial Cable (30MHz ~ 1GHz)	JYT	JYT3M-1G-NN-8M	WXG001-4	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (1GHz ~ 18GHz)	JYT	JYT3M-18G-NN-8M	WXG001-5	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (18GHz ~ 40GHz)	JYT	JYT3M-40G-SS-8M	WXG001-7	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9020B	WXJ081-1	07-02-2021	07-01-2022
Simulated Station	Rohde & Schwarz	CMW500	WXJ081	07-02-2021	07-01-2022
DC Power Supply	Keysight	E3642A	WXJ025-2	10-25-2021	10-24-2022
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	03-19-2021	03-18-2023
RF Control Unit	Tonscend	JS0806-1	WXG010	N/A	
Band Reject Filter Group	Tonscend	JS0806-F	WXG010-1	N/A	
Test Software	Tonscend	TS+	Version: 2.6.9.0526		

5. Measurement Setup and Procedure

5.1 Test Channel


According to ANSI C63.26-2015 chapter 5.1.2.1 Table 2 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

WCDMA band II					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
9262	1852.4	9400	1880.0	9538	1907.6
WCDMA band V					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
4132	826.4	4183	836.6	4233	846.6


5.2 Test Setup

1) Radiated emission measurement:


Below 1GHz (3m SAC)

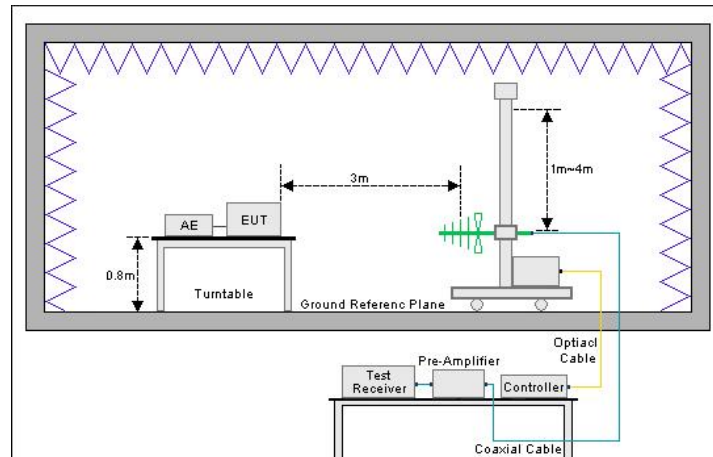

Above 1GHz (3m SAC)

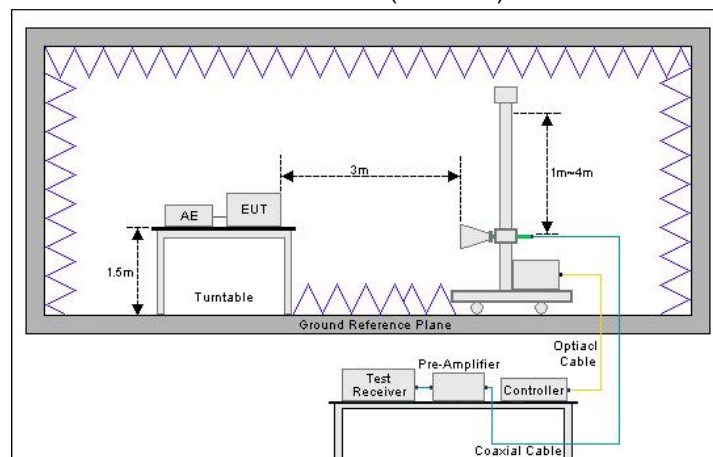

2) Conducted test method

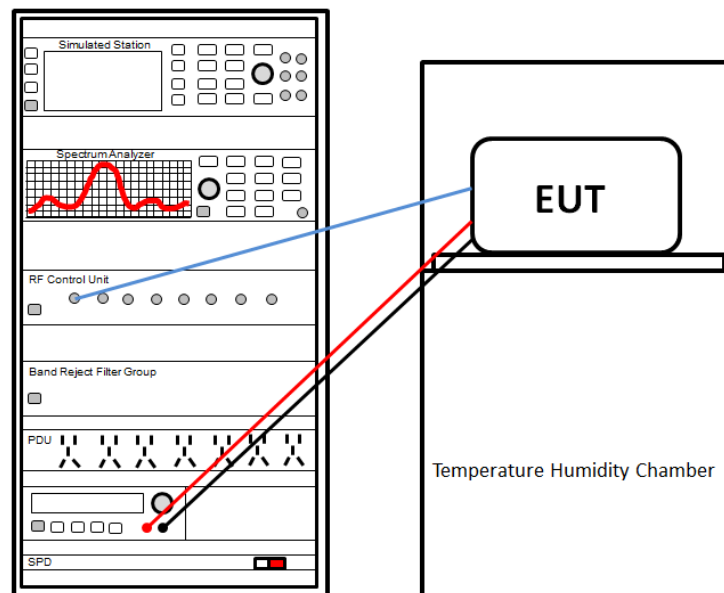

5.3 Test Procedure

Test method	Test step
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> The EUT was placed on the table top of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> The EUT was placed on the table top of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> The WCDMA antenna port of EUT was connected to the test port of the test system through an RF cable. The EUT is keeping in continuous transmission mode and tested in all modulation modes. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

6. Test Results

6.1 Summary

6.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	See SAR Report	Pass
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) Part 27.50 (d)(4)	Appendix A– WCDMA	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50(d)(5)	Appendix A– WCDMA	Pass
Modulation Characteristics	Part 2.1047	Appendix A– WCDMA	Pass
26dB Emission Bandwidth 99% Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(h)	Appendix A– WCDMA	Pass
Out of Band Emission at Antenna Terminals	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53(h)	Appendix A– WCDMA	Pass
Field Strength of Spurious Radiation	Part 22.917 (a) Part 24.238 (a) Part 27.53(h)	See Section 6.2	Pass
Frequency Stability vs. Temperature	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	Appendix A– WCDMA	Pass
Frequency Stability vs. Voltage	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(d)(2)	Appendix A– WCDMA	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (Fundamental Frequency below 1GHz)/1.0dB (Fundamental Frequency above 1GHz) (provided by the customer).			
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015		

6.1.2 Test Limit

Test items	Limit																																
RF Output Power	WCDMA band II: 2W WCDMA band V: 7W																																
Peak-to-Average Power Ratio	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB																																
Modulation Characteristics	N/A																																
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A																																
Out of Band Emission at Antenna Terminals Field Strength of Spurious Radiation	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.																																
Frequency Stability vs. Temperature Frequency Stability vs. Voltage	<p>WCDMA band II: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.</p> <p>WCDMA band V: Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.</p> <p style="text-align: center;">TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile >3 watts (ppm)</th> <th>Mobile ≤3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>50 to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5.0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929</td> <td>5.0</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>929 to 960</td> <td>1.5</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>n/a</td> <td>n/a</td> </tr> </tbody> </table>	Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 929	5.0	n/a	n/a	929 to 960	1.5	n/a	n/a	2110 to 2220	10.0	n/a	n/a
Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)																														
25 to 50	20.0	20.0	50.0																														
50 to 450	5.0	5.0	50.0																														
450 to 512	2.5	5.0	5.0																														
821 to 896	1.5	2.5	2.5																														
928 to 929	5.0	n/a	n/a																														
929 to 960	1.5	n/a	n/a																														
2110 to 2220	10.0	n/a	n/a																														

6.2 Field Strength of Spurious Radiation Measurement

WCDMA band II						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3704.80	-50.26	-1.28	-51.54	-13.00	38.54	Vertical
5557.20	-43.58	5.27	-38.31	-13.00	25.31	Vertical
3704.80	-51.81	-1.28	-53.09	-13.00	40.09	Horizontal
5557.20	-46.78	5.27	-41.51	-13.00	28.51	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-50.44	-1.03	-51.47	-13.00	38.47	Vertical
5640.00	-43.69	6.06	-37.63	-13.00	24.63	Vertical
3760.00	-51.82	-1.03	-52.85	-13.00	39.85	Horizontal
5640.00	-46.56	6.06	-40.50	-13.00	27.50	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.20	-50.50	-0.83	-51.33	-13.00	38.33	Vertical
5722.80	-43.92	6.72	-37.20	-13.00	24.20	Vertical
3815.20	-52.07	-0.83	-52.90	-13.00	39.90	Horizontal
5722.80	-46.23	6.72	-39.51	-13.00	26.51	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

WCDMA band V						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1652.80	-60.17	-11.11	-71.28	-13.00	58.28	Vertical
2479.20	-56.76	-6.21	-62.97	-13.00	49.97	Vertical
3305.60	-56.27	-4.97	-61.24	-13.00	48.24	Vertical
1652.80	-61.57	-11.01	-72.58	-13.00	59.58	Horizontal
2479.20	-57.21	-6.54	-63.75	-13.00	50.75	Horizontal
3305.60	-54.07	-5.25	-59.32	-13.00	46.32	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.20	-60.27	-11.13	-71.40	-13.00	58.40	Vertical
2509.80	-56.72	-6.20	-62.92	-13.00	49.92	Vertical
3346.40	-55.68	-5.02	-60.70	-13.00	47.70	Vertical
1673.20	-61.11	-11.04	-72.15	-13.00	59.15	Horizontal
2509.80	-57.33	-6.51	-63.84	-13.00	50.84	Horizontal
3346.40	-54.75	-5.23	-59.98	-13.00	46.98	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.60	-60.34	-11.14	-71.48	-13.00	58.48	Vertical
2546.40	-56.37	-6.09	-62.46	-13.00	49.46	Vertical
3395.20	-56.04	-5.08	-61.12	-13.00	48.12	Vertical
1697.60	-61.34	-11.08	-72.42	-13.00	59.42	Horizontal
2546.40	-57.24	-6.40	-63.64	-13.00	50.64	Horizontal
3395.20	-54.34	-5.21	-59.55	-13.00	46.55	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

-----End of report-----