

# RF TEST REPORT



Report No.: 15050034-FCC-R2

Supersede Report No.: N/A

Applicant	b mobile HK Limited	
Product Name	Mobile Phone	
Model No.	AX1050	
Serial No.	L50	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	August 13 to September 08, 2015	
Issue Date	September 28.2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15050034-FCC-R2
Page	3 of 58

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION .....	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME) .....	24
6.7 BAND EDGE.....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS.....	42
ANNEX A. TEST INSTRUMENT.....	47
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	48
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	53
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	57
ANNEX E. DECLARATION OF SIMILARITY.....	58

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050034-FCC-R2	NONE	Original	September 28.2015

## 2. Customer information

Applicant Name	b mobile HK Limited
Applicant Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong
Manufacturer	b mobile HK Limited
Manufacturer Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	AX1050
Serial Model:	L50
Date EUT received:	August 12, 2015
Test Date(s):	August 13 to September 08, 2015
Equipment Category :	DSS
Antenna Gain:	<p>GSM850: -1.28dBi  PCS1900: -0.93dBi  UMTS-FDD Band V: -1.28dBi  UMTS-FDD Band IV: -0.88dBi  UMTS-FDD Band II: -0.93dBi  Bluetooth/BLE: 0.977dBi  WIFI: 0.977dB  LTE Band 2:-0.93Bi  LTE Band 4:-0.88dBi  LTE Band 12:-1.35dBi</p>
Type of Modulation:	<p>GSM / GPRS: GMSK  EGPRS: GMSK, 8PSK  UMTS-FDD: QPSK, 16QAM  802.11b/g/n: DSSS, OFDM  Bluetooth: GFSK, <math>\pi</math> /4DQPSK, 8DPSK  BLE: GFSK  LTE Band: QPSK, 16QAM  GPS:BPSK</p>
RF Operating Frequency (ies):	<p>GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz  PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz  UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz  UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz;  RX : 2112.4 ~ 2152.6 MHz</p>

Test Report	15050034-FCC-R2
Page	7 of 58

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;  
RX: 1932.4 ~ 1987.6 MHz  
WIFI:802.11b/g/n(20M): 2412-2472 MHz  
WIFI:802.11n(40M): 2422-2462 MHz  
Bluetooth& BLE: 2402-2480 MHz  
LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz  
LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz  
LTE Band 12 TX:699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz  
GPS RX:1575.42 MHz

Max. Output Power: 2.686dBm

Number of Channels: GSM 850: 124CH  
PCS1900: 299CH  
UMTS-FDD Band V : 102CH  
UMTS-FDD Band IV: 202CH  
UMTS-FDD Band II : 277CH  
WIFI :802.11b/g/n(20M): 13CH  
WIFI :802.11n(40M): 9CH  
Bluetooth: 79CH  
BLE: 40CH  
GPS:1CH

Port: Power Port, Earphone Port, USB Port

Input Power: Adapter:  
Model: A98A-050100U-US1  
Input: 100-240V; 50/60Hz;0.2A  
Output: DC 5V,1000mA  
Battery:  
Model: AX1050  
Spec:2000mAh, 7.6Wh  
Voltage:3.8Vdc

Trade Name : Bmobile

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: ZSW-30-017

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 0.977dBi.

A permanently attached PIFA antenna for GSM/ UMTS/LTE, the gain is -1.28dBi for GSM850, the gain is -0.93dBi for PCS1900, the gain is -1.28dBi for UMTS-FDD Band V, the gain is -0.88dBi for UMTS-FDD Band IV, the gain is -0.93dBi for UMTS-FDD Band II, the gain is -0.93Bi for LTE Band 2, the gain is -0.88Bi for LTE Band 4 and the gain is -1.35dBi for LTE Band 12.

**The antenna meets up with the ANTENNA REQUIREMENT.**


**Result:** Compliance.

## 6.2 Channel Separation

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2015
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

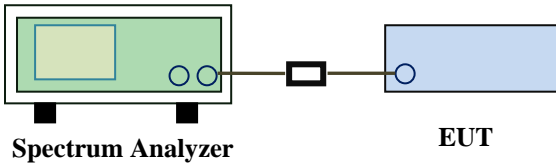Test Setup	 <p>The diagram shows a green Spectrum Analyzer on the left connected by a black cable to a blue EUT on the right. The Spectrum Analyzer has two small circles on its front panel, and the EUT has one. The labels 'Spectrum Analyzer' and 'EUT' are placed below their respective boxes.</p>
------------	---

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>
----------------	--

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


### Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.000	0.962	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.000	0.967	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.000	0.967	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.070	0.856	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.070	0.857	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.065	0.857	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.070	0.857	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.065	0.857	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.065	0.857	Pass
	Adjacency Channel	2479			

## Test Plots

### Channel Separation measurement result

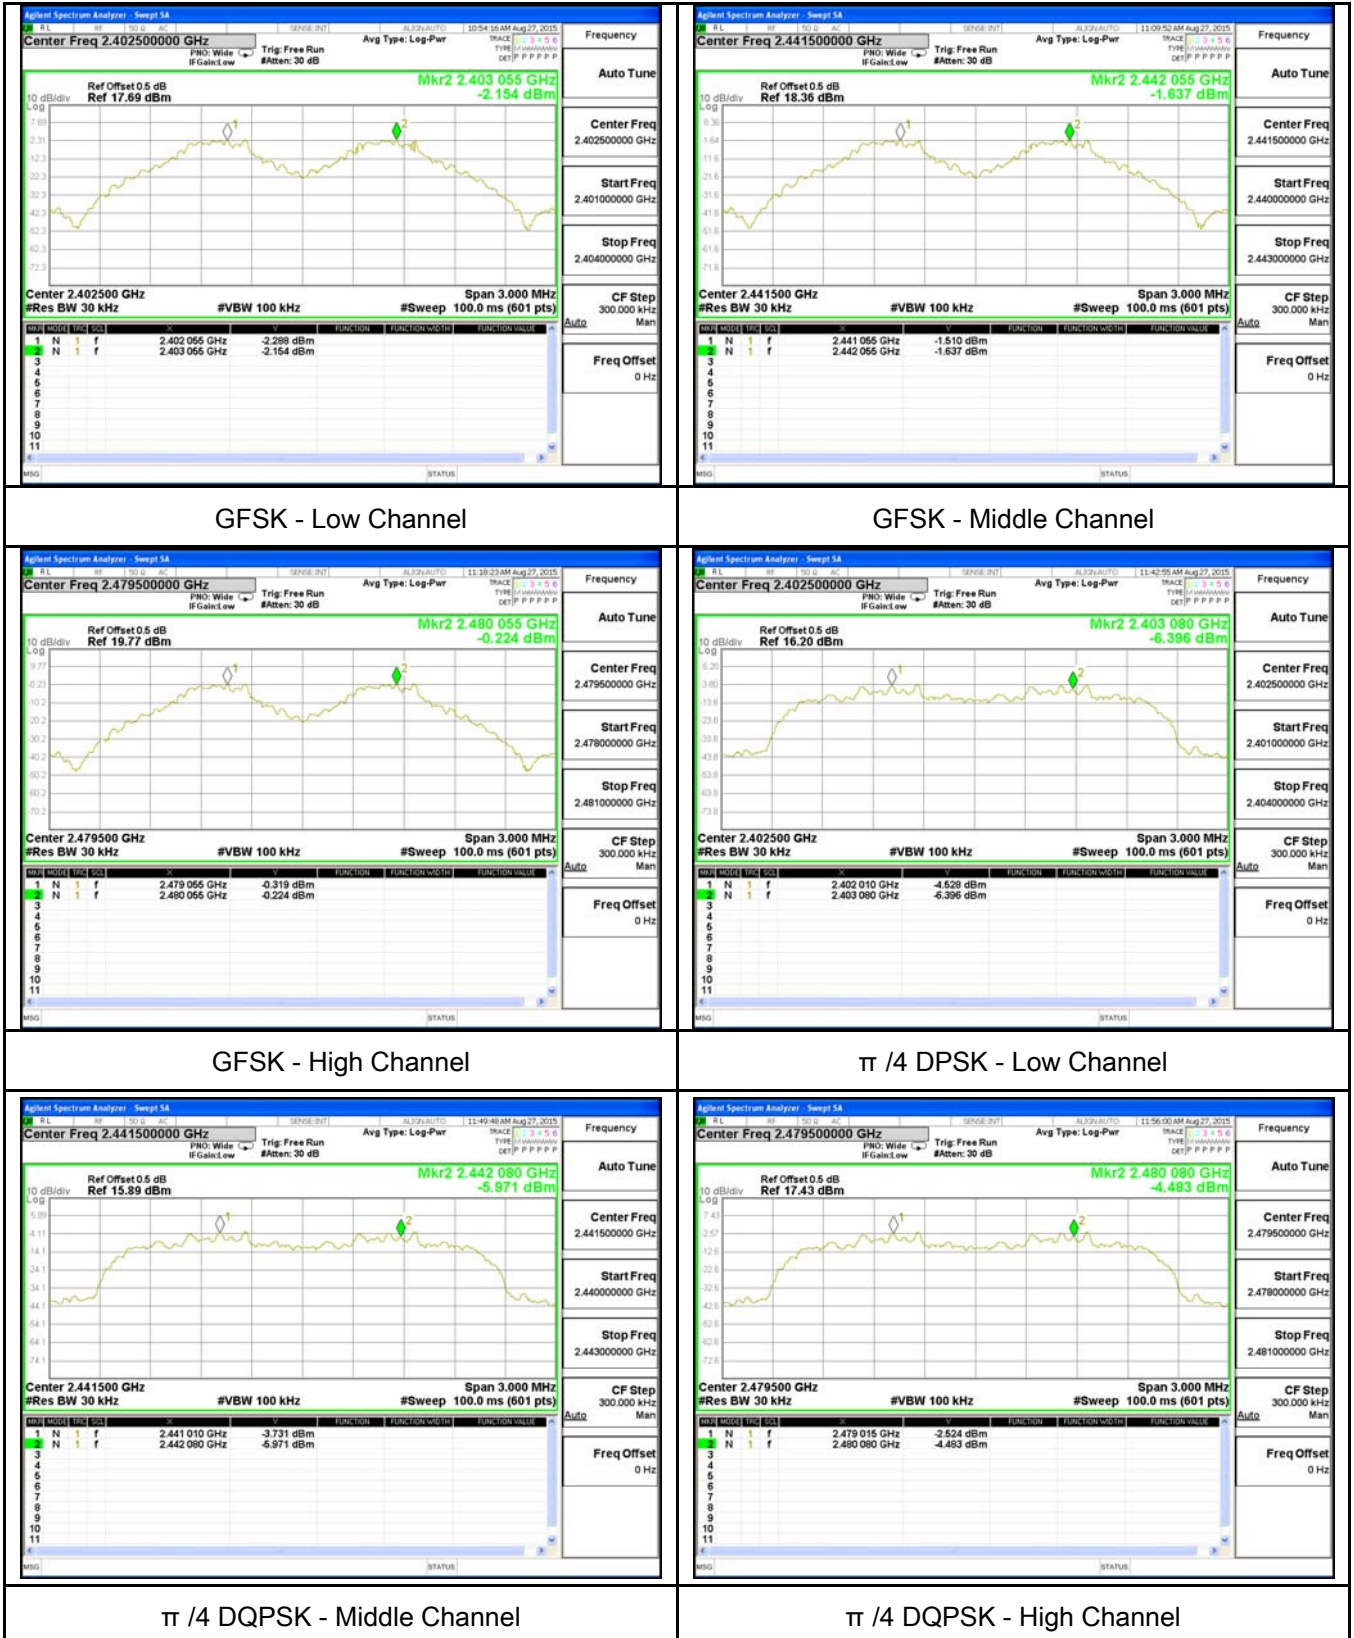


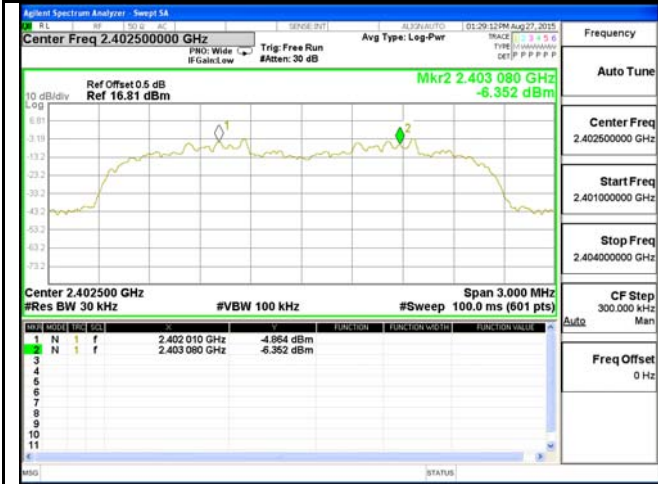

8DPSK - Low Channel



8DPSK - Middle Channel

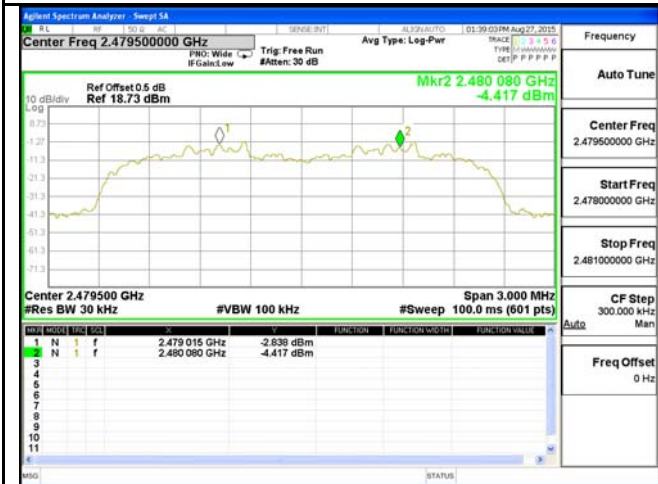


8DPSK - High Channel

### 6.3 20dB Bandwidth

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2015
Tested By :	Winnie Zhang

**Requirement(s):**

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

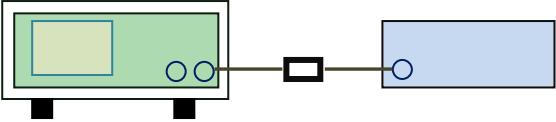Test Setup	 <b>Spectrum Analyzer</b> <b>EUT</b>
------------	---

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW ≥ 1% of the 20 dB bandwidth</li> <li>- VBW ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


#### Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.9617	0.8852
	Mid	2441	0.9665	0.8874
	High	2480	0.9672	0.8880
$\pi/4$ DQPSK	Low	2402	1.2840	1.1745
	Mid	2441	1.2860	1.1725
	High	2480	1.2850	1.1746
8-DPSK	Low	2402	1.2860	1.1796
	Mid	2441	1.2860	1.1792
	High	2480	1.2860	1.1780




## Test Plots


### 20dB Bandwidth measurement result

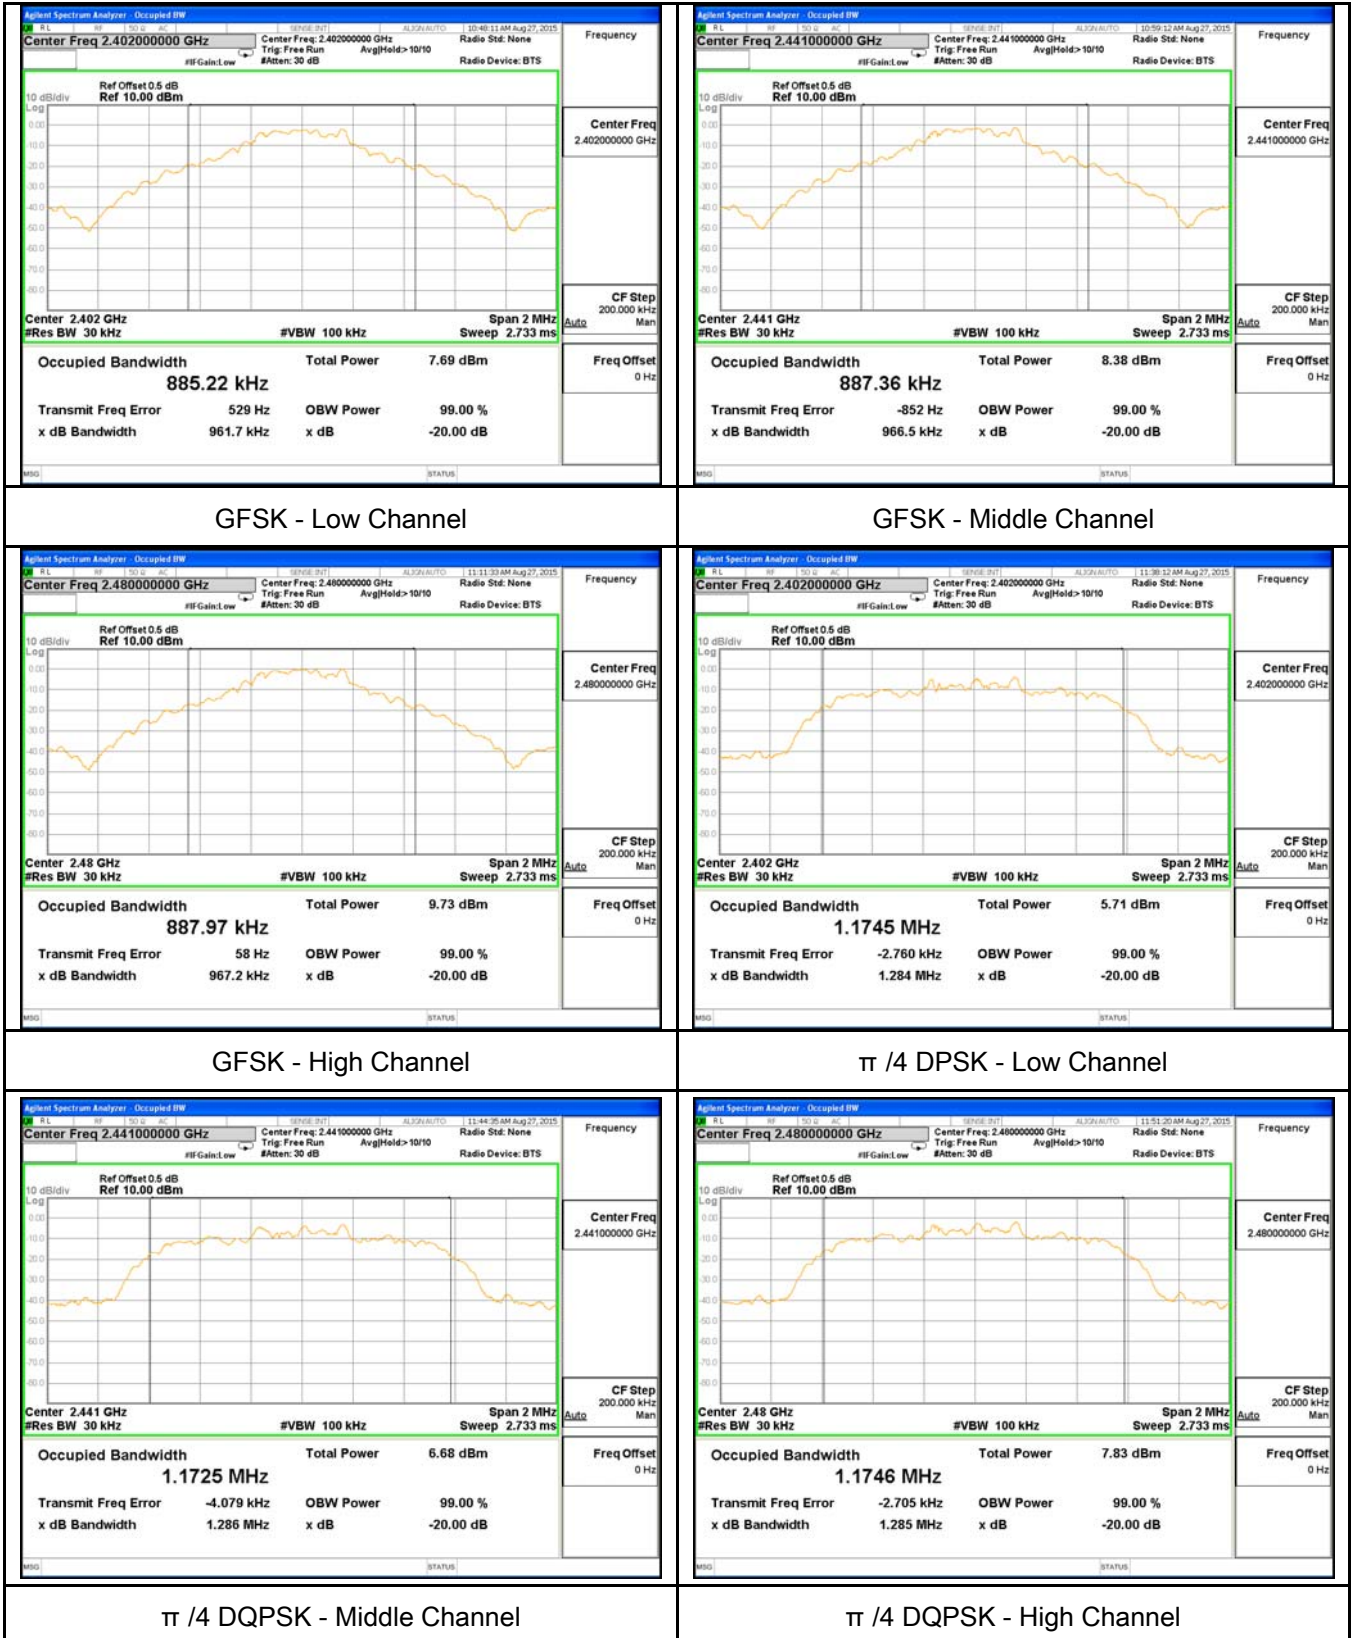




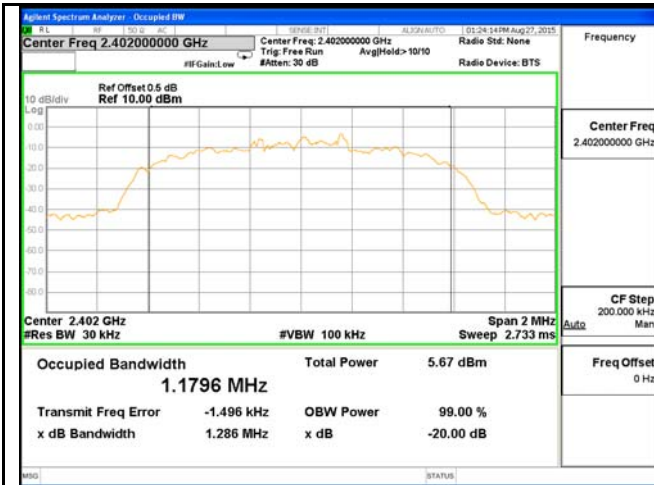

8DPSK - Low Channel

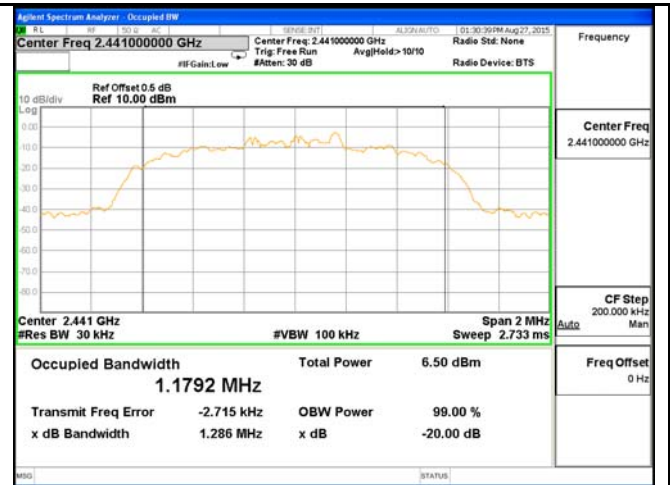

8DPSK - Middle Channel

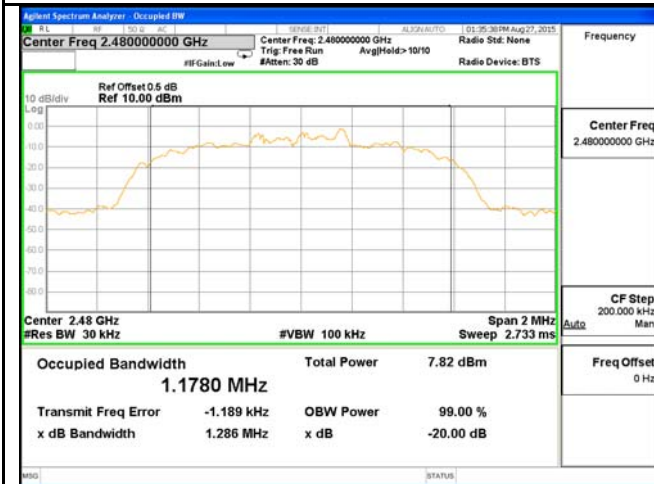


8DPSK - High Channel

## 6.4 Peak Output Power

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2015
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>

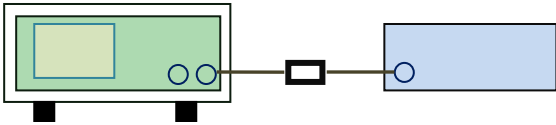Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> </ul>
----------------	---

	<ul style="list-style-type: none"> <li>- Allow the trace to stabilize.</li> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data  Yes  N/A  
 Test Plot  Yes (See below)  N/A

**Peak Output Power measurement result**


Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	0.867	1000	Pass
		Mid	2441	1.349	1000	Pass
		High	2480	<b>2.686</b>	1000	Pass
	$\pi/4$ DQPSK	Low	2402	-0.063	125	Pass
		Mid	2441	0.701	125	Pass
		High	2480	1.983	125	Pass
	8-DPSK	Low	2402	0.213	125	Pass
		Mid	2441	0.921	125	Pass
		High	2480	2.240	125	Pass

## Test Plots


### Output Power measurement result

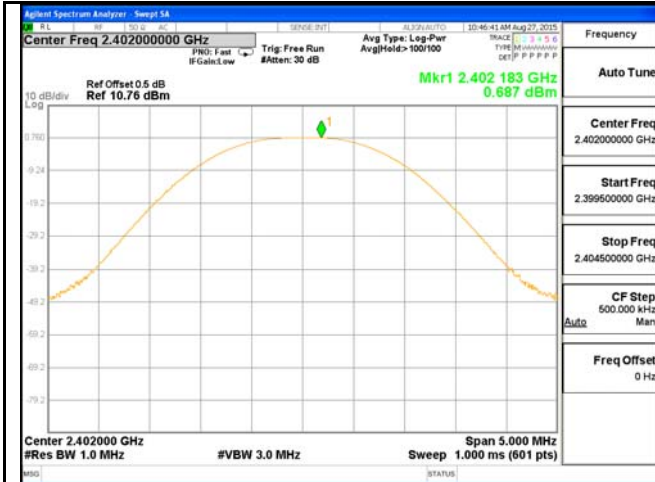


GFSK Output power - Low CH 2402

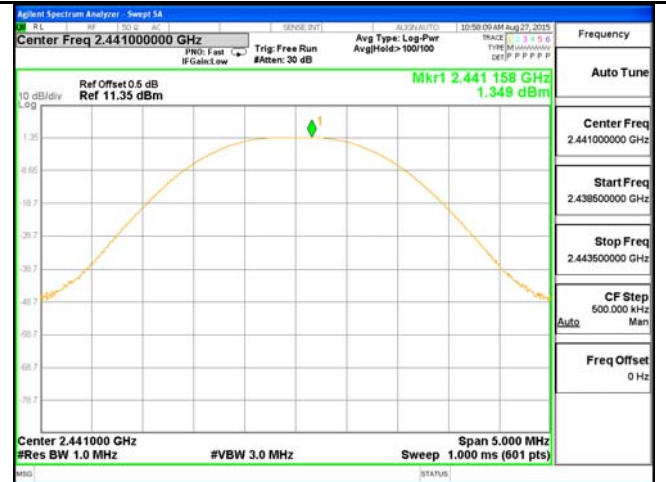


GFSK Output power - Mid CH 2441

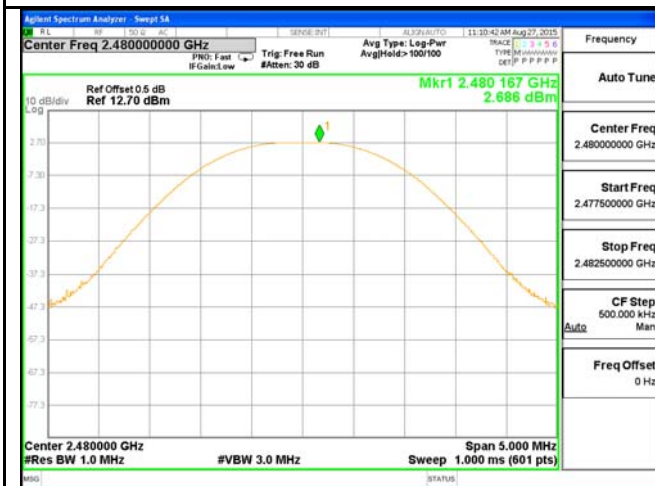


GFSK Output power - High CH 2480

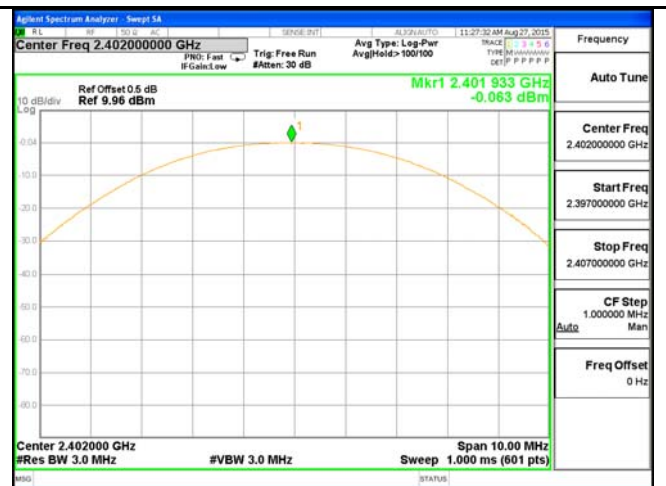


$\pi/4$  DQPSK Output power - Low CH 2402

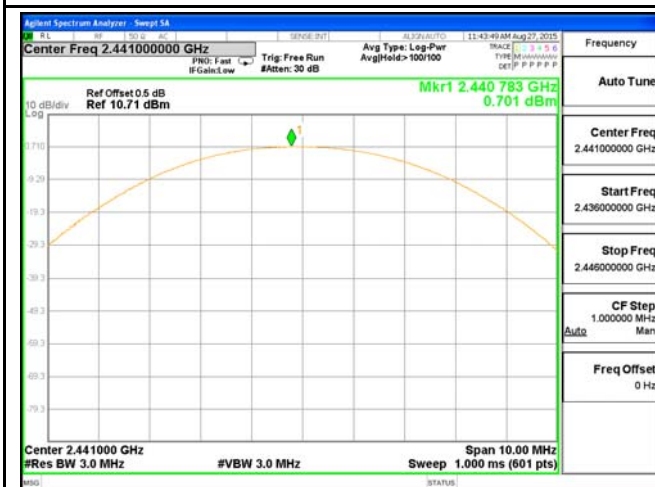


$\pi/4$  DQPSK Output power - Mid CH 2441

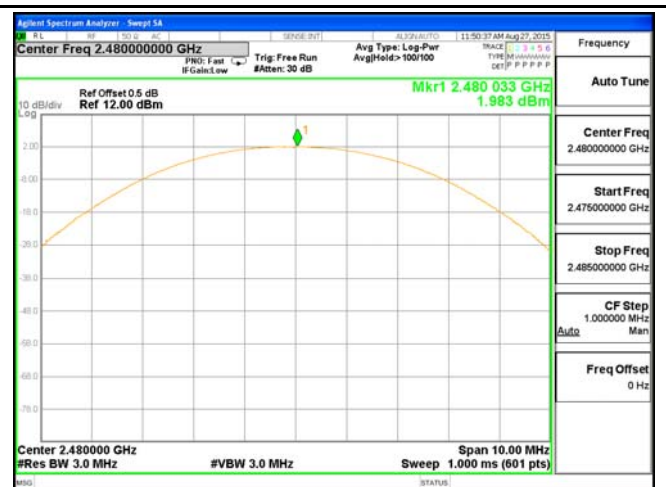


$\pi/4$  DQPSK Output power - High CH 2480

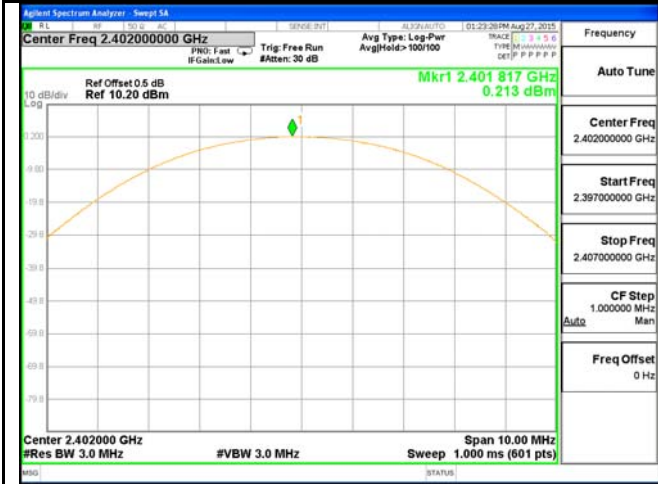

8DPSK Output power - Low CH 2402

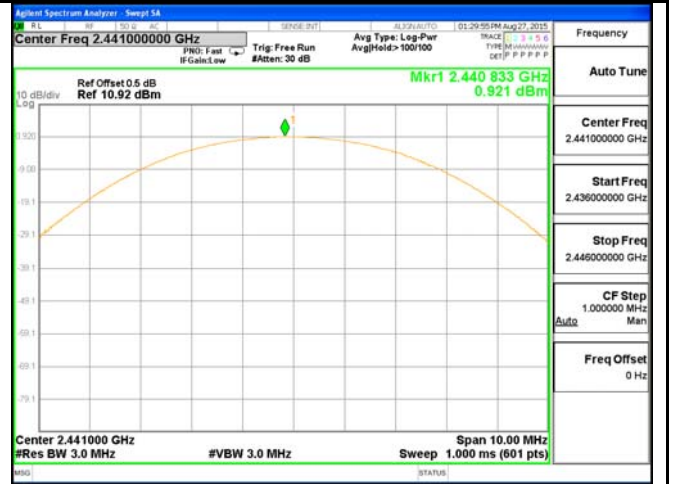

8DPSK Output power - Mid CH 2441

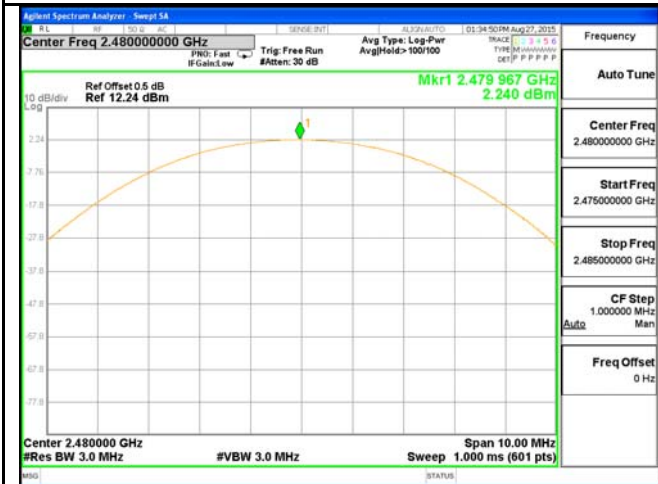


8DPSK Output power - High CH 2480



### 6.5 Number of Hopping Channel

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2015
Tested By :	Winnie Zhang

**Requirement(s):**

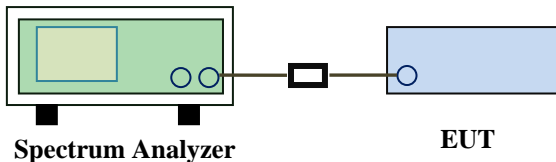Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer settings:</u>                      The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW ≥ 1% of the span</li> <li>- VBW ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)                       N/A

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result

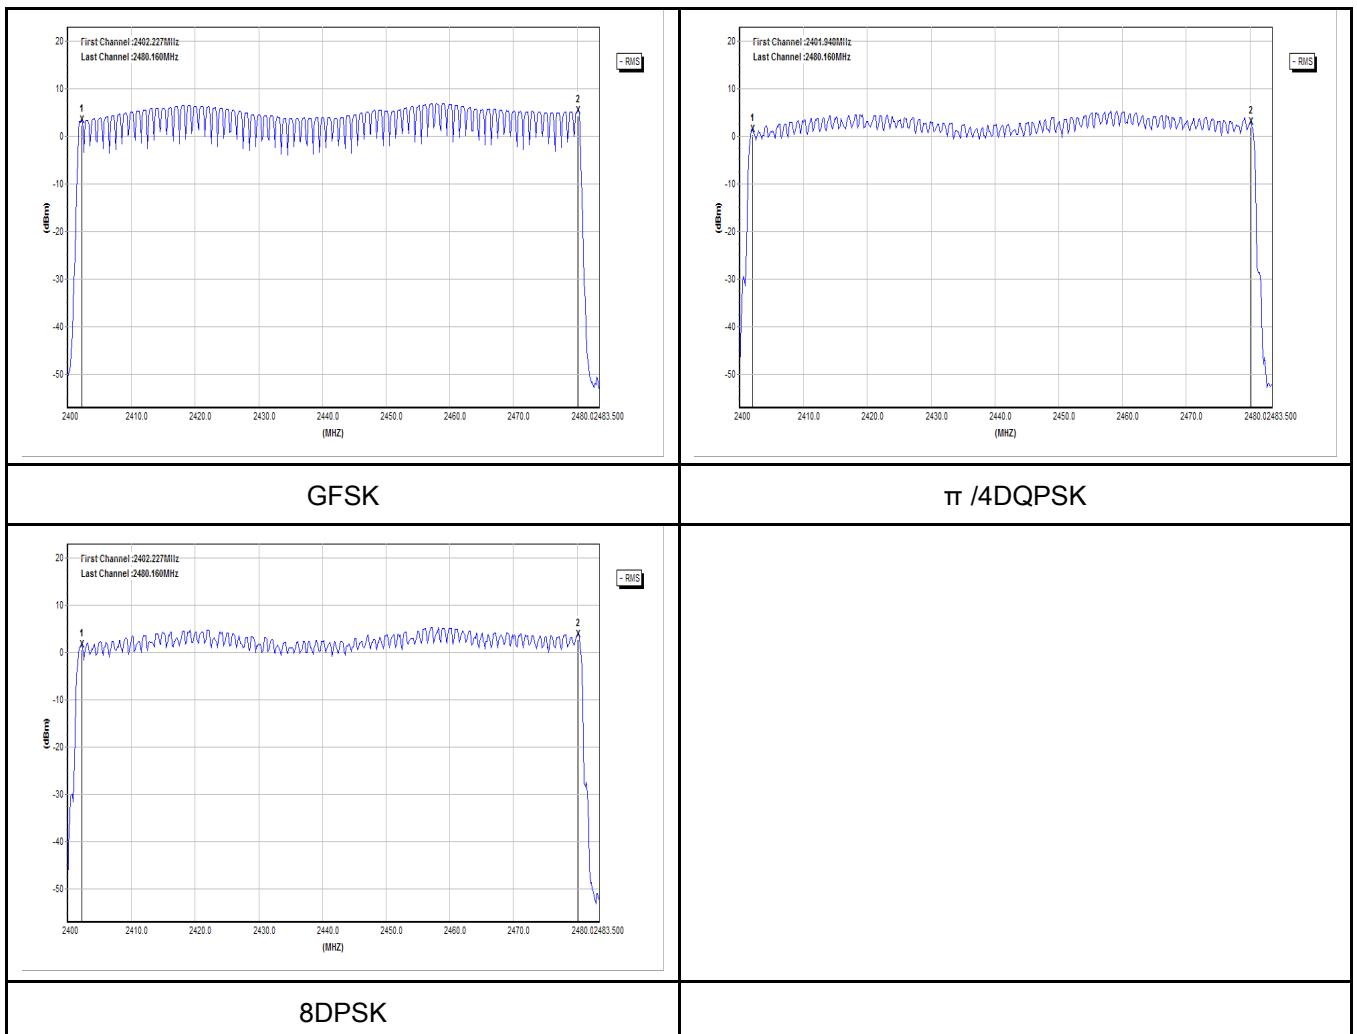

## 6.6 Time of Occupancy (Dwell Time)

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2015
Tested By :	Winnie Zhang

### Requirement(s):

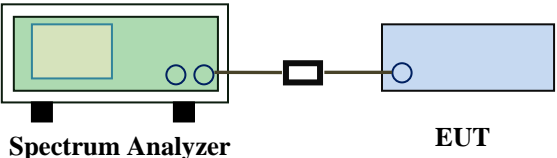Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)                       N/A





**Dwell Time measurement result**

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.90	309.333	400	Pass
		Mid	2.89	308.267	400	Pass
		High	2.91	310.400	400	Pass
	π /4 DQPSK	Low	2.90	309.333	400	Pass
		Mid	2.90	309.333	400	Pass
		High	2.92	311.467	400	Pass
	8-DPSK	Low	2.89	308.267	400	Pass
		Mid	2.92	311.467	400	Pass
		High	2.91	310.400	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						


**Test Plots**

**Dwell Time measurement result**

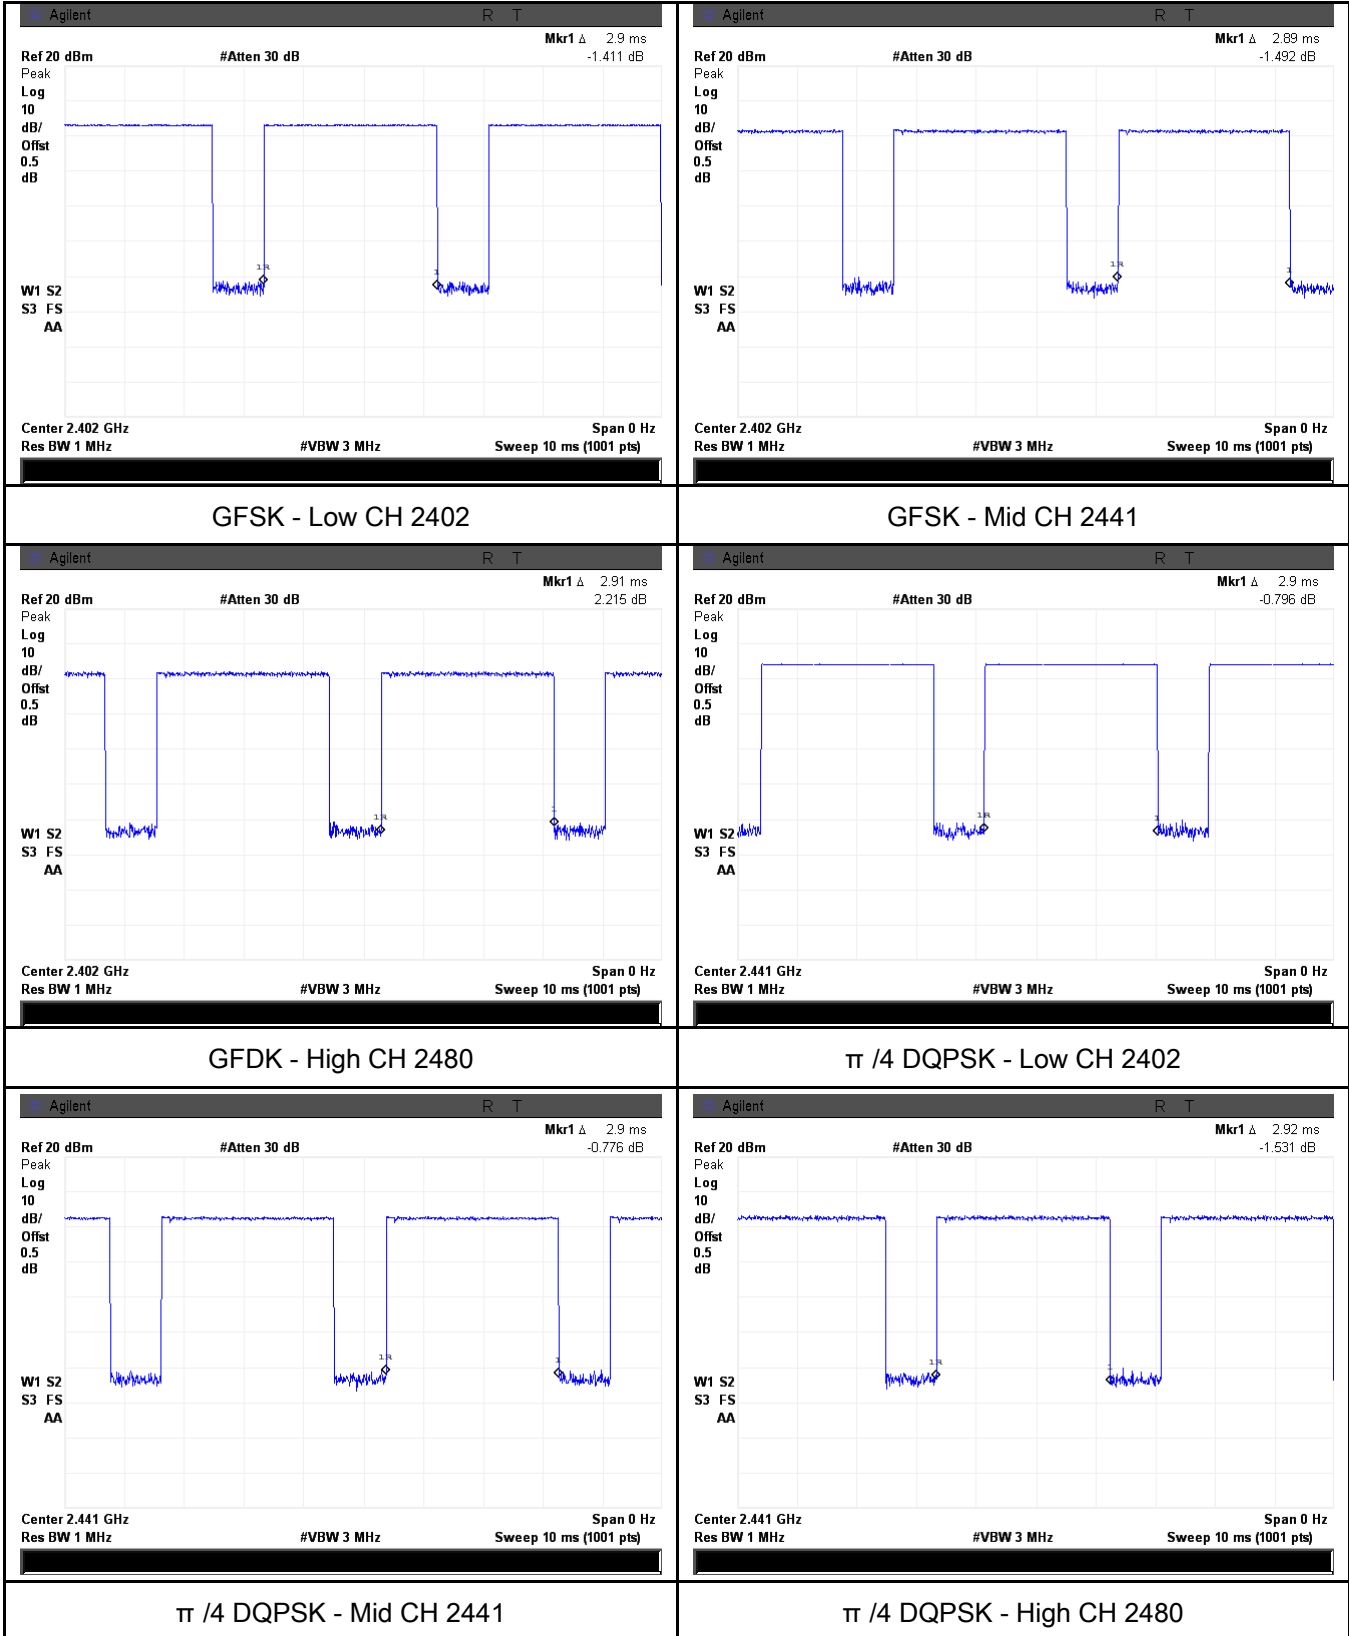


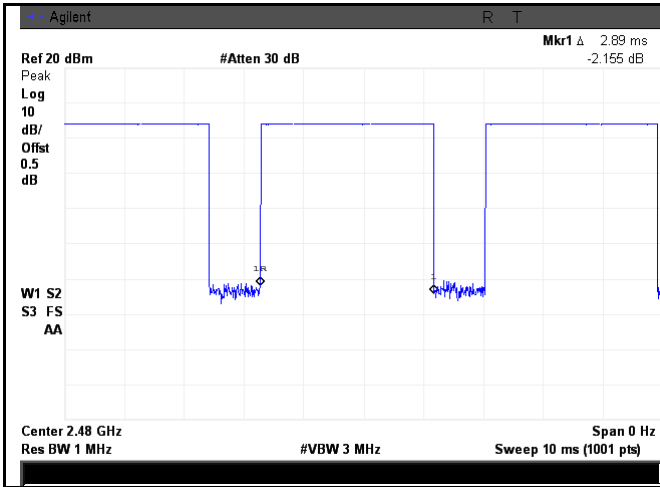


8DPSK - Low CH 2402

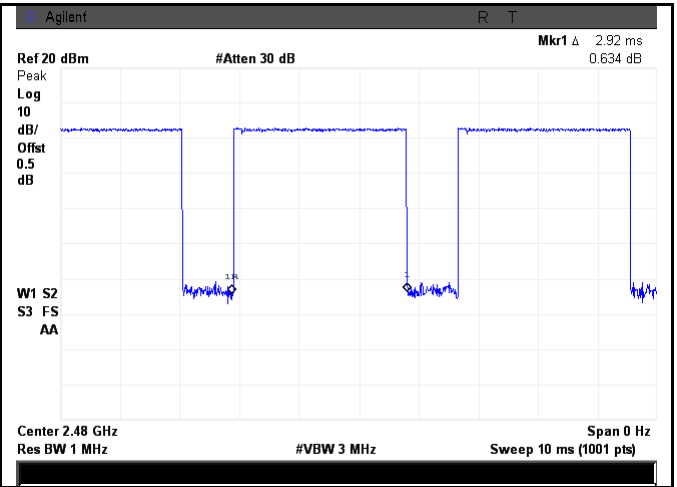

8DPSK - Mid CH 2441

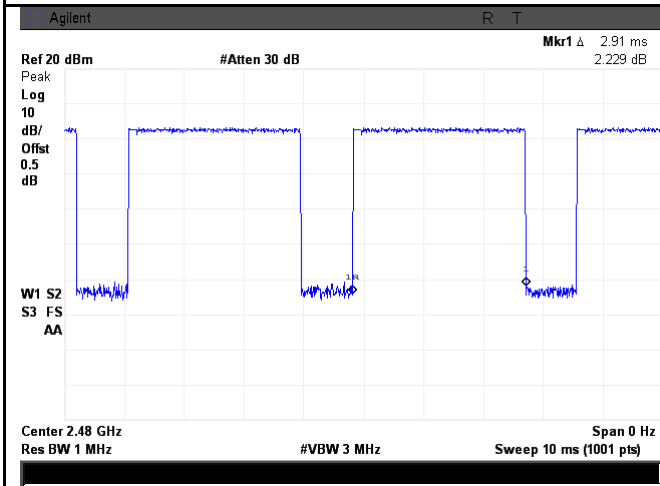

8DPSK - High CH 2480



## 6.7 Band Edge

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	September 06, 2015
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>
----------------	--



Test Report	15050034-FCC-R2
Page	29 of 58

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A

### Test Plots

#### GFSK Mode:

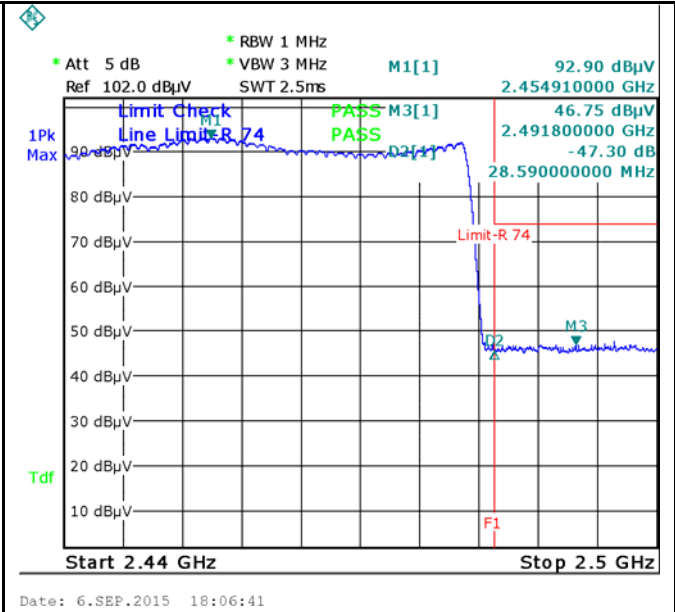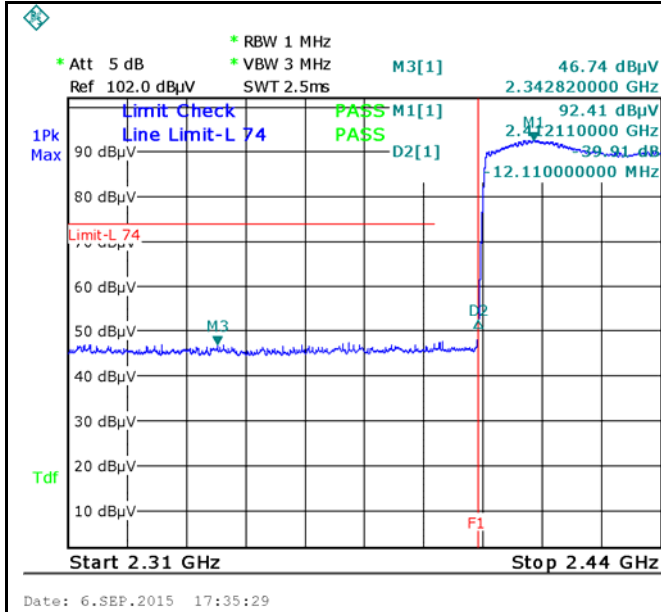

GFSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Hopping Right Side-PK



Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

GFSK-Hopping Left Side-AV

GFSK-Hopping Right Side-AV

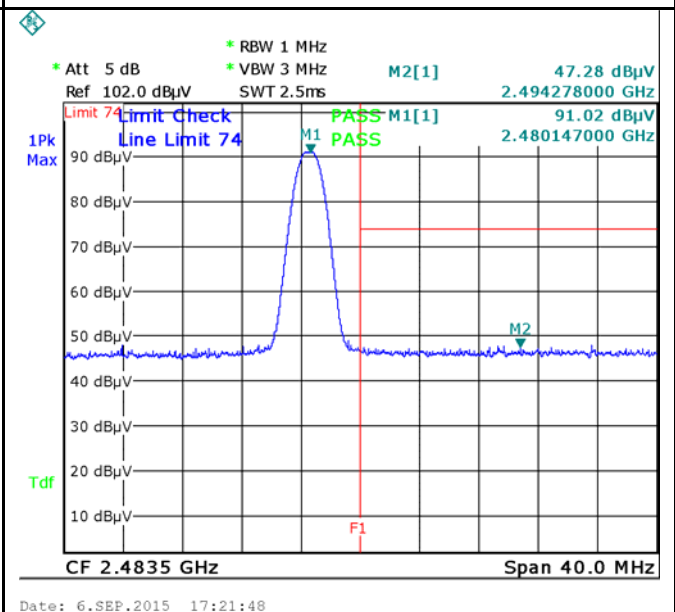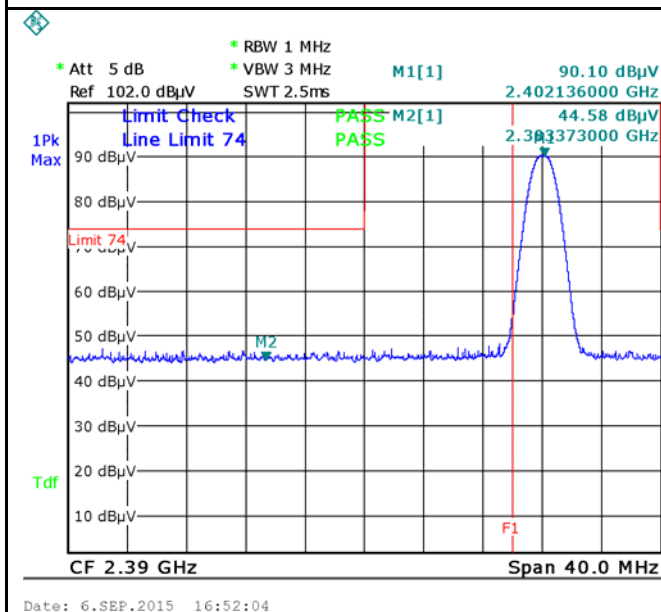


GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

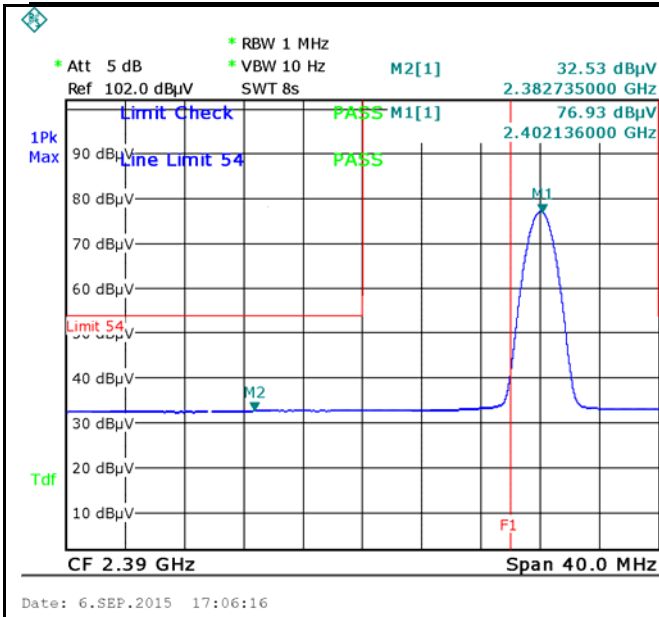



Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV

GFSK-Right Side-AV

Date: 6.SEP.2015 17:06:16

**$\pi$  / 4 DQPSK Mode:**

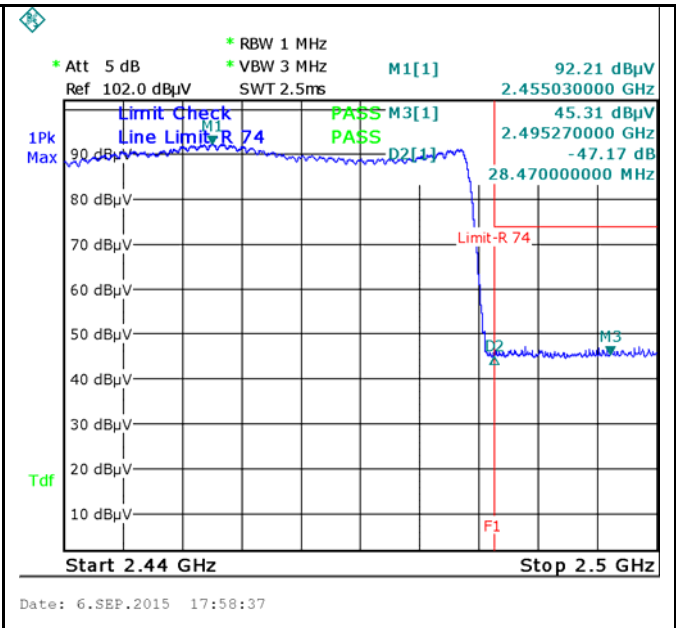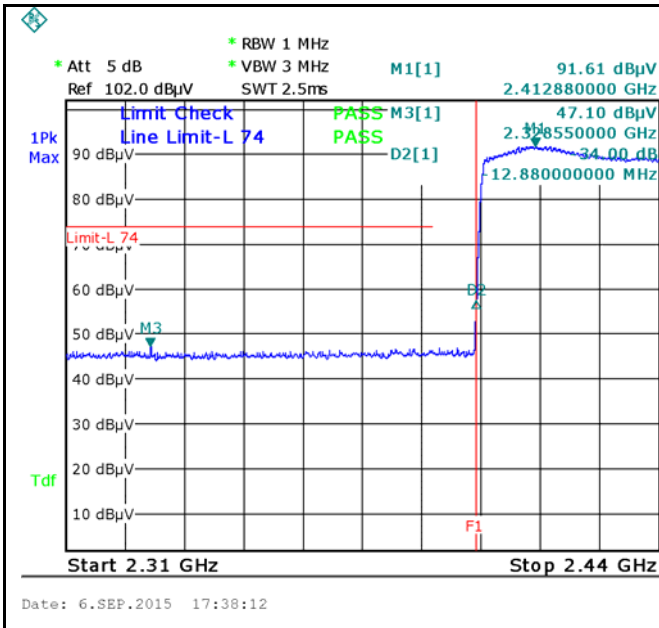

$\pi$  / 4 DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

$\pi$  / 4 DQPSK-Hopping Right Side-PK



Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

$\pi$  / 4 DQPSK-Hopping Left-AV

$\pi$  / 4 DQPSK-Hopping Right-AV

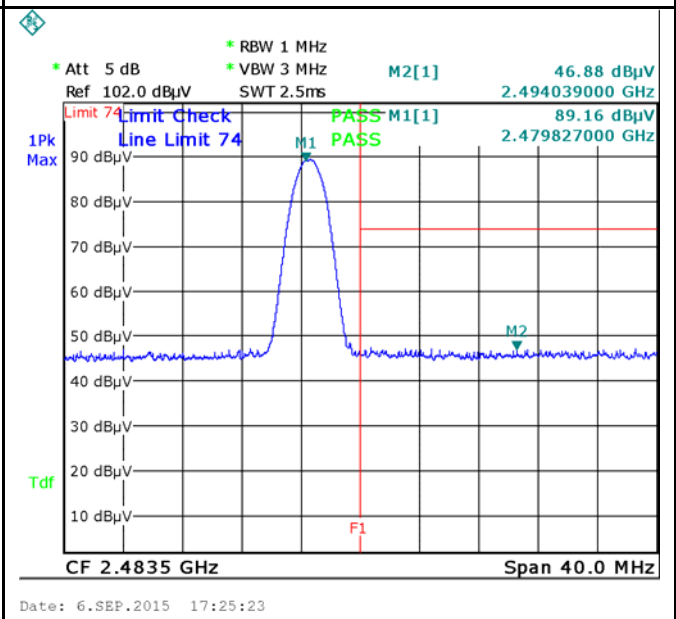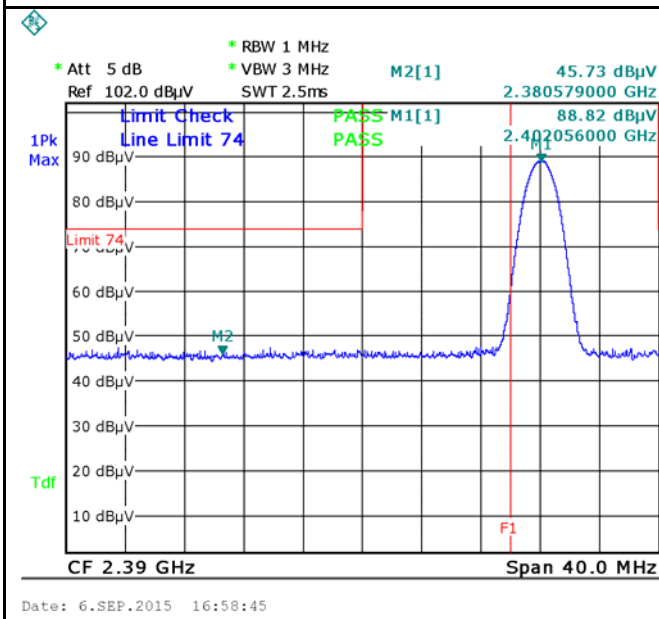

$\pi$  / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz



$\pi$  / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz





**8-DPSK Mode:**

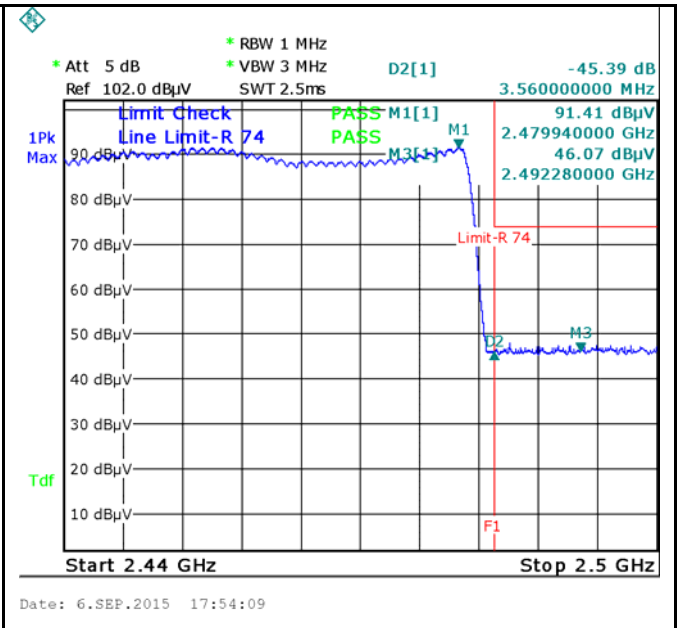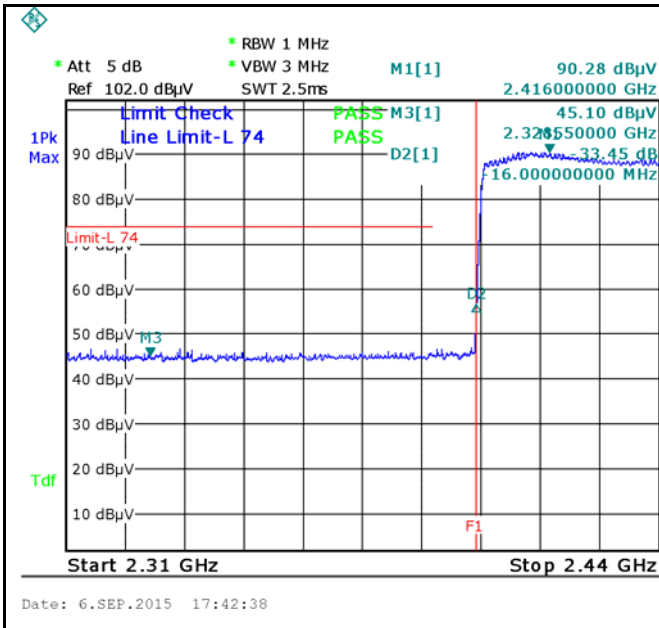

8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Hopping Right Side-PK



Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Left-AV

8DPSK-Hopping Right-AV

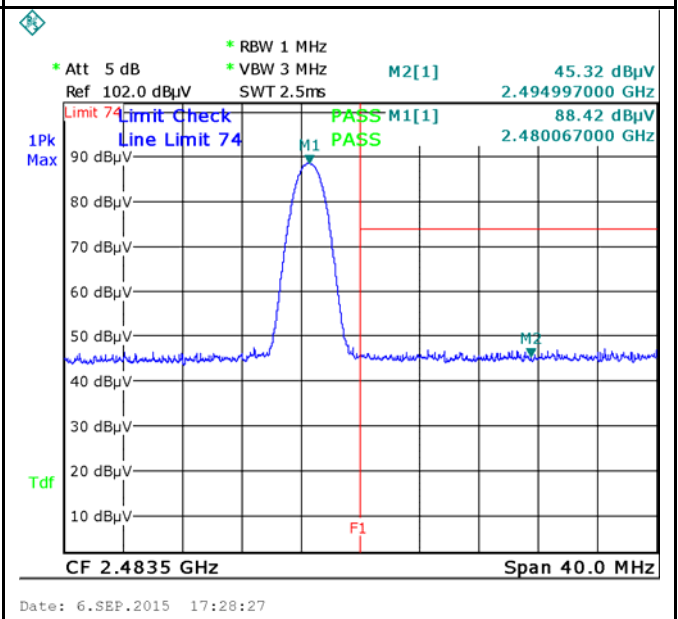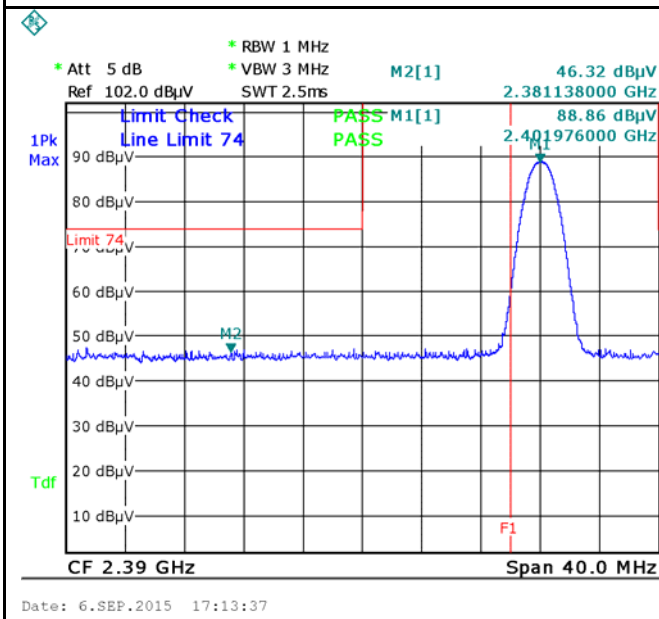


8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

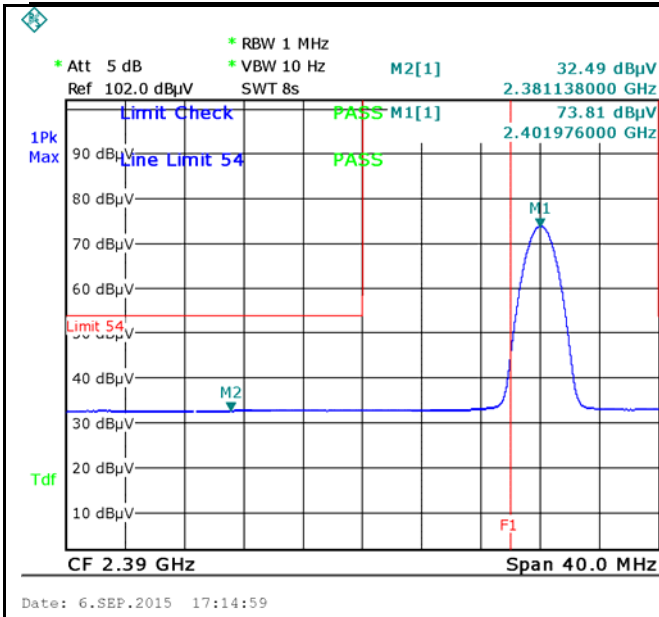

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV




Test Report	15050034-FCC-R2
Page	37 of 58

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot      Yes (See below)             N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

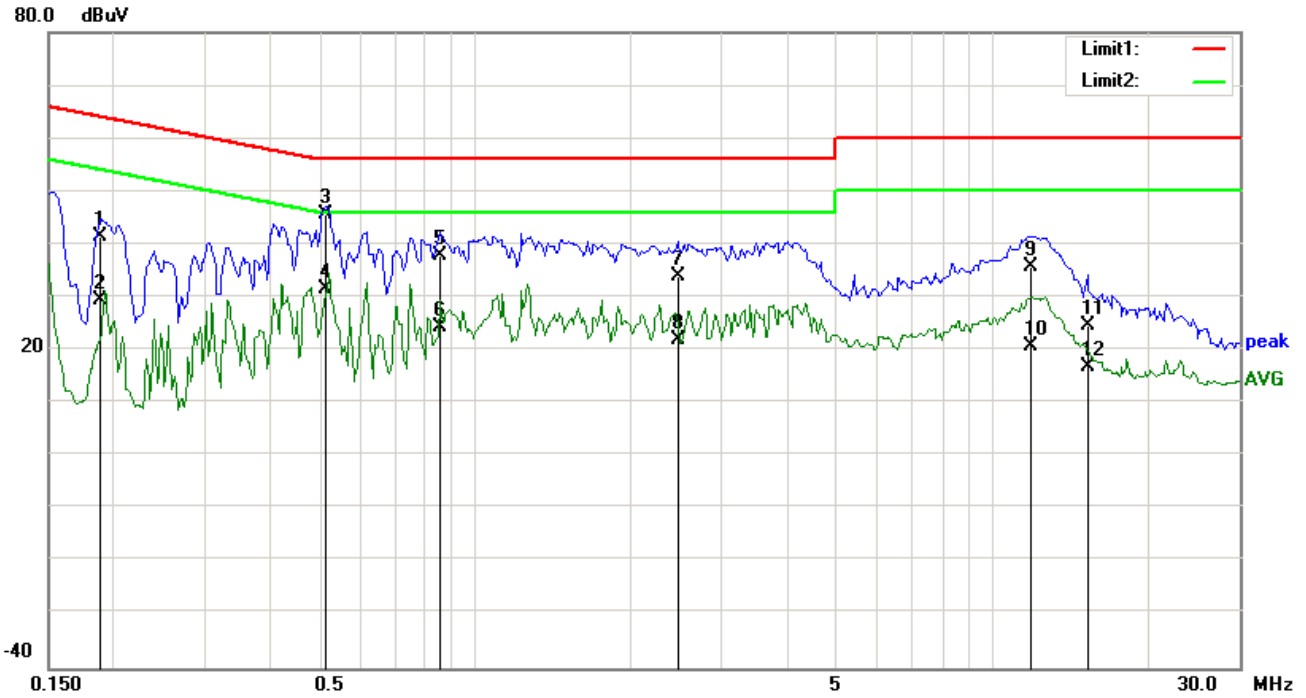


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB}	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1891	31.48	QP	10.03	41.51	64.08	-22.57
2	L1	0.1891	19.53	AVG	10.03	29.56	54.08	-24.52
3	L1	0.5172	35.59	QP	10.03	45.62	56.00	-10.38
4	L1	0.5172	21.56	AVG	10.03	31.59	46.00	-14.41
5	L1	0.8531	27.81	QP	10.03	37.84	56.00	-18.16
6	L1	0.8531	14.33	AVG	10.03	24.36	46.00	-21.64
7	L1	2.4664	23.83	QP	10.05	33.88	56.00	-22.12
8	L1	2.4664	12.05	AVG	10.05	22.10	46.00	-23.90
9	L1	11.8398	25.43	QP	10.18	35.61	60.00	-24.39
10	L1	11.8398	10.69	AVG	10.18	20.87	50.00	-29.13
11	L1	15.2656	14.39	QP	10.23	24.62	60.00	-35.38
12	L1	15.2656	6.49	AVG	10.23	16.72	50.00	-33.28

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

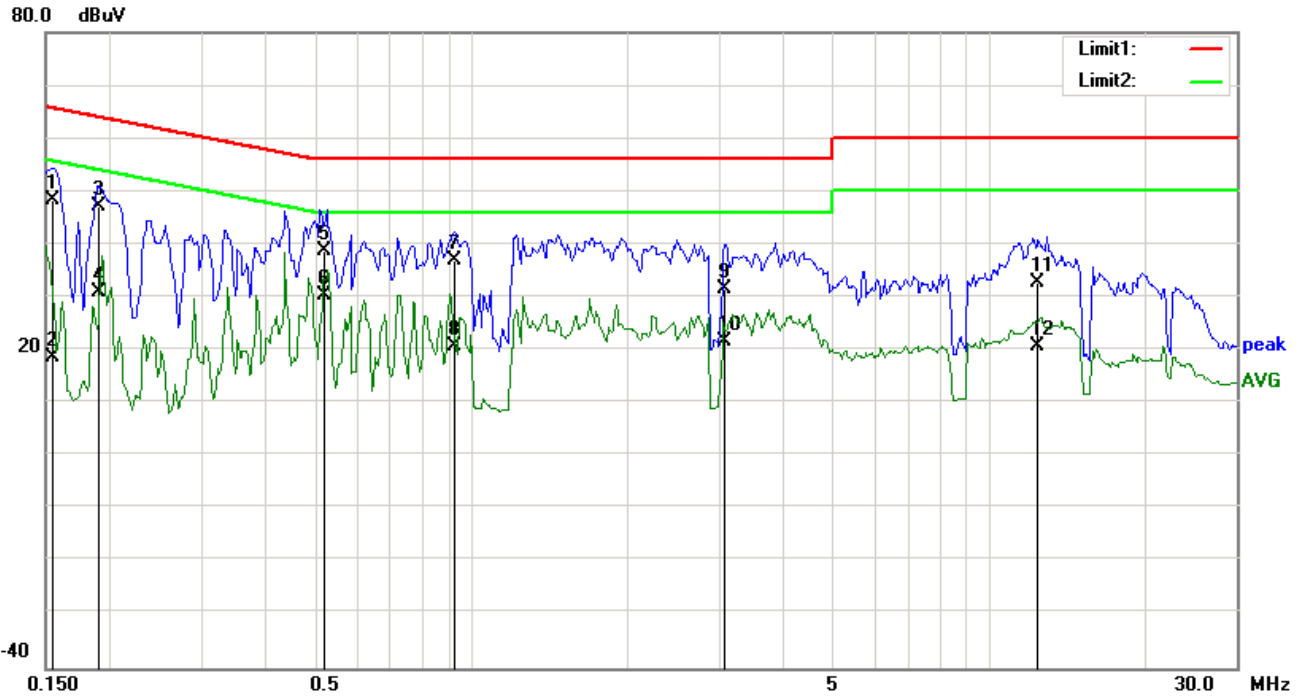


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1548	38.43	QP	10.02	48.45	65.74	-17.29
2	N	0.1548	8.55	AVG	10.02	18.57	55.74	-37.17
3	N	0.1904	37.04	QP	10.02	47.06	64.02	-16.96
4	N	0.1904	21.00	AVG	10.02	31.02	54.02	-23.00
5	N	0.5182	28.70	QP	10.02	38.72	56.00	-17.28
6	N	0.5182	20.34	AVG	10.02	30.36	46.00	-15.64
7	N	0.9234	27.03	QP	10.03	37.06	56.00	-18.94
8	N	0.9234	10.77	AVG	10.03	20.80	46.00	-25.20
9	N	3.0898	21.64	QP	10.05	31.69	56.00	-24.31
10	N	3.0898	11.49	AVG	10.05	21.54	46.00	-24.46
11	N	12.4023	22.54	QP	10.17	32.71	60.00	-27.29
12	N	12.4023	10.48	AVG	10.17	20.65	50.00	-29.35

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

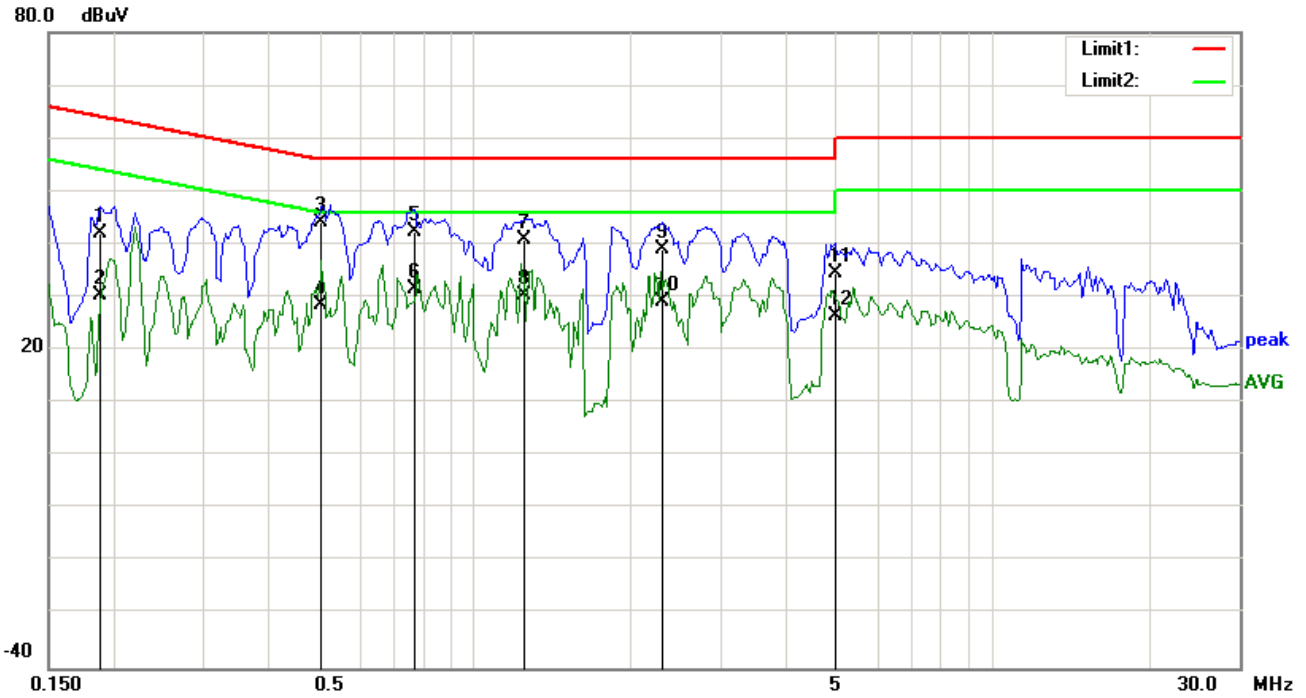


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1891	31.95	QP	10.03	41.98	64.08	-22.10
2	L1	0.1891	20.47	AVG	10.03	30.50	54.08	-23.58
3	L1	0.5055	34.09	QP	10.03	44.12	56.00	-11.88
4	L1	0.5055	18.39	AVG	10.03	28.42	46.00	-17.58
5	L1	0.7633	32.41	QP	10.03	42.44	56.00	-13.56
6	L1	0.7633	21.38	AVG	10.03	31.41	46.00	-14.59
7	L1	1.2437	30.77	QP	10.03	40.80	56.00	-15.20
8	L1	1.2437	20.39	AVG	10.03	30.42	46.00	-15.58
9	L1	2.2984	28.98	QP	10.05	39.03	56.00	-16.97
10	L1	2.2984	19.02	AVG	10.05	29.07	46.00	-16.93
11	L1	4.9570	24.45	QP	10.08	34.53	56.00	-21.47
12	L1	4.9570	16.32	AVG	10.08	26.40	46.00	-19.60



**Test Mode: Bluetooth Mode**

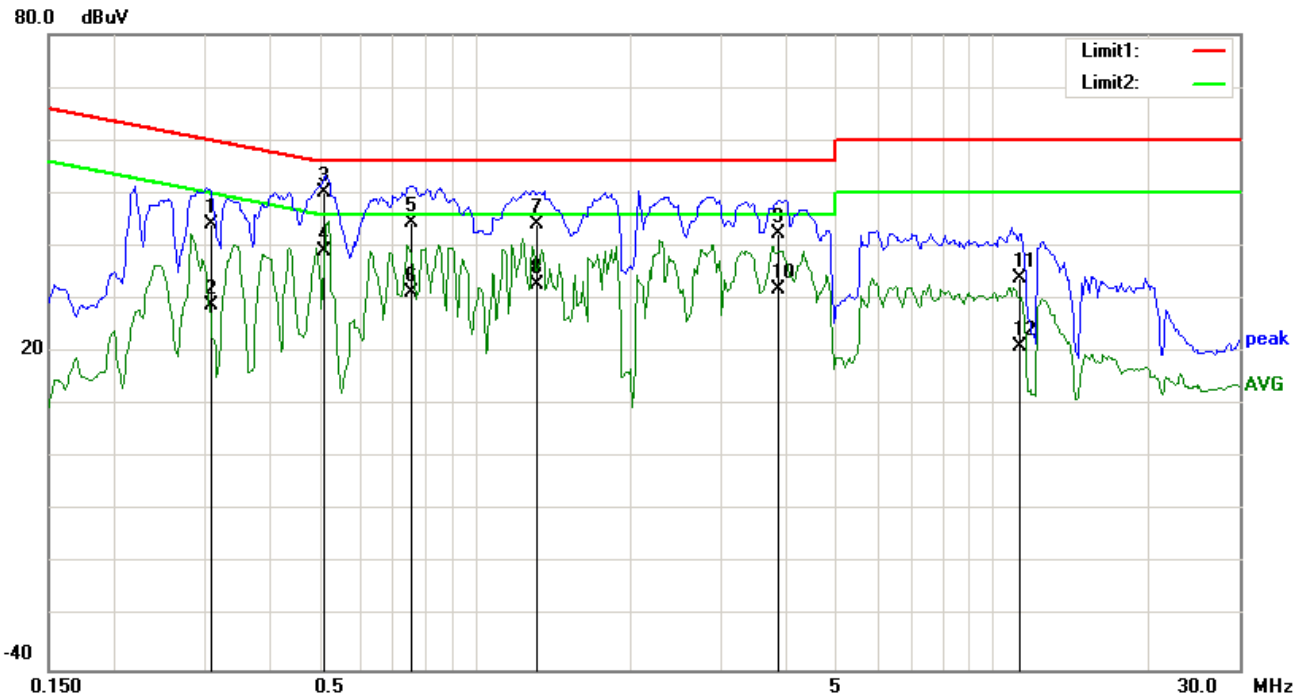

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.3102	34.02	QP	10.02	44.04	59.97	-15.93
2	N	0.3102	18.72	AVG	10.02	28.74	49.97	-21.23
3	N	0.5101	40.18	QP	10.02	50.20	56.00	-5.80
4	N	0.5101	28.95	AVG	10.02	38.97	46.00	-7.03
5	N	0.7549	34.29	QP	10.03	44.32	56.00	-11.68
6	N	0.7549	21.09	AVG	10.03	31.12	46.00	-14.88
7	N	1.3141	33.99	QP	10.03	44.02	56.00	-11.98
8	N	1.3141	22.74	AVG	10.03	32.77	46.00	-13.23
9	N	3.8603	32.37	QP	10.06	42.43	56.00	-13.57
10	N	3.8603	21.87	AVG	10.06	31.93	46.00	-14.07
11	N	11.2422	23.70	QP	10.15	33.85	60.00	-26.15
12	N	11.2422	10.85	AVG	10.15	21.00	50.00	-29.00

## 6.9 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	September 03, 2015
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V}/\text{m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

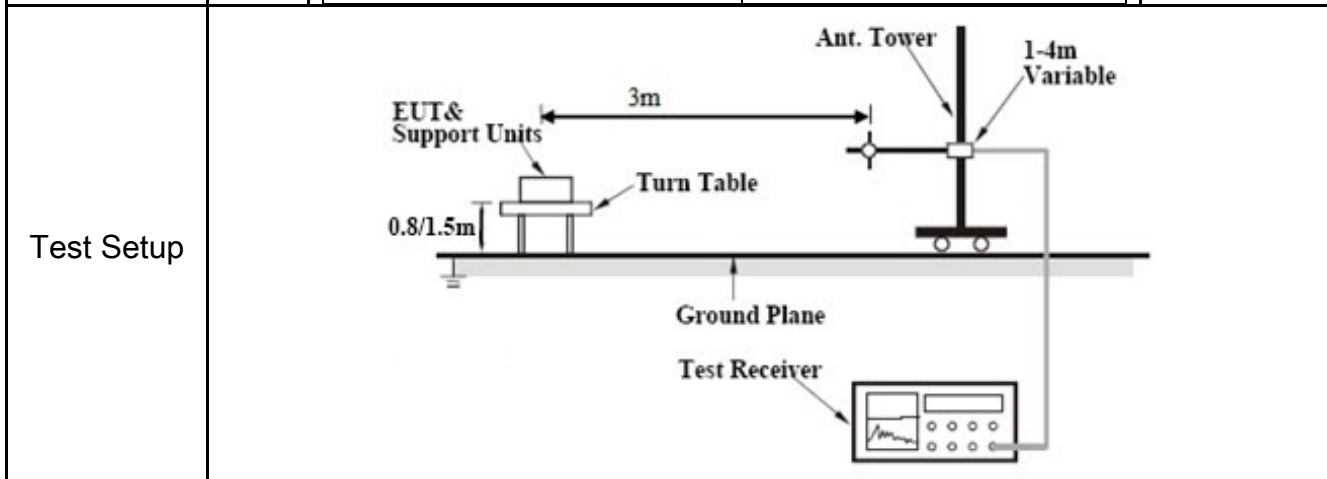

Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> </ol> </li> </ol>
-----------	--

Test Report	15050034-FCC-R2
Page	43 of 58


	<p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.          The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

**Below 1GHz**

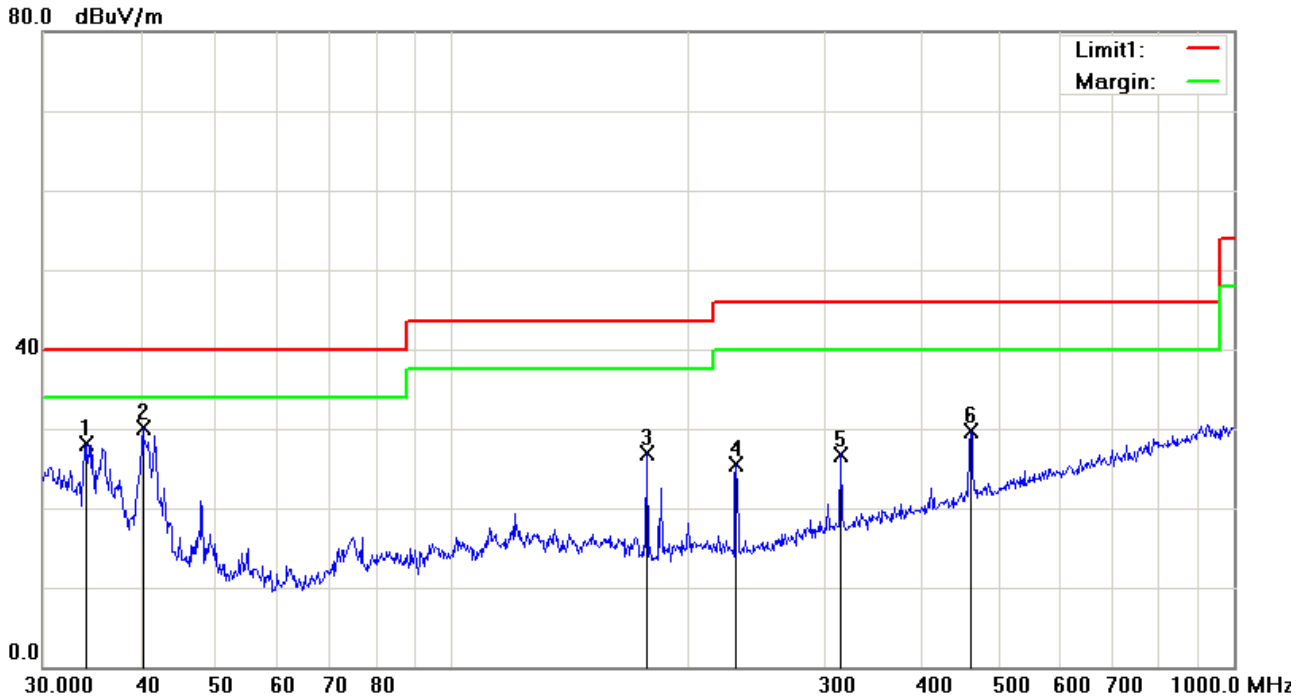


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( )
1	H	34.0365	31.37	peak	-3.24	28.13	40.00	-11.87	100	310
2	H	40.2757	37.90	peak	-7.77	30.13	40.00	-9.87	100	201
3	H	177.5092	36.51	peak	-9.69	26.82	43.50	-16.68	100	62
4	H	230.9068	34.58	peak	-9.01	25.57	46.00	-20.43	100	96
5	H	314.3765	33.29	peak	-6.49	26.80	46.00	-19.20	100	152
6	H	460.7271	32.49	peak	-2.79	29.70	46.00	-16.30	100	164

**Below 1GHz**

80.0 dBuV/m

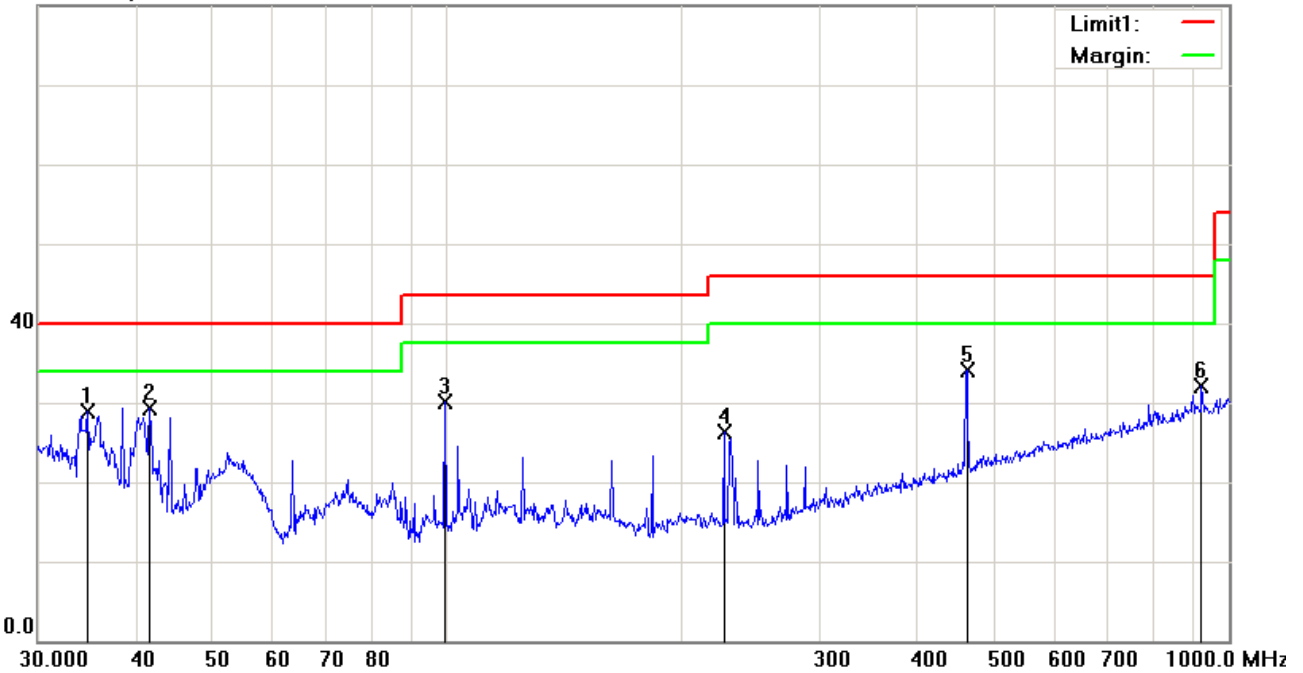

**Test Data**

**Vertical Polarity Plot @3m**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( )
1	V	34.7602	32.74	peak	-3.77	28.97	40.00	-11.03	100	259
2	V	41.7130	38.03	peak	-8.73	29.30	40.00	-10.70	200	115
3	V	99.5281	41.07	peak	-10.92	30.15	43.50	-13.35	100	255
4	V	226.0994	35.32	peak	-8.98	26.34	46.00	-19.66	200	306
5	V	462.3455	36.85	peak	-2.74	34.11	46.00	-11.89	100	169
6	V	922.5157	27.27	peak	4.89	32.16	46.00	-13.84	108	360

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

Mode: GFSK (Worst Case)

**Low Channel (2402 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	35.82	AV	V	33.83	6.86	31.72	44.79	54	-9.21
4804	36.49	AV	H	33.83	6.86	31.72	45.46	54	-8.54
4804	46.35	PK	V	33.83	6.86	31.72	55.32	74	-18.68
4804	45.61	PK	H	33.83	6.86	31.72	54.58	74	-19.42

**Middle Channel (2441 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882	35.71	AV	V	33.86	6.82	31.82	44.57	54	-9.43
4882	36.58	AV	H	33.86	6.82	31.82	45.44	54	-8.56
4882	46.44	PK	V	33.86	6.82	31.82	55.3	74	-18.7
4882	45.37	PK	H	33.86	6.82	31.82	54.23	74	-19.77

**High Channel (2480 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	35.64	AV	V	33.9	6.76	31.92	44.38	54	-9.62
4960	36.89	AV	H	33.9	6.76	31.92	45.63	54	-8.37
4960	46.73	PK	V	33.9	6.76	31.92	55.47	74	-18.53
4960	45.46	PK	H	33.9	6.76	31.92	54.2	74	-19.8


## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>




**Annex B. EUT And Test Setup Photographs**


**Annex B.i. Photograph: EUT External Photo**

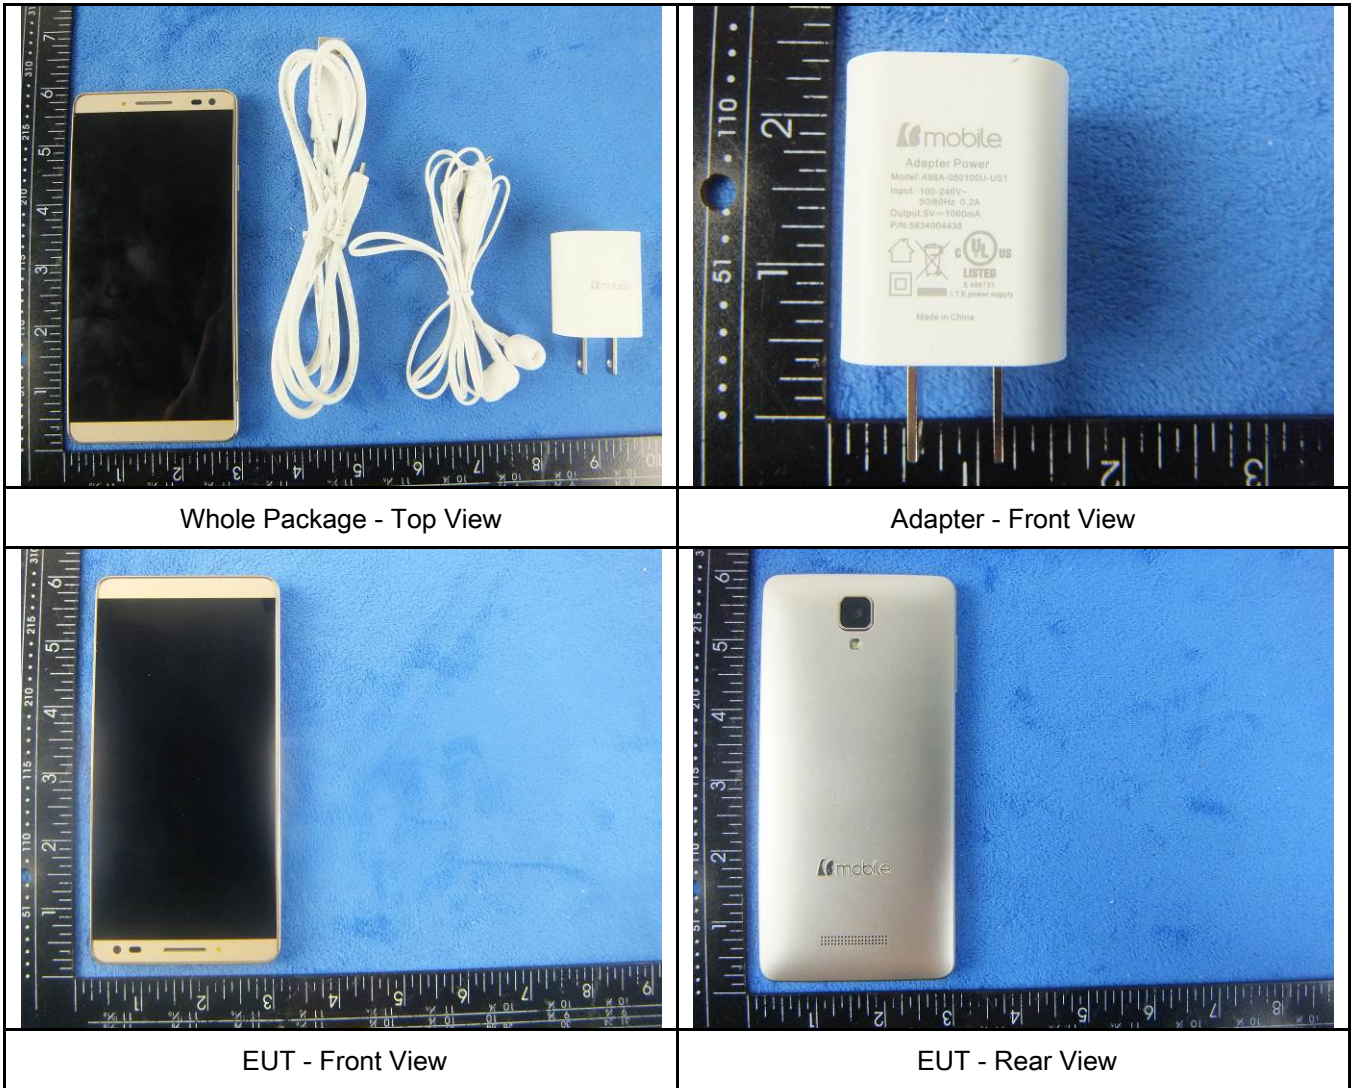




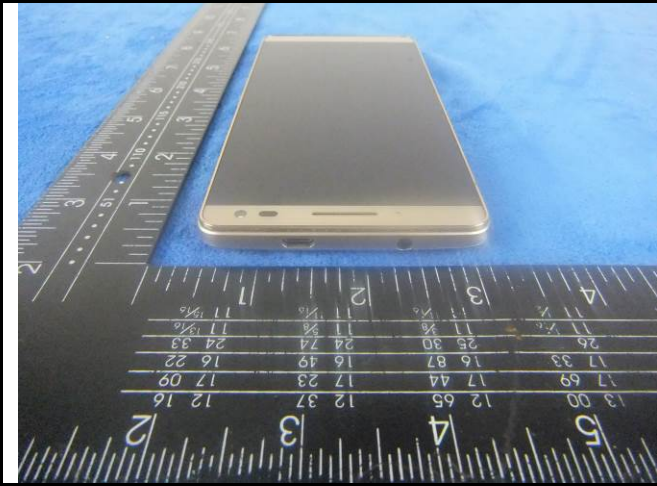


EUT - Top View

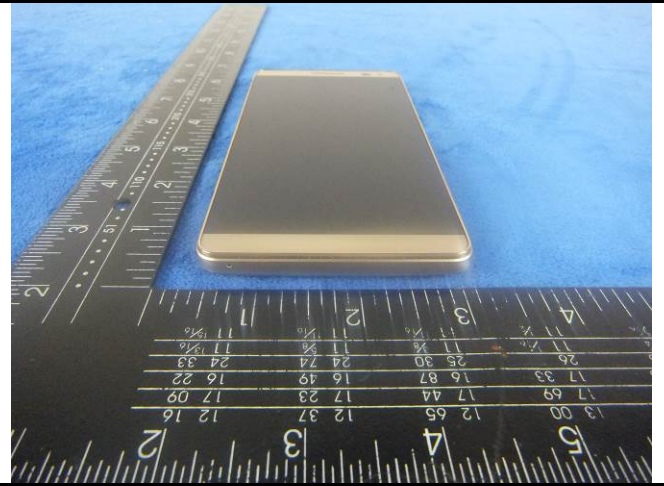

EUT - Bottom View

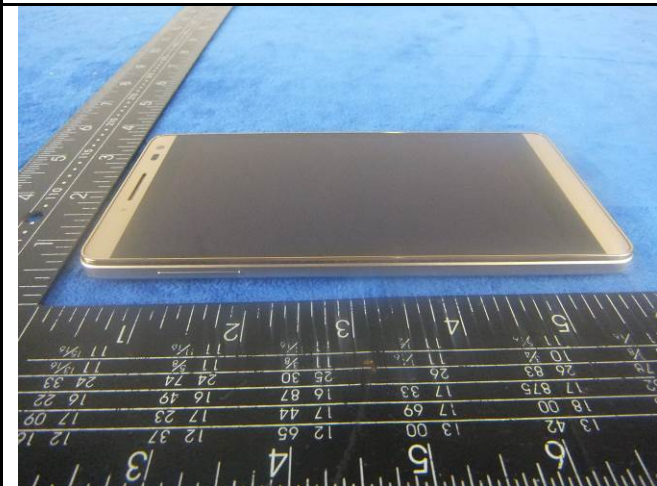

EUT - Left View

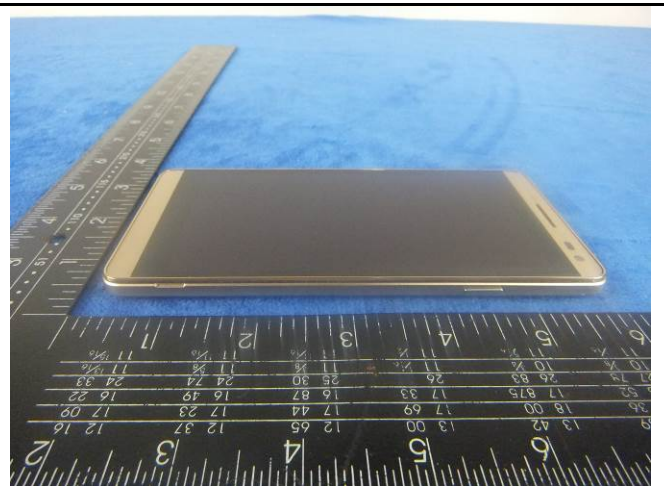


EUT - Right View



**Annex B.ii. Photograph: EUT Internal Photo**



Cover Off - Top View 1

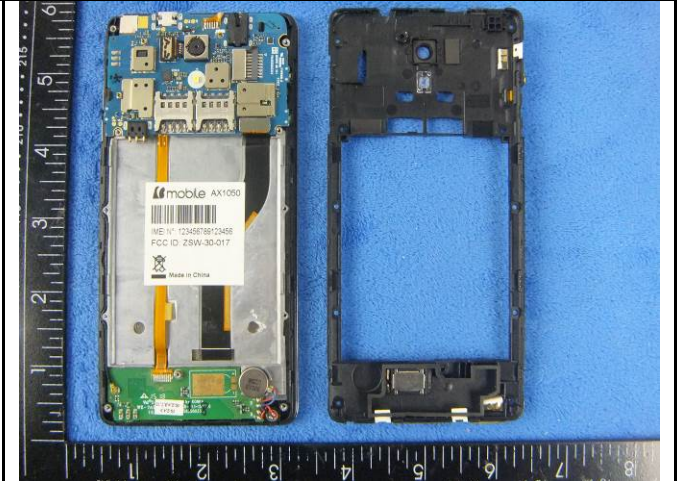


Cover Off - Top View 2




Battery - Top View



Battery - Bottom View

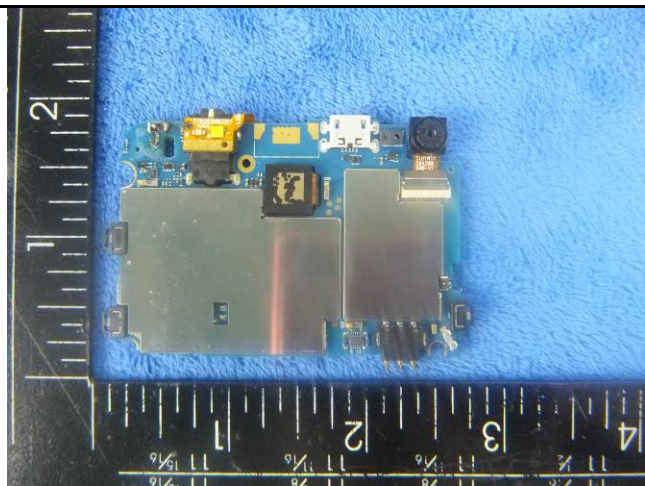


Mainboard With Shielding - Front View

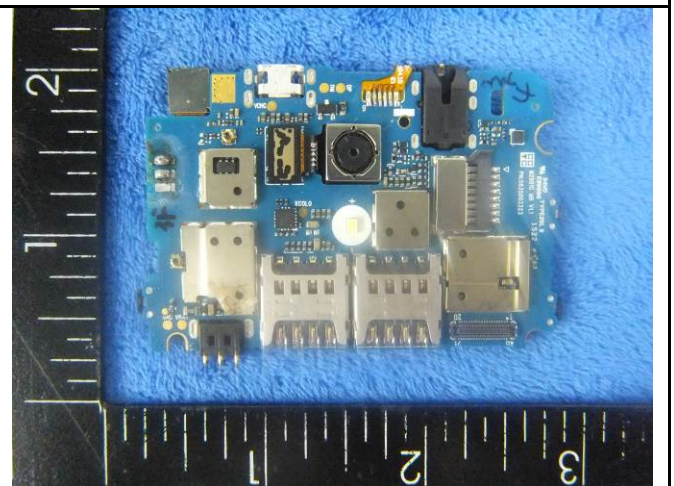


Mainboard With Shielding - Rear View




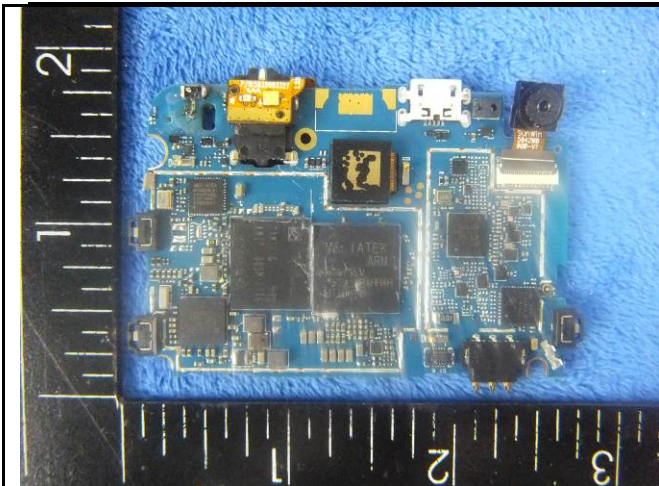

Mainboard Without Shielding - Front View

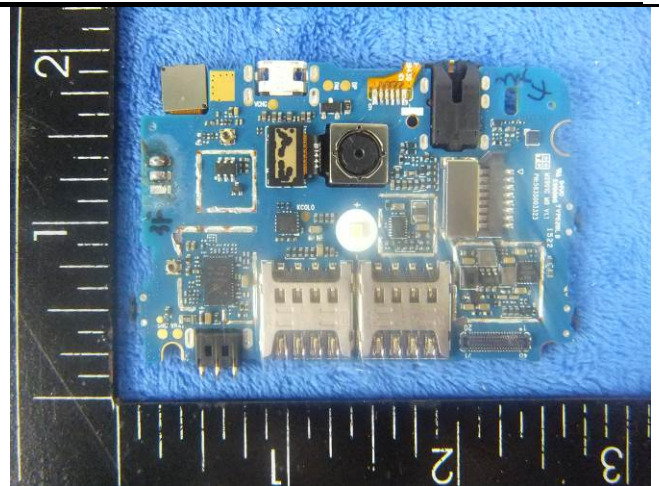


Mainboard Without Shielding - Rear View

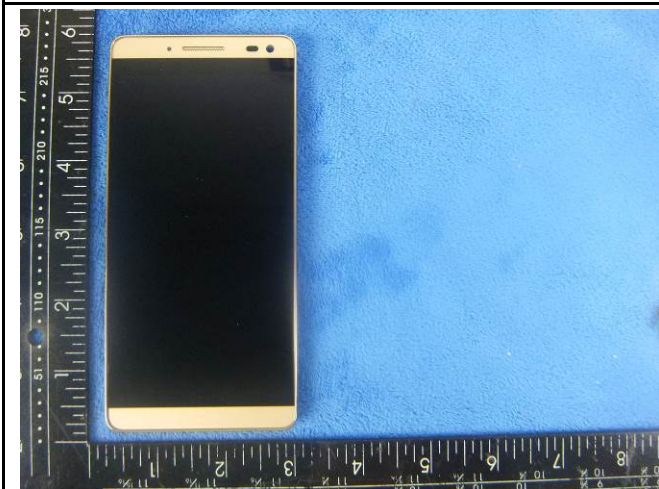


LCD - Front View



LCD - Rear View

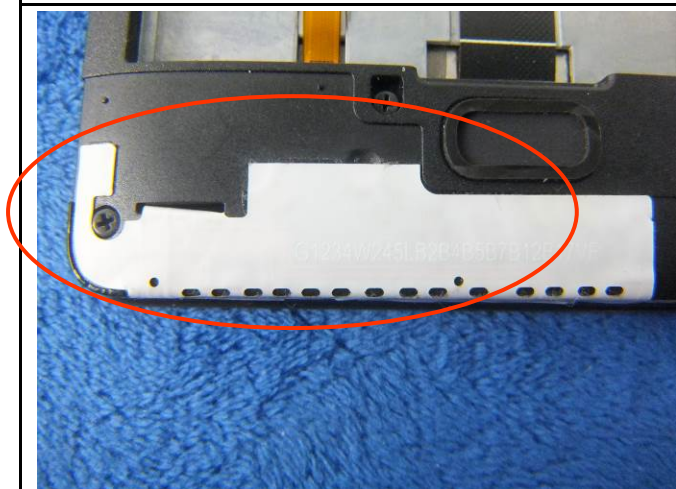

GSM/PCS/UMTS-FDD/LTE Antenna View

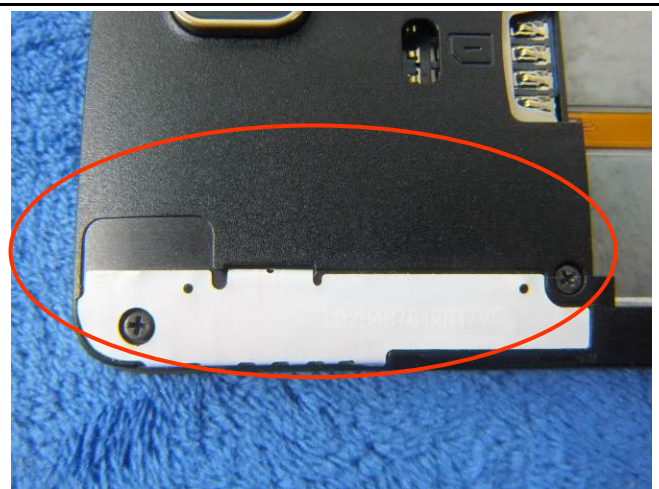

WIFI/BT/BLE - Antenna View


**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

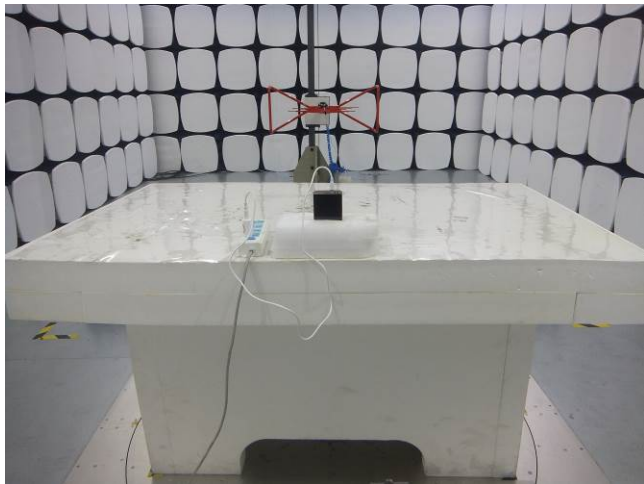

Radiated Spurious Emissions Test Setup Below 1GHz

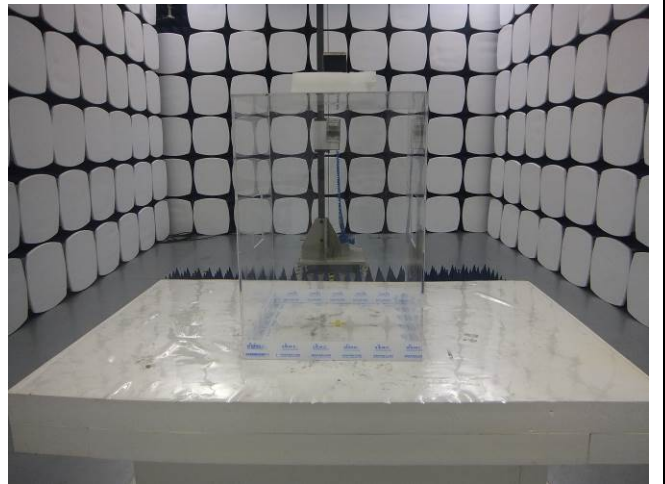


Radiated Spurious Emissions Test Setup Above 1GHz

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for AC Line Conducted Emissions

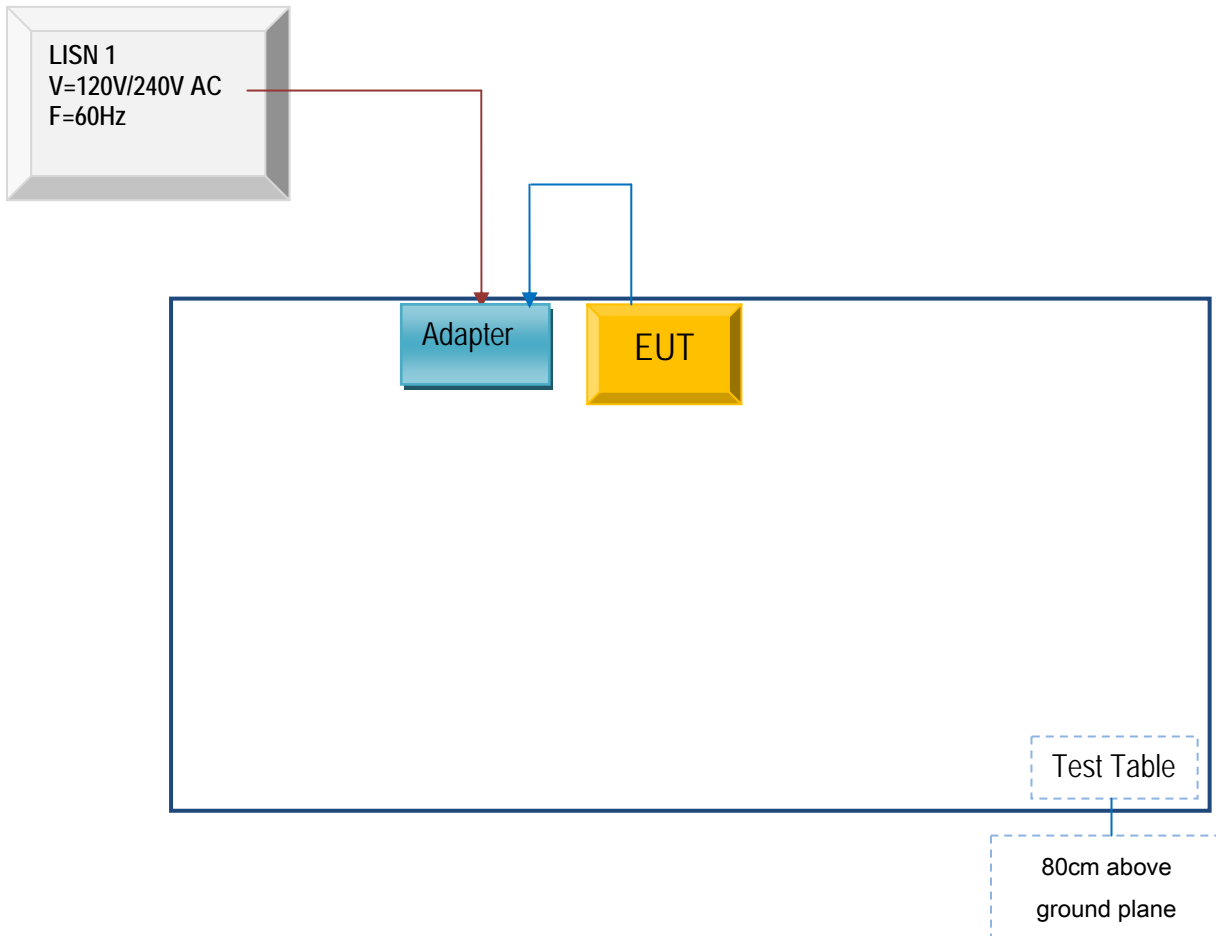




**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

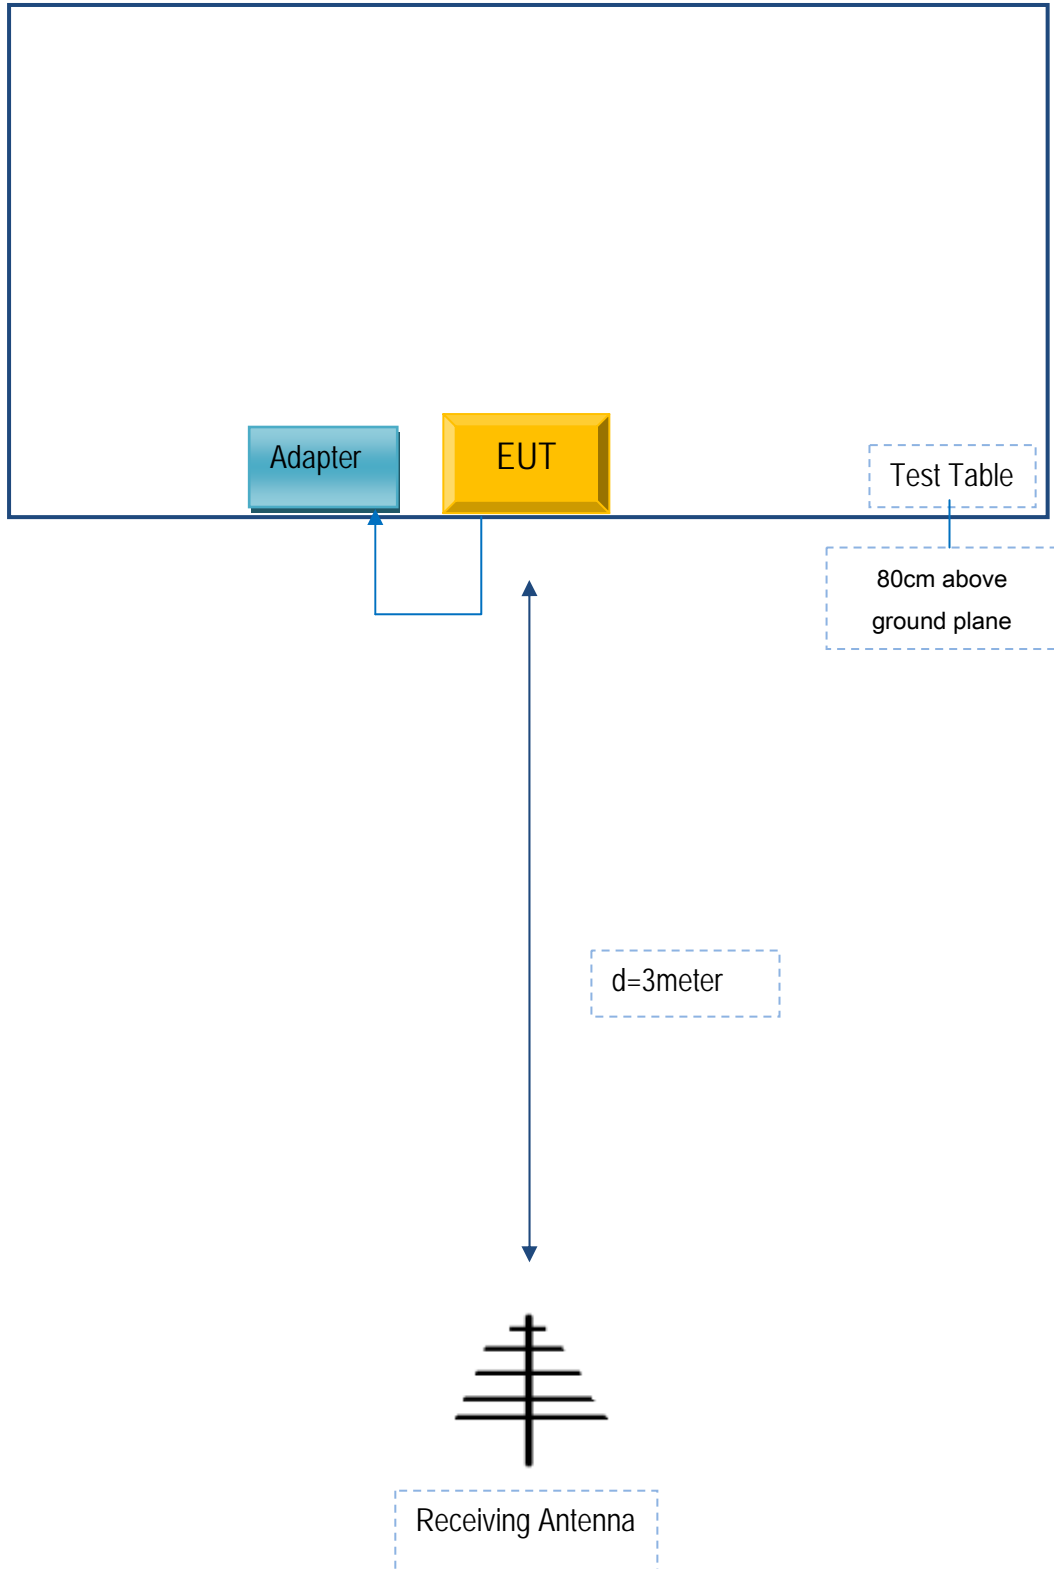

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

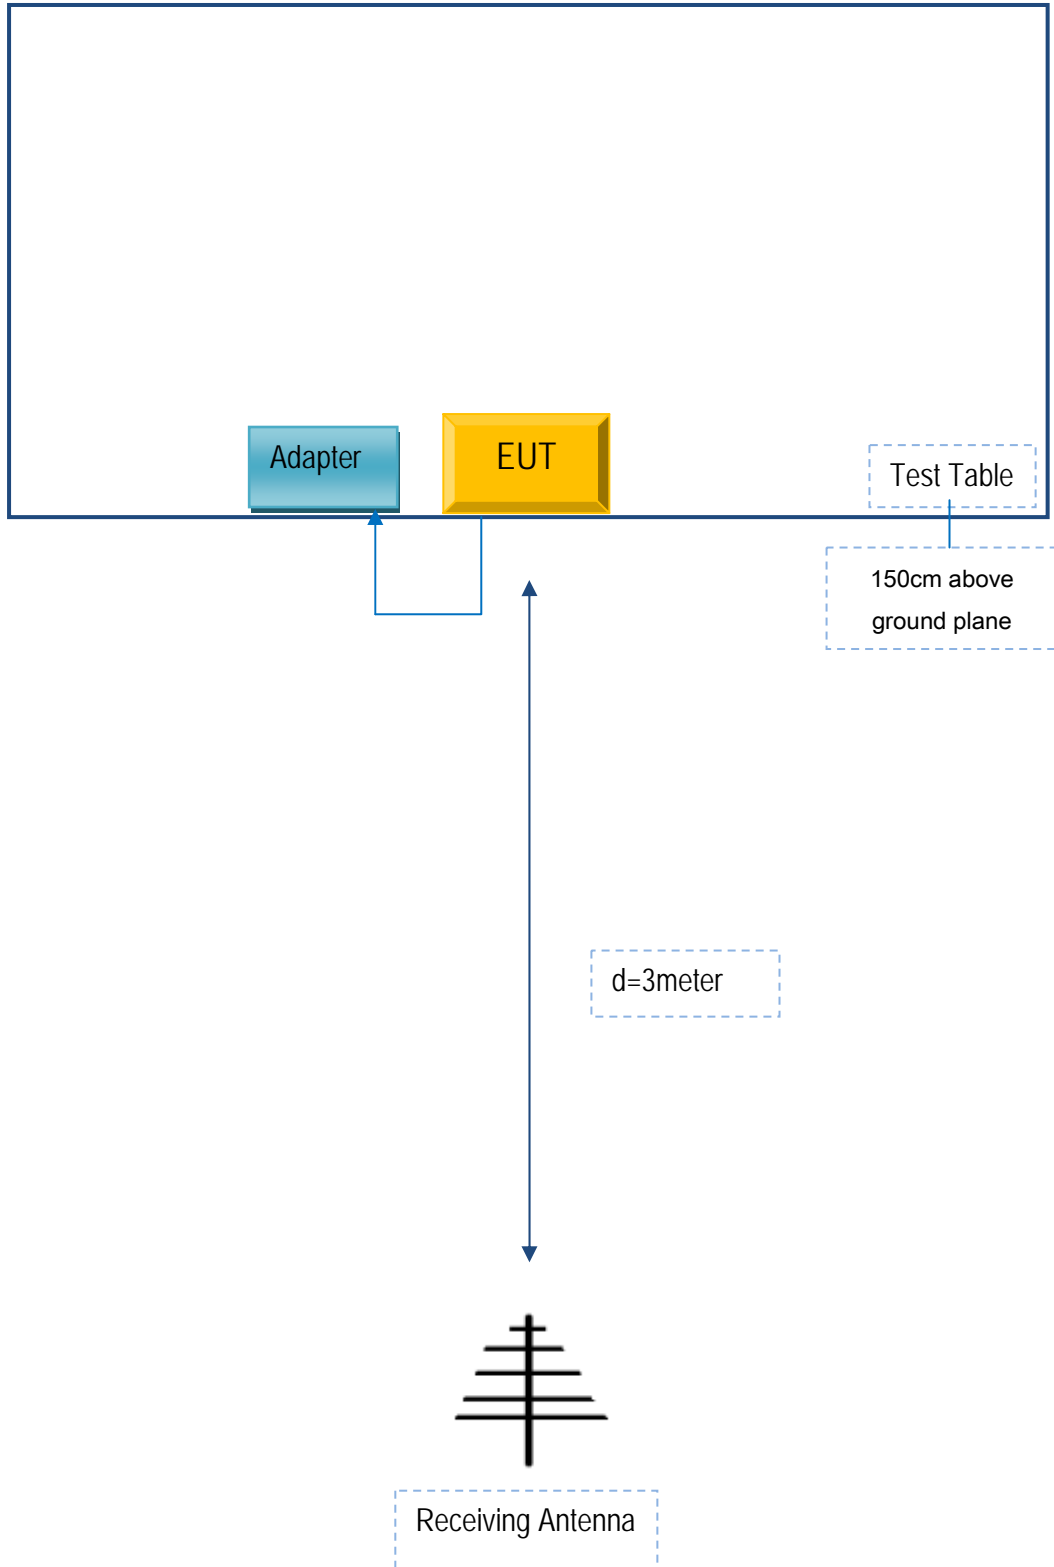

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A



Test Report	15050034-FCC-R2
Page	57 of 58

**Annex D. User Manual / Block Diagram / Schematics / Partlist**

Please see attachment

**Annex E. DECLARATION OF SIMILARITY**

b Mobile HK limited

To SIEMIC Inc  
775 Montague Expressway  
Milpitas, CA 95035.

**Statement**

We, b Mobile HK limited apply a multiple-listing certification for the below models.

Product Name: Mobile phone


Model number: AX1050/L50

FCC ID: ZSW-30-017

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model name is different for the marketing requirement.

Your assistance on this matter is highly appreciated.

Sincerely,  
Name: KA SHING LAM  
Title: Director  
Signature:

*For and on behalf of*  
**b mobile HK Limited**  
  
.....  
*Authorized Signature(s)*