

FCC PART 22H, PART 24E

TEST REPORT

For

**b mobile HK Limited**

G/F, 144 UN CHAU STREET, SHAM SHUI PO, KOWLOON, HONG KONG

**FCC ID: ZSW-W130**

<b>Report Type:</b> Original Report	<b>Product Type:</b> GSM/GPRS/EDGE/WCDMA Mobile Phone
<b>Test Engineer:</b> Jimmy Xiao	<i>Jimmy Xiao</i>
<b>Report Number:</b> RSZ120810001-00C	
<b>Report Date:</b> 2012-10-10	
<b>Reviewed By:</b> EMC Engineer	<i>Sunny Sun</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EQUIPMENT MODIFICATIONS .....6

    BLOCK DIAGRAM OF TEST SETUP .....6

**SUMMARY OF TEST RESULTS .....7**

**FCC §1.1307 & §2.1093 - RF EXPOSURE.....8**

    APPLICABLE STANDARD .....8

    TEST RESULT .....8

**FCC §2.1047 - MODULATION CHARACTERISTIC .....9**

**FCC §2.1046, §22.913 (A) & §24.232 (C) - RF OUTPUT POWER.....10**

    APPLICABLE STANDARD .....10

    TEST PROCEDURE .....10

    TEST EQUIPMENT LIST AND DETAILS.....10

    TEST DATA .....11

**FCC §2.1049, §22.917, §22.905 & §24.238 - BANDWIDTH .....15**

    APPLICABLE STANDARD .....15

    TEST PROCEDURE .....15

    TEST EQUIPMENT LIST AND DETAILS.....15

    TEST DATA .....15

**FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....23**

    APPLICABLE STANDARD .....23

    TEST PROCEDURE .....23

    TEST EQUIPMENT LIST AND DETAILS.....23

    TEST DATA .....23

**FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS .....29**

    APPLICABLE STANDARD .....29

    TEST PROCEDURE .....29

    TEST EQUIPMENT LIST AND DETAILS.....29

    TEST DATA .....30

**FCC §22.917(A) & §24.238(A) - BAND EDGES.....32**

    APPLICABLE STANDARD .....32

    TEST PROCEDURE .....32

    TEST EQUIPMENT LIST AND DETAILS.....32

    TEST DATA .....32

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY.....40**

    APPLICABLE STANDARD .....40

---

TEST PROCEDURE .....	40
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA .....	41

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *b mobile HK Limited*'s product, model number: *W130 (FCC ID: ZSW-W130)* or the "EUT" in this report is a GSM/GPRS/EDGE/WCDMA mobile phone, which was measured approximately: 11.1 cm (L) x 4.7 cm (W) x 1.6 cm (H), rated input voltage: DC 3.7 V Li-ion battery.

*\* All measurement and test data in this report was gathered from production sample serial number: 1208032 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2012-08-10.*

### Objective

This test report is prepared on behalf of *b mobile HK Limited* in accordance with Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 15B JBP submissions with FCC ID: ZSW-W130.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration


The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

### Equipment Modifications

No modification was made to the EUT.

### Block Diagram of Test Setup

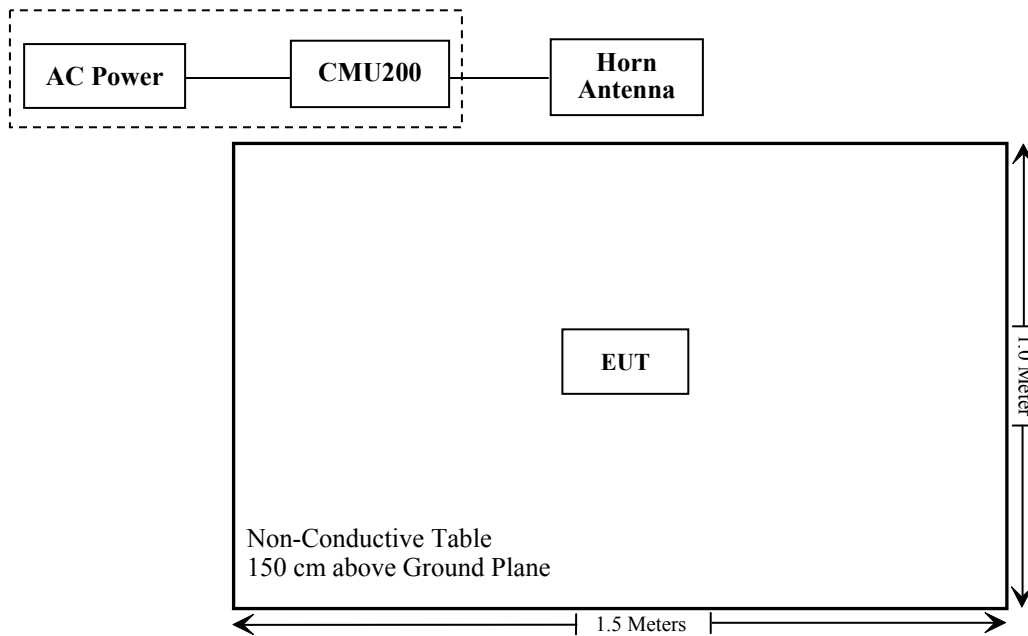

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: \* Please refer to SAR report released by BACL, report number: RSZ120810001-20.

## **FCC §1.1307 & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1307 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSZ120810001-20.



---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## FCC §2.1046, §22.913 (a) & §24.232 (c) - RF OUTPUT POWER

### Applicable Standard


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### Test Procedure

#### Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



#### Radiated method:

TIA 603-D section 2.2.17

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
HP	Synthesized Sweeper	8341B	2624A00116	2012-04-11	2013-04-10
COM POWER	Dipole Antenna	AD-100	041000	2011-09-25	2013-09-24
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2013-02-10
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-09-14.

**Conducted Power:**

## Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.70	38.45
	190	836.6	32.67	38.45
	251	848.8	32.66	38.45

Mode	Frequency (MHz)	Peak Output Power (dBm)				Limit (dBm)
		1 Slot	2 Slots	3 Slots	4 Slots	
GPRS	824.2	32.71	31.84	29.85	28.99	38.45
	836.6	32.68	31.82	29.81	28.95	38.45
	848.8	32.66	31.78	29.78	28.88	38.45

Mode	Frequency (MHz)	Peak Output Power (dBm)				Limit (dBm)
		1 Slot	2 Slots	3 Slots	4 Slots	
EGPRS (EDGE)	824.2	28.74	27.53	26.49	25.36	38.45
	836.6	28.75	27.54	26.45	25.39	38.45
	848.8	28.76	27.50	26.39	25.40	38.45

Mode	WCDMA 850		
Tx Channel	4132	4182	4233
Frequency	826.4	836.4	846.6
RMC 12.2kbps	22.67	22.69	22.43
HSDPA subtest-1	22.18	22.24	22.31
HSDPA subtest-2	22.20	22.21	22.18
HSDPA subtest-3	22.36	22.36	22.34
HSDPA subtest-4	21.99	22.01	22.09
HSUPA sbutest-1	22.32	22.29	22.36
HSUPA sbutest-2	22.17	22.31	22.29
HSUPA sbutest-3	22.30	22.34	22.40
HSUPA sbutest-4	22.21	22.25	22.37
HSUPA sbutest-5	21.83	21.99	22.39

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	30.18	33
	661	1880.0	29.99	33
	810	1909.8	29.81	33

Mode	Frequency (MHz)	Peak Output Power (dBm)				Limit (dBm)
		1 Slot	2 Slots	3 Slots	4 Slots	
GPRS	1850.2	30.18	29.24	27.22	26.31	33
	1880.0	29.99	29.07	27.05	26.09	33
	1909.8	29.82	28.90	26.86	25.92	33

Mode	Frequency (MHz)	Peak Output Power (dBm)				Limit (dBm)
		1 Slot	2 Slots	3 Slots	4 Slots	
EGPRS (EDGE)	1850.2	23.87	22.58	22.03	21.98	33
	1880.0	23.70	22.51	22.12	21.98	33
	1909.8	23.51	22.30	22.08	21.93	33

Mode	WCDMA 1900		
Tx Channel	9262	9400	9538
Frequency	1852.4	1880	1907.6
RMC 12.2kbps	22.43	22.26	22.20
HSDPA subtest-1	22.38	22.10	22.12
HSDPA subtest-2	22.25	22.07	22.07
HSDPA subtest-3	21.91	21.82	21.98
HSDPA subtest-4	22.13	22.06	21.95
HSUPA sbutest-1	22.11	22.00	22.03
HSUPA sbutest-2	21.88	21.93	21.85
HSUPA sbutest-3	21.98	21.86	21.76
HSUPA sbutest-4	22.17	22.07	22.03
HSUPA sbutest-5	21.86	22.01	21.95

**Radiated Power:****GSM Mode:**

## ERP for Cellular Band (Part 22H)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBd)	Cable Loss (dB)	Absolute Level (dBm)	Part 22H Limit (dBm)
Frequency (MHz)	S.A. Reading (dB $\mu$ V)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Middle Channel											
836.6	98.65	210	1.8	H	836.6	28.6	H	0	0.67	27.93	38.45
836.6	103.10	150	1.2	V	836.6	32.7	V	0	0.67	32.03	38.45

## EIRP for PCS Band (Part 24E)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Part 24E Limit (dBm)
Frequency (MHz)	S.A. Reading (dB $\mu$ V)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Low Channel											
1850	86.16	160	1.9	H	1850	15.1	H	9.40	1.03	23.47	33
1850	88.37	220	1.1	V	1850	20.5	V	9.40	1.03	28.87	33

**EGPRS (EDGE) Mode:**

## ERP for Cellular Band (Part 22H)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBd)	Cable Loss (dB)	Absolute Level (dBm)	Part 22H Limit (dBm)
Frequency (MHz)	S.A. Reading (dB $\mu$ V)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Middle Channel											
849	93.47	150	1.8	H	849	23.2	H	0	0.67	22.53	38.45
849	98.46	250	1.4	V	849	28.3	V	0	0.67	27.63	38.45

## EIRP for PCS Band (Part 24E)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Part 24E Limit (dBm)
Frequency (MHz)	S.A. Reading (dB $\mu$ V)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Low Channel											
1850	81.25	250	2.1	H	1850	10.3	H	9.40	1.03	18.67	33
1850	83.25	140	1.8	V	1850	15.2	V	9.40	1.03	23.57	33

**WCDMA Mode:**

ERP for Cellular Band (Part 22H)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBd)	Cable Loss (dB)	Absolute Level (dBm)	Part 22H Limit (dBm)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Middle Channel											
836.6	89.46	210	1.8	H	836.6	19.3	H	0	0.67	18.63	38.45
836.6	94.35	150	1.2	V	836.6	23.8	V	0	0.67	23.13	38.45

EIRP for PCS Band (Part 24E)

Indicated		Table Angle Degree	Test Antenna		Substituted			Antenna Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Part 24E Limit (dBm)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Ant. Polar (H/V)				
Low Channel											
1852.4	76.35	230	1.9	H	1852.4	4.9	H	9.40	1.03	13.27	33
1852.4	84.29	180	1.5	V	1852.4	15.4	V	9.40	1.03	23.77	33

## FCC §2.1049, §22.917, §22.905 & §24.238 - BANDWIDTH


### Applicable Standard

FCC §2.1049, §22.917, §22.905 and §24.238.

### Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) and the 26 dB & 99% bandwidth was recorded.

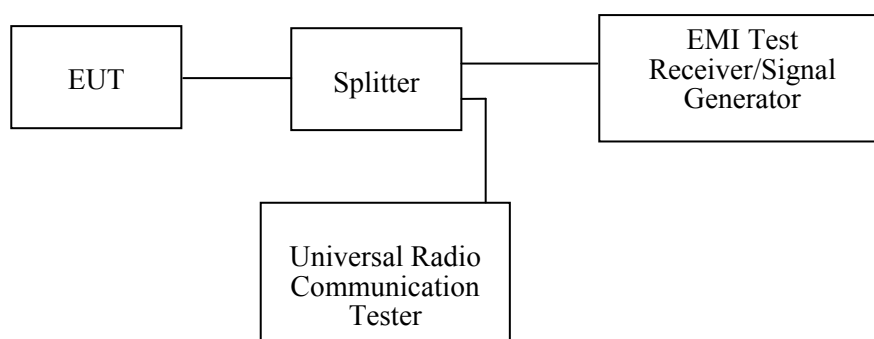

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24~25 °C
<b>Relative Humidity:</b>	55~56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jimmy Xiao from 2012-08-14 to 2012-10-10.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following tables and plots.*

Cellular Band (Part 22H)

GMSK Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM	190	836.6	246.5	314.6

8PSK Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
EGPRS (EDGE)	190	836.6	244.5	308.6

WCDMA Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
WCDMA	4182	836.6	4.184	4.681

PCS Band (Part 24E)

GMSK Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM	661	1880.0	246.5	322.6

8PSK Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
EGPRS (EDGE)	661	1880.0	246.5	318.6


WCDMA Modulation:

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
WCDMA	9400	1880.0	4.168	4.697




Cellular Band (Part 22H)


99% Occupied Bandwidth for GMSK

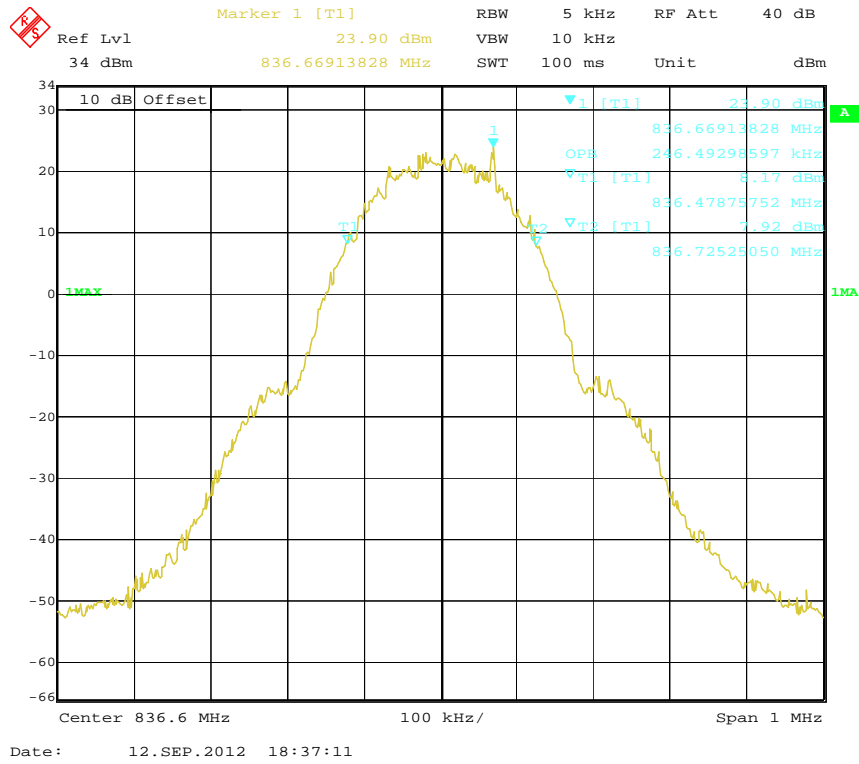


26 dB Bandwidth for GMSK

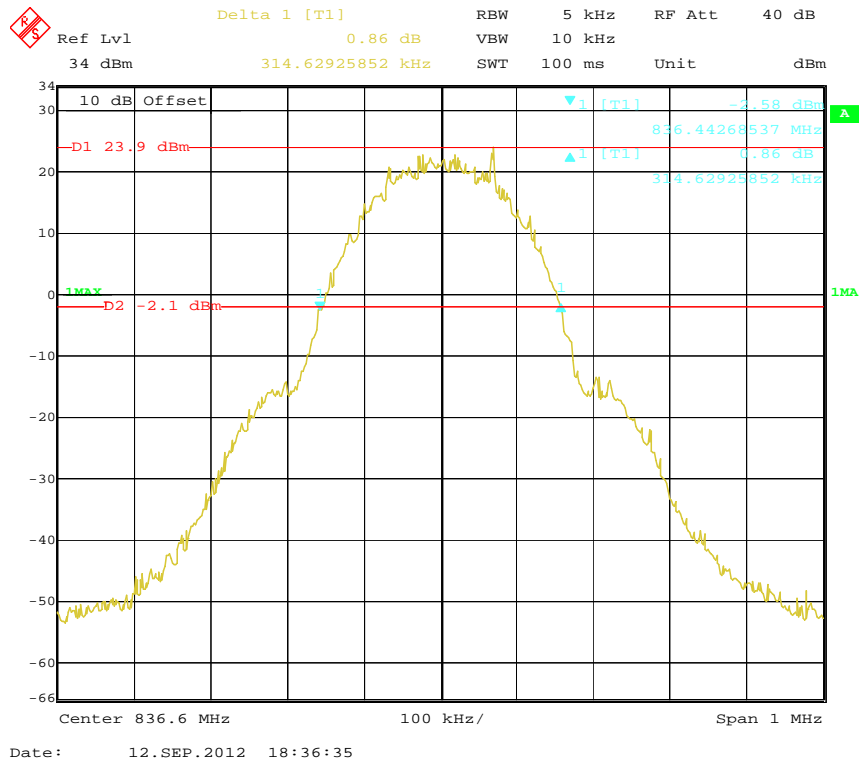


### 99% Occupied Bandwidth for 8PSK

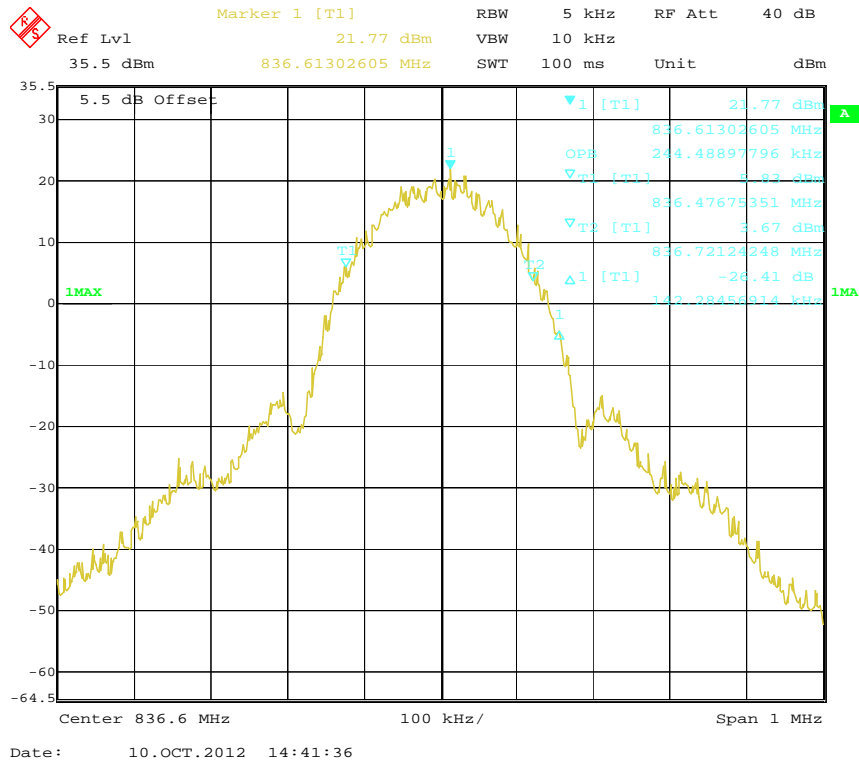


### 26 dB Bandwidth for 8PSK

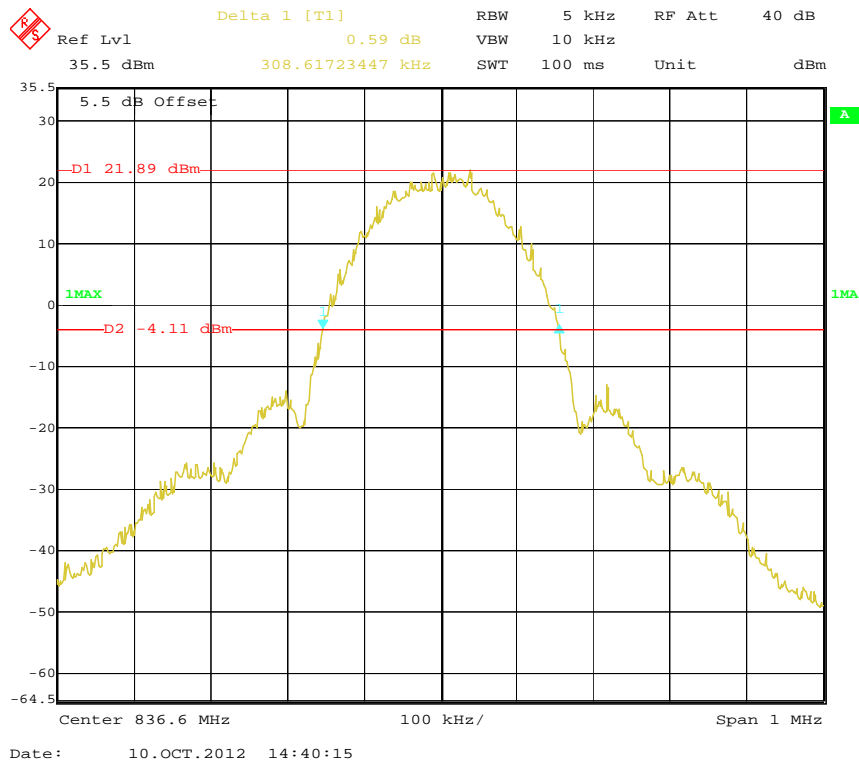

### 99% Occupied Bandwidth for WCDMA

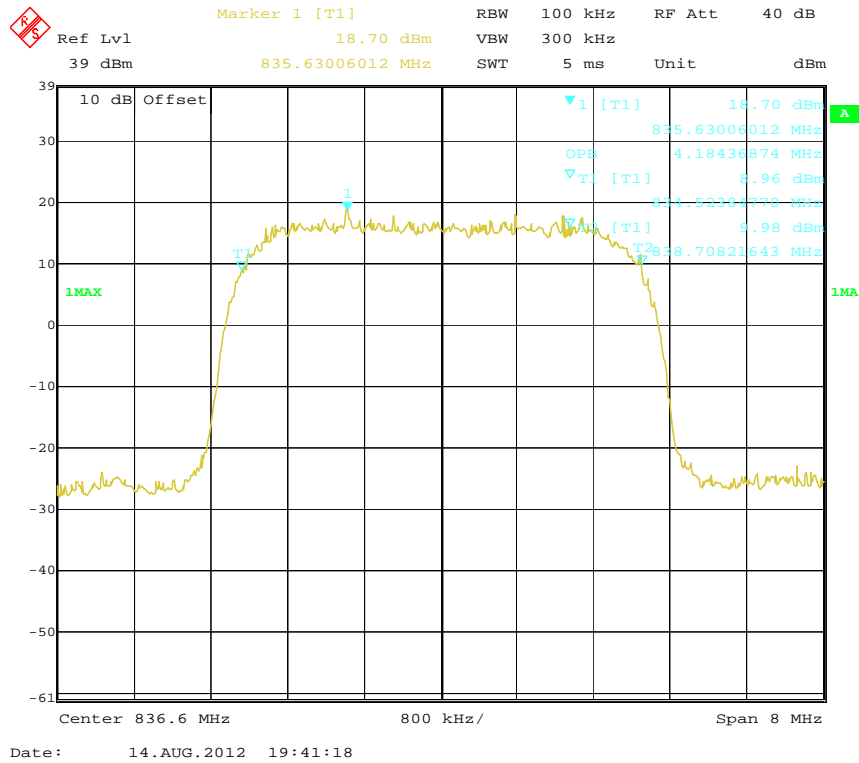


### 26 dB Bandwidth for WCDMA

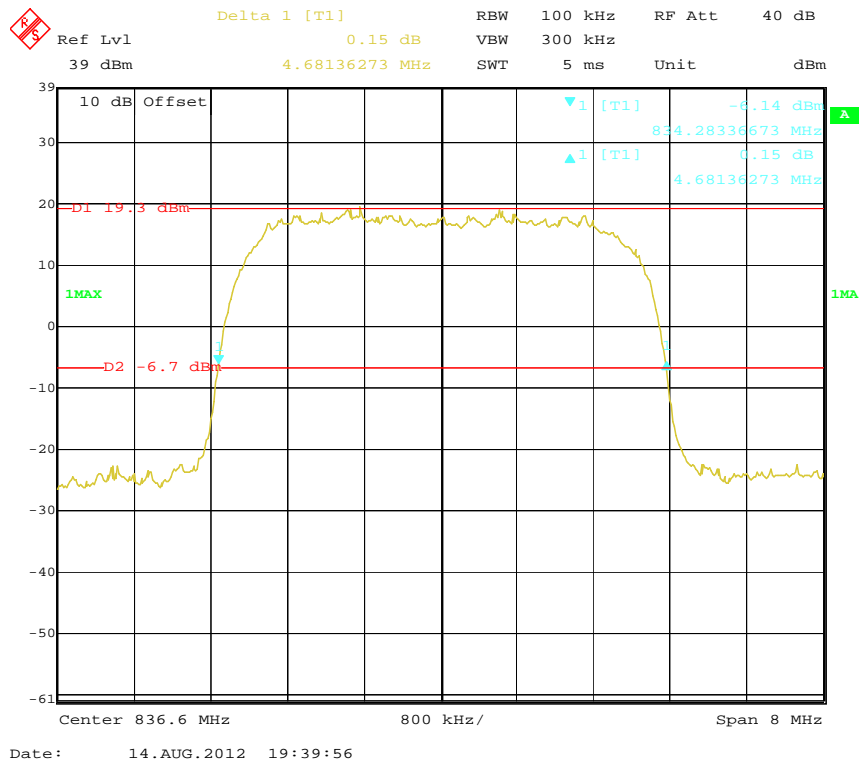


PCS Band (Part 24E)


99% Occupied Bandwidth for GMSK

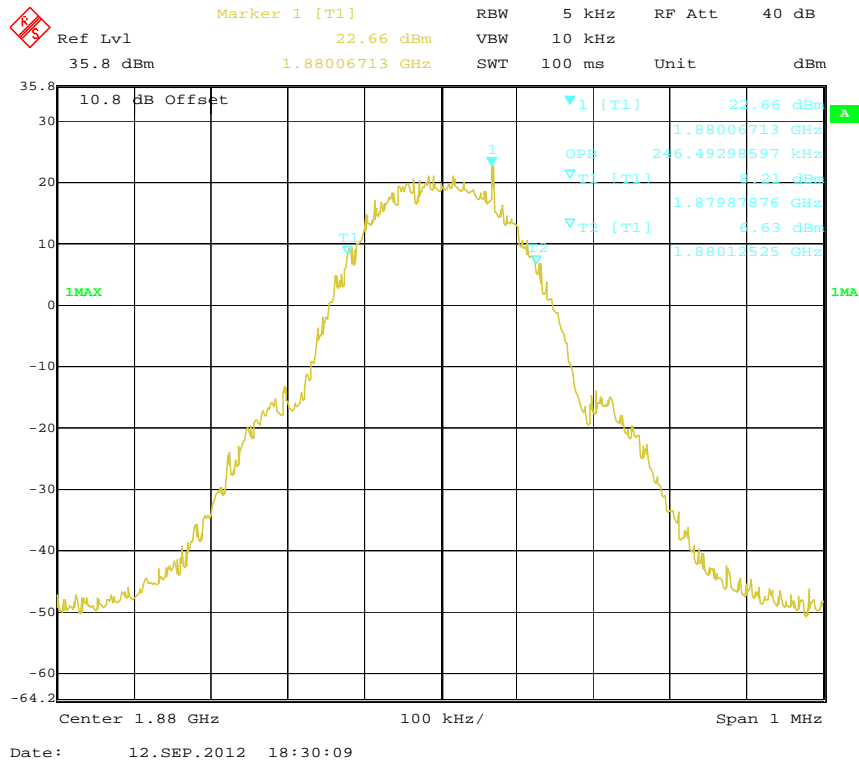


26 dB Bandwidth for GMSK

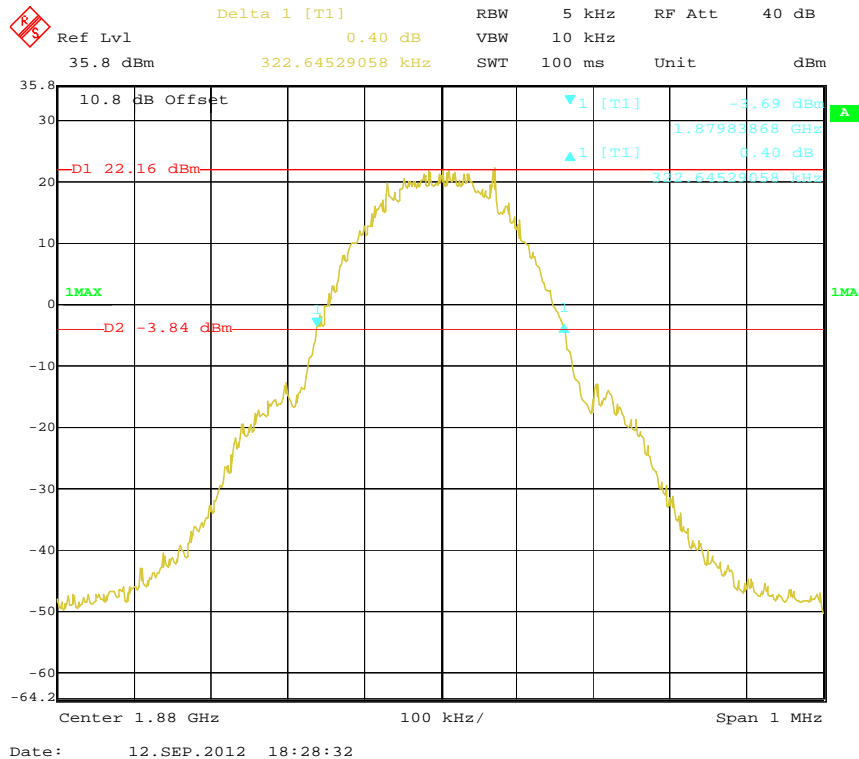


### 99% Occupied Bandwidth for 8PSK

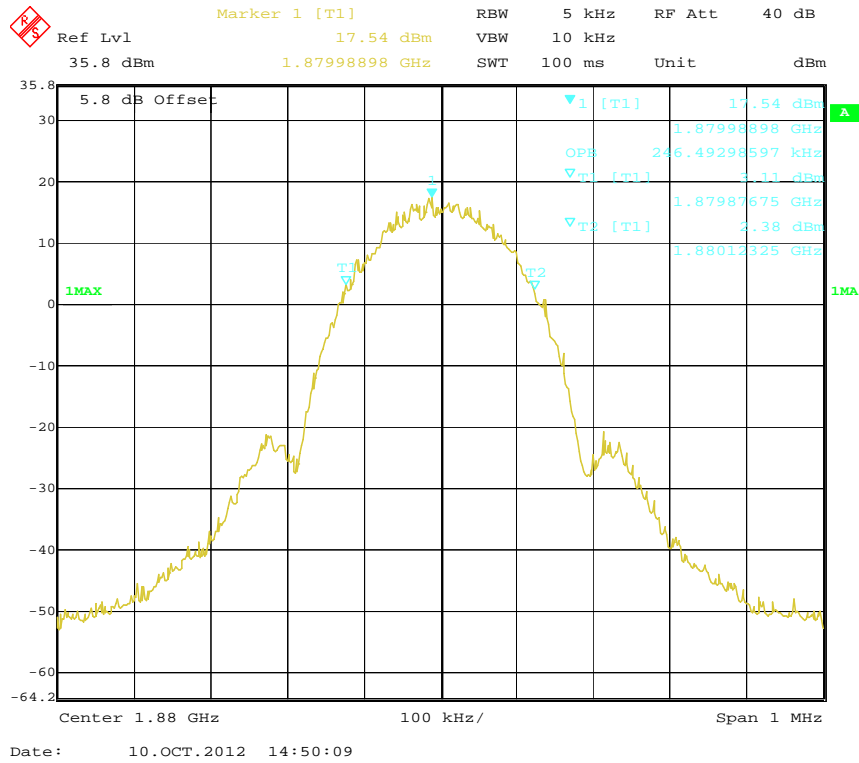


### 26 dB Bandwidth for 8PSK

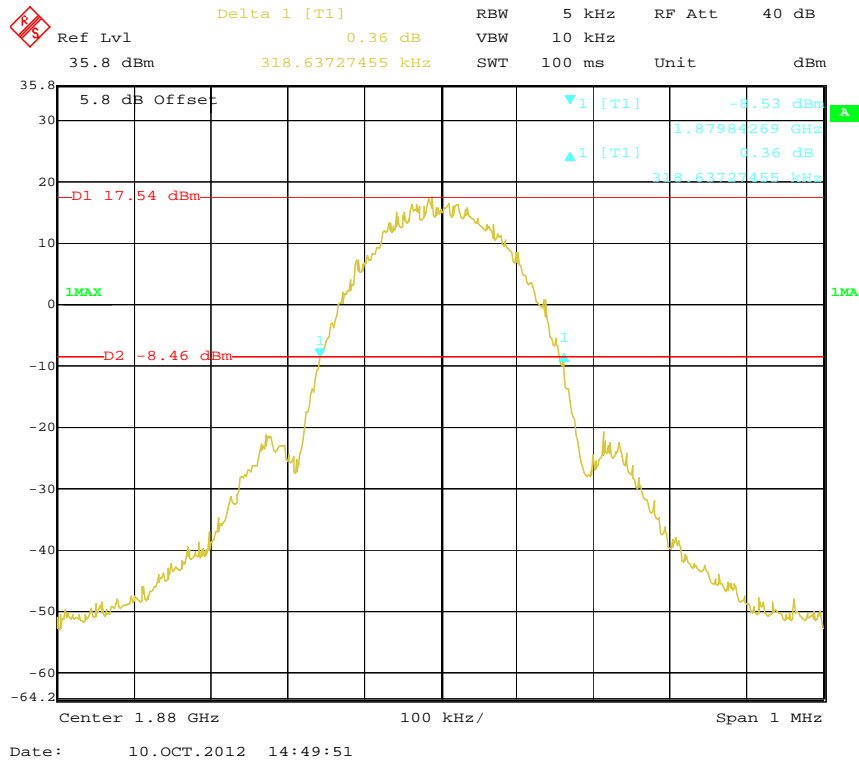

### 99% Occupied Bandwidth for WCDMA

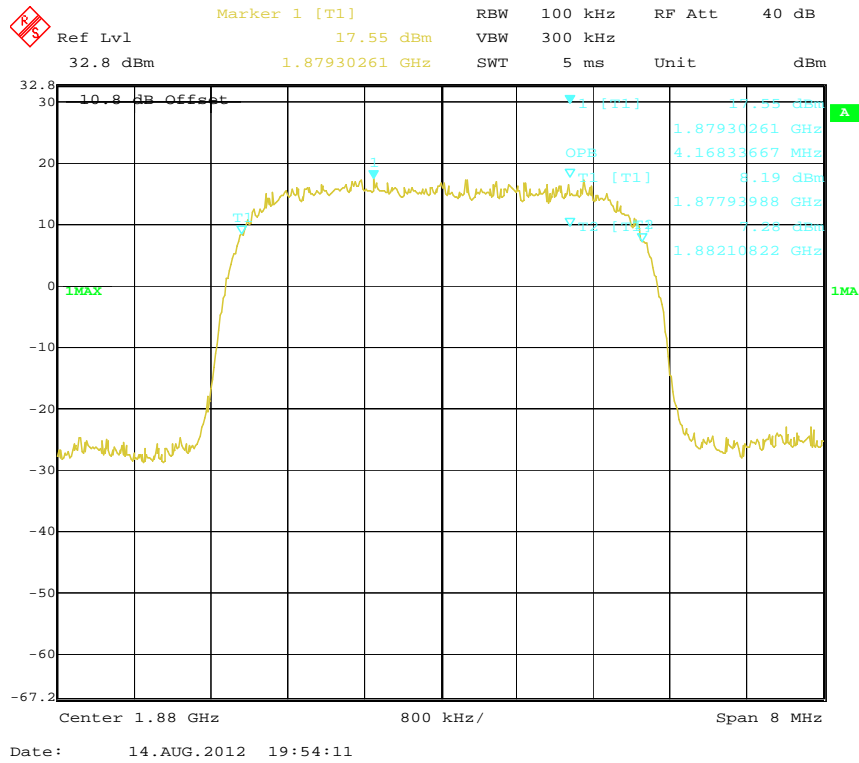

### 26 dB Bandwidth for WCDMA

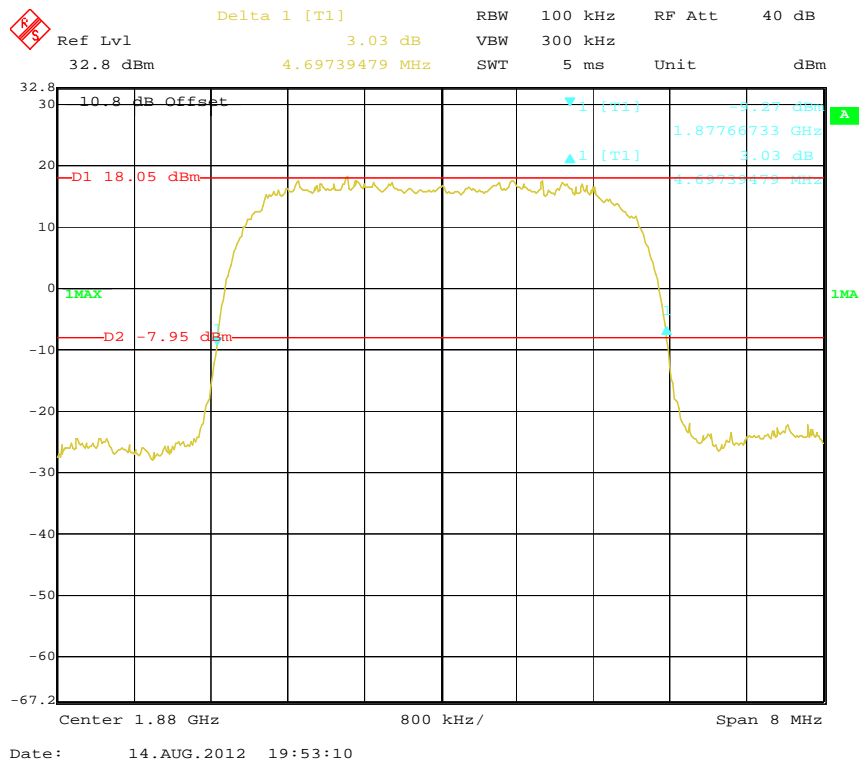


## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a). The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz for frequency above 1 GHz (100 kHz for frequency below 1 GHz) . Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

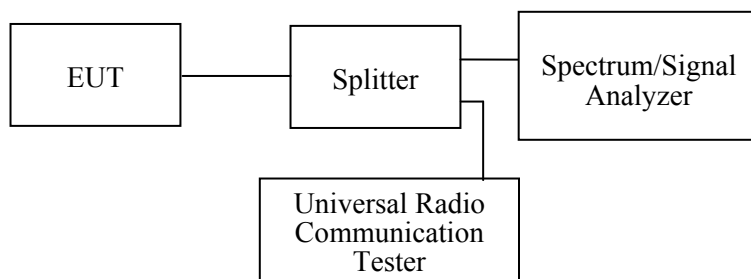

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Wainwright Germany	Band Reject Filter	WRCG1850/1910-1835/1925-40/8SS	22	-	-
Wainwright Germany	Band Reject Filter	WRCG823/850-813/860-40/8SS	7	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	55~56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jimmy Xiao on 2012-08-13 and 2012-08-14.

Please refer to the following plots.


### Cellular Band (Part 22H)

GSM Mode:

#### 30 MHz – 1 GHz - Middle Channel

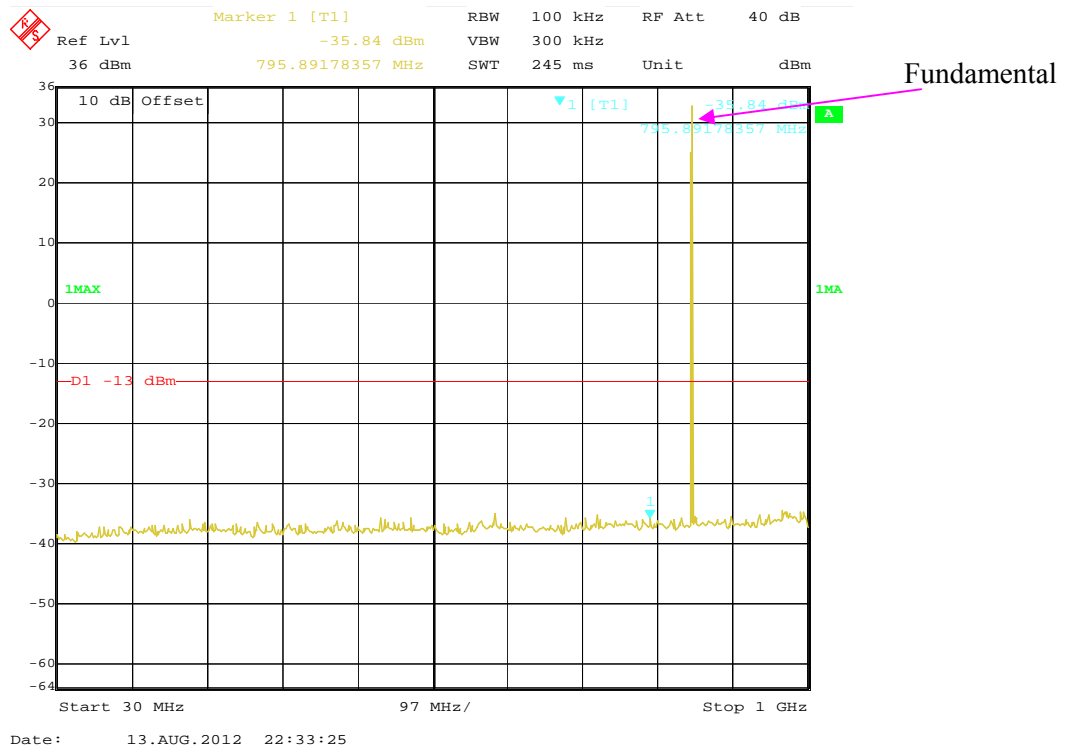


#### 1 GHz – 10 GHz - Middle Channel

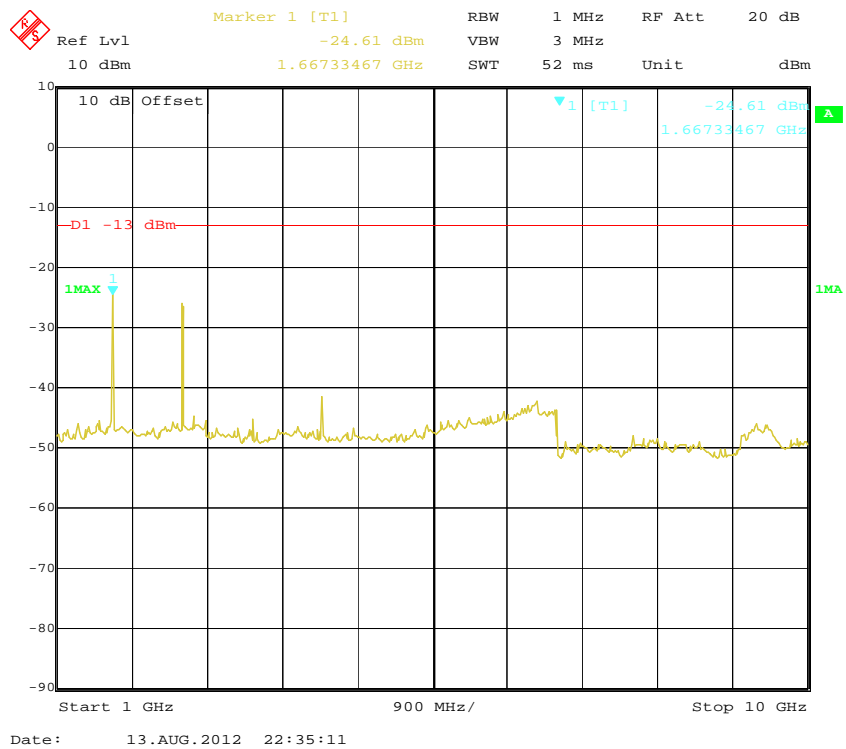




**WCDMA Mode:**

**30 MHz – 1 GHz - Middle Channel**

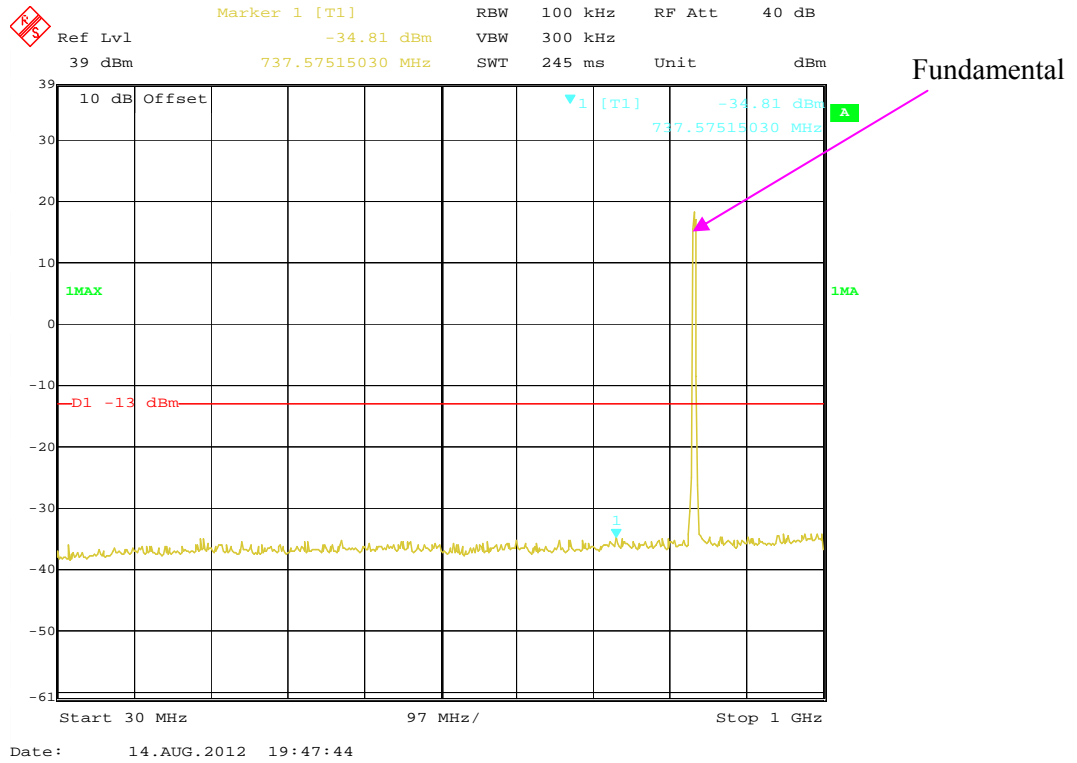


**1 GHz – 10 GHz - Middle Channel**

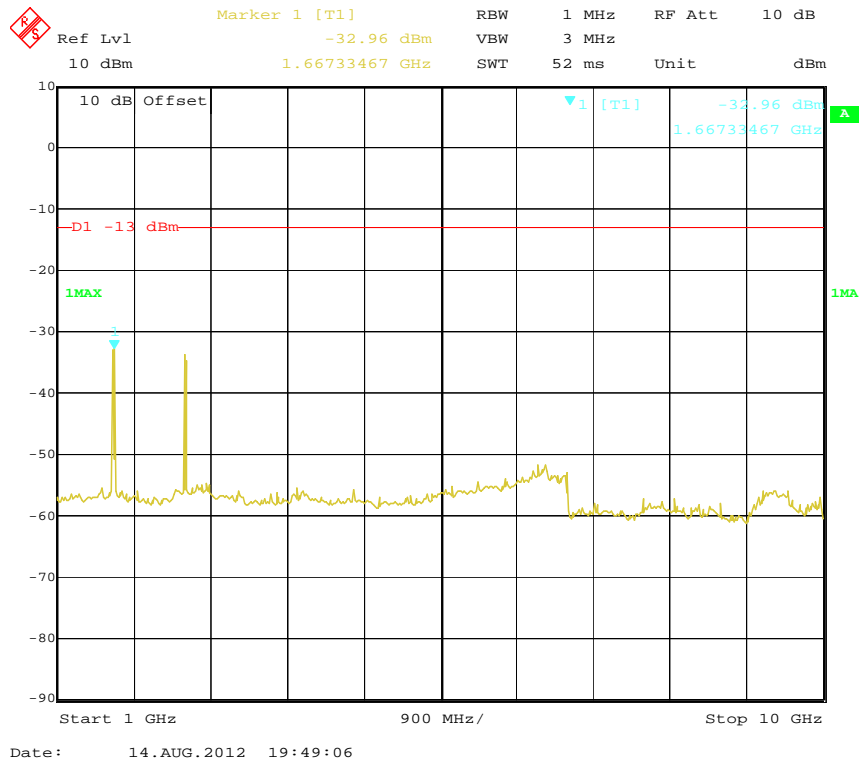


PCS Band (Part 24E)

GSM Mode:


30 MHz – 1 GHz - Middle Channel

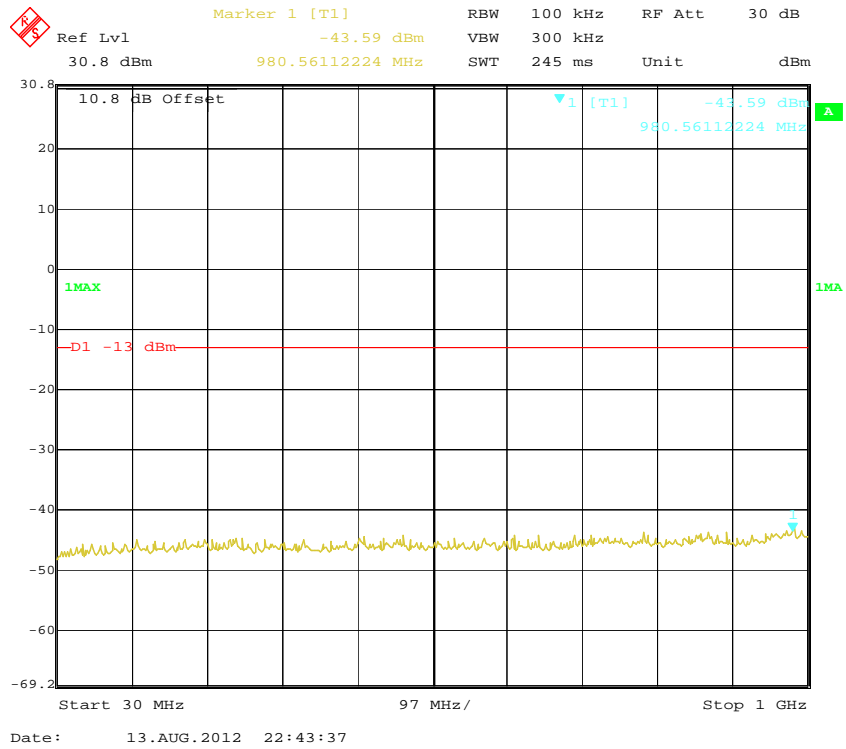

1 GHz – 2 GHz - Middle Channel

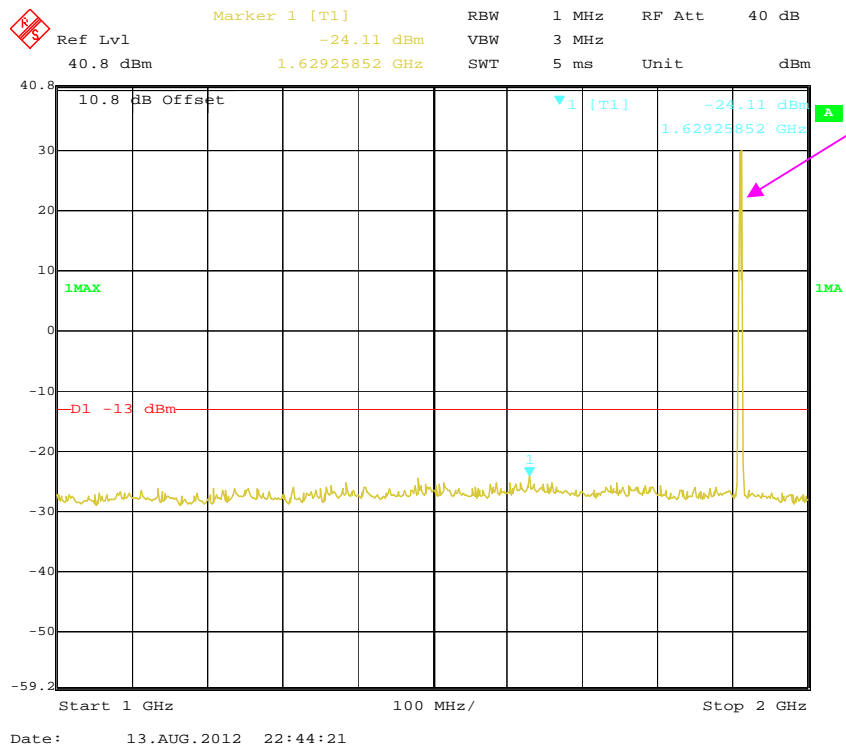


2 GHz – 20 GHz - Middle Channel

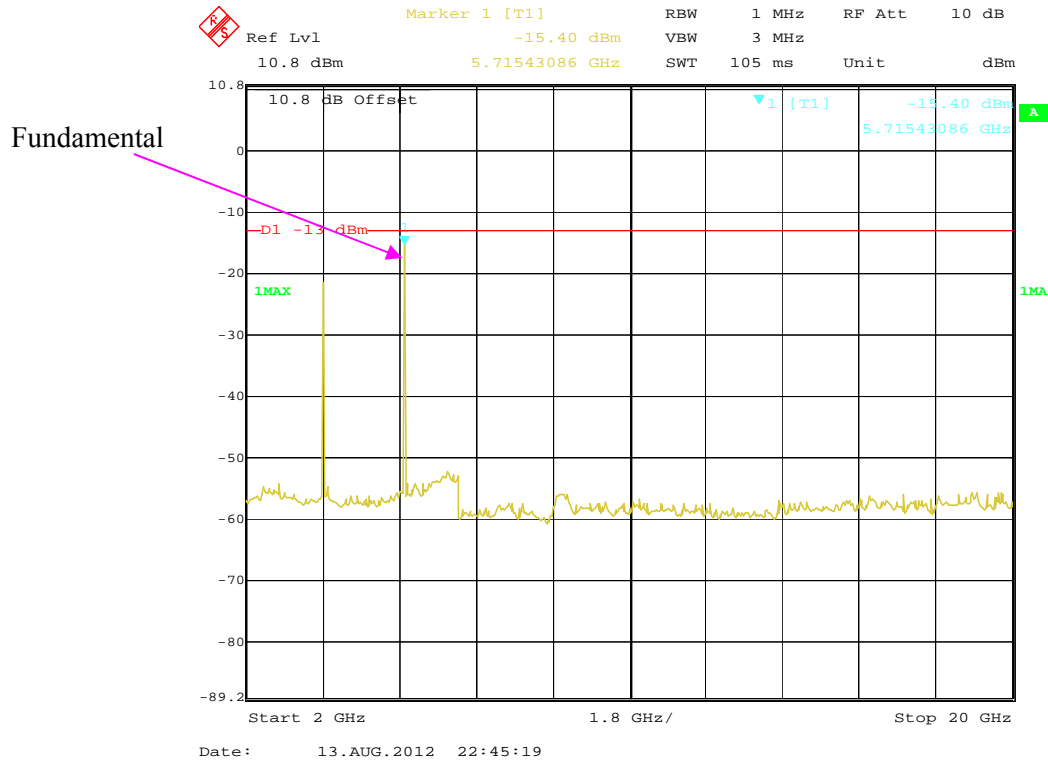


WCDMA Mode:

30 MHz – 1 GHz - Middle Channel

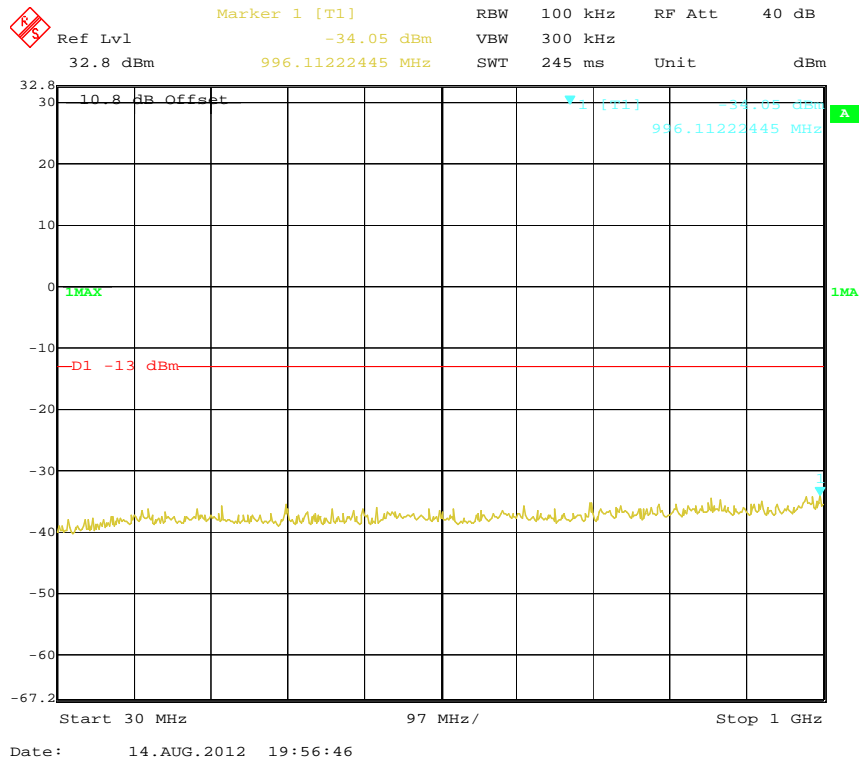


### 1 GHz – 2 GHz - Middle Channel

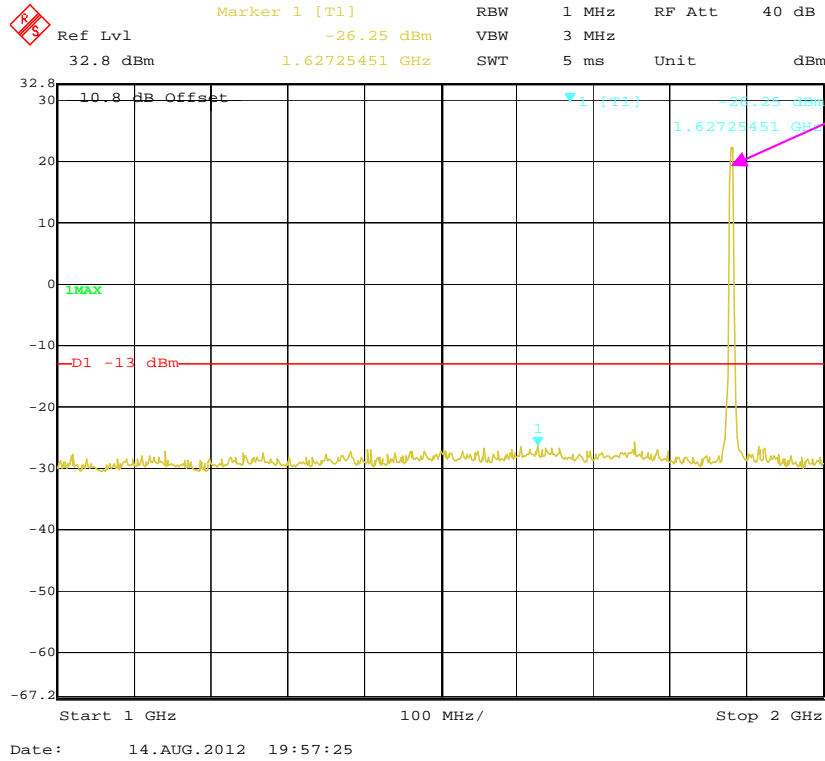

Fundamental

### 2 GHz – 20 GHz - Middle Channel

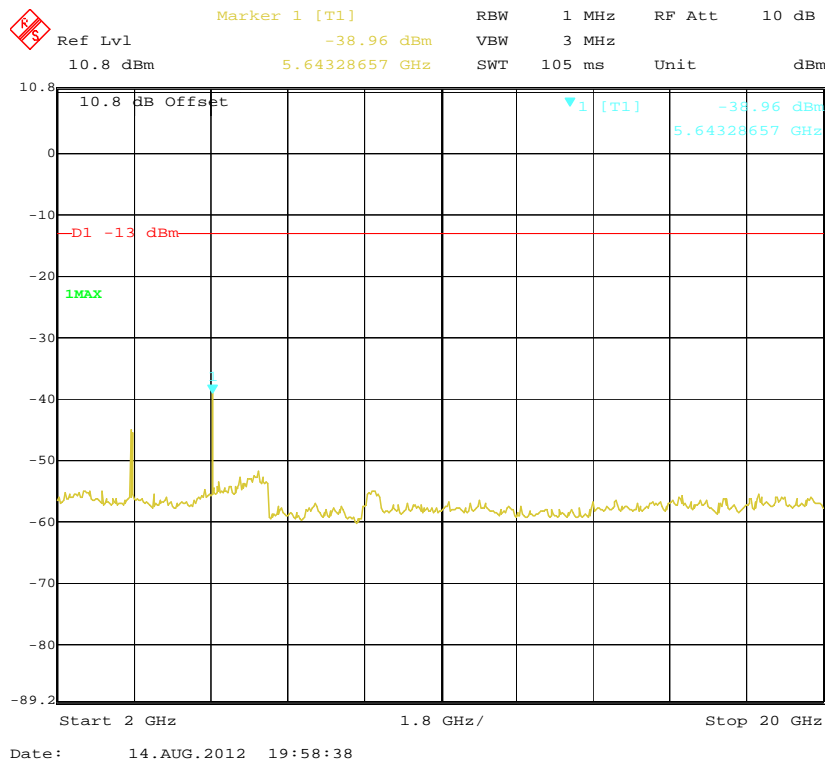

## FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

### Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log<sub>10</sub> (power out in Watts)

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
HP	Amplifier	HP8447D	2944A09795	2011-11-24	2012-11-23
HP	Synthesized Sweeper	8341B	2624A00116	2012-04-11	2013-04-10
COM POWER	Dipole Antenna	AD-100	041000	2011-09-25	2013-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2013-02-10
Electro-Mechanics	Horn Antenna	3116	9510-2270	2011-10-14	2012-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

The testing was performed by Jimmy Xiao on 2012-09-14.

EUT operation mode: Transmitting (worst case)

**30 MHz ~ 10 GHz:**

## Cellular Band (Part 22H) for GSM mode

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
1673.2	53.92	112	1.9	V	-46.5	0.97	9.40	-38.07	-13	25.07
2509.8	52.95	332	1.6	H	-47.8	1.46	10.70	-38.56	-13	25.56
1673.2	56.06	58	1.8	H	-47.0	0.97	9.40	-38.57	-13	25.57
2509.8	46.91	241	1.8	V	-49.5	1.46	10.70	-40.26	-13	27.26
3346.4	42.64	116	1.7	H	-51.8	2.08	10.80	-43.08	-13	30.08
3346.4	40.26	87	1.8	V	-53.3	2.08	10.80	-44.58	-13	31.58

## Cellular Band (Part 22H) for WCDMA mode

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
2509.8	38.02	335	1.6	V	-58.3	1.46	10.70	-49.06	-13	36.06
3346.4	35.22	48	1.7	H	-59.2	2.08	10.80	-50.48	-13	37.48
3346.4	34.31	118	1.8	V	-59.3	2.08	10.80	-50.58	-13	37.58
1673.2	39.77	115	1.5	V	-60.7	0.97	9.40	-52.27	-13	39.27
2509.8	37.73	24	1.5	H	-63.0	1.46	10.70	-53.76	-13	40.76
1673.2	34.19	87	1.9	H	-68.8	0.97	9.40	-60.37	-13	47.37

**30 MHz ~ 20 GHz:**

## PCS Band (Part 24E) for GSM mode

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Turn Table	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
3700	54.05	78	1.6	H	-42.9	2.96	10.40	-35.46	-13	22.46
7400	41.56	116	1.6	H	-46.7	3.07	12.00	-37.77	-13	24.77
3700	50.31	115	1.8	V	-45.9	2.96	10.40	-38.46	-13	25.46
5550	41.69	38	1.8	H	-50.7	3.94	11.70	-42.94	-13	29.94
5550	38.97	93	1.7	V	-52.2	3.94	11.70	-44.44	-13	31.44
7400	33.98	28	1.8	V	-55.4	3.07	12.00	-46.47	-13	33.47

## PCS Band (Part 24E) for WCDMA mode

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Turn Table	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
5557.2	45.73	13	1.7	H	-46.7	3.94	11.70	-38.94	-13	25.94
5557.2	41.17	115	1.6	V	-50.0	3.94	11.70	-42.24	-13	29.24
7409.6	35.12	38	1.7	H	-53.1	3.07	12.00	-44.17	-13	31.17
3704.8	41.43	135	1.8	V	-54.7	2.96	10.40	-47.26	-13	34.26
7409.6	32.87	78	1.8	V	-56.5	3.07	12.00	-47.57	-13	34.57
3704.8	40.44	22	1.6	H	-56.5	2.96	10.40	-49.06	-13	36.06

## FCC §22.917(a) & §24.238(a) - BAND EDGES

### Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 3 kHz.

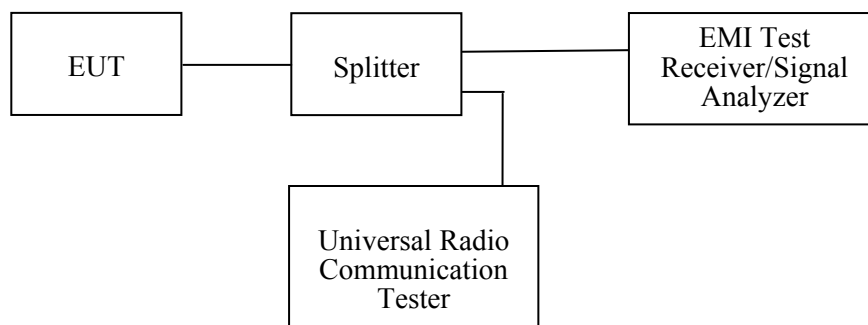

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24~25 °C
<b>Relative Humidity:</b>	55~56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jimmy Xiao from 2012-08-14 to 2012-10-10.*



*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following tables and plots.*

Cellular Band (Part 22H)

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
GSM	823.978	-15.38	≤-13
	849.018	-15.05	≤-13

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
EGPRS (EDGE)	823.998	-16.40	≤-13
	849.010	-15.04	≤-13

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
WCDMA	823.990	-15.43	≤-13
	849.010	-15.43	≤-13


PCS Band (Part 24E)

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
GSM	1849.982	-20.54	≤-13
	1910.022	-18.25	≤-13


Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
EGPRS (EDGE)	1849.978	-23.43	≤-13
	1910.026	-25.86	≤-13

Mode	Frequency (MHz)	Emission (dBm)	Limit (dBm)
WCDMA	1849.990	-20.55	≤-13
	1910.010	-16.49	≤-13


### Cellular Band, Left Band Edge for GSM Mode

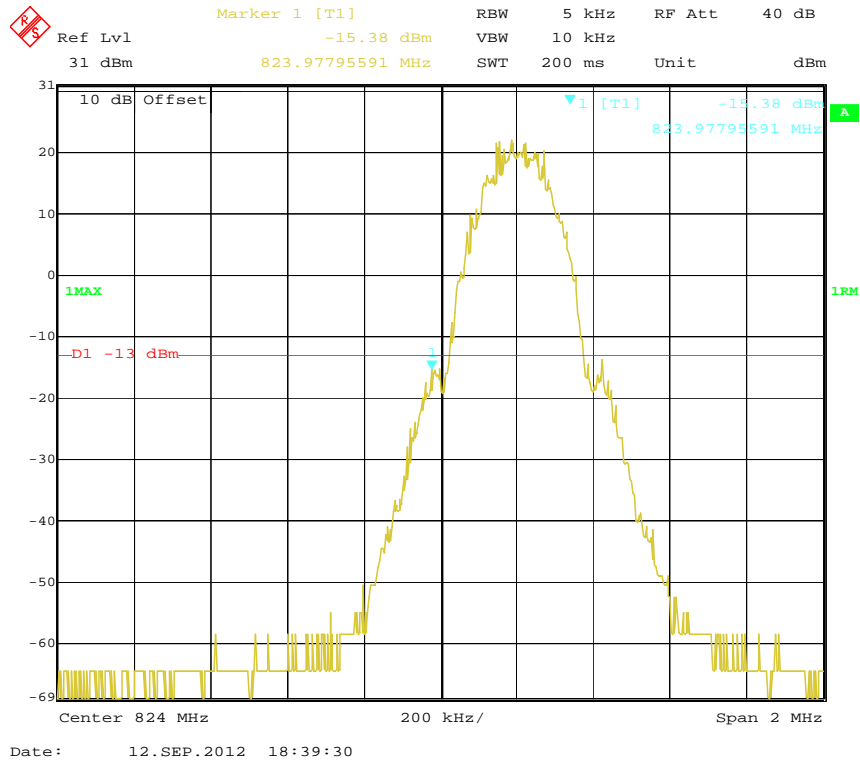


### Cellular Band, Right Band Edge for GSM Mode

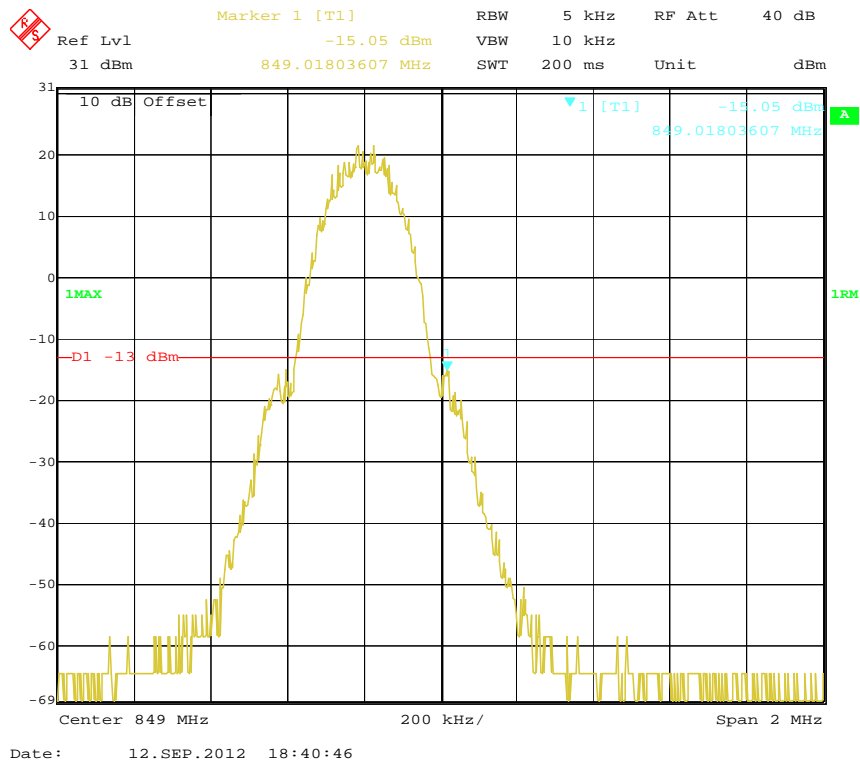


### Cellular Band, Left Band Edge for EGPRS (EDGE) Mode

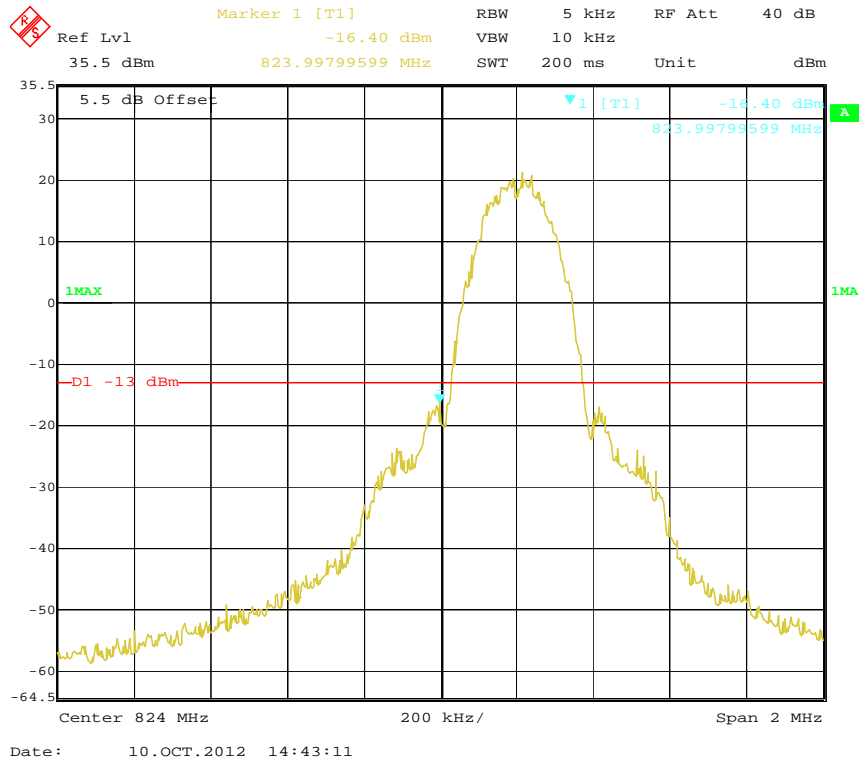


### Cellular Band, Right Band Edge for EGPRS (EDGE) Mode

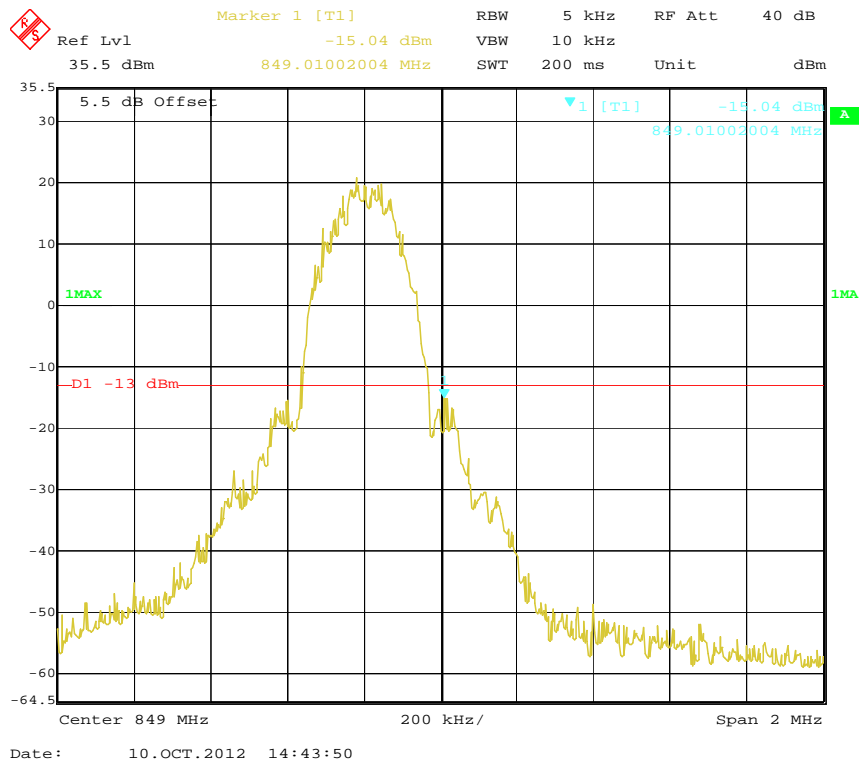


### Cellular Band, Left Band Edge for WCDMA Mode

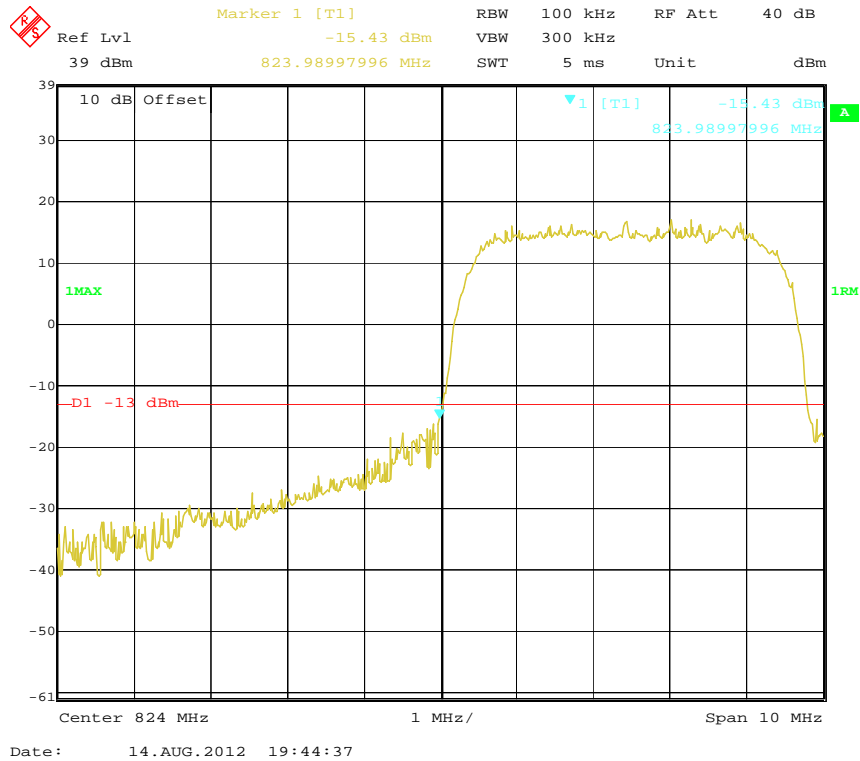


### Cellular Band, Right Band Edge for WCDMA Mode

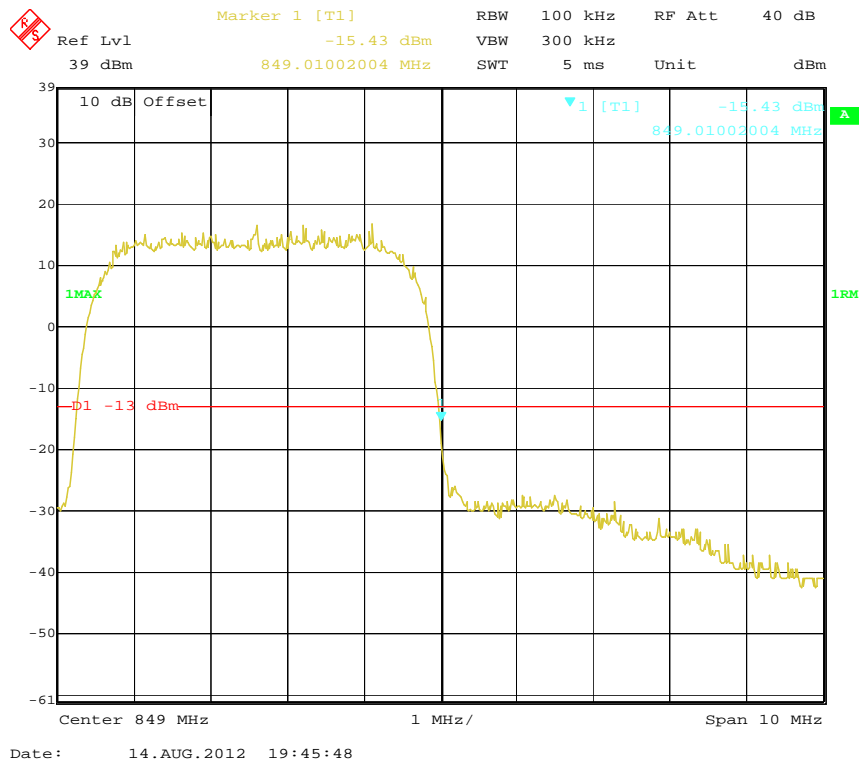


**PCS Band, Left Band Edge for GSM Mode**

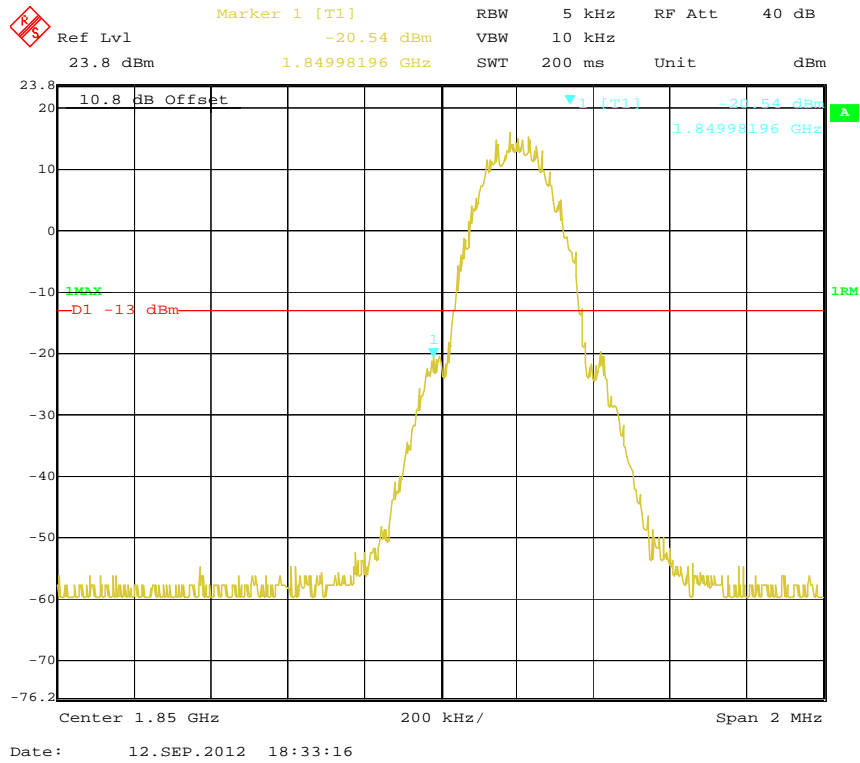


**PCS Band, Right Band Edge for GSM Mode**

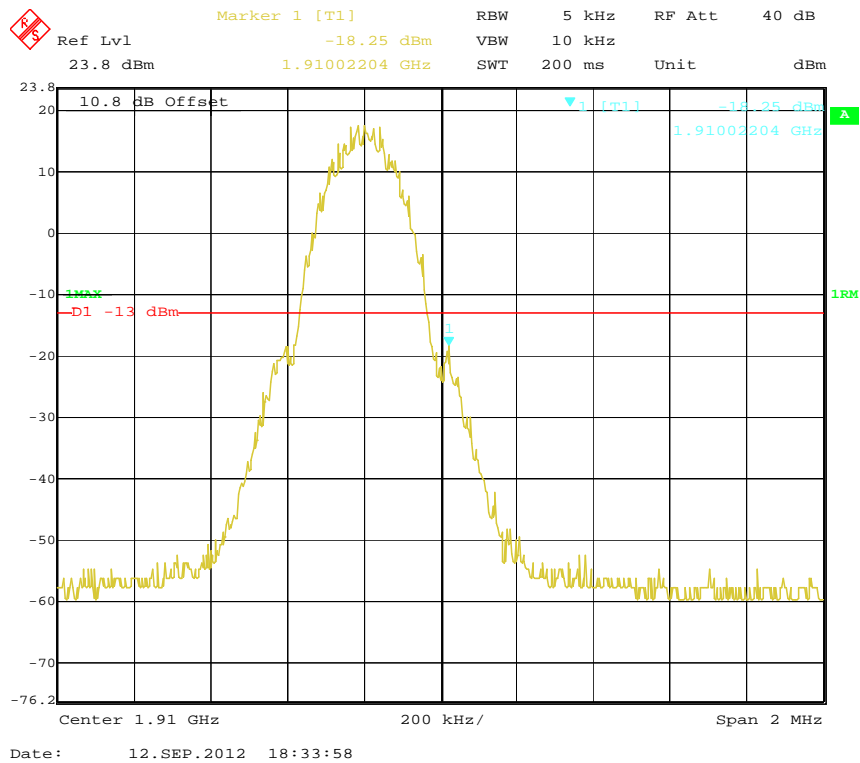


**PCS Band, Left Band Edge for EGPRS (EDGE) Mode**

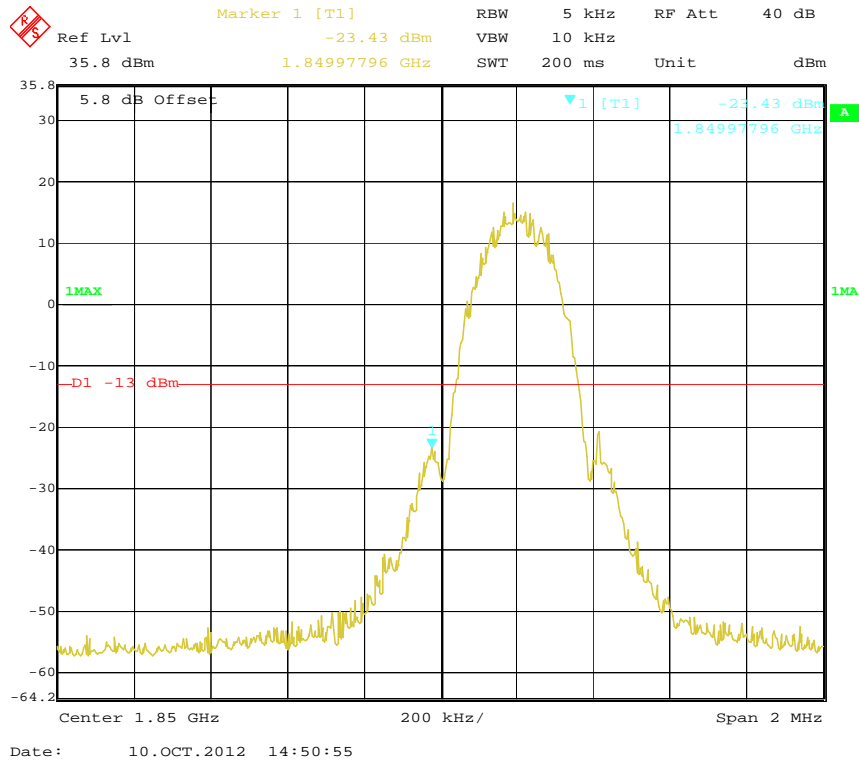


**PCS Band, Right Band Edge for EGPRS (EDGE) Mode**

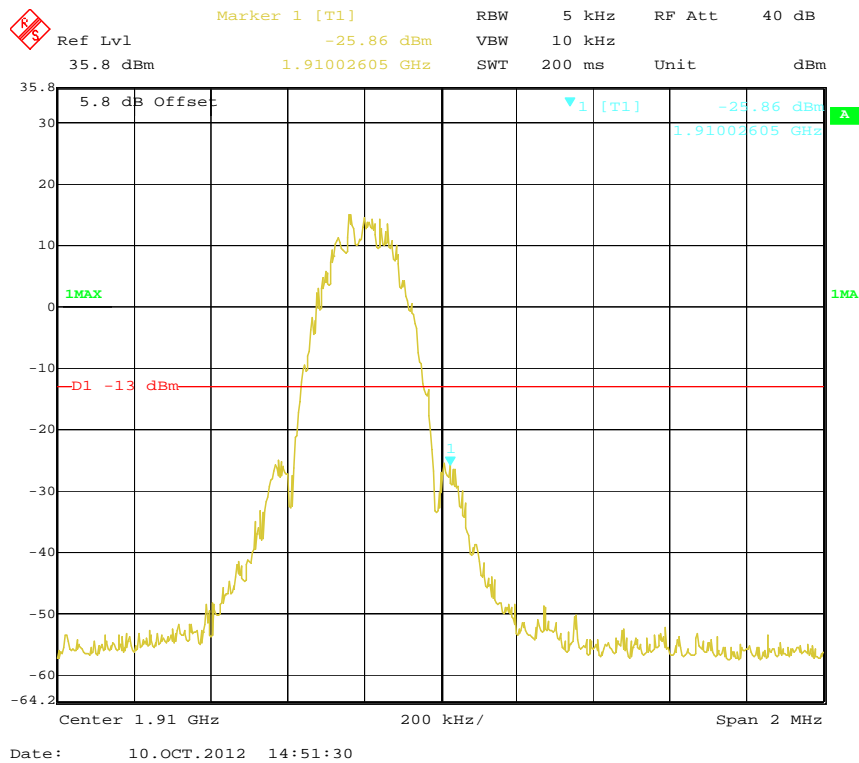

**PCS Band, Left Band Edge for WCDMA Mode**

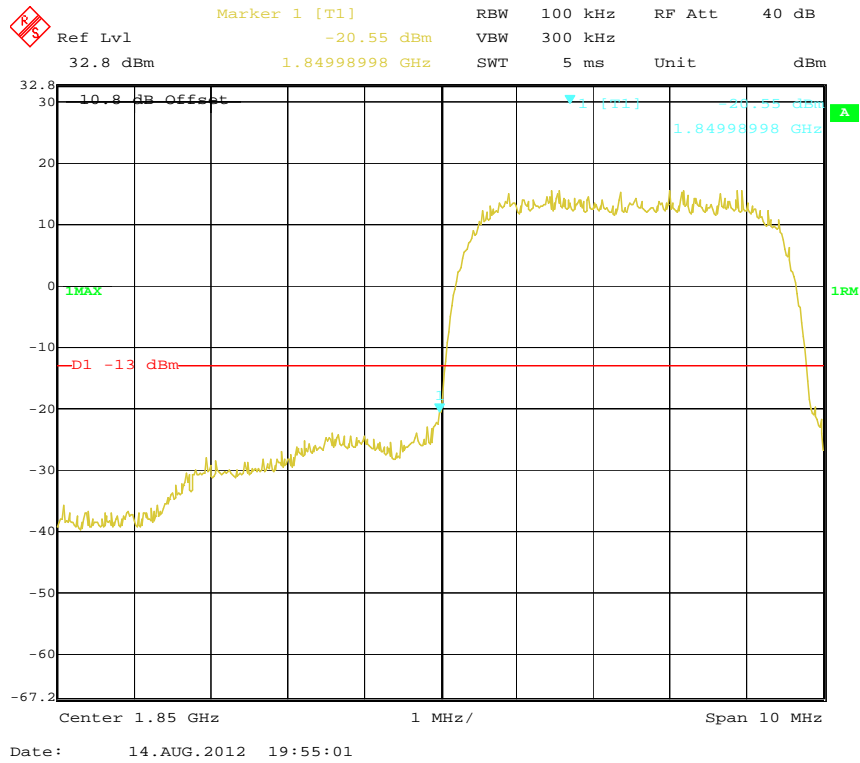

**PCS Band, Right Band Edge for WCDMA Mode**

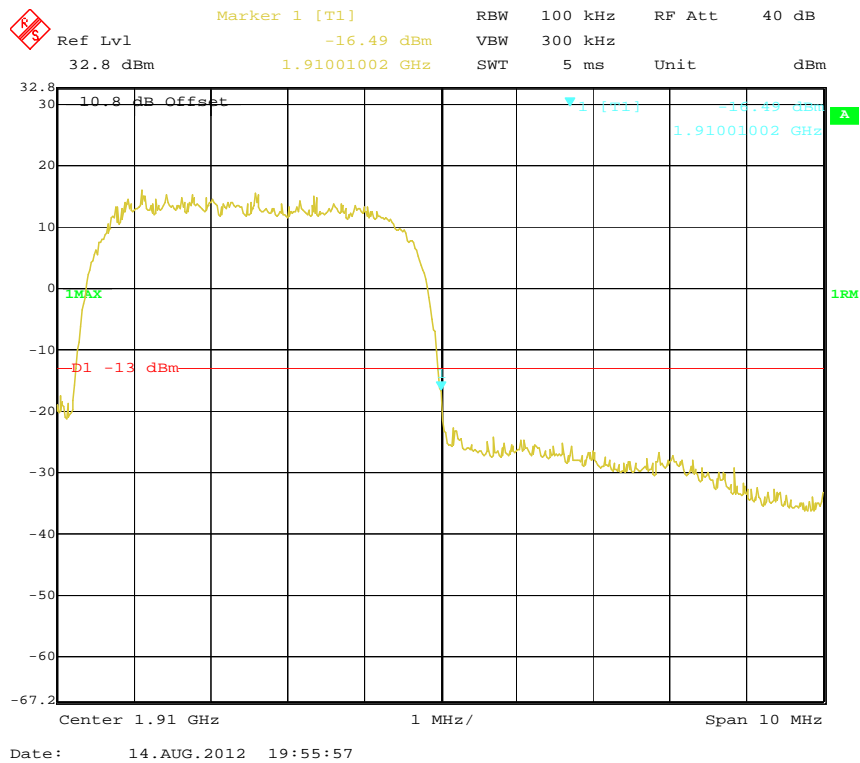

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**

**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

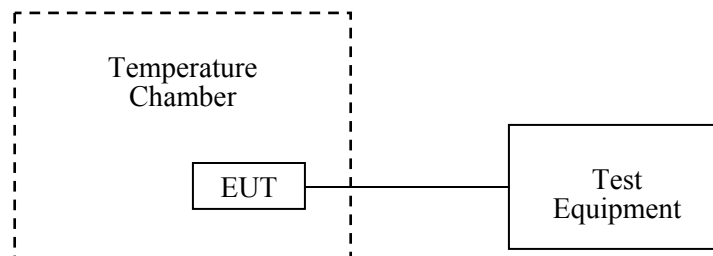



**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2011-11-24	2012-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2012-04-11	2013-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	20 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jimmy Xiao on 2012-09-14.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following tables.*

**Cellular Band (Part 22H)**

GSM mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied ( $V_{DC}$ )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-3	-0.003586	2.5
-20		1	0.001195	2.5
-10		-4	-0.004781	2.5
0		-3	-0.003586	2.5
10		2	0.002391	2.5
20		1	0.001195	2.5
30		-1	-0.001195	2.5
40		-3	-0.003586	2.5
50		-2	-0.002391	2.5
25		$V_{min.} = 3.5$	-1	-0.001195
25	$V_{max.} = 4.2$	-2	-0.002391	2.5

EGPRS (EDGE) mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	6	0.007171	2.5
-20		-3	-0.003585	2.5
-10		-4	-0.004781	2.5
0		1	0.001195	2.5
10		3	0.003585	2.5
20		2	0.002390	2.5
30		-3	-0.003585	2.5
40		-8	-0.009562	2.5
50		-9	-0.010758	2.5
25		V <sub>min.</sub> = 3.5	-7	-0.008367
25	V <sub>max.</sub> = 4.2	-5	-0.005976	2.5

WCDMA mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-9	-0.010758	2.5
-20		-6	-0.007172	2.5
-10		-8	-0.009563	2.5
0		-5	-0.005977	2.5
10		-6	-0.007172	2.5
20		-7	-0.008367	2.5
30		-4	-0.004781	2.5
40		-9	-0.010758	2.5
50		-6	-0.007172	2.5
25		V <sub>max.</sub> = 4.2	-7	-0.008367
25	V <sub>min.</sub> = 3.5	-3	-0.003586	2.5

## PCS Band (Part 24E)

GSM mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-11	-0.005851	Pass
-20		-9	-0.004787	Pass
-10		-2	-0.001064	Pass
0		-5	-0.002660	Pass
10		-7	-0.003723	Pass
20		-6	-0.003191	Pass
30		-10	-0.005319	Pass
40		-2	-0.001064	Pass
50		-8	-0.004255	Pass
25		V <sub>min.</sub> =3.5	-6	-0.003191
25	V <sub>max.</sub> =4.2	-4	-0.002128	Pass

EGPRS (EDGE) mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-10	-0.005319	Pass
-20		-6	-0.003191	Pass
-10		-4	-0.002127	Pass
0		-8	-0.004255	Pass
10		-6	-0.003191	Pass
20		-9	-0.004787	Pass
30		-11	-0.005851	Pass
40		-5	-0.002659	Pass
50		-10	-0.005319	Pass
25		V <sub>min.</sub> =3.5	-6	-0.003191
25	V <sub>max.</sub> =4.2	-7	-0.003723	Pass

WCDMA mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied ( $V_{DC}$ )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	5	0.002660	Pass
-20		6	0.003191	Pass
-10		7	0.003723	Pass
0		1	0.000532	Pass
10		3	0.001596	Pass
20		8	0.004255	Pass
30		9	0.004787	Pass
40		4	0.002128	Pass
50		11	0.005851	Pass
25		$V_{max.} = 4.2$	3	0.001596
25	$V_{min.} = 3.5$	9	0.004787	Pass

\*\*\*\*\* END OF REPORT \*\*\*\*\*