

REPORT

FCC Certification

Applicant Name:

KMW U.S.A.,INC.

Address:

1818 E. Orangethorpe Ave. Fullerton,
CA 92831

Date of Issue:

September 5, 2016

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, 17383,
Rep. of KOREA

Report No.: HCT-R-1608-F029-1

HCT FRN: 0005866421

IC Recognition No.: 5944A-5

FCC ID: ZUQ-H-FEM-L-C

APPLICANT: KMW U.S.A., INC.

Model(s): POD-H-FEM-L-C

EUT Type: DAS 7-Band Remote Unit

Frequency Ranges UL : 824 MHz ~ 849 MHz (850 Cellular)

Conducted Output Power: UL : 0.316 mW (-5 dBm)

Date of Test: December 07, 2015 ~ February 23, 2016

FCC Rule Part(s): CFR 47 Part 22

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.



Report prepared by

:Kyung Soo Kang

Test engineer of RF Team



Approved by

: Jong Seok Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1608-F029	August 26, 2016	- First Approval Report
HCT-R-1608-F029-1	September 05, 2016	- Update the KDB version. - Remove the downlink test data.

Table of Contents

1. CLIENT INFORMATION.....	4
2. FACILITIES AND ACCREDITATIONS	5
2.1. FACILITIES	5
2.2. EQUIPMENT	5
3. TEST SPECIFICATIONS.....	6
3.1. STANDARDS	6
3.2. MODE OF OPERATION DURING THE TEST	7
3.3. MAXIMUM MEASUREMENT UNCERTAINTY	7
4. STANDARDS ENVIRONMENTAL TEST CONDITIONS	7
5. TEST EQUIPMENT	8
6. RF OUTPUT POWER.....	9
7. OCCUPIED BANDWIDTH	23
8. OUT OF BAND REJECTION	44
9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL	46
10. RADIATED SPURIOUS EMISSIONS	74

1. CLIENT INFORMATION

The EUT has been tested by request of

Company	KMW U.S.A.,INC. 1818 E. Orangethorpe Ave. Fullerton, CA 92831
---------	--

FCC ID:	ZUQ-H-FEM-L-C
EUT Type:	DAS 7-Band Remote Unit
FCC Model(s):	POD-H-FEM-L-C
Frequency Ranges	UL : 824 MHz ~ 849 MHz (850 Cellular)
Conducted Output Power:	UL : 0.316 mW (-5 dBm)
Antenna Gain(s):	Manufacturer does not provide an antenna.
Measurement standard(s):	ANSI/TIA-603-C-2004, KDB 971168 D01 v02r02, KDB 935210 D02 v03r02, KDB 935210 D05 v01r01, KDB 662911 D01 v02r01
FCC Rule Part(s):	CFR 47, Part 22
Place of Tests:	HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

2. FACILITIES AND ACCREDITATIONS

2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661).

2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3. TEST SPECIFICATIONS

3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22.

Description	Reference (FCC)	Results
Conducted RF Output Power	§2.1046; §22.913	Compliant
Occupied Bandwidth	§2.1049	Compliant
Passband Gain and Bandwidth & Out of Band Rejection	KDB 935210 D02 v03r02	Compliant
Spurious Emissions at Antenna Terminals	§2.1051, §22.917	Compliant
Radiated Spurious Emissions	§2.1053, §22.917	Compliant
Frequency Stability	§2.1055, §22.355	N/A The EUT does not perform frequency translation

NOTE. DAS 7-Band Remote Unit supports SISO and MIMO system.

Support frequency Band

SISO system : 700M, SMR800, 850M, PCS, AWS, WCS, BRS

MIMO system : 700M, PCS, AWS, BRS

Calculation methods.

RF Output Power : KDB 662911 D01 v02r01, section E)2)c)

Out-of-Band and Spurious Emission : KDB 662911 D01 v02r01, section E)3)a)iii)

3.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission.

The device does not supply antenna(s) with the system, so the dummy loads were connected to the RF output ports for radiated spurious emission testing.

Band Info	Modulation
850 Cellular	LTE(5 MHz), LTE(10 MHz) CDMA, UMTS, GSM

3.3. MAXIMUM MEASUREMENT UNCERTAINTY

The value of the measurement uncertainty for the measurement of each parameter.

Coverage factor $k = 2$, Confidence levels of 95 %

Description	Condition	Uncertainty
Conducted RF Output Power	-	± 0.72 dB
Occupied Bandwidth	OBW ≤ 20 MHz	± 52 kHz
Passband Gain and Bandwidth & Out of Band Rejection	Gain 20 dB bandwidth	± 0.89 dB ± 0.58 MHz
Spurious Emissions at Antenna Terminals	-	± 1.08 dB
Radiated Spurious Emissions	$f \leq 1$ GHz	± 4.80 dB
	$f > 1$ GHz	± 6.07 dB

4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 °C to + 35 °C
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar

5. TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Date	Serial No.
Agilent	E4438C /Signal Generator	Annual	09/02/2015	MY42082646
Agilent	N5182A /Signal Generator	Annual	04/07/2015	MY50141649
Agilent	N5182A /Signal Generator	Annual	05/13/2015	MY47070230
Rohde & Schwarz	SMBV100A /Signal Generator	Annual	10/20/2015	255727
Rohde & Schwarz	SMB100A /Signal Generator	Annual	07/16/2015	177633
NANGYEUL CO., LTD.	NY-THR18750 / Temperature and Humidity Chamber	Annual	10/27/2015	NY-2009012201A
Agilent	N9020A /Signal Analyzer	Annual	02/27/2015	MY46471587
WEINSCHTEL	67-30-33 / Fixed Attenuator	Annual	10/29/2015	BR5347
DEAYOUNG ENT	DFSS60 / AC Power Supply	Annual	04/01/2015	1003030-1
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	09/24/2015	100688
CERNEX, Inc	CBLU1183540/AMP	Annual	07/21/2015	22964
WEINSCHTEL	1506A/Power Divider	Annual	10/21/2015	MD793
Schwarzbeck	BBHA 9120D / Horn Antenna	Biennial	07/30/2015	1151
Schwarzbeck	VULB 9160 / TRILOG Antenna	Biennial	10/10/2014	9160-3368
HD	MA240 / Antenna Position Tower	N/A	N/A	556
EMCO	1050 / Turn Table	N/A	N/A	114
HD GmbH	HD 100 / Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12

6. RF OUTPUT POWER

FCC Rules

Test Requirements:

§ 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier Radio telephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all Calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Effective radiated power limits. The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(a) Maximum ERP. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. However, for those systems operating in areas more than 72 km (45 miles) from international borders that:

(1) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,

(2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in § 22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitter sand auxiliary test transmitters must not exceed 7 Watts.


Test Procedures:

Measurements were in accordance with the test methods section 3.5.2 of KDB 935210 D05 v01r01.

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency of (f_0) as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure the output power of the EUT and record (Power measurement with a spectrum analyzer).
- g) Remove the EUT from the measurement setup and using the same signal generator settings, repeat the power measurement on the input signal to the EUT and record as input power.
- h) Repeat the procedure with the narrowband test signal.
- i) Repeat the procedure for both test signals with input signal amplitude set to 3 dB above the AGC threshold level.
- j) Repeat for all frequency bands authorized for use by the EUT.

Power measurement Method :

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168.

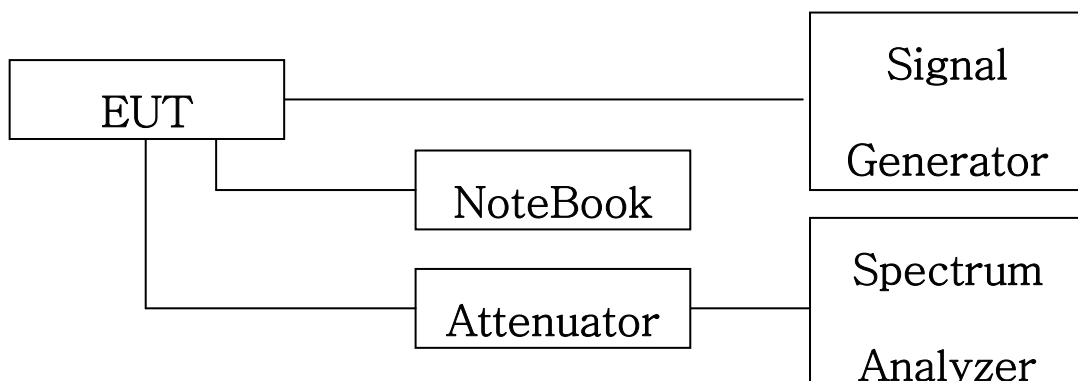

Block Diagram 1. RF Power Output Test Setup

Test Results:

Input Signal	Input Level (dBm)	Maximum Amp Gain
850 Cellular	UL : -42 dBm	UL : 37 dB

Single channel Enhancer

* Due to EUT's ALC function (Auto Level Control), even if input signal is increased,

The same output power is transmit.

[Uplink]

	Channel	Frequency (MHz)	Output Power	
			(dBm)	(mW)
850 Cellular Band_ LTE 5 MHz AGC threshold	Low	819.50	-4.97	0.318
	Middle	833.00	-4.99	0.317
	High	846.50	-4.97	0.318
850 Cellular Band_ LTE 5 MHz +3dBm above the AGC threshold	Low	819.50	-4.92	0.322
	Middle	833.00	-5.00	0.316
	High	846.50	-5.00	0.316
850 Cellular Band_ LTE 10 MHz AGC threshold	Low	829.00	-4.97	0.318
	Middle	-	-	-
	High	844.00	-4.94	0.321
850 Cellular Band_ LTE 10 MHz +3dBm above the AGC threshold	Low	829.00	-4.96	0.319
	Middle	-	-	-
	High	844.00	-4.92	0.322

	Channel	Frequency (MHz)	Output Power	
			(dBm)	(mW)
850 Cellular Band_ UMTS AGC threshold	Low	826.50	-4.94	0.321
	Middle	836.50	-4.91	0.323
	High	846.50	-4.94	0.321
850 Cellular Band_ UMTS +3dBm above the AGC threshold	Low	826.50	-4.97	0.318
	Middle	836.50	-4.93	0.321
	High	846.50	-4.96	0.319
SMR 800 ,850 Cellular Band_ CDMA AGC threshold	Low	818.25	-4.92	0.322
	Middle	833.00	-4.95	0.320
	High	847.75	-5.02	0.315
SMR 800 ,850 Cellular Band_ CDMA +3dBm above the AGC threshold	Low	818.25	-4.96	0.319
	Middle	833.00	-4.95	0.320
	High	847.75	-5.02	0.315


	Channel	Frequency (MHz)	Output Power	
			(dBm)	(mW)
850 Cellular Band_ GSM AGC threshold	Low	824.20	-4.98	0.318
	Middle	836.50	-4.94	0.321
	High	848.80	-4.93	0.321
850 Cellular Band_ GSM +3dBm above the AGC threshold	Low	824.20	-5.00	0.316
	Middle	836.50	-4.96	0.319
	High	848.80	-4.94	0.321

* Note: 850 Cellular and SMR800 amplifiers are operating together, so we didn't performed test seperately about LTE 5 MHz, CDMA.


Single channel Enhancer Plots of RF Output Power

850Cellular LTE5MHz Band UL


[850Cellular AGC threshold Uplink LTE 5 MHz Low]

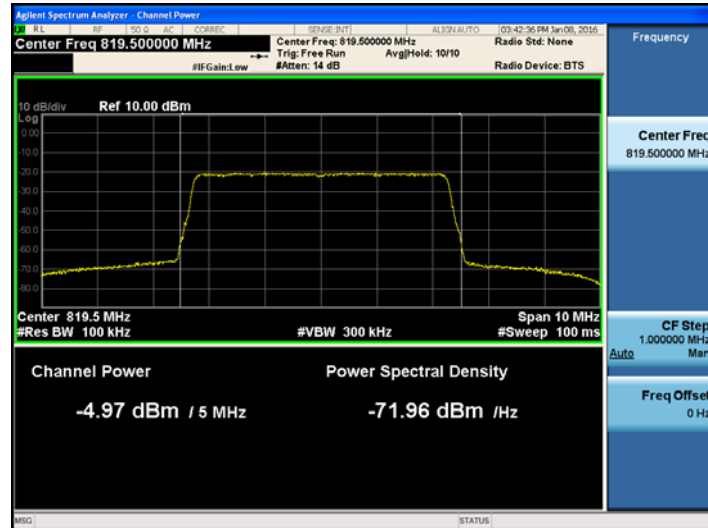


[850Cellular AGC threshold Uplink LTE 5 MHz Mid]

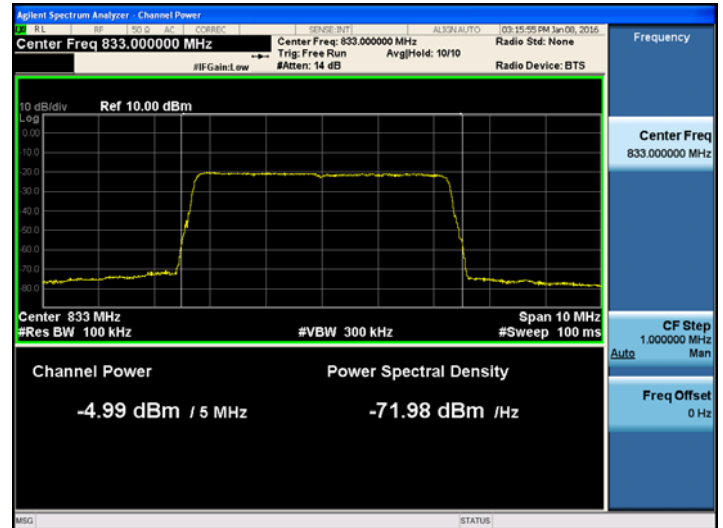


[850Cellular AGC threshold Uplink LTE 5 MHz High]

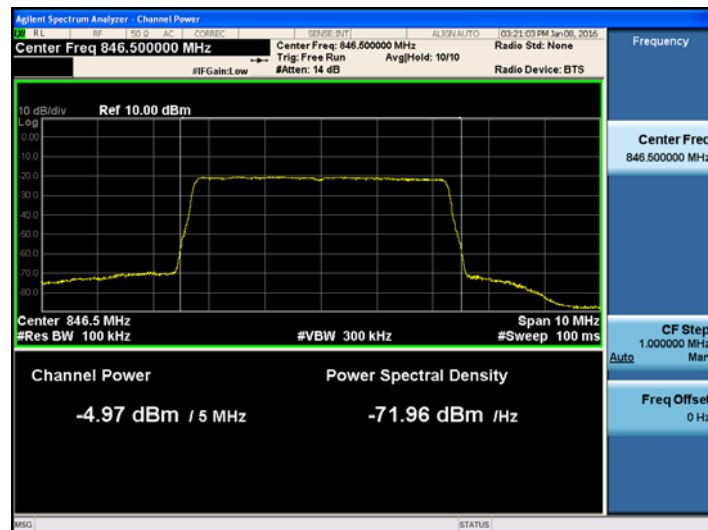


[850Cellular +3dB above the threshold Uplink
LTE 5 MHz Low]

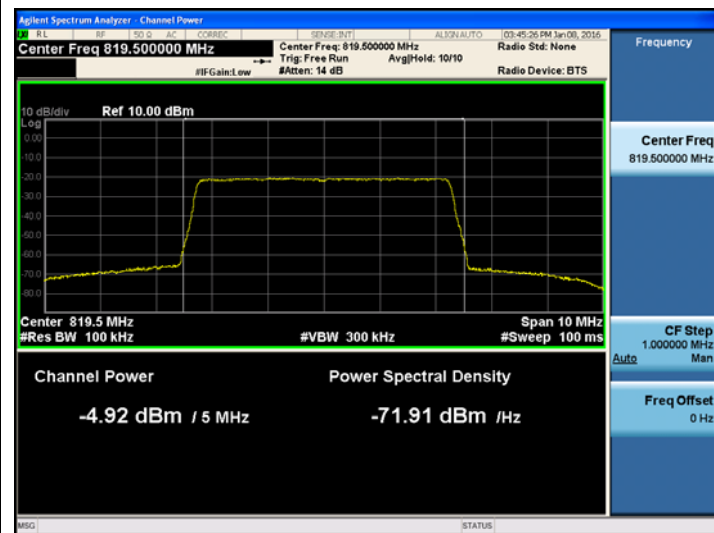

[850Cellular +3dB above the threshold Uplink
LTE 5 MHz Mid]

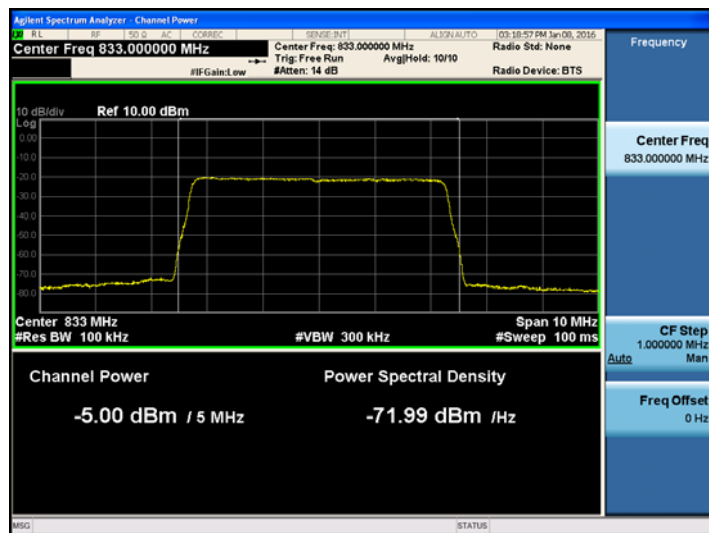


[850Cellular +3dB above the threshold Uplink
LTE 5 MHz High]

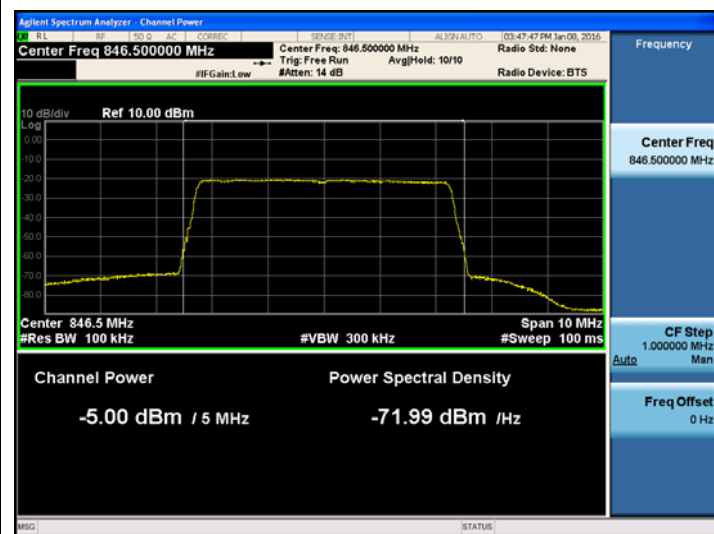


850Cellular LTE10MHz Band UL


[850Cellular AGC threshold Uplink LTE
10 MHz Low]

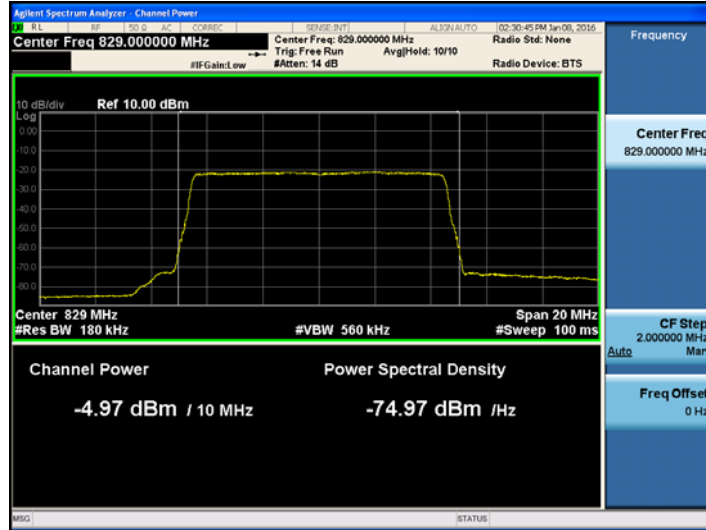


[850Cellular AGC threshold Uplink
LTE 10 MHz High]

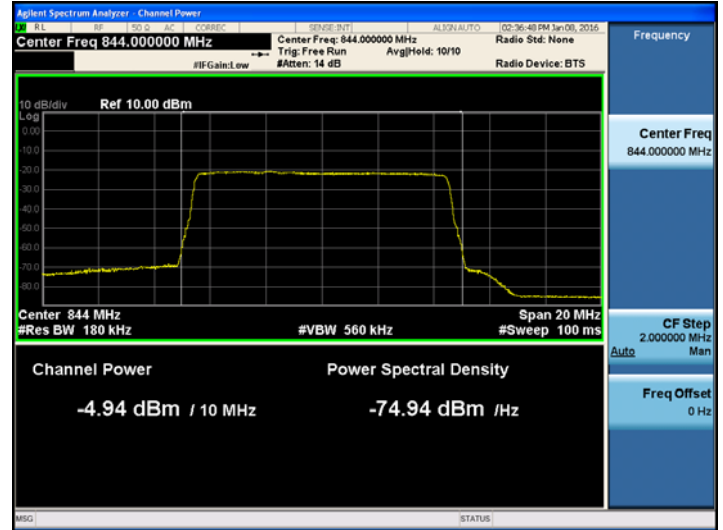

[850Cellular +3dB above the threshold Uplink
LTE 10 MHz Low]

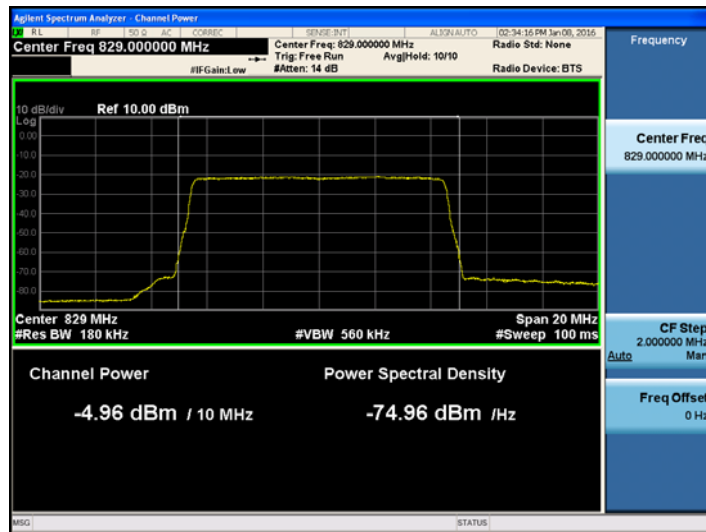


[850Cellular +3dB above the threshold Uplink
LTE 10 MHz Mid]

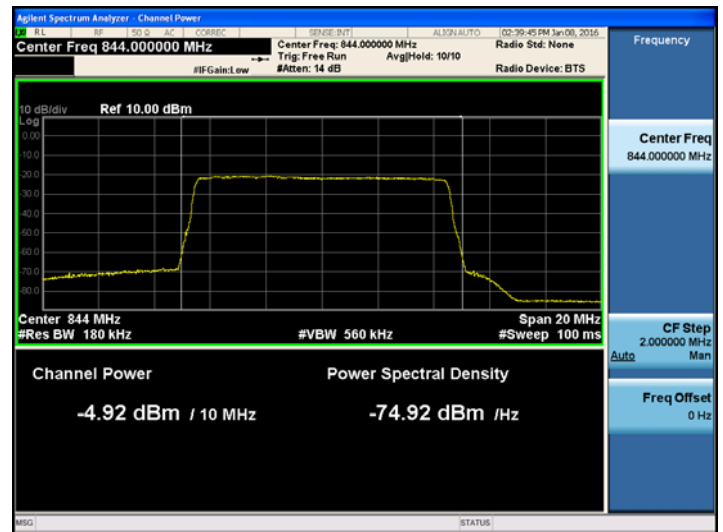


850Cellular UMTS Band UL


[850Cellular AGC threshold Uplink UMTS Low]

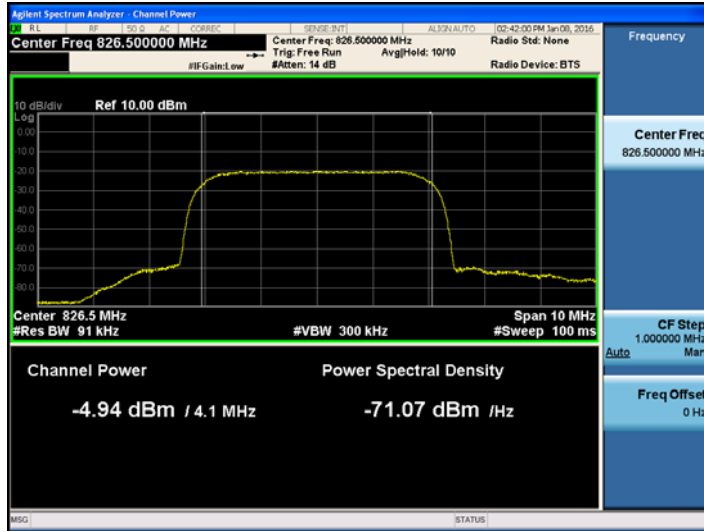


[850Cellular AGC threshold Uplink UMTS Mid]

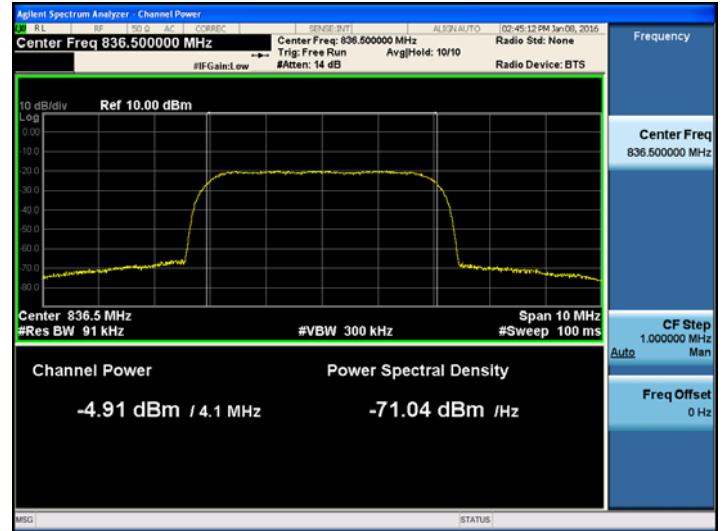


[850Cellular AGC threshold Uplink UMTS High]

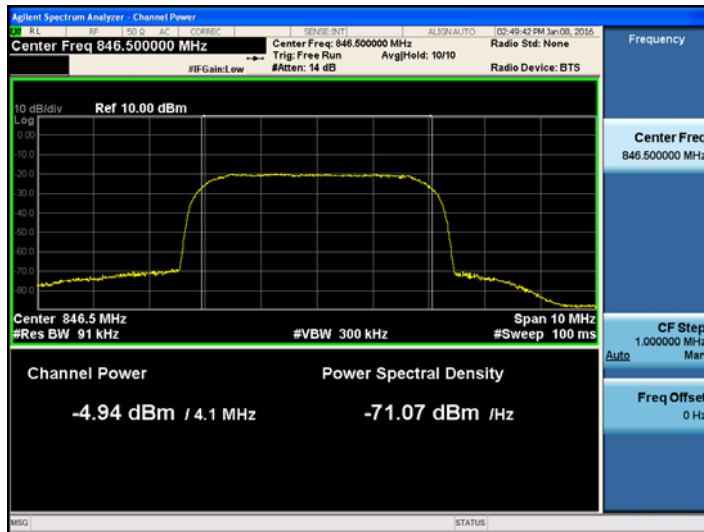


[850Cellular +3dB above the AGC threshold Uplink UMTS Low]

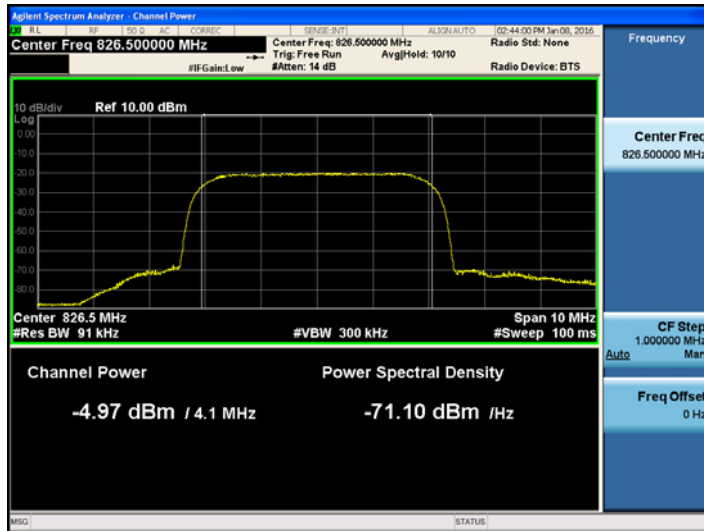

[850Cellular +3dB above the AGC threshold Uplink UMTS Mid]

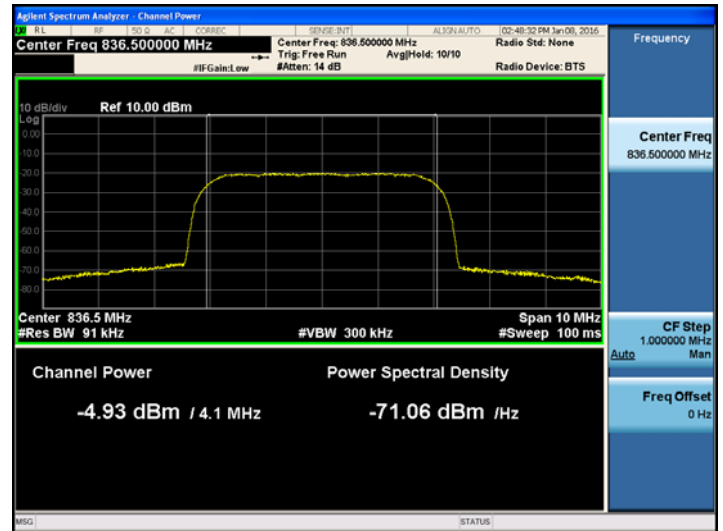


[850Cellular +3dB above the AGC threshold Uplink UMTS High]

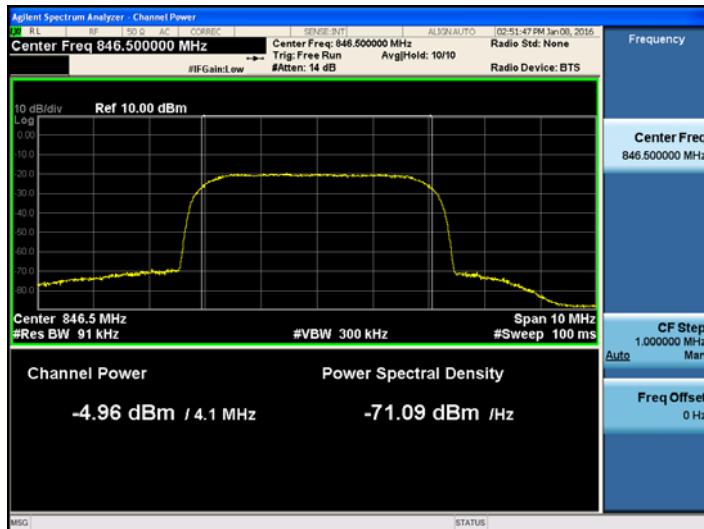


850Cellular CDMA Band UL


[850Cellular AGC threshold Uplink CDMA Low]

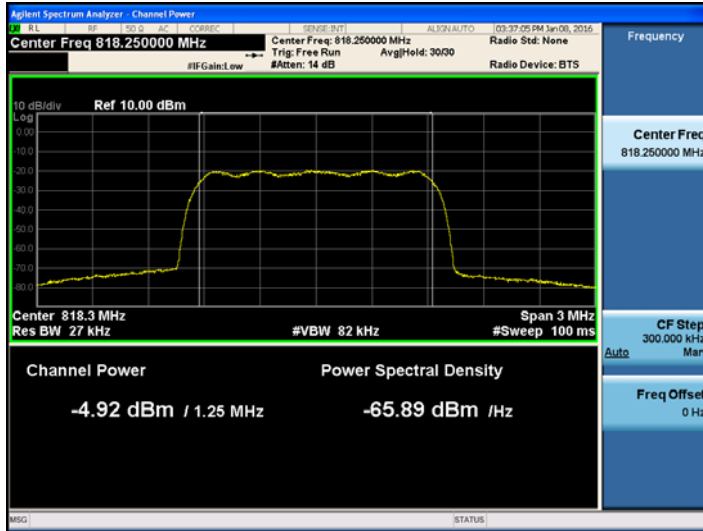


[850Cellular AGC threshold Uplink CDMA Mid]

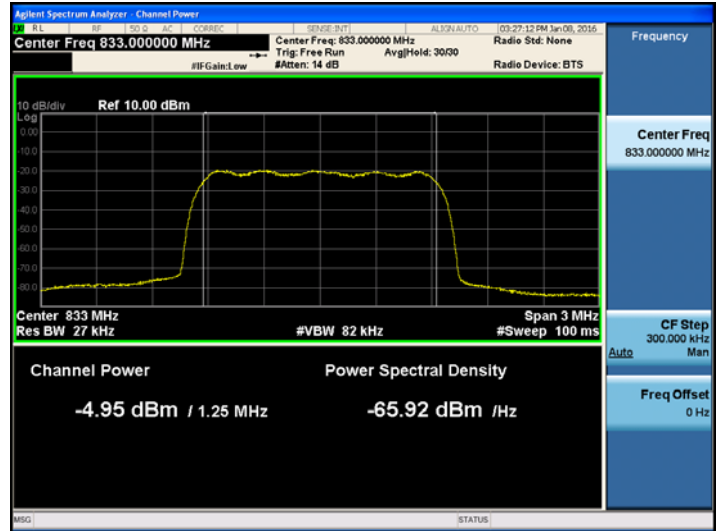


[850Cellular AGC threshold Uplink CDMA High]

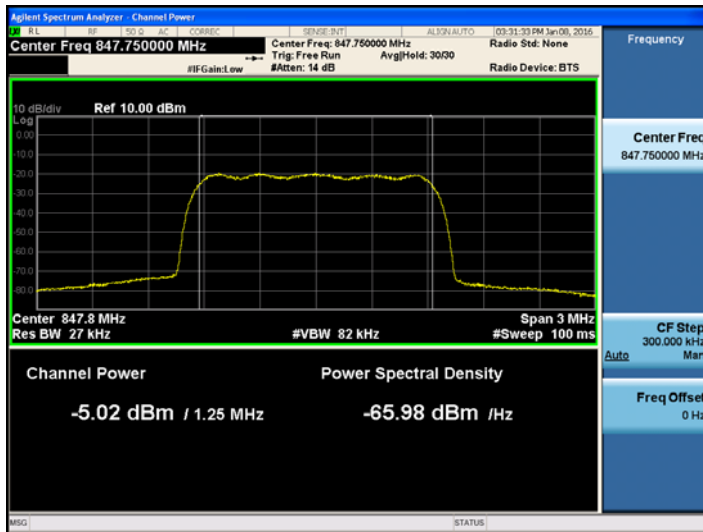


[850Cellular +3dB above the AGC threshold Uplink CDMA Low]

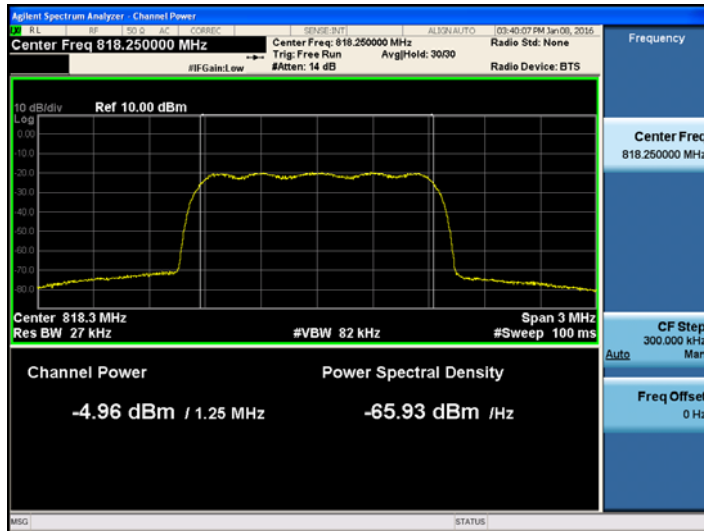

[850Cellular +3dB above the AGC threshold Uplink CDMA Mid]

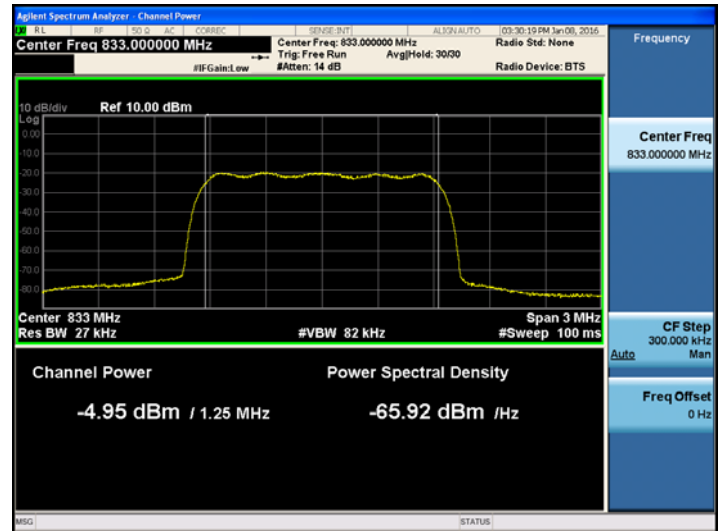


[850Cellular +3dB above the AGC threshold Uplink
CDMA High]

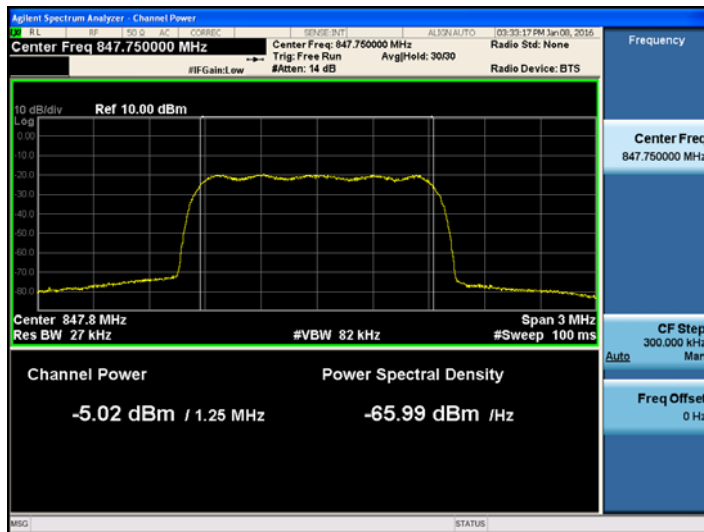


850Cellular GSM Band UL


[850Cellular AGC threshold Uplink GSM Low]

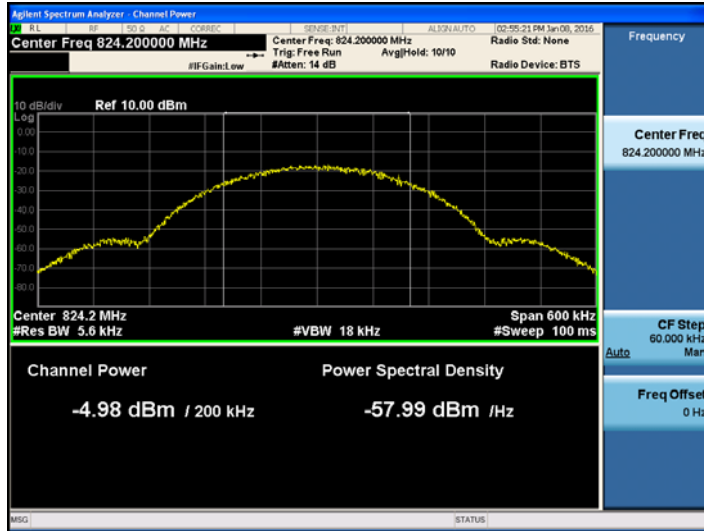


[850Cellular AGC threshold Uplink GSM Mid]

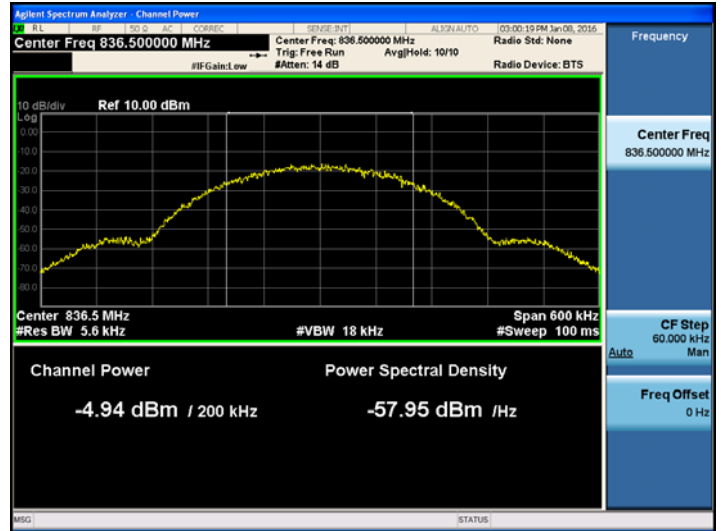


[850Cellular AGC threshold Uplink GSM High]

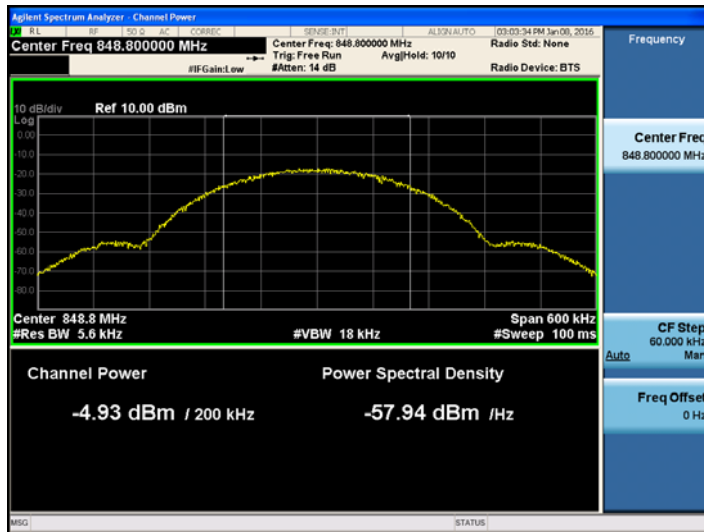


[850Cellular +3dB above the AGC threshold Uplink
GSM Low]

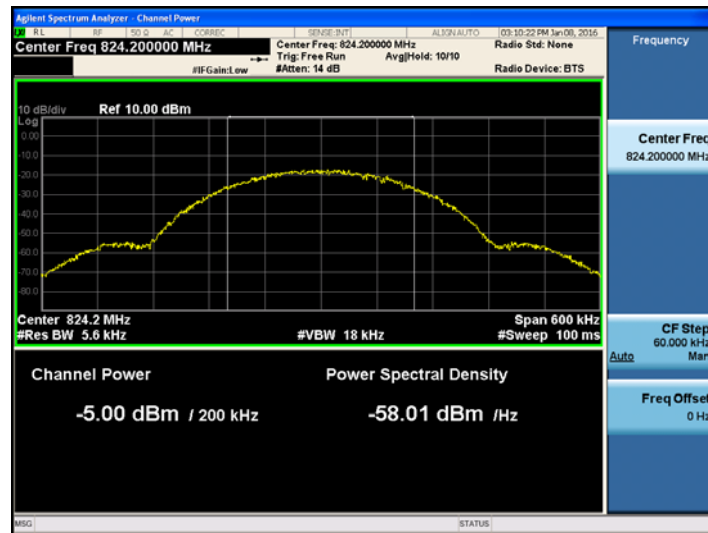

[850Cellular +3dB above the AGC threshold Uplink
GSM Mid]

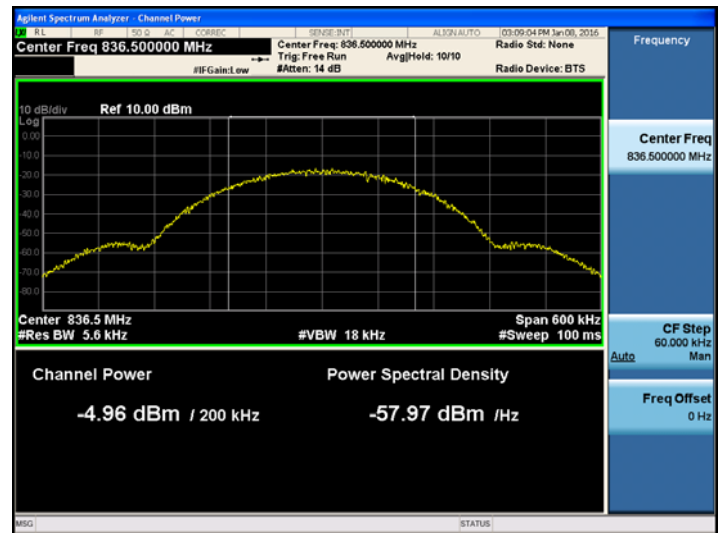

[850Cellular +3dB above the AGC threshold Uplink
GSM High]

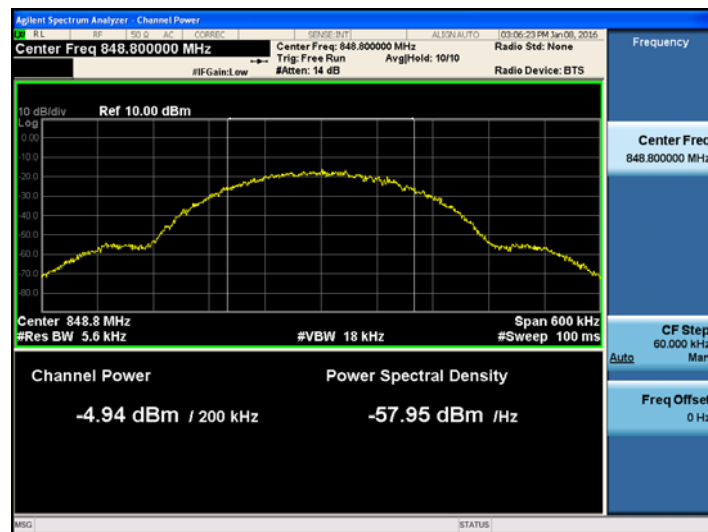

7. OCCUPIED BANDWIDTH

FCC Rules

Test Requirement(s):

§ 2.1049 Measurements required: Occupied bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r01 and section 4.2 of KDB 971168 D01 v02r02.

Test is 99% OBW measured and used.

- a) Connect a signal generator to the input of the EUT.
 - b) Configure the signal generator to transmit the AWGN signal.
 - c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
 - d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
 - e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the OBW.
 - f) The nominal resolution bandwidth (RBW) shall be in the range of 1% to 5 % of the anticipated OBW, and the VBW shall be $\geq 3 \times \text{RBW}$.
 - g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than $[10 \log (\text{OBW} / \text{RBW})]$ below the reference level.
- NOTE—Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
 - i) Set spectrum analyzer detection function to positive peak.
 - j) Set the trace mode to max hold.
 - k) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
 - l) Repeat steps e) to k) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
 - m) Compare the spectral plot of the input signal (determined from step l) to the output signal (determined from step k) to affirm that they are similar (in passband and rolloff characteristic

features and relative spectral locations), and include plot(s) and descriptions in test report.
n) Repeat for all frequency bands authorized for use by the EUT.

Test Results: The EUT complies with the requirements of this section.

Input Signal	Input Level (dBm)	Maximum Amp Gain
850 Cellular	UL : -42 dBm	UL : 37 dB

[Uplink Output]

	Channel	Frequency (MHz)	OBW (MHz)
850 Cellular Band_ LTE 5 MHz AGC threshold	Low	819.50	4.526
	Middle	833.00	4.524
	High	846.50	4.539
850 Cellular Band_ LTE 5 MHz +3dBm above the AGC threshold	Low	819.50	4.552
	Middle	833.00	4.536
	High	846.50	4.534
850 Cellular Band_ LTE 10 MHz AGC threshold	Low	829.00	8.989
	Middle	-	
	High	844.00	8.997
850 Cellular Band_ LTE 10 MHz +3dBm above the AGC threshold	Low	829.00	9.002
	Middle	-	
	High	844.00	9.007

	Channel	Frequency (MHz)	OBW (MHz)
850 Cellular Band_ UMTS AGC threshold	Low	826.50	4.172
	Middle	836.50	4.175
	High	846.50	4.169
850 Cellular Band_ UMTS +3dBm above the AGC threshold	Low	826.50	4.167
	Middle	836.50	4.175
	High	846.50	4.168
SMR 800 ,850 Cellular Band_ CDMA AGC threshold	Low	818.25	1.270
	Middle	833.00	1.268
	High	847.75	1.269
SMR 800 ,850 Cellular Band_ CDMA +3dBm above the AGC threshold	Low	818.25	1.273
	Middle	833.00	1.272
	High	847.75	1.266

	Channel	Frequency (MHz)	OBW (MHz)
850 Cellular Band_ GSM AGC threshold	Low	824.20	0.246
	Middle	836.50	0.594
	High	848.80	0.246
850 Cellular Band_ GSM +3dBm above the AGC threshold	Low	824.20	0.246
	Middle	836.50	0.246
	High	848.80	0.246

* Note: 850 Cellular and SMR800 amplifiers are operating together, so we didn't performed test seperately about LTE 5 MHz, CDMA.

[Uplink Input]

	Channel	Frequency (MHz)	OBW (MHz)
850 Cellular Band_ LTE 5 MHz AGC threshold	Low	819.50	4.535
	Middle	833.00	4.547
	High	846.50	4.537
850 Cellular Band_ LTE 10 MHz AGC threshold	Low	829.00	9.012
	Middle	-	
	High	844.00	9.018


	Channel	Frequency (MHz)	OBW (MHz)
850 Cellular Band_ UMTS AGC threshold	Low	826.50	4.169
	Middle	836.50	4.172
	High	846.50	4.174
SMR 800 ,850 Cellular Band_ CDMA AGC threshold	Low	818.25	1.265
	Middle	833.00	1.268
	High	847.75	1.273
850 Cellular Band_ GSM AGC threshold	Low	824.20	0.247
	Middle	836.50	0.248
	High	848.80	0.247

* Note: 850 Cellular and SMR800 amplifiers are operating together, so we didn't performed test seperately about LTE 5 MHz, CDMA.

Plots of Occupied Bandwidth 850 Cellular Band_LTE 5 MHz UL_Output


[850 Cellular Band AGC threshold Uplink Output

LTE 5 MHz Low]

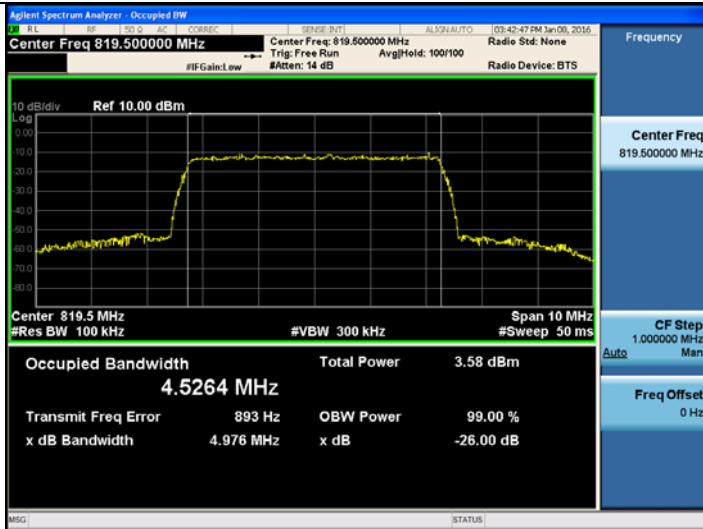


[850 Cellular Band AGC threshold Uplink Output

LTE 5 MHz Mid]

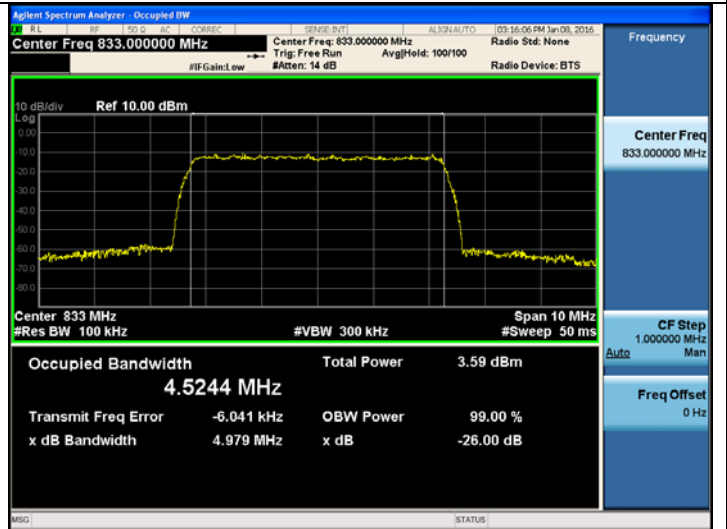


[850 Cellular Band AGC threshold Uplink Output

LTE 5 MHz High]

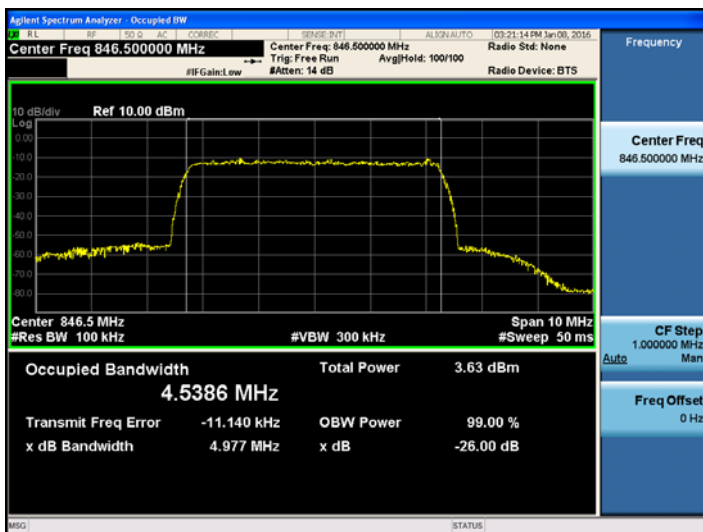


[850 Cellular Band +3dBm above the AGC threshold Uplink Output

LTE 5 MHz Low]

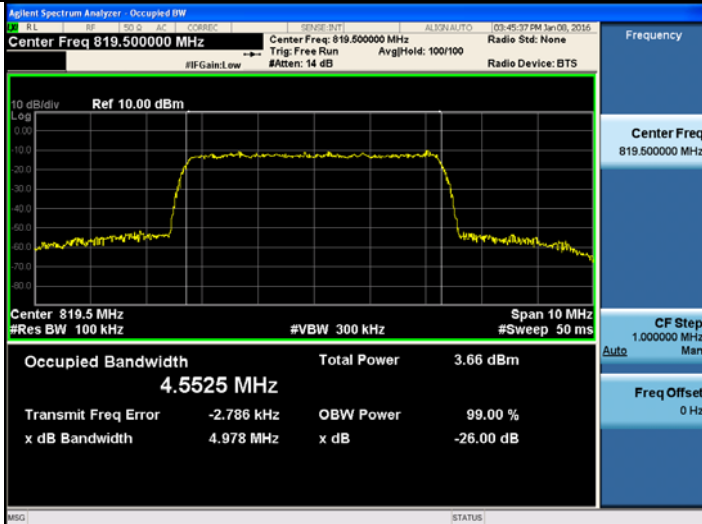


[850 Cellular Band +3dBm above the AGC threshold Uplink Output

LTE 5 MHz Mid]

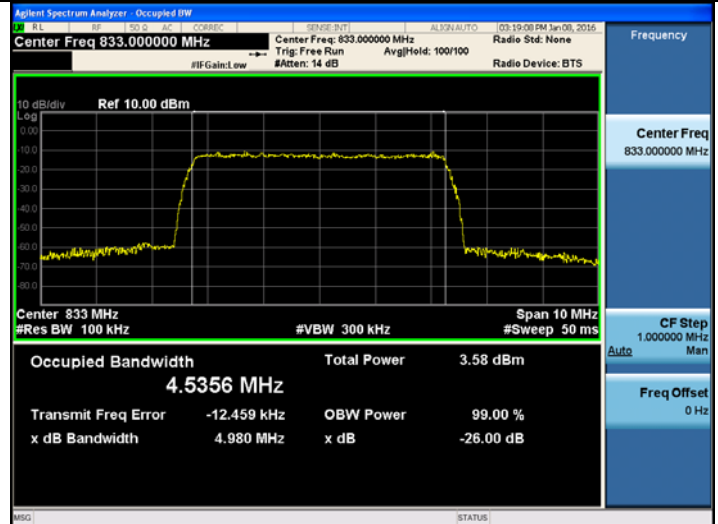

[850 Cellular Band +3dBm above the AGC threshold Uplink Output


LTE 5 MHz High]

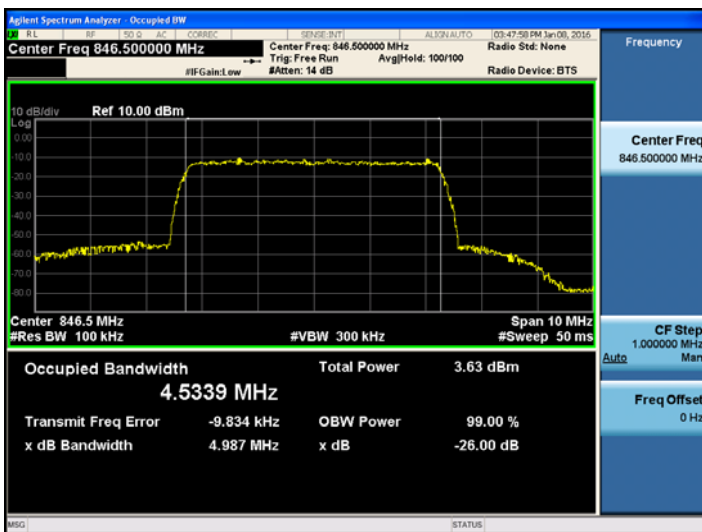

850 Cellular Band_LTE 10 MHz UL_Output


[850 Cellular Band AGC threshold Uplink Output

LTE 10 MHz Low]

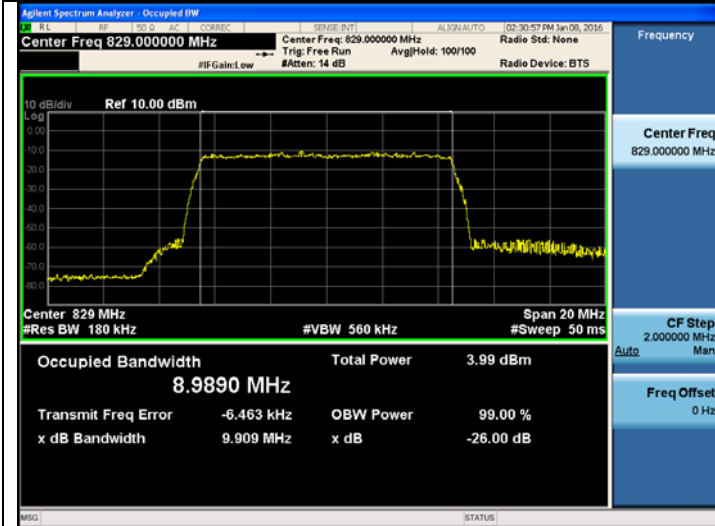


[850 Cellular Band AGC threshold Uplink Output

LTE 10 MHz High]

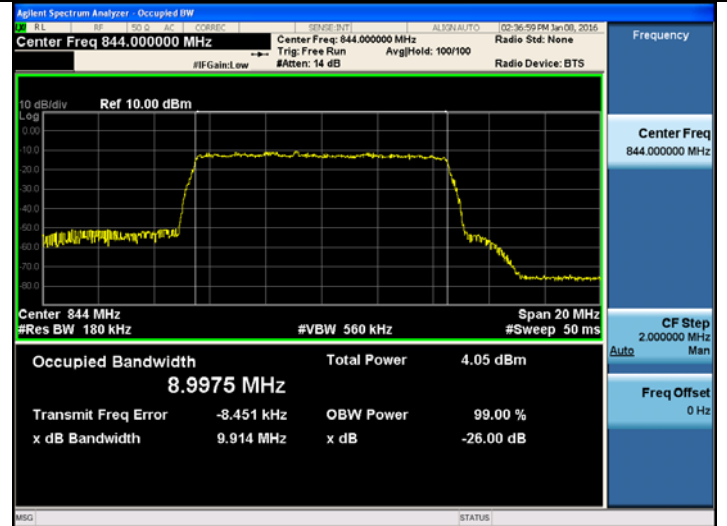

[850 Cellular Band +3dBm above the AGC threshold Uplink Output

LTE 10 MHz Low]

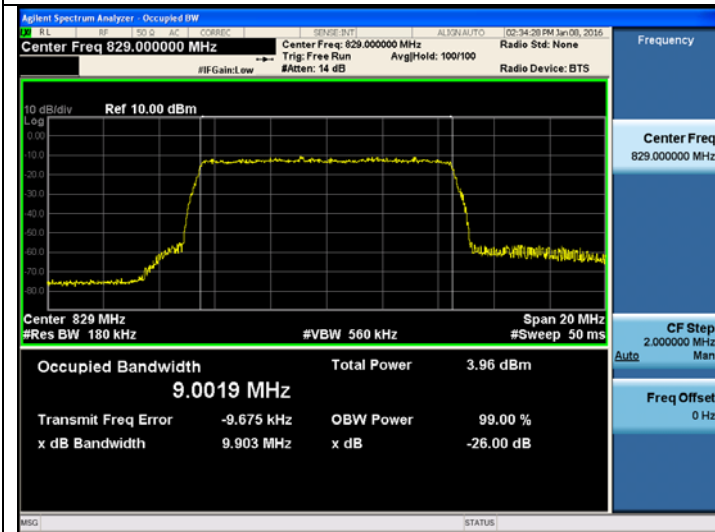


[850 Cellular Band +3dBm above the AGC threshold Uplink Output

LTE 10 MHz High]




850 Cellular Band_UMTS UL_Output


[850 Cellular Band AGC threshold Uplink Output UMTS Low]

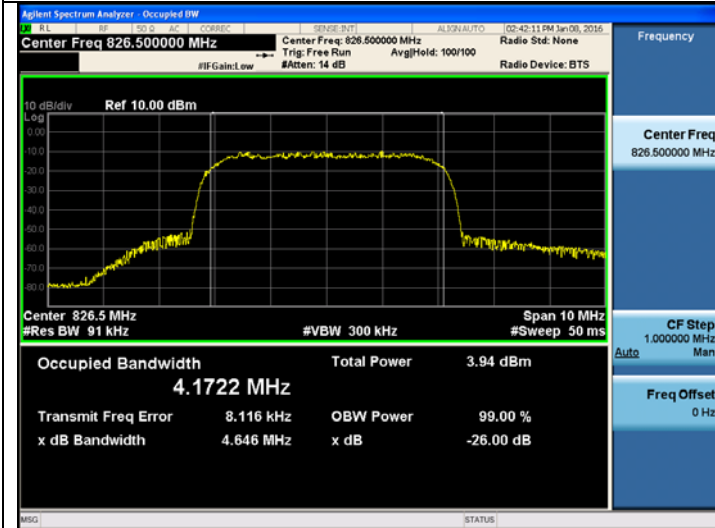


[850 Cellular Band AGC threshold Uplink Output UMTS Mid]

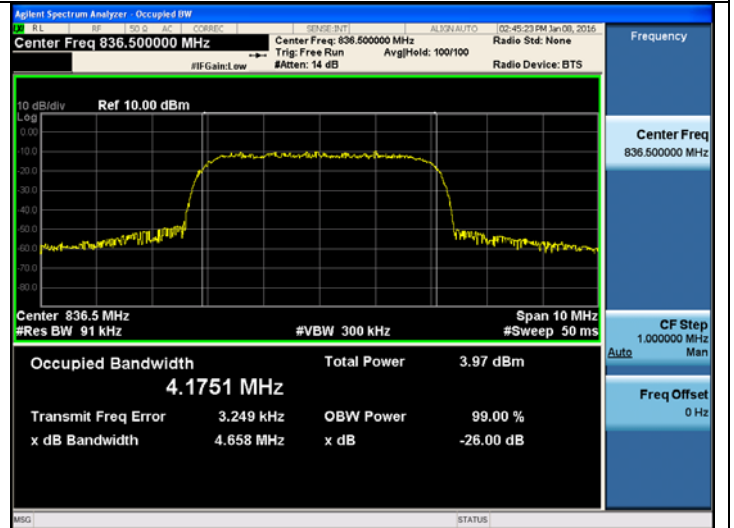


[850 Cellular Band AGC threshold Uplink Output UMTS High]

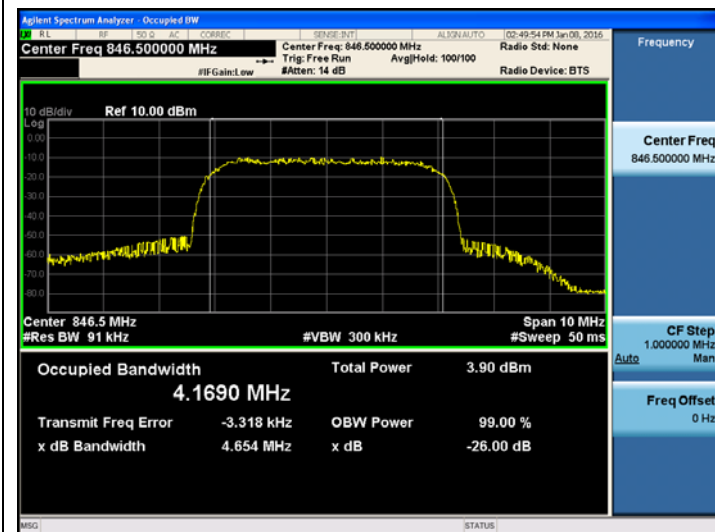


[850 Cellular Band +3dBm above the AGC threshold Uplink Output
UMTS Low]

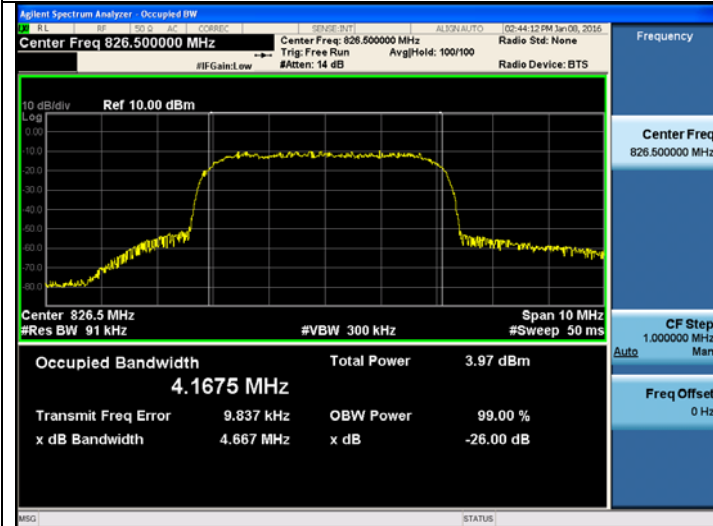

[850 Cellular Band +3dBm above the AGC threshold Uplink Output
UMTS Mid]

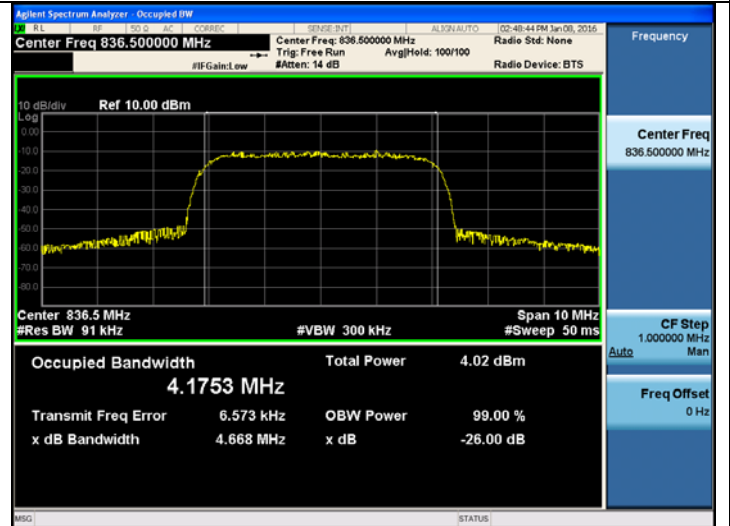


[850 Cellular Band +3dBm above the AGC threshold Uplink Output
UMTS High]

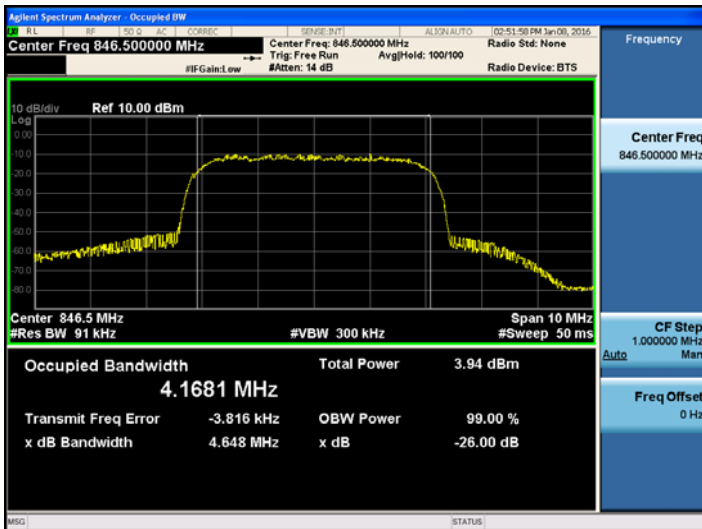


SMR 800,850 Cellular Band_CDMA UL_Output


[SMR 800,850 Cellular Band AGC threshold Uplink Output
CDMA Low]

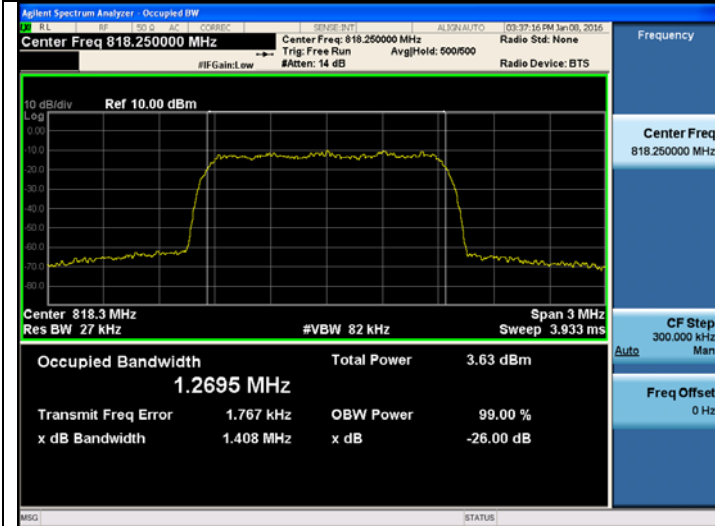

[SMR 800,850 Cellular Band AGC threshold Uplink Output
CDMA Mid]


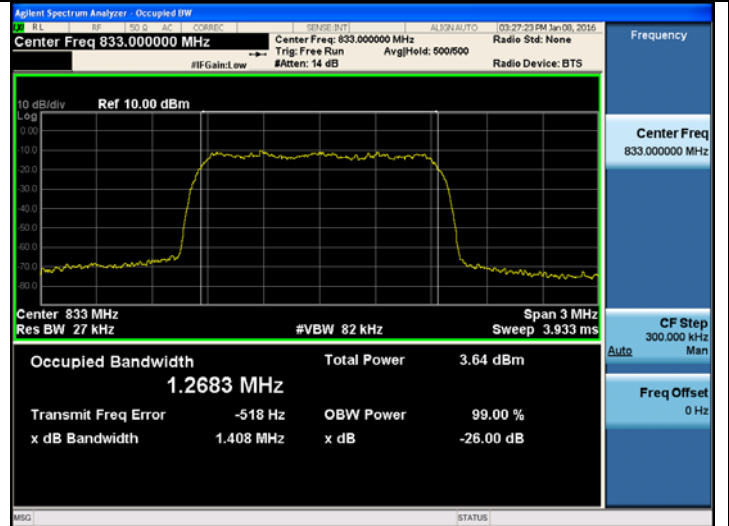


[SMR 800,850 Cellular Band AGC threshold Uplink Output
CDMA High]

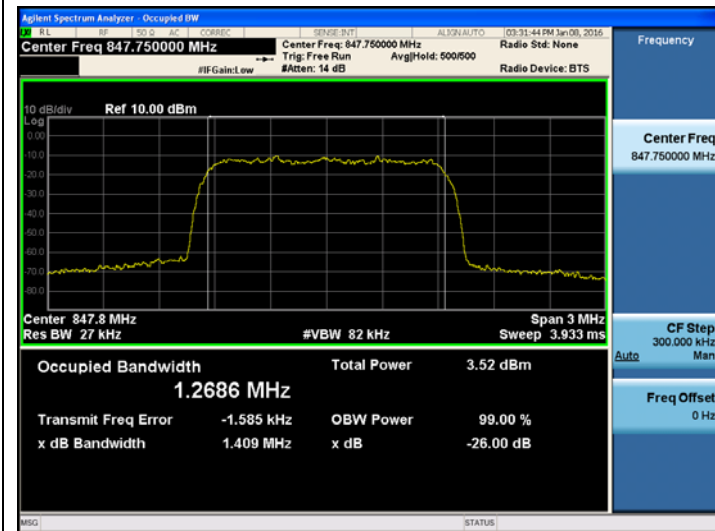


[SMR 800,850 Cellular Band +3dBm above the AGC threshold Uplink
Output CDMA Low]

SMR 800,850 Cellular Band +3dBm above the AGC threshold Uplink
Output CDMA Mid]

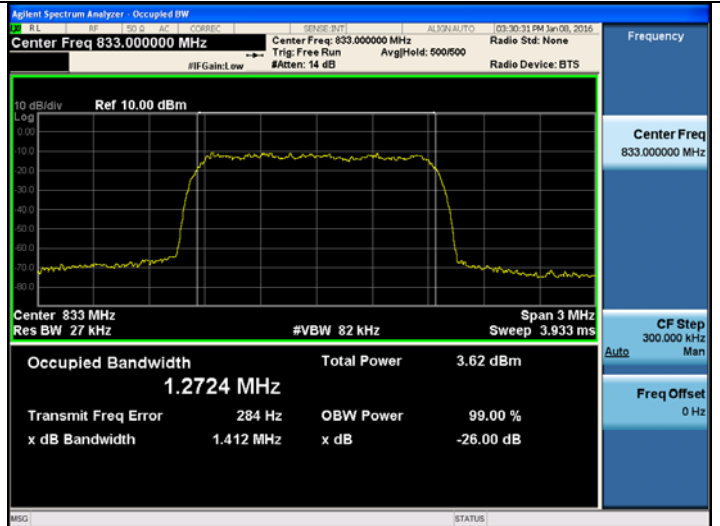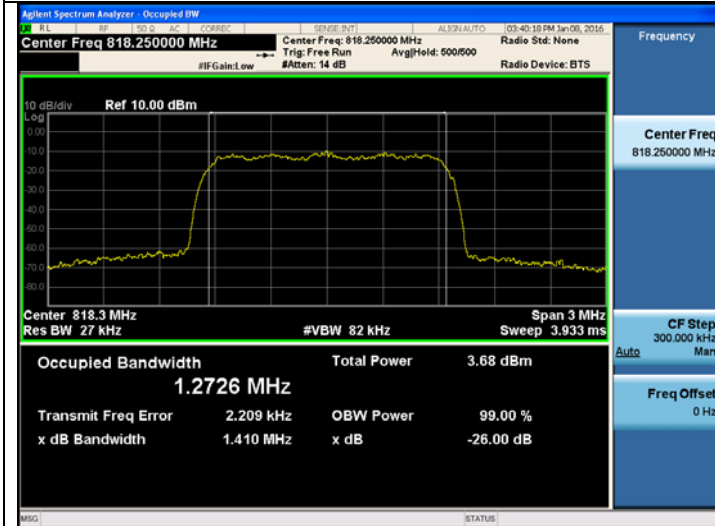


[SMR 800,850 Cellular Band +3dBm above the AGC threshold Uplink
Output CDMA High]

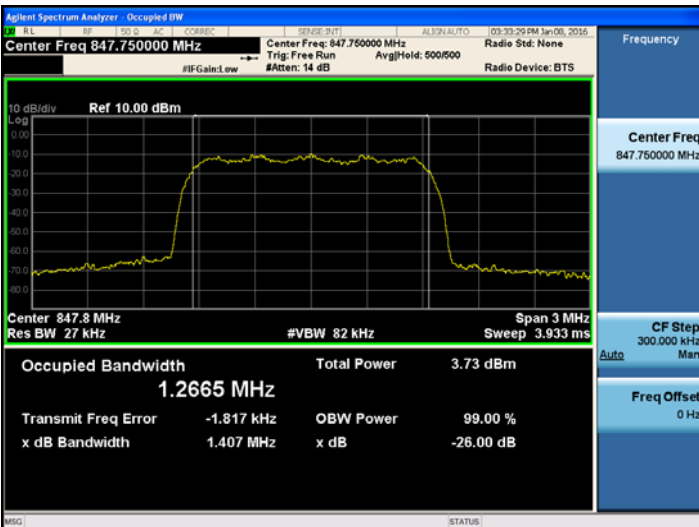

850 Cellular Band_GSM UL_Output

[850 Cellular Band AGC threshold Uplink Output
GSM Low]

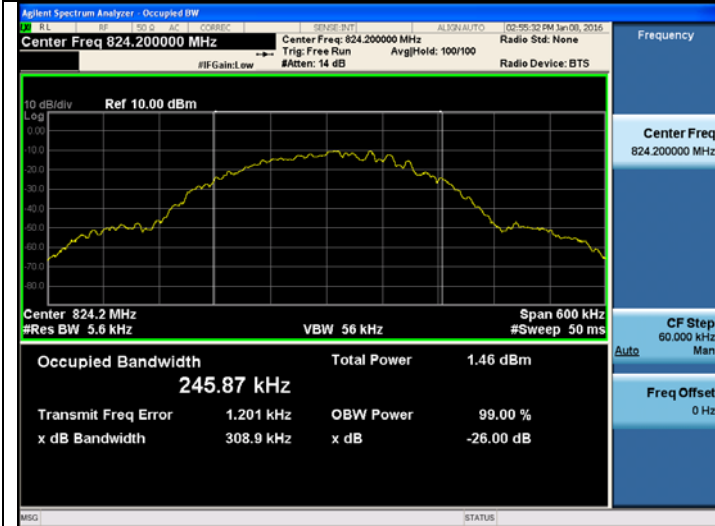

[850 Cellular Band AGC threshold Uplink Output
GSM Mid]



[850 Cellular Band AGC threshold Uplink Output
GSM High]



[850 Cellular Band +3dBm above the AGC threshold Uplink Output
GSM Low]



[850 Cellular Band +3dBm above the AGC threshold Uplink Output
GSM Mid]




[850 Cellular Band +3dBm above the AGC threshold Uplink Output
GSM High]



850 Cellular Band_LTE 5 MHz UL_Input


[SMR 800,850 Cellular Band AGC threshold Uplink Input

LTE 5 MHz Low]

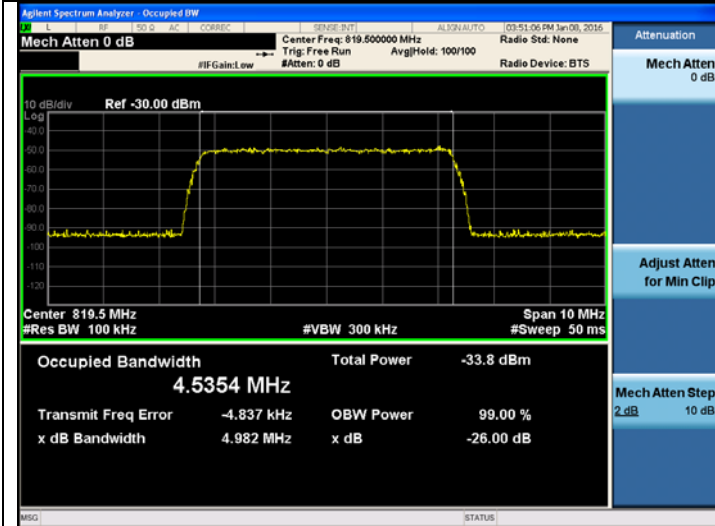

[SMR 800,850 Cellular Band AGC threshold Uplink Input

LTE 5 MHz Mid]

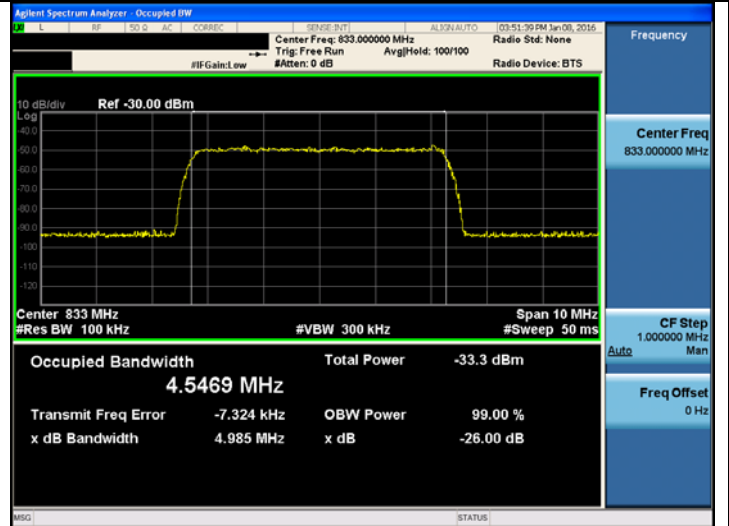


[SMR 800,850 Cellular Band AGC threshold Uplink Input

LTE 5 MHz High]




850 Cellular Band_LTE 10 MHz UL_Input

[850 Cellular Band AGC threshold Uplink Input
LTE 10 MHz Low]

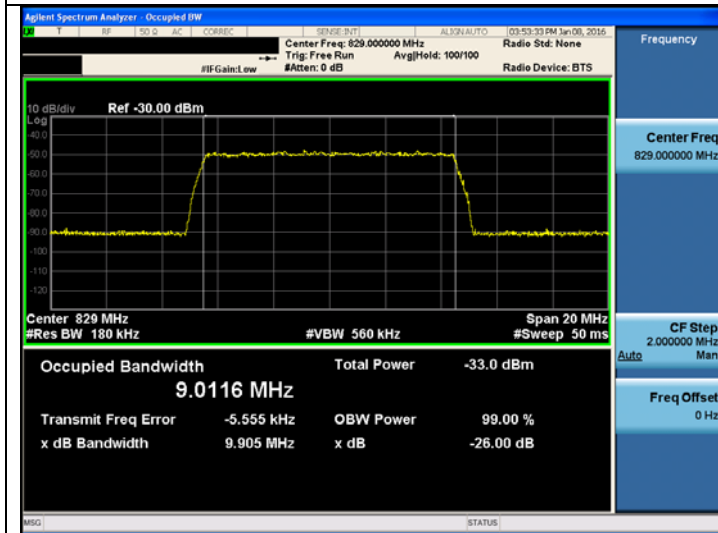


[850 Cellular Band AGC threshold Uplink Input
LTE 10 MHz High]

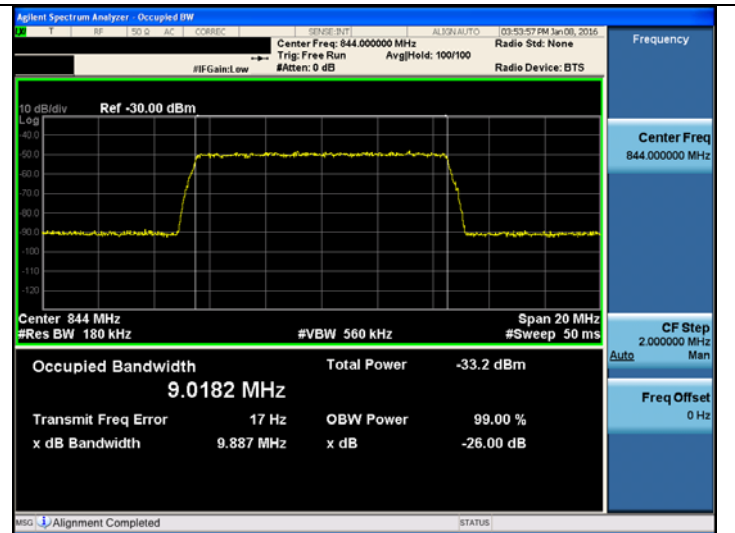

850 Cellular Band_UMTS UL_Input

[850 Cellular Band AGC threshold Uplink Input

UMTS Low]

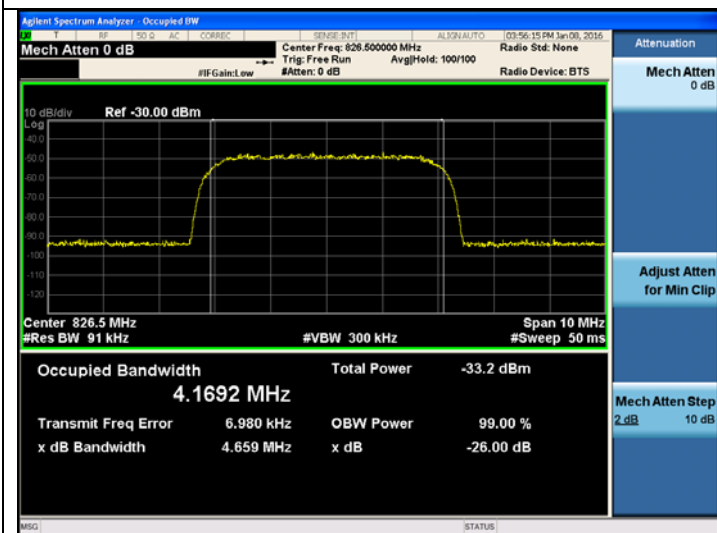


[850 Cellular Band AGC threshold Uplink Input

UMTS Mid]




[850 Cellular Band AGC threshold Uplink Input

UMTS High]

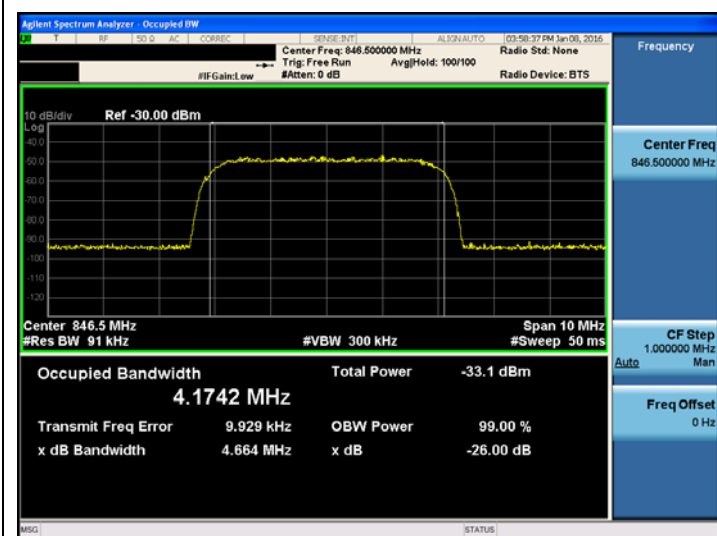


SMR 800,850 Cellular Band_CDMA UL_Input


[SMR 800,850 Cellular Band AGC threshold Uplink Input
CDMA Low]

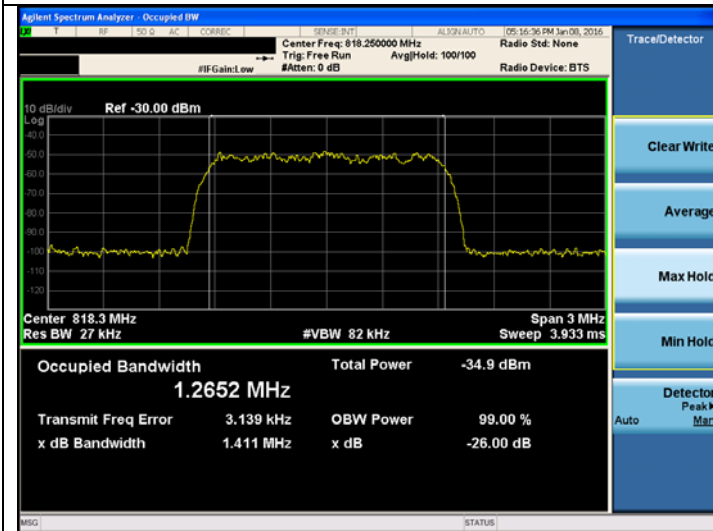

[SMR 800,850 Cellular Band AGC threshold Uplink Input
CDMA Mid]

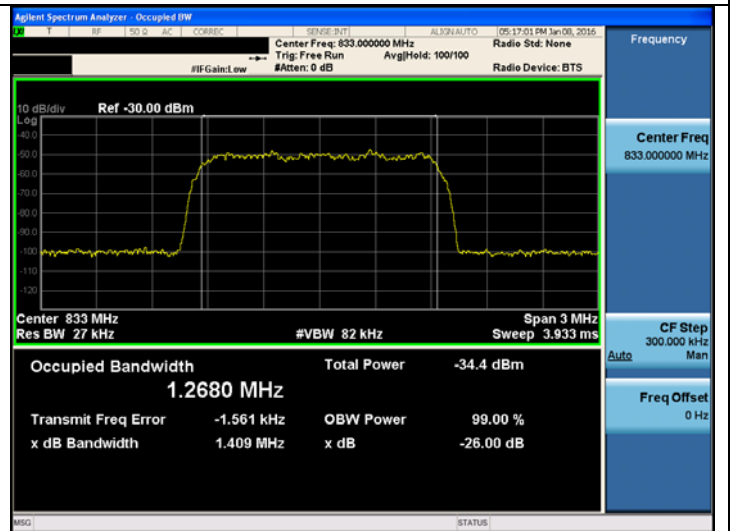


[SMR 800,850 Cellular Band AGC threshold Uplink Input
CDMA High]

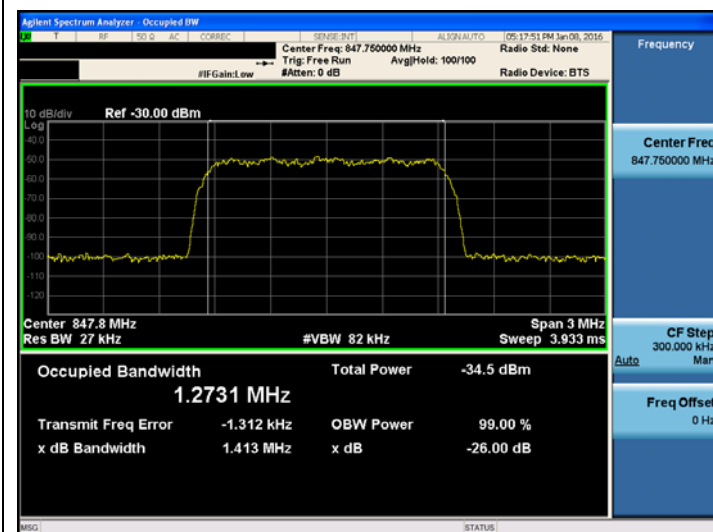

850 Cellular Band_GSM UL_Input

[850 Cellular Band AGC threshold Uplink Input

GSM Low]

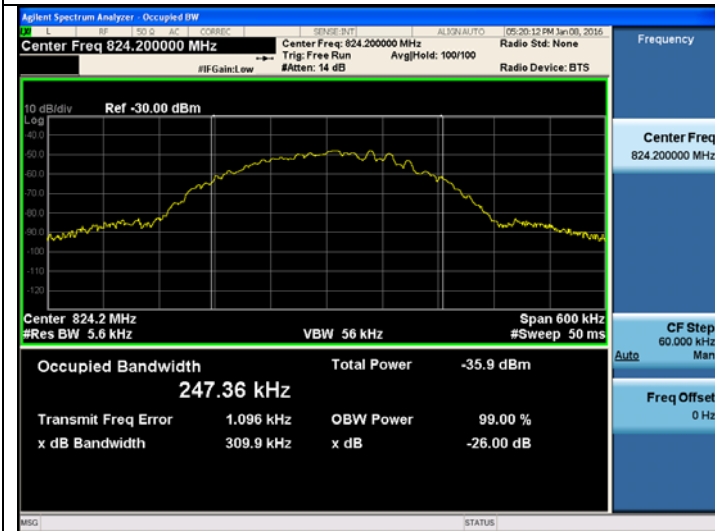


[850 Cellular Band AGC threshold Uplink Input

GSM Mid]



[850 Cellular Band AGC threshold Uplink Input

GSM High]

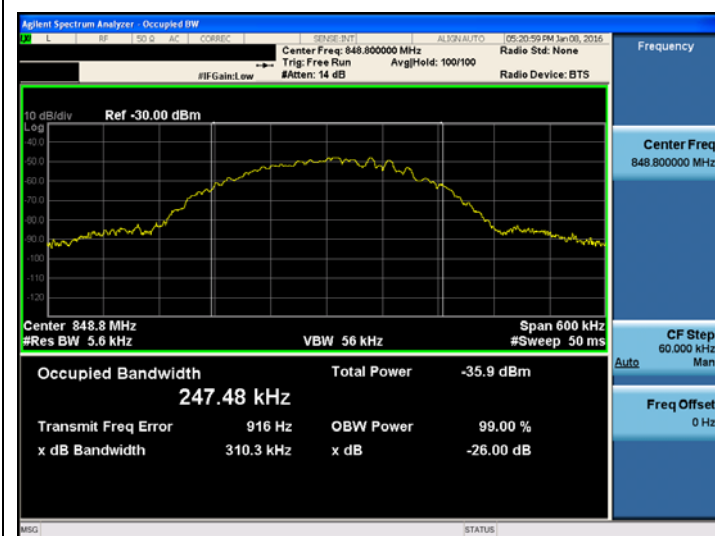

8. OUT OF BAND REJECTION

FCC Rules

Test Requirement(s): KDB 935210 D02 v03r02

Out of Band Rejection – Test for rejection of out of band signals. Filter freq. response plots are acceptable.

Test Procedures:

A modulated carrier generated by the signal generator carrier was connected to either the Downlink or Downlink RF port at a maximum level as determined by the spectrum analyzer was connected to either the Downlink or Downlink port depending on the circuitry being measured. Signal generator sweep from the frequency more lower than the operating frequency to the frequency more higher than it, find the product band filter characteristic

Test Results: The EUT complies with the requirements of this section.

Input Signal	Input Level (dBm)	Maximum Amp Gain
850 Cellular	UL : -42 dBm	UL : 37 dB


850 Cellular Band

[Uplink]


20 dB point frequency (MHz)	Output power (dBm)	Gain (dB)
821.72 ~ 851.24	-4.92	37.08

Plots of Passband Gain and Bandwidth & Out of Band Rejection

[850Cellular Band Downlink]

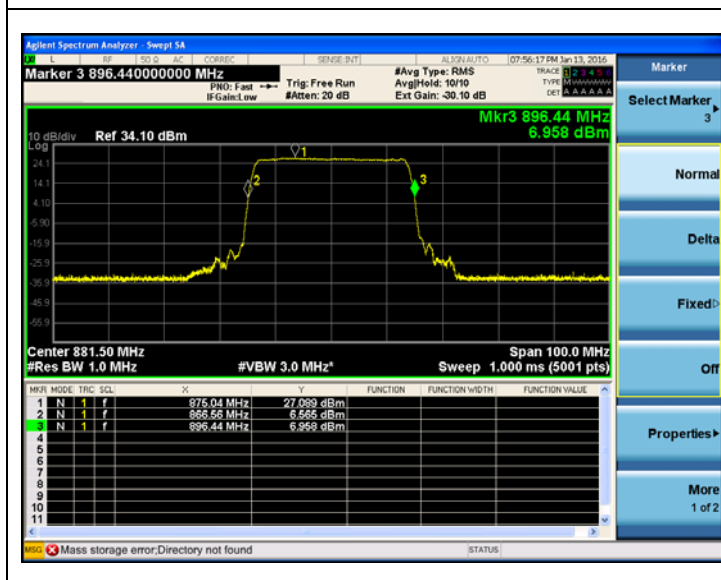

[850Cellular Band Uplink]

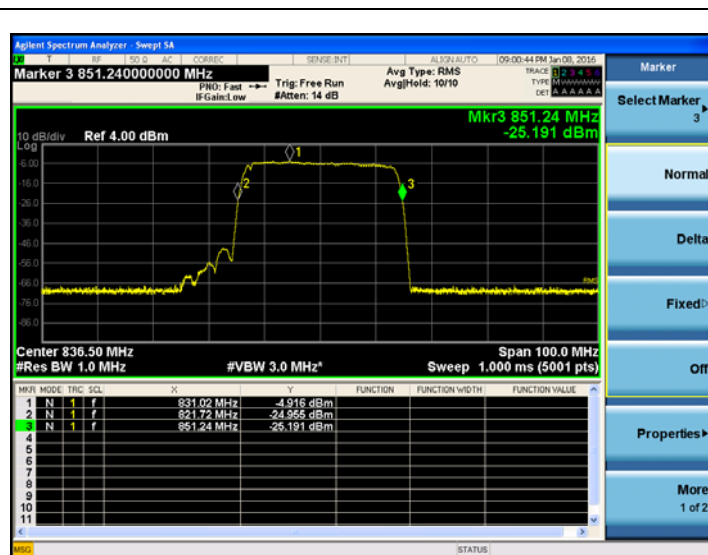

9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

FCC Rules

Test Requirement(s):

§ 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

Test Procedures: Measurements were in accordance with the test methods section 3.5.2 of KDB 935210 D05 v01r01.

1. General

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single channel boosters that cannot accommodate two simultaneous signals within the passband, can be excluded from the test stipulated in step a).

2. EUT out-of-band/block emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.

NOTE—If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support the two-tone test.

- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block of interest.
- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the emission bandwidth, 100 kHz, or 1 MHz)
- g) Set the VBW = 3 × RBW.
- h) Set the detector to power averaging (rms) detector.

- i) Set the Sweep time = auto-couple.
- j) Set the analyzer start frequency to the upper block edge frequency and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (i.e., rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat the procedure with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the input signals frequencies to the lower edge of the frequency block or band under examination.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz, or 3 MHz (for frequencies below and above 1 GHz, respectively), and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

3. EUT spurious emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described (e.g., 4.1 MHz OBW AWGN).
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).
- g) Set the VBW $\geq 3 \times$ RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.

NOTE—The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$

which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see §2.1057). Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report and provide tabular data, if required.
- p) Repeat the procedure with the input test signals tuned to a middle band/block frequency/channel and then a high band/block frequency/channel.
- q) Repeat entire procedure with the narrowband test signal.
- r) Repeat for all authorized frequency bands/blocks used by the EUT.

Test Results: The EUT complies with the requirements of this section. There were no Detectable Spurious emissions for this EUT.

Notes: In 9 KHz-150 KHz and 150 KHz-30 MHz bands, RBW was reduced to 1% and 10% of the reference bandwidth for measuring unwanted emission level (typically, 100KHz if the authorized frequency band is below 1GHz) and power was integrated. (1% = +20 dB, 10% = +10 dB)

Cellualr 800 MHz band

[Uplink]

Band Edge

	Channel	Frequency (MHz)	Emission Level
			(dBm)
LTE 5 MHz	Low	819.50	-67.67
	High	846.50	-72.73
LTE 10 MHz	Low	829.00	-72.55
	High	844.00	-72.61
CDMA	Low	818.25	-76.72
	High	847.75	-81.35
GSM	Low	824.20	-53.63
	High	848.80	-53.82
UMTS	Low	826.50	-70.75
	High	846.50	-73.90

* Note: 850 Cellular and SMR800 amplifiers are operating together, so we didn't performed test seperately about LTE 5 MHz, CDMA.

Spurious emissions

	Channel	Frequency (MHz)	Emission Level
			(dBm)
LTE 5 MHz	Low	819.50	-57.05
	Middle	833.00	-56.04
	High	846.50	-55.64
LTE 10 MHz	Low	829.00	-56.14
	Middle	-	-
	High	844.00	-56.49
CDMA	Low	818.25	-56.71
	Middle	833.00	-56.63
	High	847.75	-54.58
GSM	Low	824.20	-54.37
	Middle	836.50	-56.01
	High	848.80	-56.24
UMTS	Low	826.50	-56.91
	Middle	836.50	-56.59
	High	846.50	-56.14


* Note: 850 Cellular and SMR800 amplifiers are operating together, so we didn't performed test separately about LTE 5 MHz, CDMA.

Single channel Enhancer Plots of Spurious Emission Uplink


850Cellualr Band LTE

[850Cellualr Band LTE 5 MHz Uplink Low]


9kHz ~ 150kHz

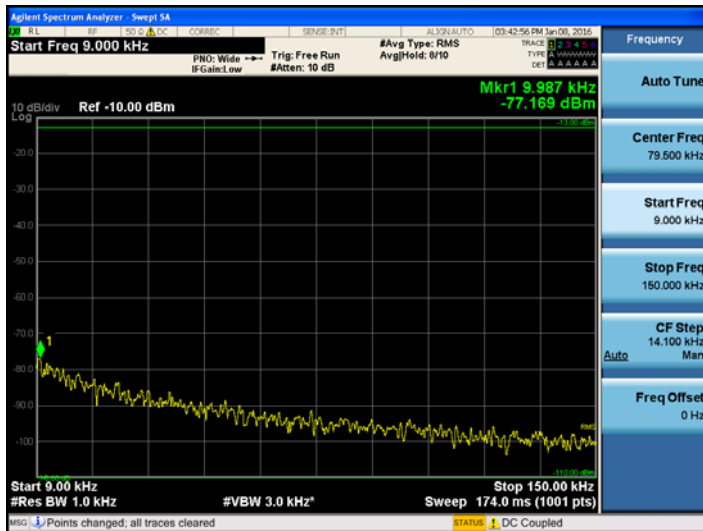

150kHz ~ 30MHz

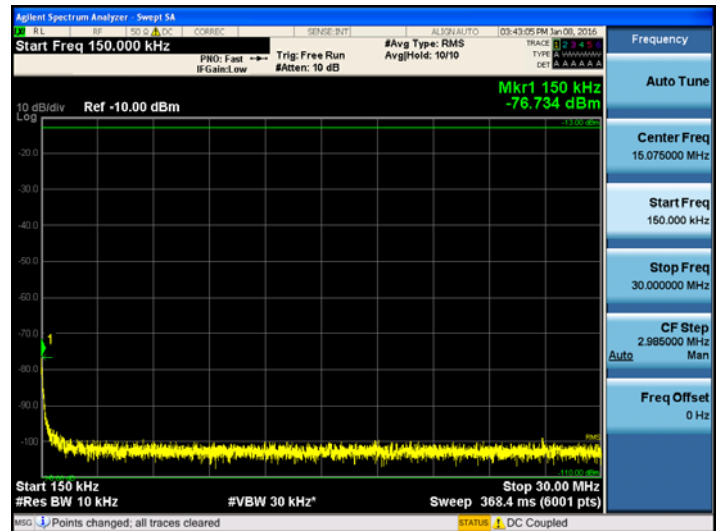

30MHz ~ 1GHz

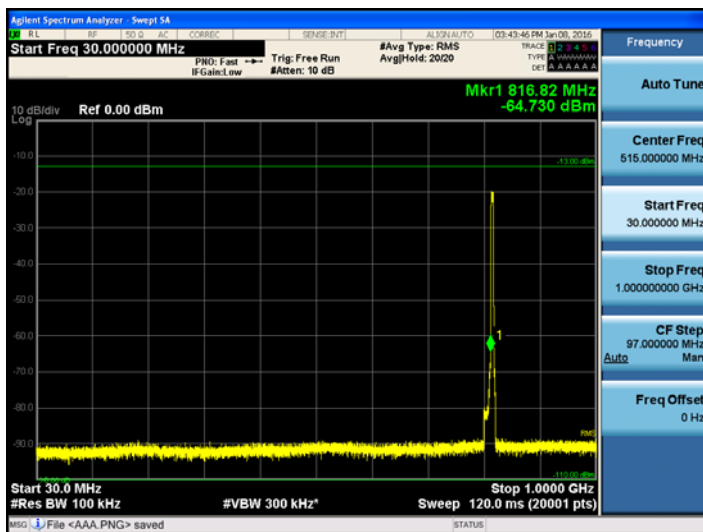

1GHz ~ 12.75GHz

