



BUREAU
VERITAS

Test Report No.: RF2309WDG0011-2



Certificate # 2951.01

TEST REPORT



Applicant	Tonly Technology Co., Ltd.
Address	Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guangdong Province, P.R. China

Manufacturer or Supplier	Sony Corporation
Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product	WIRELESS MICROPHONE
Brand Name	SONY
Model	YY7860E
Additional Model & Model Difference	N/A
Date of tests	Oct. 16, 2023 ~ Oct. 23, 2023

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Nov. 03, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 7

 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 7

 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 7

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 9

3.4 DESCRIPTION OF SUPPORT UNITS..... 9

3.5 CONFIGURATION OF SYSTEM UNDER TEST..... 9

3.6 DUTY CYCLE OF TESET SIGNAL 10

4 TEST TYPES AND RESULTS.....11

4.1 RADIATED EMISSION MEASUREMENT11

 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT11

 4.1.2 TEST INSTRUMENTS..... 12

 4.1.3 TEST PROCEDURES 13

 4.1.4 DEVIATION FROM TEST STANDARD 14

 4.1.5 TEST SETUP 14

 4.1.6 EUT OPERATING CONDITIONS 15

 4.1.7 TEST RESULTS 16

4.2 6DB BANDWIDTH MEASUREMENT 21

 4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 21

 4.2.2 TEST INSTRUMENTS..... 21

 4.2.3 TEST PROCEDURE..... 22

 4.2.4 DEVIATION FROM TEST STANDARD 22

 4.2.5 TEST SETUP 23

 4.2.6 EUT OPERATING CONDITIONS 23

 4.2.7 TEST RESULTS 24

4.3 CONDUCTED OUTPUT POWER 26

 4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT 26

 4.3.2 TEST SETUP 26



4.3.3	TEST INSTRUMENTS.....	27
4.3.4	TEST PROCEDURES	27
4.3.5	DEVIATION FROM TEST STANDARD	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	28
4.3.7.1	MAXIMUM PEAK OUTPUT POWER	28
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	28
4.4	POWER SPECTRAL DENSITY MEASUREMENT	30
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	30
4.4.2	TEST SETUP	30
4.4.3	TEST INSTRUMENTS.....	30
4.4.4	TEST PROCEDURE.....	30
4.4.5	DEVIATION FROM TEST STANDARD	30
4.4.6	EUT OPERATING CONDITION	30
4.4.7	TEST RESULTS	31
4.5	OUT OF BAND EMISSION MEASUREMENT	33
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	33
4.5.2	TEST SETUP	33
4.5.3	TEST INSTRUMENTS.....	33
4.5.4	TEST PROCEDURE.....	33
4.5.5	DEVIATION FROM TEST STANDARD	34
4.5.6	EUT OPERATING CONDITION	34
4.5.7	TEST RESULTS	35
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	37
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	38



BUREAU
VERITAS

Test Report No.: RF2309WDG0011-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2309WDG0011-2	Original release	Nov. 03, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by Alkaline Battery
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.80dB
	30MHz ~ 1GMHz	4.24dB
	1GHz ~ 18GHz	4.76dB
	18GHz ~ 40GHz	4.50dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WIRELESS MICROPHONE
MODEL NO.	YY7860E
ADDITIONAL MODEL	N/A
FCC ID	ZVA0YY7860E
NOMINAL VOLTAGE	DC 3V(1.5V*AA*2) From Alkaline Battery
MODULATION TECHNOLOGY	DTS
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2406-2474MHz
PEAK OUTPUT POWER	3.811mW (Max. Measured)
ANTENNA TYPE	PCB Antenna, 2dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2309WDG0011-2) for detailed product photo.



3.2 DESCRIPTION OF TEST MODES

16 channels are provided to 2.4GHz Wireless:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
1	2406	2	2410	3	2414	4	2418
5	2422	6	2434	7	2438	8	2442
9	2446	10	2450	11	2454	12	2458
13	2462	14	2466	15	2470	16	2474

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	Powered by New Battery with 2.4GHz Wireless

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.



RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	1 to 16	16	DTS	GFSK	2

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	1 to 16	1, 8, 16	DTS	GFSK	2

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	1 to 16	1, 8, 16	DTS	GFSK	2

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 55%RH	DC 3V from Alkaline Battery	Stalker
RE≥1G	25deg. C, 55%RH	DC 3V from Alkaline Battery	Stalker
PLC	N/A	N/A	N/A
APCM	25deg. C, 60%RH	DC 3V from Alkaline Battery	Jeffrey



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013


Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Radiated Emission Test

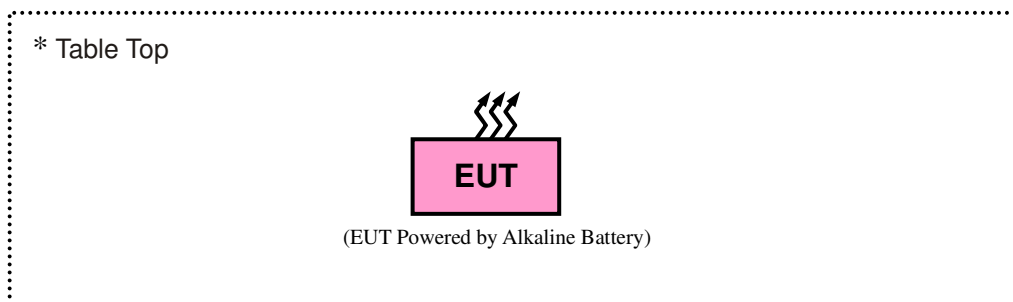


Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6 DUTY CYCLE OF TESET SIGNAL

Test Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	1/T Min. VBW (KHz)	VBW Setting
2.4GHZ WIRELESS	Not Applicable	Not Applicable	100	Not Applicable	10Hz

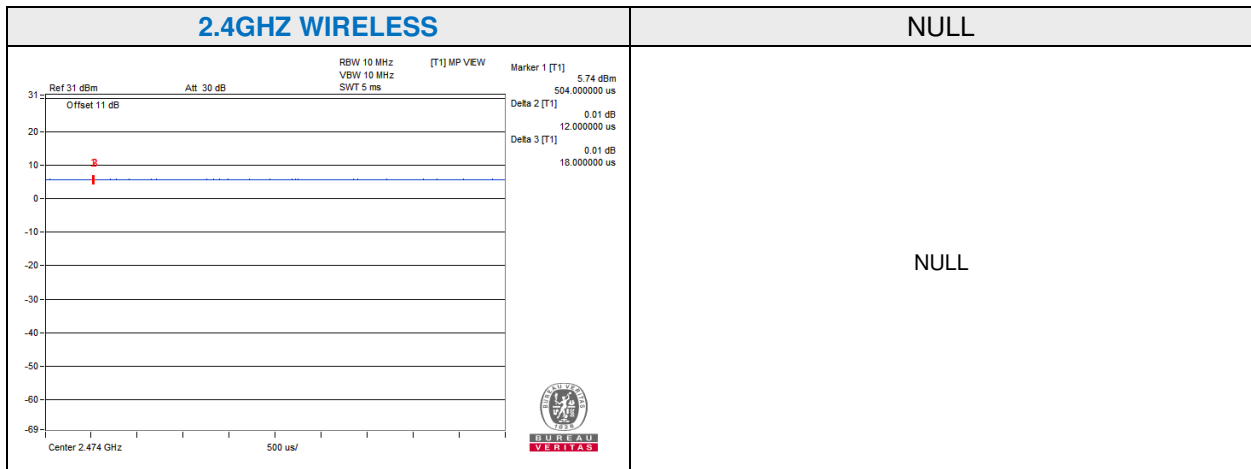



4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**4.1.2 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Jan. 10, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 05, 24
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May. 09, 24
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 06, 24
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Jan. 08, 24
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Apr. 01, 24
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 01, 24
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May. 20, 24
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 24, 24
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 16, 24
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:

1. The resolution bandwidth and video bandwidth of test receiver is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
- 4.All modes of operation were investigated and the worst-case emissions are reported.
- 5.The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

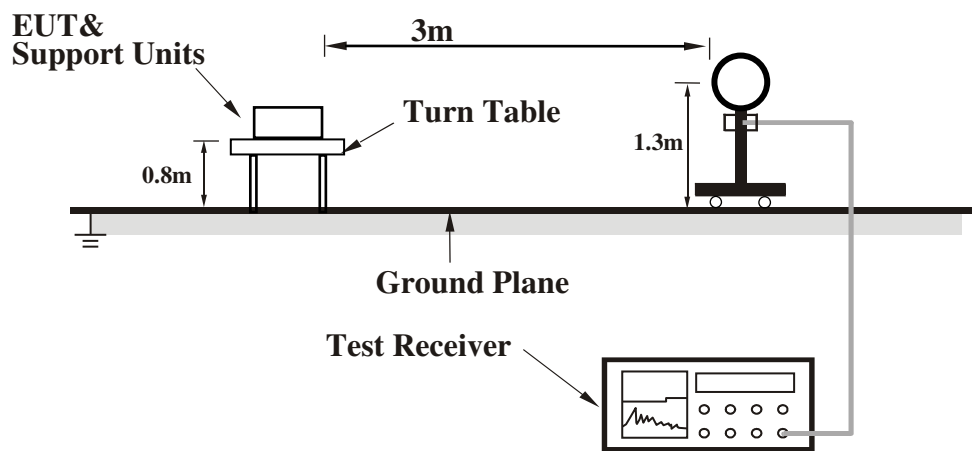


Below 1GHz test setup

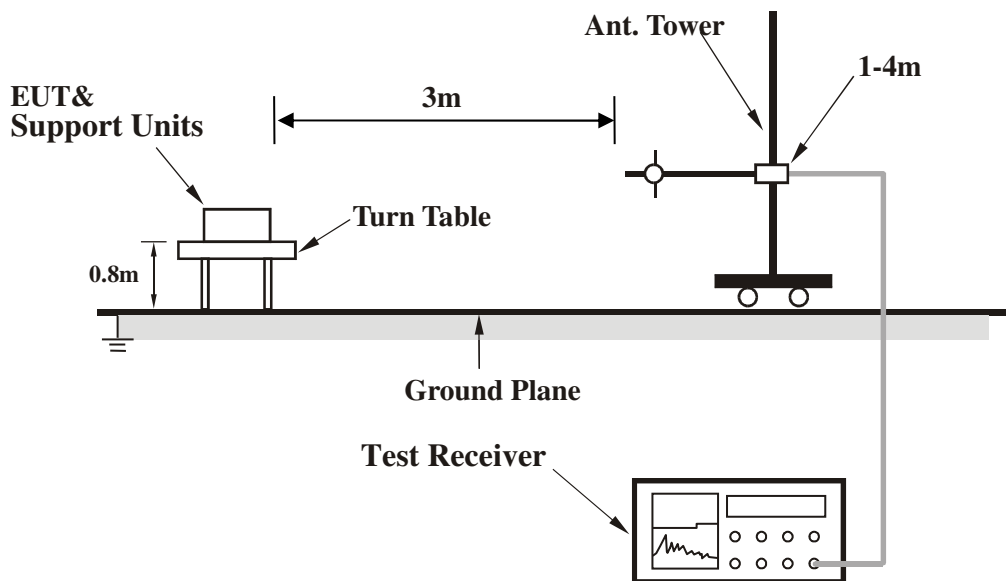



Above 1GHz test setup

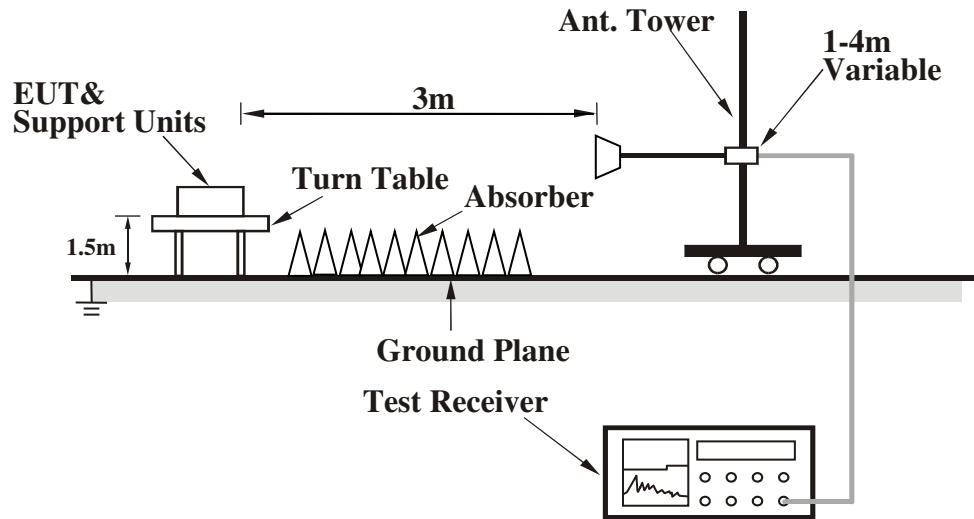

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


2.4GHz WIRELESS

CHANNEL	TX Channel 16	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.11	27.44 QP	40.00	-12.56	1.78 H	172	39.97	-12.53
2	65.75	23.37 QP	40.00	-16.63	1.93 H	187	36.56	-13.19
3	137.26	17.32 QP	43.50	-26.18	2.08 H	202	28.88	-11.56
4	291.15	18.10 QP	46.00	-27.90	2.24 H	217	28.25	-10.15
5	364.21	20.62 QP	46.00	-25.38	2.50 H	337	28.63	-8.01
6	496.35	23.85 QP	46.00	-22.15	2.50 H	358	28.65	-4.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

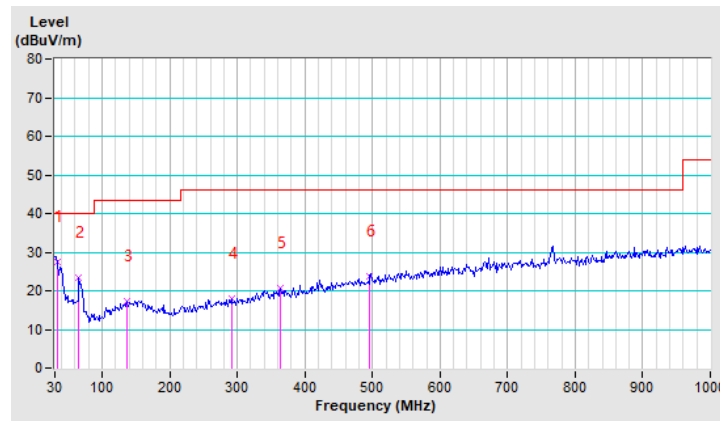




CHANNEL	TX Channel 16	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.66	25.60 QP	40.00	-14.40	1.18 V	150	37.88	-12.28
2	68.86	23.00 QP	40.00	-17.00	1.05 V	137	36.46	-13.46
3	106.17	20.76 QP	43.50	-22.74	1.00 V	122	35.12	-14.36
4	149.70	17.94 QP	43.50	-25.56	1.00 V	108	28.94	-11.00
5	283.38	18.33 QP	46.00	-27.67	1.00 V	95	28.80	-10.47
6	459.04	22.96 QP	46.00	-23.04	1.00 V	83	28.64	-5.68

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

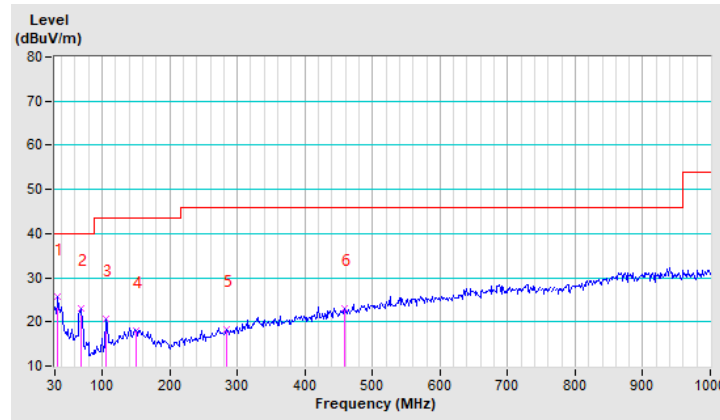



ABOVE 1GHz TEST DATA:

2.4GHZ WIRELESS

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.71 PK	74.00	-26.29	1.45 H	54	44.72	2.99
2	2390.00	36.27 AV	54.00	-17.73	1.45 H	54	33.28	2.99
3	*2406.00	101.23 PK	74.00	27.23	1.18 H	194	98.21	3.02
4	*2406.00	99.31 AV	54.00	45.31	1.18 H	194	96.29	3.02
5	4812.00	51.60 PK	74.00	-22.40	1.00 H	316	43.76	7.84
6	4812.00	44.48 AV	54.00	-9.52	1.00 H	316	36.64	7.84
7	#7218.00	55.10 PK	74.00	-18.90	1.15 H	282	44.72	10.38
8	#7218.00	46.18 AV	54.00	-7.82	1.15 H	282	35.80	10.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.01 PK	74.00	-27.99	1.00 V	12	43.02	2.99
2	2390.00	36.58 AV	54.00	-17.42	1.00 V	12	33.59	2.99
3	*2406.00	101.73 PK	74.00	27.73	1.00 V	22	98.71	3.02
4	*2406.00	99.60 AV	54.00	45.60	1.00 V	22	96.58	3.02
5	4812.00	54.52 PK	74.00	-19.48	1.00 V	1	46.68	7.84
6	4812.00	43.75 AV	54.00	-10.25	1.00 V	1	35.91	7.84
7	#7218.00	56.93 PK	74.00	-17.07	1.04 V	297	46.55	10.38
8	#7218.00	47.79 AV	54.00	-6.21	1.04 V	297	37.41	10.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 8	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2442.00	101.58 PK	74.00	27.58	1.21 H	320	98.49	3.09
2	*2442.00	99.87 AV	54.00	45.87	1.21 H	320	96.78	3.09
3	4884.00	55.26 PK	74.00	-18.74	1.33 H	59	47.24	8.02
4	4884.00	45.24 AV	54.00	-8.76	1.33 H	59	37.22	8.02
5	7326.00	56.26 PK	74.00	-17.74	1.34 H	149	45.52	10.74
6	7326.00	46.37 AV	54.00	-7.63	1.34 H	149	35.63	10.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2442.00	101.98 PK	74.00	27.98	1.00 V	35	98.89	3.09
2	*2442.00	99.65 AV	54.00	45.65	1.00 V	35	96.56	3.09
3	4884.00	55.29 PK	74.00	-18.71	1.00 V	210	47.27	8.02
4	4884.00	44.38 AV	54.00	-9.62	1.00 V	210	36.36	8.02
5	#7218.00	57.32 PK	74.00	-16.68	1.59 V	201	46.94	10.38
6	#7218.00	46.88 AV	54.00	-7.12	1.59 V	201	36.50	10.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 16	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2474.00	99.36 PK	74.00	25.36	2.00 H	193	96.20	3.16
2	*2474.00	97.21 AV	54.00	43.21	2.00 H	193	94.05	3.16
3	2483.50	44.07 PK	74.00	-29.93	2.00 H	193	40.90	3.17
4	2483.50	36.47 AV	54.00	-17.53	2.00 H	193	33.30	3.17
5	4948.00	52.92 PK	74.00	-21.08	1.00 H	210	44.74	8.18
6	4948.00	43.12 AV	54.00	-10.88	1.00 H	210	34.94	8.18
7	7422.00	54.20 PK	74.00	-19.80	1.33 H	52	43.13	11.07
8	7422.00	44.52 AV	54.00	-9.48	1.33 H	52	33.45	11.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2474.00	98.94 PK	74.00	24.94	1.00 V	8	95.78	3.16
2	*2474.00	97.45 AV	54.00	43.45	1.00 V	8	94.29	3.16
3	2483.50	46.19 PK	74.00	-27.81	1.00 V	8	43.02	3.17
4	2483.50	36.52 AV	54.00	-17.48	1.00 V	8	33.35	3.17
5	4948.00	55.66 PK	74.00	-18.34	1.06 V	6	47.48	8.18
6	4948.00	46.30 AV	54.00	-7.70	1.06 V	6	38.12	8.18
7	7422.00	54.54 PK	74.00	-19.46	2.00 V	360	43.47	11.07
8	7422.00	43.69 AV	54.00	-10.31	2.00 V	360	32.62	11.07

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Jan. 11, 24
Power Meter	Anritsu	ML2495A	1139001	Jul. 11, 24
Power Sensor	Anritsu	MA2411B	1531155	Jul. 11, 24
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 15, 24
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 11, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 11, 24
Signal Generator	Agilent	N5183A	MY50140980	Jul. 23, 24
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 24
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.2.3 TEST PROCEDURE


- a. Set RBW = 100 kHz.
- b. Set the video bandwidth (VBW) ≥ 3 RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

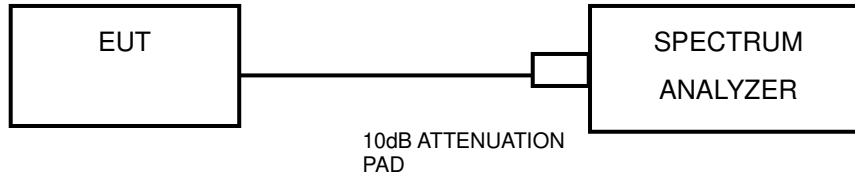

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.2.7 TEST RESULTS

2.4GHZ WIRELESS

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2406	1.41	0.5	PASS
8	2442	1.38	0.5	PASS
16	2474	1.33	0.5	PASS

CH 1

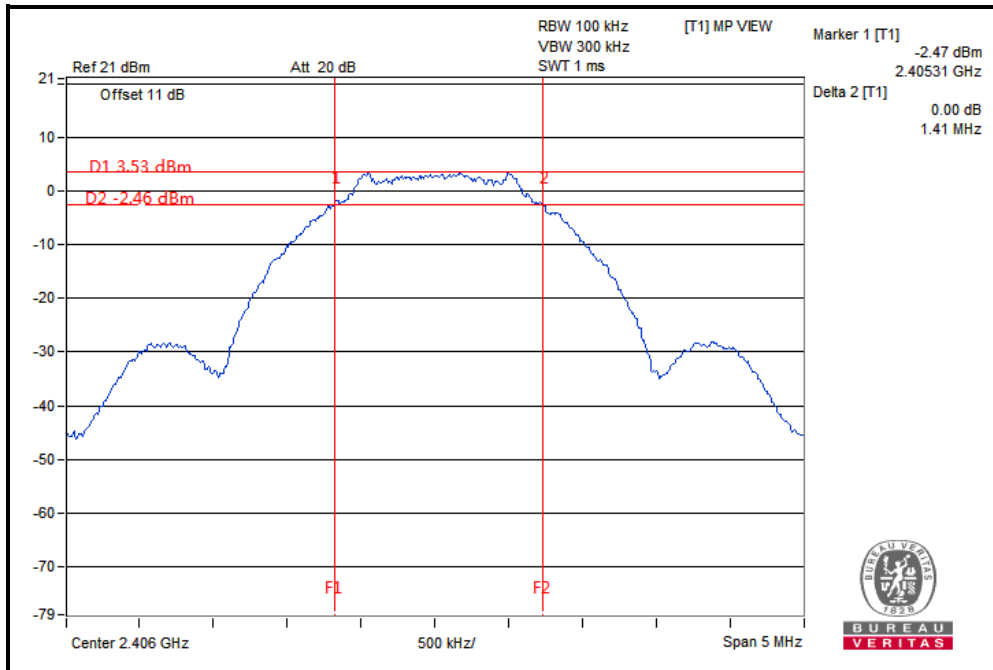





BUREAU VERITAS

Test Report No.: RF2309WDG0011-2

CH 8

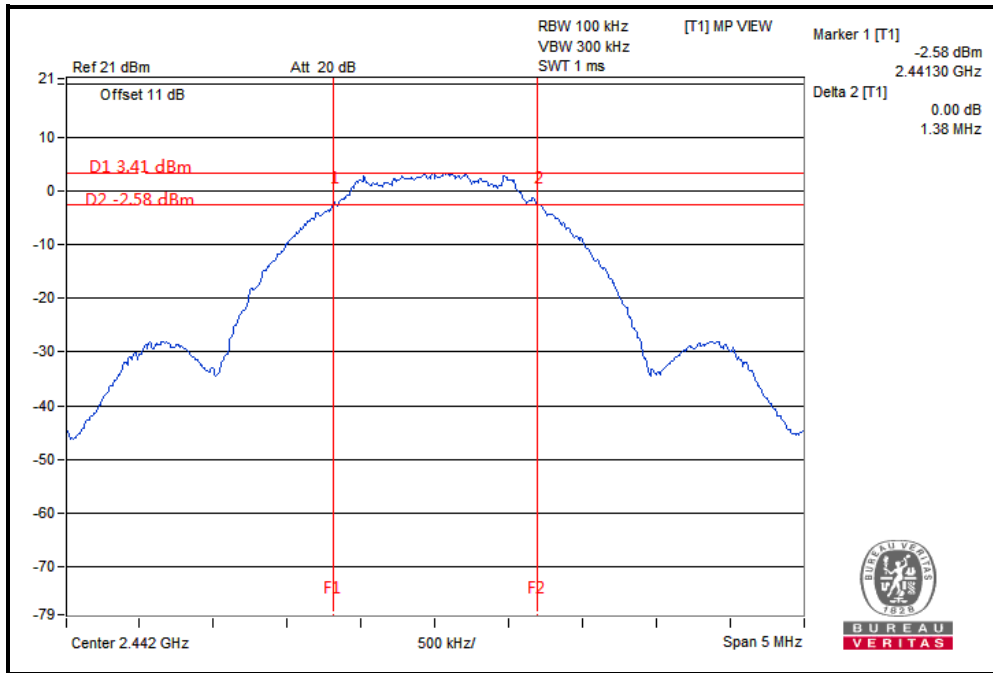

CH 16

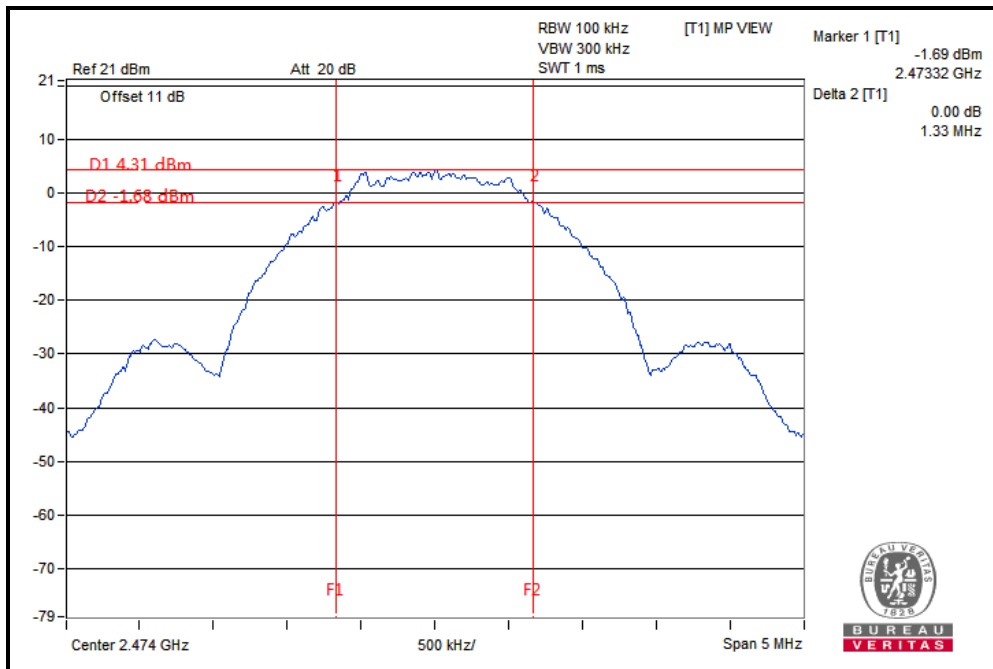

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT


For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.3.2 TEST SETUP

MAXIMUM PEAK OUTPUT POWER :

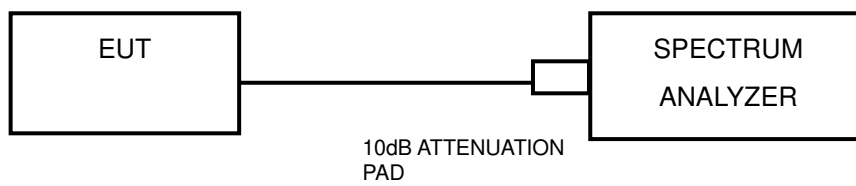

AVERAGE OUTPUT POWER:

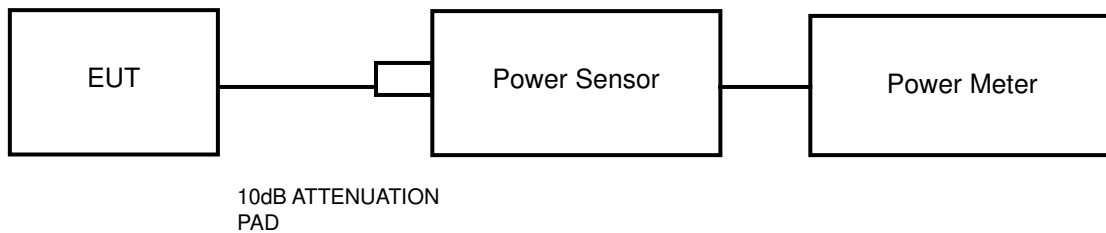



4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Jan. 11, 24
Power Meter	Anritsu	ML2495A	1139001	Jul. 11, 24
Power Sensor	Anritsu	MA2411B	1531155	Jul. 11, 24
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 15, 24
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 11, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 11, 24
Signal Generator	Agilent	N5183A	MY50140980	Jul. 23, 24
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 24
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTES: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.4 TEST PROCEDURES

MAXIMUM PEAK OUTPUT POWER:

- a. Set the span to approximately five times the 20 dB bandwidth, centered on a hopping channel.
- b. Set the RBW = 3 MHz, VBW \geq 3 x RBW, Detector = peak.
- c. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.

AVERAGE OUTPUT POWER:

Use the peak marker function to determine the maximum amplitude level. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.



4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

2.4GHZ WIRELESS

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	EIRP (mW)	PEAK POWER LIMIT (W)	EIRP LIMIT (W)	PASS/FAIL
1	2406	5.29	3.381	5.358	1	/	PASS
8	2442	5.20	3.311	5.248	1	/	PASS
16	2474	5.81	3.811	6.039	1	/	PASS

Note: EIRP=Conducted output power + Ant gain(2dBi)

4.3.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

2.4GHZ WIRELESS

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2406	5.01
8	2442	5.10
16	2474	5.32




**BUREAU
VERITAS**

Test Report No.: RF2309WDG0011-2

Peak power test plot

2.4GHZ WIRELESS

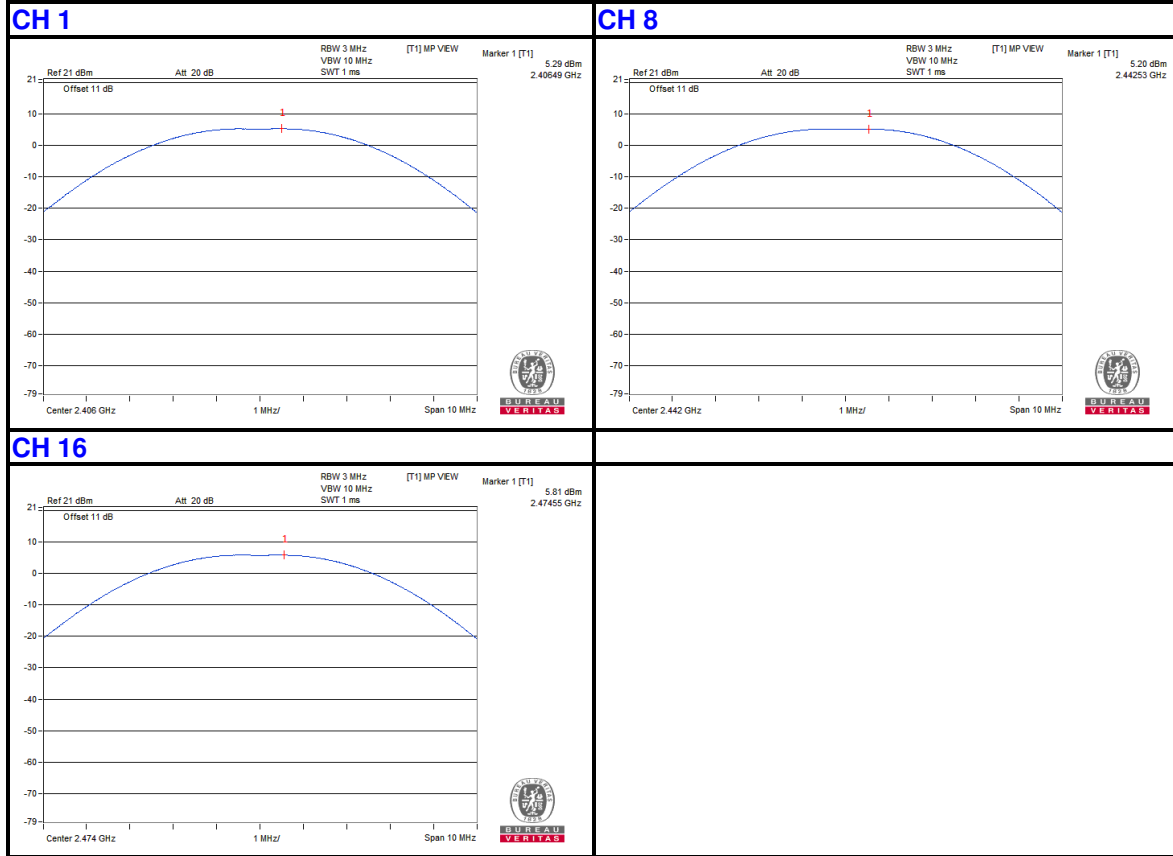

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURE

- a. Set the span to 1.5 times the DTS bandwidth
- b. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
- c. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- d. Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS**


Test Report No.: RF2309WDG0011-2

4.4.7 TEST RESULTS

2.4GHZ WIRELESS

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2406	-7.23	8	PASS
8	2442	-8.62	8	PASS
16	2474	-6.73	8	PASS

CH 1

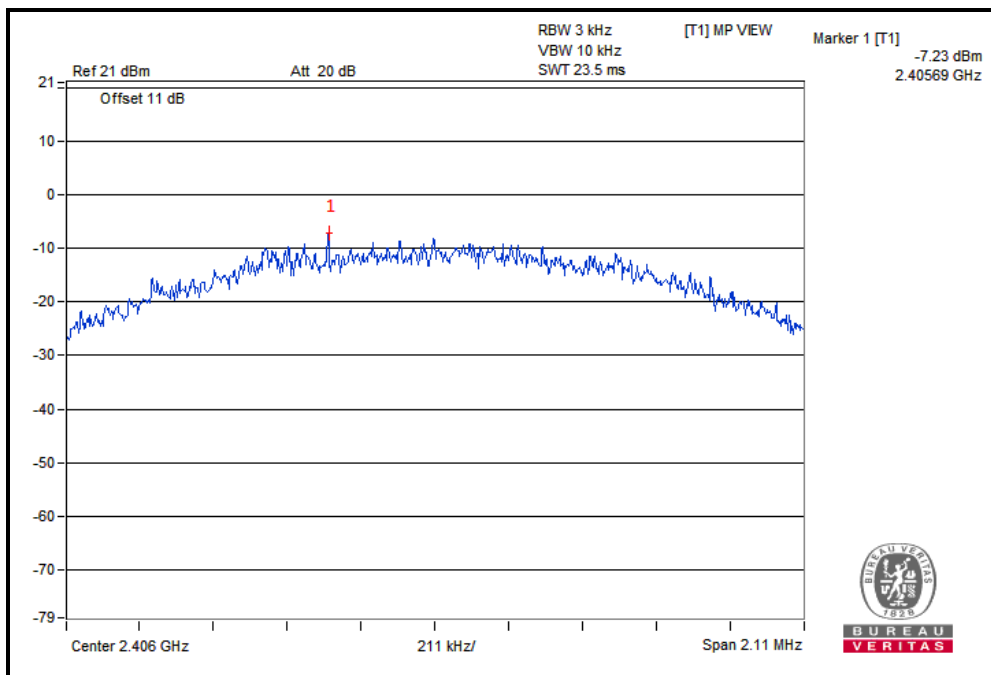





**BUREAU
VERITAS**

Test Report No.: RF2309WDG0011-2

CH 8

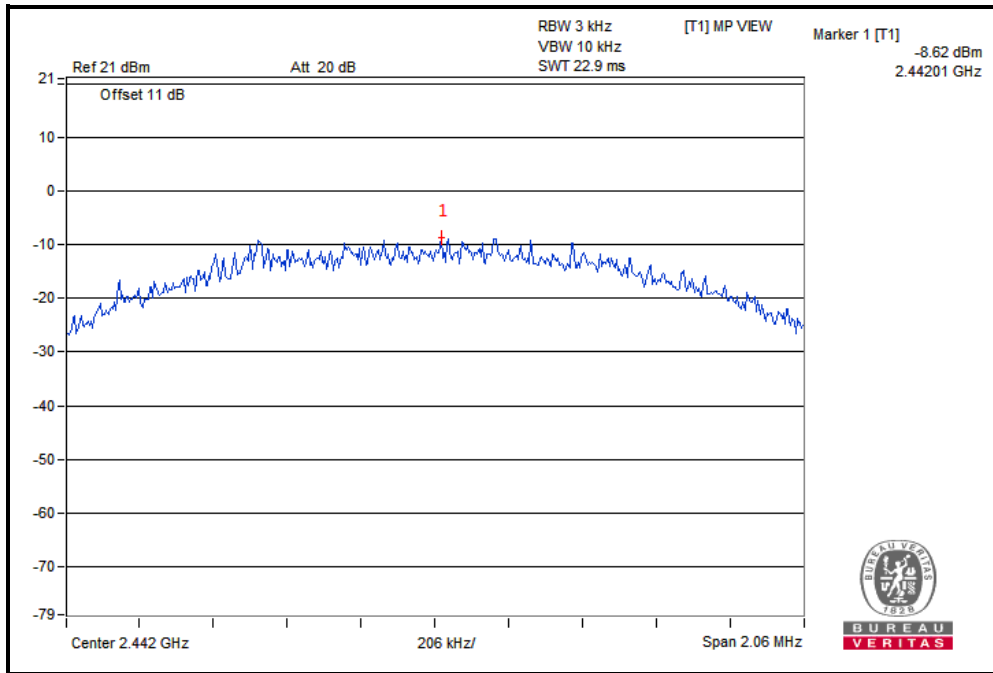

CH 16

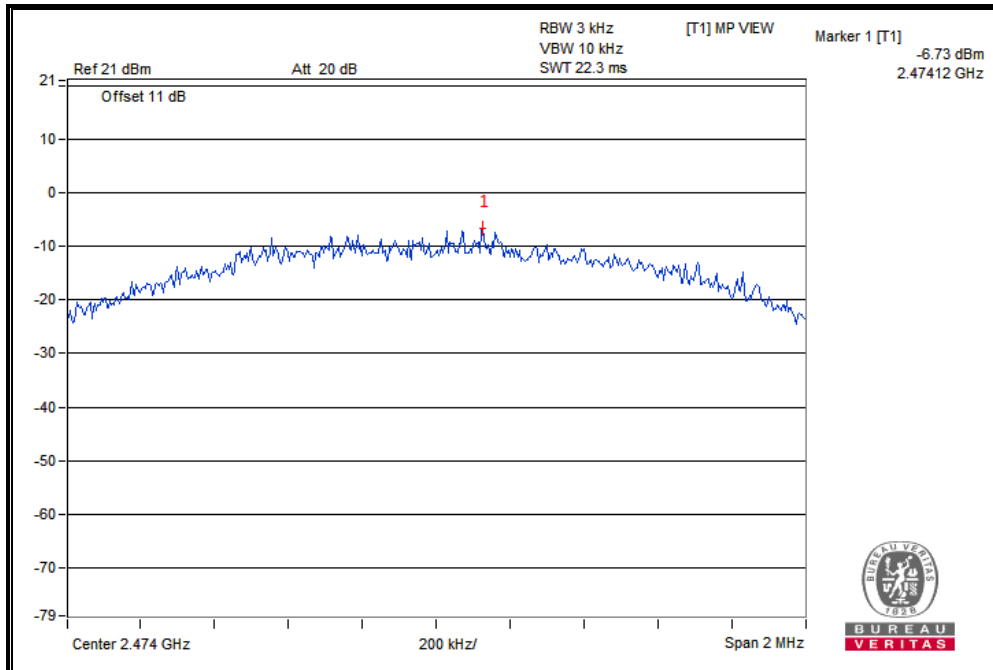

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

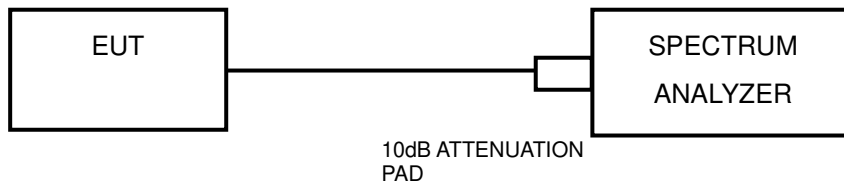

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

- a. Set the RBW = 100 kHz.
- b. Set the VBW \geq 300 kHz.
- c. Detector = peak.
- d. Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

- a. Set RBW = 100 kHz.
- b. Set VBW \geq 300 kHz.
- c. Set span to encompass the spectrum to be examined
- d. Detector = peak.
- e. Trace Mode = max hold.
- f. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU VERITAS

Test Report No.: RF2309WDG0011-2


4.5.7 TEST RESULTS

2.4GHZ WIRELESS


CH 1

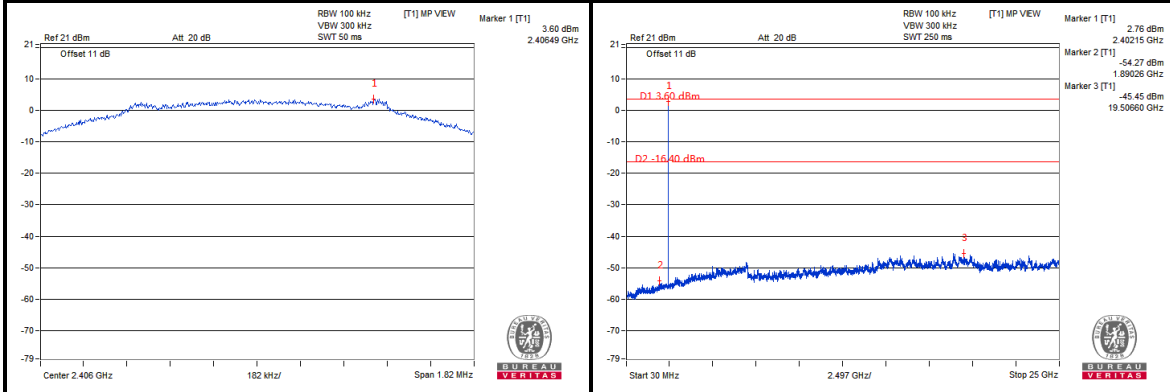

CH 8

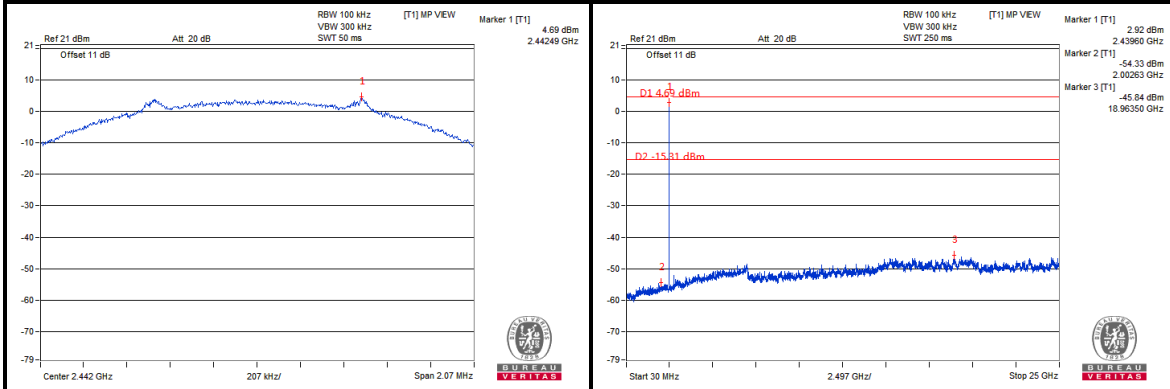

CH 16

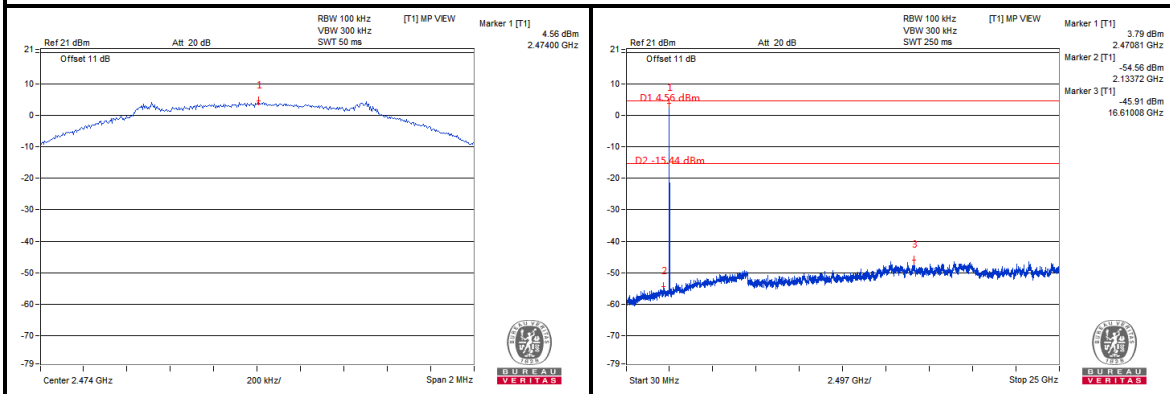

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dq@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF2309WDG0011-2

Band Edge:

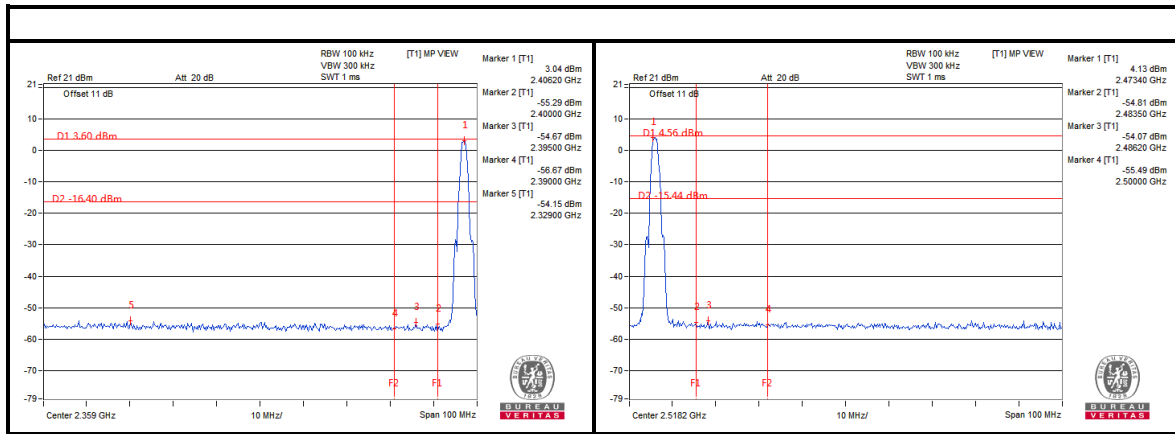

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF2309WDG0011-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF2309WDG0011-2

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---