

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

TCL Technoly Electronics (Huizhou) Co., Ltd.

Brand Name	Sony
System Name	HOME AUDIO SYSTEM
System Model No.	MHC-ECL77BT
EUT Name	COMPACT DISC Receiver
EUT Model Number	HCD-ECL77BT

FCC ID: ZVAMS00009

Prepared for : TCL Technoly Electronics (Huizhou) Co., Ltd.  
Secion 37, Zhongkai High-tech Development Zone,  
Huizhou City, Guangdong Province, P.R. China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F14119  
Date of Test : Mar. 21 ~ Apr. 08, 2014  
Date of Report : Apr. 30, 2014

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. Tested Supporting System Details .....	2-2
2.3. EUT Configuration and operation conditions for test.....	2-2
2.4. Test information .....	2-2
2.5. Test Facility.....	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2) .....	2-3
<b>3. POWER LINE CONDUCTED EMISSION MEASUREMENT .....</b>	<b>3-1</b>
3.1. Test Equipment .....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-2
3.4. Configuration of EUT on Test .....	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Conducted Emission at Mains Terminals Test Results .....	3-2
<b>4. RADIATED EMISSION MEASUREMENT .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit Standard: FCC 15.209 .....	4-3
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results .....	4-4
<b>5. CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result.....	5-1
<b>6. CARRIER FREQUENCY SEPARATION TEST .....</b>	<b>6-1</b>
6.1. Test Equipment .....	6-1
6.2. Limit.....	6-1
6.3. Test Results.....	6-1
<b>7. 20 DB BANDWIDTH TEST .....</b>	<b>7-1</b>
7.1. Test Equipment .....	7-1
7.2. Limit.....	7-1
7.3. Test Results.....	7-1
<b>8. NUMBER OF HOPPING FREQUENCY TEST .....</b>	<b>8-1</b>
8.1. Test Equipment .....	8-1
8.2. Limit.....	8-1
8.3. Test Results.....	8-1
<b>9. DWELL TIME .....</b>	<b>9-1</b>

9.1.	Test Equipment .....	9-1
9.2.	Limit.....	9-1
9.3.	Test Results .....	9-1
<b>10.</b>	<b>MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>10-1</b>
10.1.	Test Equipment .....	10-1
10.2.	Limit.....	10-1
10.3.	Test Procedure.....	10-1
10.4.	Test Results .....	10-1
<b>11.</b>	<b>BAND EDGE COMPLIANCE TEST .....</b>	<b>11-1</b>
11.1.	Test Equipment .....	11-1
11.2.	Limit.....	11-1
11.3.	Test Produce .....	11-1
11.4.	Test Results .....	11-1
<b>12.</b>	<b>DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>12-1</b>
<b>13.</b>	<b>PHOTOGRAPH OF TEST .....</b>	<b>13-1</b>
13.1.	Photos of Power Line Conducted Emission Test.....	13-1
13.2.	Photos of Radiated Emission Test.....	13-2
<b>14.</b>	<b>PHOTOGRAPH OF EUT .....</b>	<b>14-1</b>

### TEST REPORT CERTIFICATION

Applicant : TCL Technoly Electronics (Huizhou) Co., Ltd.  
 Manufacturer : Sony Corporation  
 FCC ID : ZVAMS00009

(A) EUT Description & Model NO. & Brand Name :	Brand Name	Sony
	System Name	HOME AUDIO SYSTEM
	System Model No.	MHC-ECL77BT
	EUT Name	COMPACT DISC Receiver
	EUT Model Number	HCD-ECL77BT

(B) Serial No. : N/A  
 (C) Power Supply : AC 120V, 60Hz  
 (D) Test Vovtage : AC 120V/60Hz

Tested for comply with:  
 FCC Rules and Regulations Part 15 Subpart C: 2013  
 Test procedure used:  
 ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Mar. 21 ~ Apr. 08, 2014 Report of date: Apr. 30, 2014

Prepared by : Miya Zhou / Assistant      Reviewed by : Sunny Lu / Assistant Manager

信華科技(深圳)有限公司  
 Audix Technology (Shenzhen) Co., Ltd.  
 EMC 部門報告專用章

Stamp only for EMC Dept. Report

Signature: David Jin 4.30

Approved & Authorized Signer : David Jin / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10: 2013	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10: 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10: 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10: 2013	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10: 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10: 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10: 2013	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1)\ ANSI C63.10: 2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10: 2013	PASS

N/A is an abbreviation for Not Applicable.



## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name & Model Number & Brand Name	Brand Name	Sony
	System Name	HOME AUDIO SYSTEM
	System Model No.	MHC-ECL77BT
	EUT Name	COMPACT DISC Receiver
	EUT Model Number	HCD-ECL77BT

FCC ID : ZVAMS00009

Radio : Bluetooth V3.0 +EDR

Operation Frequency : 2402-2480MHz

Number of Channel : 79

Modulation Technology : GFSK,  $\pi/4$ DQPSK, 8DPSK

Antenna Assembly Gain : PCB Layout Inverted, 2.12dBi PK Gain

Applicant : TCL Technoly Electronics (Huizhou) Co., Ltd.  
Secion 37, Zhongkai High-tech Development Zone, Huizhou City,  
Guangdong Province, P.R. China.

Manufacturer : Sony Corporation  
1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan

Remote : Manufacture: Sony, M/N: RM-AMU211

Antenna Cord : Shielded, Detachable, 1.2m

Date of Test : Mar. 21 ~ Apr. 08, 2014


Date of Receipt : Mar. 21, 2014

Sample Type : Prototype production

### 2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	iPod	-	APPLE	A1446	DCYJL600F0GQ	<input checked="" type="checkbox"/> CCC
2.	USB Memory	---	Sony	BNP-1	---	---

### 2.3. EUT Configuration and operation conditions for test.

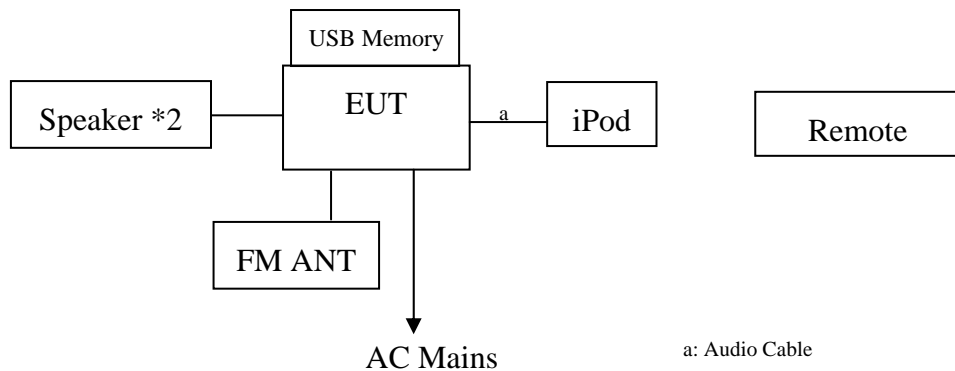

Speaker name: SPEAKER SYSTEM  
 Speaker Model No: SS-EC719iP  
**(EUT: COMPACT DISC Receiver)**

### 2.4. Test information

The test software “bluesuite.exe” was used to control EUT work in Continuous TX mode, and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
Tx Mode 8-DPSK modulation	3	Low: CH 0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

Note:  $\pi/4$ DQPSK modulation is same type modulation with 8-DPSK, and according exploratory test, 8-DPSK will have worse emissions, so the final test were only performed with GFSK and 8-DPSK modulation.

**2.5. Test Facility**

## Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
 No. 6, Ke Feng Rd., 52 Block, Shenzhen  
 Science & Industrial Park, Nantou,  
 Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA  
 Registration Number: 90454  
 Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA  
 Registration Number: 794232  
 Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada  
 Registration Number: IC 5183A-1  
 Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany  
 Registration No: D-PL-12151-01-00  
 Valid Date: Dec.15, 2016

: Accredited by NVLAP, USA  
 NVLAP Code: 200372-0  
 Valid Date: Mar.31, 2015

**2.6. Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.08 dB(9KHz to 150KHz)
	3.1 dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.22 dB(30~200MHz, Polarize: H)
	3.23 dB(30~200MHz, Polarize: V)
	3.49 dB(200M~1GHz, Polarize: H)
	3.39 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	4.97 dB(1~6GHz, Distance: 3m)
	4.99 dB(6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%




### 3. POWER LINE CONDUCTED EMISSION MEASUREMENT

#### 3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.18,13	1 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.31, 13	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	100429	Jan.22, 14	1 Year
4.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 13	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 13	1 Year
6.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 13	1 Year
7.	RF Cable	Hubersuhner	RG58	0100.6954.20#	Jan.22, 14	1 Year
8.	Coaxial Switch	Anritsu	MP59B	M50564	May.08, 13	1 Year
9.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101838	Jan.22, 14	1 Year
10.	Oscilloscope	Tektronix	TDS3052B	B026036	May.16, 13	1 Year
11.	MPEG2 Measurement Generator	ROHDE&SCHWARZ	DVG	100319	Dec.11, 13	1 Year
12.	TV Transmitter	ROHDE&SCHWARZ	SFQ	100521	May.08, 13	1 Year
13.	Signal Generator	HP	8648A	3625U00573	May.08, 13	1 Year
14.	Pattern Generator	Philips	PM5418	LO625020	May.08, 13	1 Year

#### 3.2. Block Diagram of Test Setup

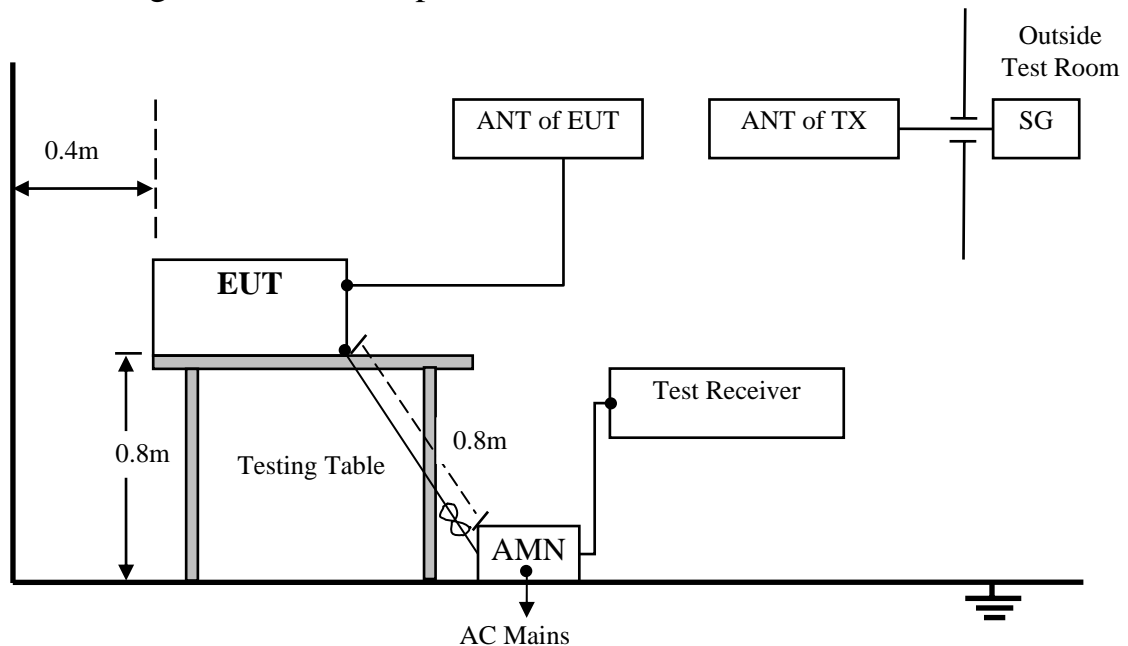

### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. COMPACT DISC Receiver (EUT)

Model Number : HCD-ECL77BT

Serial Number : N/A

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Let the EUT work in test mode (TX Mode) and measure it.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2013 on conducted Emission test.

The bandwidth of test receiver (R&S TEST RECEIVER ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 3.7.

### 3.7. Conducted Emission at Mains Terminals Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

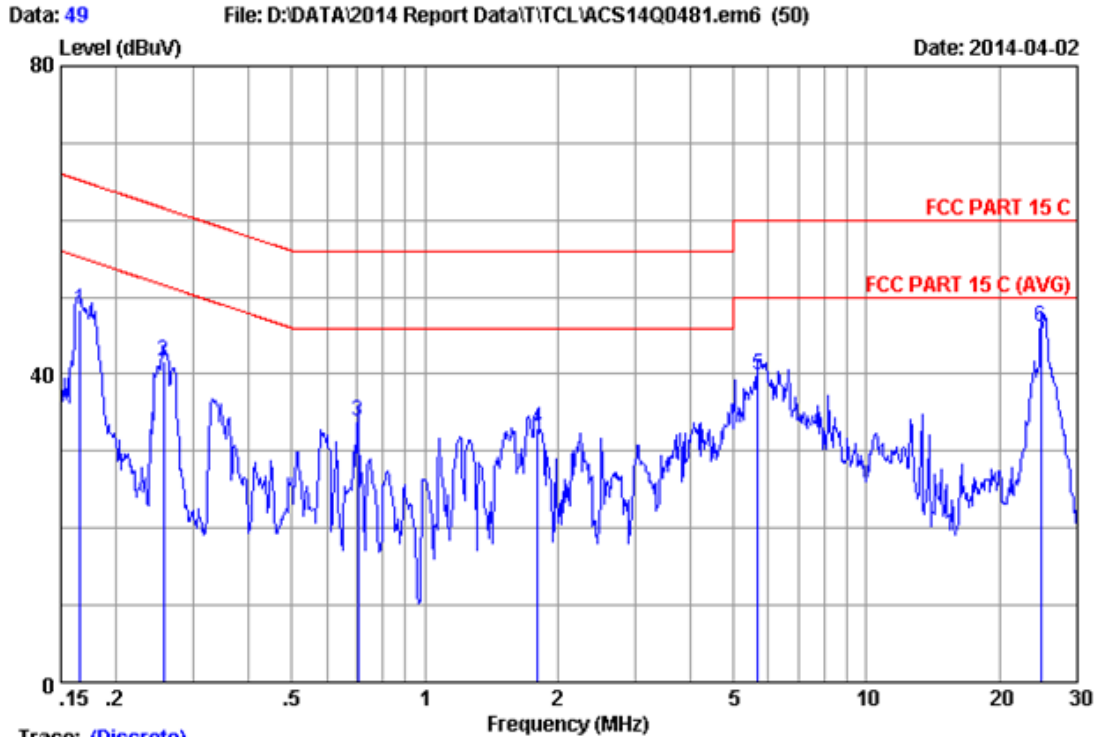


Trace: (Discrete)

Site no :1#conduction Data No :49  
 Dis./Ant. \*\*: 2013 KNW-242C-VA  
 Limit :FCC PART 15 C  
 Env./Ins. :23.9\*C/47% Engineer :Leo-Li  
 EUT :COMPACT DISC Receiver M/N:HCD-ECL77BT  
 Power Rating :AC 120V/60Hz  
 Test Mode :Tx Mode

No	Freq (MHz)	Cable Loss (dB)	Reading (dBUA)	Emission Level (dBUA)	Limits (dBUA)	Margin (dB)	Remark
1	0.16589	9.87	38.21	48.26	65.16	16.90	QP
2	0.25615	9.88	31.68	41.73	61.56	19.83	QP
3	0.70468	9.89	23.81	33.86	56.00	22.14	QP
4	1.800	9.91	22.82	32.92	56.00	23.08	QP
5	5.683	9.96	29.73	39.97	60.00	20.03	QP
6	24.790	10.13	35.17	46.05	60.00	13.95	QP

Remarks: 1.Emission Level=Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

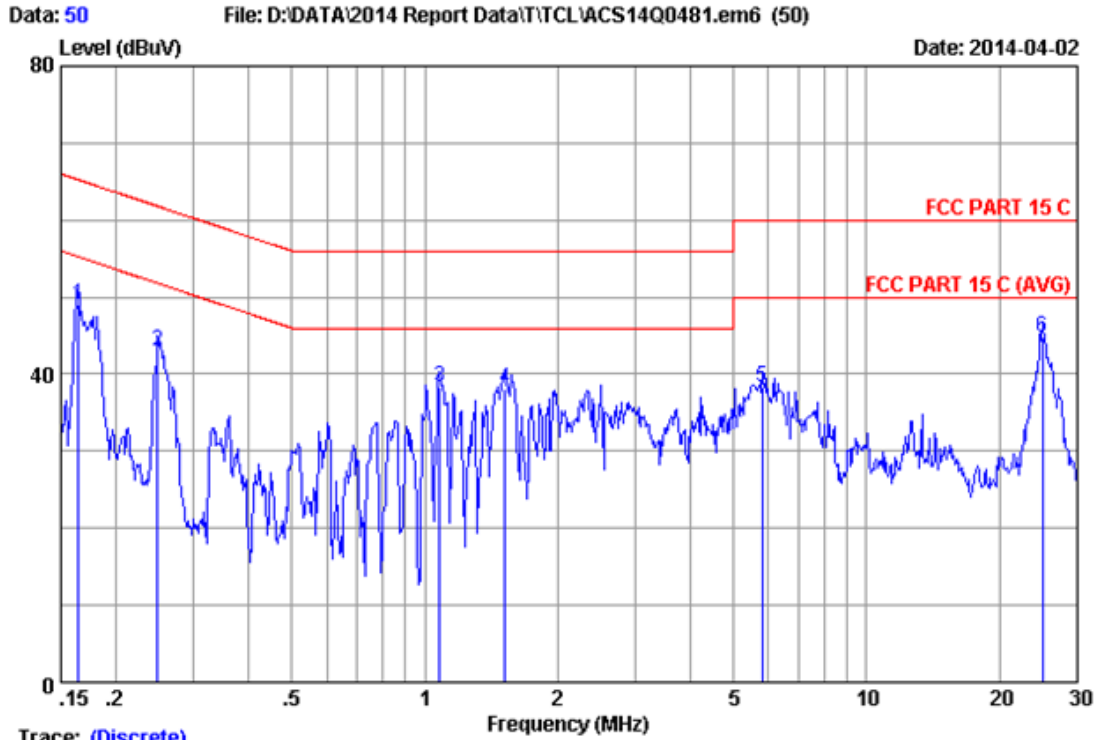

Trace: (Discrete)

Site no :1#conduction Data No :50  
 Dis./Ant. \*\*: 2013 KNW-242C-VB  
 Limit :FCC PART 15 C  
 Env./Ins. :23.9°C/47% Engineer :Leo-Li  
 EUT :COMPACT DISC Receiver M/N:HCD-ECL77BT  
 Power Rating :AC 120V/60Hz  
 Test Mode :Tx Mode

No	Freq (MHz)	Cable Loss (dB)	Reading (dBuA)	Emission Level (dBuA)	Limits (dBuA)	Margin (dB)	Remark
1	0.16414	9.87	38.93	49.07	65.25	16.18	QP
2	0.24814	9.88	32.77	42.91	61.82	18.91	QP
3	1.082	9.89	28.10	38.29	56.00	17.71	QP
4	1.519	9.90	27.83	38.04	56.00	17.96	QP
5	5.805	9.96	27.98	38.36	60.00	21.64	QP
6	25.055	10.13	33.81	44.89	60.00	15.11	QP

Remarks: 1.Emission Level=Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION MEASUREMENT

### 4.1. Test Equipment

#### 4.1.1. Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.24, 13	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 13	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 13	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 13	1 Year
5	Bilog Antenna	TESEQ	CBL6112D	35375	May.30, 13	1 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	M74389	May.08, 13	1 Year

#### 4.1.2. Frequency rang: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 13	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 13	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 13	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 13	1 Year
6	Horn Antenna	EMCO	3116	00060089	Aug.28, 13	1 Year

### 4.2. Block Diagram of Test Setup

#### 4.2.1. For frequency range 30MHz-1000MHz

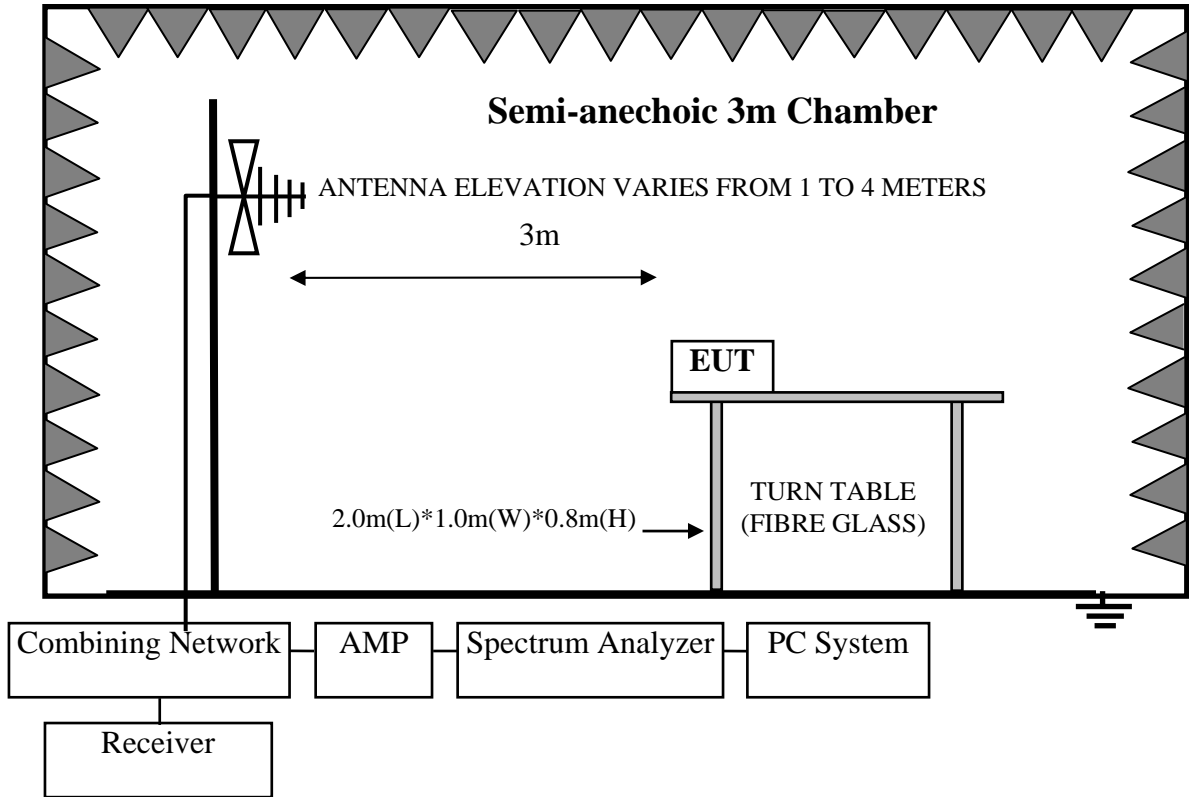

#### 4.2.2. For frequency range 1GHz-25GHz

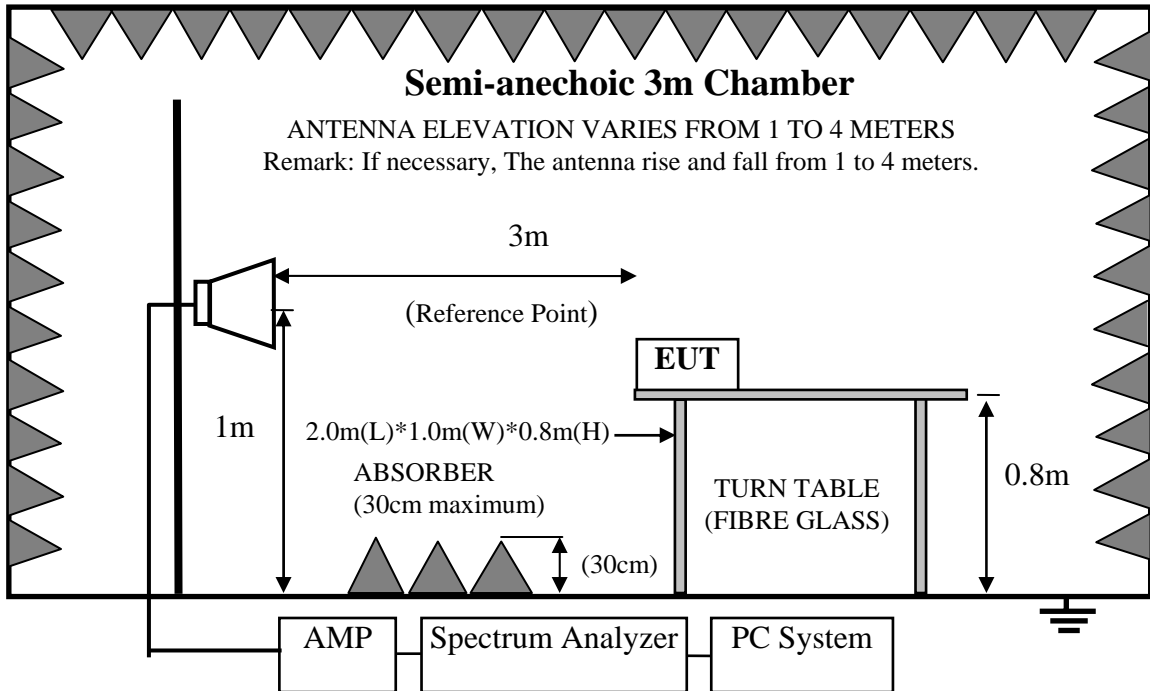



4.3. Radiated Emission Limit Standard: FCC 15.209

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. COMPACT DISC Receiver (EUT)

Model Number : HCD-ECL77BT  
 Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 4.5.2. Turned on the power of all equipment.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

The test was made on EUT at the normal use position

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement and RBW is set at 1MHz, VBW is set at 10Hz for average emission measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results



**PASS.**

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is 8.77dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.


Duty cycle:  $0.448\text{ms} / 1.230\text{ms} * 100\% = 36.42\%$

Duty cycle factor =  $20\log (1/\text{duty cycle}) = 8.77$

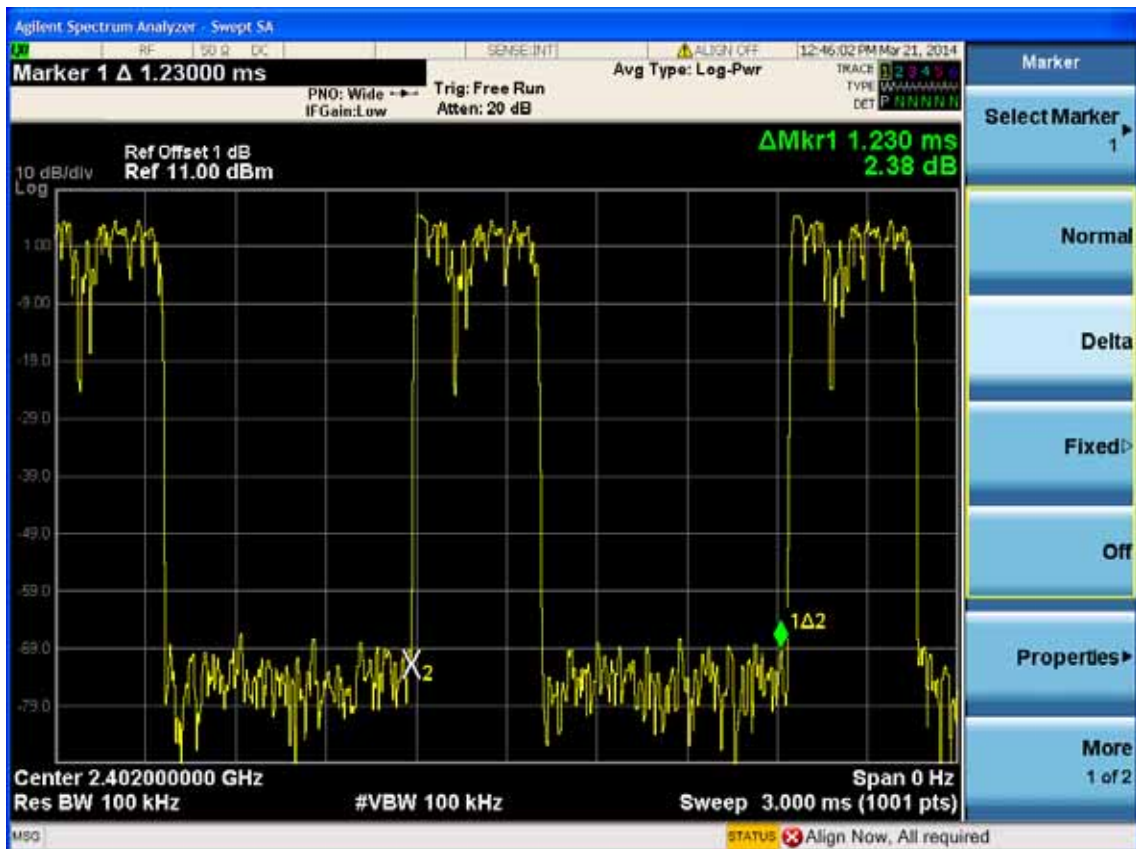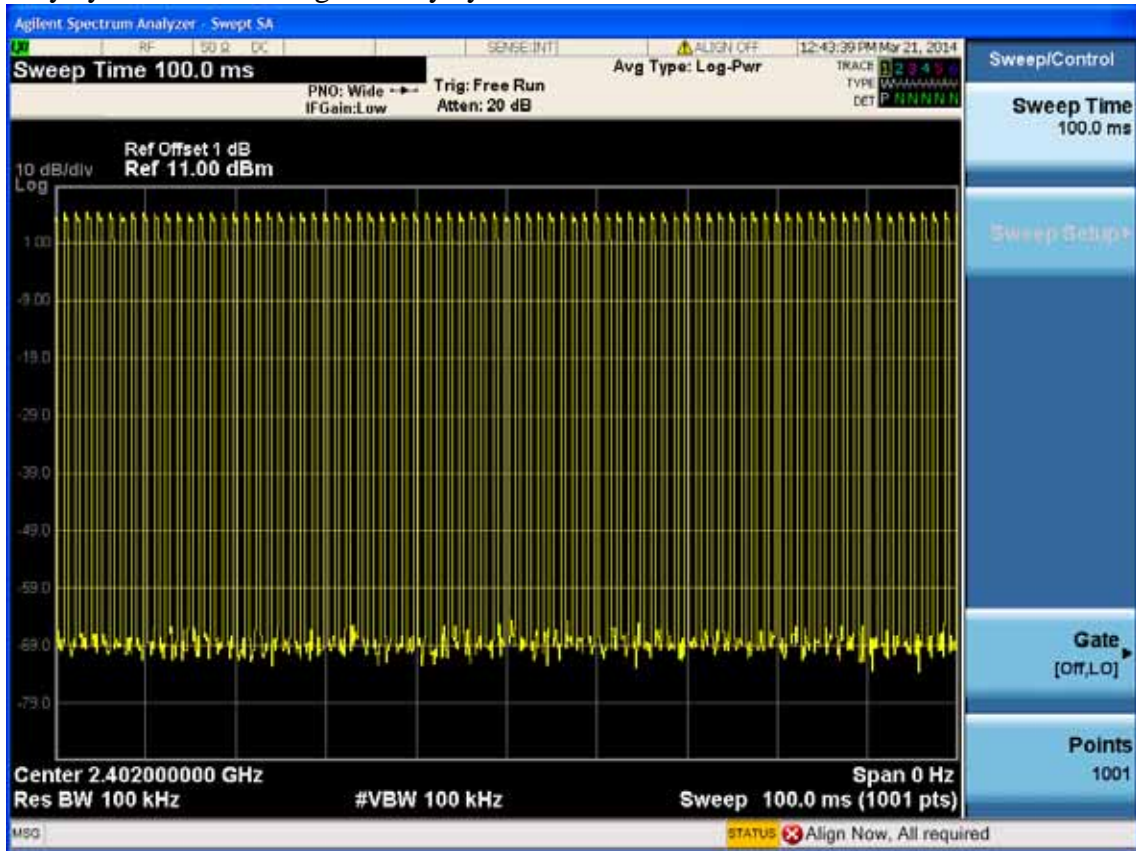




Frequency: 30MHz~1GHz

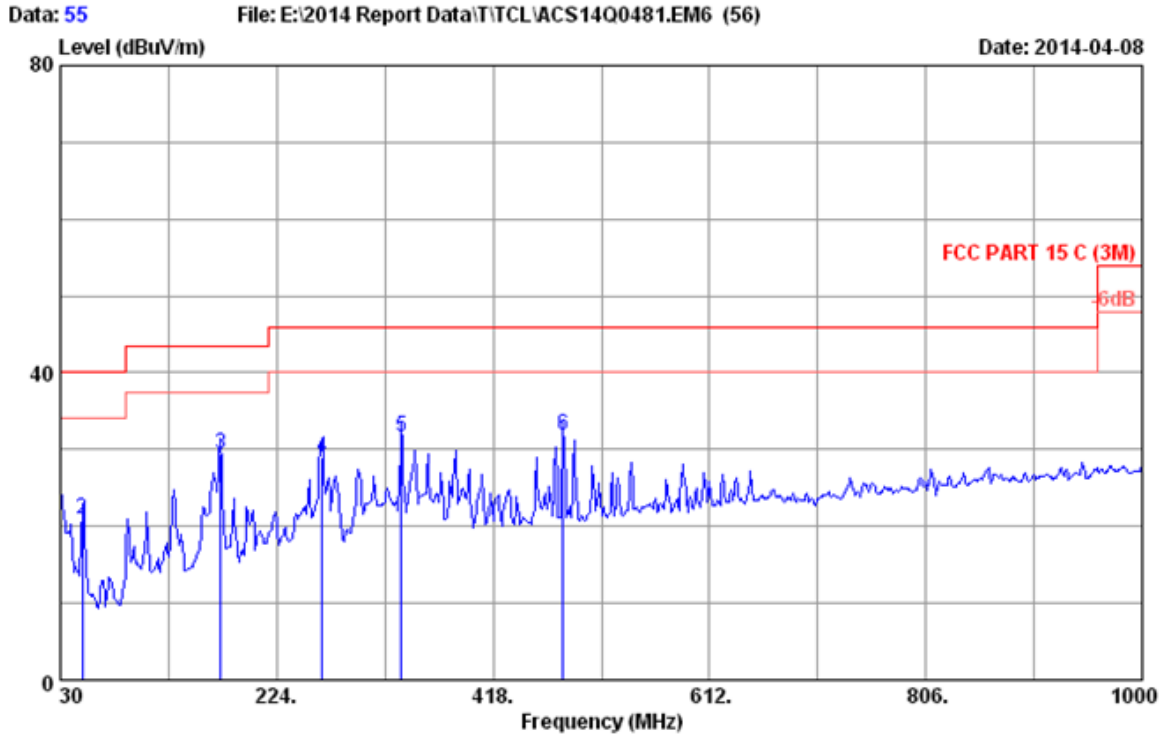

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/65% Engineer : Leo-Li  
 EUT : COMPACT DISC Receiver M/N:HCD-ECL77BT  
 Power rating : AC 120V/60Hz  
 Test Mode : Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	1.81	22.74	40.00	17.26	QP
2	49.400	9.34	1.18	10.47	20.99	40.00	19.01	QP
3	173.560	10.02	1.69	17.66	29.37	43.50	14.13	QP
4	264.740	13.83	2.04	13.10	28.97	46.00	17.03	QP
5	335.550	14.82	2.27	14.56	31.65	46.00	14.35	QP
6	481.050	17.80	2.70	11.31	31.81	46.00	14.19	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

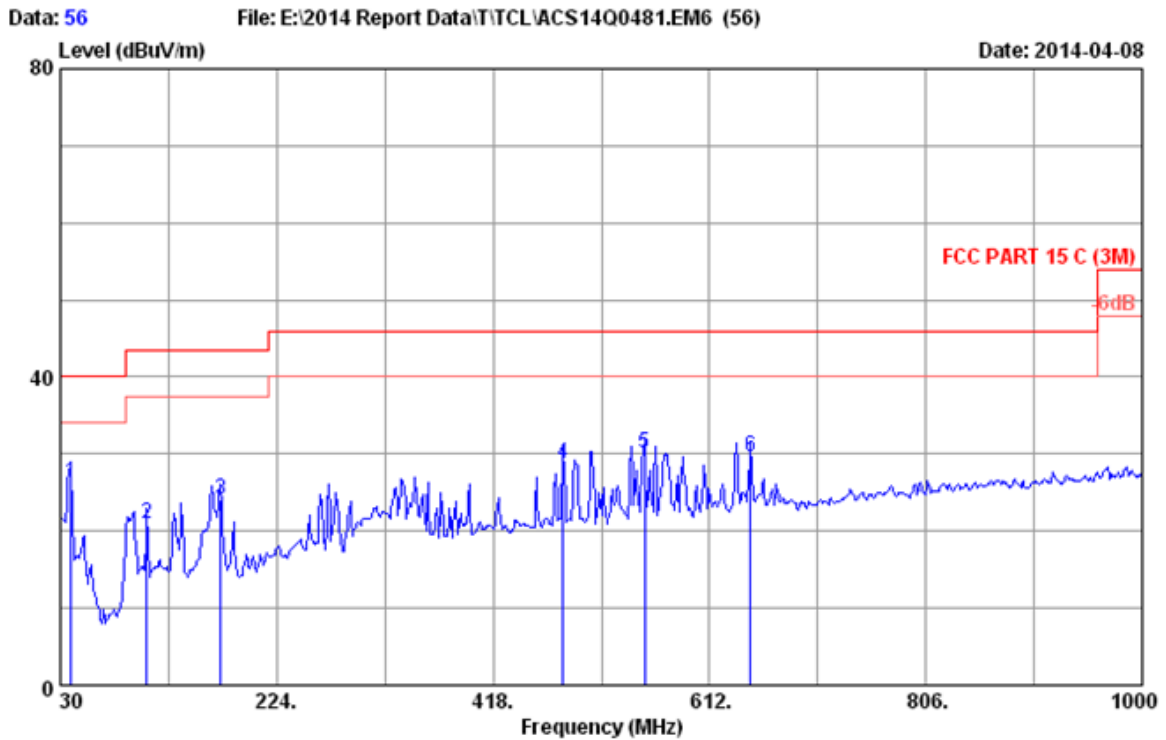


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/65% Engineer : Leo-Li  
 EUT : COMPACT DISC Receiver M/N:HCD-ECL77BT  
 Power rating : AC 120V/60Hz  
 Test Mode : Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	11.14	26.40	40.00	13.60	QP
2	107.600	12.08	1.44	7.40	20.92	43.50	22.58	QP
3	173.560	10.02	1.69	12.38	24.09	43.50	19.41	QP
4	481.050	17.80	2.70	8.28	28.78	46.00	17.22	QP
5	553.800	18.82	2.90	8.37	30.09	46.00	15.91	QP
6	648.860	19.62	3.18	6.91	29.71	46.00	16.29	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



## Frequency: 1GHz~18GHz

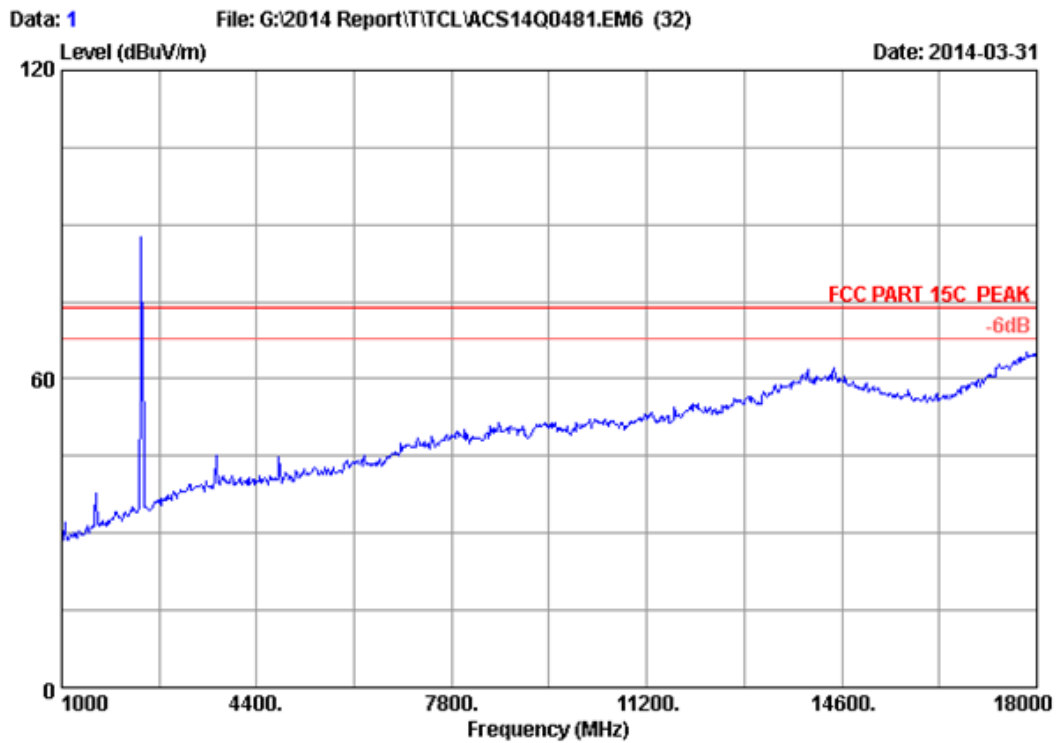


Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Engineer	: Eric
Env. / Ins.	: 24°C/56%		
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2402MHz Tx Mode		
M/N	: HCD-ECL77BT		

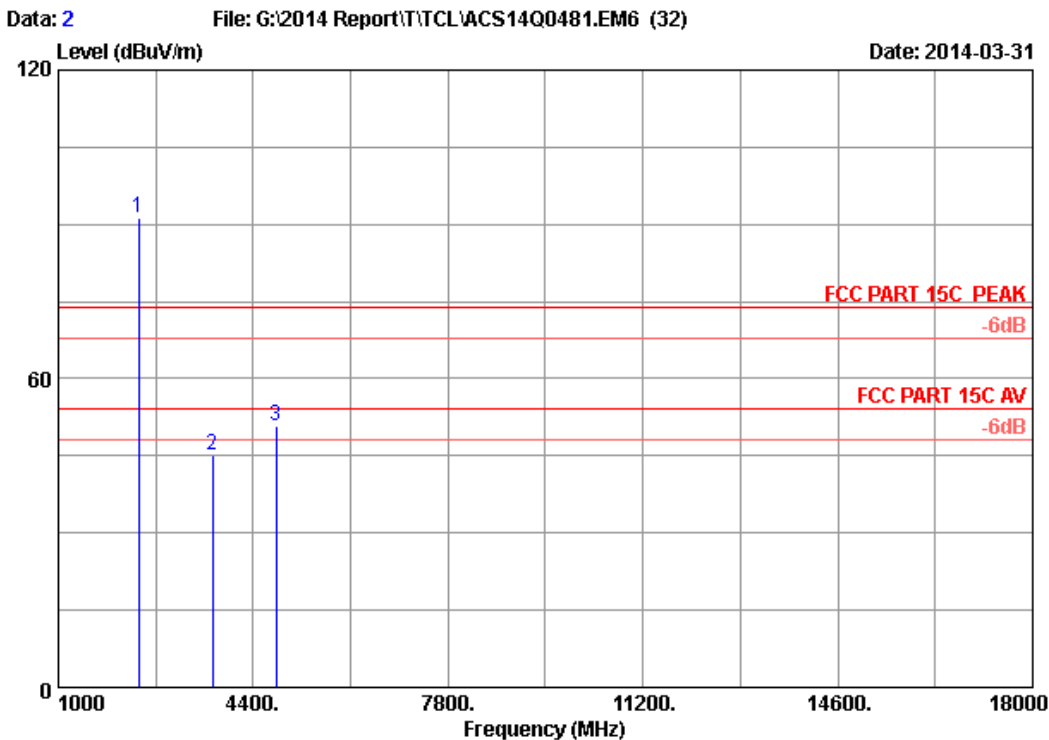


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode  
 M/N : HCD-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.18	5.80	35.70	92.87	91.15	74.00	-17.15	Peak
2	3686.000	31.85	7.39	35.70	41.58	45.12	74.00	28.88	Peak
3	4804.000	32.85	8.56	35.70	45.20	50.91	74.00	23.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

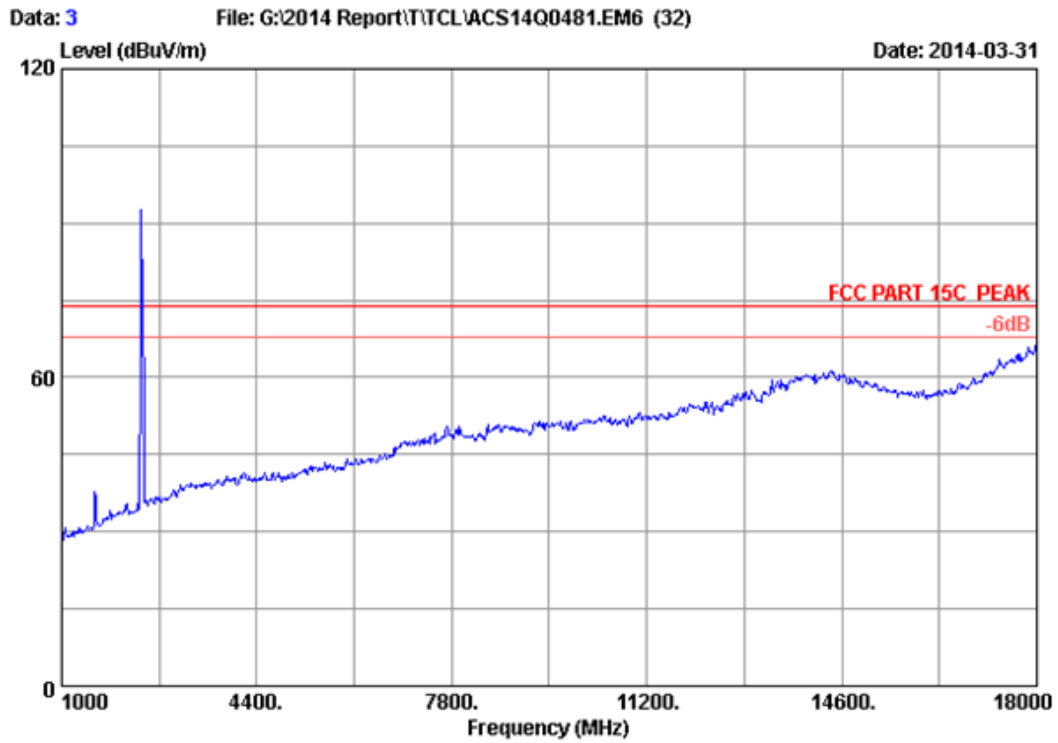


Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Eric
Env. / Ins.	: 24°C/56%		
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2402MHz Tx Mode		
M/N	: HCD-ECL77BT		

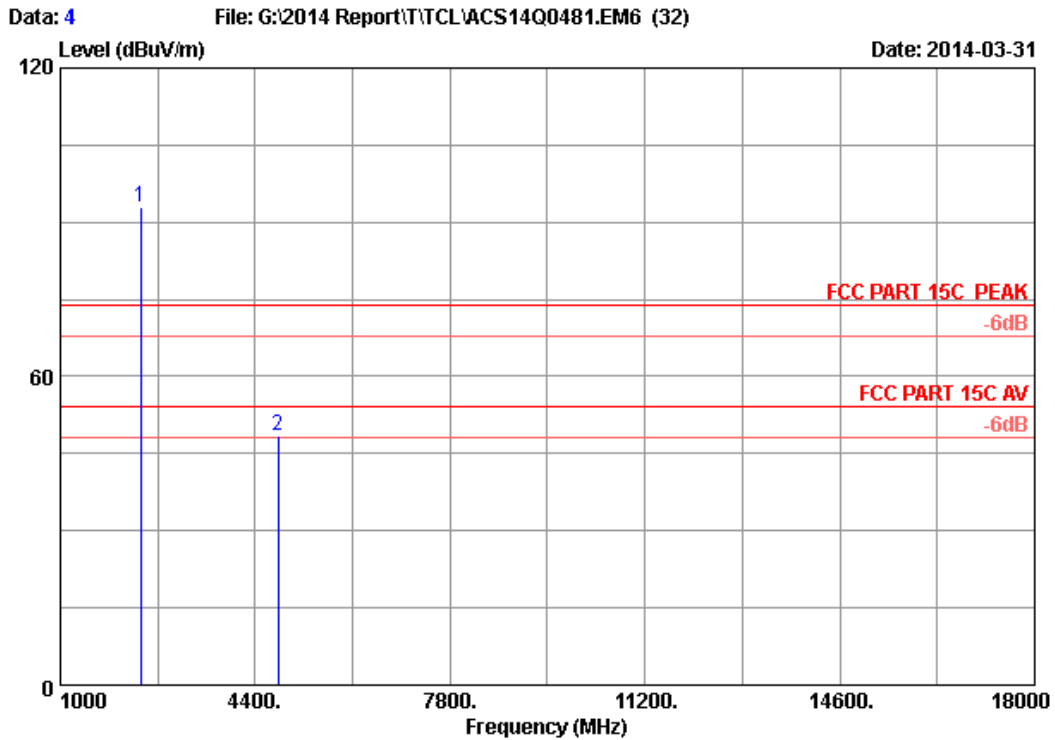


Site no. : 3m Chamber	Data no. : 4
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2402MHz Tx Mode	
M/N : HCD-ECL77BT	

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.18	5.80	35.70	94.57	92.85	74.00	-18.85	Peak
2	4804.000	32.85	8.56	35.70	42.65	48.36	74.00	25.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

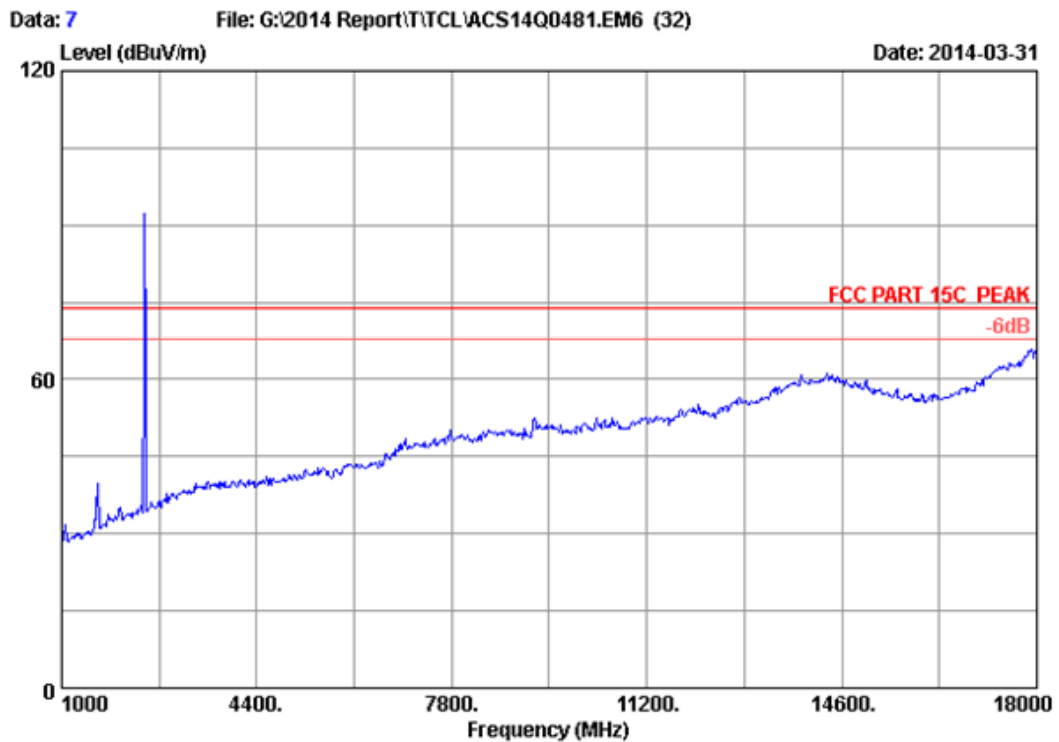

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2441MHz Tx Mode		
M/N	: HCD-ECL77BT		

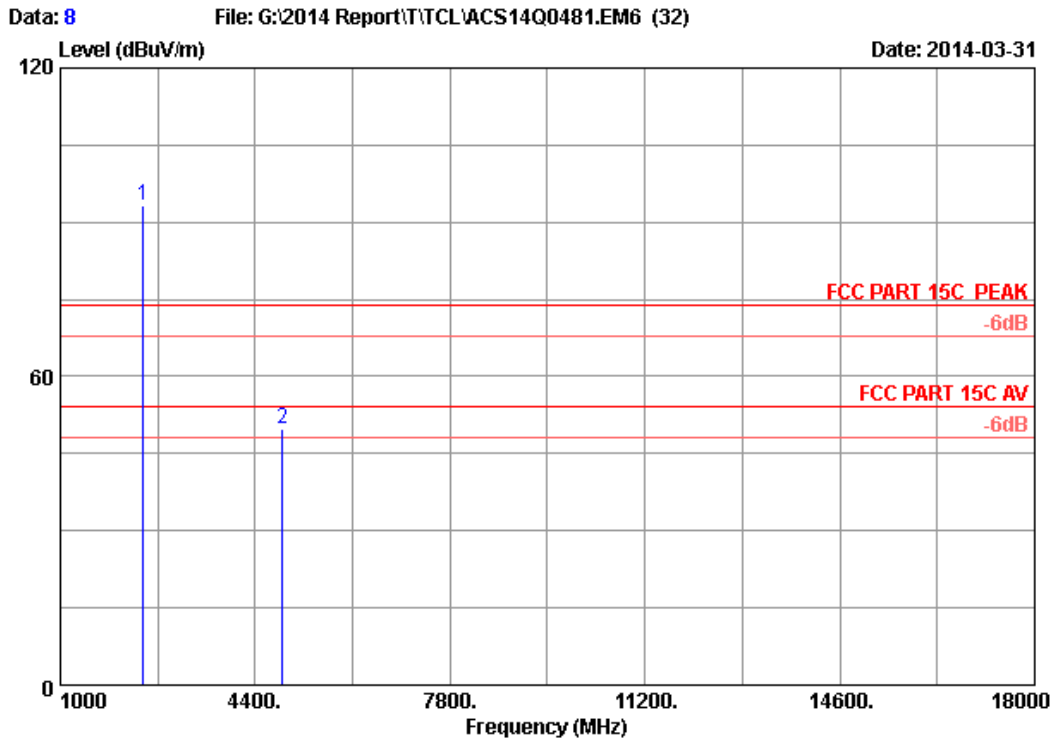


Site no. : 3m Chamber	Data no. : 8
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2441MHz Tx Mode	
M/N : HCD-ECL77BT	


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	28.27	5.86	35.70	94.86	93.29	74.00	-19.29	Peak
2	4882.000	32.99	8.64	35.70	43.86	49.79	74.00	24.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



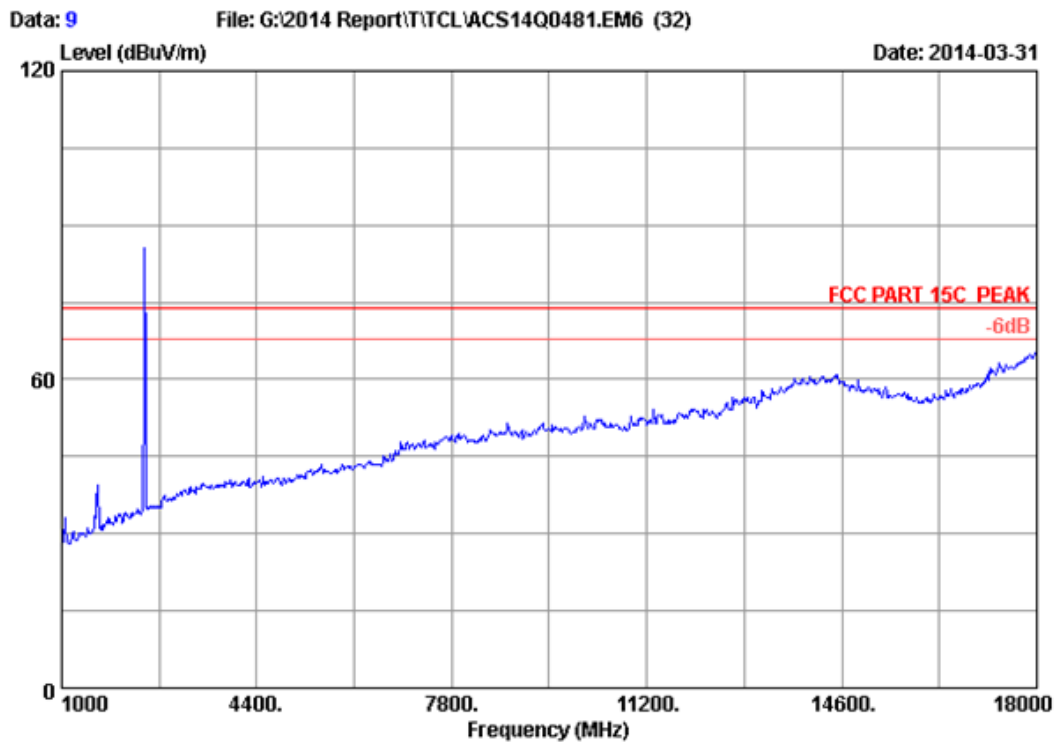


Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2441MHz Tx Mode		
M/N	: HCD-ECL77BT		

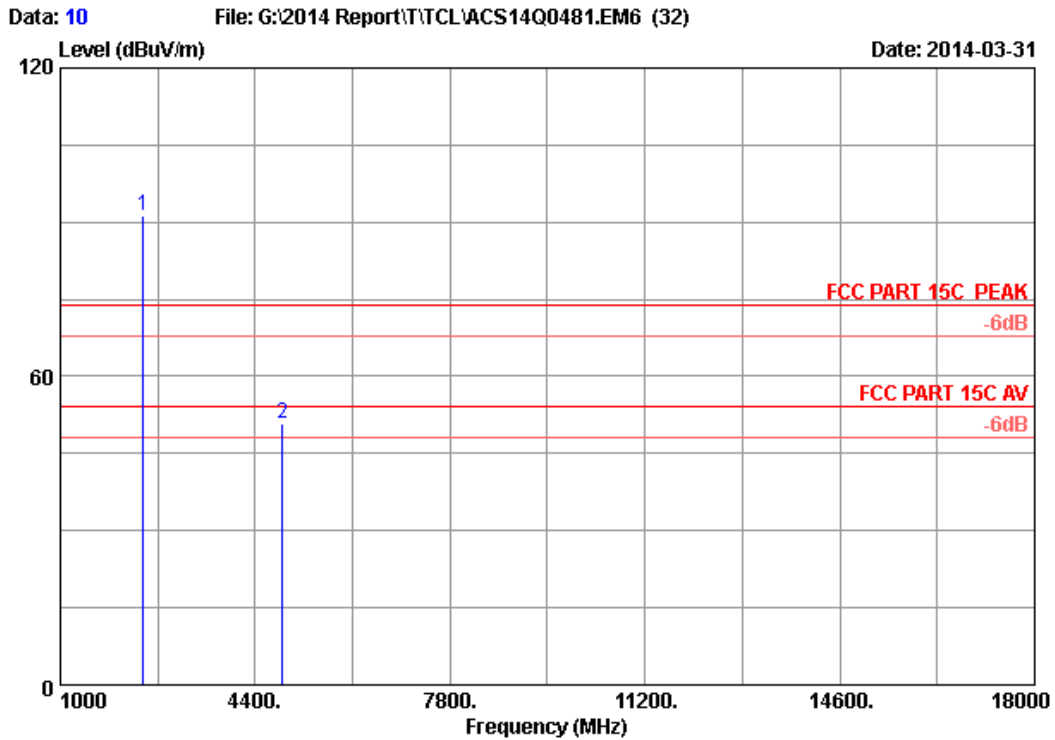


Site no. : 3m Chamber	Data no. : 10
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2441MHz Tx Mode	
M/N : HCD-ECL77BT	

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	28.27	5.86	35.70	92.86	91.29	74.00	-17.29	Peak
2	4882.000	32.99	8.64	35.70	44.86	50.79	74.00	23.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

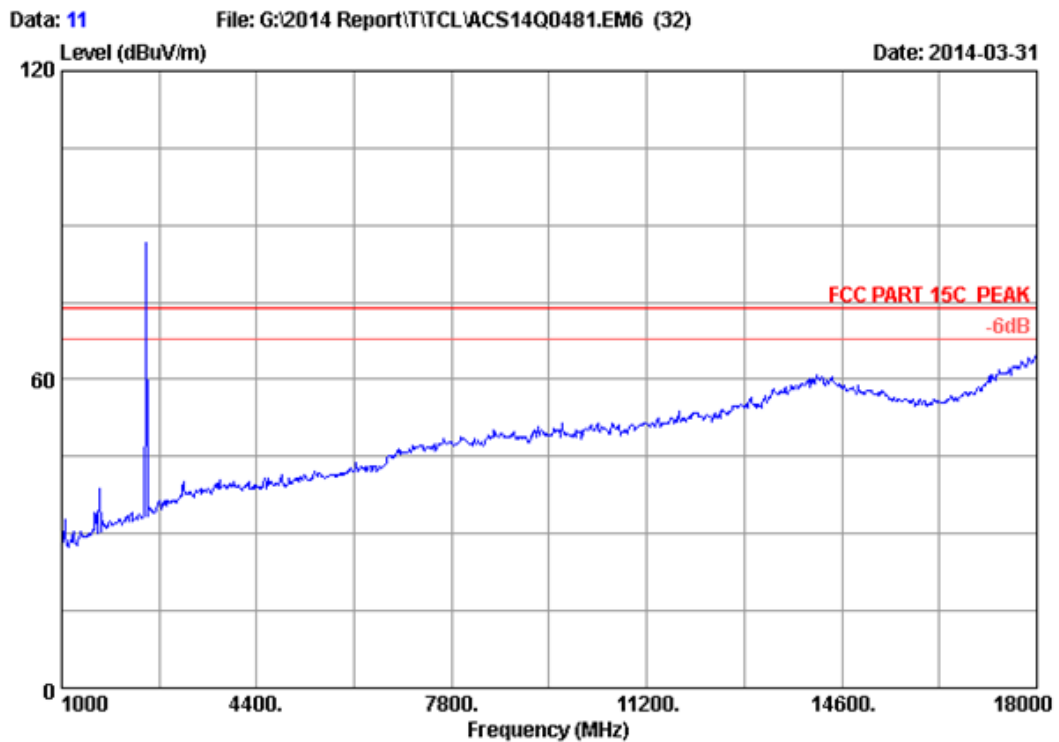


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2480MHz Tx Mode		
M/N	: HCD-ECL77BT		

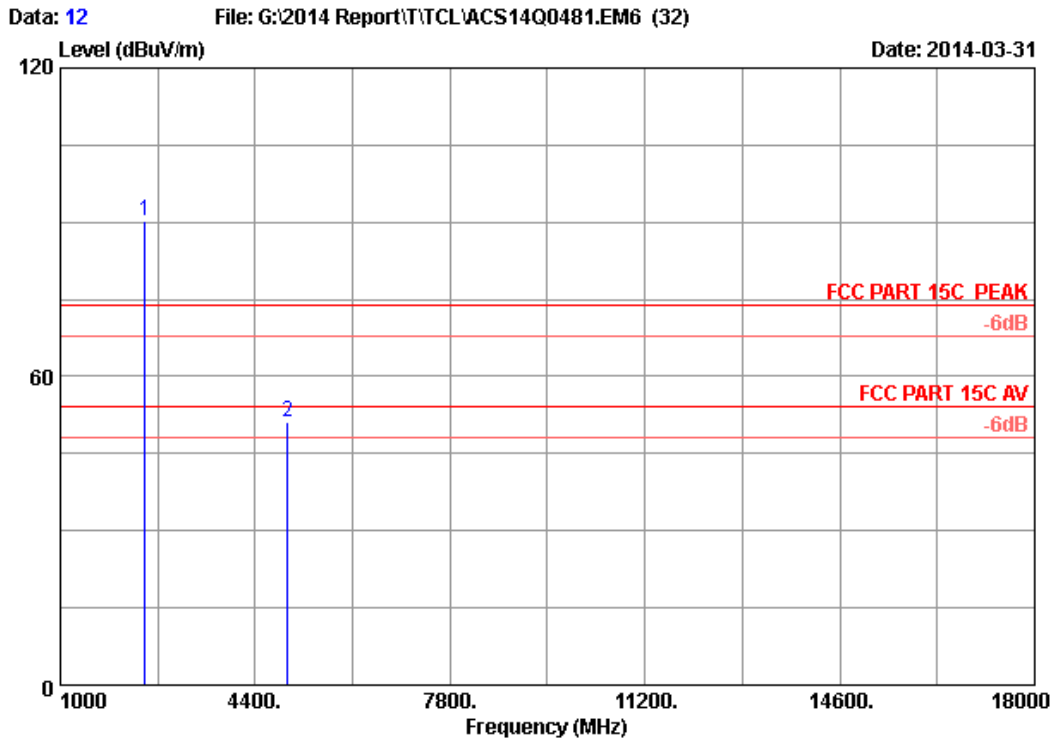


Site no. : 3m Chamber	Data no. : 12
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2480MHz Tx Mode	
M/N : HCD-ECL77BT	

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.36	5.91	35.70	91.78	90.35	74.00	-16.35	Peak
2	4960.000	33.13	8.72	35.70	44.87	51.02	74.00	22.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

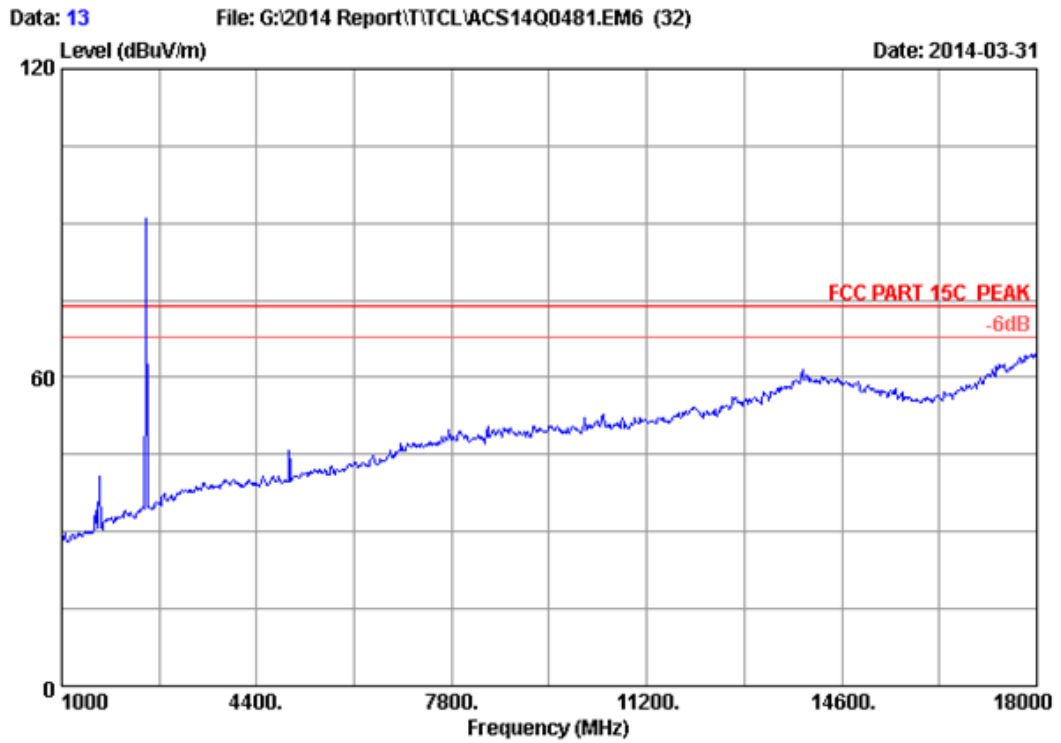

Site no. : 3m Chamber	Data no. : 13
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2480MHz Tx Mode	
M/N : HCD-ECL77BT	

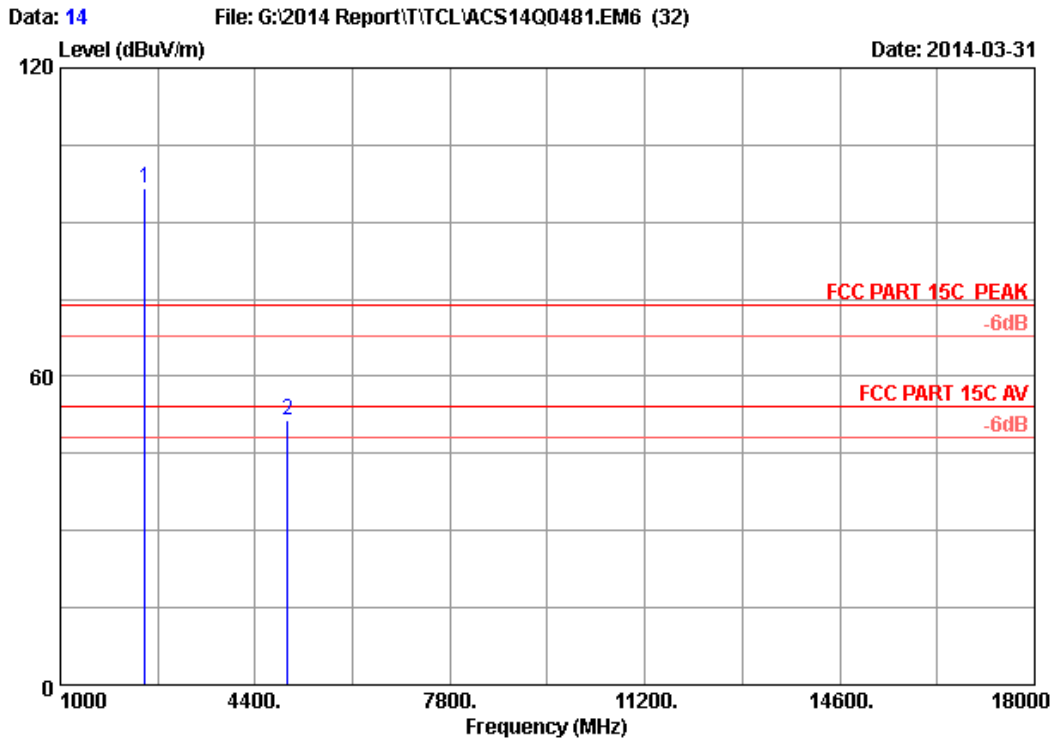


Site no. : 3m Chamber	Data no. : 14
Dis. / Ant. : 3m 2013 3115 (4580)	Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 24°C/56%	Engineer : Eric
EUT : COMPACT DISC Receiver	
Power Rating : AC 120V/60Hz	
Test Mode : GFSK 2480MHz Tx Mode	
M/N : HCD-ECL77BT	


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.36	5.91	35.70	98.16	96.73	74.00	-22.73	Peak
2	4960.000	33.13	8.72	35.70	45.16	51.31	74.00	22.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



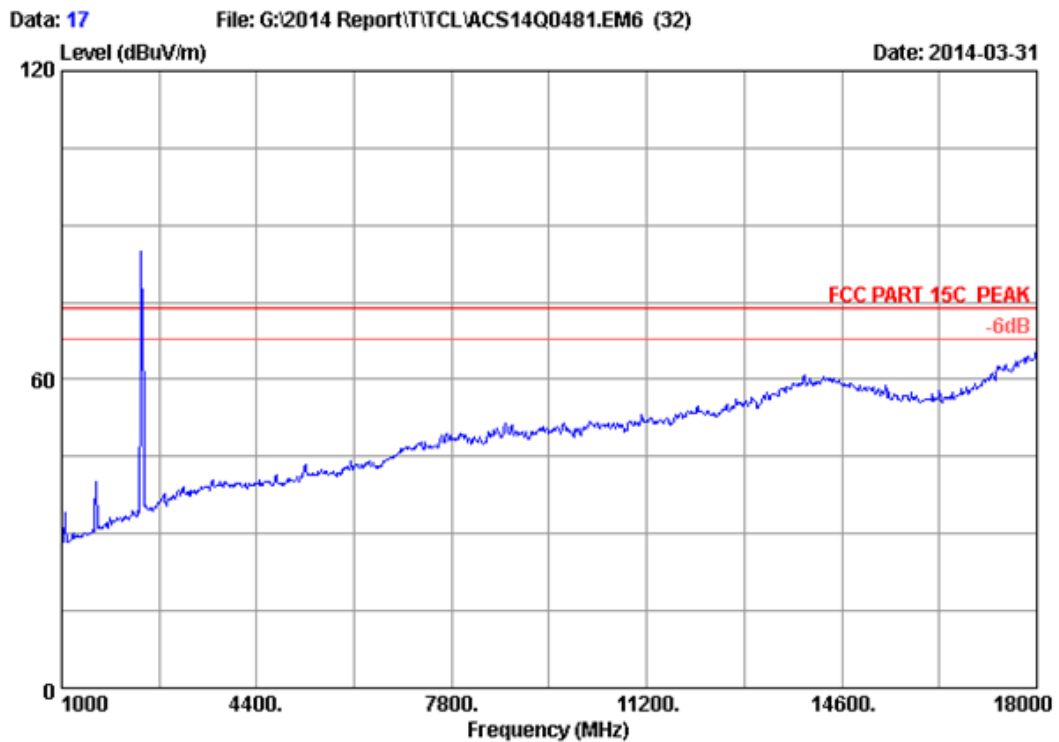


Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2402MHz Tx Mode		
M/N	: HCD-ECL77BT		

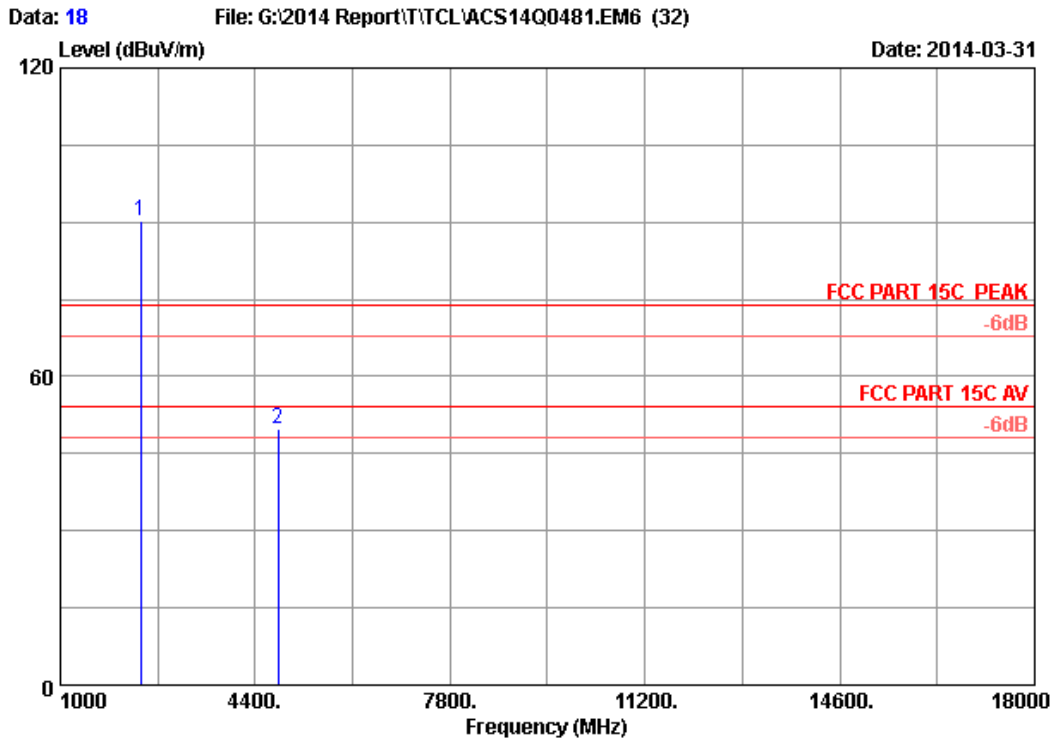


Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2402MHz Tx Mode  
 M/N : HCD-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.18	5.80	35.70	92.07	90.35	74.00	-16.35	Peak
2	4804.000	32.85	8.56	35.70	44.16	49.87	74.00	24.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

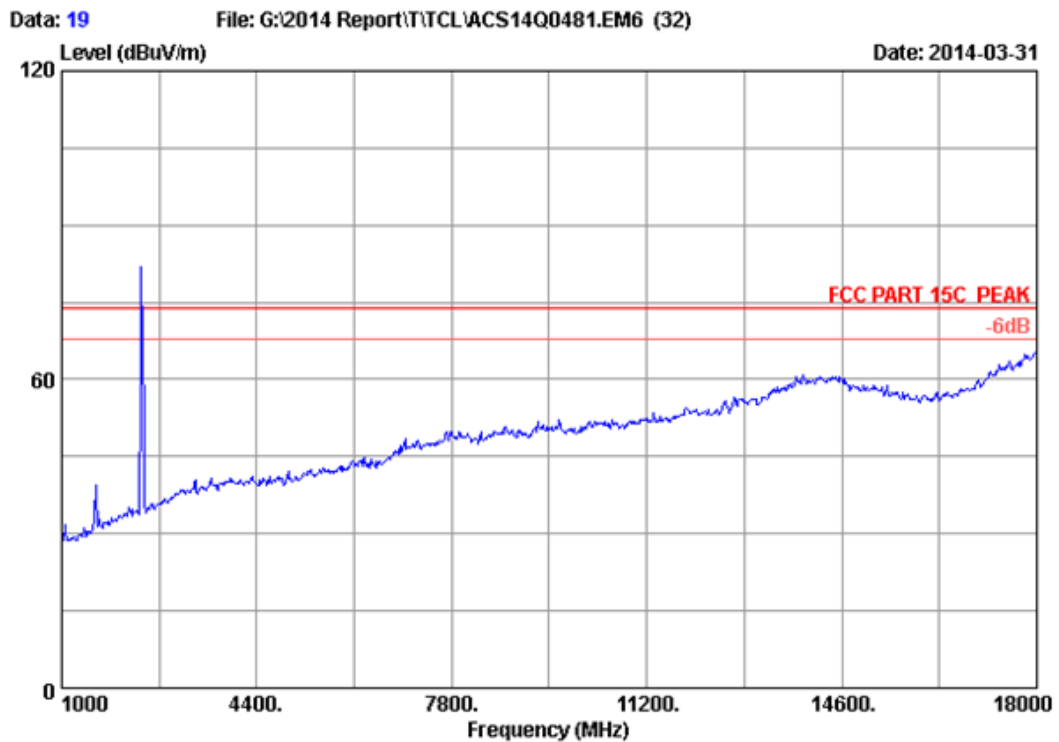


Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2402MHz Tx Mode		
M/N	: HCD-ECL77BT		

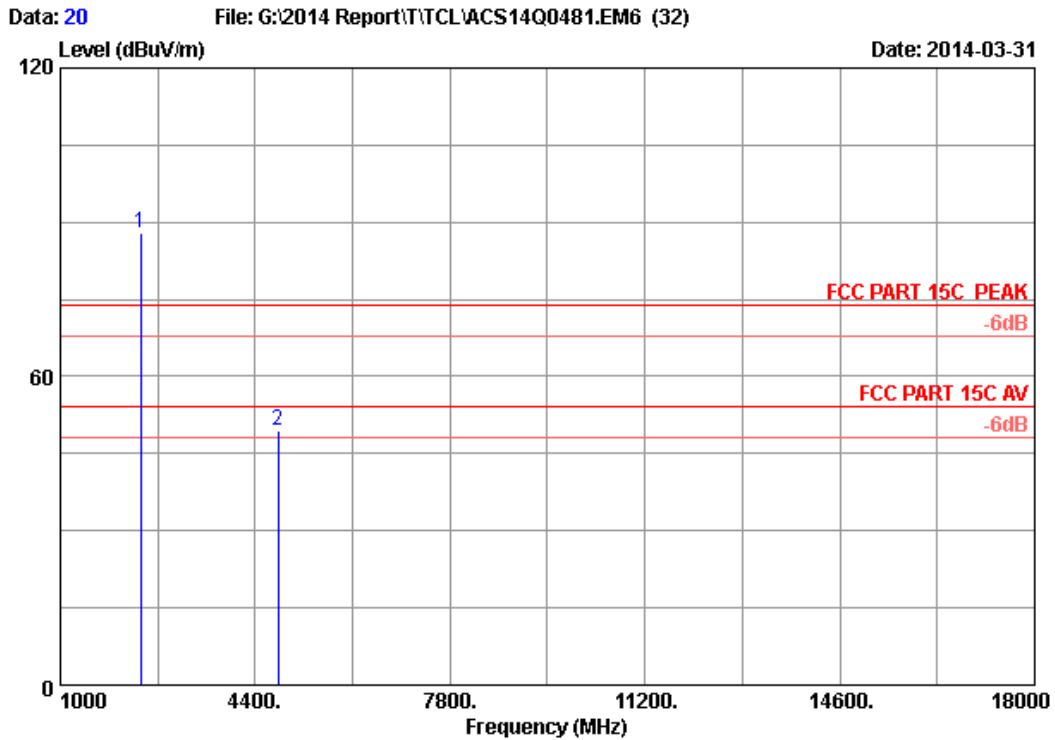


Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2402MHz Tx Mode  
 M/N : HCD-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	28.18	5.80	35.70	89.76	88.04	74.00	-14.04	Peak
2	4804.000	32.85	8.56	35.70	43.86	49.57	74.00	24.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

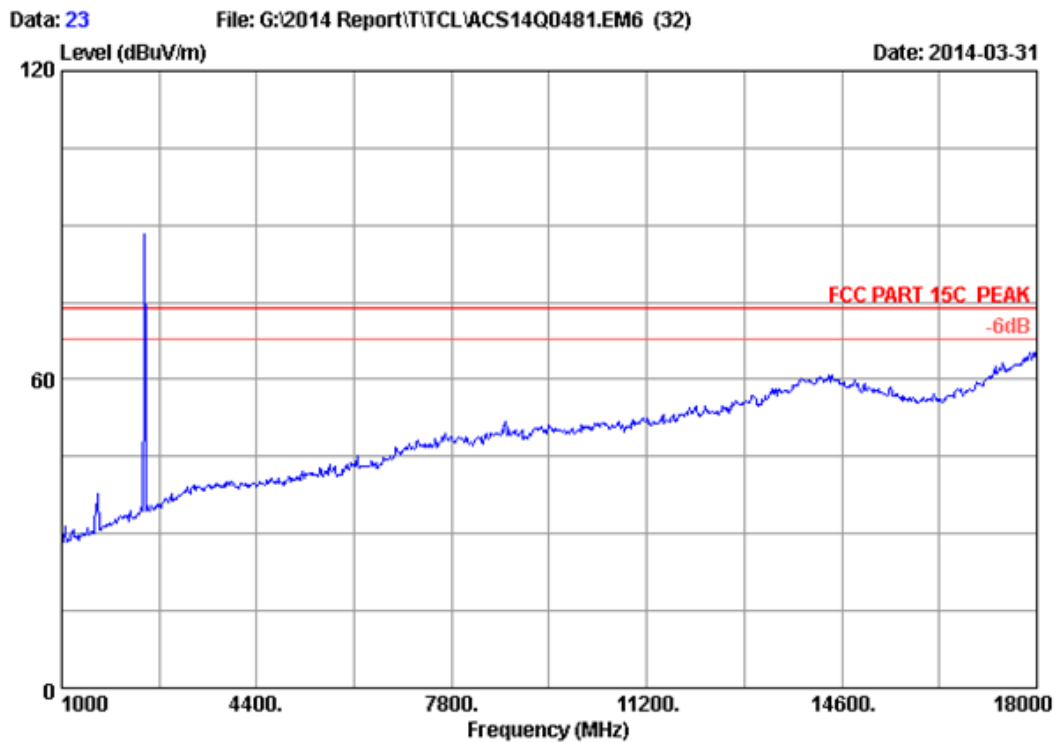

Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Eric
Env. / Ins.	: 24°C/56%		
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2441MHz Tx Mode		
M/N	: HCD-ECL77BT		

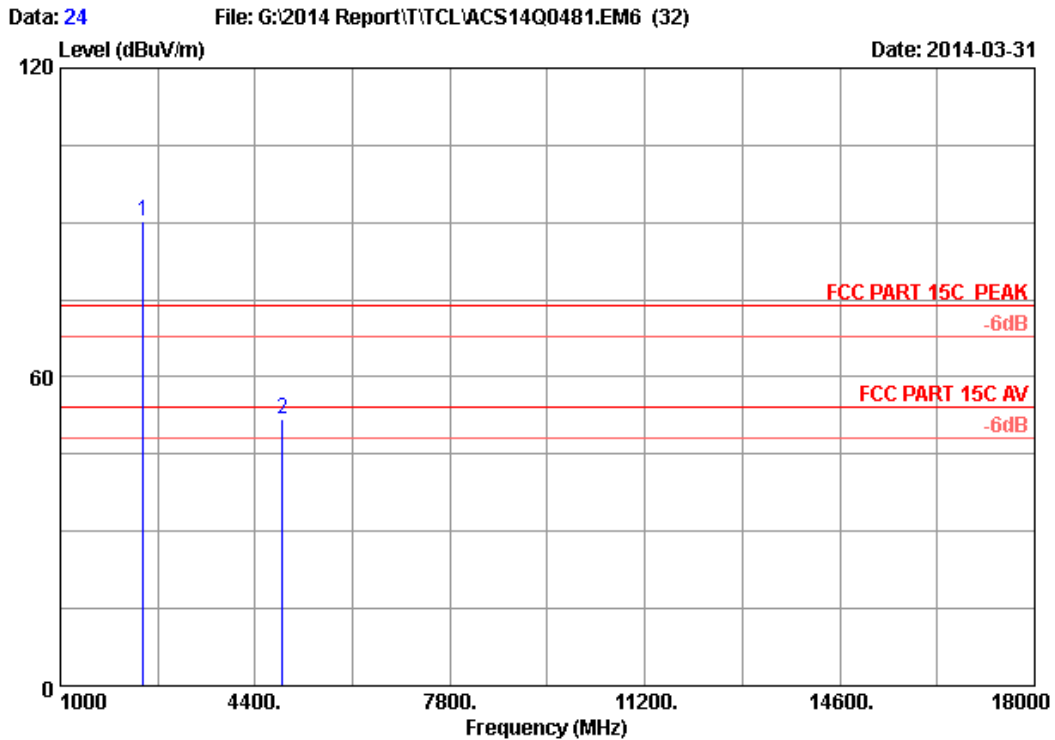


Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2441MHz Tx Mode  
 M/N : HCD-ECL77BT


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	28.27	5.86	35.70	91.86	90.29	74.00	-16.29	Peak
2	4882.000	32.99	8.64	35.70	45.76	51.69	74.00	22.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuv/m)	Conclusion
4882.000	51.69	8.77	42.92	54	Pass

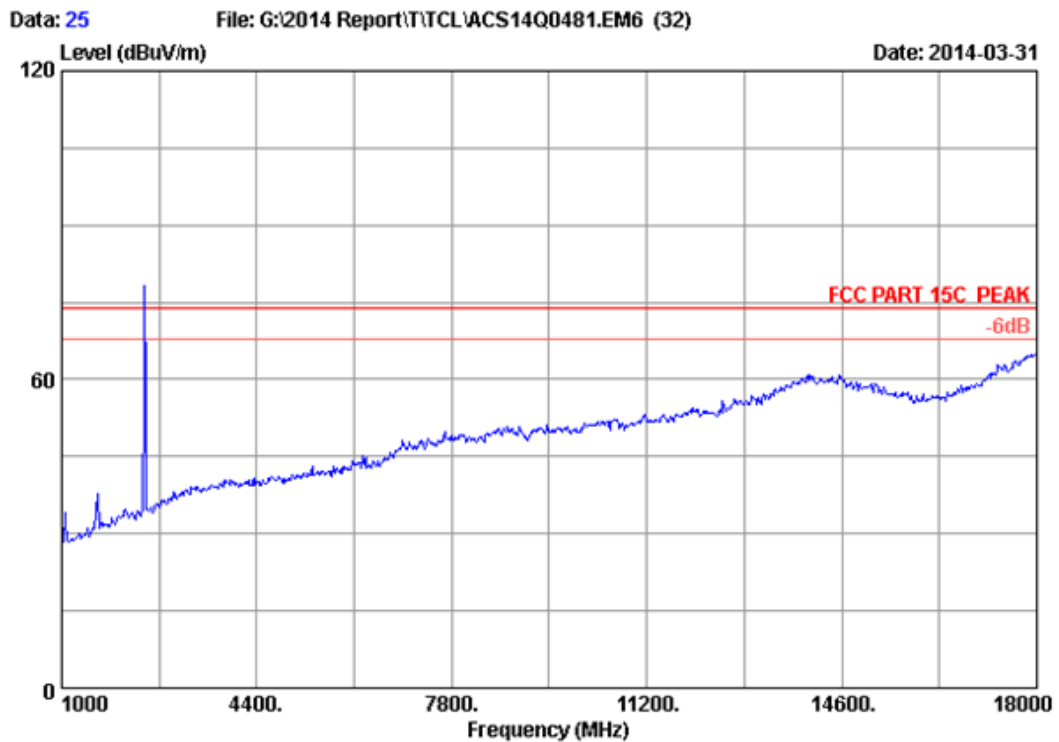

Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2441MHz Tx Mode		
M/N	: HCD-ECL77BT		

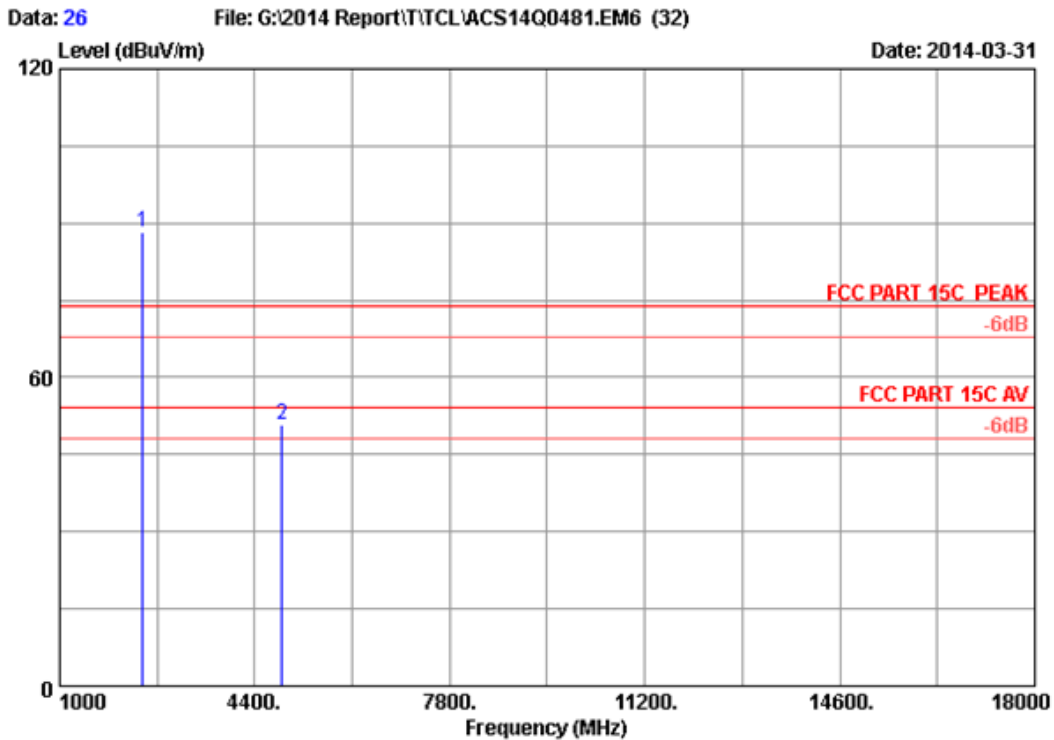


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2441MHz Tx Mode  
 M/N : HCD-ECL77BT


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	28.27	5.86	35.70	89.75	88.18	74.00	-14.18	Peak
2	4882.000	32.99	8.64	35.70	44.86	50.79	74.00	23.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



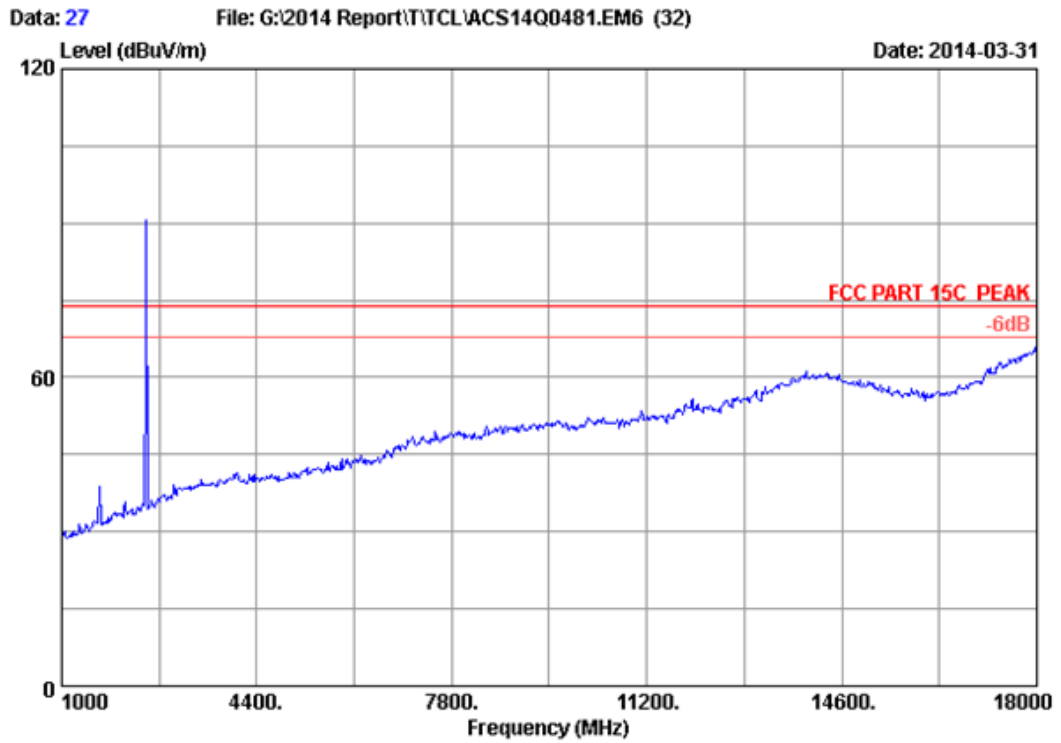


Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2480MHz Tx Mode		
M/N	: HCD-ECL77BT		

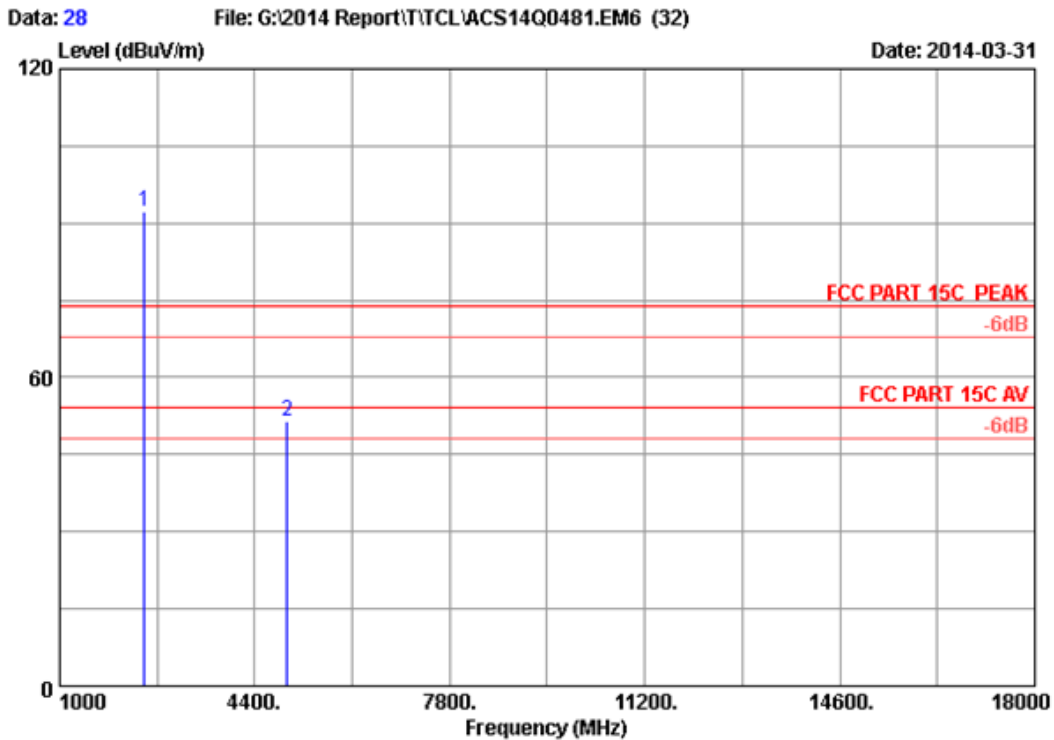


Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2480MHz Tx Mode  
 M/N : HCD-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.36	5.91	35.70	93.56	92.13	74.00	-18.13	Peak
2	4960.000	33.13	8.72	35.70	45.16	51.31	74.00	22.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

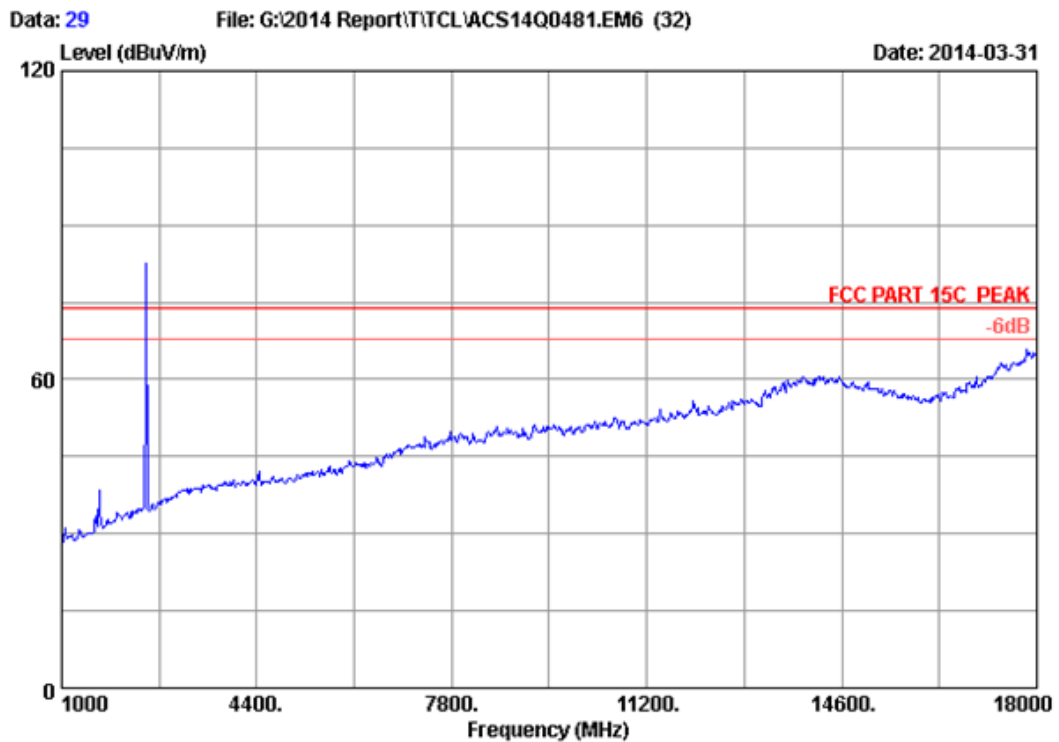

Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: COMPACT DISC Receiver		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2480MHz Tx Mode		
M/N	: HCD-ECL77BT		

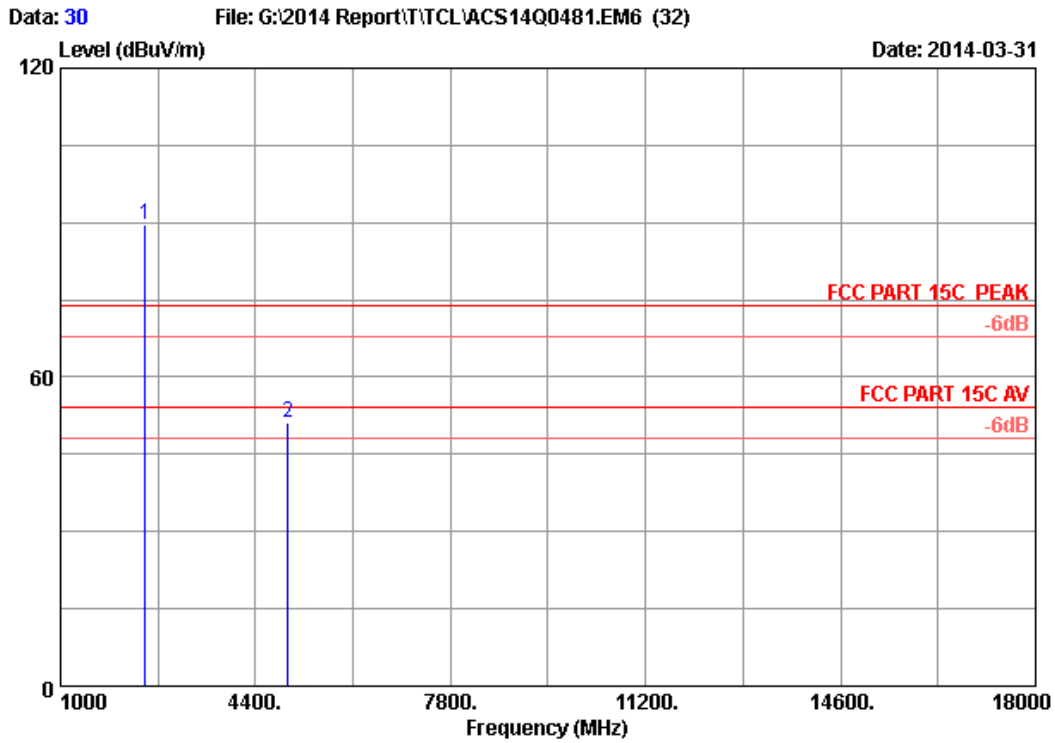

Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : COMPACT DISC Receiver  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2480MHz Tx Mode  
 M/N : HCD-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.36	5.91	35.70	90.86	89.43	74.00	-15.43	Peak
2	4960.000	33.13	8.72	35.70	44.86	51.01	74.00	22.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4960.000	51.01	8.77	42.24	54	Pass

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,13	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,13	1 Year

### 5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



### 5.3. Test Procedure


The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.

### 5.4. Test result

**PASS** (The testing data was attached in the next pages.)



**GFSK**  
**Test Frequency: 2402MHz**

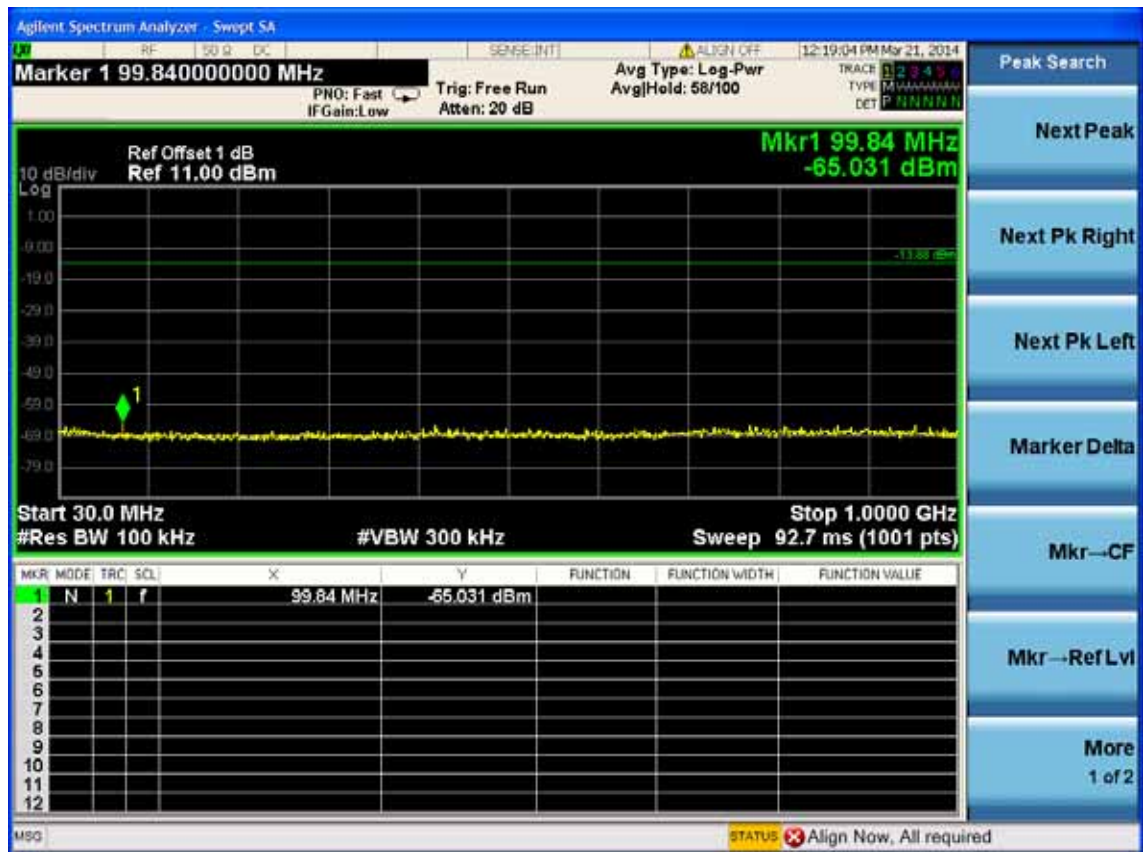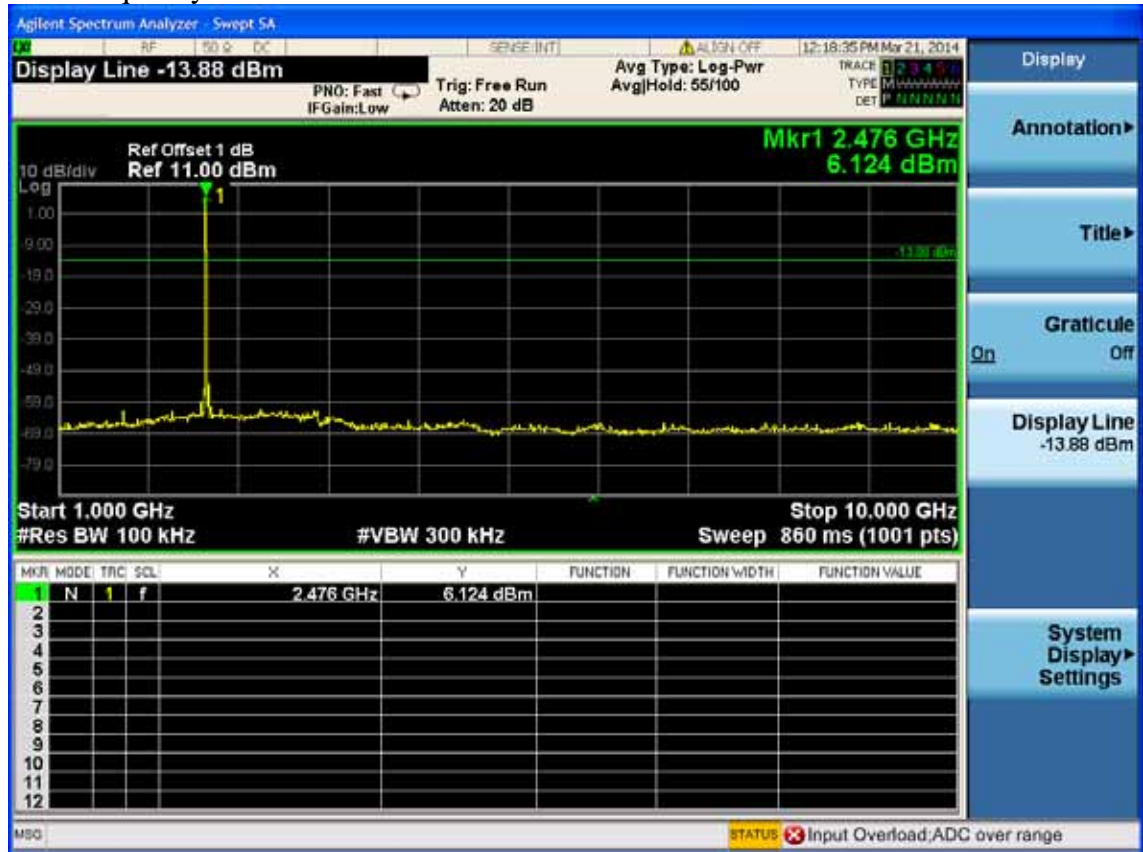

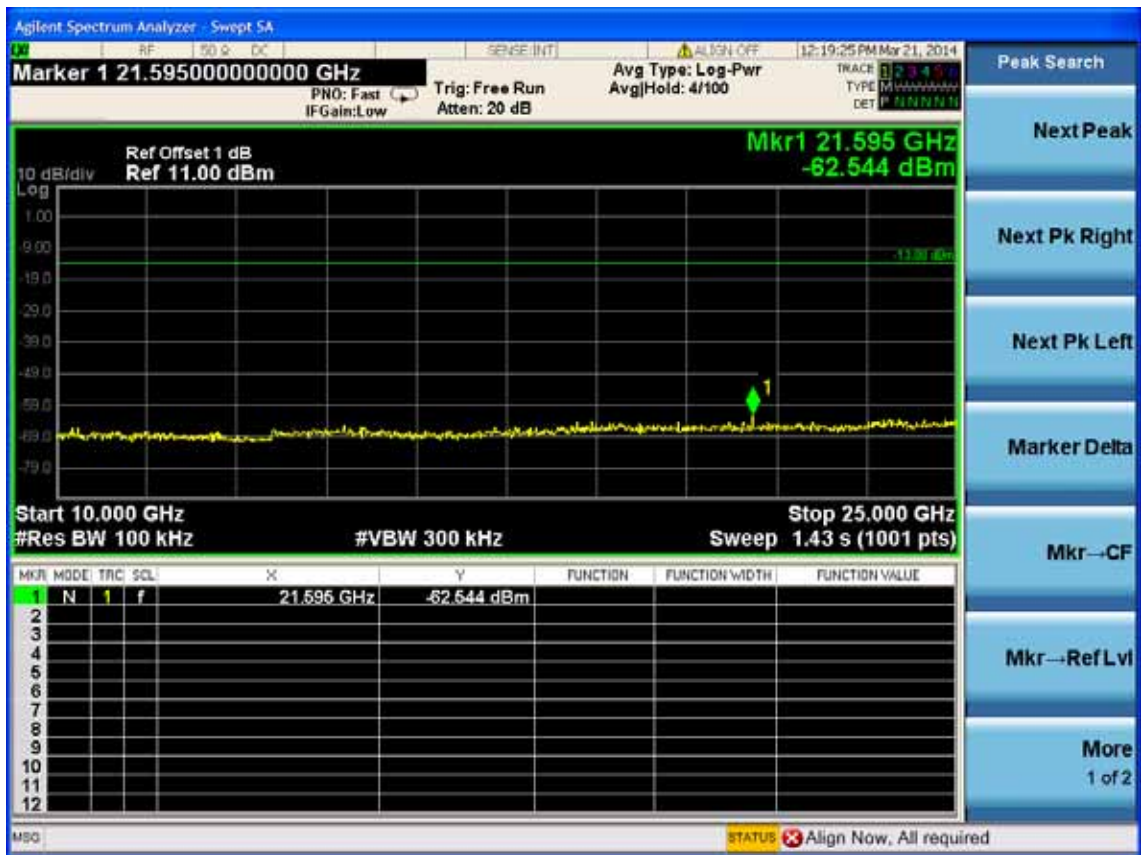





Test Frequency: 2441MHz

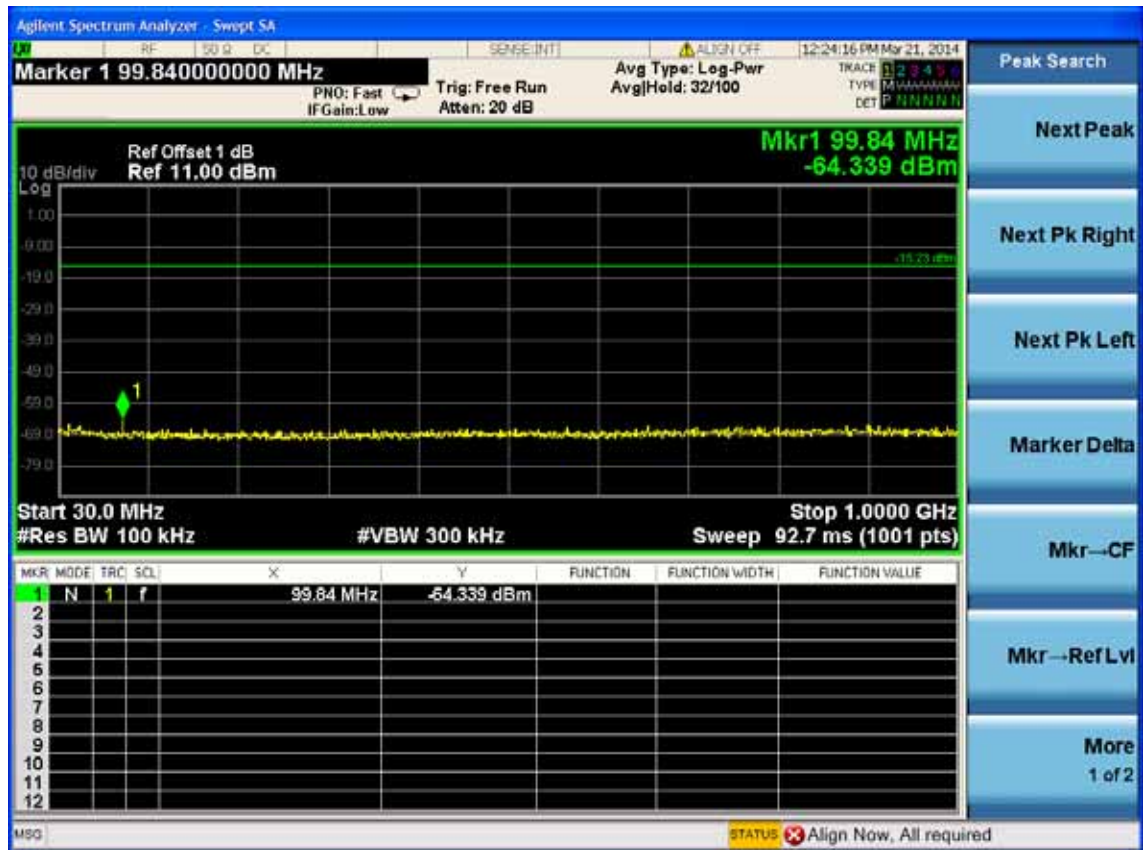
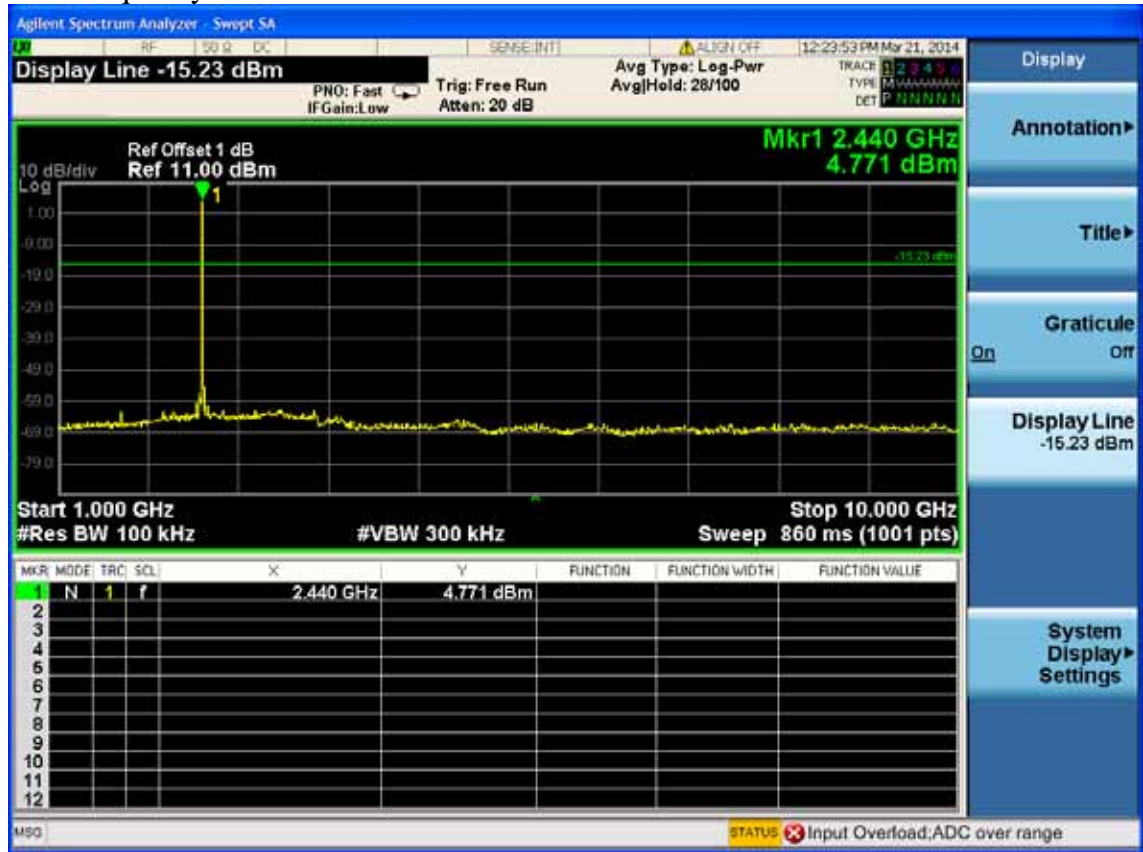




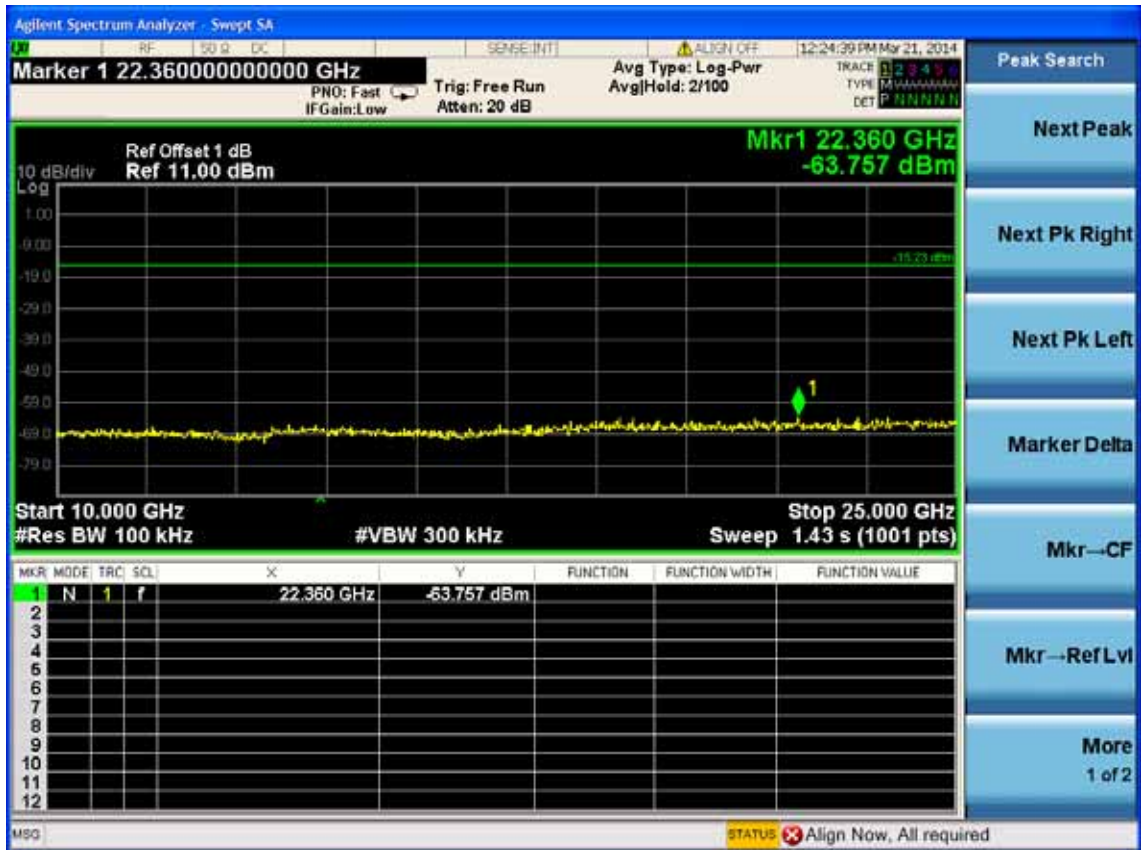

Test Frequency: 2480MHz

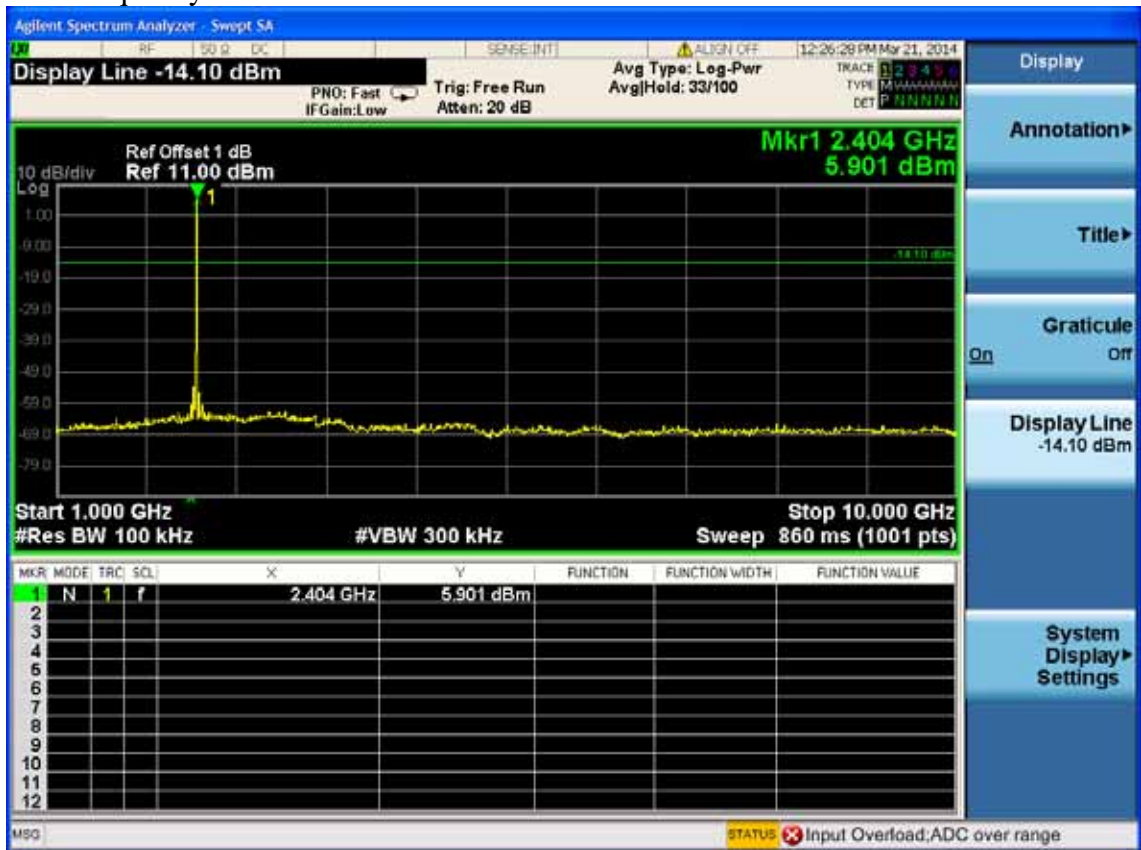


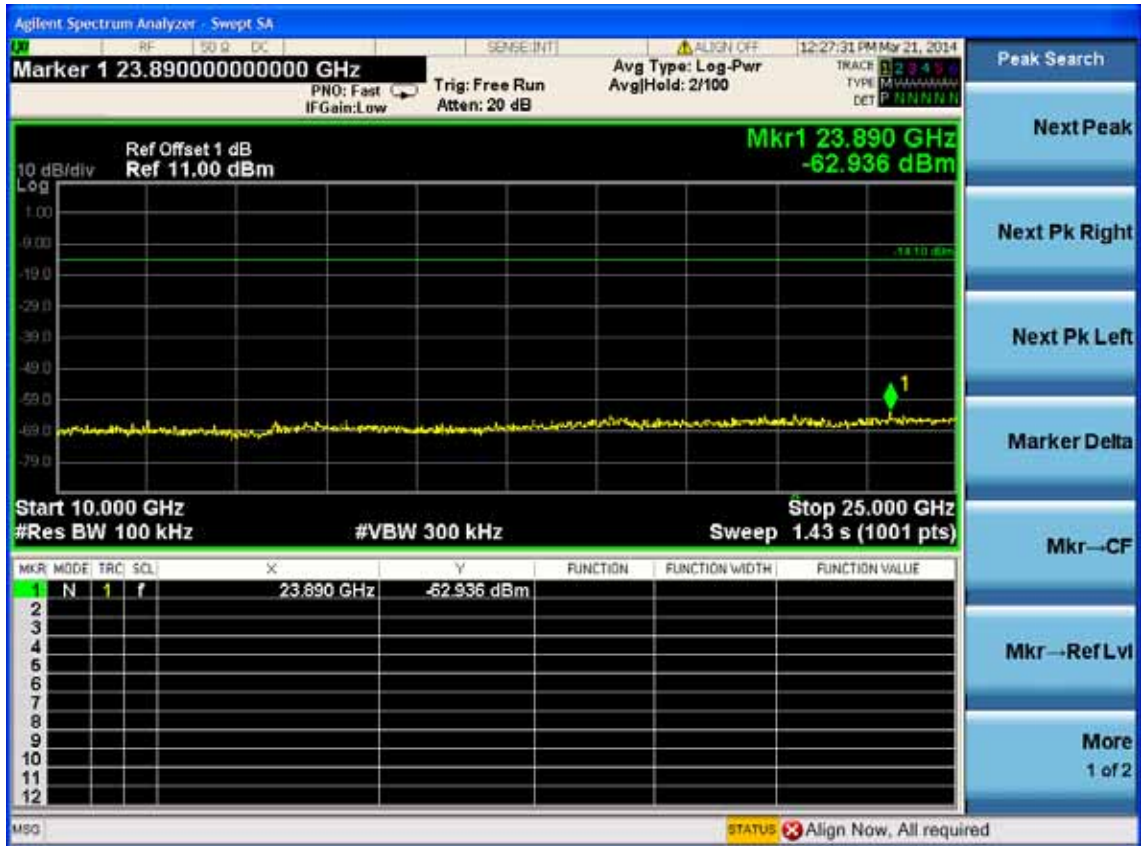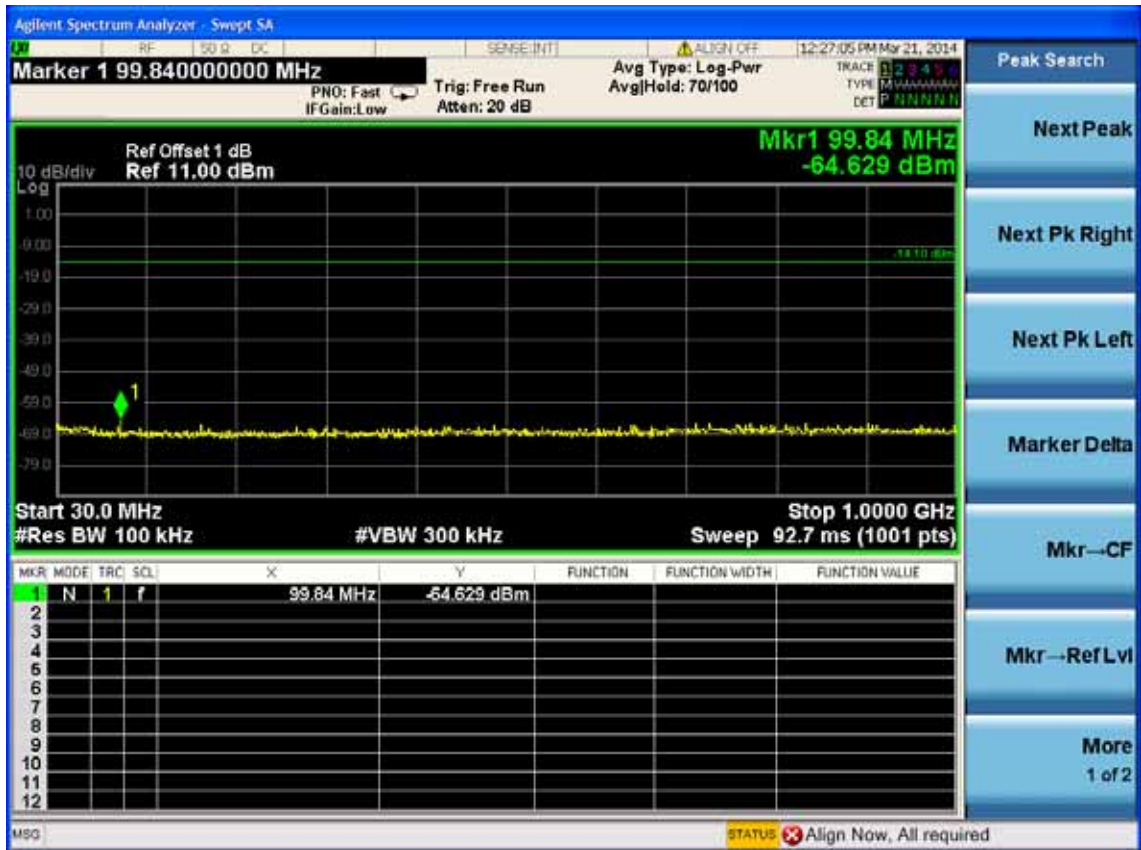






### 8-DPSK

Test Frequency: 2402MHz

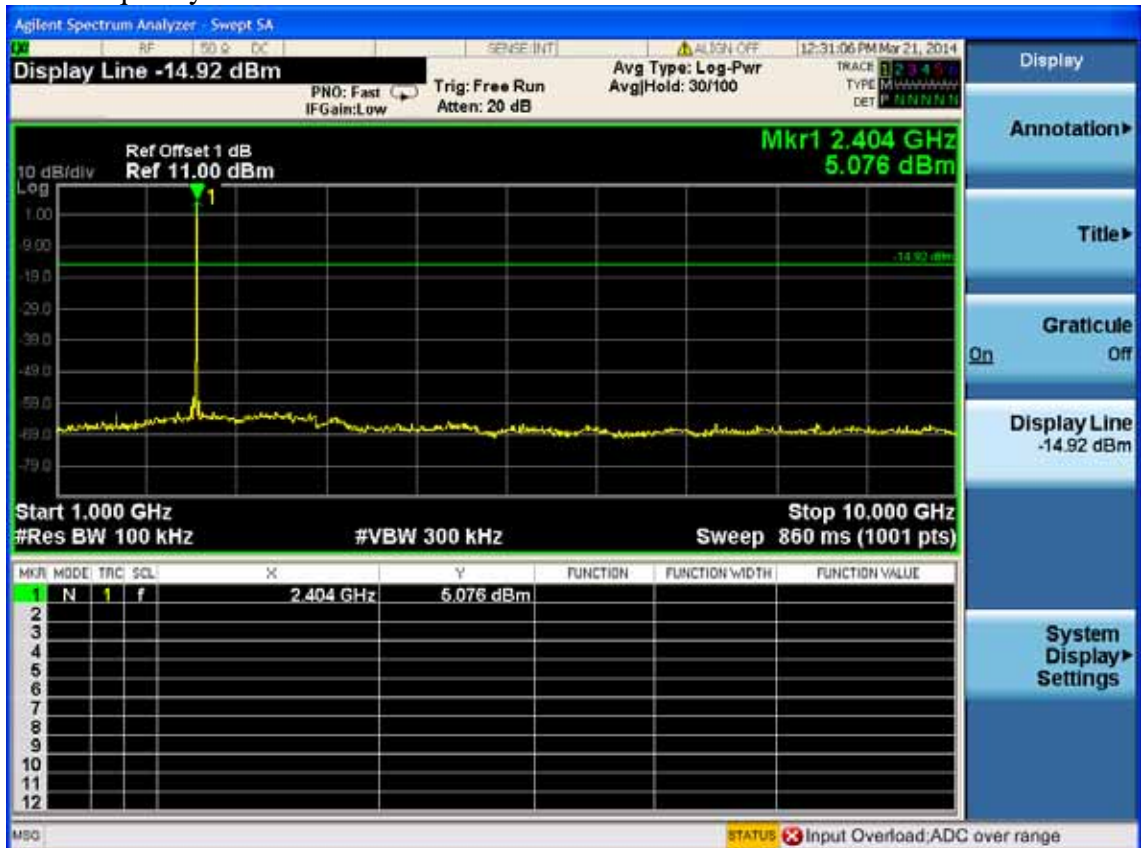






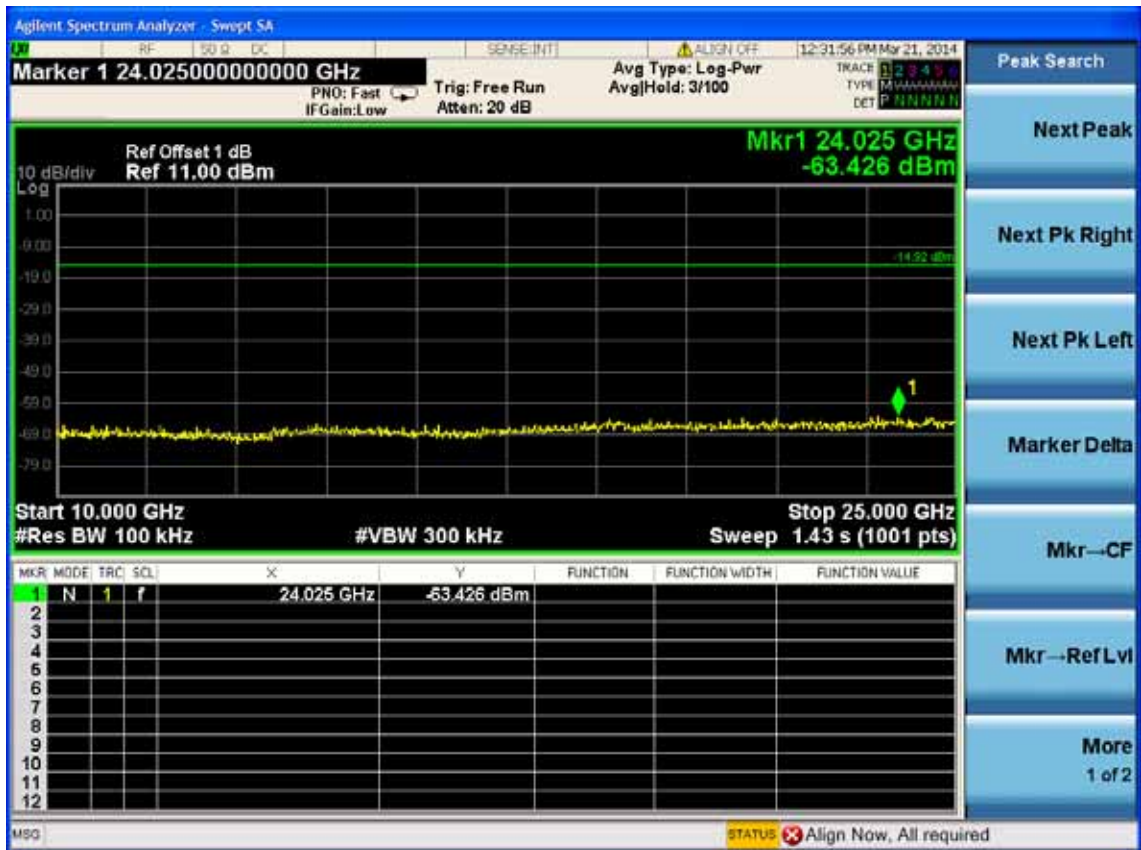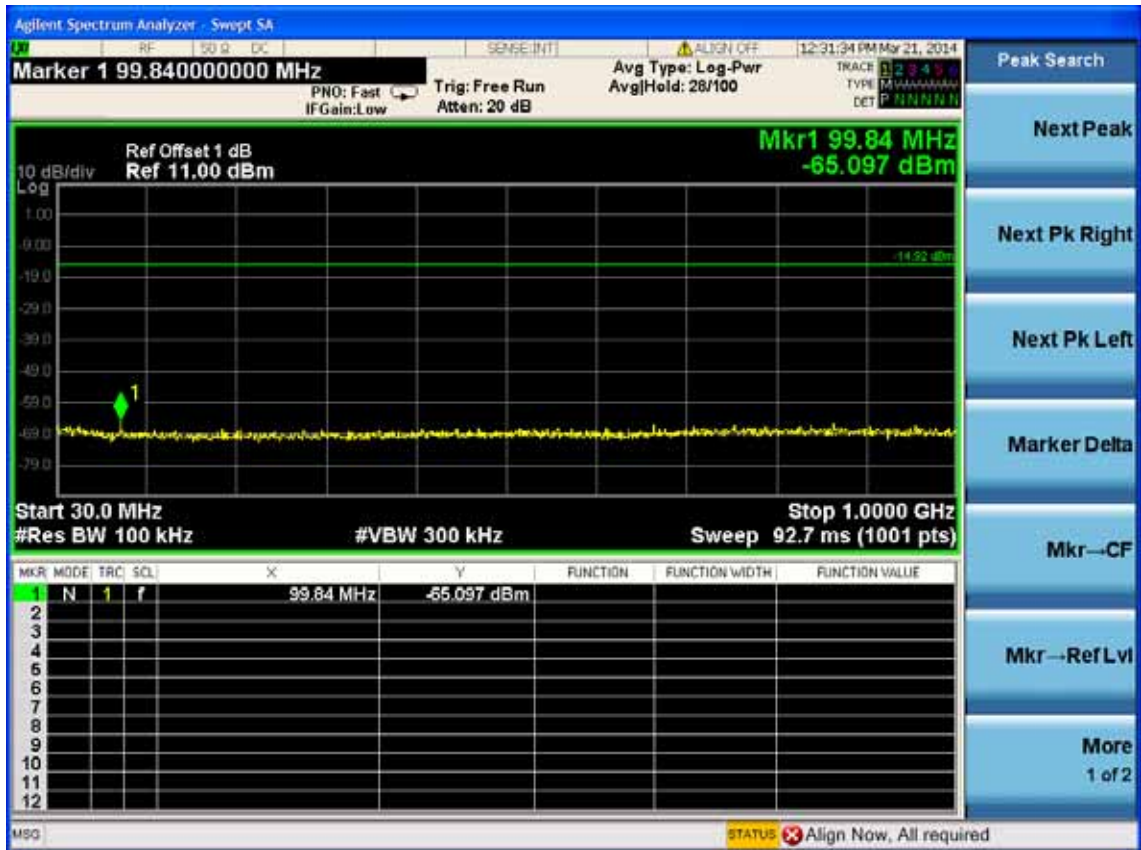

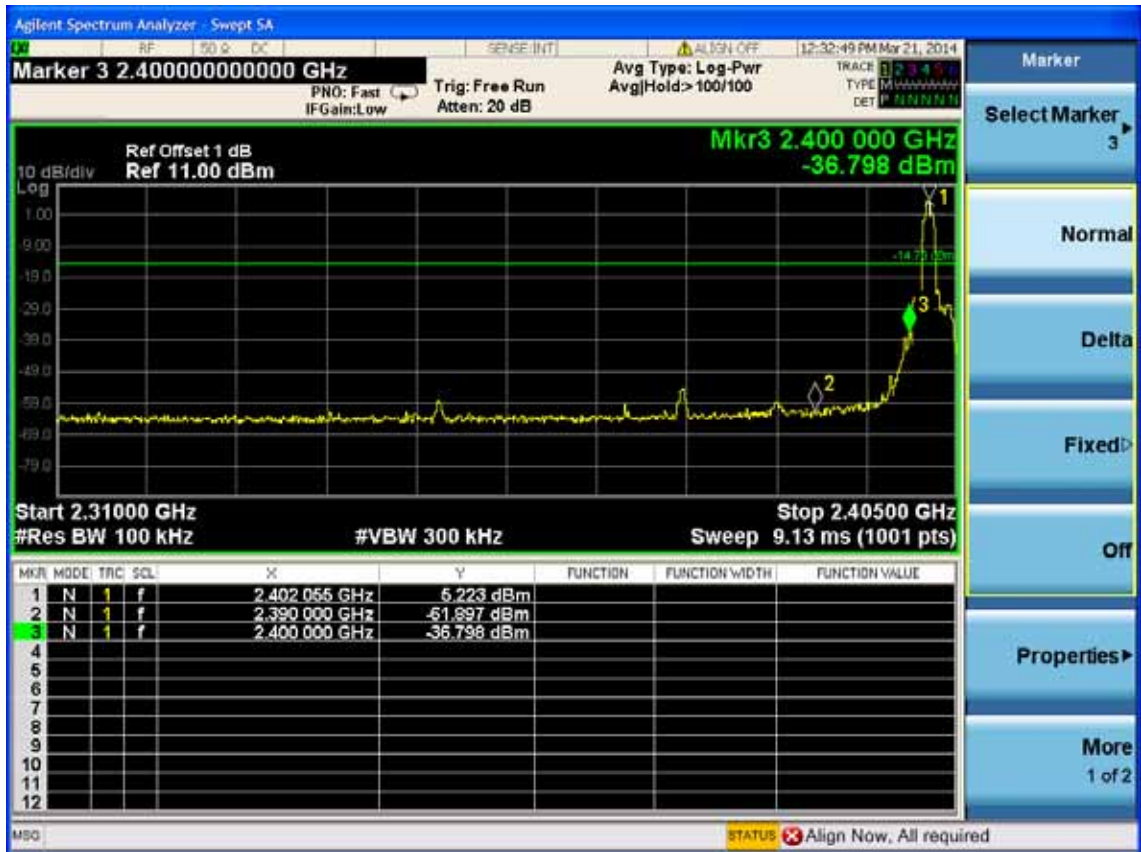



Test Frequency: 2441MHz

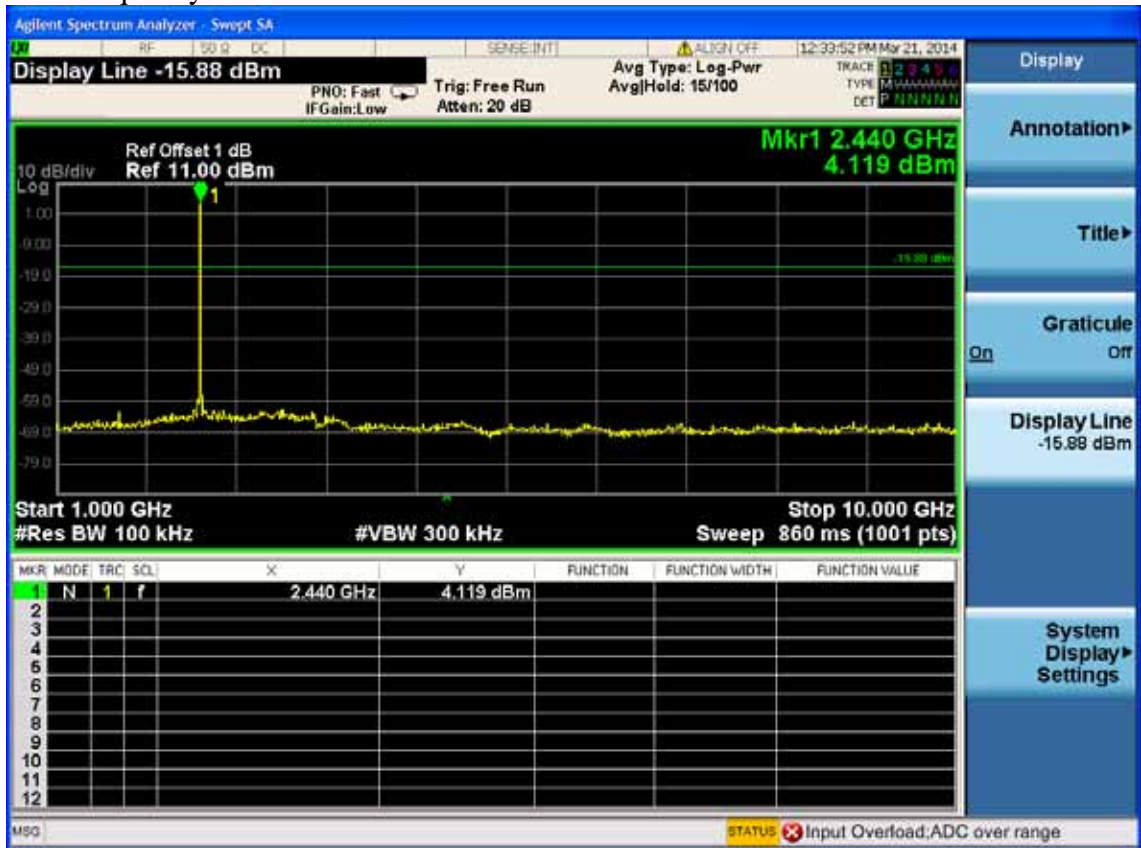


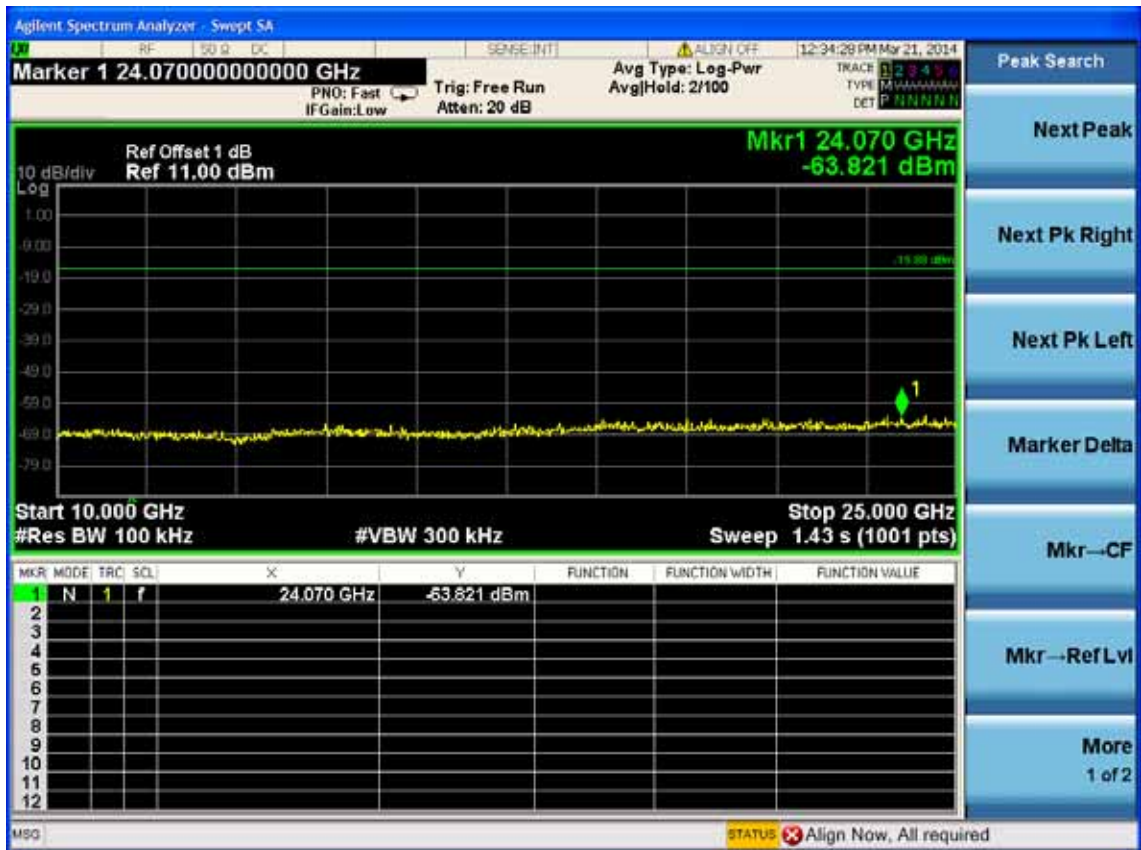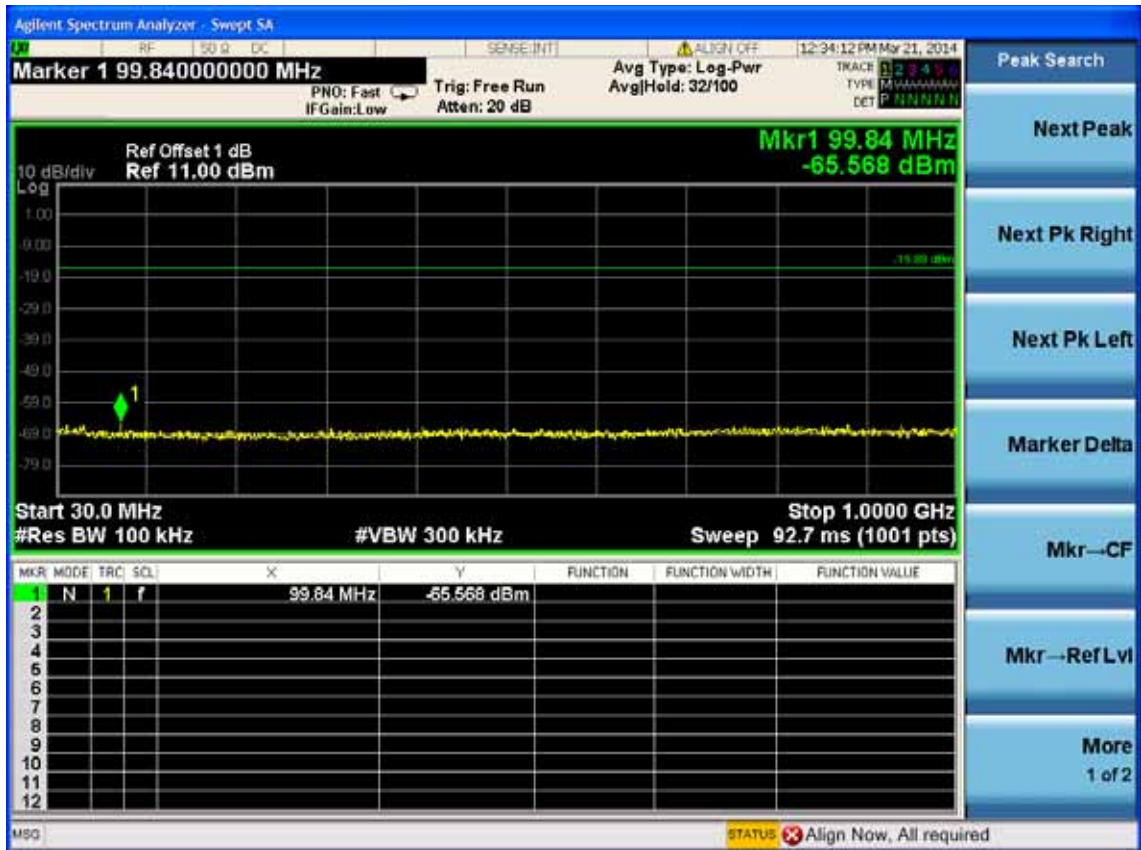





Test Frequency: 2480MHz

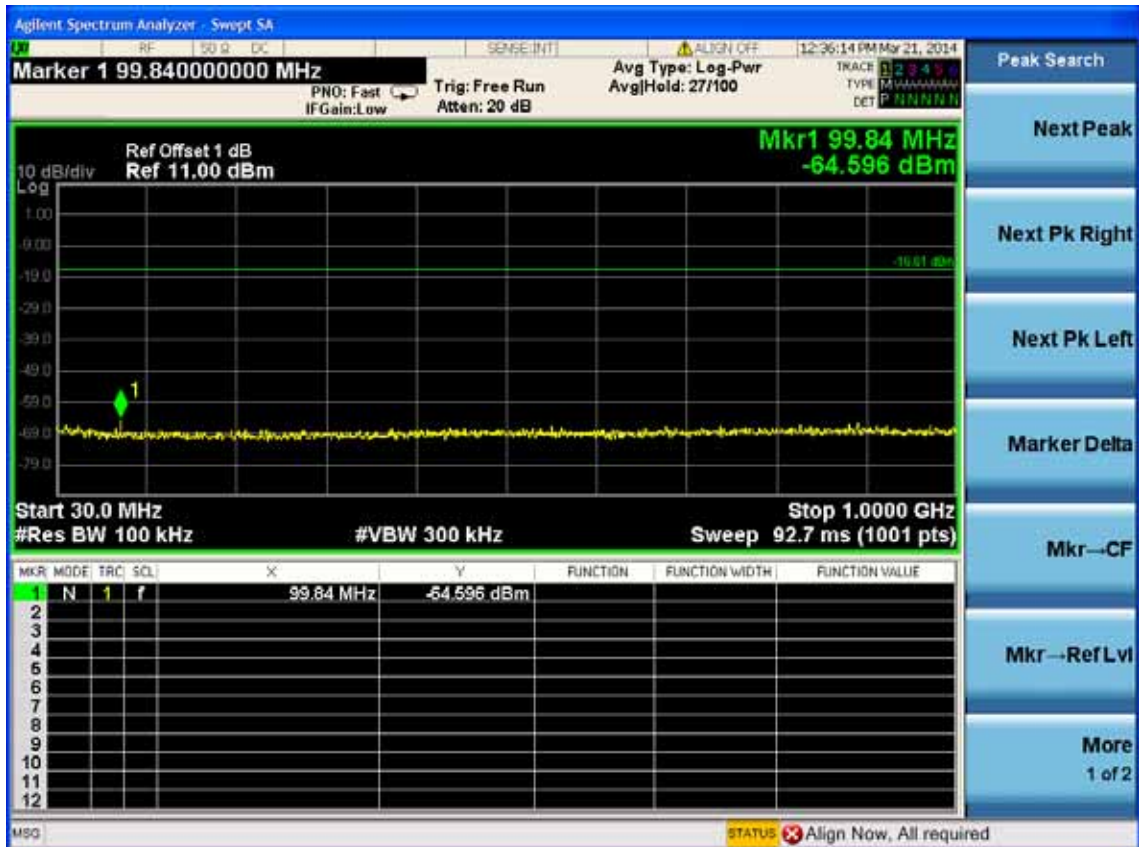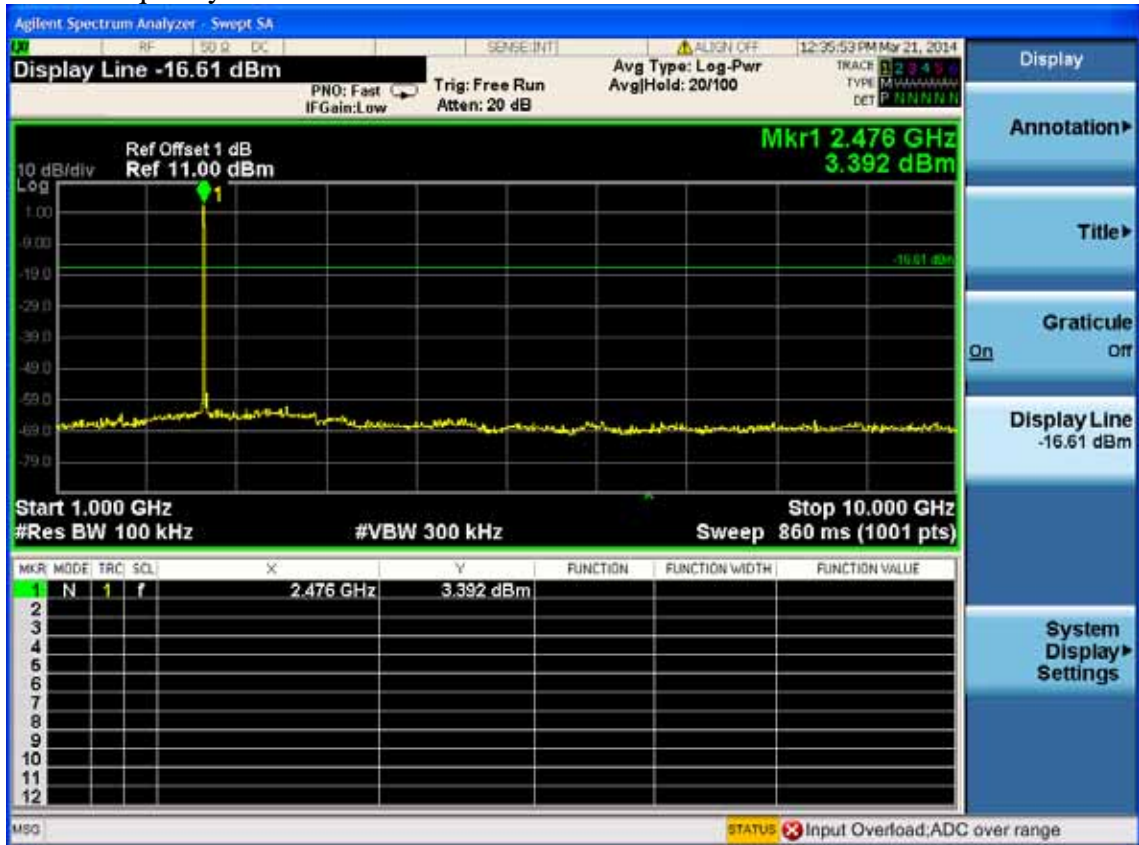


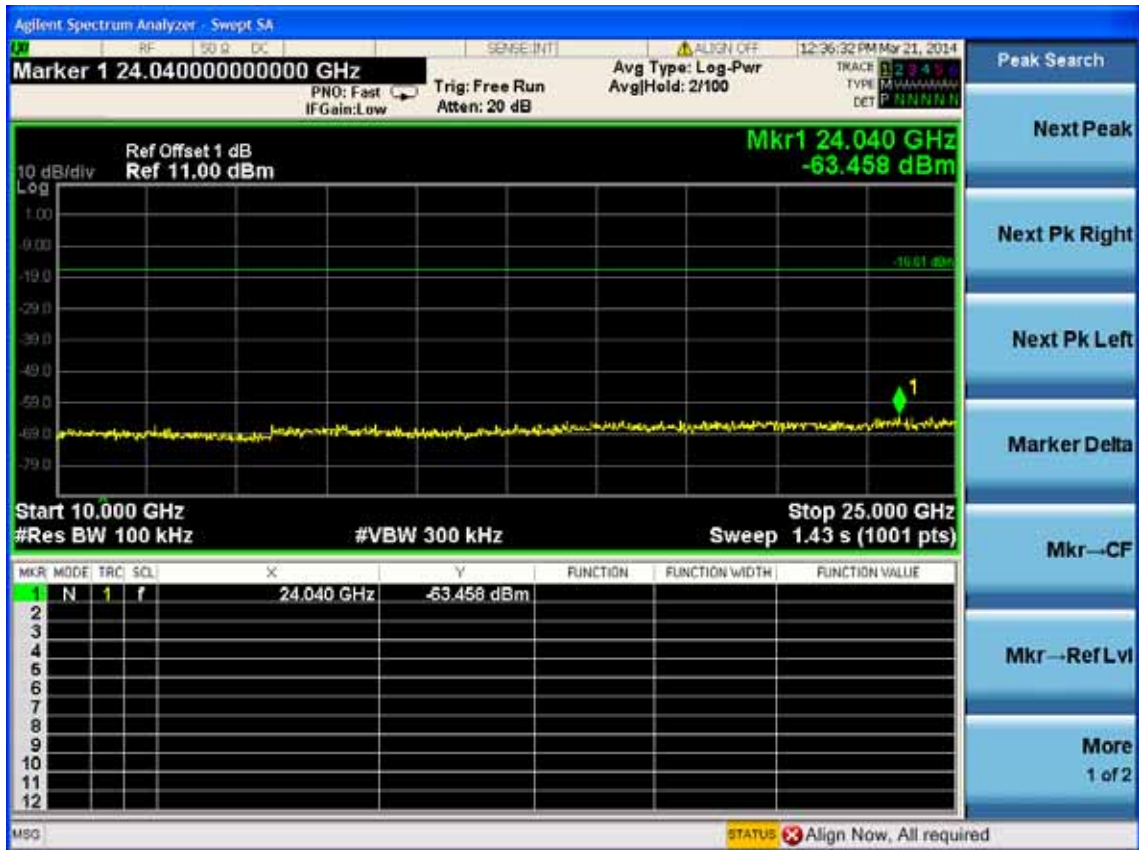




### Hopping on GFSK

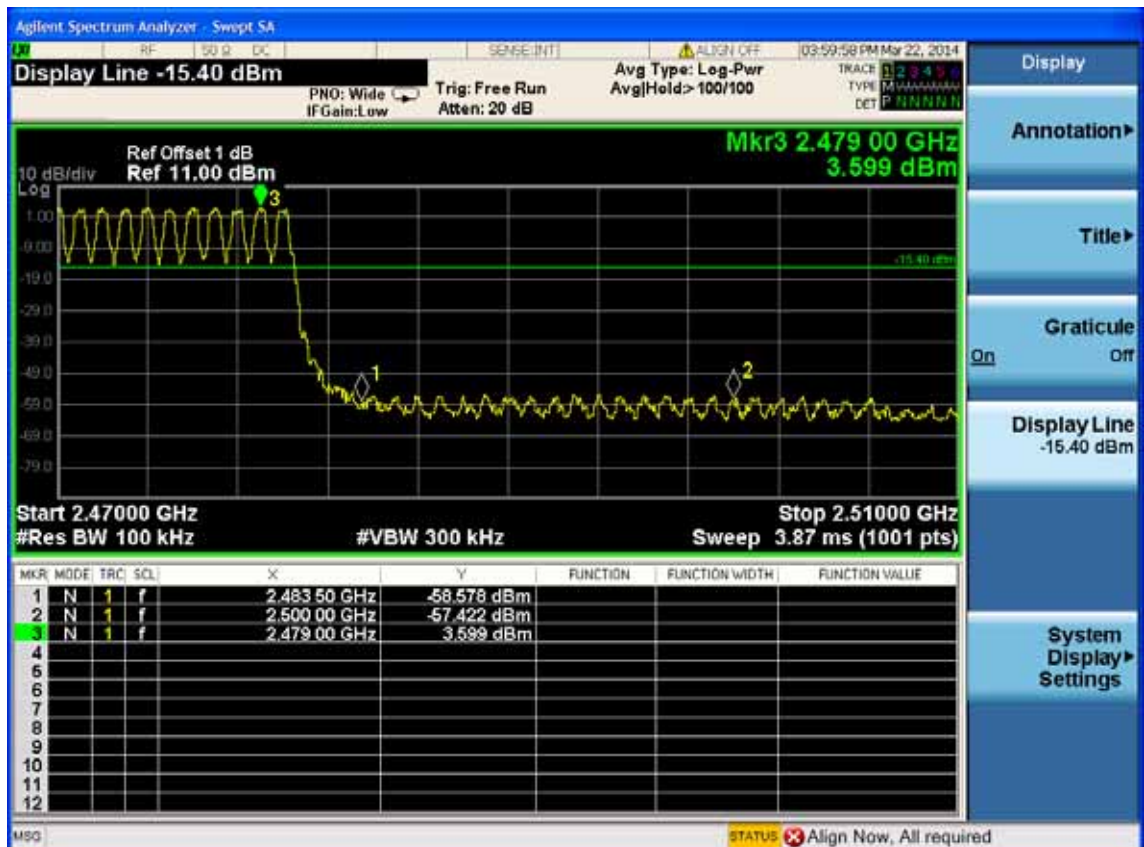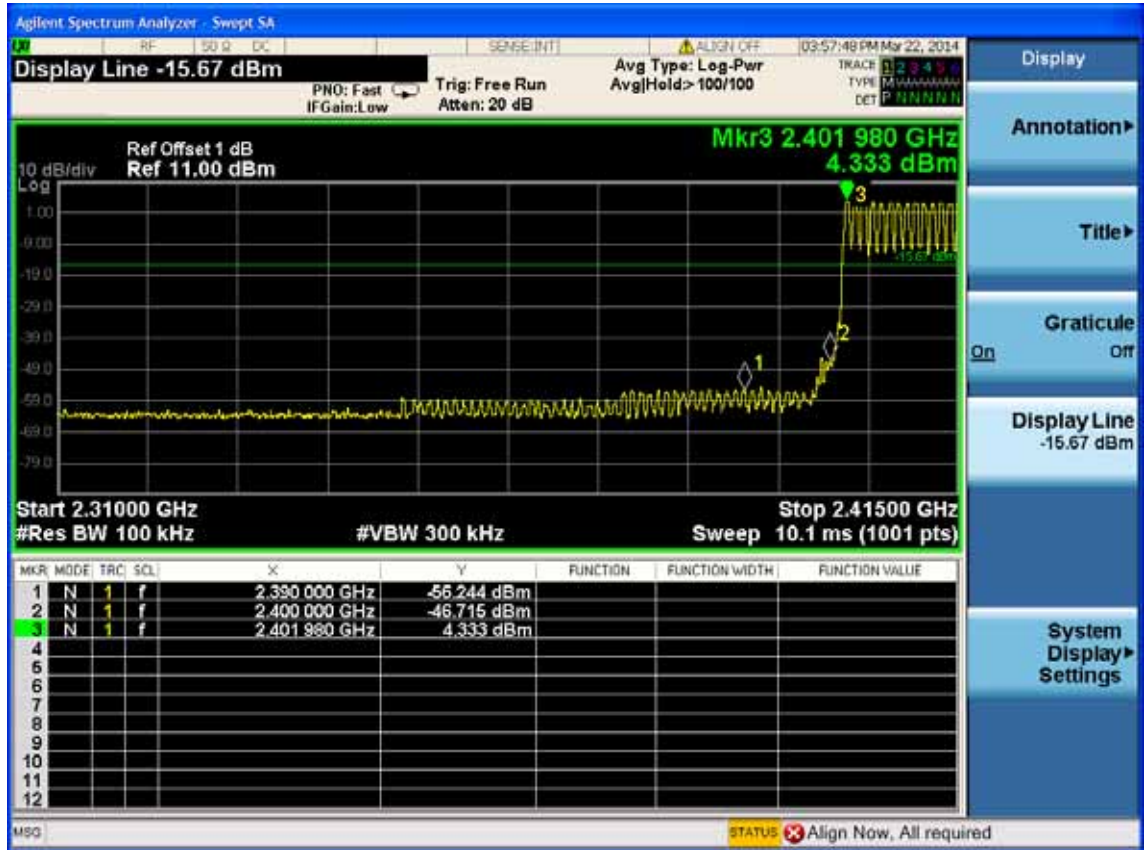

### 8 DPSK

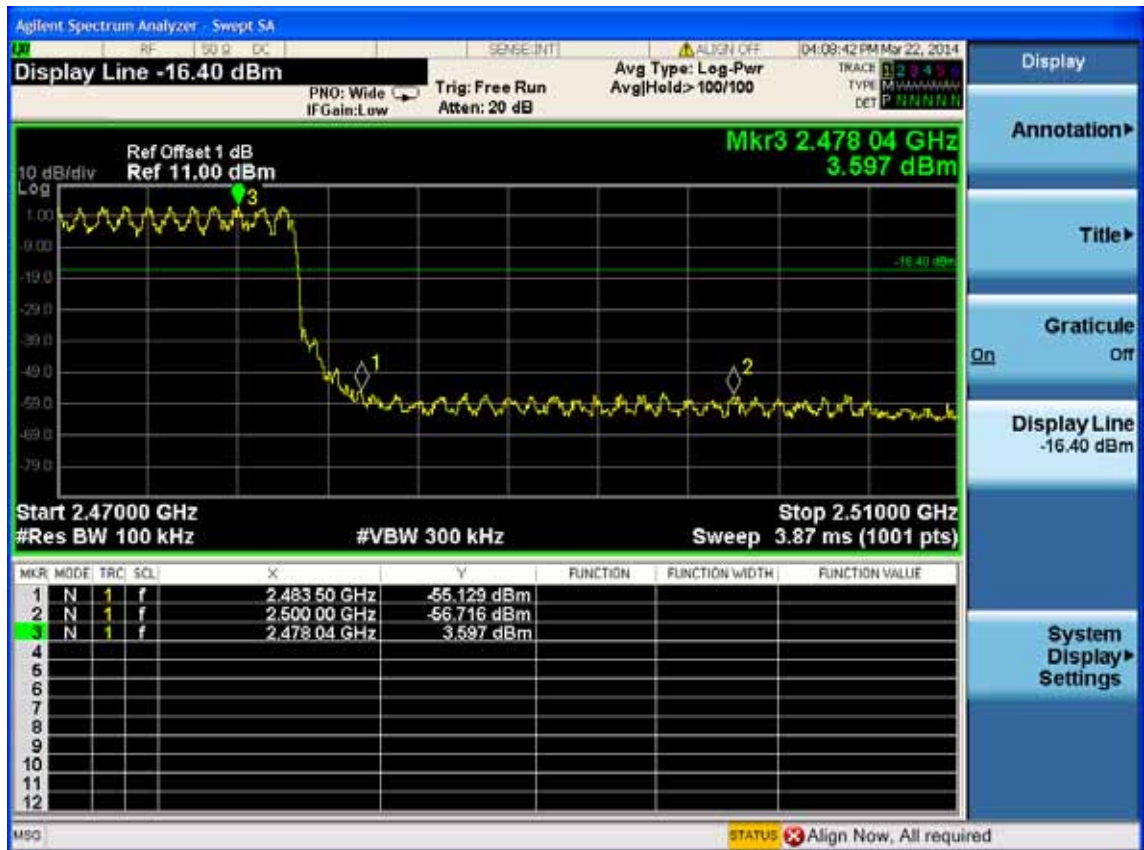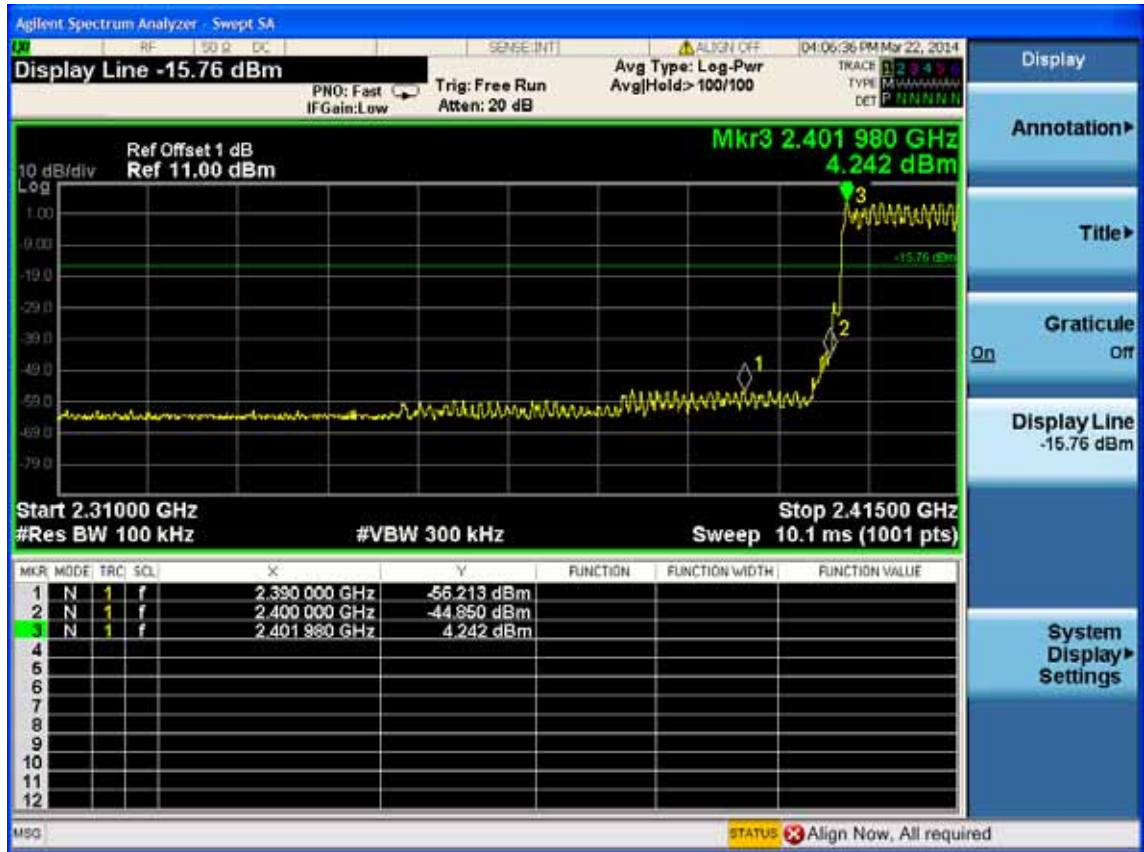

## 6. CARRIER FREQUENCY SEPARATION TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year

### 6.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 6.3. Test Results.

EUT: COMPACT DISC Receiver		
M/N: HCD-ECL77BT		
Test date: 2014-03-23	Pressure: 101.2±1.0 kpa	Humidity: 52.3±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 22.5±0.6°C

Test Mode	Channel separation	Conclusion
8-DPSK	1.0MHz	PASS
GFSK	1.0MHz	PASS



## 7. 20 DB BANDWIDTH TEST

### 7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year

### 7.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 7.3. Test Results

EUT: COMPACT DISC Receiver		
M/N: HCD-ECL77BT		
Test date: 2014-03-23	Pressure: 101.2±1.0 kpa	Humidity: 52.3±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 22.5±0.6°C

Cable loss: 1 dB			
Test Mode	CH (MHz)	20dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	836.4	N/A
	2441	823.9	N/A
	2480	847.2	N/A
8-DPSK	2402	1206	N/A
	2441	1209	N/A
	2480	1205	N/A
Conclusion : PASS			



**GFSK**

Test Frequency: 2402MHz



Test Frequency: 2441MHz



Test Frequency: 2480MHz



8-DPSK

Test Frequency: 2402MHz



Test Frequency: 2441MHz



Test Frequency: 2480MHz





## 8. NUMBER OF HOPPING FREQUENCY TEST

### 8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year



### 8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

### 8.3. Test Results

EUT: COMPACT DISC Receiver		
M/N: HCD-ECL77BT		
Test date: 2014-03-23	Pressure: 101.2±1.0 kpa	Humidity: 52.3±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 22.5±0.6°C

Test Mode	Number of channel	Limit	Conclusion
8-DPSK	79	≥15	PASS
GFSK	79	≥15	PASS

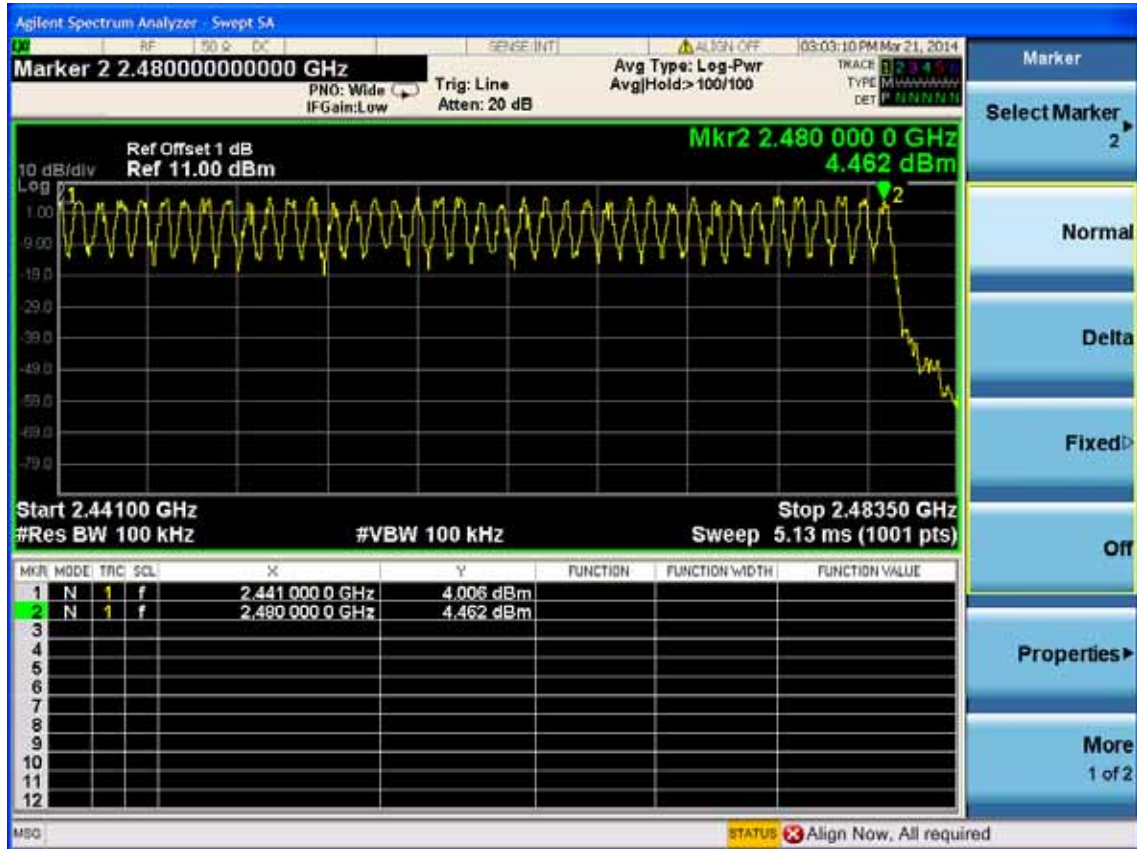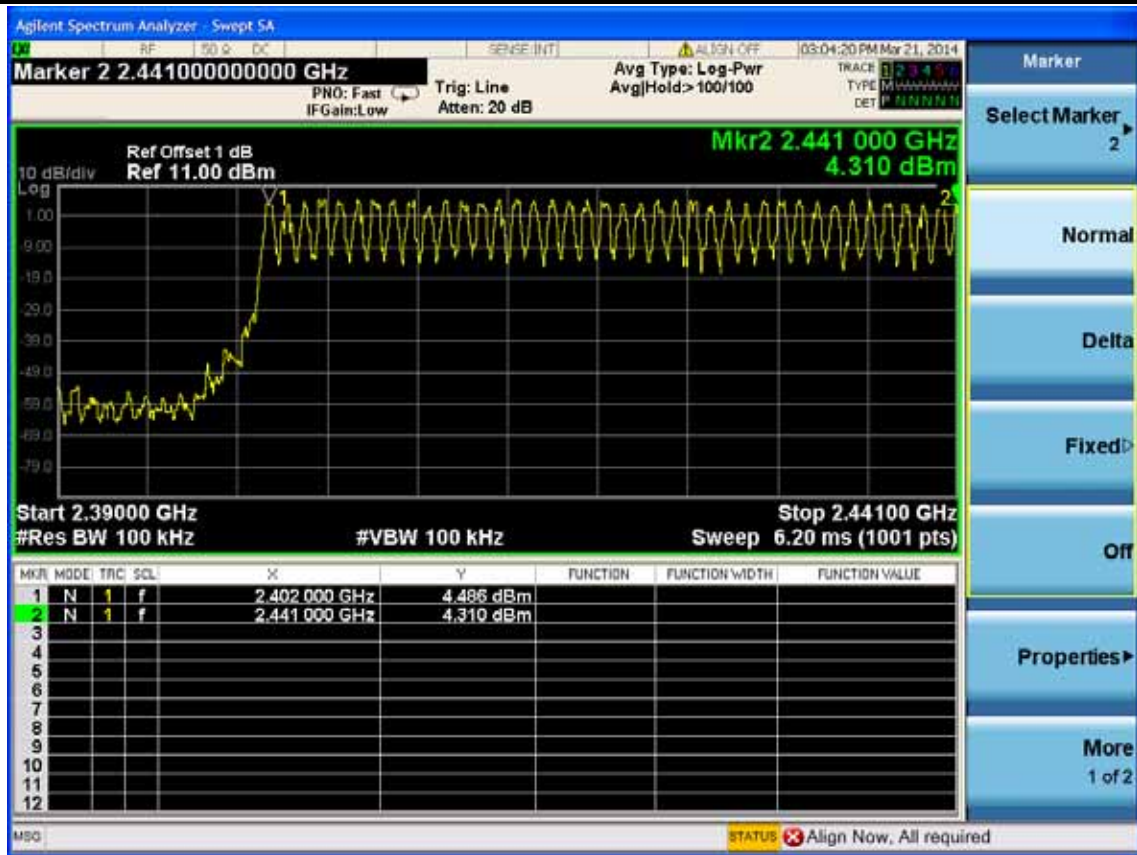

## 9. DWELL TIME

### 9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year

### 9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 9.3. Test Results



EUT: COMPACT DISC Receiver		
M/N: HCD-ECL77BT		
Test date: 2014-03-23	Pressure: 101.2±1.0 kpa	Humidity: 52.3±3.0%
Tested by: Leo-Li	Test site: RF Site	Temperature : 22.5±0.6°C

Mode		dwll time	Limit	Conclusion
GFSK	DH1	$51\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 0.437\text{ms} = 140.85\text{ms}$	<400ms	PASS
	DH3	$25\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 1.707\text{ms} = 269.706\text{ms}$	<400ms	PASS
	DH5	$17\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 2.965\text{ms} = 318.96\text{ms}$	<400ms	PASS
8-DPSK	DH1	$50\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 0.456\text{ms} = 144.096\text{ms}$	<400ms	PASS
	DH3	$26\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 1.701\text{ms} = 279.51\text{ms}$	<400ms	PASS
	DH5	$18\text{hops}/5\text{s} * 0.4 * 79\text{chanel} * 2.97\text{ms} = 337.87\text{ms}$	<400ms	PASS

Note: All the lower levels were signal from receiver's, and should not considered in here.



**Test Mode: GFSK**

DH 1

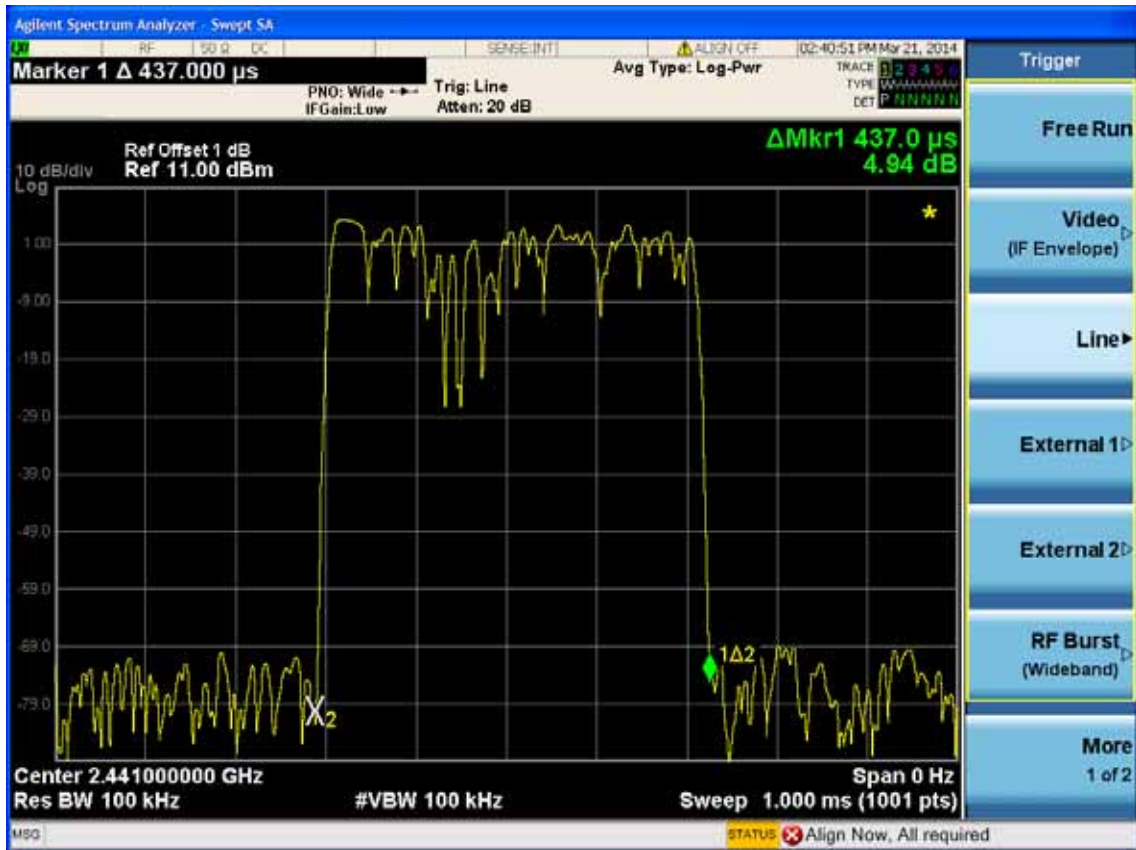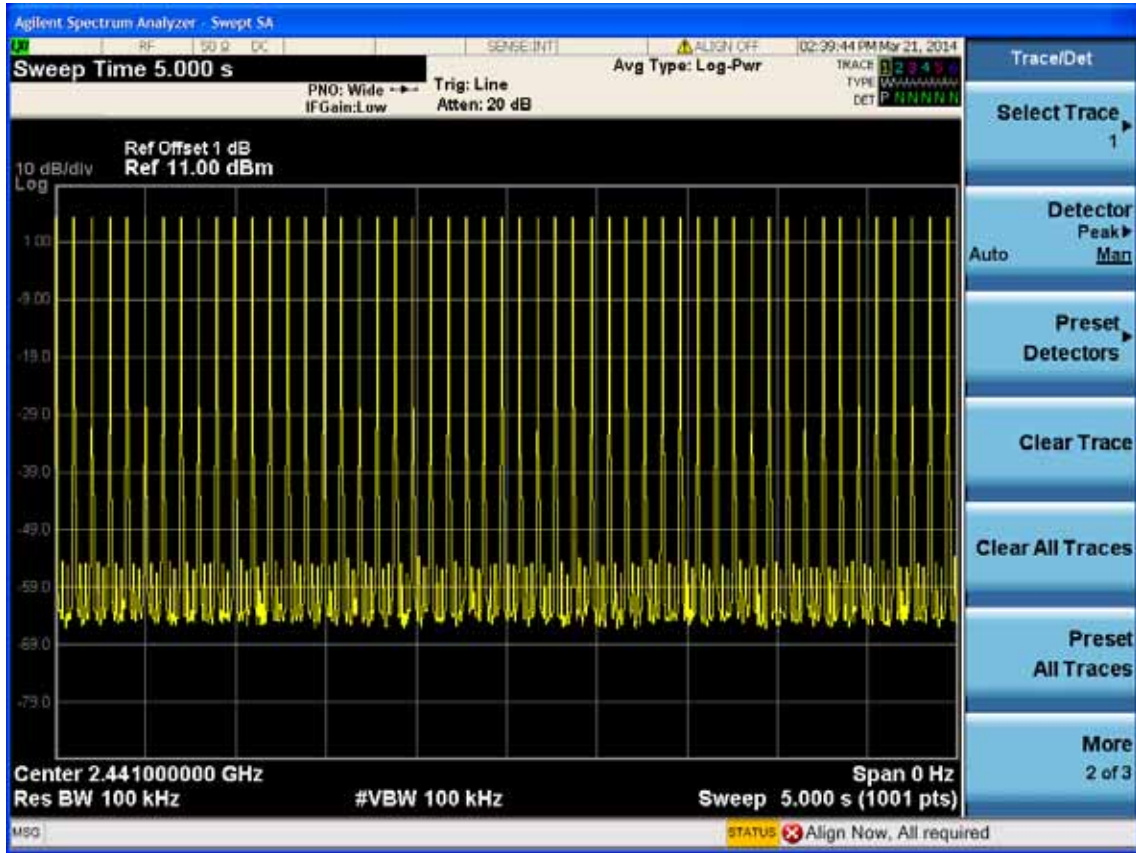





DH 3

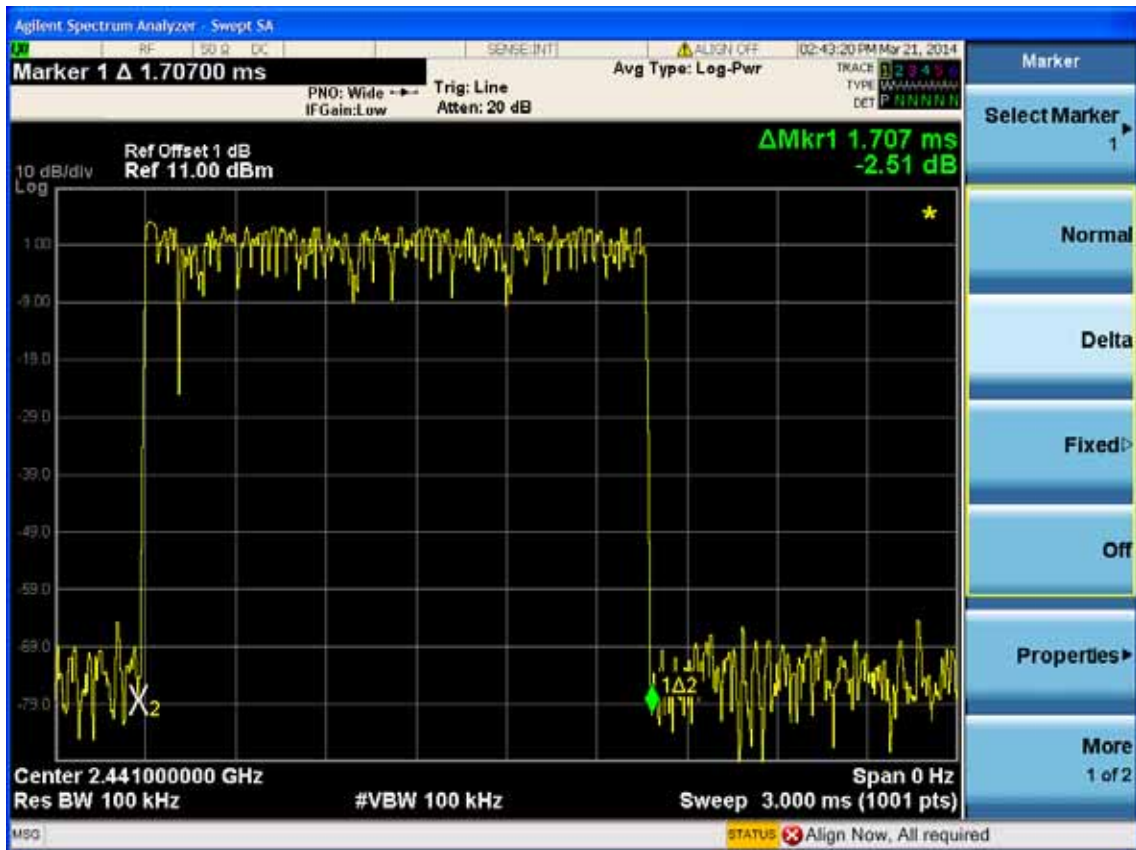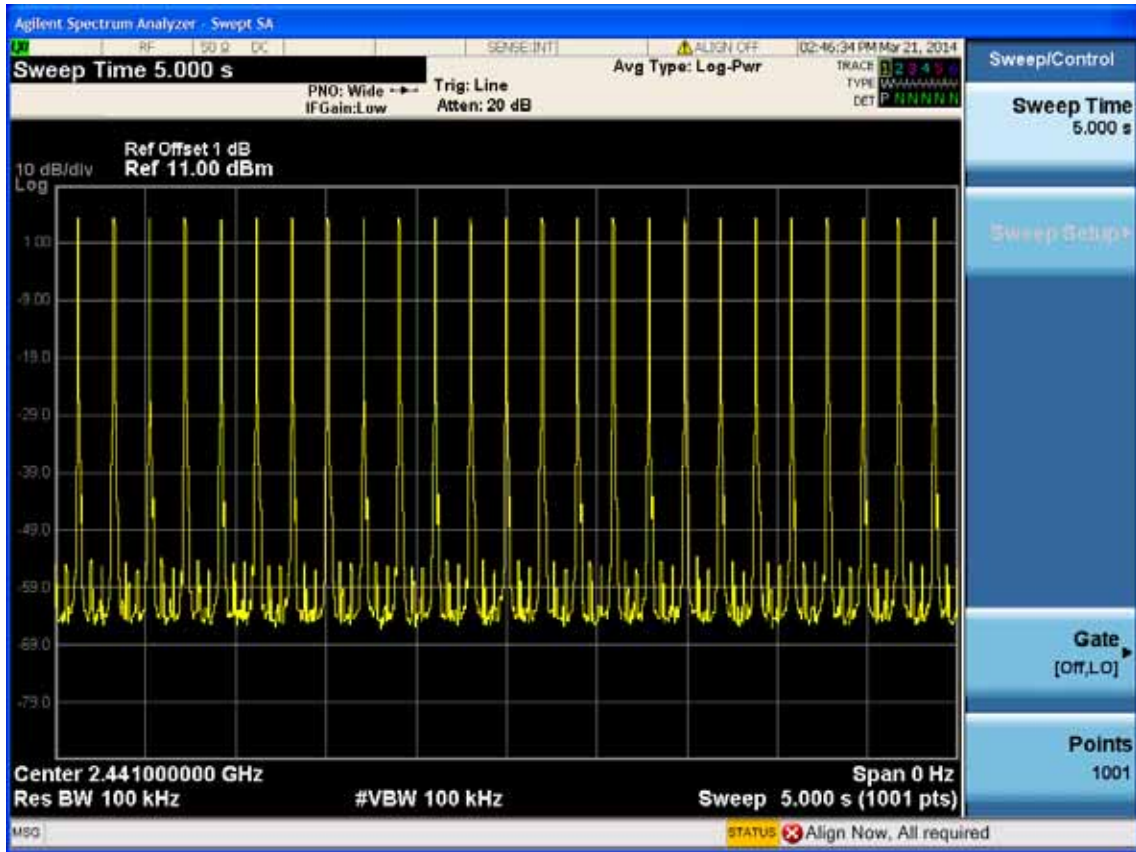





Test Mode: 8-DPSK  
DH 1

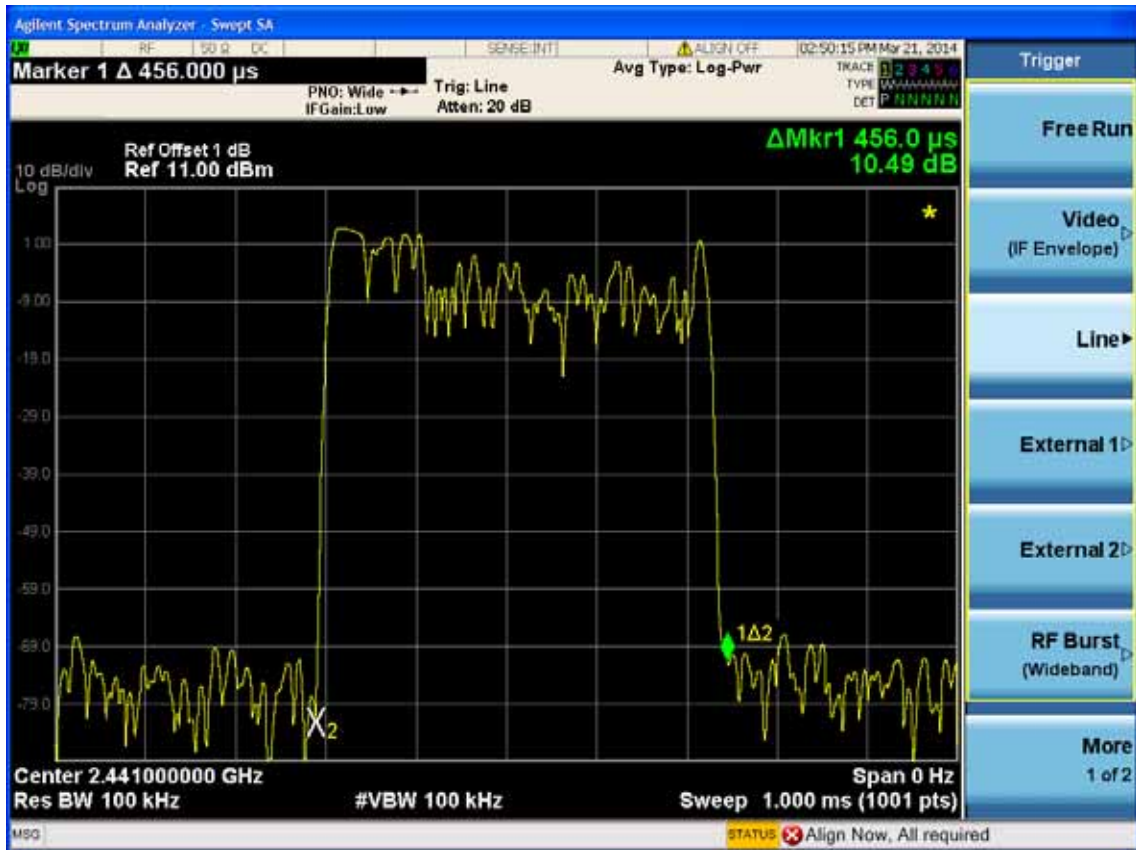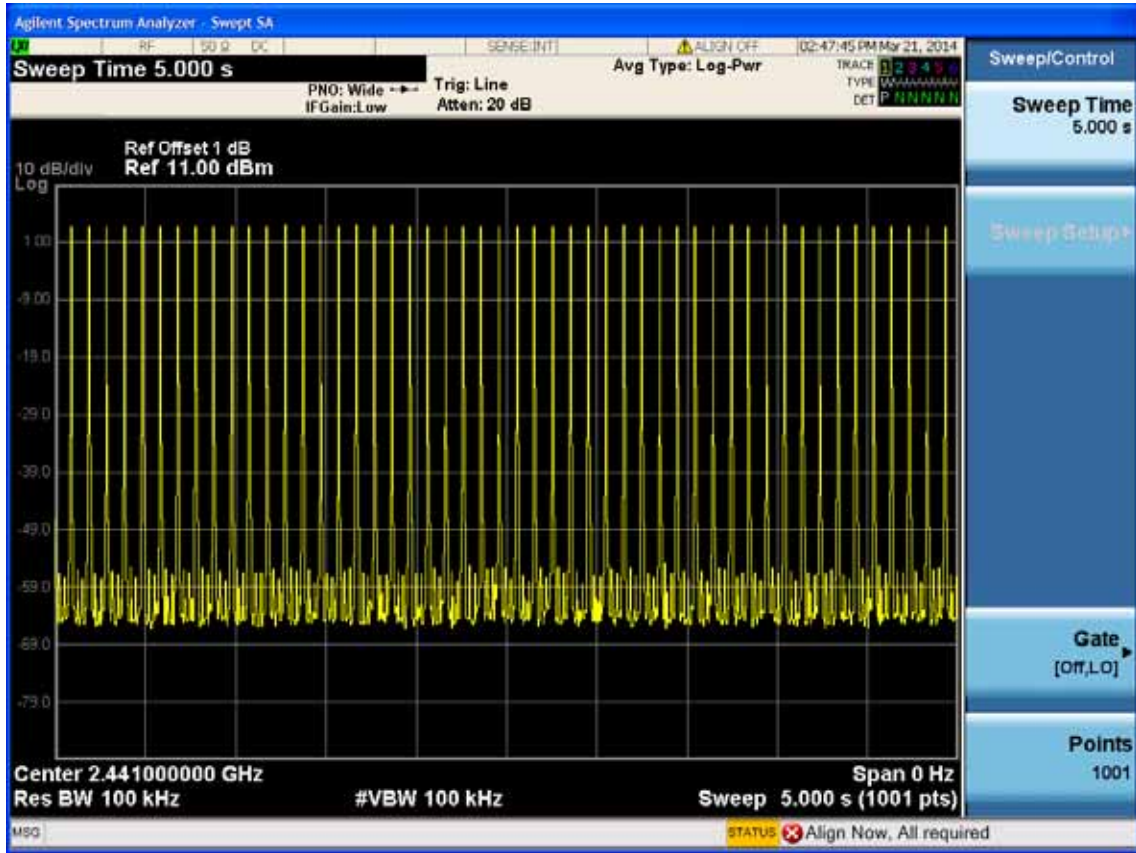





DH 3

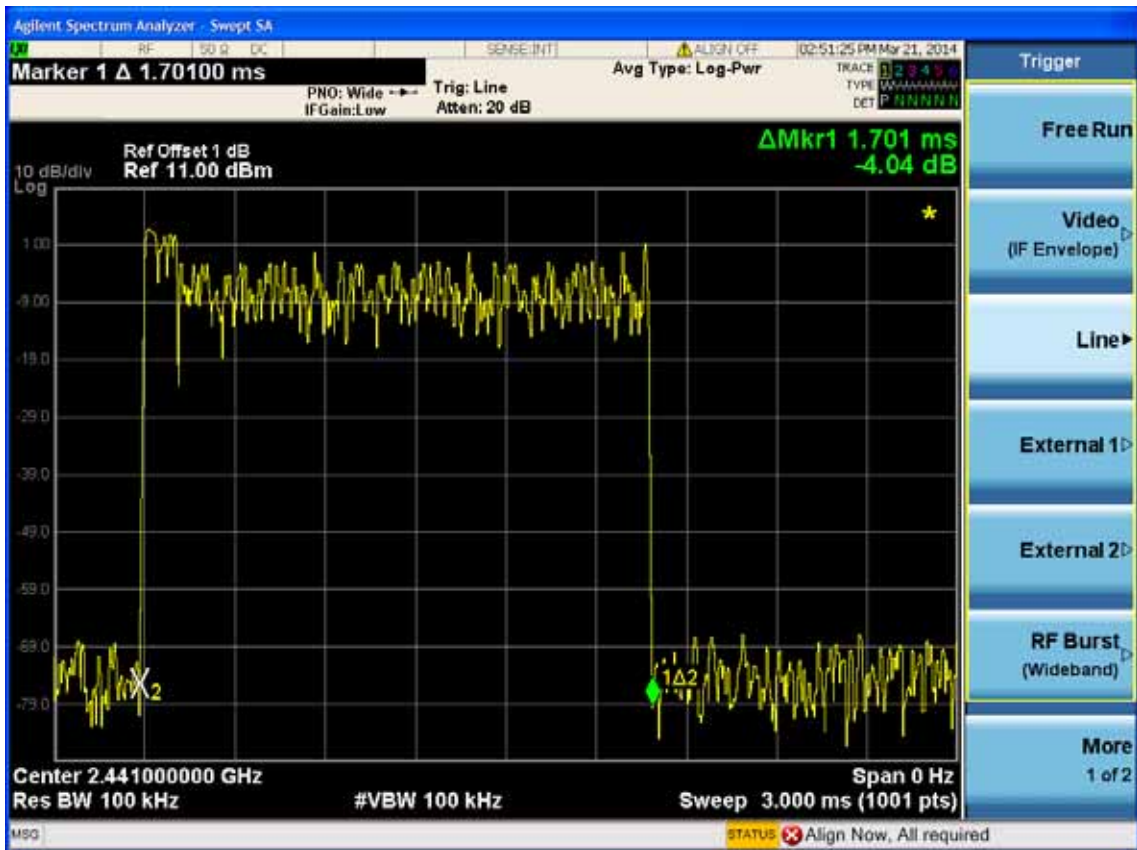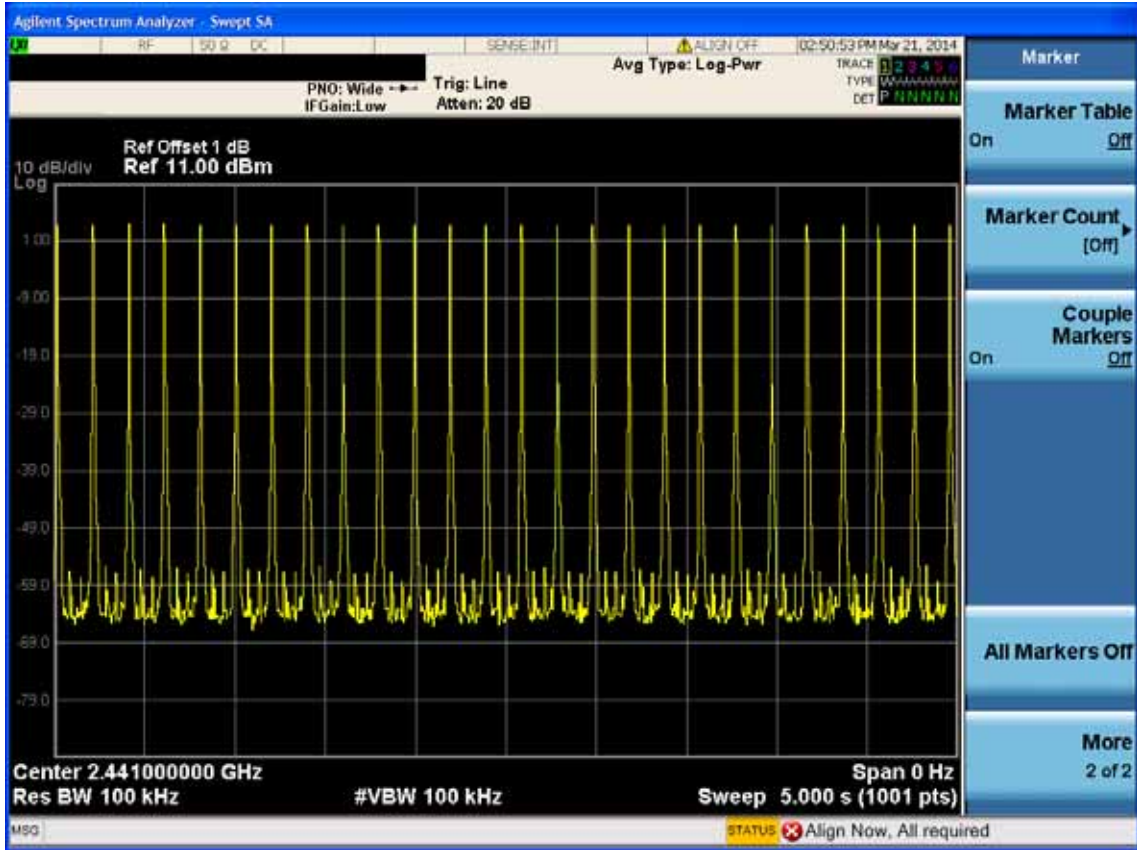



DH 5

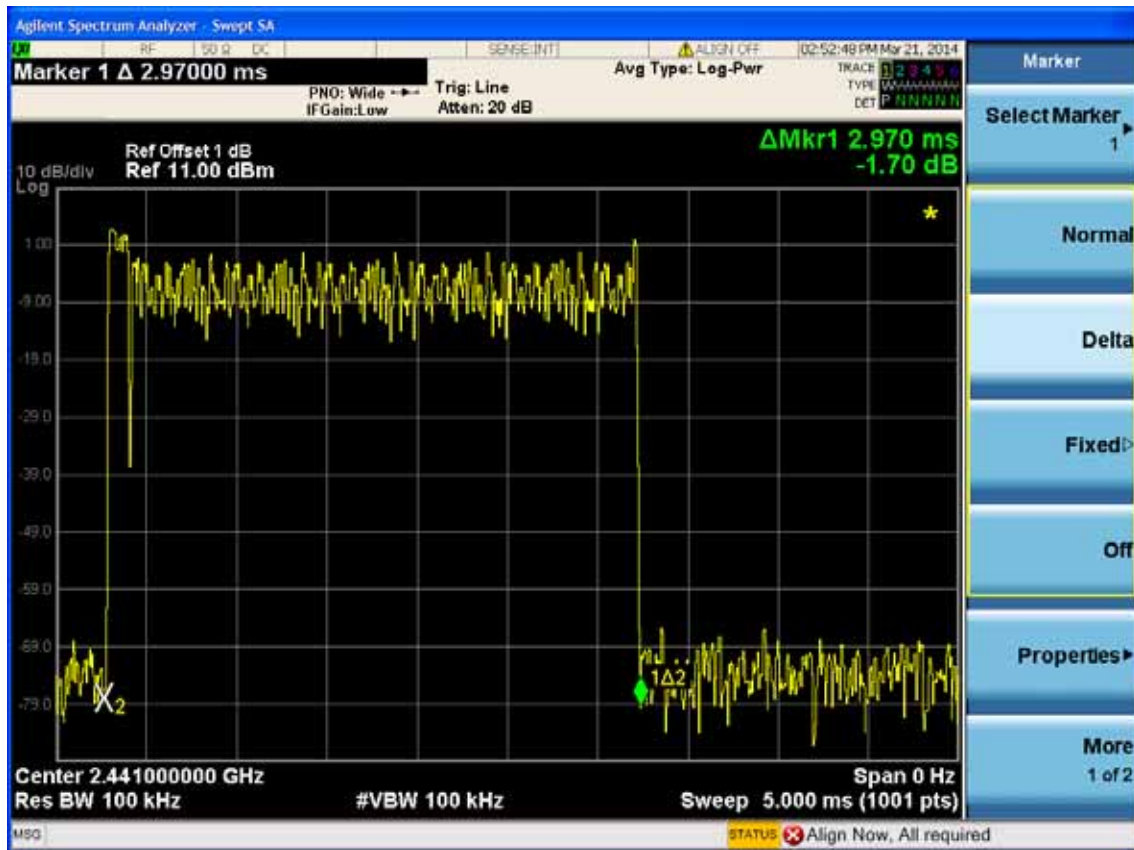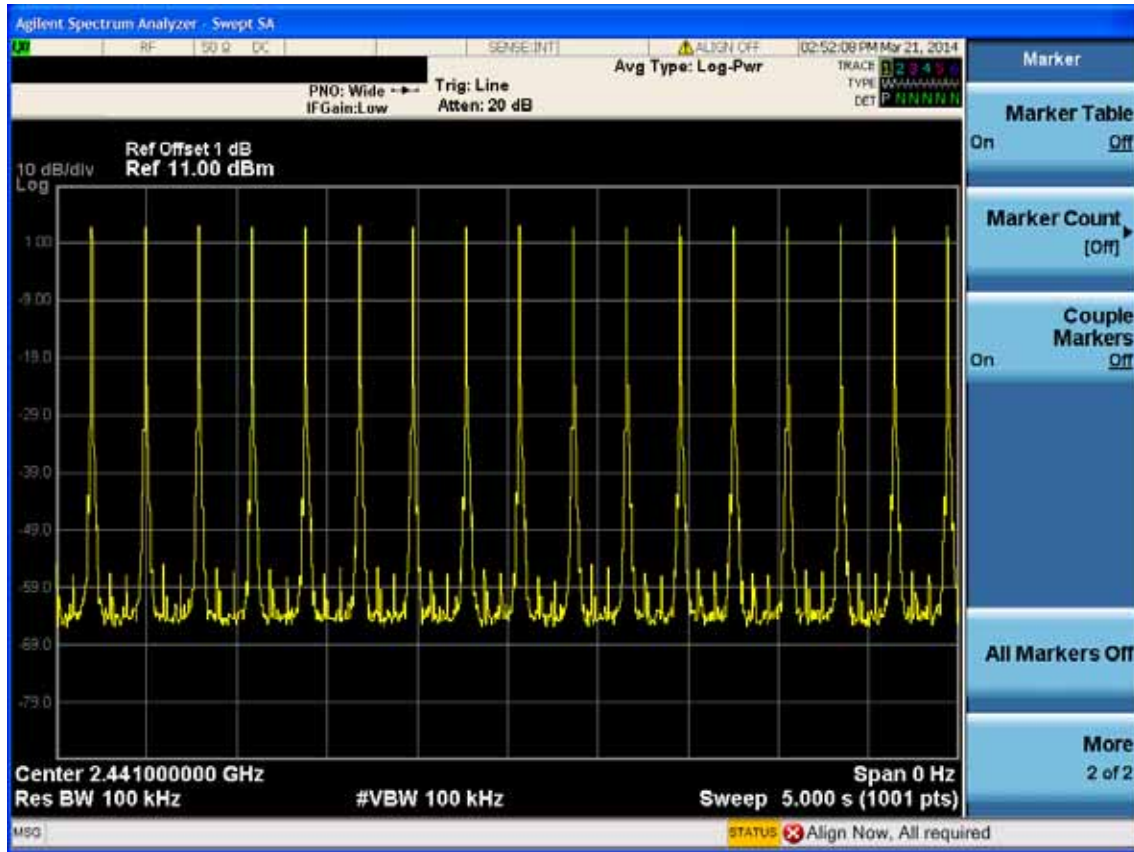

## 10. MAXIMUM PEAK OUTPUT POWER TEST

### 10.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 13	1 Year
3.	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 13	1 Year
5.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 13	1 Year
6.	Power Sensor	Anritsu	MA2491A	033005	May.08, 13	1 Year

### 10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 10.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power Directly.

### 10.4. Test Results

EUT: COMPACT DISC Receiver			
M/N: HCD-ECL77BT			
Test date: 2014-03-23	Pressure: 101.4±1.0 kpa	Humidity: 52.7±1.0%	
Tested by: Leo-Li	Test site: RF site	Temperature: 22.3±1.0 °C	
Cable loss: 1 dB			
Test Mode	CH (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	6.508	30
	2441	5.715	30
	2480	5.370	30
8-DPSK	2402	5.903	30
	2441	4.983	30
	2480	5.504	30
Conclusion: PASS			

## 11. BAND EDGE COMPLIANCE TEST

### 11.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 13	1 Year
3.	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 13	1 Year

### 11.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 11.3. Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
  - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
  - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

### 11.4. Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

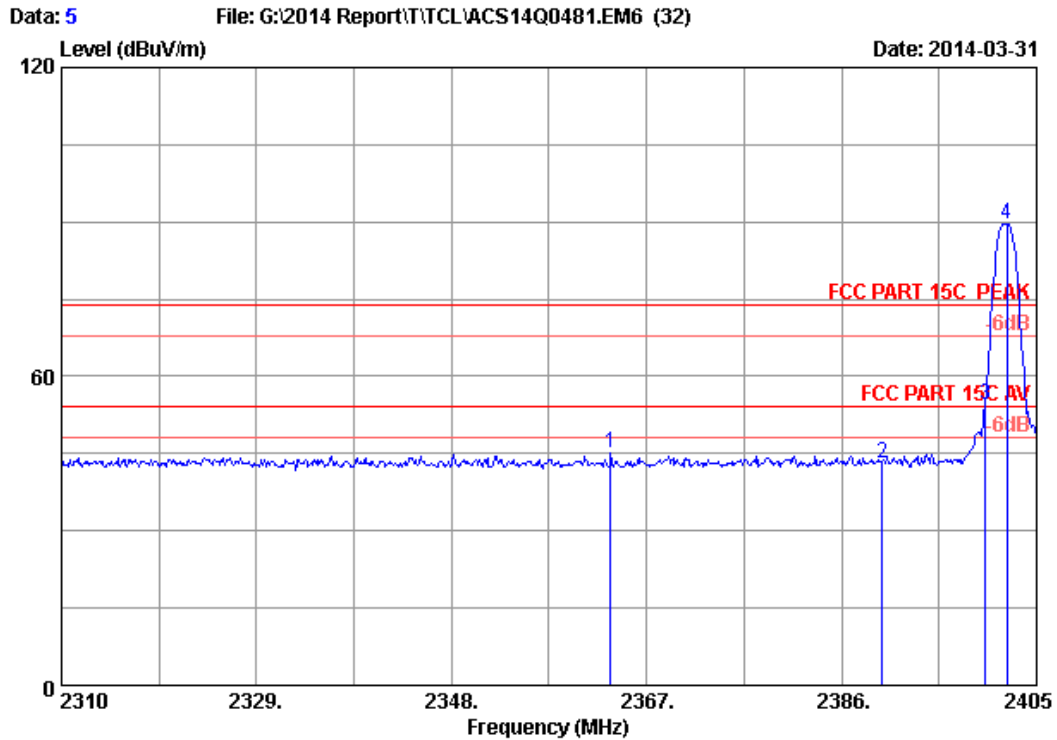

Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2363.485	28.10	5.74	35.70	46.88	45.02	74.00	28.98	Peak
2	2390.000	28.16	5.78	35.70	44.78	43.02	74.00	30.98	Peak
3	2400.000	28.18	5.80	35.70	56.28	54.56	74.00	19.44	Peak
4	2402.150	28.18	5.80	35.70	91.36	89.64	74.00	-15.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

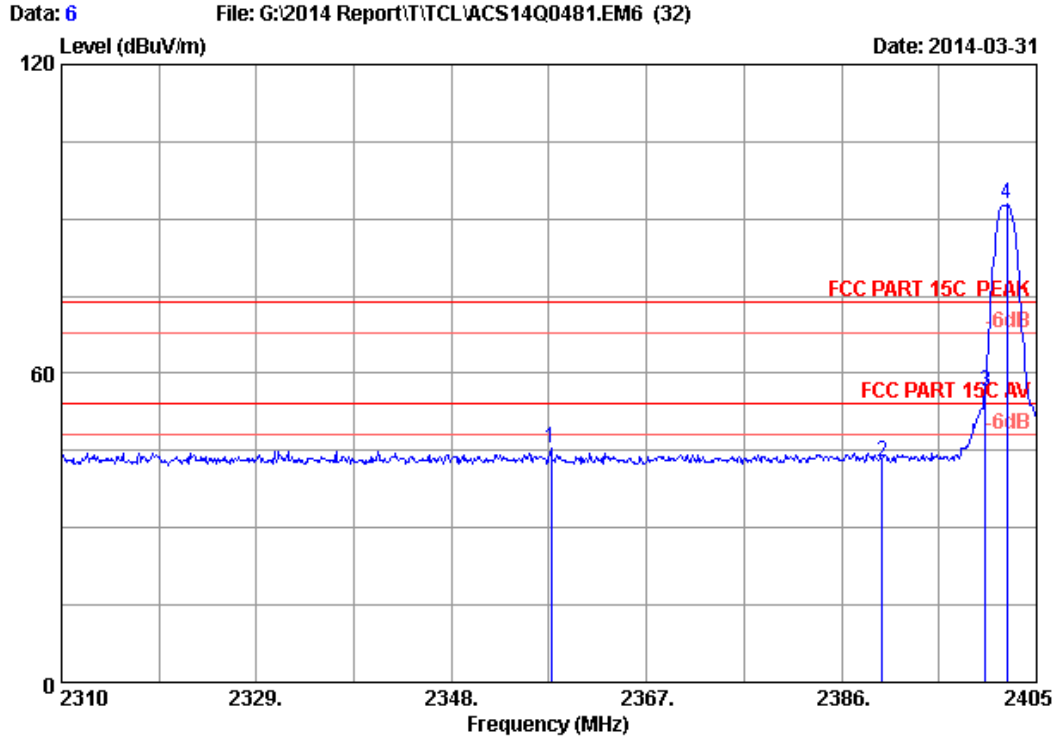

Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2357.690	28.09	5.74	35.70	47.36	45.49	74.00	28.51	Peak
2	2390.000	28.16	5.78	35.70	44.68	42.92	74.00	31.08	Peak
3	2400.000	28.18	5.80	35.70	58.33	56.61	74.00	17.39	Peak
4	2402.150	28.18	5.80	35.70	94.48	92.76	74.00	-18.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

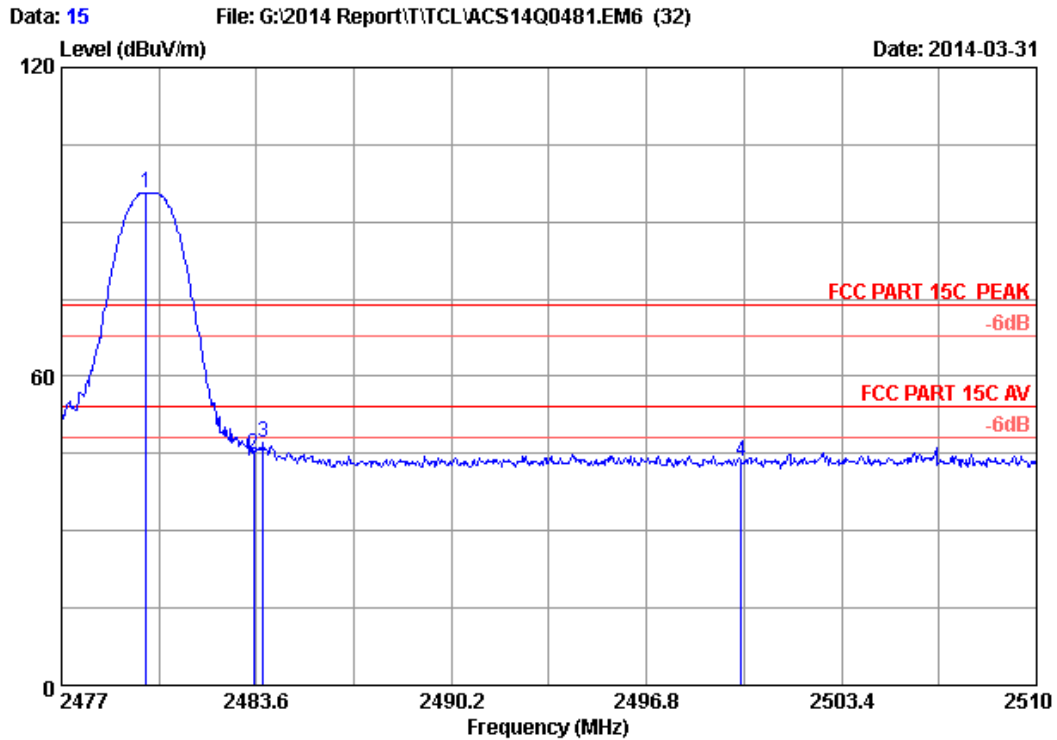

Site no. : 3m Chamber Data no. : 15  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : GFSK 2480MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.871	28.36	5.91	35.70	97.17	95.74	74.00	-21.74	Peak
2	2483.500	28.36	5.92	35.70	46.35	44.93	74.00	29.07	Peak
3	2483.831	28.36	5.92	35.70	48.55	47.13	74.00	26.87	Peak
4	2500.000	28.40	5.94	35.70	44.66	43.30	74.00	30.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

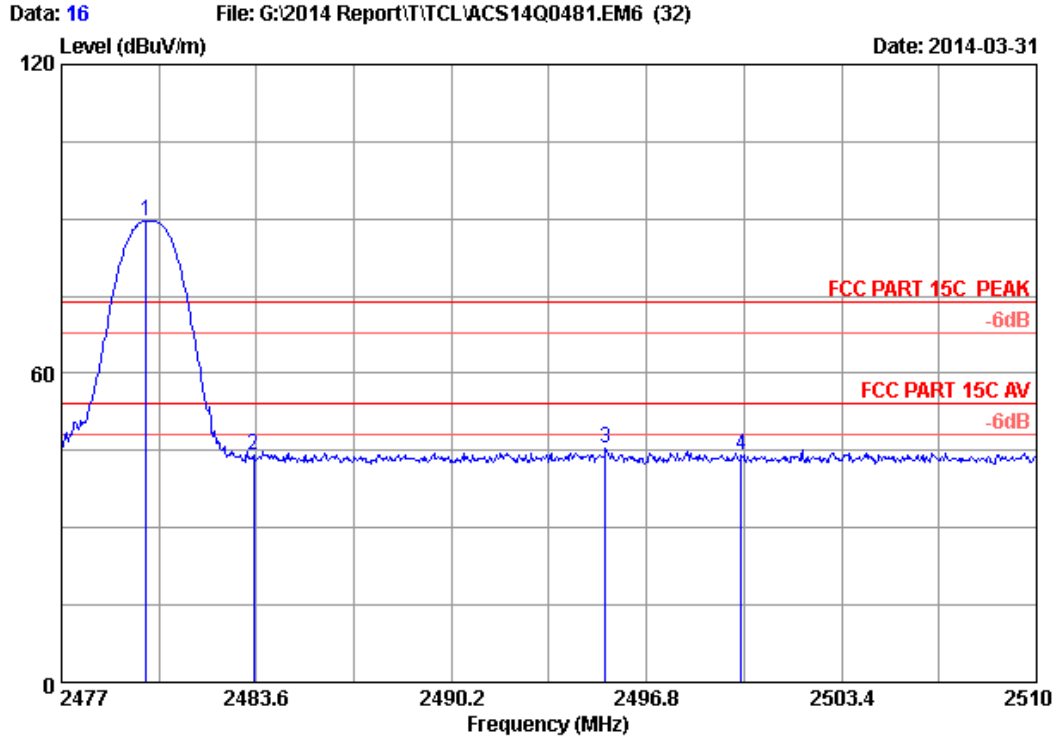

Site no.	: 3m Chamber	Data no.	: 16
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: HOME AUDIO SYSTEM		
Power Rating	: AC 120V/60Hz		
Test Mode	: GFSK 2480MHz Tx Mode		
M/N	: MHC-ECL77BT		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.871	28.36	5.91	35.70	90.94	89.51	74.00	-15.51	Peak
2	2483.500	28.36	5.92	35.70	45.70	44.28	74.00	29.72	Peak
3	2495.414	28.39	5.94	35.70	46.84	45.47	74.00	28.53	Peak
4	2500.000	28.40	5.94	35.70	45.38	44.02	74.00	29.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

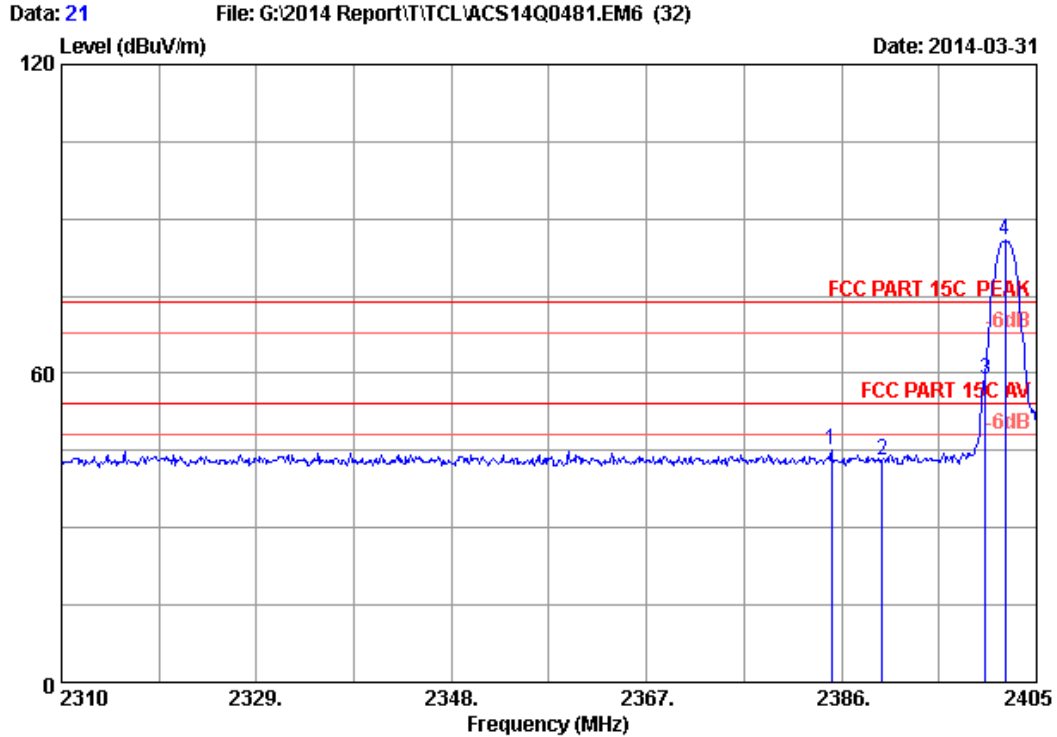


Site no. : 3m Chamber Data no. : 21  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2402MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.050	28.15	5.78	35.70	46.83	45.06	74.00	28.94	Peak
2	2390.000	28.16	5.78	35.70	44.98	43.22	74.00	30.78	Peak
3	2400.000	28.18	5.80	35.70	60.57	58.85	74.00	15.15	Peak
4	2401.960	28.18	5.80	35.70	87.66	85.94	74.00	-11.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.




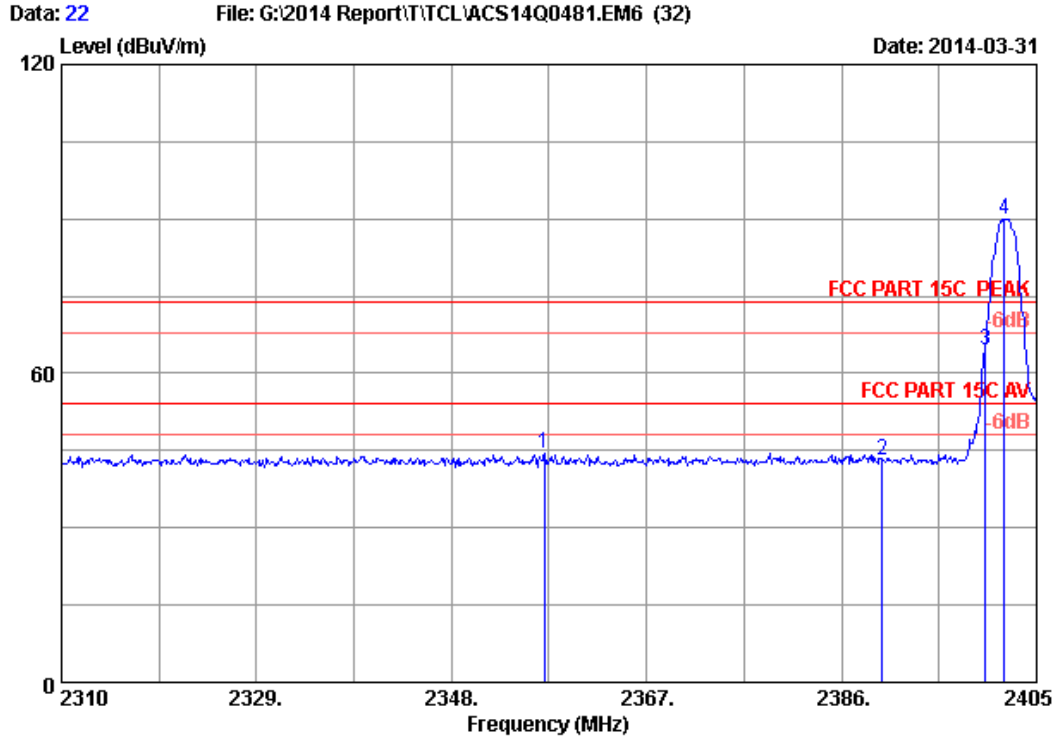

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2402MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2357.025	28.09	5.73	35.70	46.32	44.44	74.00	29.56	Peak
2	2390.000	28.16	5.78	35.70	44.79	43.03	74.00	30.97	Peak
3	2400.000	28.18	5.80	35.70	66.13	64.41	74.00	9.59	Peak
4	2401.865	28.18	5.80	35.70	91.76	90.04	74.00	-16.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

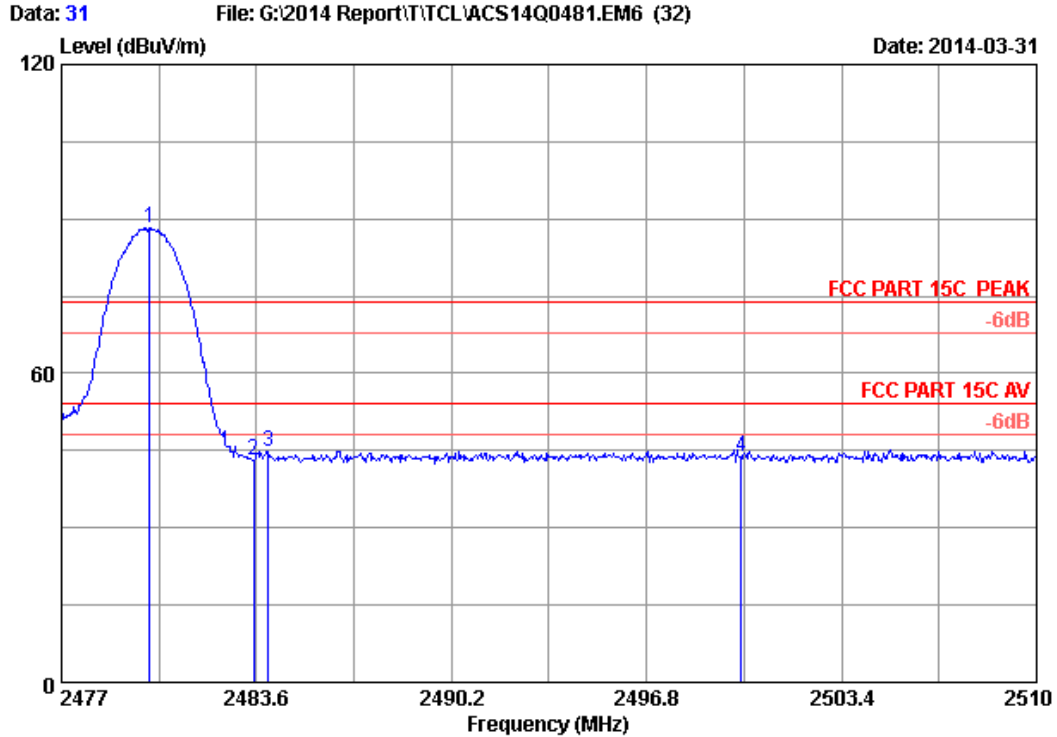

Site no. : 3m Chamber Data no. : 31  
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 24°C/56% Engineer : Eric  
 EUT : HOME AUDIO SYSTEM  
 Power Rating : AC 120V/60Hz  
 Test Mode : 8-DPSK 2480MHz Tx Mode  
 M/N : MHC-ECL77BT

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.970	28.36	5.91	35.70	89.64	88.21	74.00	-14.21	Peak
2	2483.500	28.36	5.92	35.70	44.64	43.22	74.00	30.78	Peak
3	2483.996	28.36	5.92	35.70	46.35	44.93	74.00	29.07	Peak
4	2500.000	28.40	5.94	35.70	45.17	43.81	74.00	30.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

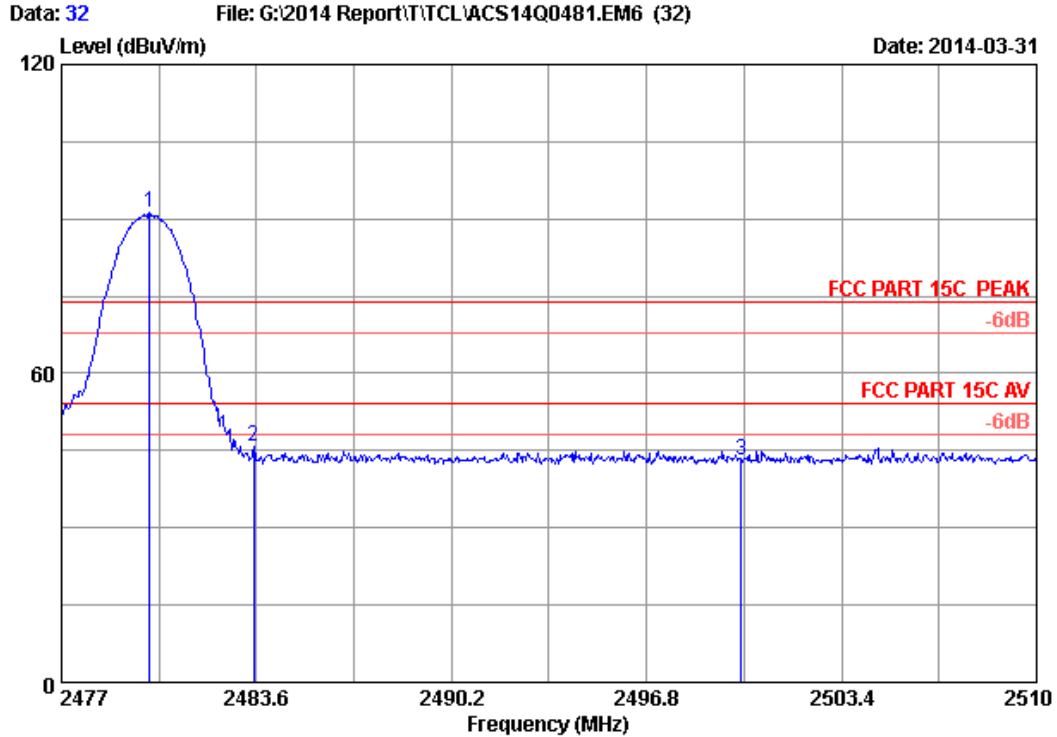

Site no.	: 3m Chamber	Data no.	: 32
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Eric
EUT	: HOME AUDIO SYSTEM		
Power Rating	: AC 120V/60Hz		
Test Mode	: 8-DPSK 2480MHz Tx Mode		
M/N	: MHC-ECL77BT		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2479.970	28.36	5.91	35.70	92.53	91.10	74.00	-17.10	Peak
2	2483.500	28.36	5.92	35.70	47.30	45.88	74.00	28.12	Peak
3	2500.000	28.40	5.94	35.70	44.63	43.27	74.00	30.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

## 12. DEVIATION TO TEST SPECIFICATIONS

[NONE]