

# TEST REPORT

## 1. Applicant

**Name** : APROTECH CO.,LTD.  
**Address** : 201-23, Anyang-Dong, Manan-Gu, Anyang-Si, Gyeonggi-Do, 430-817, Korea

## 2. Products

**Name** : Digital Enhanced Cordless Telephone (Punkt)  
**Model** : DP01 (Base)  
**Manufacturer** : APROTECH CO.,LTD.

## 3. Test Standard/Method

: FCC Part 15 Subpart D/ ANSI C63.17

## 4. Test Results

: Positive

## 5. Use of Report

: -


## 6. Date of Application

: August 22, 2011

## 7. Date of Issue

: September 19, 2011

Tested by



Sung-kyu Cho

Telecommunication Center  
Engineer

Approved by



Jeong-min Kim

Telecommunication Center  
Manager

*The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.*

# Korea Testing Laboratory

## TABLE OF CONTENTS

1. GENERAL INFORMATIONS .....	3
2. SUMMARY OF TEST RESULTS .....	5
3. TEST RESULTS .....	7
3.1 ANTENNA REQUIREMENTS .....	7
3.2 DIGITAL MODULATION TECHNICS .....	8
3.3 EMISSION BANDWIDTH .....	9
3.4 POWER ADJUSTMENT FOR ANTENNA GAIN .....	11
3.5 RADIATED OUT OF BAND EMISSION .....	12
3.6 PEAK TRANSMIT POWER .....	13
3.7 POWER SPECTRAL DENSITY .....	16
3.8 AUTOMATICALLY DISCONTINUED TRANSMISSION .....	18
3.9 IN-BAND EMISSIONS .....	19
3.10 OUT-OF-BAND EMISSIONS .....	21
3.11 CARRIER FREQUENCY STABILITY .....	28
3.12 FRAME REPETITION STABILITY .....	29
3.13 FRAME PERIOD AND JITTER .....	30
3.14 MONITORING TIME .....	31
3.15 MONITORING THRESHOLD .....	32
3.16 MAXIMUM TRANSMIT TIME .....	33
3.17 SYSTEM ACKNOWLEDGEMENT .....	34
3.18 LEAST INTERFERED CHANNEL & CHANNEL CONFIRMATION .....	35
3.19 RANDOM WAITTING .....	36
3.20 MONITORING BANDWIDTH .....	37
3.21 MAXIMUM REACTION TIME .....	40
3.22 MONITORING ANTENNA .....	42
3.23 DUPLEX CONNECTIONS .....	43
3.24 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICE .....	44
3.25 CONDUCTED EMISSIONS .....	45
4. SELF DECLARATION .....	47
5. TEST SET UP .....	48
6. TEST EQUIPMENT .....	49

## 1. GENERAL INFORMATIONS

### 1.1 Applicant (Client)

Name	APROTECH CO.,LTD.
Address	201-23, Anyang-dong, Manan-gu, Anyang-Si, Gyeonggi-do, 430-817, Korea
Contact Person	JH Yang
Telephone No.	82 31 478 2687
Facsimile No.	82 31 459 9024
E-mail address	jhyang@aprotech.net
Manufacturer	APROTECH CO.,LTD.
Manufacturer Address	201-23, Anyang-dong, Manan-gu, Anyang-Si, Gyeonggi-do, 430-817, Korea

### 1.2 Equipment (EUT)

Name	Digital Enhanced Cordless Telephone (Punkt)
Model Name	DP01
FCC ID	ZY2DP01
IC Number	-
Operating Frequency	1921.536 ~ 1928.448 MHz
Number of channels	5
Type of Modulation	GFSK
Hardware Version	V1.2
Software Version	A020
Serial No.	Prototype

### 1.3 Technical specifications

Frequency Band	1920 ~ 1930 MHz
Frame Period	10 ms
Time Slot Length	416.67 us
Slots	12 RX, 12 TX slots
Slot Structure	6 active duplex pairs per frame
Bit Rate	1.152 Mbit
Number of channels	5 RF Channels, 5x12=60 TDMA duplex Channels

Frequency Band	Frequency
Channel 1	1921.536 MHz
Channel 2	1923.264 MHz
Channel 3	1924.992 MHz
Channel 4	1926.720 MHz
Channel 5	1928.448 MHz

### 1.4 Testing Laboratory

Testing Place	Korea Testing Labortory (KTL) 723, Haean-ro, Sangnok-gu, Ansan-si, Gyeonggi-Do, Korea
FCC registration number	408324
Industry Canada filing number	6298A
Test Engineer	Jong-gon Ban
Telephone number	+82 31 5000 133
Facsimile number	+82 31 5000 149
E-mail address	banjg@ktl.re.kr

## 2. SUMMARY OF TEST RESULTS

Name of Test	FCC Part	Test Procedure ANSIC63.17	Verdict
Antenna Requirements	15.317, 15.203	Declaration	Attestation
Digital Modulation Techniques	15.319(b)	6.1.4	Attestation
Emission Bandwidth	15.323(a)	6.1.3	Complies
Power adjustment for antenna gain	15.319(e)	4	Attestation
Conducted Emission	15.207(a)	ANSI C63.4	Complies
Radiated Spurious Emissions	15.109(a) 15.209(a)	ANSI C63.4	N/A
Peak transmit power	15.319(c)(e)	6.1.2	Complies
Power spectral density	15.319(d)	6.1.5	Complies
Automatically discontinue transmission	15.319(f)	--	Complies
In-band emissions	15.323(d)	6.1.6.1	Complies
Out-of-band emission	15.323(d)	6.1.6.2	Complies
Carrier frequency stability	15.323(f)	6.2.1	Complies
Frame repetition stability	15.323(e)	6.2.2	Complies
Frame period and jitter	15.323(e)	6.2.3	Complies
Monitoring time	15.323(c)(1)	7.3.4	Complies
Monitoring threshold	15.323(c)(2)	7.3.1	Complies
Maximum transmit time	15.323(c)(3)	8.2.2	Attestation
System acknowledgement	15.323(c)(4)	8.1.1 & 8.2.1	Complies
Least Interfered Channel	15.323(c)(5)	7.3.2, 7.3.3	Complies
Random waiting	15.323(c)(6)	8.1.3	Attestation
Monitoring Bandwidth	15.323(c)(7)	7.4	Complies
Maximum reaction time	15.323(c)(7)	7.5	Complies
Monitoring antenna	15.323(c)(8)	4	Attestation
Duplex Connections	15.323(c)(10)	8.3	Attestation
Alternative Monitoring Interval for Co-located Device	15.323(c)(11)	8.4	Attestation

**Note 1 :** Test results reported in this document relate only to the items tested

---

**Note 2 :** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3 :** Test results apply only to the item(s) tested

**\* Modifications required for compliance**

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

## 3. TEST RESULTS

### 3.1 Antenna Requirements

#### 3.1.1 Requirement

EUT must meet the antenna requirement of FCC Rule 15.203

- EUT uses a permanently attached antenna which is considered sufficient to comply with the provisions of this rule.
- EUT uses a unique antenna jack or electrical connector which is considered sufficient to comply with the provisions of this rule.

#### 3.1.2 Attestation

The EUT use permanently attached antennas.

## 3.2 Digital Modulation Techniques

### 3.2.1 Requirement

All transmissions must use only digital modulation techniques.

### 3.2.2 Attestation

The tested equipment is based on DECT technology described in the ETSI EN 300 175, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

### 3.3 Emission Bandwidth


#### 3.3.1 FCC rule - FCC 15.323(a)

(a) Operation shall be contained within the 1920-1930 MHz band. The emission bandwidth shall be less than 2.5 MHz. The power level shall be as specified in § 15.319(c), but in no event shall the emission bandwidth be less than 50 kHz.


#### 3.3.2 Test Procedure - ANSI C63.17 sub-clause 6.1.3.

#### 3.3.3 Test Results


Channel	Result (MHz)	Limit (MHz)	Verdict
1	1.484	2.5	Complies
2	1.478	2.5	Complies
3	1.486	2.5	Complies

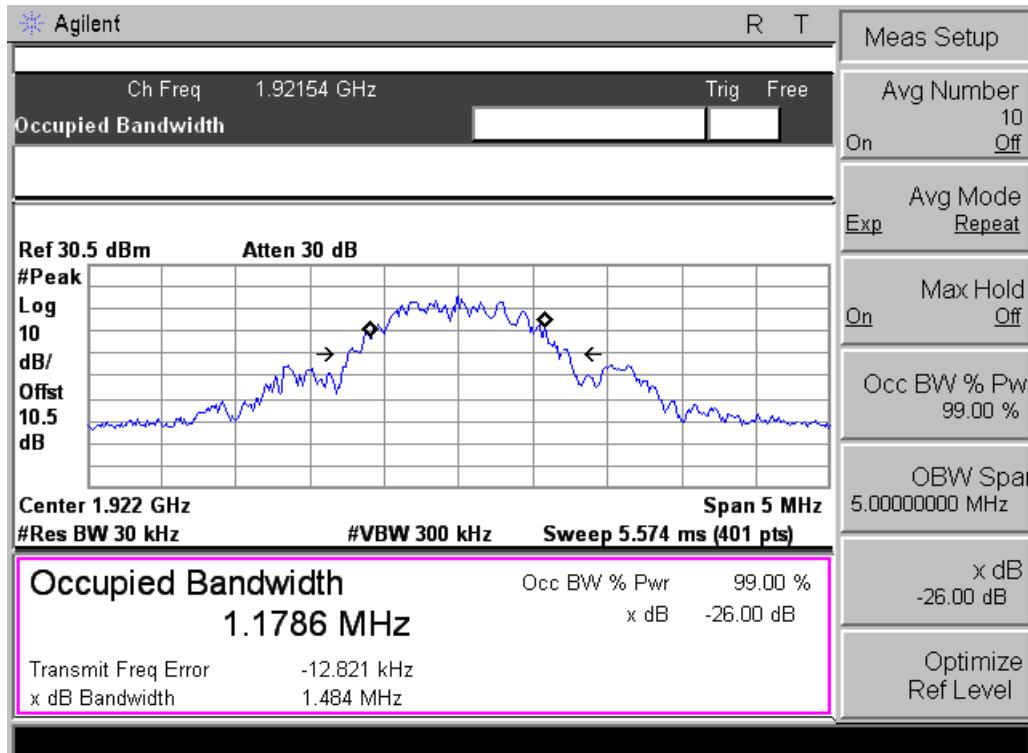

– Emission Bandwidth of Ch 1 –

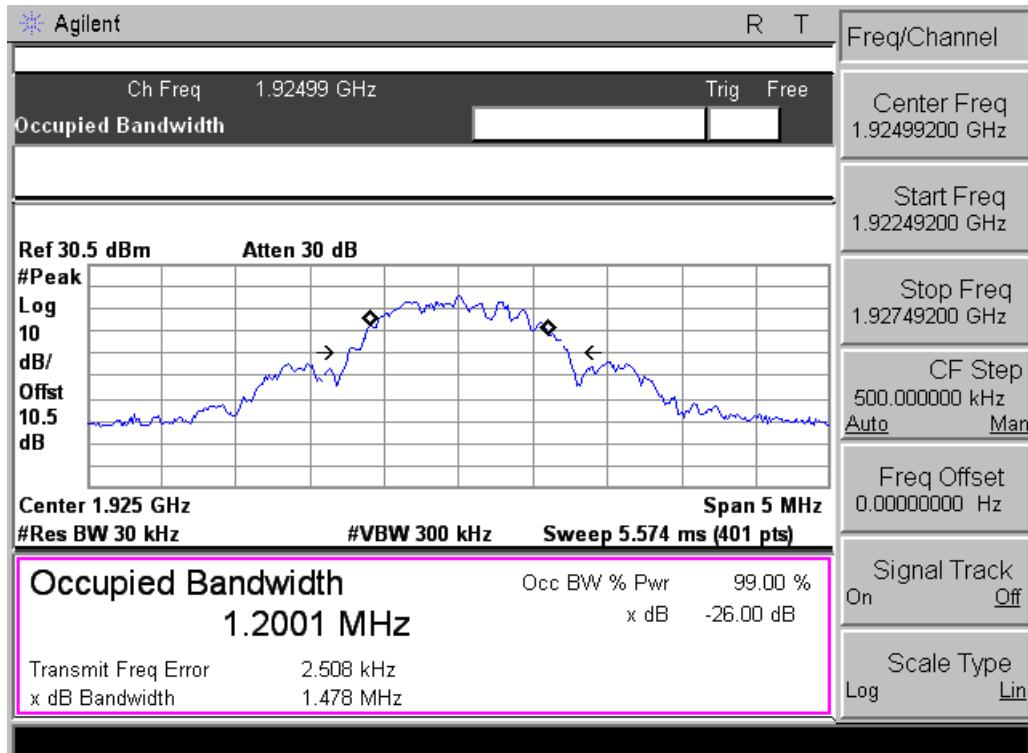

## – Emission Bandwidth of Ch 3 –

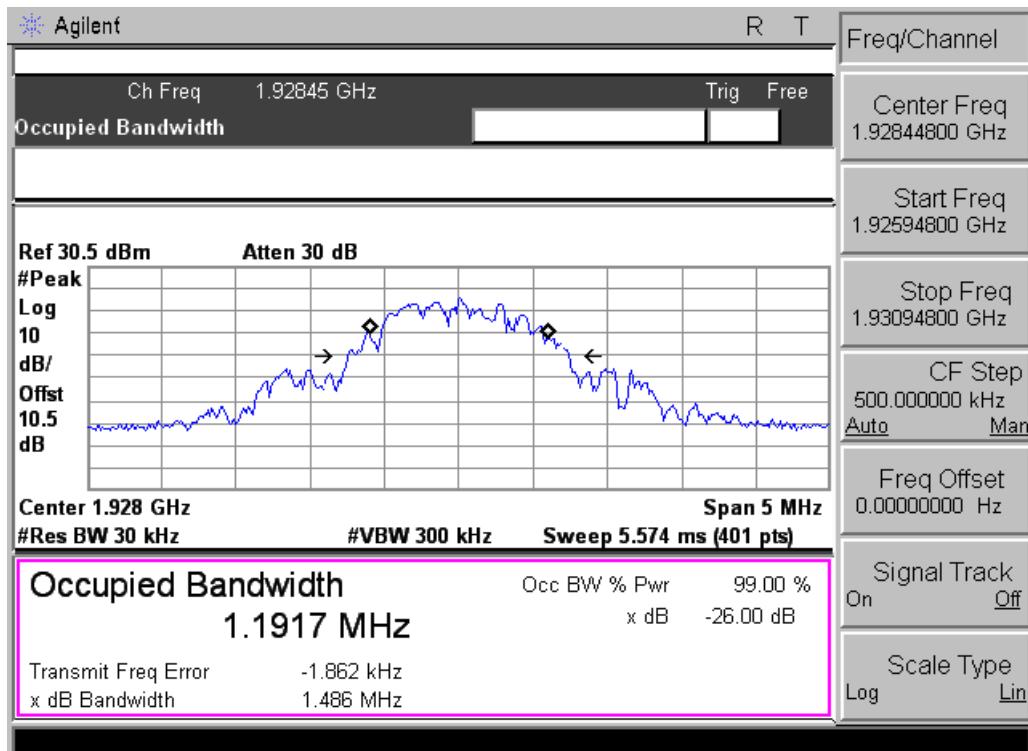

## – Emission Bandwidth of Ch 5 –

### 3.4 Power adjustment for antenna gain

#### 3.4.1 Test limit - FCC 15.319(e)

(e) The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

#### 3.4.2 Test results

The maximum antenna gain is 1.0 dBi.

### 3.5 Radiated Out of Band Emission

#### 3.5.1 Test procedure – FCC Part 15.209

#### 3.5.2 Test result

Not tested.

This test is not required if the Out-of-Band Emissions is tested conducted and is Pass.

### 3.6 Peak transmit power

#### 3.6.1 Test limit - FCC 15.319(c)

(c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Calculation of Peak transmit power Limit:

The antenna gain = 1.0 dBi

The measured emission bandwidth = 1.486 MHz


Limit :  $5 \log B(\text{bandwidth in Hz}) - 10 \text{ dBm} = 20.86 \text{ dBm}$

The Maximum allowed peak transmit power is 20.86 dBm


#### 3.6.2 Test procedure - ANSI C63.17 sub-clause 6.1.2.

#### 3.6.3 Test results


Channel	Result (dBm)	Limit (dBm)	Verdict
1	19.13	20.86	Complies
3	19.13	20.86	Complies
5	19.12	20.86	Complies

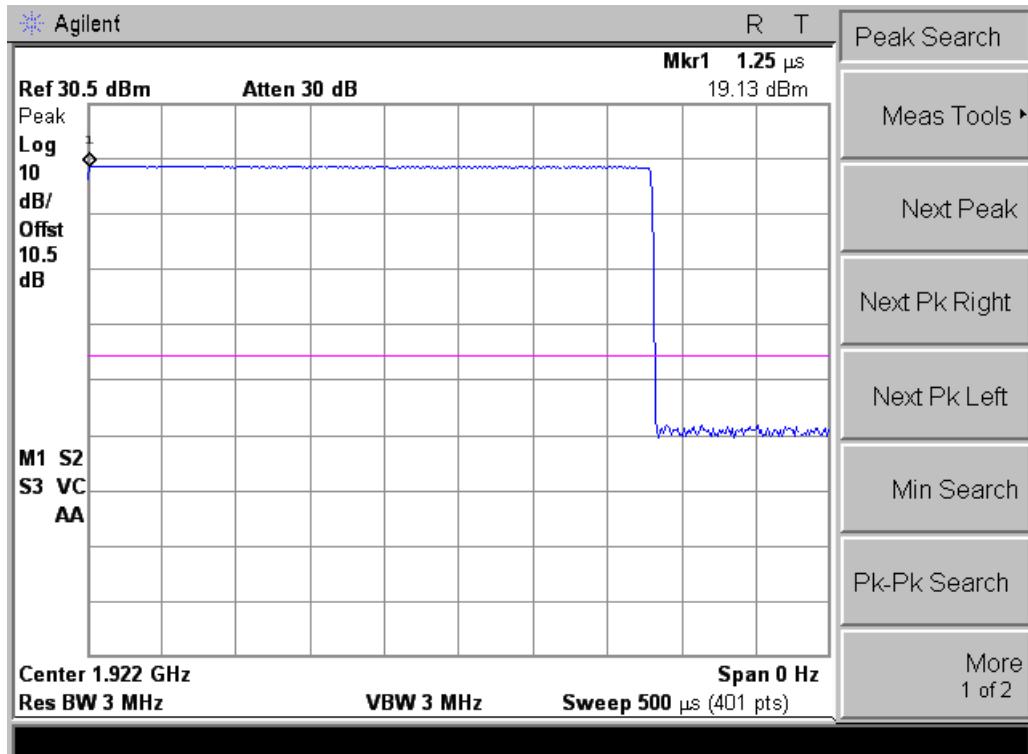

– Peak transmit power of Ch 1 –

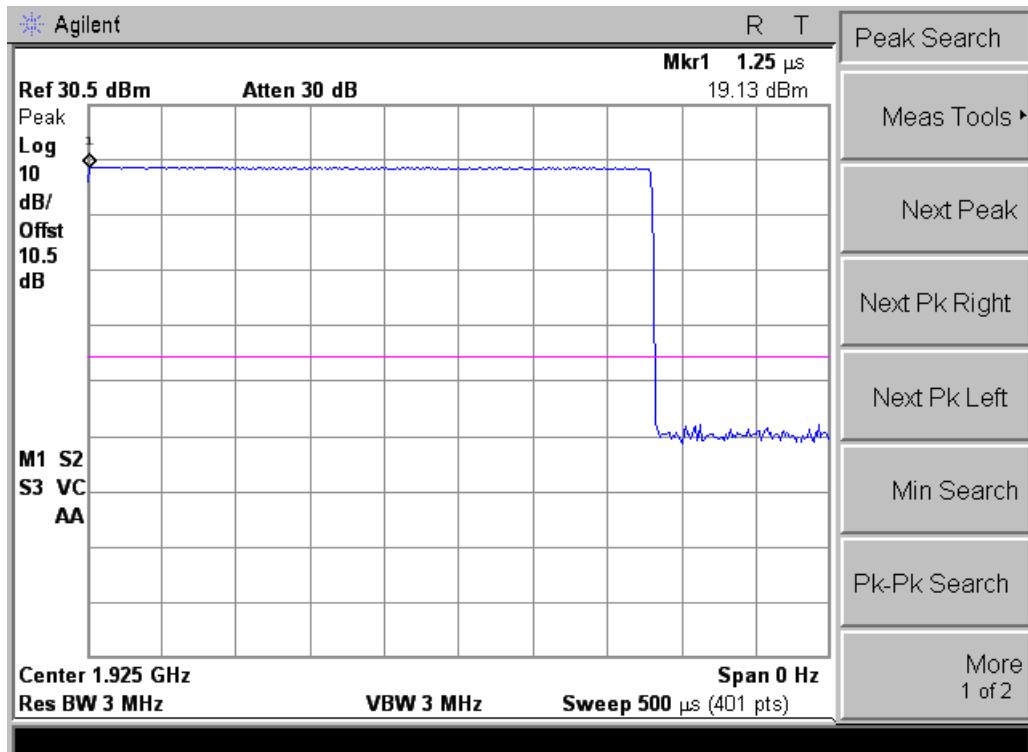

– Peak transmit power of Ch 3 –

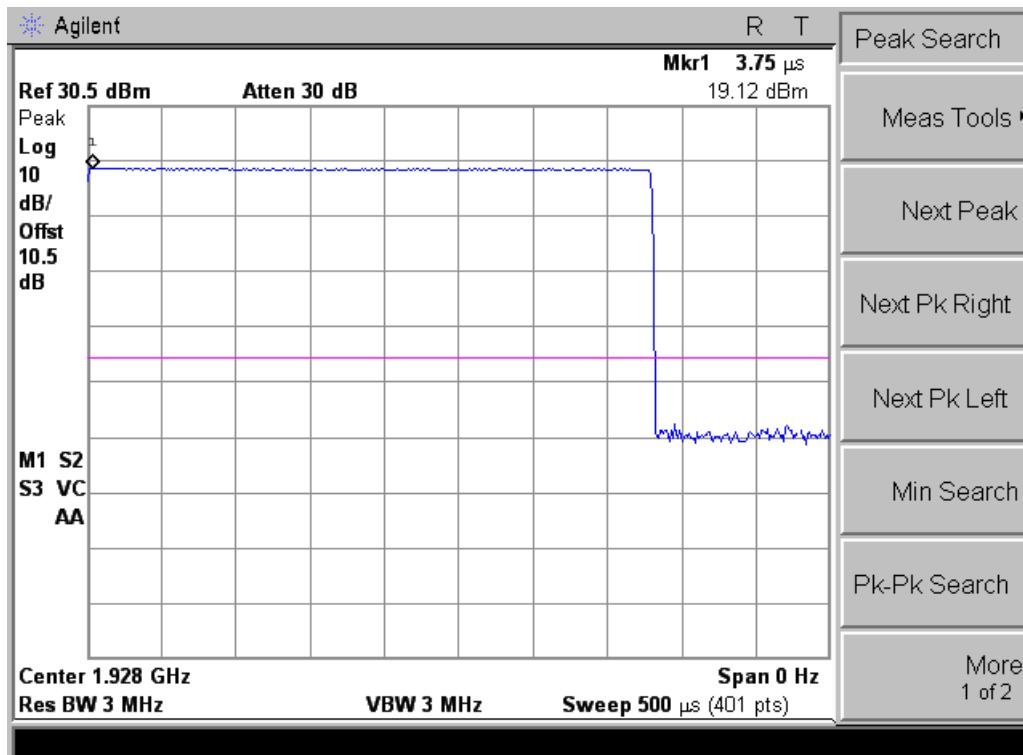

– Peak transmit power of Ch 5 –

### 3.7 Power spectral density


#### 3.7.1 Test limit - FCC 15.319(c)

(d) Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.


#### 3.7.2 Test procedure - ANSI C63.17 sub-clause 6.1.5.

#### 3.7.3 Test results

Channel	Result (mW)	Limit (mW)	Verdict
1	0.99	3	Complies
3	1.40	3	Complies
5	1.16	3	Complies

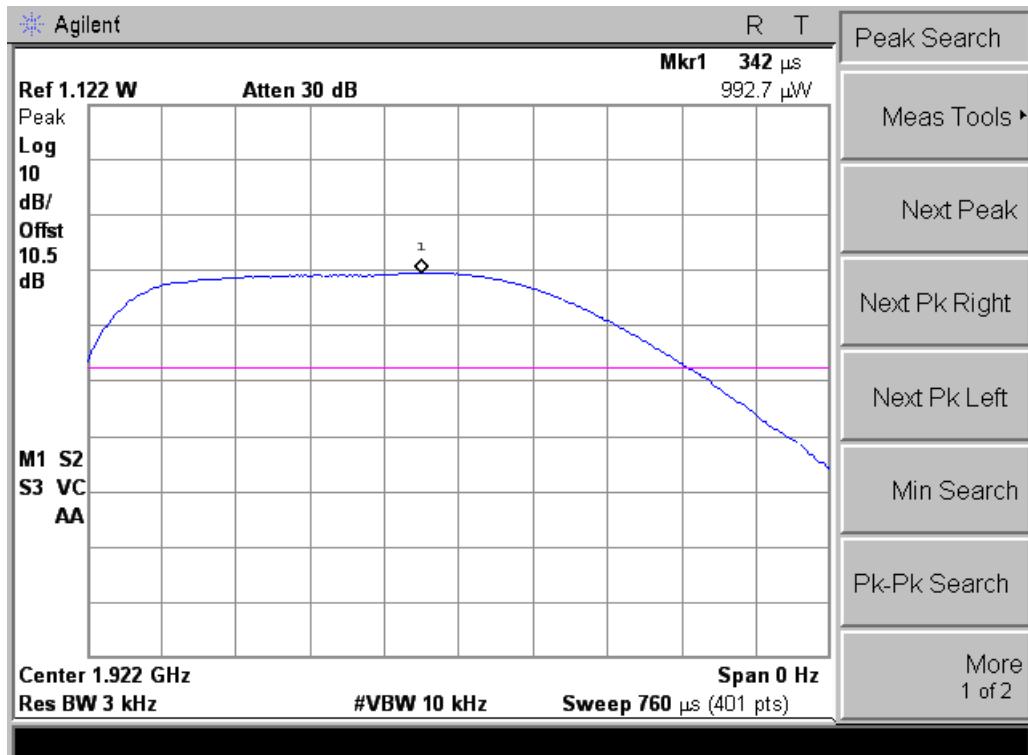

– Power spectral density of Ch 1 –

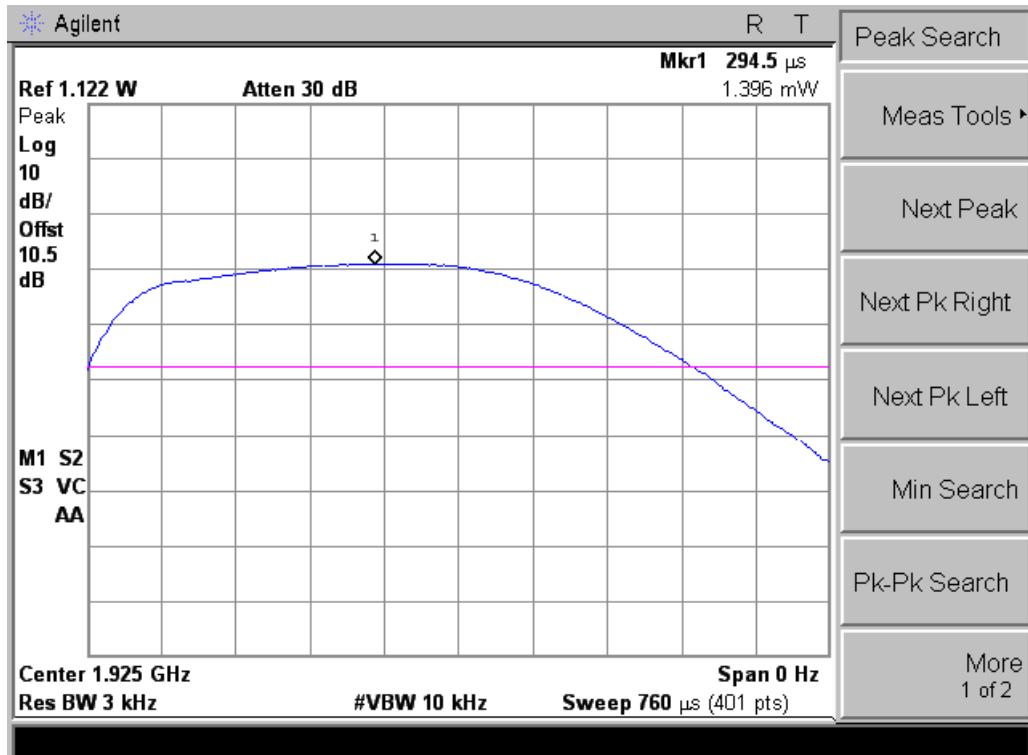

– Power spectral density of Ch 3 –



– Power spectral density of Ch 5 –

### 3.8 Automatically Discontinued Transmission

#### 3.8.1 Test limit - FCC 15.319(f)

(f) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

#### 3.8.2 Test procedure

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion devices is established.

	Test	EUT Reaction	Verdict
1	Power removed from the EUT	A/B/C	Pass/Fail
2	EUT Switch Off	A/B/C	Pass/Fail
3	Hook-On by companion device	A/B/C	Pass/Fail
4	Hook-On by EUT	A/B/C	Pass/Fail
5	Power Removed from Companion Device	A/B/C	Pass/Fail
6	Companion Device Switch Off	A/B/C	Pass/Fail

A – Connection breakdown, Cease of all transmissions

B – Connection breakdown, EUT transmits control and signaling information

C – Connection breakdown, Companion Device transmits control and signaling information

NA – Not applicable

#### 3.8.3 Test results

	Test	EUT Reaction	Verdict
1	Power removed from the EUT	C	Pass
2	EUT Switch Off	C	Pass
3	Hook-On by companion device	NA	Pass
4	Hook-On by EUT	C	Pass
5	Power Removed from Companion Device	A	Pass
6	Companion Device Switch Off	NA	Pass


### 3.9 In-band emissions


#### 3.9.1 Test limit - FCC 15.323(d)(2)

(d) Emissions outside the sub-band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the sub-band and 1.25 MHz above or below the sub-band; 50 dB between 1.25 and 2.5 MHz above or below the sub-band; and 60 dB at 2.5 MHz or greater above or below the subband. Emissions inside the sub-band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.


#### 3.9.2 Test procedure - ANSI C63.17 sub-clause 6.1.6.1.

#### 3.9.3 Test results

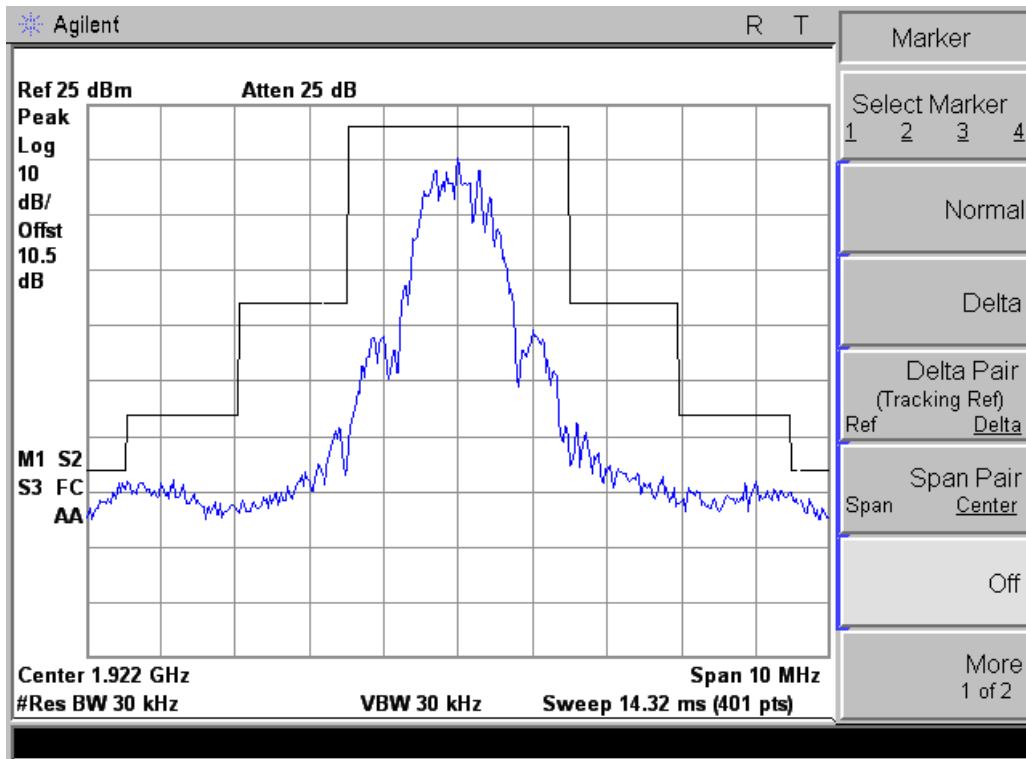

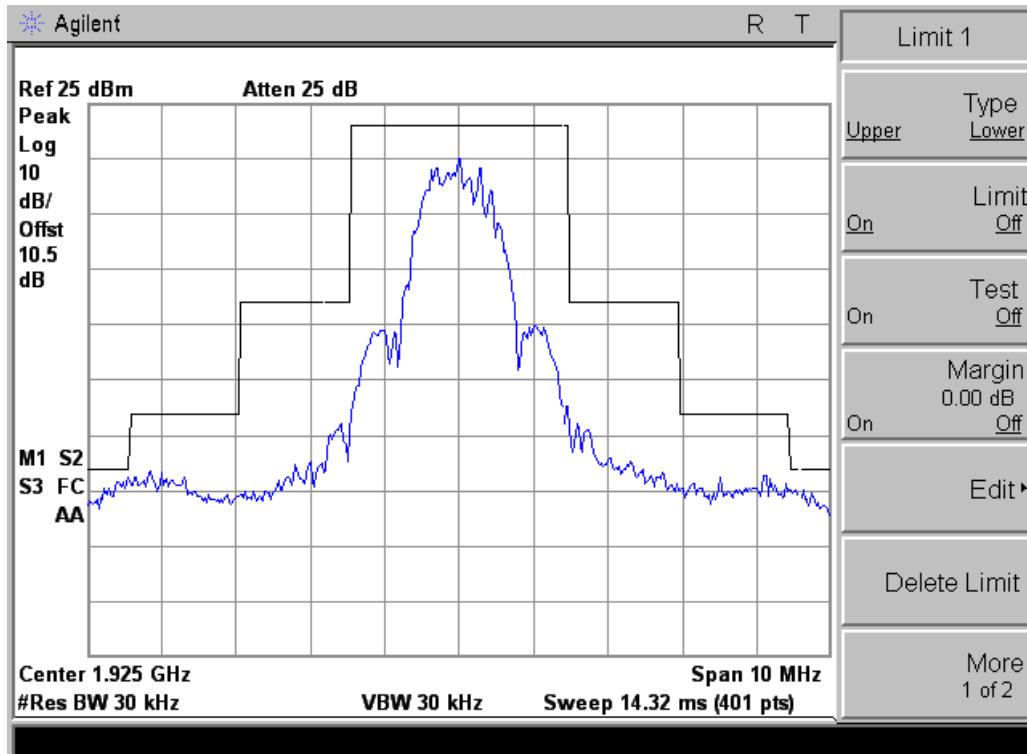

– In-band emission of Ch 3 –

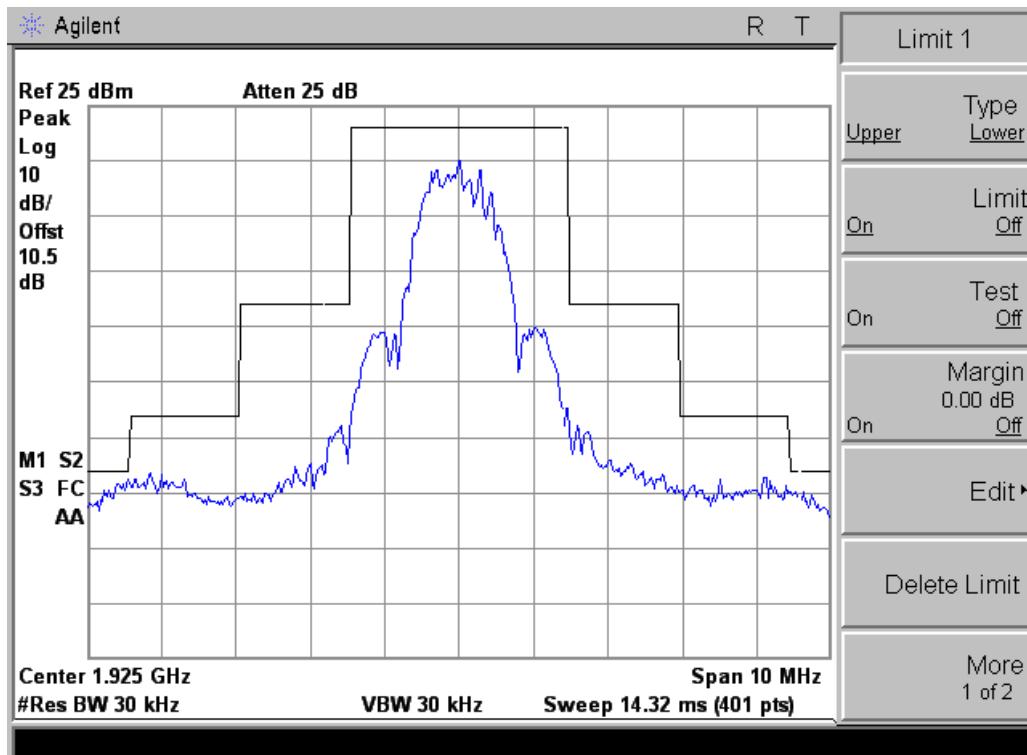

– In-band emission of Ch 5 –


### 3.10 Out-of-band emissions


#### 3.10.1 Test limit - FCC 15.319(d)(2)

(d) Emissions outside the sub-band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the sub-band and 1.25 MHz above or below the sub-band; 50 dB between 1.25 and 2.5 MHz above or below the sub-band; and 60 dB at 2.5 MHz or greater above or below the subband. Emissions inside the sub-band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.


#### 3.10.2 Test procedure - ANSI C63.17 sub-clause 6.1.6.2.

#### 3.10.3 Test results

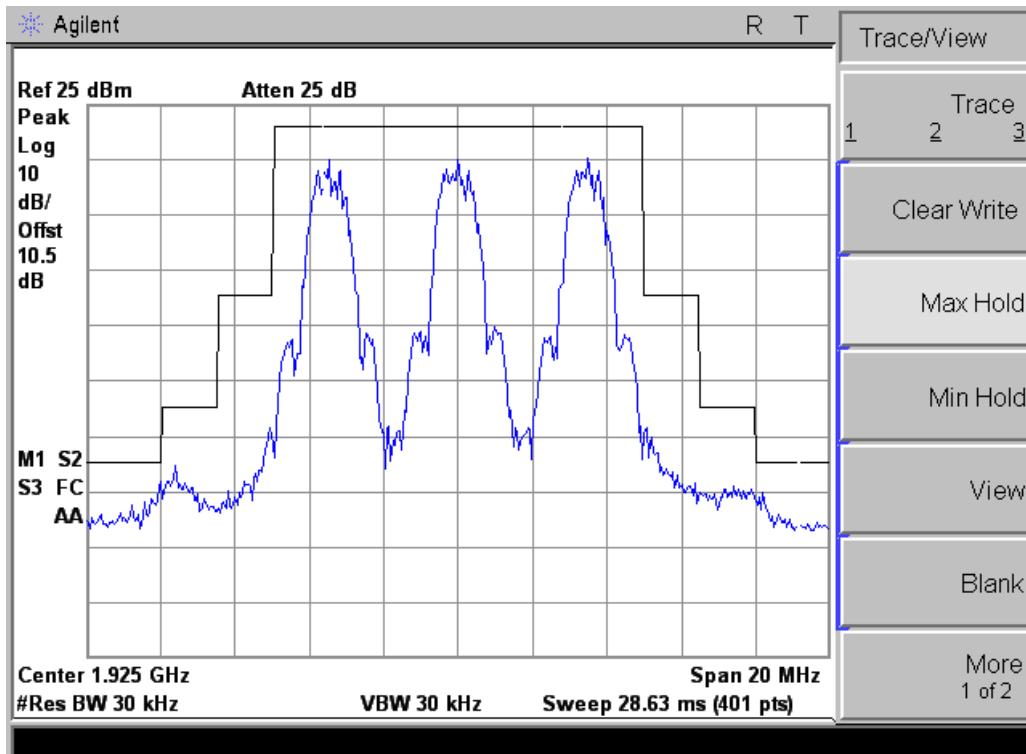


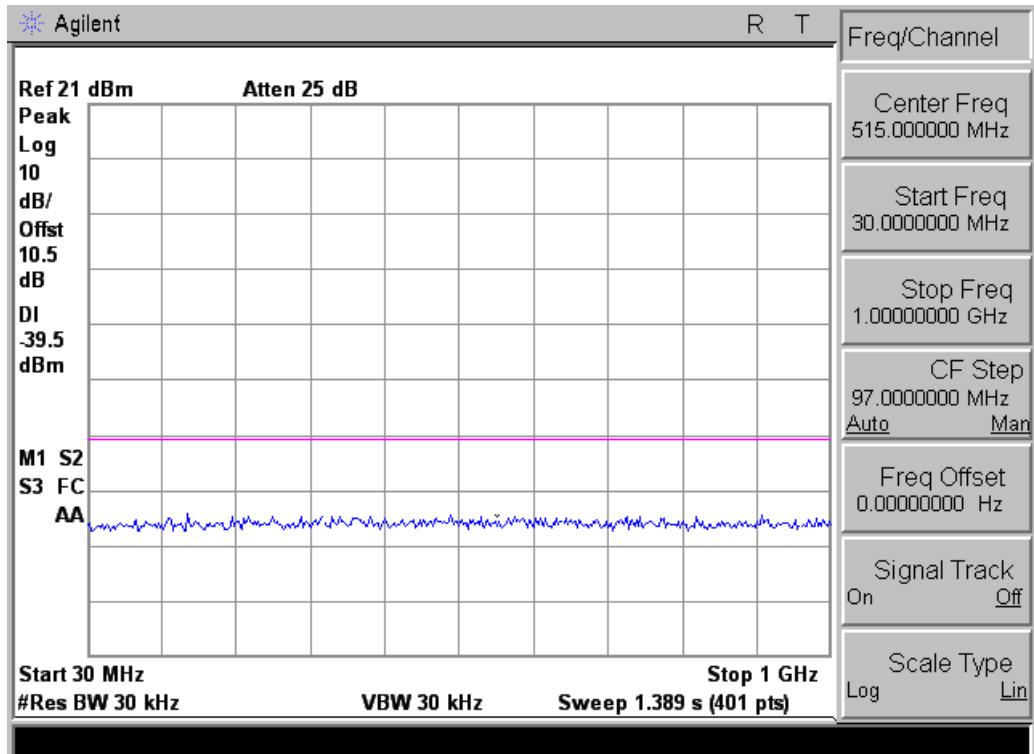


– Out-of-band emission of ch1 –

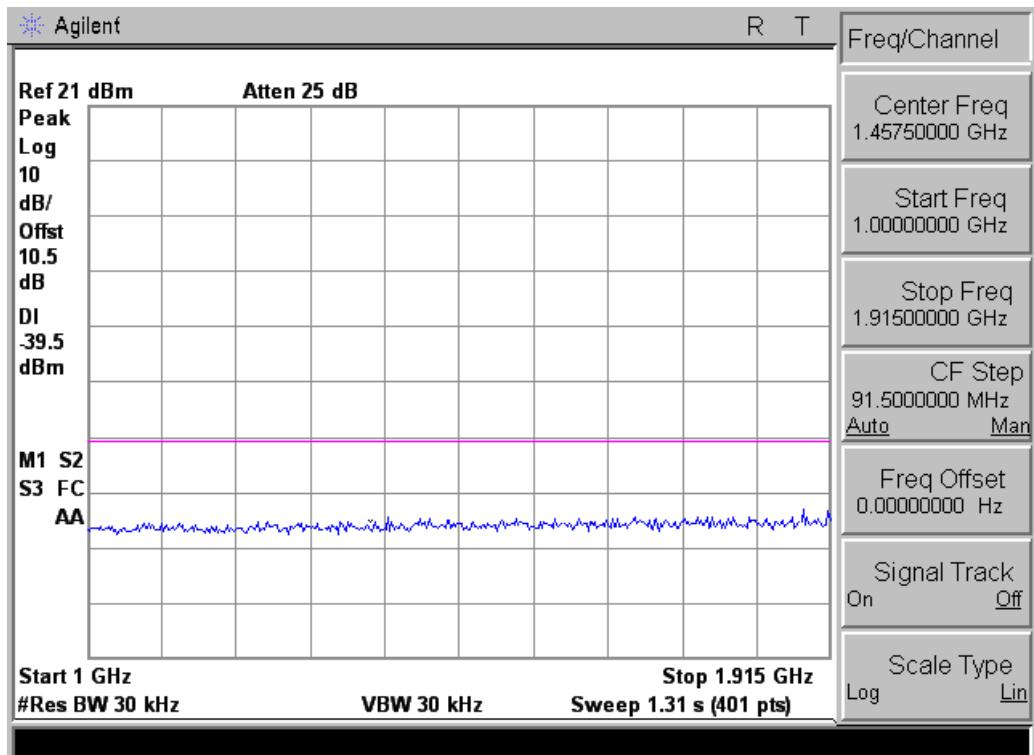


– Out-of-band emission of ch1 –

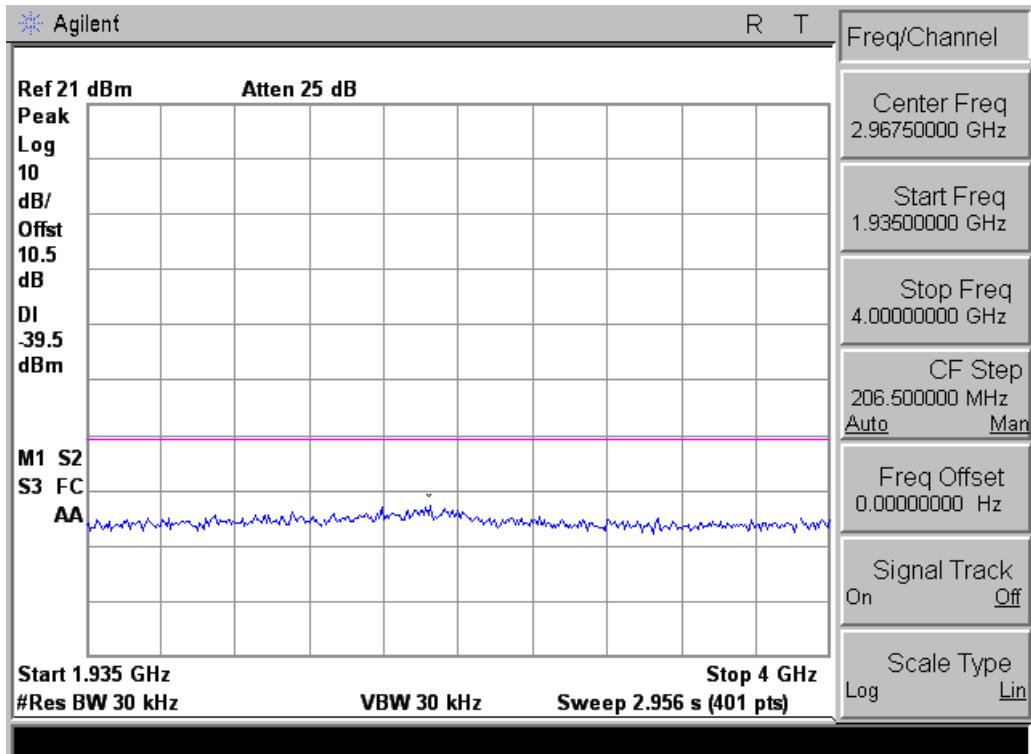


– Out-of-band emission of ch1 –

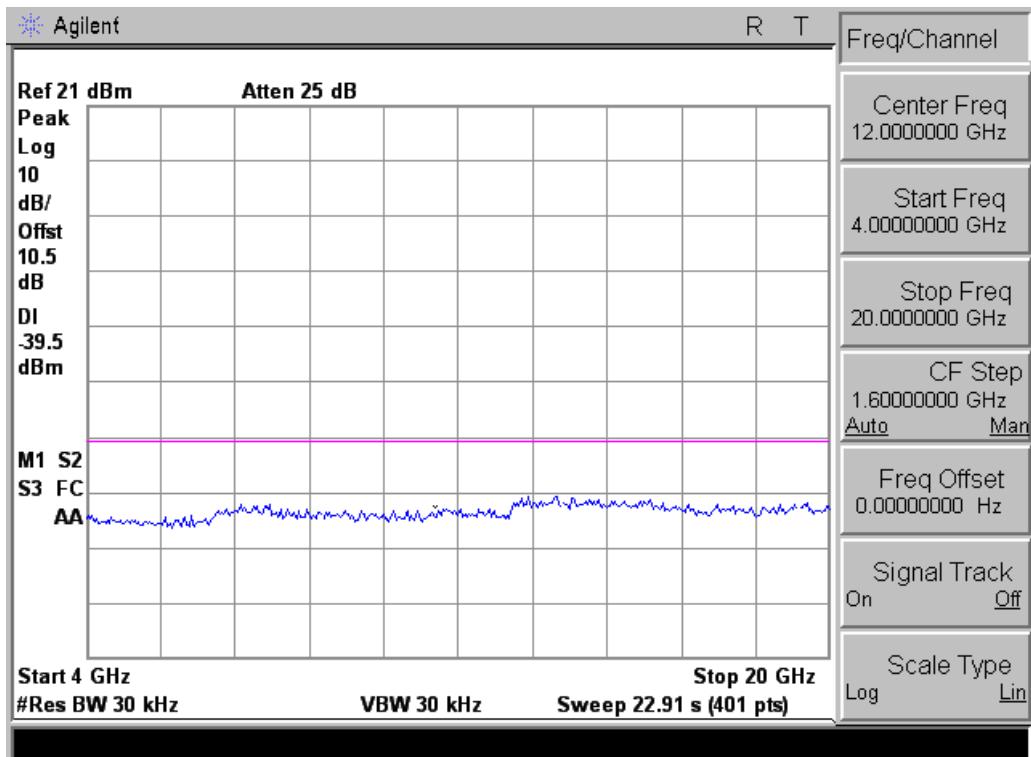


– Out-of-band emission of ch1 –

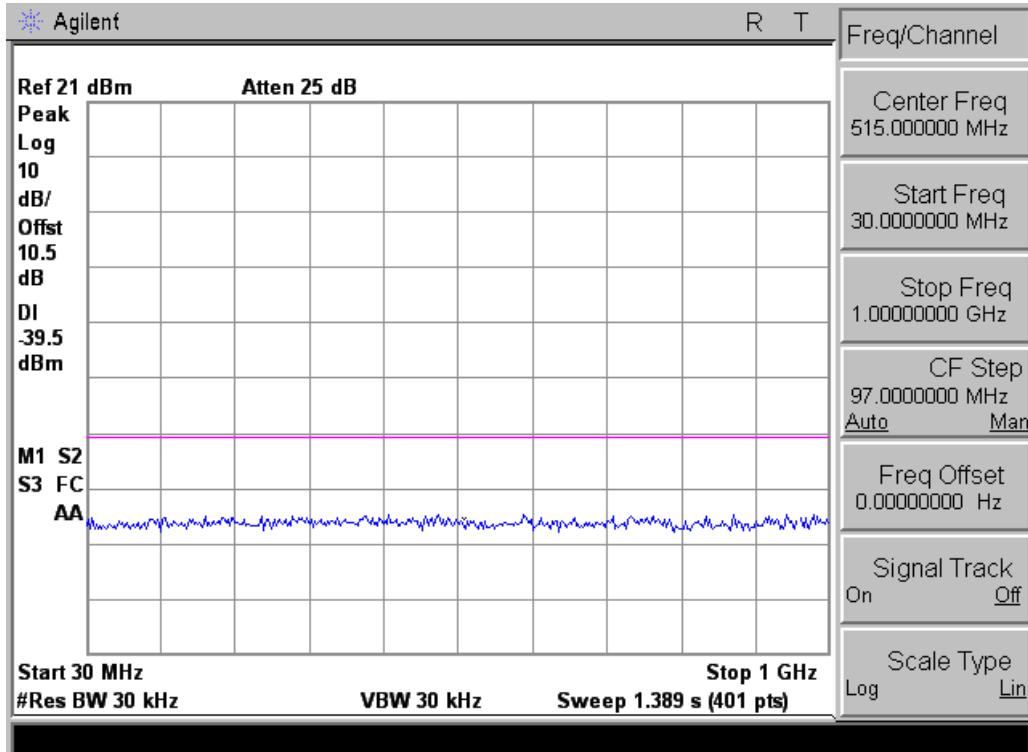


– Out-of-band emission of ch3 –

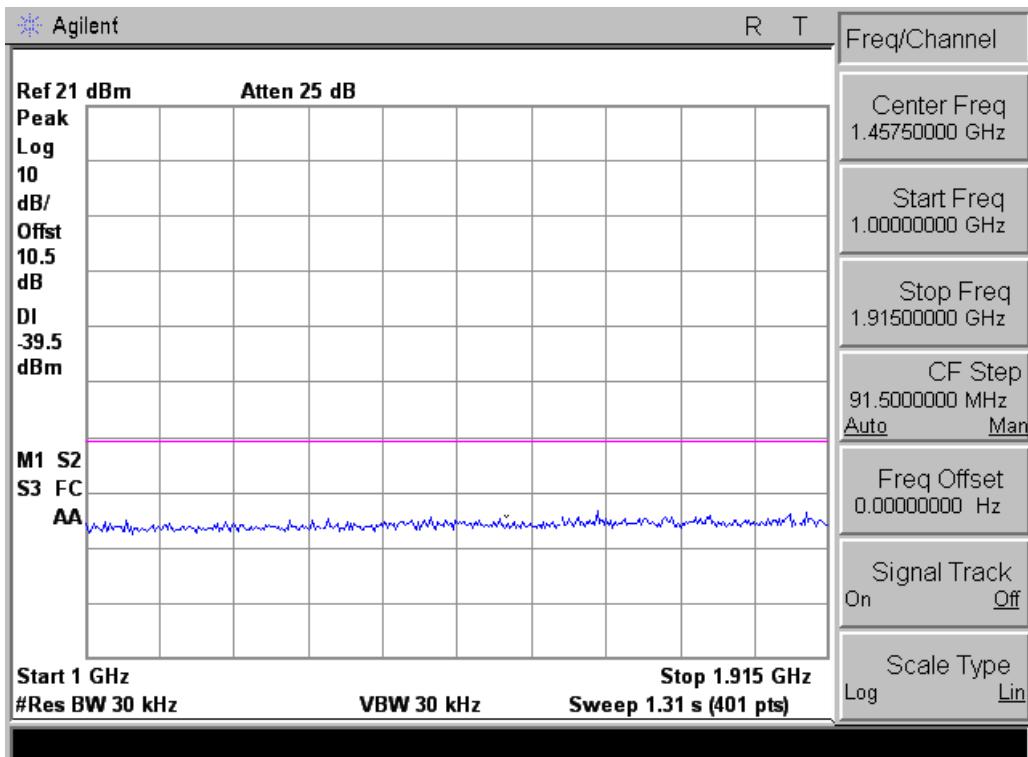



– Out-of-band emission of ch3 –


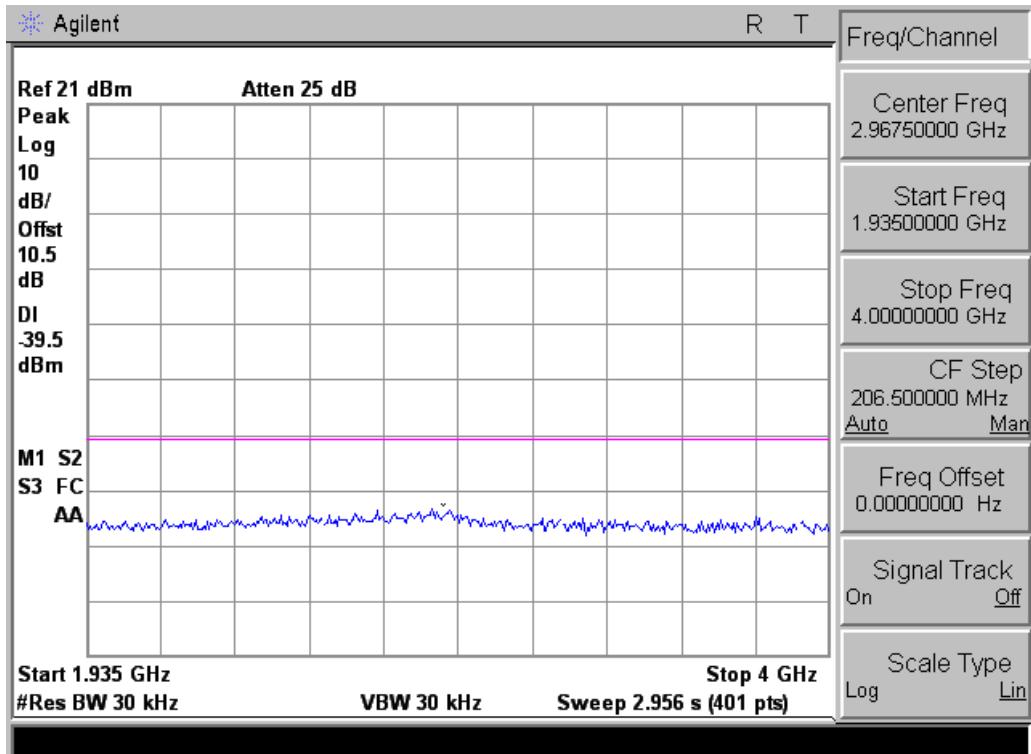


– Out-of-band emission of ch3 –

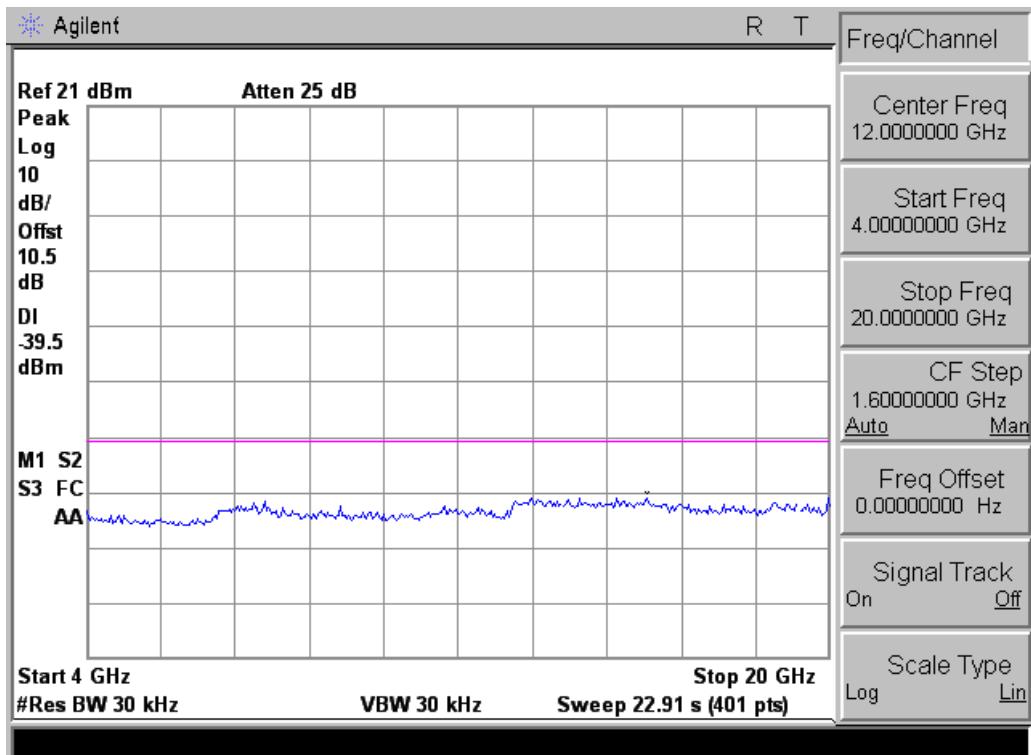

– Out-of-band emission of ch3 –

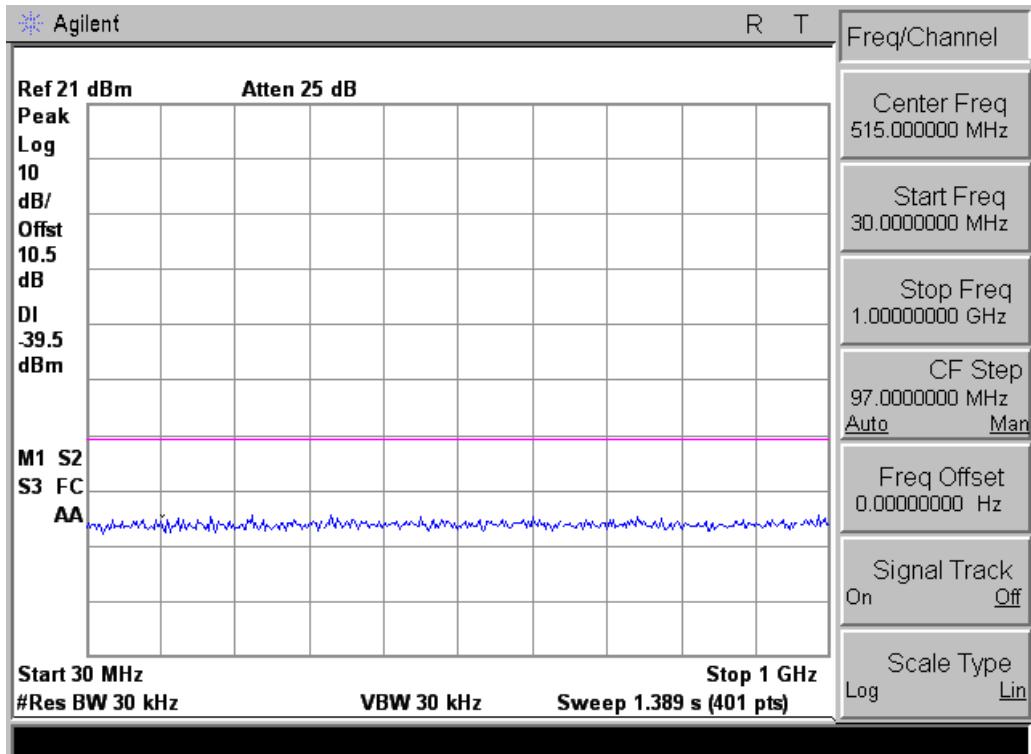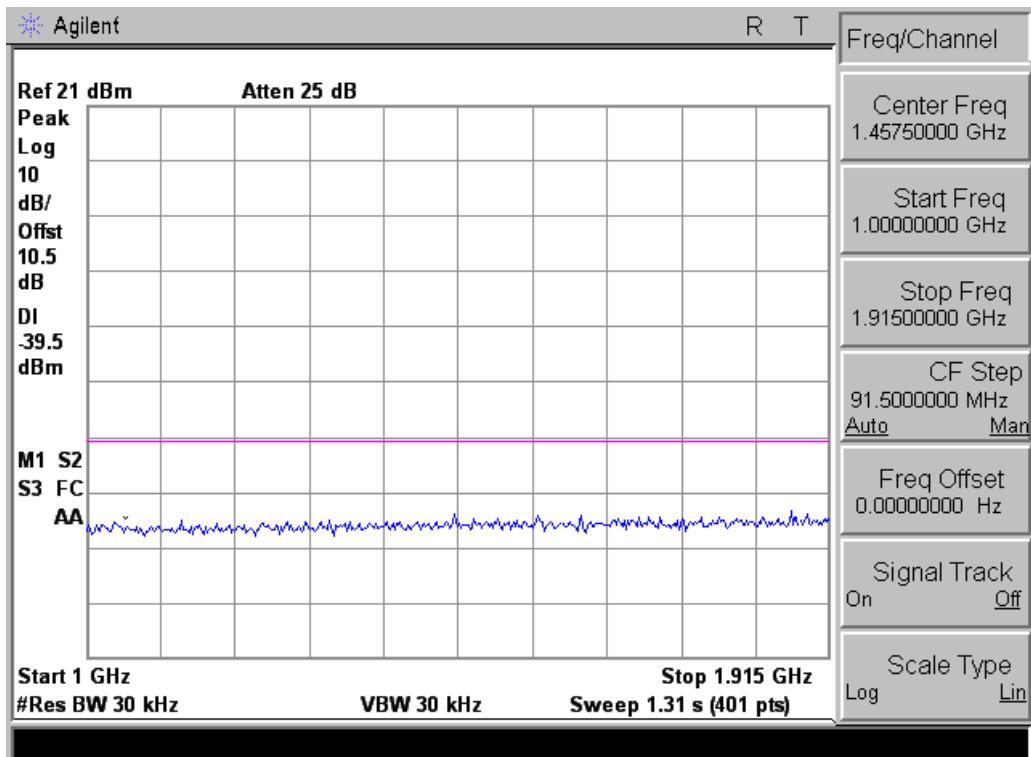**– Out-of-band emission of ch5 –****– Out-of-band emission of ch5 –**

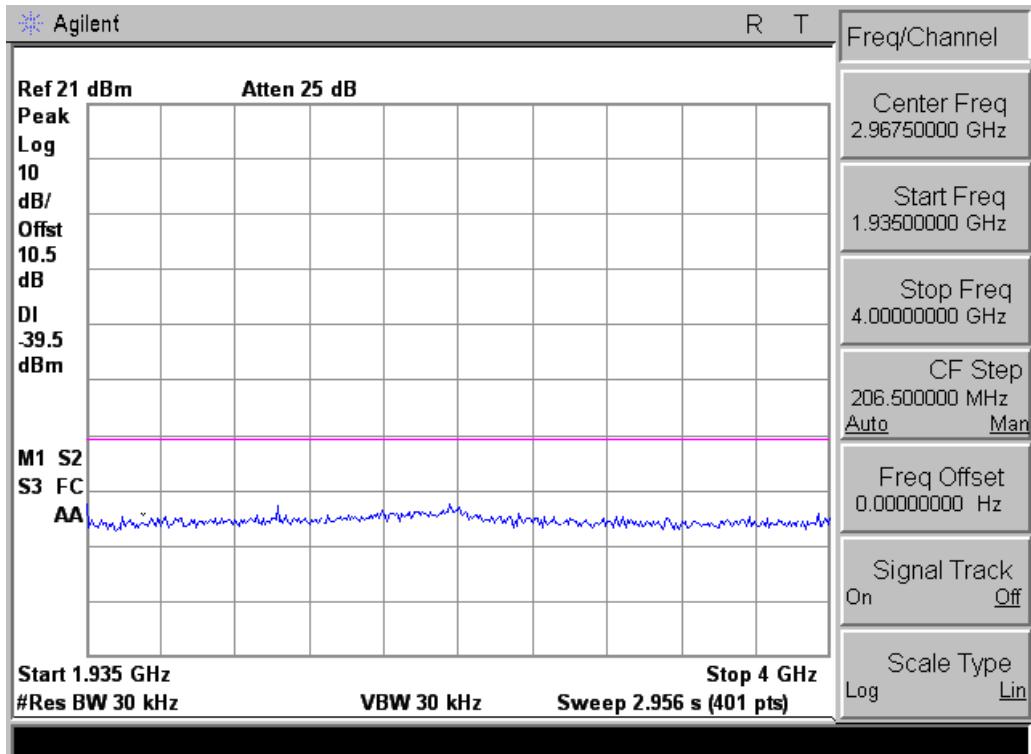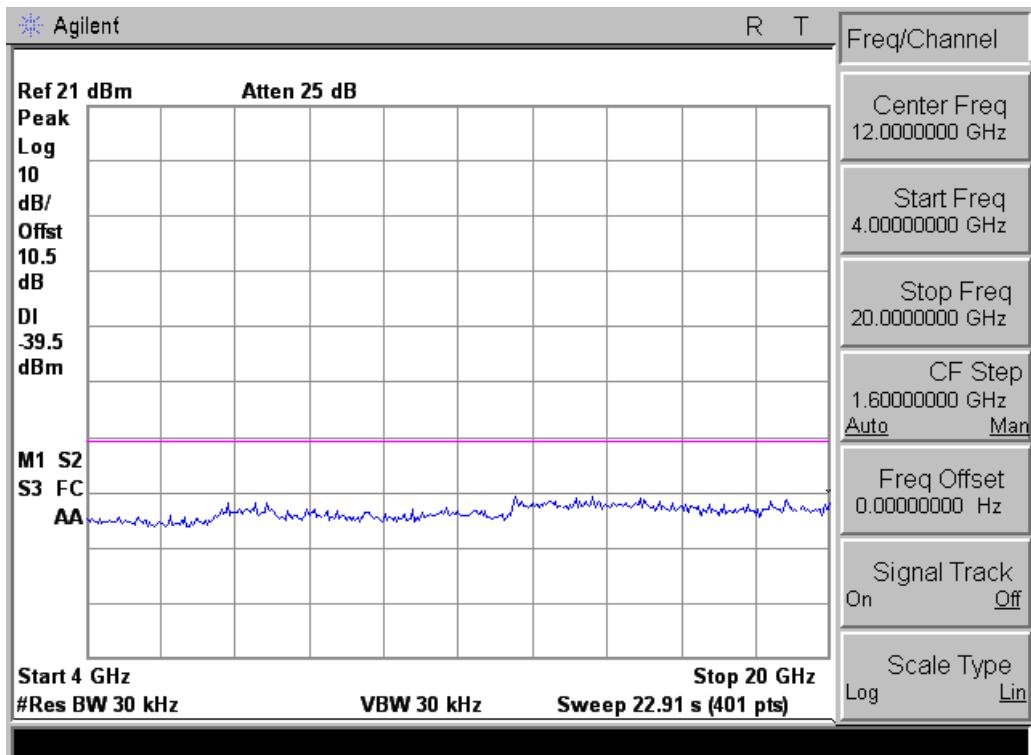**– Out-of-band emission of ch5 –****– Out-of-band emission of ch5 –**

### 3.11 Carrier frequency stability

#### 3.11.1 Test limit - FCC 15.323 (f)

(f) The frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20o to +50 degrees C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20o C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

#### 3.11.2 Test procedure - ANSI C63.17 sub-clause 6.2.1.

#### 3.11.3 Test results

##### I . Carrier Frequency Stability over time

Supply Voltage	Temperature (°C)	Peak to Peak Diff (kHz)	Max Dev.(ppm)	Limit (ppm)	Verdict
$V_{\text{nom}}$	+23	+3.05	+1.58	$\pm 10$	Complies

##### II . Carrier Frequency Stability over Power Supply Voltage

Supply Voltage	Temperature (°C)	Measured Frequency Offset Over an hour (ppm)	Limit (ppm)	Verdict
85 %	+23	+4.51	$\pm 10$	Complies
115%	+23	+4.35	$\pm 10$	Complies

##### III. Carrier Frequency Stability over Temperature

Supply Voltage	Temperature (°C)	Measured Frequency Offset Over an hour (ppm)	Limit (ppm)	Verdict
Nominal	-20	-5.59	$\pm 10$	Complies
Nominal	+50	+5.07	$\pm 10$	Complies

### 3.12 Frame repetition stability

#### 3.12.1 Test limit - FCC 15.323(e)

(e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these subbands shall be 20 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

Limit :

Frame Repetition Stability (ppm)	±10 ppm (TDMA)
----------------------------------	----------------

#### 3.12.2 Test procedure - ANSI C63.17 sub-clause 6.2.2.

#### 3.12.3 Test results

Maximum Frame Repetition Stability (ppm)	Limit (ppm)	Verdict
-0.61	10	Complies

### 3.13 Frame Period and Jitter

#### 3.13.1 Test limit - FCC 15.323(e)

(e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these subbands shall be 20 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

#### 3.13.2 Test procedure - ANSI C63.17 sub-clause 6.2.3.

#### 3.13.3 Test results

Measured Maximum Jitter ( $\mu$ s)	Limit ( $\mu$ s)	Verdict
-0.06	25	Complies

### 3.14 Monitoring time

#### 3.14.1 Test limit - FCC 15.323(c)


(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

(1) Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 millisecond or shorter frame period or at least 20 milliseconds for systems designed to use a 20 millisecond frame period.

#### 3.14.2 Test procedure - ANSI C63.17 sub-clause 7.3.4.

#### 3.14.3 Test results

Measured monitoring time (ms)	Lmiit (ms)	Verdict
155	greater than 10 ms	Complies

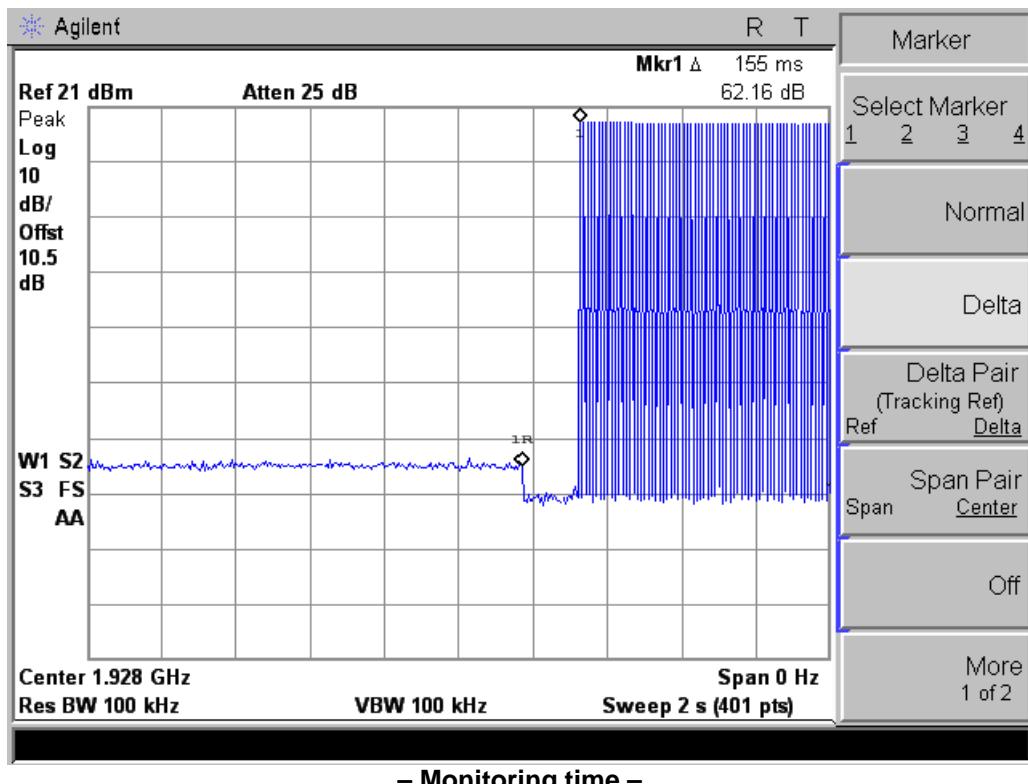

### 3.15 Monitoring threshold

#### 3.15.1 Test limit - FCC 15.323(c)(2)(9)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
  - (2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth of the device.
  - (9) Devices that have a power output lower than the maximum permitted under the rules may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

#### 3.15.2 Test procedure - ANSI C63.17 sub-clause 7.3.1.

Calculation of Monitoring Threshold Limit:

Lower monitoring threshold :  $T_L \leq (-174 + 10\log B + M_L + P_{MAX} - P_{EUT}) \text{ dBm}$

Upper monitoring threshold :  $T_U \leq (-174 + 10\log B + M_U + P_{MAX} - P_{EUT}) \text{ dBm}$

Where, B = Measured Emission Bandwidth :  $1.486 \times 10^6 \text{ Hz}$

M = 30 dB for Lower Monitoring Threshold / 50 dB for Upper Monitoring Threshold

$P_{MAX} = 5\log_{10} B - 10 \text{ dBm} = 20.86 \text{ dBm}$

$P_{EUT} = \text{Measured Peak Transmit Power} : 19.13 \text{ dBm}$

Calculated lower Monitoring Threshold (dBm)	-80.54
Calculated upper Monitoring Threshold (dBm)	-60.54

#### 3.15.3 Test results

The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

Lower Monitoring Threshold (dBm)	--	N/A
Upper Monitoring Threshold (dBm)	-61.30	Pass

### 3.16 Maximum transmit time

#### 3.16.1 Test limit - FCC 15.323(c)(3)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
  - (3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

#### 3.16.2 Test procedure - ANSI C63.17 sub-clause 8.2.2.

#### 3.16.3 Attestation

The maximum transmission time is 10800 seconds ( 3 hours).

### 3.17 System acknowledgement

#### 3.17.1 Test limit - FCC 15.323(c)(4)


(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

(4) Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signalling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

#### 3.17.2 Test procedure - ANSI C63.17 sub-clause 8.1.1 & 8.2.1

#### 3.17.3 Test results

Test	Result (s)	Limit (s)	Verdict
Initial transmission without acknowledgements	N/A	N/A	Only for initiating device
Transmission time after loss of acknowledgements	1.875	30	Complies

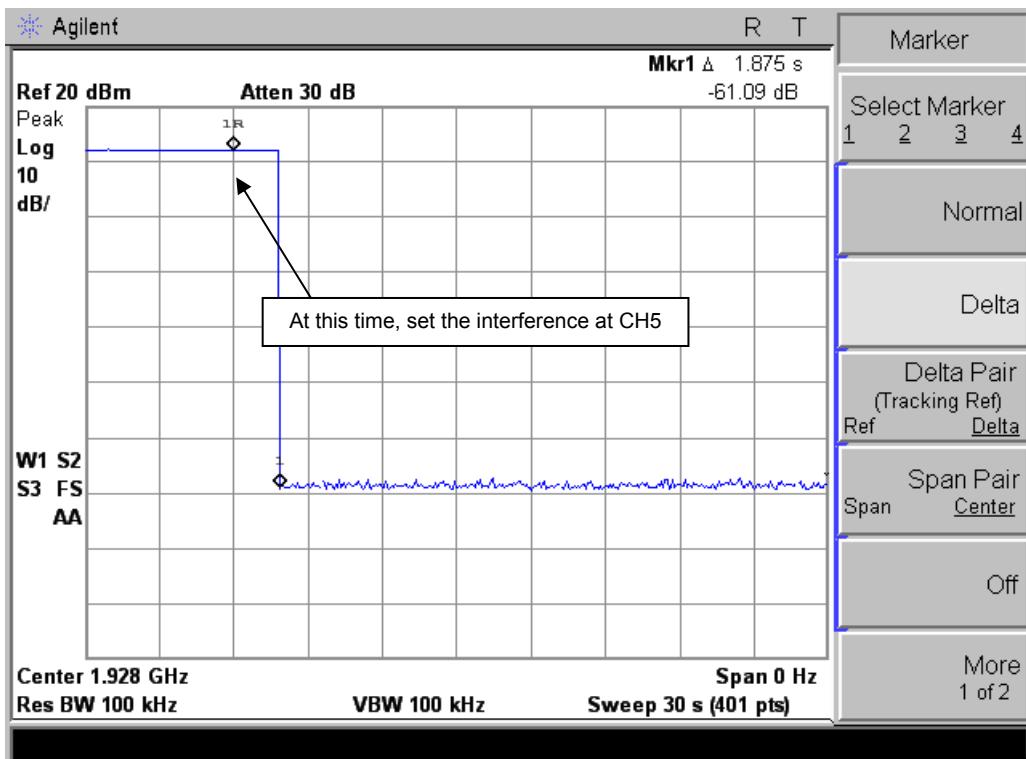

– Transmission time after loss of acknowledgements –

### 3.18 Least Interfered Channel & Channel confirmation

#### 3.18.1 Test limit - FCC 15.323(c)(5)

(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

(5) If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

#### 3.18.2 Test procedure - ANSI C63.17 sub-clause 7.3.3

Calculated Lower monitoring threshold : -80.54 dBm

Calculated Upper monitoring threshold : -60.54 dBm

The upper threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

#### 3.18.3 Test results

Test	Results	Verdict
Apply interference on CH1 at level $T_L+U_m+7$ dB Apply interference on CH5 at level $T_L+U_m$ dB	Transmission always on CH5	Complies
Apply interference on CH1 at level $T_L+U_m$ dB Apply interference on CH5 at level $T_L+U_m+7$ dB	Transmission always on CH1	Complies
Apply interference on CH1 at level $T_L+U_m+1$ dB Apply interference on CH5 at level $T_L+U_m-6$ dB	Transmission always on CH5	Complies
Apply interference on CH1 at level $T_L+U_m-6$ dB Apply interference on CH5 at level $T_L+U_m+1$ dB	Transmission always on CH1	Complies

### 3.19 Random waiting

#### 3.19.1 Test limit - FCC 15.323(c)(6)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (6) If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

#### 3.19.2 Test procedure - ANSI C63.17 sub-clause 8.1.3

#### 3.19.3 Attestation

The option 15.323(c)(6) is not implemented by this product.

### 3.20 Monitoring Bandwidth

#### 3.20.1 Test limit - FCC 15.323(c)(7)


(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:



(7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.


#### 3.20.2 Test procedure - ANSI C63.17 sub-clause 7.4.2 – more detailed test

#### 3.20.3 Test results

Test frequency	Test level (above $T_U+U_M$ )	Result	Verdict
-6 dB points	-54.54 dBm	No transmission	Complies
-12 dB points	-48.54 dBm	No transmission	Complies

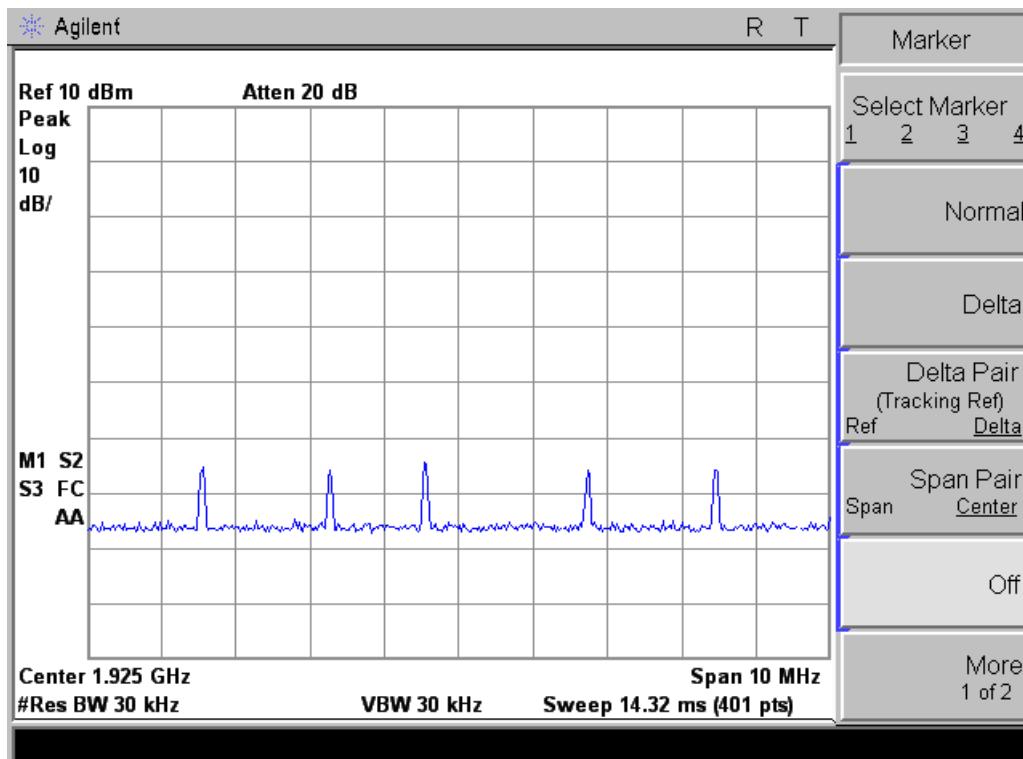

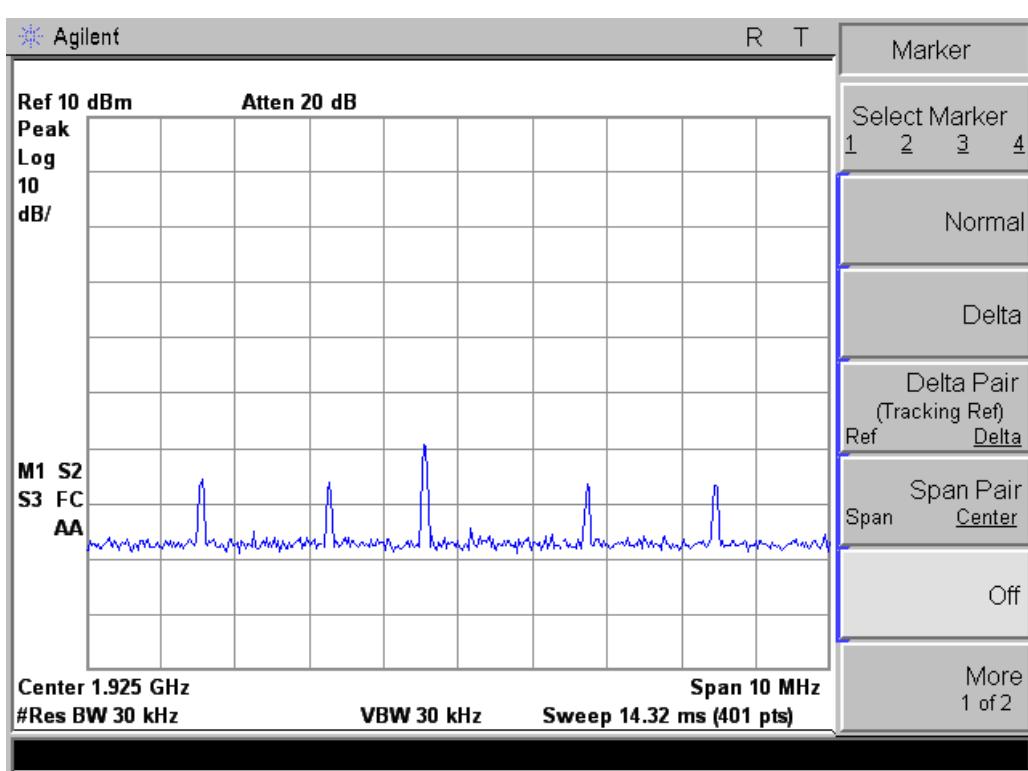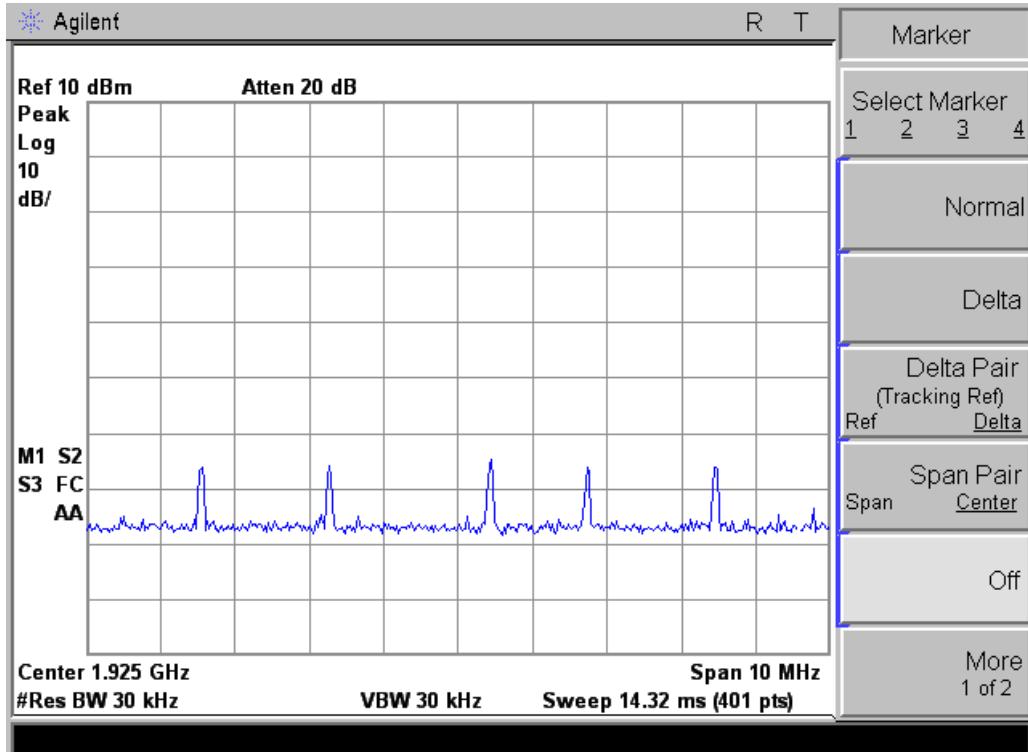

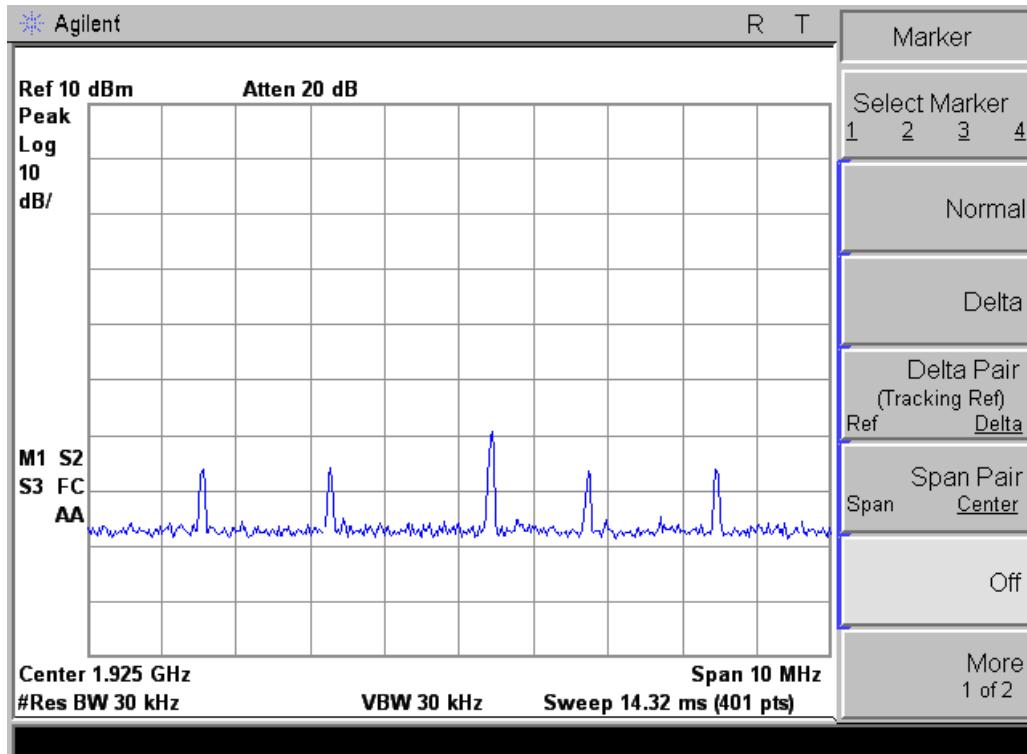

– Interference level on +12 dB higher point –

### 3.21 Maximum reaction time

#### 3.21.1 Test limit - FCC 15.323(c)(7)

(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:


(7) If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35\sqrt{1.25/\text{emission bandwidth in MHz}}$  microseconds but shall not be required to be less than 35 microseconds.


#### 3.21.2 Test procedure - ANSI C63.17 sub-clause 7.5.

#### 3.21.3 Test results

Pulse Width	Results	Verdict
35 us	No transmission	Complies
50 us	No transmission	Complies

\* Since Emission bandwidth is greater than 1.25 MHz the test was performed with pulse lengths 35 & 50 us.

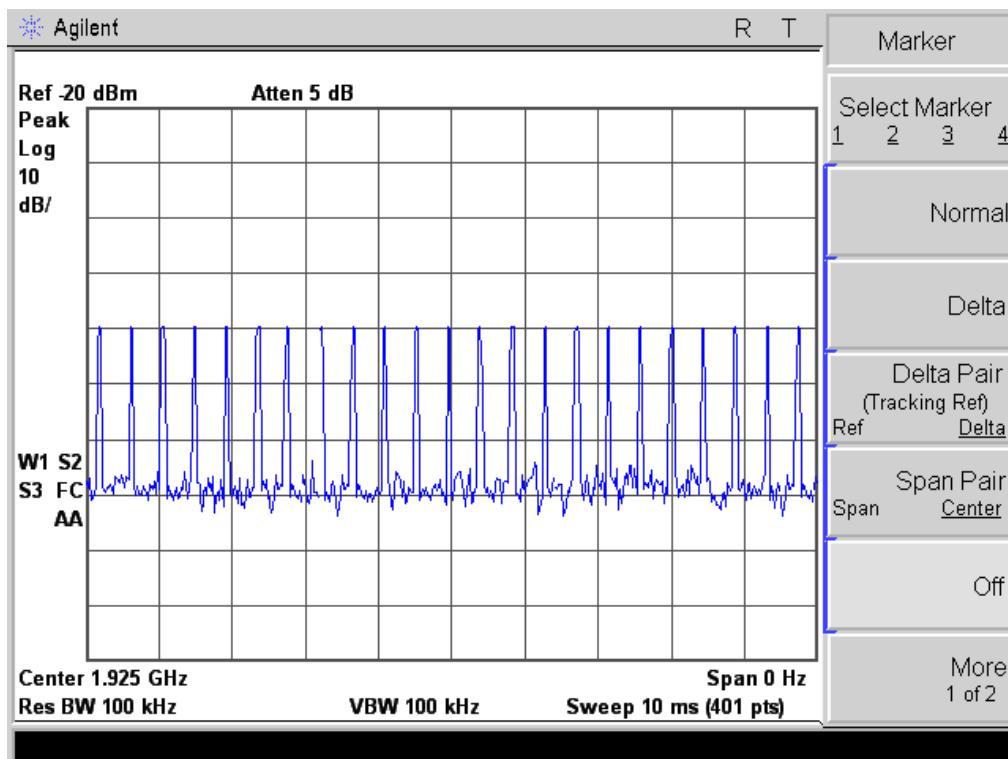

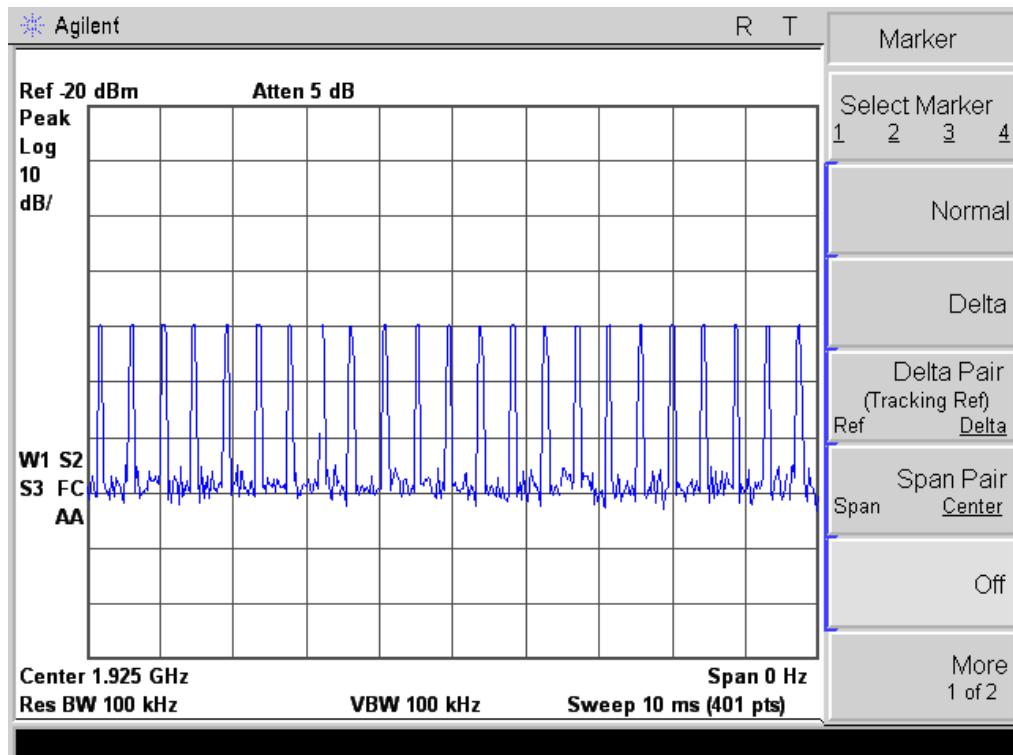

– 50  $\mu$  s pulses –

### 3.22 Monitoring antenna

#### 3.22.1 Test limit - FCC 15.323(c)(8)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
  - (8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

#### 3.22.2 Test procedure - ANSI C63.17 sub-clause 4

#### 3.22.3 Attestation

EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

### 3.23 Duplex Connections

#### 3.23.1 Test limit - FCC 15.323(c)(10)

(c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

#### 3.23.2 Test procedure - ANSI C63.17 sub-clause 8.3.2

#### 3.23.3 Attestation

The EUT never initiates a communication link.

### 3.24 Alternative Monitoring Interval for Co-located Device

#### 3.24.1 Test limit - FCC 15.323(c)(11)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
  - (11) An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or collocated co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

#### 3.24.2 Test procedure - ANSI C63.17 sub-clause 8.4.

#### 3.24.3 Attestation

The EUT never initiates a communication link.

### 3.25 Conducted Emissions

#### 3.25.1 Test limit - FCC 15.207

(a) Except for Class A digital devices, for equipment that is designed to be conducted back onto the (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency (MHz)	Conducted Limits (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### 3.25.2 Test limit - FCC 15.207


The emission level measured in decibels above one microvolt (dB  $\mu$ V) was converted into microvolt ( $\mu$ V) as shown in following sample calculation.

For example :


Measured Value at	0.393 MHz	27.4dB $\mu$ V @ Q-Peak mode
+ Correct factor *		9.7dB
= Conducted Emission		37.1dB $\mu$ V

\* Correct factor is adding RF cable loss and Attenuation

#### 3.25.3 Test Configuration

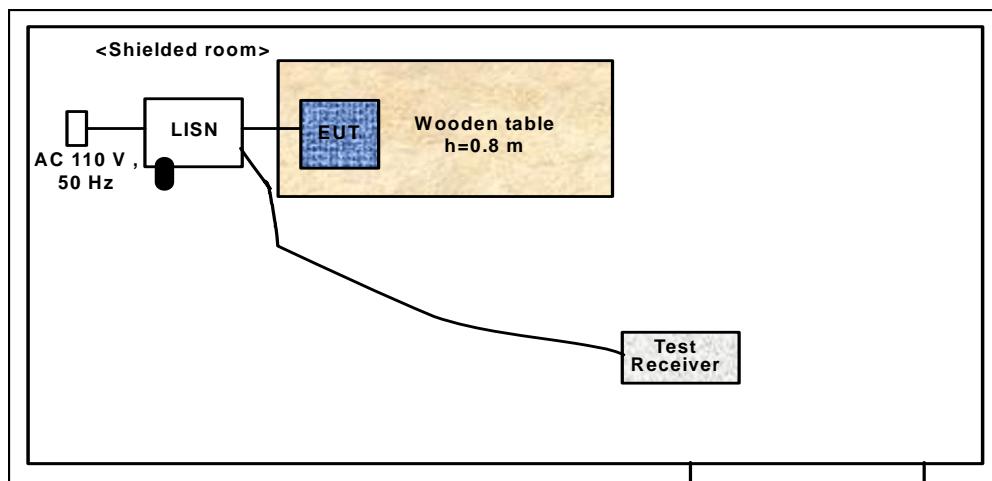

### 3.25.4 Test Results

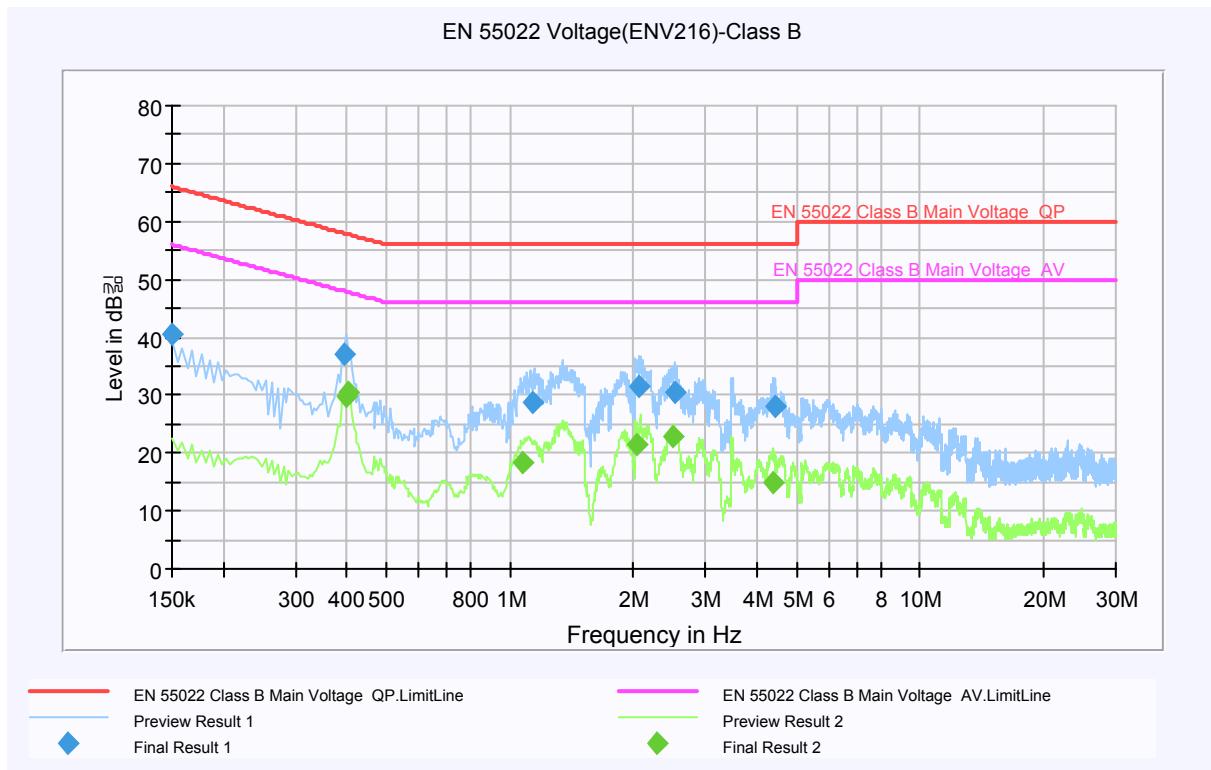

#### Final Measurement - QuasiPeak

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Margin (dB)	Limit (dB $\mu$ V)
0.150000	40.6	N	25.4	66.0
0.393000	37.1	L1	20.9	58.0
1.131000	28.9	L1	27.1	56.0
2.058000	31.4	N	24.6	56.0
2.535000	30.6	L1	25.4	56.0
4.420500	28.0	N	28.0	56.0

#### Final Measurement - Average

Frequency (MHz)	Average (dB $\mu$ V)	Line	Margin (dB)	Limit (dB $\mu$ V)
0.397500	29.7	N	18.2	47.9
0.402000	30.4	L1	17.4	47.8
1.072500	18.4	N	27.6	46.0
2.049000	21.6	L1	24.4	46.0
2.494500	22.9	L1	23.1	46.0
4.380000	14.8	L1	31.2	46.0

#### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. Trace shown in plot are made using a peak detector.


## 4. Self Declaration

Applicant Name	APROTECH CO.,LTD.		
Address	201-23, Anyang-Dong, Manan-Gu, Anyang-Si, Gyeonggi-do, 430-817, Korea		
Contact person	JH Yang		
E-mail address	jhyang@aprotech.net		
Phone No.	+82 31 478-2687	Fax No. :	+82 31 459 9024
Manufacture Name	APROTECH CO.,LTD..		
Address	201-23, Anyang-Dong, Manan-Gu, Anyang-Si, Gyeonggi-do, 430-817, Korea		

Model name	DP01		Remarks
FCC ID	ZY2DP01		
According to 47CFR 15.323(C)(3) does the EUT satisfy Maximum transmit time of 8 hours in an occupation of the same combined time and spectrum windows?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Does a system built with the EUT that implement the provisions of 47CFR 15.323(C)(5) enabling the use of the upper threshold for deferral?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
According to 47CFR 15.323(C)(5).4, does your model not use bandwidth in further cooperation with other devices at any range?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Does a system built using the EUT that operate under the provisions of 47CFR 15.323(c)(6) incorporating provisions for Waiting for a channel to go clear?	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
According to 47CFR15.323(C)(8), does EUT use the same antennas for transmission and reception as for monitoring?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Does a system built with the EUT that operate under the provisions of 47CFR 15.323(C)(10) to test for deferral only in conjunction with a companion device?	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Does a system built with the EUT that operate under the provisions of 47CFR 15.323(C)(11) enabling the access criteria check on the receive channel while in the presence of collocated interferers?	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
According to 47CFR15.323(C)(12), does EUT not work in a mode with denies fair access to spectrum for other devices.	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		


Signed by : JH Yang  
Date: September 16, 2011

signature:




## 5. TEST SET UP

### 5.1 Frequency & Timing Measurement

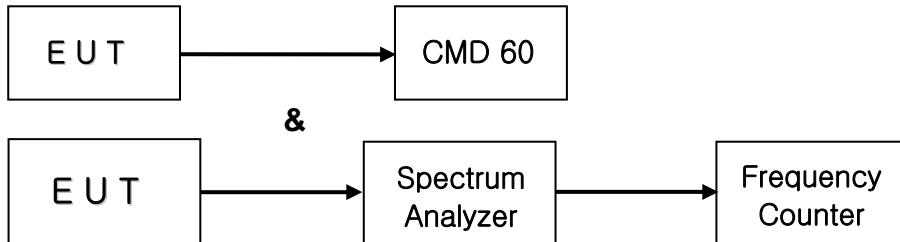

### 5.2 Monitoring Tests

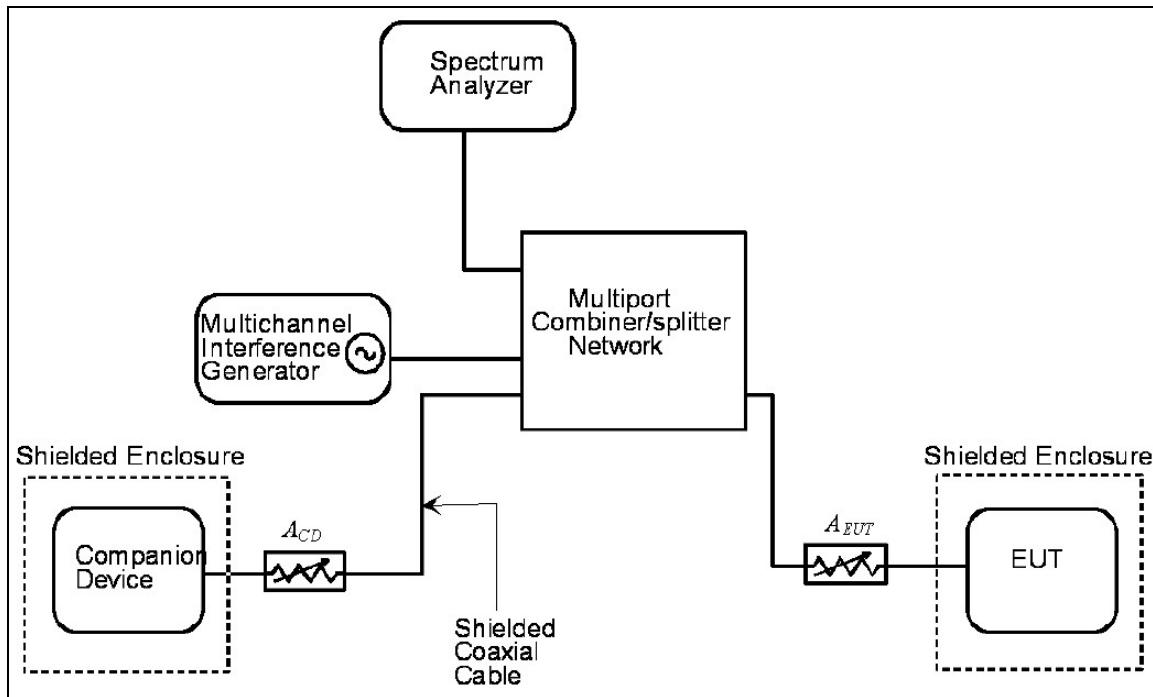

## 6. TEST EQUIPMENT

No.	Equipment	Manufacturer	Model	S/N
1	Spectrum Analyzer	Agilent	E4407B	US41443316
2	Synthesized Sweeper	HP	83620A	3250A01653
3	Digital RF Signal Generator	Agilent	E4438C	US41460859
4	Signal Generator	R&S	SMIQ O3	DE22348
5	Spectrum Analyzer	Agilent	E4407B	US41443316
6	PSA Series Spectrum Analyzer	Agilent	E4448A	US44300484
7	DC Power Supply	Agilent	E4356A	MY41000296
8	DC Power Supply	Agilent	E3645A	MY40000851
9	Oscilloscope	Tektronix	TDS3052B	B010173
10	Directional Coupler	Agilent	87300C	MY44300126
11	Directional Coupler	Agilent	773D	MY28390213
12	VHF Attenuator	HP	355D	2522A45959
13	Coaxial Attenuator	TenuLine	8340-200	1087
14	Coaxial Attenuator	TenuLine	8080	7676
15	Power Divider	HP	11636A	6047
16	Power Splitter	HP	11667A	21063
17	Frequency Counter	Anritsu	MF2412B	2108A07645
18	Synthesizer/Level Generator	HP	3336C	2903A02111
19	Temp/Humidity Chamber	Korea Power Machine	HI-5050	HI200420

No.	Equipment	Manufacturer	Model	S/N
20	Function/Arbitrary Waveform Generator	Agilent	33250A	MY40015646
21	EMI Receiver	R&S	ESCS30	100206
22	EMI Receiver	R&S	ESPI	100043
23	Pre-Amplifier	HP	8347A	2834A00543
24	Pre-Amplifier	HP	8449B	3008A00302
25	Log-Periodic Antenna	ETS-Lindgren	3148	5051
26	Tuned Dipole Antenna	Schwarzbeck	VHA 9103	--
27	Biconi-Log Antenna	ETS-Lindgren	3142B	00023784
28	Double Ridge Wave Guide	ETS-Lindgren	3115	6913