

FCC DTS REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

July 18, 2022

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2207-FC022**FCC ID:** A3LSMA233JPN**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SC-56C**Additional Model:** SCG18, SM-A233C**EUT Type:** Mobile Phone**Average Output Power:** 802.11b : 17.39 dBm, 802.11g : 16.53 dBm, 802.11n(HT20) : 16.34 dBm**Frequency Range:** 2412 MHz ~ 2472 MHz**Modulation type:** CCK/DSSS/OFDM**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2207-FC022

REVIEWED BY



Report prepared by : Woong Jin Kim
Engineer of Telecommunication Testing Center



Report approved by : Se Wook Park
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2207-FC022	July 18, 2022	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE.....	25
9.2 6 dB BANDWIDTH	28
9.3 OUTPUT POWER	31
9.4 POWER SPECTRAL DENSITY	37
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	40
9.6 RADIATED SPURIOUS EMISSIONS	54
9.7 RADIATED RESTRICTED BAND EDGES	62
9.8 POWERLINE CONDUCTED EMISSIONS	70
10. LIST OF TEST EQUIPMENT	74
11. ANNEX A_ TEST SETUP PHOTO	76

1. EUT DESCRIPTION

Model	SC-56C	
Additional Model	SCG18, SM-A233C	
EUT Type	Mobile Phone	
Power Supply	DC 4.20 V	
Frequency Range	2 412 MHz ~ 2 472 MHz	
Max. RF Output Power	<u>Peak Power</u> (For information only)	802.11b : 23.15 dBm 802.11g : 24.67 dBm 802.11n(HT20) : 24.23 dBm
	<u>Average Power</u>	802.11b : 17.39 dBm 802.11g : 16.53 dBm 802.11n(HT20) : 16.34 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n	
Number of Channels	13 Channels	
Date(s) of Tests	June 23, 2022 ~ July 18, 2022	
Serial number	Radiated : R3CT50MQF8M Conducted : R3CT50MQEKV	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

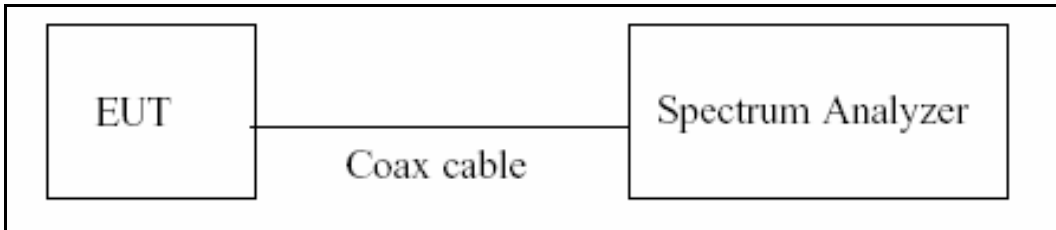

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1000	20.31
2000	20.46
2400	20.52
2480	20.52
2500	20.52
3000	20.57
4000	20.67
5000	20.75
5150	20.77
5850	20.82
6000	20.82
7000	20.91
8000	20.98
9000	21.05
10000	21.12
11000	21.16
12000	21.24
13000	21.32
14000	21.30
15000	21.32
16000	21.37
17000	21.41
18000	21.47
19000	21.50
20000	21.56
21000	21.77
22000	21.74
23000	21.94
24000	21.77
25000	21.80
26000	21.80

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea)

3. EUT Cable : 0.20 dB → Total Port offset : 20.72 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

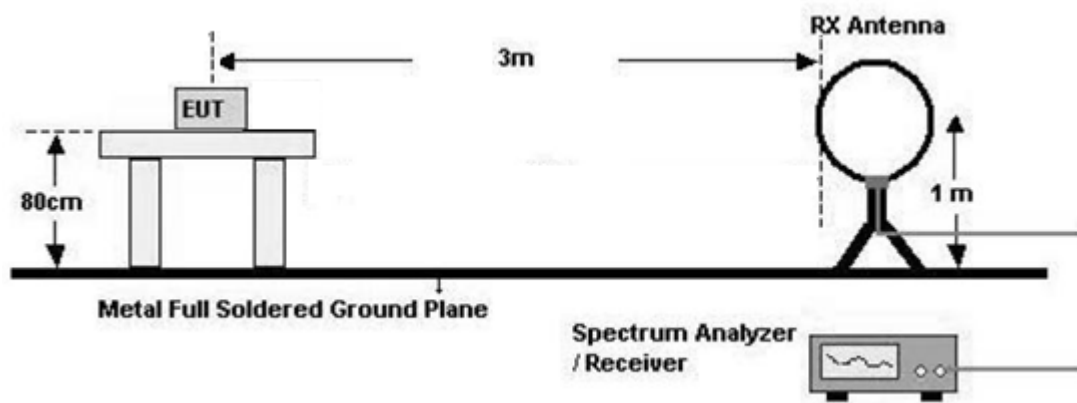

30 MHz - 1 GHz

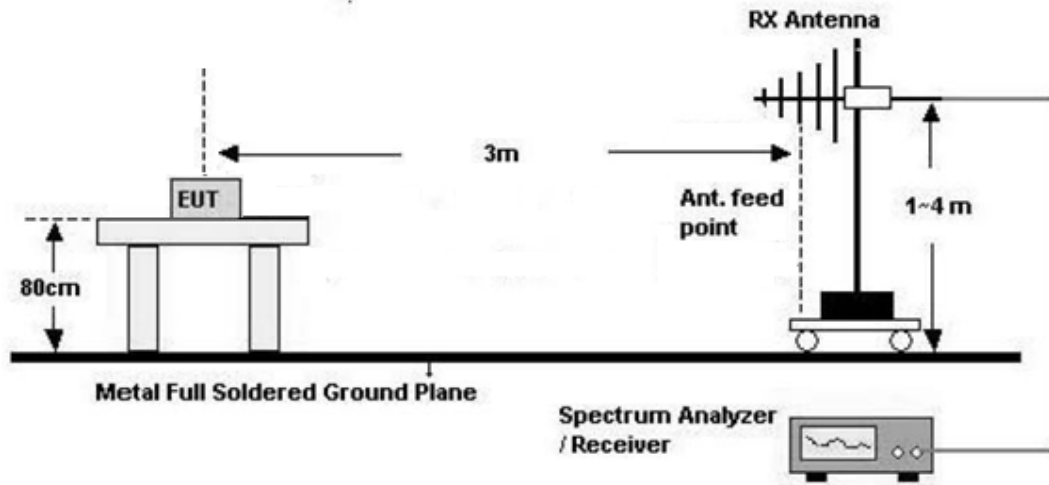

Above 1 GHz

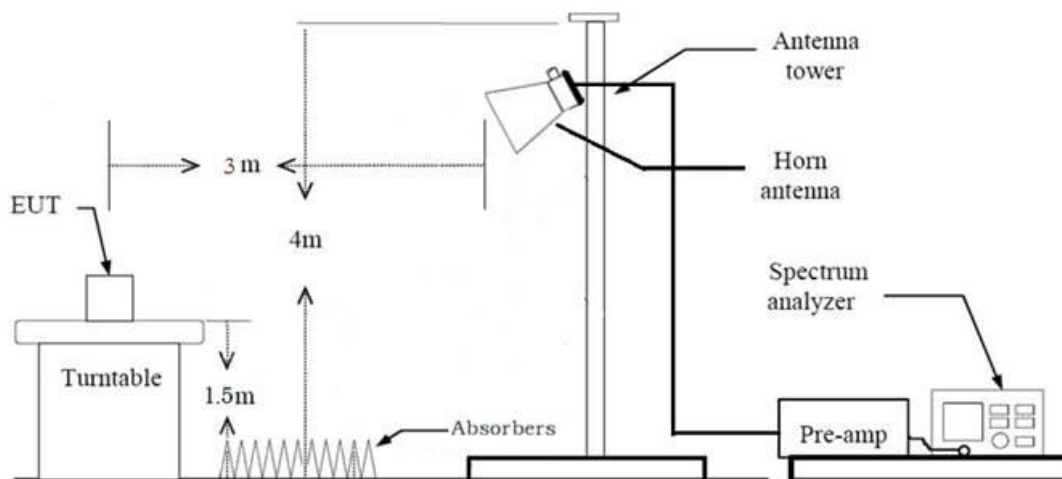

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle ≥ 98 %,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worst case : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20): MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. SC-56C, SCG18, SM-A233C were tested and the worst case results are reported.
(Worst case : SC-56C)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worst case : Stand alone + Travel Adapter
2. SC-56C, SCG18, SM-A233C were tested and the worst case results are reported.
(Worst case : SC-56C)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SC-56C, SCG18, SM-A233C were tested and the worst case results are reported.
(Worst case : SC-56C)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.377	8.422	0.995	0.023
	2	4.286	4.324	0.991	0.038
	5.5	1.683	1.721	0.978	0.097
	11	0.938	0.974	0.962	0.167
802.11g	6	1.391	1.438	0.968	0.143
	9	0.938	0.981	0.955	0.198
	12	0.707	0.752	0.940	0.267
	18	0.480	0.525	0.915	0.387
	24	0.364	0.409	0.890	0.504
	36	0.252	0.297	0.849	0.713
	48	0.192	0.237	0.811	0.912
	54	0.176	0.221	0.797	0.987
802.11n (HT20)	6.5 (MCS0)	1.301	1.345	0.967	0.144
	13 (MCS1)	0.668	0.713	0.937	0.282
	19.5 (MCS2)	0.459	0.505	0.909	0.416
	26 (MCS3)	0.352	0.397	0.887	0.521
	39 (MCS4)	0.248	0.293	0.847	0.722
	52 (MCS5)	0.196	0.241	0.814	0.896
	58.5 (MCS6)	0.180	0.225	0.801	0.966
	65 (MCS7)	0.164	0.209	0.785	1.050

Test Plots


Duty cycle plot (802.11b(1 Mbps))

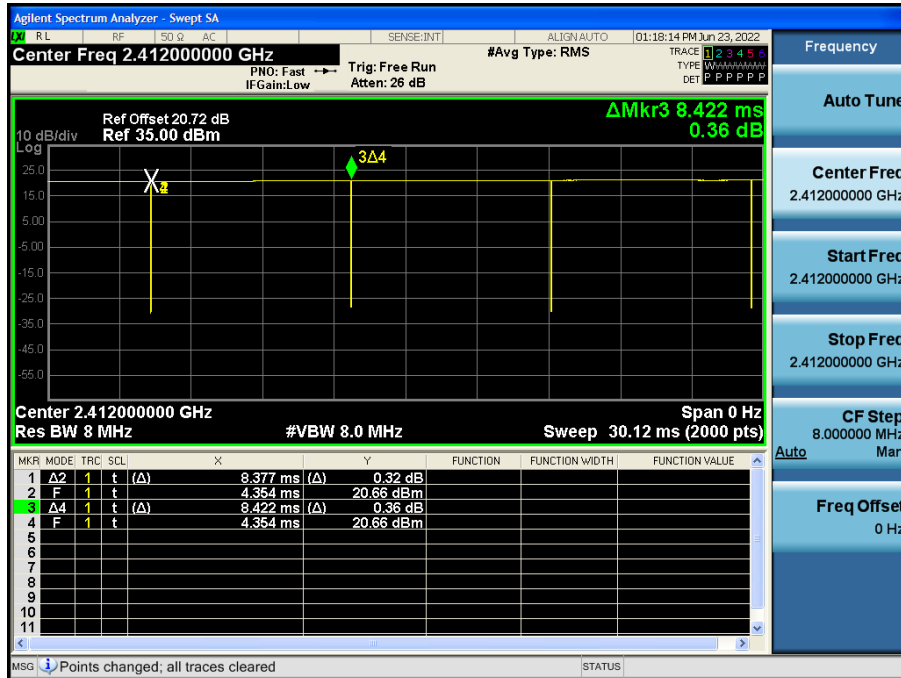

Duty cycle plot (802.11g(6 Mbps))

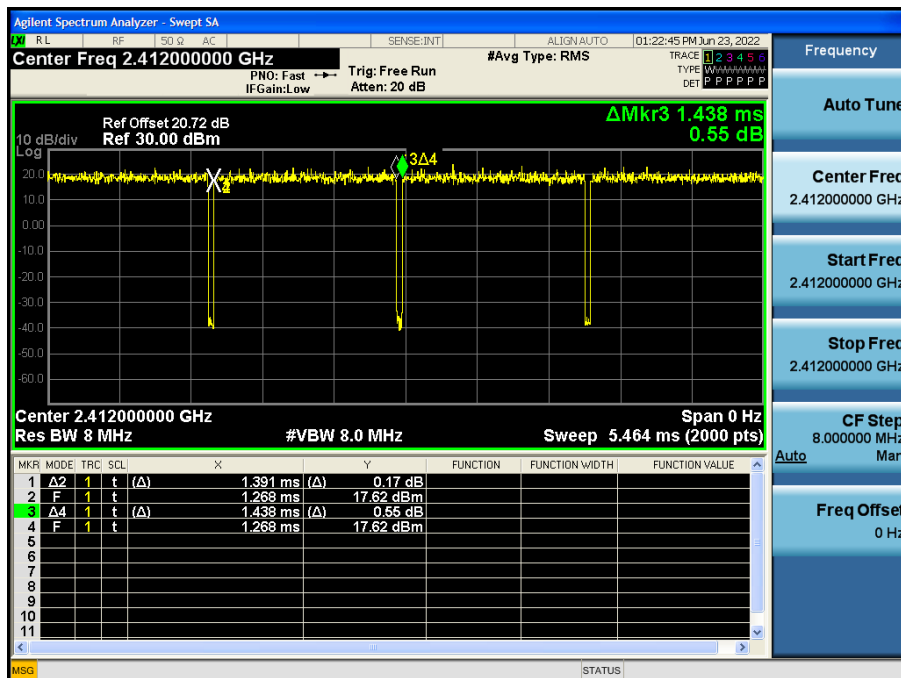

Duty cycle plot (802. 11n(MCS0))

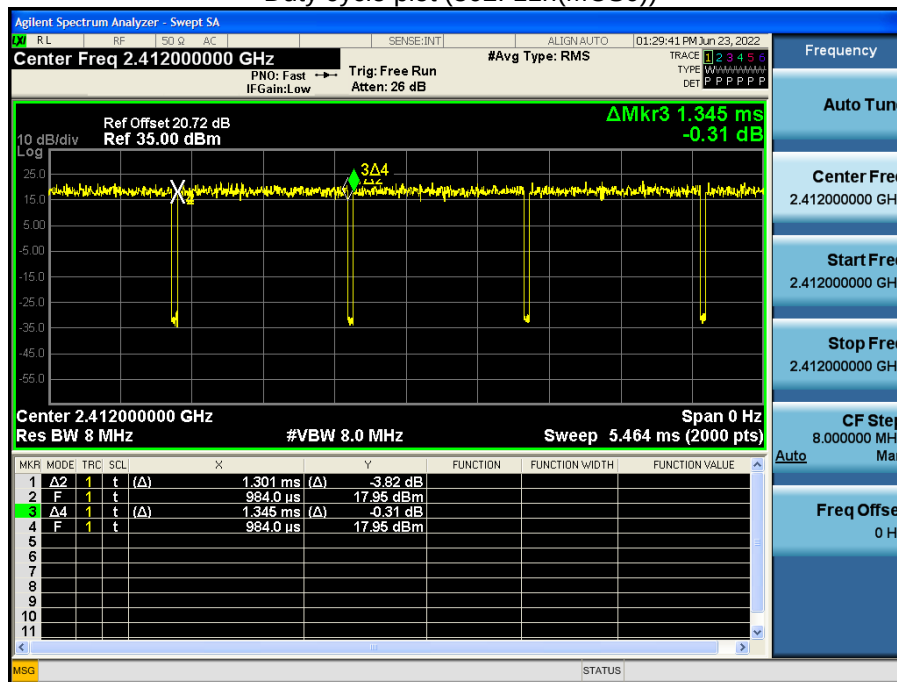

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6 dB BANDWIDTH


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.537	0.5
2437	6	8.084	0.5
2462	11	8.119	0.5
2467	12	8.083	0.5
2472	13	7.604	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.16	0.5
2437	6	15.17	0.5
2462	11	15.18	0.5
2467	12	15.52	0.5
2472	13	15.16	0.5


802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.15	0.5
2437	6	15.20	0.5
2462	11	15.17	0.5
2467	12	15.17	0.5
2472	13	15.14	0.5

Test Plots


6 dB Bandwidth plot (802.11b-CH 13)

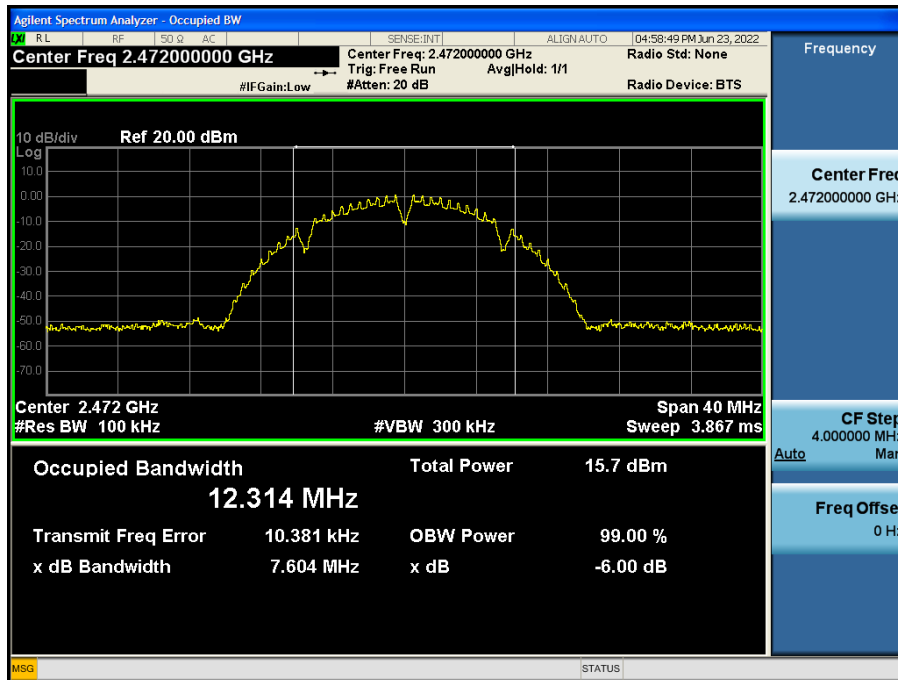

6 dB Bandwidth plot (802.11g-CH 13)

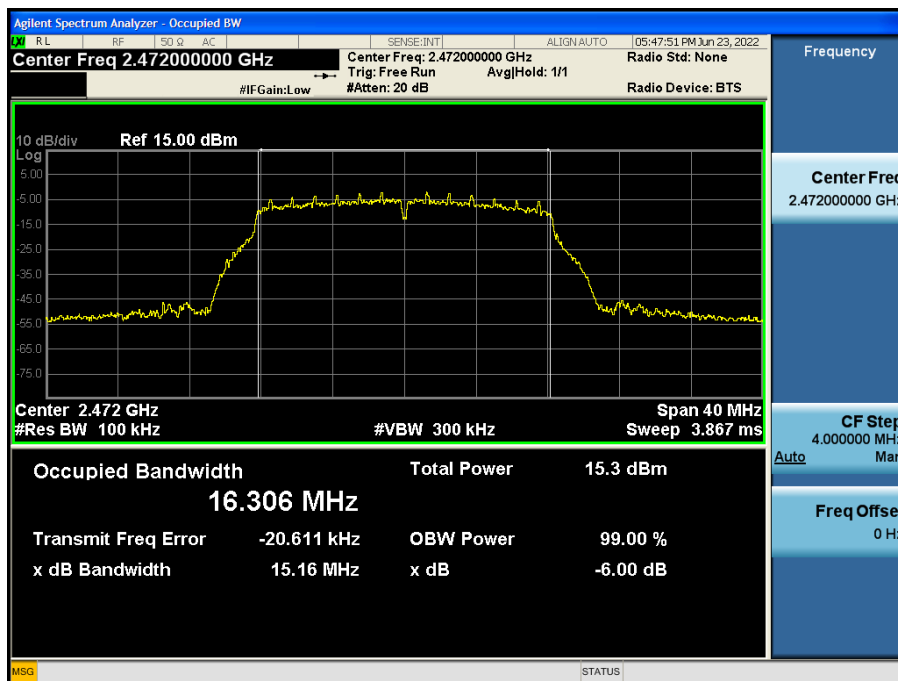

6 dB Bandwidth plot (802.11n_HT20-CH 13)

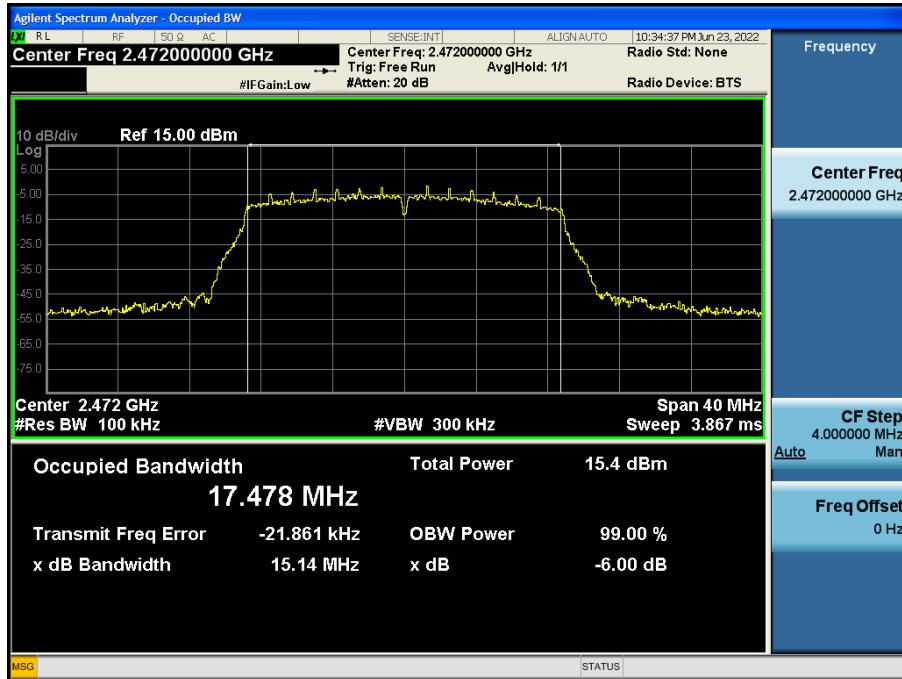

Note:

In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

9.3 OUTPUT POWER

Power Level Setting

Peak Power

Power Meter offset Attenuator loss (20 dB) + Cable loss + EUT Cable

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	19.64	30
		2	20.17	30
		5.5	21.42	30
		11	23.15	30
2437	6	1	19.66	30
		2	19.90	30
		5.5	21.45	30
		11	23.14	30
2462	11	1	19.63	30
		2	19.88	30
		5.5	21.47	30
		11	23.15	30
2467	12	1	10.98	30
		2	11.24	30
		5.5	12.60	30
		11	14.32	30
2472	13	1	10.65	30
		2	10.84	30
		5.5	12.34	30
		11	14.02	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	23.16	30
		9	23.35	30
		12	23.22	30
		18	23.27	30
		24	24.20	30
		36	24.21	30
		48	24.60	30
		54	24.66	30
2437	6	6	23.56	30
		9	23.80	30
		12	23.67	30
		18	23.73	30
		24	24.19	30
		36	24.15	30
		48	24.60	30
		54	24.48	30
2462	11	6	23.62	30
		9	23.87	30
		12	23.74	30
		18	23.78	30
		24	24.28	30
		36	24.24	30
		48	24.65	30
		54	24.67	30
2467	12	6	16.01	30
		9	16.12	30
		12	16.02	30
		18	16.00	30
		24	16.46	30
		36	16.49	30
		48	16.85	30
		54	16.85	30
2472	13	6	15.81	30
		9	15.86	30
		12	15.75	30
		18	15.80	30
		24	16.29	30
		36	16.24	30
		48	16.59	30
		54	16.62	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	23.00	30
		1	22.89	30
		2	22.91	30
		3	23.30	30
		4	23.32	30
		5	24.19	30
		6	24.23	30
		7	24.13	30
2437	6	0	23.48	30
		1	23.35	30
		2	23.39	30
		3	23.85	30
		4	23.78	30
		5	24.18	30
		6	24.09	30
		7	24.11	30
2462	11	0	22.31	30
		1	22.31	30
		2	22.22	30
		3	22.82	30
		4	22.95	30
		5	23.41	30
		6	23.32	30
		7	23.32	30
2467	12	0	15.82	30
		1	15.74	30
		2	15.63	30
		3	16.19	30
		4	16.18	30
		5	16.50	30
		6	16.39	30
		7	16.38	30
2472	13	0	15.57	30
		1	15.36	30
		2	15.49	30
		3	16.00	30
		4	16.07	30
		5	16.37	30
		6	16.36	30
		7	16.34	30

Average Power

Power Meter offset Loss = Attenuator loss (20 dB) + Cable loss + EUT Cable

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	17.11	0.023	17.14	30
		2	17.17	0.038	17.21	30
		5.5	17.13	0.097	17.23	30
		11	17.04	0.167	17.21	30
2437	6	1	17.28	0.023	17.31	30
		2	17.24	0.038	17.28	30
		5.5	17.29	0.097	17.39	30
		11	17.18	0.167	17.35	30
2462	11	1	17.28	0.023	17.30	30
		2	17.25	0.038	17.28	30
		5.5	17.25	0.097	17.35	30
		11	17.12	0.167	17.29	30
2467	12	1	8.48	0.023	8.50	30
		2	8.44	0.038	8.48	30
		5.5	8.34	0.097	8.43	30
		11	8.29	0.167	8.45	30
2472	13	1	8.20	0.023	8.23	30
		2	8.15	0.038	8.19	30
		5.5	8.10	0.097	8.20	30
		11	8.04	0.167	8.21	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	15.44	0.143	15.58	30
		9	15.28	0.198	15.48	30
		12	15.22	0.267	15.49	30
		18	15.40	0.387	15.78	30
		24	15.72	0.504	16.22	30
		36	15.54	0.713	16.26	30
		48	15.51	0.912	16.42	30
		54	15.46	0.987	16.45	30
2437	6	6	15.86	0.143	16.00	30
		9	15.79	0.198	15.99	30
		12	15.75	0.267	16.02	30
		18	15.64	0.387	16.03	30
		24	15.76	0.504	16.27	30
		36	15.47	0.713	16.19	30
		48	15.51	0.912	16.42	30
		54	15.44	0.987	16.43	30
2462	11	6	15.88	0.143	16.02	30
		9	15.90	0.198	16.10	30
		12	15.74	0.267	16.01	30
		18	15.72	0.387	16.11	30
		24	15.79	0.504	16.30	30
		36	15.58	0.713	16.30	30
		48	15.59	0.912	16.50	30
		54	15.55	0.987	16.53	30
2467	12	6	8.16	0.143	8.30	30
		9	8.16	0.198	8.36	30
		12	8.11	0.267	8.38	30
		18	7.96	0.387	8.34	30
		24	7.86	0.504	8.36	30
		36	7.65	0.713	8.36	30
		48	7.76	0.912	8.67	30
		54	7.69	0.987	8.68	30
2472	13	6	8.06	0.143	8.20	30
		9	8.00	0.198	8.19	30
		12	7.88	0.267	8.15	30
		18	7.81	0.387	8.20	30
		24	7.67	0.504	8.18	30
		36	7.54	0.713	8.26	30
		48	7.55	0.912	8.46	30
		54	7.48	0.987	8.47	30


802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	15.43	0.144	15.57	30
		1	15.28	0.282	15.56	30
		2	15.24	0.416	15.66	30
		3	15.08	0.521	15.60	30
		4	14.90	0.722	15.62	30
		5	15.42	0.896	16.32	30
		6	15.34	0.966	16.30	30
		7	15.26	1.050	16.31	30
2437	6	0	15.97	0.144	16.12	30
		1	15.83	0.282	16.11	30
		2	15.67	0.416	16.09	30
		3	15.57	0.521	16.09	30
		4	15.39	0.722	16.12	30
		5	15.45	0.896	16.34	30
		6	15.35	0.966	16.32	30
		7	15.28	1.050	16.33	30
2462	11	0	14.75	0.144	14.90	30
		1	14.66	0.282	14.95	30
		2	14.54	0.416	14.95	30
		3	14.47	0.521	14.99	30
		4	14.23	0.722	14.95	30
		5	14.55	0.896	15.45	30
		6	14.47	0.966	15.44	30
		7	14.39	1.050	15.44	30
2467	12	0	8.18	0.144	8.33	30
		1	8.11	0.282	8.39	30
		2	7.92	0.416	8.34	30
		3	7.85	0.521	8.37	30
		4	7.67	0.722	8.39	30
		5	7.71	0.896	8.61	30
		6	7.63	0.966	8.59	30
		7	7.50	1.050	8.55	30
2472	13	0	7.88	0.144	8.02	30
		1	7.70	0.282	7.98	30
		2	7.69	0.416	8.11	30
		3	7.59	0.521	8.11	30
		4	7.44	0.722	8.16	30
		5	7.57	0.896	8.47	30
		6	7.48	0.966	8.45	30
		7	7.41	1.050	8.46	30

9.4 POWER SPECTRAL DENSITY


Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11b	2412	1	-0.355	0.097	-0.258	8 dBm / 3 kHz
	2437	6	-0.398	0.097	-0.301	
	2462	11	-0.448	0.097	-0.351	
	2467	12	-8.412	0.023	-8.389	
	2472	13	-8.422	0.023	-8.399	
802.11g	2412	1	-3.123	0.987	-2.136	
	2437	6	-3.059	0.987	-2.072	
	2462	11	-2.544	0.987	-1.557	
	2467	12	-10.950	0.987	-9.963	
	2472	13	-10.921	0.987	-9.934	
802.11n(HT20)	2412	1	-3.056	0.896	-2.160	
	2437	6	-2.879	0.896	-1.983	
	2462	11	-3.642	0.896	-2.746	
	2467	12	-10.545	0.896	-9.649	
	2472	13	-10.666	0.896	-9.770	

Test Plots


Power Spectral Density (802.11b-CH 1)

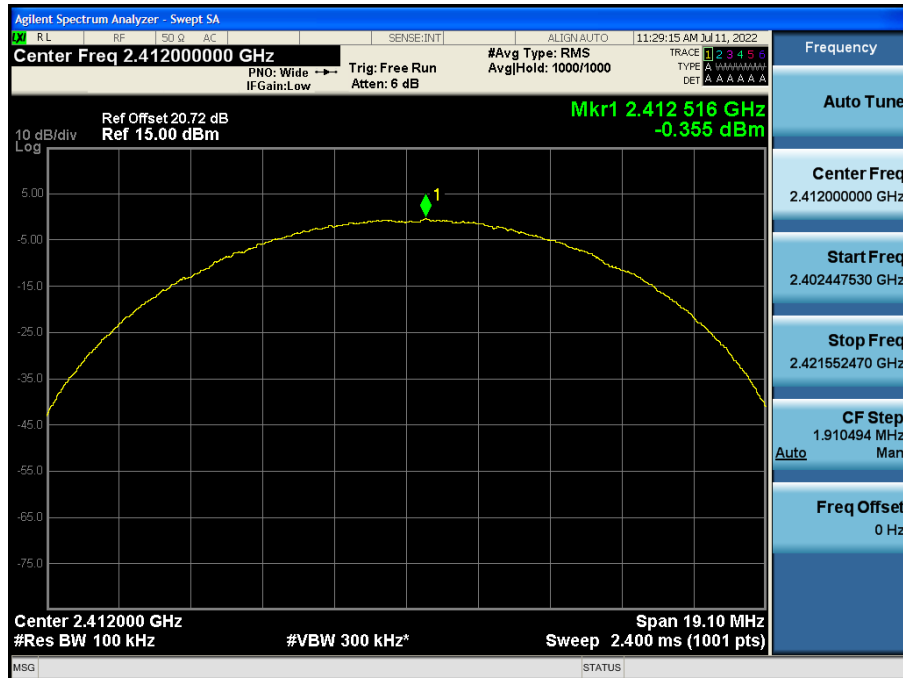

Power Spectral Density (802.11g-CH 11)

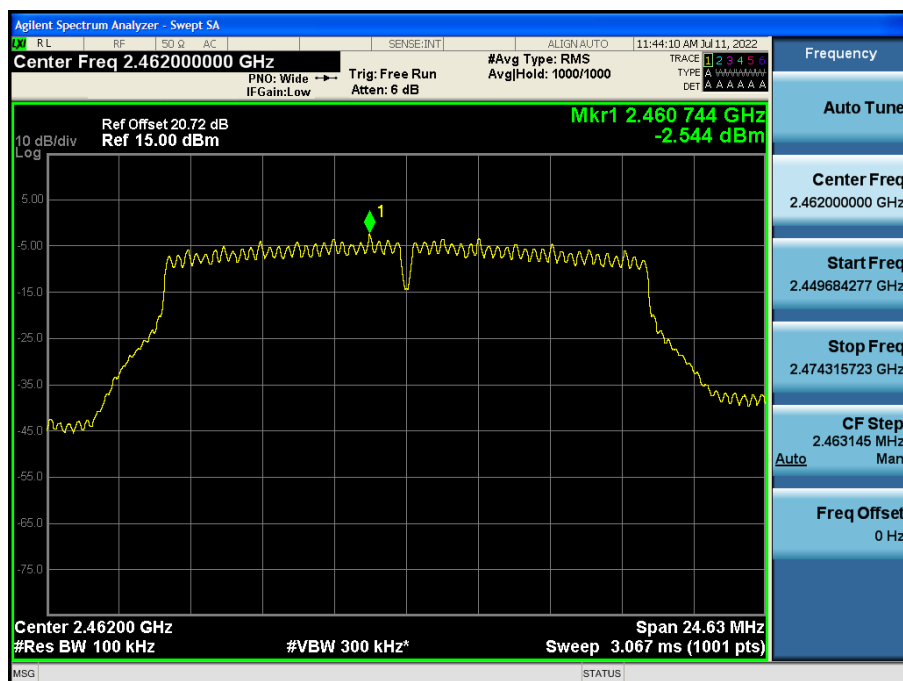

Power Spectral Density (802.11n_HT20-CH 6)

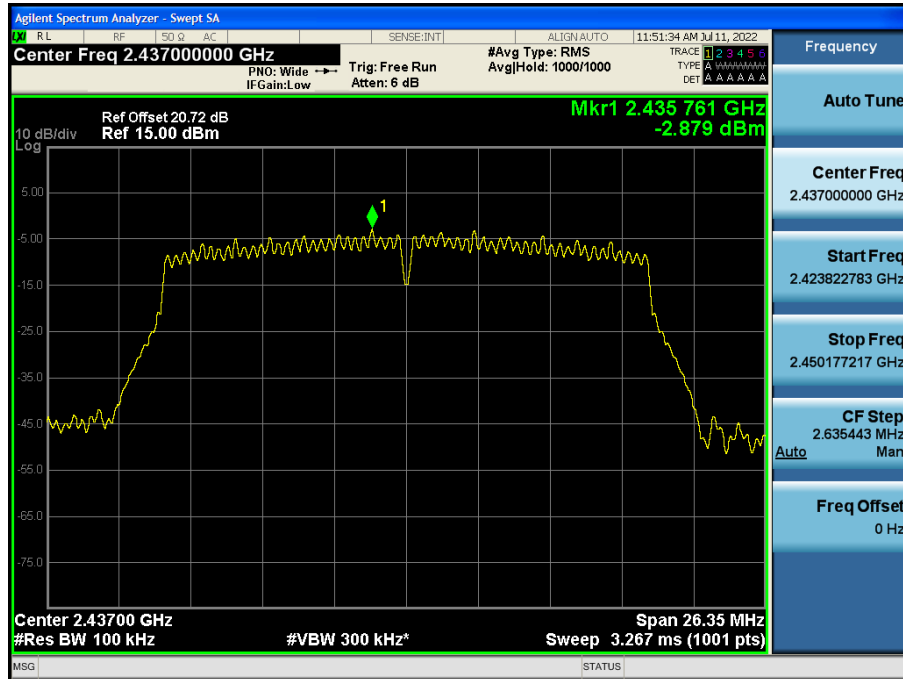

Note :

In order to simplify the report, attached plots were only the worst case PSD channel.


9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots(Band Edge)


Band Edge (802.11b -CH1)

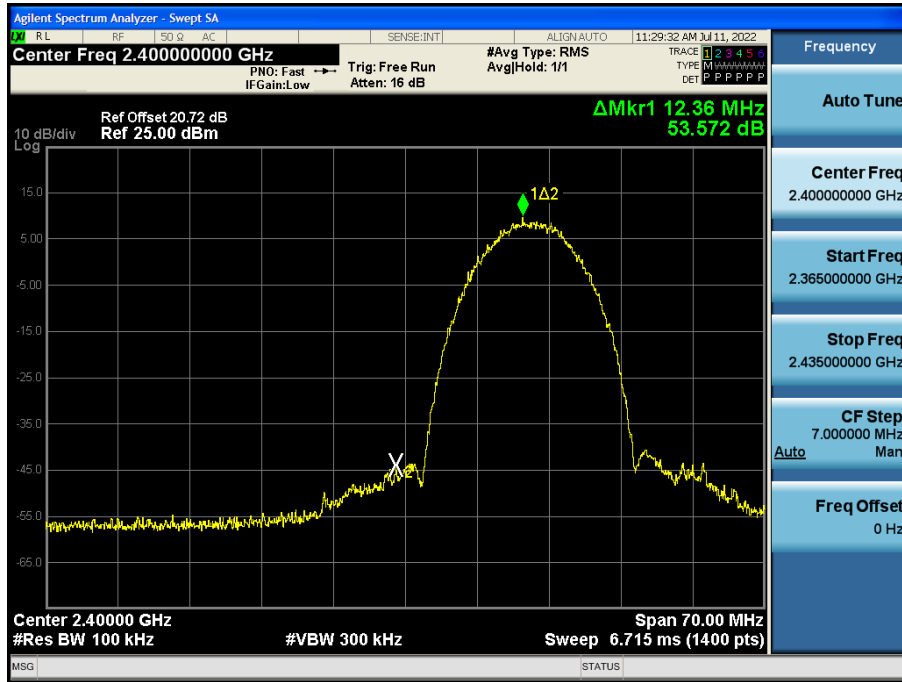


Band Edge (802.11b -CH11)

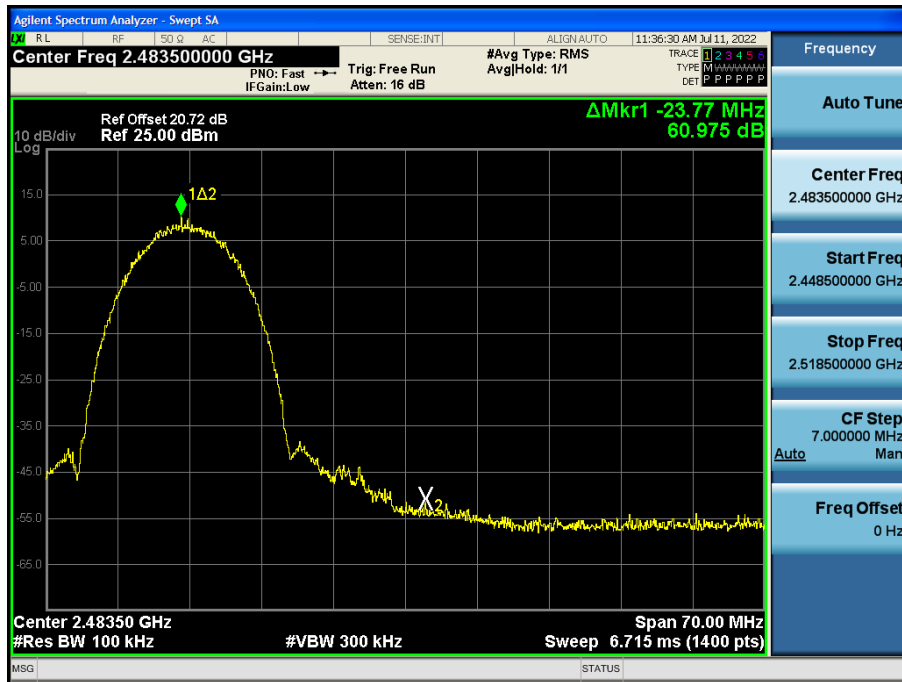


Band Edge (802.11b -CH12)

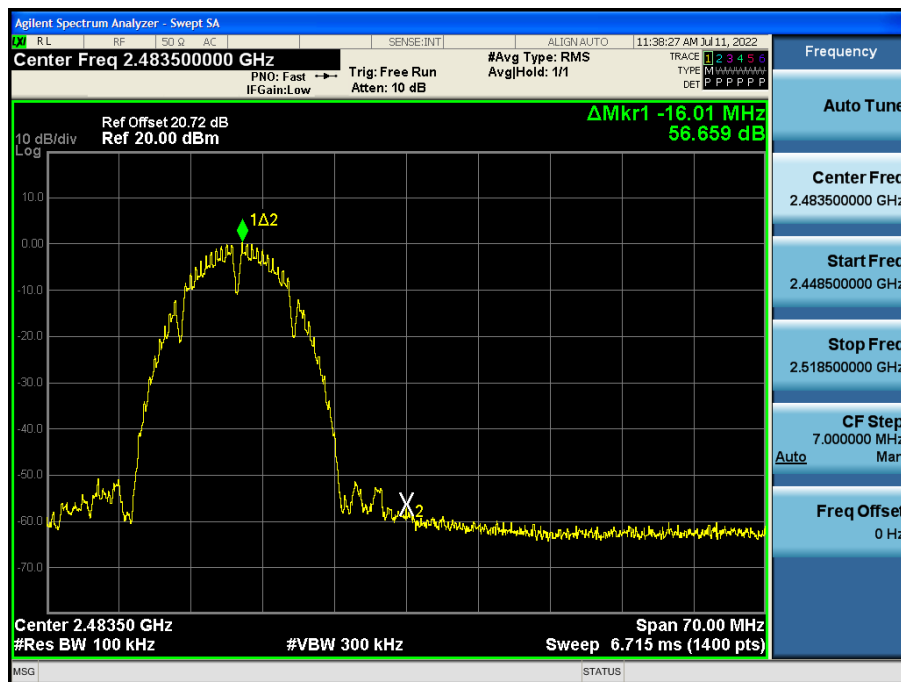

Band Edge (802.11b -CH13)

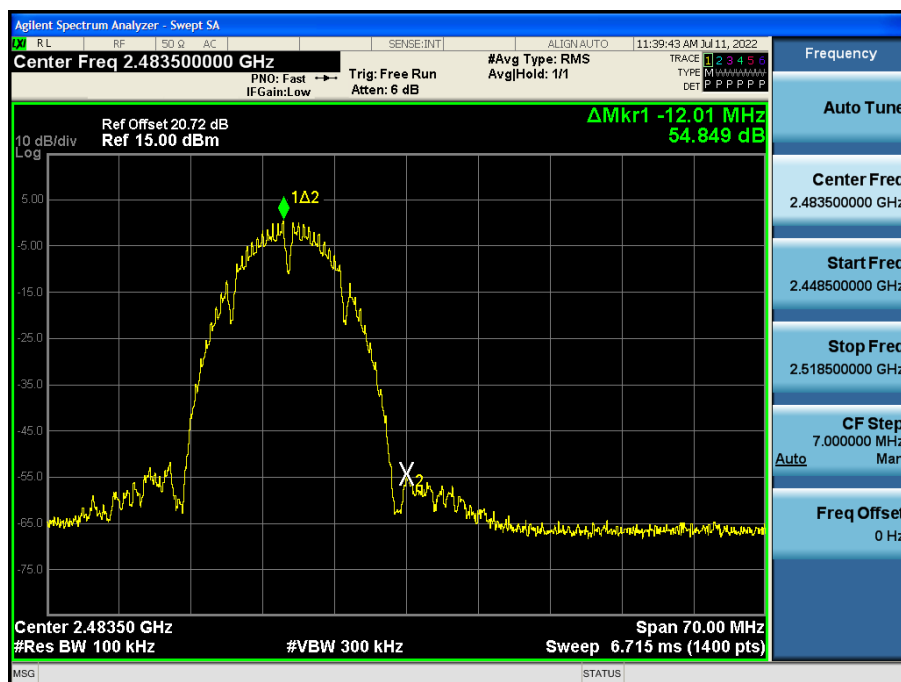

Band Edge (802.11g -CH1)

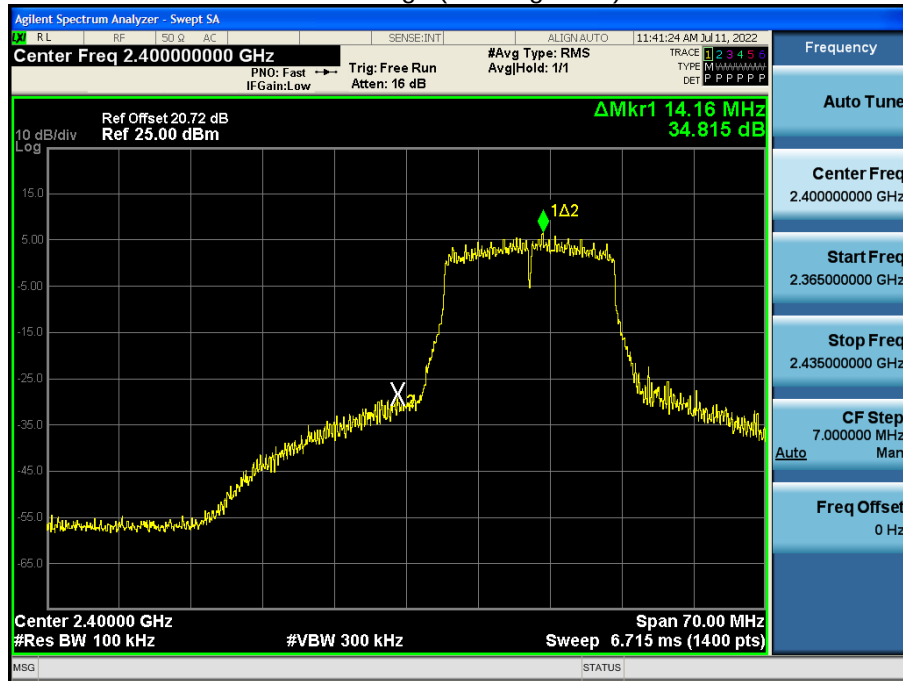


Band Edge (802.11g -CH11)




Band Edge (802.11g -CH12)




Band Edge (802.11g -CH13)

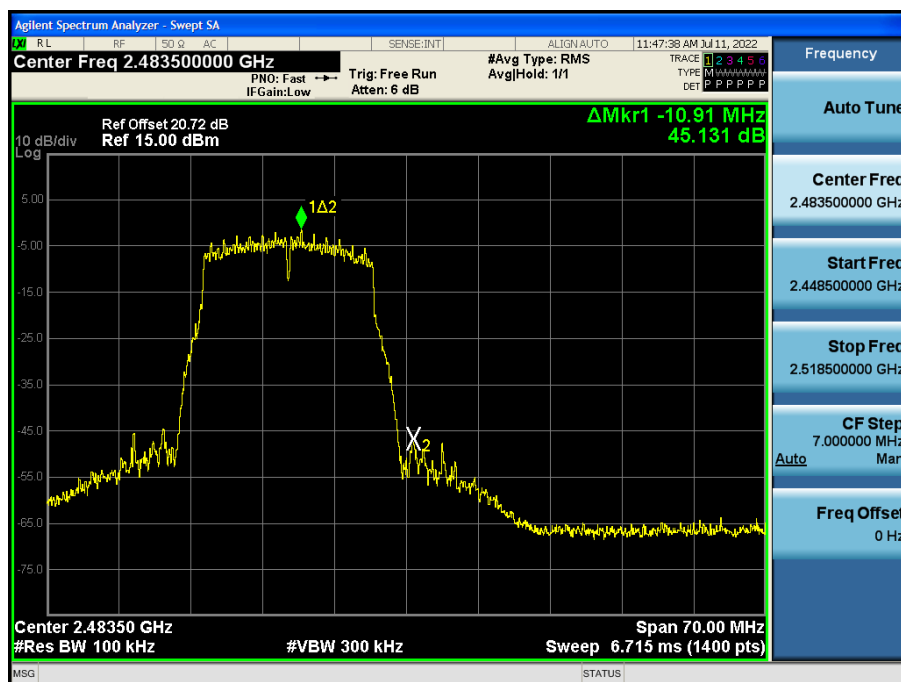

Band Edge (802.11n_HT20-CH1)

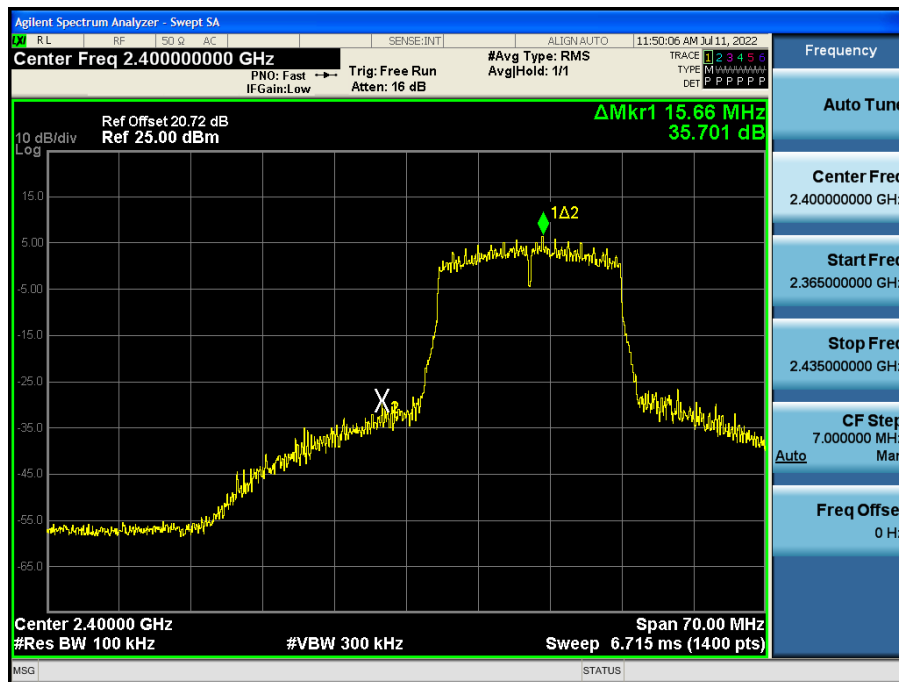


Band Edge (802.11n_HT20-CH11)

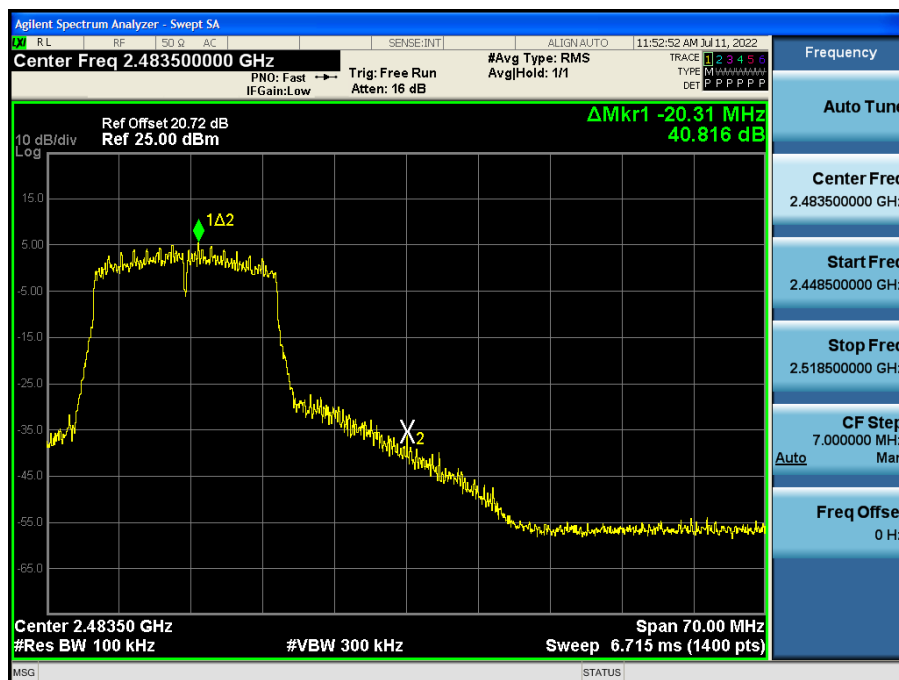

Band Edge (802.11n_HT20-CH12)




Band Edge (802.11n_HT20-CH13)

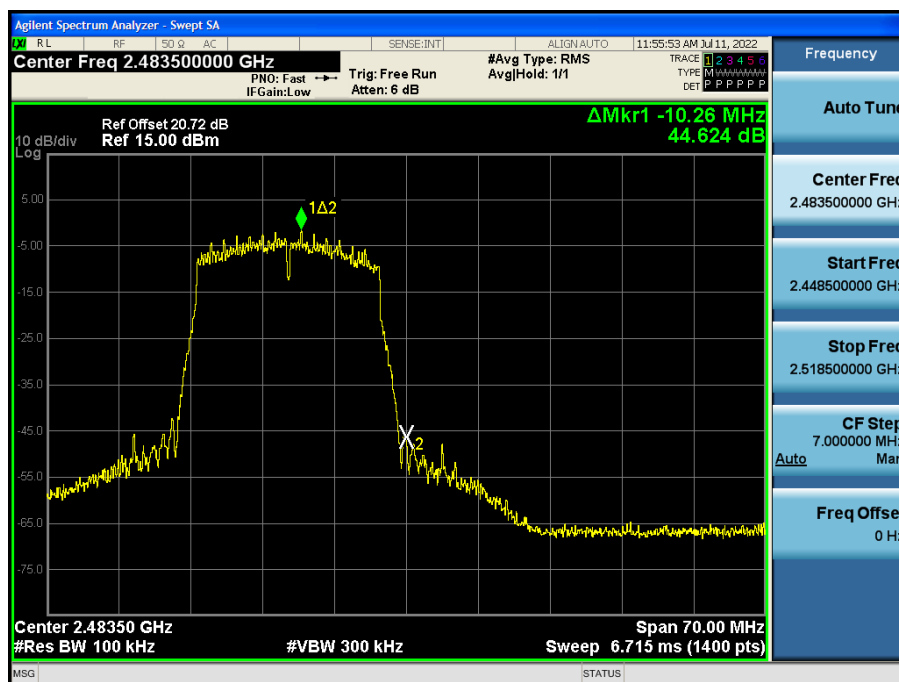

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

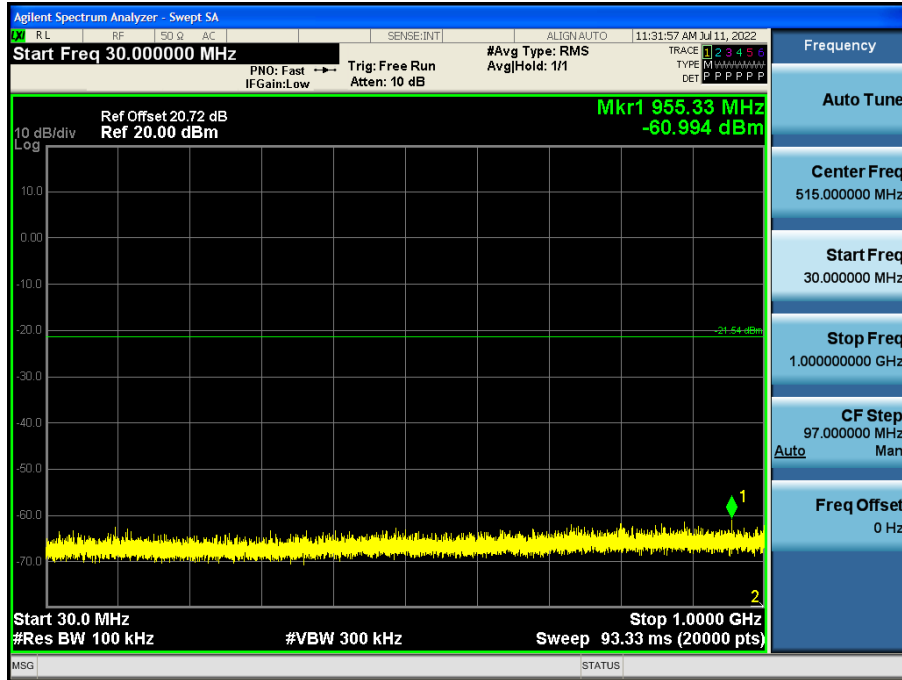


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

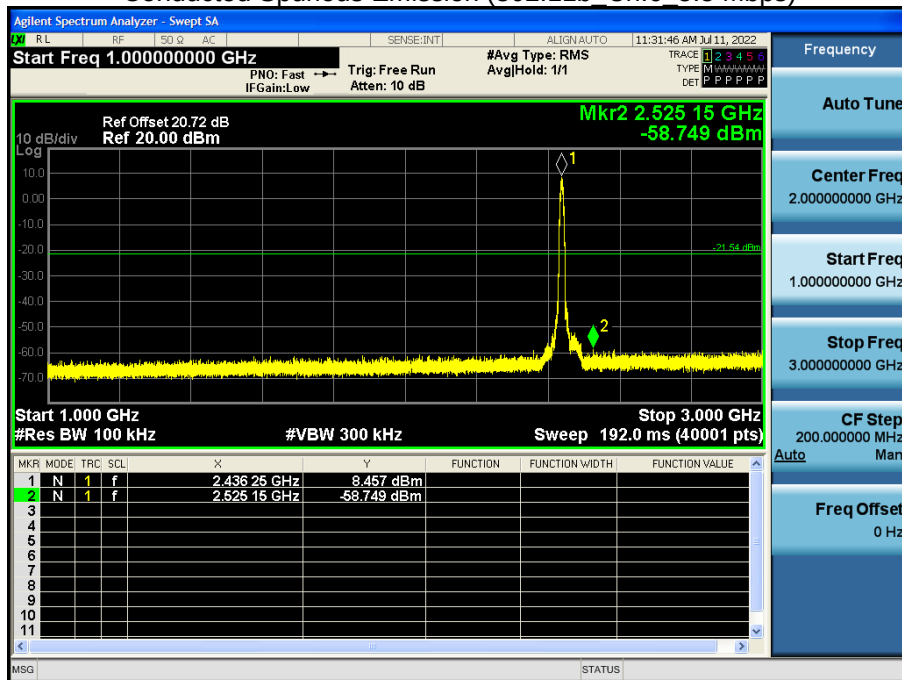


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

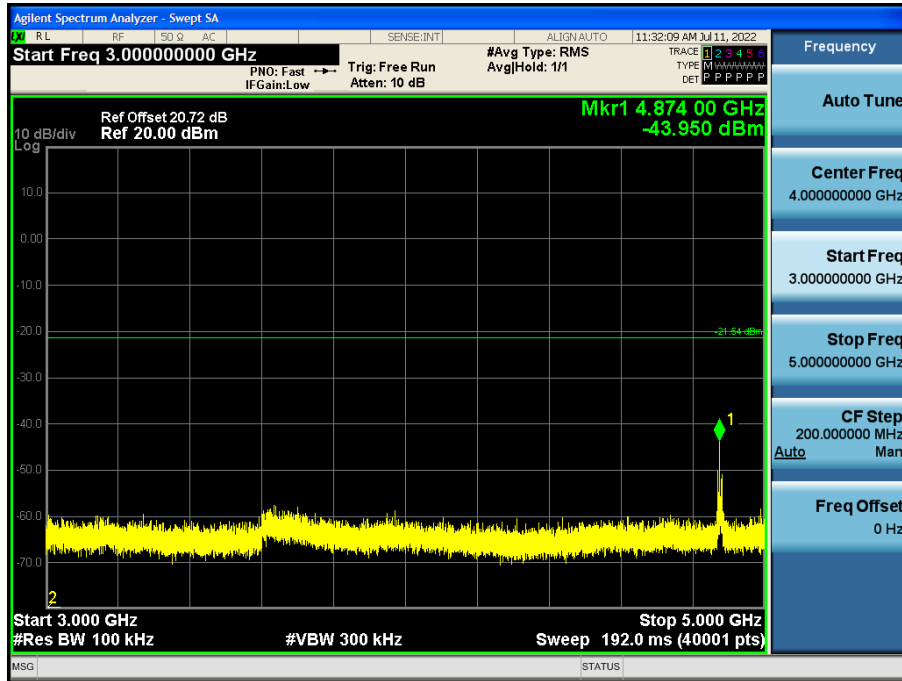


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

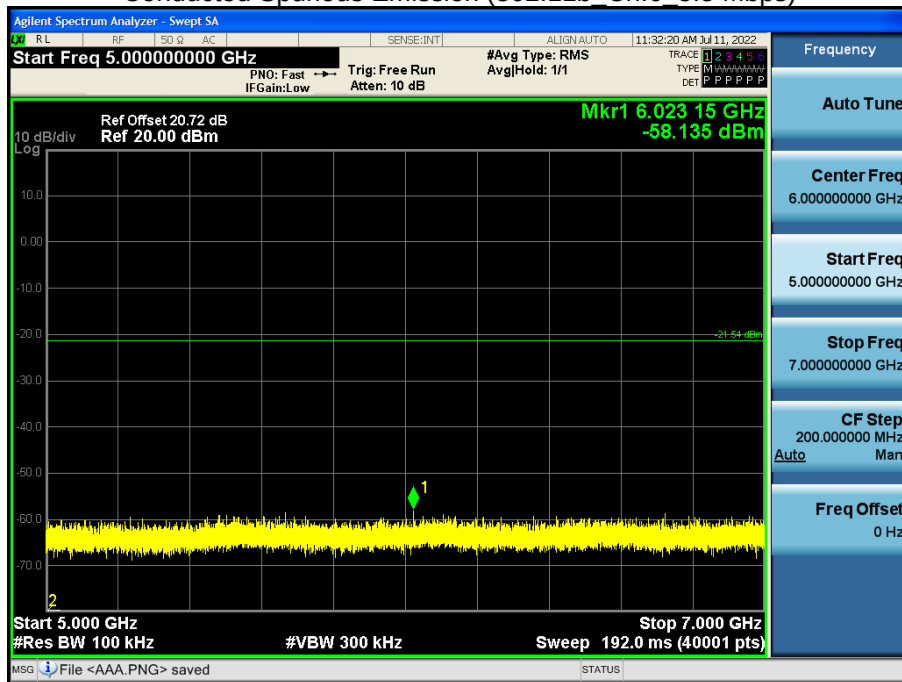


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

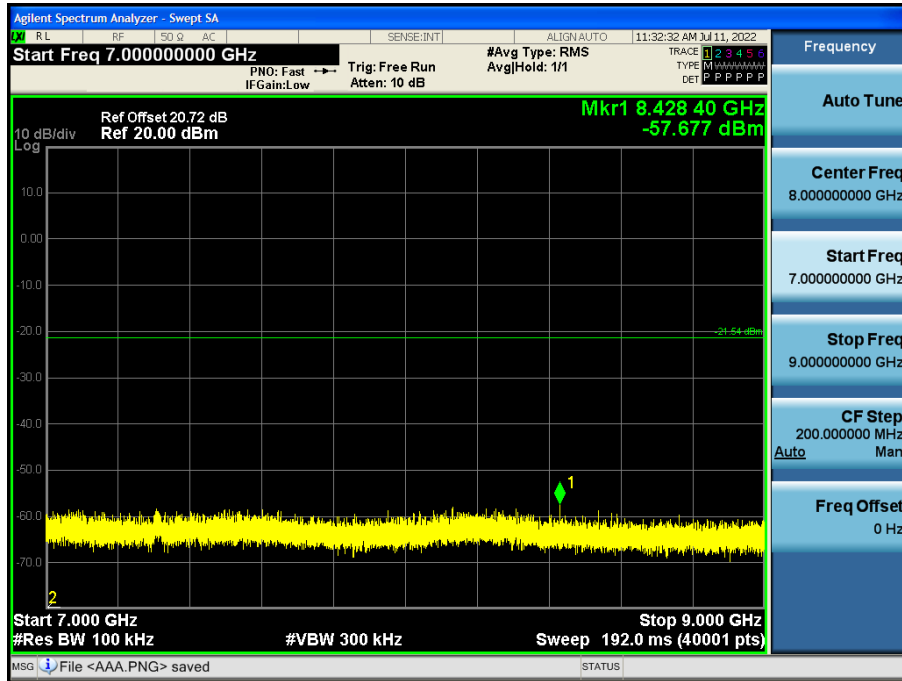


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

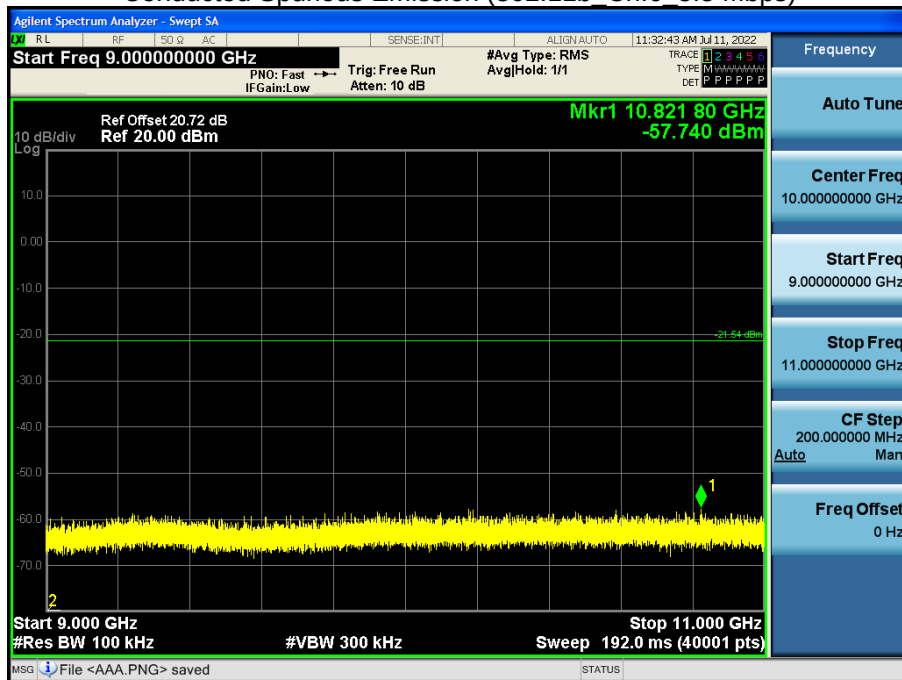


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

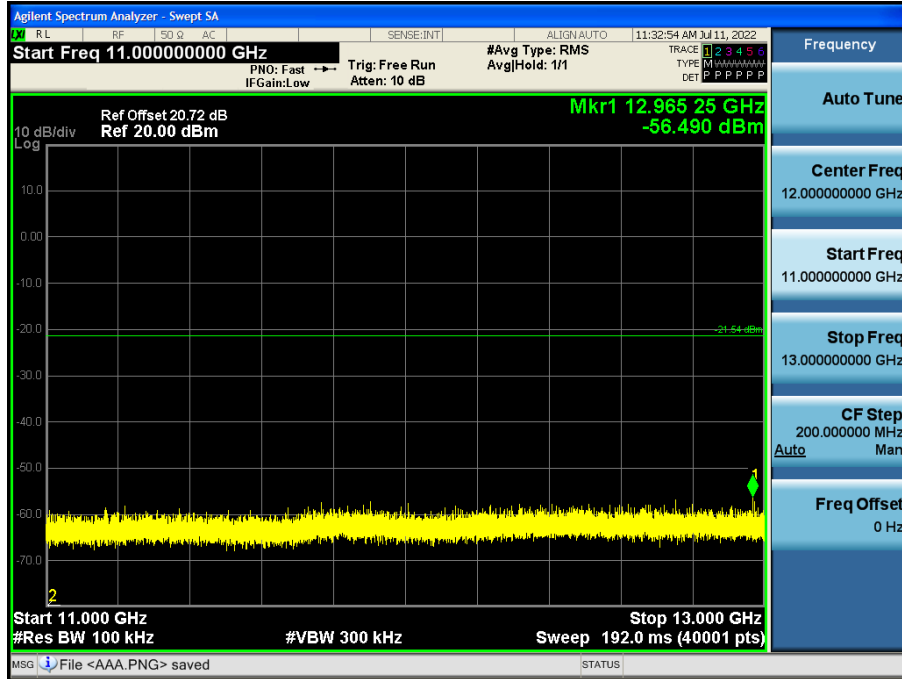


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

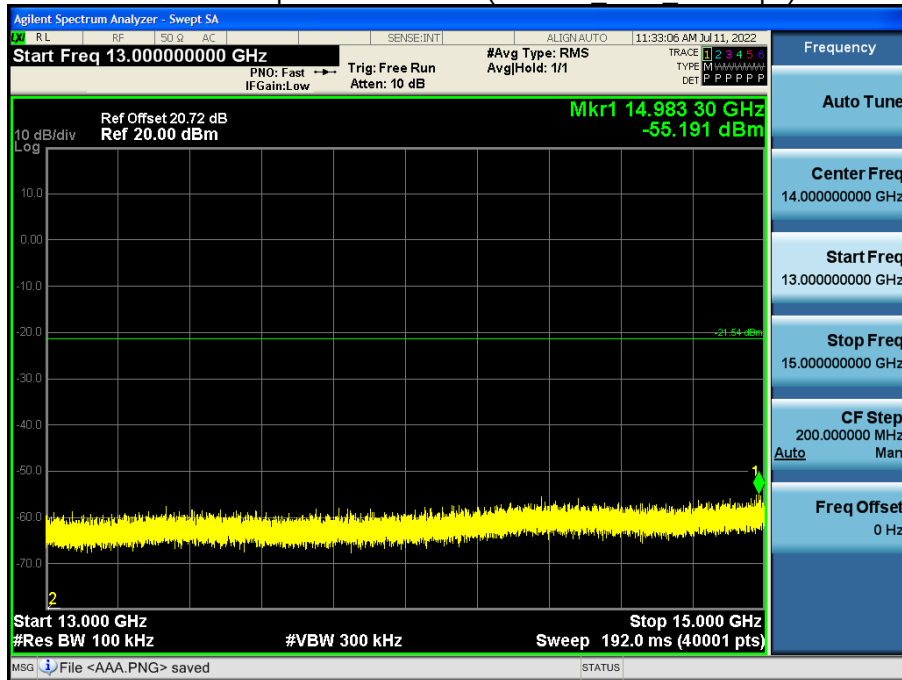


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b Ch.6 5.5 Mbps)

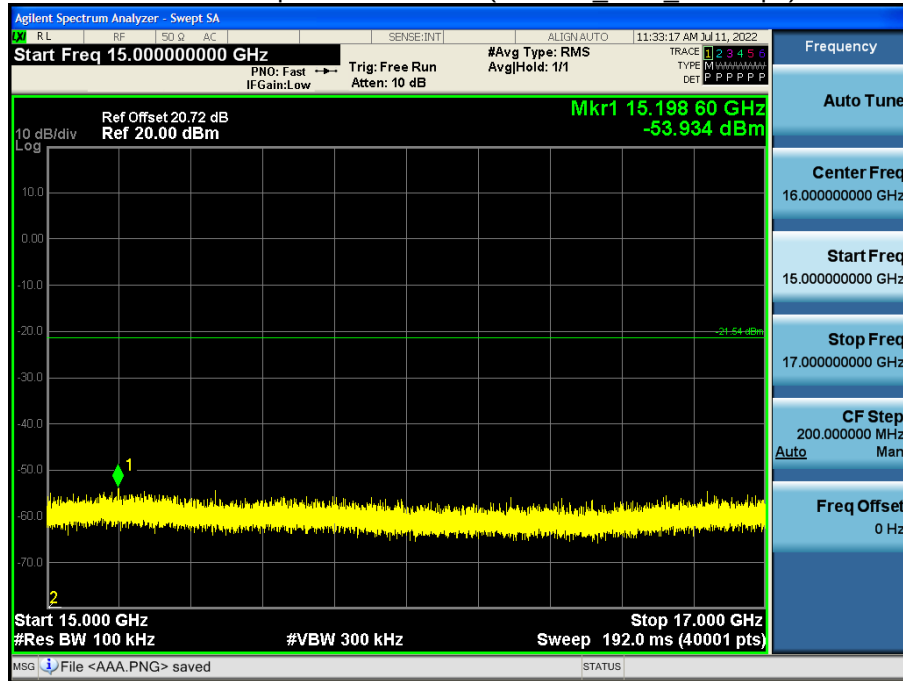


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b Ch.6 5.5 Mbps)

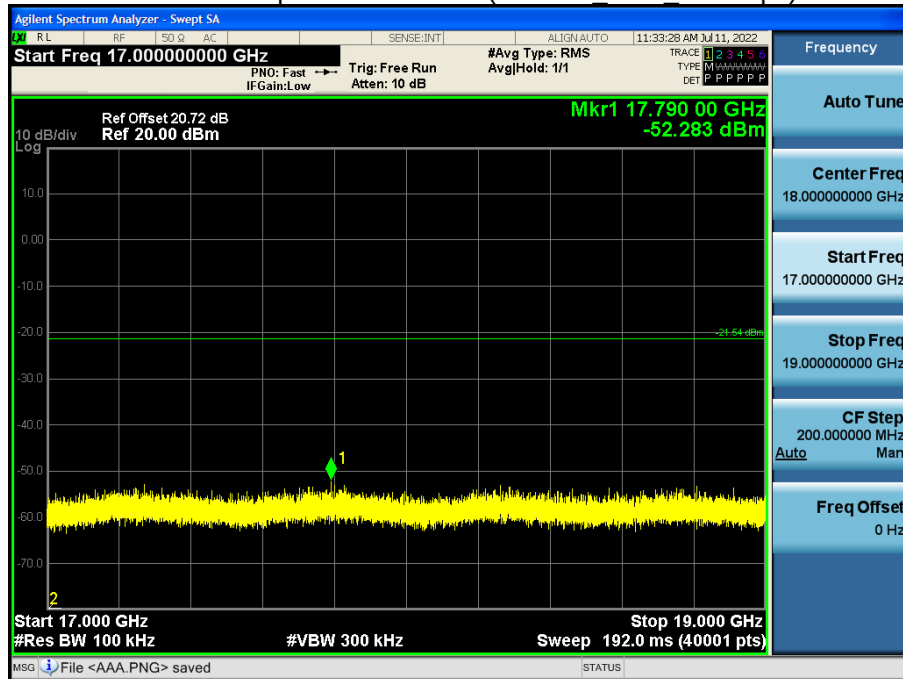


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

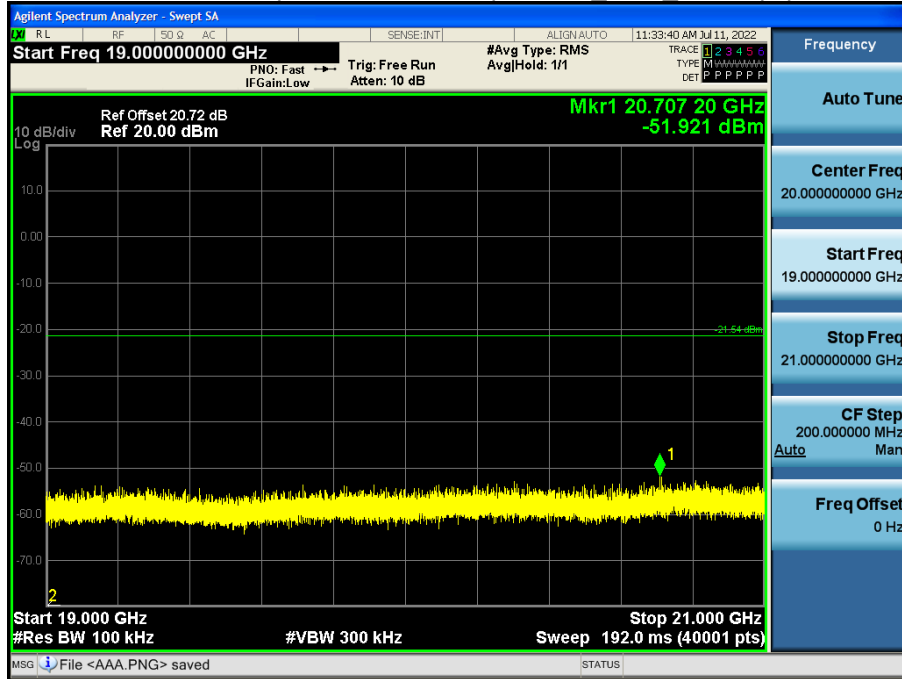


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

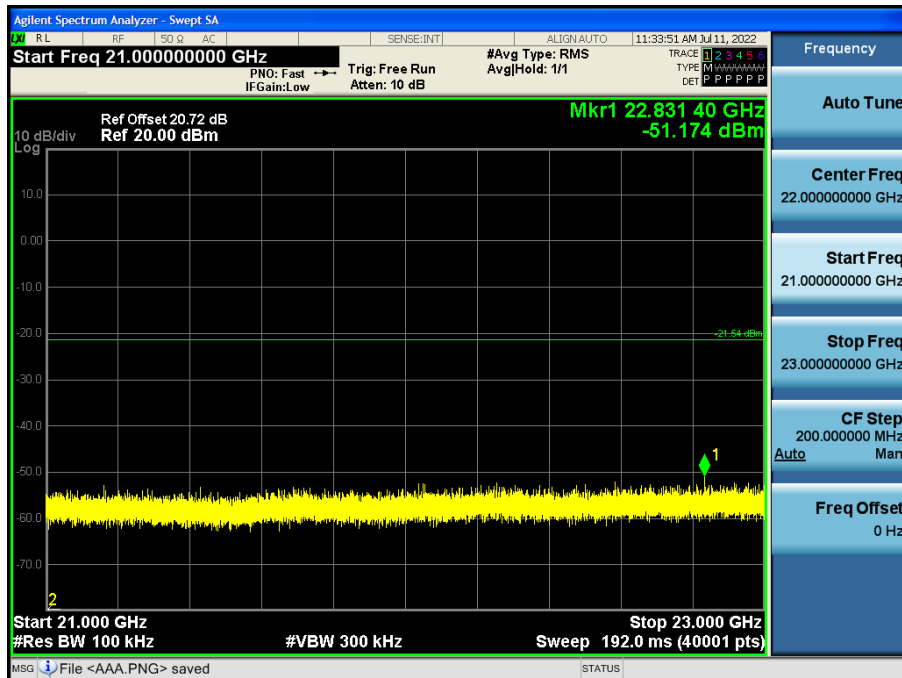

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b Ch.6 5.5 Mbps)

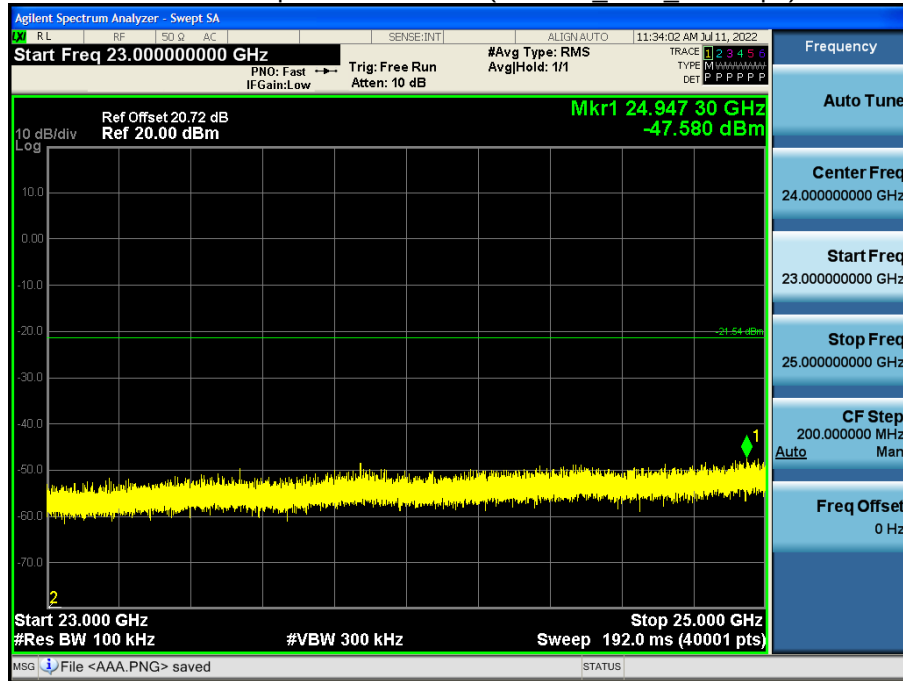

9.6 RADIATED SPURIOUS EMISSIONS**Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log$ (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dBμV/m]	A.F+C.L-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	45.94	3.57	V	49.51	73.98	24.47	PK
4824	37.12	3.57	V	40.69	53.98	13.29	AV
7236	40.37	12.30	V	52.67	73.98	21.31	PK
7236	28.45	12.30	V	40.75	53.98	13.23	AV
4824	45.74	3.57	H	49.31	73.98	24.67	PK
4824	36.99	3.57	H	40.56	53.98	13.42	AV
7236	40.30	12.30	H	52.60	73.98	21.39	PK
7236	28.22	12.30	H	40.52	53.98	13.47	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Value [dBμV/m]	A.F+C.L-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	49.71	3.76	V	53.47	73.98	20.52	PK
4874	45.22	3.76	V	48.98	53.98	5.01	AV
7311	41.74	11.51	V	53.25	73.98	20.73	PK
7311	29.78	11.51	V	41.29	53.98	12.69	AV
4874	49.51	3.76	H	53.27	73.98	20.72	PK
4874	45.12	3.76	H	48.88	53.98	5.11	AV
7311	41.55	11.51	H	53.06	73.98	20.92	PK
7311	29.58	11.51	H	41.09	53.98	12.89	AV

Operation Mode: 802.11b
Transfer Rate: 1 Mbps
Operating Frequency: 2462 MHz
Channel No. 11 Ch

Frequency [MHz]	Measured Value [dBμV/m]	A.F+C.L-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	46.32	4.78	V	51.10	73.98	22.88	PK
4924	39.89	4.78	V	44.67	53.98	9.31	AV
7386	39.89	12.03	V	51.92	73.98	22.06	PK
7386	28.22	12.03	V	40.25	53.98	13.73	AV
4924	46.12	4.78	H	50.90	73.98	23.08	PK
4924	39.78	4.78	H	44.56	53.98	9.42	AV
7386	40.12	12.03	H	52.15	73.98	21.83	PK
7386	28.41	12.03	H	40.44	53.98	13.54	AV

Note: Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.28	0.000	3.57	V	46.85	73.98	27.13	PK
4824	31.52	0.143	3.57	V	35.24	53.98	18.74	AV
7236	40.53	0.000	12.30	V	52.83	73.98	21.16	PK
7236	28.23	0.143	12.30	V	40.67	53.98	13.31	AV
4824	43.02	0.000	3.57	H	46.59	73.98	27.39	PK
4824	31.33	0.143	3.57	H	35.05	53.98	18.93	AV
7236	40.36	0.000	12.30	H	52.66	73.98	21.33	PK
7236	28.02	0.143	12.30	H	40.46	53.98	13.52	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	45.47	0.000	3.76	V	49.23	73.98	24.76	PK
4874	32.87	0.143	3.76	V	36.77	53.98	17.21	AV
7311	41.59	0.000	11.51	V	53.10	73.98	20.88	PK
7311	28.96	0.143	11.51	V	40.61	53.98	13.37	AV
4874	45.22	0.000	3.76	H	48.98	73.98	25.01	PK
4874	32.64	0.143	3.76	H	36.54	53.98	17.44	AV
7311	41.36	0.000	11.51	H	52.87	73.98	21.11	PK
7311	28.78	0.143	11.51	H	40.43	53.98	13.55	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.55	0.000	4.78	V	48.33	73.98	25.65	PK
4924	31.48	0.143	4.78	V	36.41	53.98	17.57	AV
7386	40.12	0.000	12.03	V	52.15	73.98	21.83	PK
7386	28.32	0.143	12.03	V	40.49	53.98	13.49	AV
4924	43.32	0.000	4.78	H	48.10	73.98	25.88	PK
4924	31.22	0.143	4.78	H	36.15	53.98	17.83	AV
7386	39.98	0.000	12.03	H	52.01	73.98	21.97	PK
7386	28.12	0.143	12.03	H	40.29	53.98	13.69	AV

Note: Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2412 MHz
Channel No. 01 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.19	0.000	3.57	V	46.76	73.98	27.22	PK
4824	31.46	0.144	3.57	V	35.18	53.98	18.80	AV
7236	40.47	0.000	12.30	V	52.77	73.98	21.21	PK
7236	28.16	0.144	12.30	V	40.60	53.98	13.38	AV
4824	43.02	0.000	3.57	H	46.59	73.98	27.39	PK
4824	31.33	0.144	3.57	H	35.05	53.98	18.93	AV
7236	40.36	0.000	12.30	H	52.66	73.98	21.33	PK
7236	28.02	0.144	12.30	H	40.46	53.98	13.52	AV

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2437 MHz
Channel No. 06 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	45.25	0.000	3.76	V	49.01	73.98	24.98	PK
4874	32.76	0.144	3.76	V	36.66	53.98	17.32	AV
7311	41.16	0.000	11.51	V	52.67	73.98	21.31	PK
7311	28.92	0.144	11.51	V	40.57	53.98	13.41	AV
4874	45.02	0.000	3.76	H	48.78	73.98	25.21	PK
4874	32.51	0.144	3.76	H	36.41	53.98	17.57	AV
7311	41.00	0.000	11.51	H	52.51	73.98	21.47	PK
7311	28.78	0.144	11.51	H	40.43	53.98	13.55	AV


Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dBμV/m]	Duty Cycle Factor	A.F+C.L- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.48	0.000	4.78	V	48.26	73.98	25.72	PK
4924	31.33	0.144	4.78	V	36.26	53.98	17.72	AV
7386	39.95	0.000	12.03	V	51.98	73.98	22.00	PK
7386	28.32	0.144	12.03	V	40.49	53.98	13.49	AV
4924	43.29	0.000	4.78	H	48.07	73.98	25.91	PK
4924	31.22	0.144	4.78	H	36.15	53.98	17.83	AV
7386	40.02	0.000	12.03	H	52.05	73.98	21.93	PK
7386	28.44	0.144	12.03	H	40.61	53.98	13.37	AV


Note: Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Test Plots (Worst case : Z-V)

Radiated Spurious Emissions plot – Average Result (802.11b_1 Mbps, Ch.6 2nd Harmonic)

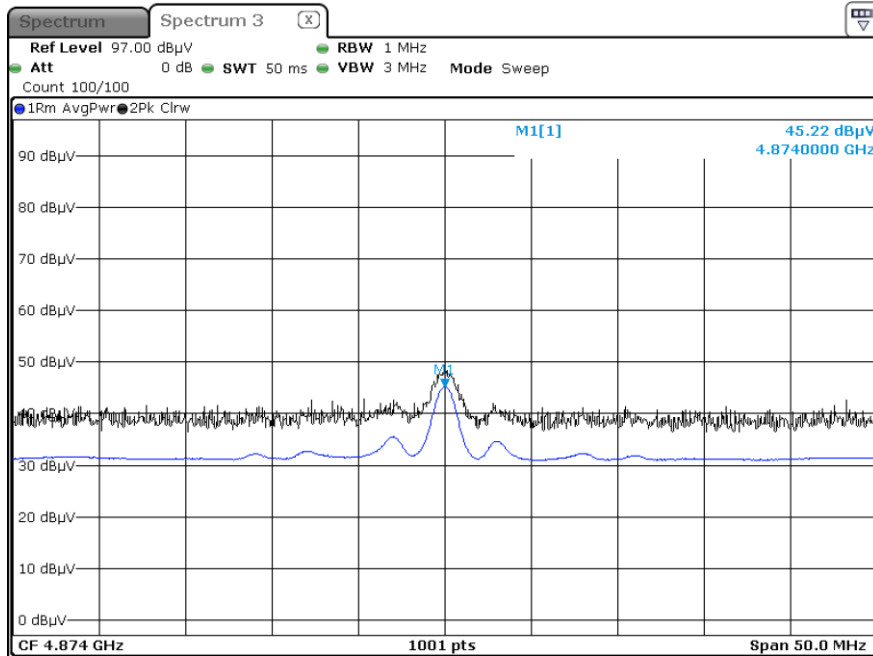

Radiated Spurious Emissions plot – Peak Result (802.11b_1 Mbps, Ch.6 2nd Harmonic)

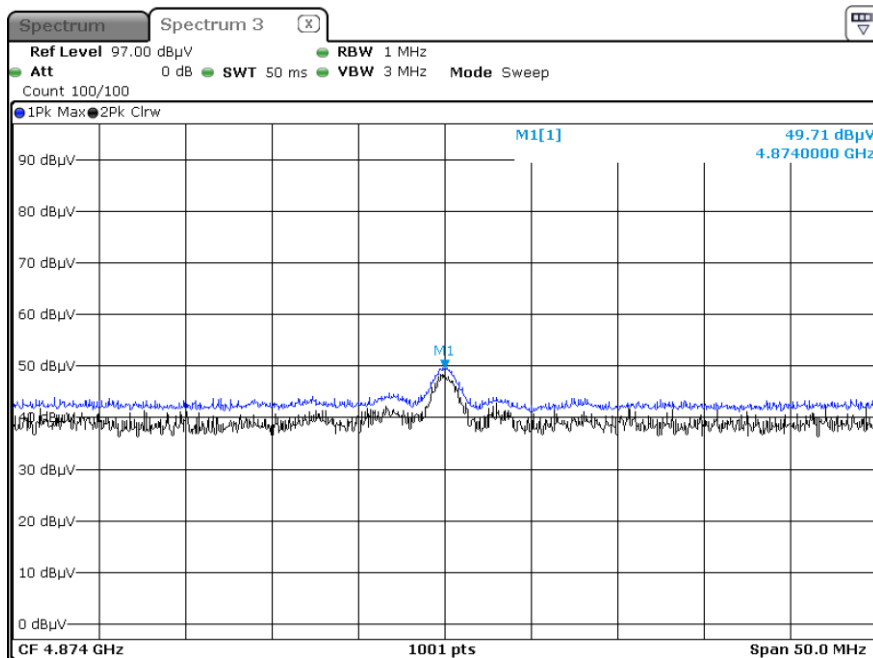

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	20.122	34.50	H	54.62	73.98	19.36	PK
2390.0	8.220	34.50	H	42.72	53.98	11.26	AV
2390.0	20.001	34.50	V	54.50	73.98	19.48	PK
2390.0	8.025	34.50	V	42.53	53.98	11.45	AV
2483.5	21.079	34.87	H	55.95	73.98	18.03	PK
2483.5	9.775	34.87	H	44.65	53.98	9.33	AV
2483.5	20.899	34.87	V	55.77	73.98	18.21	PK
2483.5	9.514	34.87	V	44.39	53.98	9.59	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.025	34.87	H	54.90	73.98	19.08	PK
2483.5	8.555	34.87	H	43.43	53.98	10.55	AV
2483.5	19.899	34.87	V	54.77	73.98	19.21	PK
2483.5	8.251	34.87	V	43.13	53.98	10.85	AV
2483.5	20.176	34.87	H	55.05	73.98	18.93	PK
2483.5	9.701	34.87	H	44.58	53.98	9.40	AV
2483.5	20.002	34.87	V	54.88	73.98	19.10	PK
2483.5	9.512	34.87	V	44.39	53.98	9.59	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	33.115	0.000	34.50	H	67.62	73.98	6.36	PK
2390.0	13.149	0.143	34.50	H	47.79	53.98	6.19	AV
2390.0	33.005	0.000	34.50	V	67.51	73.98	6.47	PK
2390.0	13.025	0.143	34.50	V	47.67	53.98	6.31	AV
# 2484	27.980	0.000	34.87	H	62.85	73.98	11.13	PK
# 2484	15.800	0.143	34.87	H	50.82	53.98	3.16	AV
2484.5	33.894	0.000	34.87	H	68.77	73.98	5.21	PK
2484.5	15.377	0.143	34.87	H	50.39	53.98	3.59	AV
# 2484	27.598	0.000	34.87	V	62.47	73.98	11.51	PK
# 2484	15.621	0.143	34.87	V	50.64	53.98	3.34	AV
2484.5	33.658	0.143	34.87	V	68.68	73.98	5.30	PK
2484.5	15.222	0.143	34.87	V	50.24	53.98	3.74	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.756	0.000	34.87	H	56.63	73.98	17.35	PK
2483.5	9.012	0.143	34.87	H	44.03	53.98	9.95	AV
2483.5	21.555	0.000	34.87	V	56.43	73.98	17.55	PK
2483.5	8.898	0.143	34.87	V	43.92	53.98	10.06	AV
2483.5	26.917	0.000	34.87	H	61.79	73.98	12.19	PK
2483.5	11.914	0.143	34.87	H	46.93	53.98	7.05	AV
2483.5	26.698	0.000	34.87	V	61.57	73.98	12.41	PK
2483.5	11.785	0.143	34.87	V	46.80	53.98	7.18	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
# 2389.5	28.090	0.000	34.50	H	62.59	73.98	11.39	PK
# 2389.5	14.140	0.144	34.50	H	48.79	53.98	5.19	AV
2389	15.139	0.144	34.50	H	49.78	53.98	4.20	AV
2389	36.739	0.000	34.50	H	71.24	73.98	2.74	PK
# 2389.5	27.896	0.000	34.50	V	62.40	73.98	11.58	PK
# 2389.5	13.895	0.144	34.50	V	48.54	53.98	5.44	AV
2389	15.001	0.144	34.50	V	49.65	53.98	4.33	AV
2389	36.589	0.000	34.50	V	71.09	73.98	2.89	PK
# 2484	27.500	0.000	34.87	H	62.37	73.98	11.61	PK
# 2484	15.050	0.144	34.87	H	50.07	53.98	3.91	AV
2484.5	34.107	0.000	34.87	H	68.98	73.98	5.00	PK
2484.5	14.426	0.144	34.87	H	49.44	53.98	4.54	AV
# 2484	27.351	0.000	34.87	V	62.23	73.98	11.75	PK
# 2484	14.985	0.144	34.87	V	50.00	53.98	3.98	AV
2484.5	33.890	0.000	34.87	V	68.76	73.98	5.22	PK
2484.5	14.311	0.144	34.87	V	49.33	53.98	4.65	AV


Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+ C.L+ D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	23.740	0.000	34.87	H	58.61	73.98	15.37	PK
2483.5	9.001	0.144	34.87	H	44.02	53.98	9.96	AV
2483.5	23.512	0.000	34.87	V	58.39	73.98	15.59	PK
2483.5	8.878	0.144	34.87	V	43.90	53.98	10.08	AV
2483.5	28.969	0.000	34.87	H	63.84	73.98	10.14	PK
2483.5	13.965	0.144	34.87	H	48.98	53.98	5.00	AV
2483.5	28.658	0.000	34.87	V	63.53	73.98	10.45	PK
2483.5	13.755	0.144	34.87	V	48.77	53.98	5.21	AV

Test Plots


Radiated Restricted Band Edges plot – Peak Result (802.11n(HT20)_MCS0 Ch.1, X-H)
integration method Used_ 2 389.5 MHz

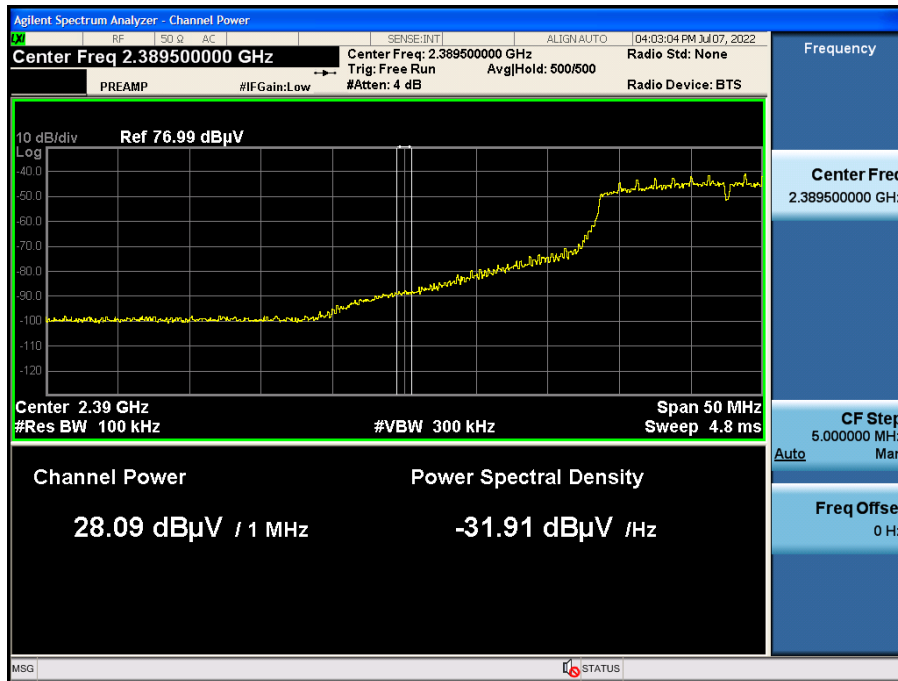


Radiated Restricted Band Edges plot – Average Result (802.11n(HT20)_MCS0 Ch.1, X-H)
integration method Used_ 2 389.5 MHz

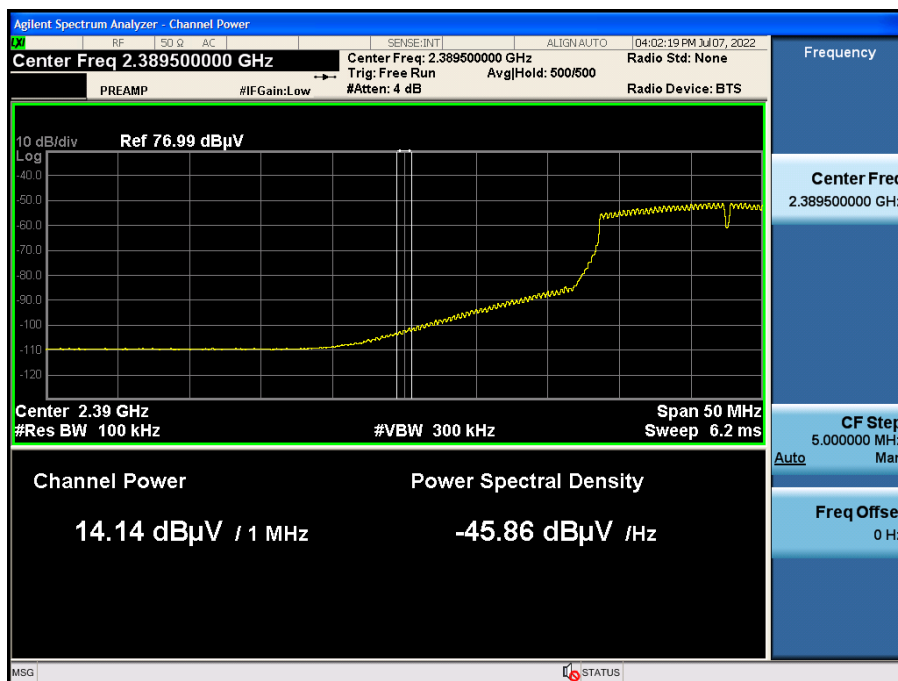

Radiated Restricted Band Edges plot – Average Result (802.11n(HT20)_MCS0 Ch.1, X-H)

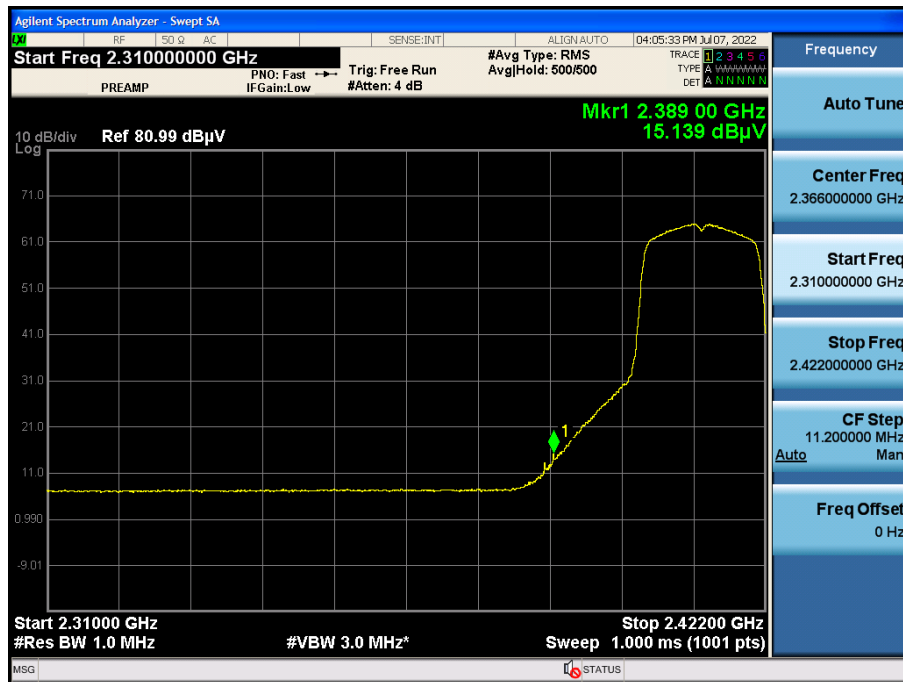

Radiated Restricted Band Edges plot – Peak Result (802.11n(HT20)_MCS0 Ch.1, X-H)

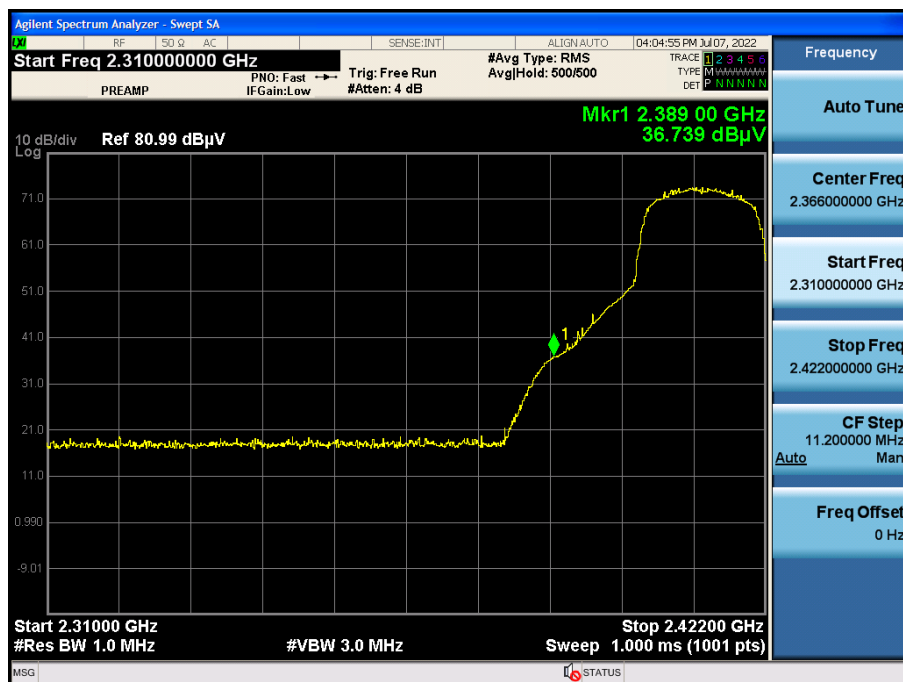

Radiated Restricted Band Edges plot – Average Result (802.11n(HT20)_MCS0 Ch.13, X-H)



Radiated Restricted Band Edges plot – Peak Result (802.11n(HT20)_MCS0 Ch.13, X-H)



Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

WLAN 2.4G MODE_L1


1 / 2

Test Report

Common Information

EUT : SC-56C
Manufacturer : SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions : WLAN 2.4G MODE_L1

Full Spectrum

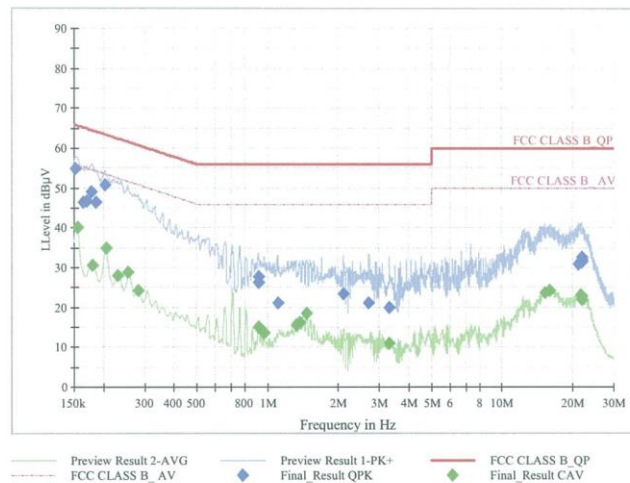

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	54.90	65.88	10.98	9.000	L1	OFF	9.6
0.1635	46.38	65.28	18.90	9.000	L1	OFF	9.6
0.1703	46.64	64.95	18.31	9.000	L1	OFF	9.6
0.1770	49.14	64.63	15.49	9.000	L1	OFF	9.6
0.1860	46.35	64.21	17.86	9.000	L1	OFF	9.6
0.2040	50.77	63.45	12.67	9.000	L1	OFF	9.6
0.9140	26.38	56.00	29.62	9.000	L1	OFF	9.7
0.9185	27.66	56.00	28.34	9.000	L1	OFF	9.7
1.1053	21.18	56.00	34.82	9.000	L1	OFF	9.7
2.1178	23.38	56.00	32.62	9.000	L1	OFF	9.7
2.7163	20.92	56.00	35.08	9.000	L1	OFF	9.8
3.3170	19.95	56.00	36.05	9.000	L1	OFF	9.8
21.1888	30.98	60.00	29.02	9.000	L1	OFF	10.4
21.7153	31.45	60.00	28.55	9.000	L1	OFF	10.4
21.7783	31.74	60.00	28.26	9.000	L1	OFF	10.4
21.7828	32.47	60.00	27.53	9.000	L1	OFF	10.4
21.8413	32.04	60.00	27.96	9.000	L1	OFF	10.4
21.8975	31.54	60.00	28.46	9.000	L1	OFF	10.4

Final_Result_CAV

2022-07-01

오후 10:12:07

WLAN 2.4G MODE_L1

2 / 2

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	39.96	55.75	15.80	9.000	L1	OFF	9.6
0.1793	30.44	54.52	24.08	9.000	L1	OFF	9.6
0.2063	34.92	53.36	18.43	9.000	L1	OFF	9.6
0.2310	27.94	52.41	24.48	9.000	L1	OFF	9.6
0.2558	28.80	51.57	22.76	9.000	L1	OFF	9.6
0.2828	24.17	50.74	26.57	9.000	L1	OFF	9.6
0.9185	15.13	46.00	30.87	9.000	L1	OFF	9.7
0.9703	13.48	46.00	32.52	9.000	L1	OFF	9.7
1.3280	15.57	46.00	30.43	9.000	L1	OFF	9.7
1.3753	16.10	46.00	29.90	9.000	L1	OFF	9.7
1.4675	18.34	46.00	27.66	9.000	L1	OFF	9.7
3.3170	10.86	46.00	35.14	9.000	L1	OFF	9.8
15.3253	23.80	50.00	26.20	9.000	L1	OFF	10.2
16.0250	24.27	50.00	25.73	9.000	L1	OFF	10.2
21.7198	23.07	50.00	26.93	9.000	L1	OFF	10.4
21.7783	22.87	50.00	27.13	9.000	L1	OFF	10.4
21.8345	22.05	50.00	27.95	9.000	L1	OFF	10.4
21.8930	22.03	50.00	27.97	9.000	L1	OFF	10.4

2022-07-01

오후 10:12:07

Conducted Emissions (Line 2)

WLAN 2.4G MODE_N


1 / 2

Test Report

Common Information

EUT : SC-56C
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : WLAN 2.4G MODE_N

Full Spectrum

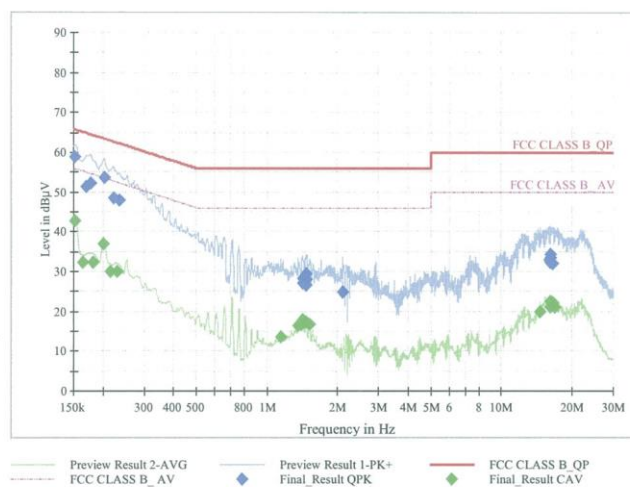

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	58.91	65.88	6.97	9.000	N	OFF	9.6
0.1703	51.28	64.95	13.67	9.000	N	OFF	9.6
0.1770	52.34	64.63	12.28	9.000	N	OFF	9.6
0.2040	53.71	63.45	9.73	9.000	N	OFF	9.6
0.2220	48.41	62.74	14.34	9.000	N	OFF	9.6
0.2355	47.80	62.25	14.46	9.000	N	OFF	9.6
1.4225	27.11	56.00	28.89	9.000	N	OFF	9.7
1.4270	28.32	56.00	27.68	9.000	N	OFF	9.7
1.4675	26.67	56.00	29.33	9.000	N	OFF	9.7
1.4743	27.92	56.00	28.08	9.000	N	OFF	9.7
1.4788	29.32	56.00	26.68	9.000	N	OFF	9.7
2.1178	24.72	56.00	31.28	9.000	N	OFF	9.7
16.0633	32.81	60.00	27.19	9.000	N	OFF	10.3
16.1128	34.28	60.00	25.72	9.000	N	OFF	10.3
16.1195	33.34	60.00	26.66	9.000	N	OFF	10.3
16.1713	33.42	60.00	26.58	9.000	N	OFF	10.3
16.2365	32.25	60.00	27.75	9.000	N	OFF	10.3
16.5560	32.10	60.00	27.90	9.000	N	OFF	10.3

Final_Result_CAV

2022-07-01

오후 10:05:37

WLAN 2.4G MODE_N

2 / 2

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	42.66	55.88	13.22	9.000	N	OFF	9.6
0.1635	32.42	55.28	22.86	9.000	N	OFF	9.6
0.1815	32.37	54.42	22.05	9.000	N	OFF	9.6
0.2018	37.04	53.54	16.50	9.000	N	OFF	9.6
0.2153	29.96	53.00	23.04	9.000	N	OFF	9.6
0.2288	29.97	52.50	22.53	9.000	N	OFF	9.6
1.1458	13.43	46.00	32.57	9.000	N	OFF	9.7
1.3618	16.33	46.00	29.67	9.000	N	OFF	9.7
1.4135	16.83	46.00	29.17	9.000	N	OFF	9.7
1.4248	17.76	46.00	28.24	9.000	N	OFF	9.7
1.4788	17.40	46.00	28.60	9.000	N	OFF	9.7
1.5283	16.62	46.00	29.38	9.000	N	OFF	9.7
14.5985	19.97	50.00	30.03	9.000	N	OFF	10.2
16.0700	21.14	50.00	28.86	9.000	N	OFF	10.3
16.1780	22.49	50.00	27.51	9.000	N	OFF	10.3
16.2320	22.62	50.00	27.38	9.000	N	OFF	10.3
16.5875	22.34	50.00	27.66	9.000	N	OFF	10.3
16.8283	20.92	50.00	29.08	9.000	N	OFF	10.3

2022-07-01

오후 10:05:37

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Keysight	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/18/2023	Annual
DC Power Supply	E3646A	Agilent	MY40002937	12/14/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/22/2023	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	03/24/2024	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170541	11/16/2023	Biennial
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	102168	07/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
High Pass Filter	WHK3.0/18G-10EF	Wainwright Instruments	8	01/21/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	25	01/21/2023	Annual
Attenuator (3 dB)	18B-03	Api tech.	1	01/21/2023	Annual
Attenuator(10 dB)	8493C-10	Agilent	08285	01/21/2023	Annual
Power Amplifier	CBLU1183540	CERNEX	22964	01/21/2023	Annual
Power Amplifier	CBL06185030	CERNEX	22965	01/21/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2207-FC022-P