



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & ANT+

MODEL NUMBER: SM-A3000

FCC ID: A3LSMA3000

REPORT NUMBER: 14I18652-E2

ISSUE DATE: SEPTEMBER 9, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	9/9/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>13</i>
8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>13</i>
8.1.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>13</i>
<i>20 dB AND 99% BANDWIDTH PLOTS</i>	<i>14</i>
8.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>26</i>
8.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>28</i>
8.4. <i>AVERAGE TIME OF OCCUPANCY.....</i>	<i>33</i>
8.5. <i>OUTPUT POWER.....</i>	<i>40</i>
8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>40</i>
8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>40</i>
8.5.3. <i>OUTPUT POWER PLOTS</i>	<i>41</i>
8.6. <i>AVERAGE POWER.....</i>	<i>47</i>
8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>48</i>
8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION</i>	<i>48</i>
8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>48</i>
8.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>49</i>
8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>50</i>
<i>ENHANCED DATA RATE 8PSK MODULATION</i>	<i>58</i>
9. RADIATED TEST RESULTS.....	66

9.1. *LIMITS AND PROCEDURE*.....66
9.2. *TRANSMITTER ABOVE 1 GHz*.....67
 9.2.1. *BASIC DATA RATE GFSK MODULATION*.....67
 9.2.2. *ENHANCED DATA RATE 8PSK MODULATION*80
9.3. *WORST-CASE BELOW 1 GHz*.....93
10. AC POWER LINE CONDUCTED EMISSIONS96
11. SETUP PHOTOS99

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4 GHz b/g/n & ANT+
MODEL: SM-A3000
SERIAL NUMBER: FL-345-A (RADIATED), FL-345-C (CONDUCTED)
DATE TESTED: AUGUST 29 - SEPTEMBER 9, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & ANT+

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.19	10.45
2402 - 2480	Enhanced 8PSK	10.65	11.61

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.85 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	ETA0U83CBC	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the key string menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

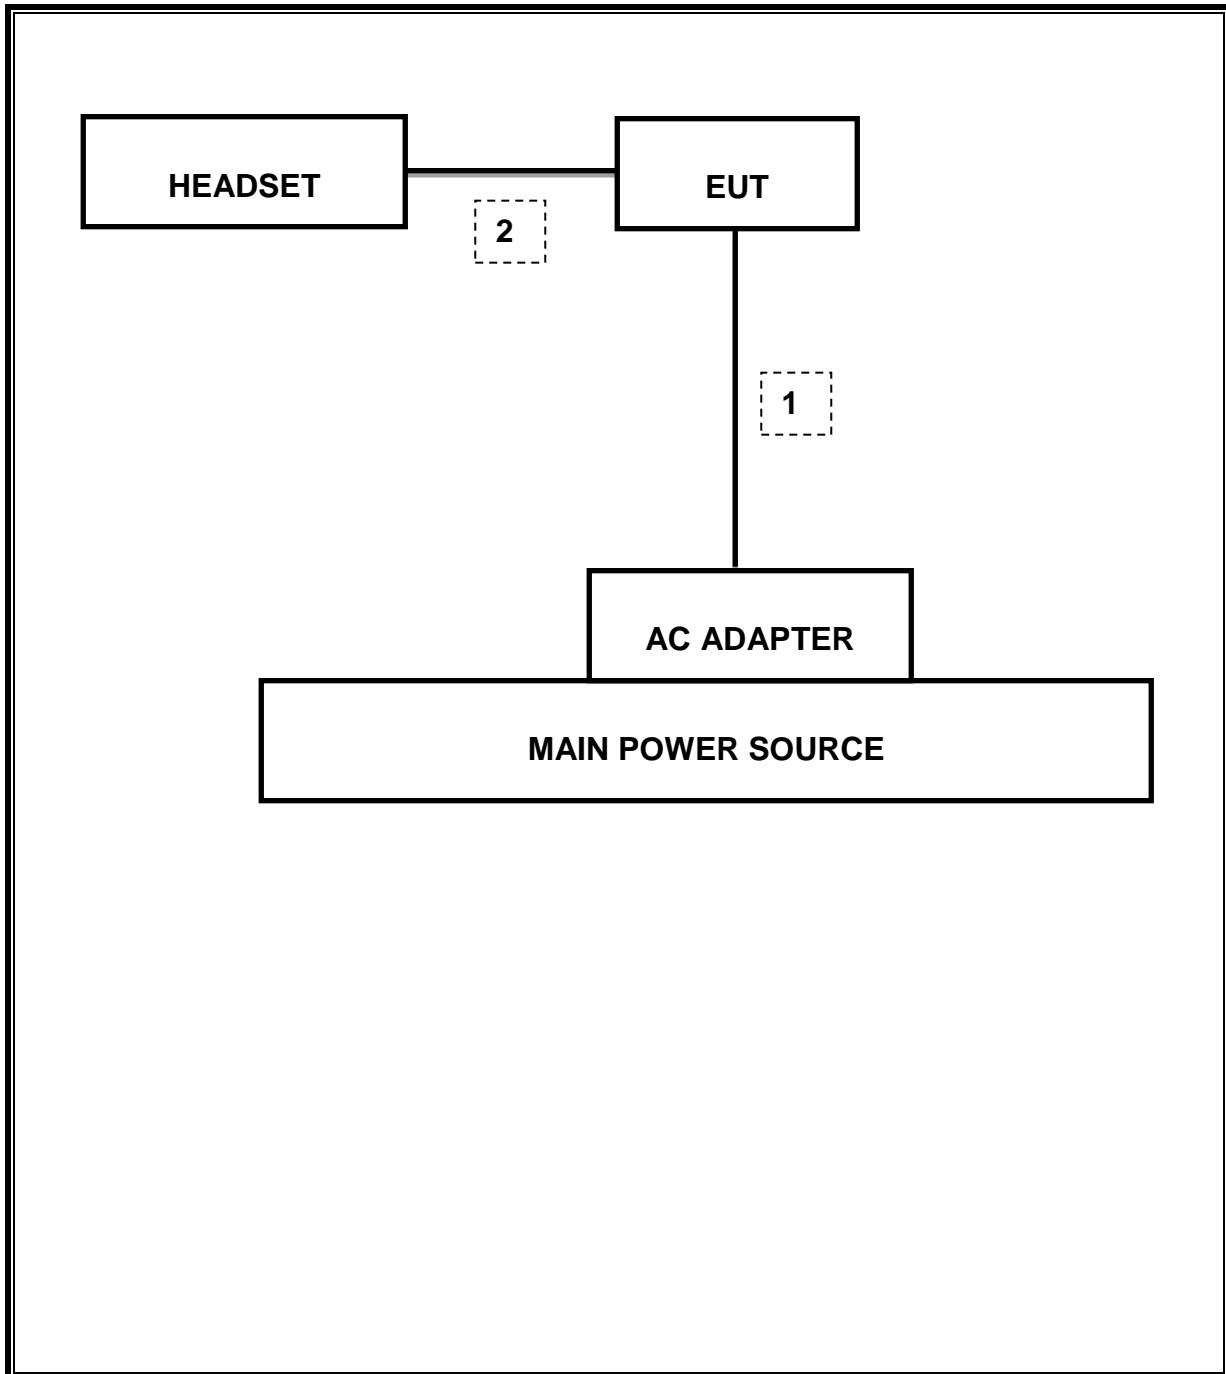

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.193MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-36.06dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.65dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.374sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	42.82dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	53.82dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.926	0.902
Middle	2441	0.927	0.908
High	2480	0.927	0.893
Worst		0.927	0.908


8.1.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.262	1.122
Middle	2441	1.261	1.194
High	2480	1.262	1.165
Worst		1.262	1.194

20 dB AND 99% BANDWIDTH PLOTS

GFSK 20 dB BANDWIDTH

LOW CHANNEL

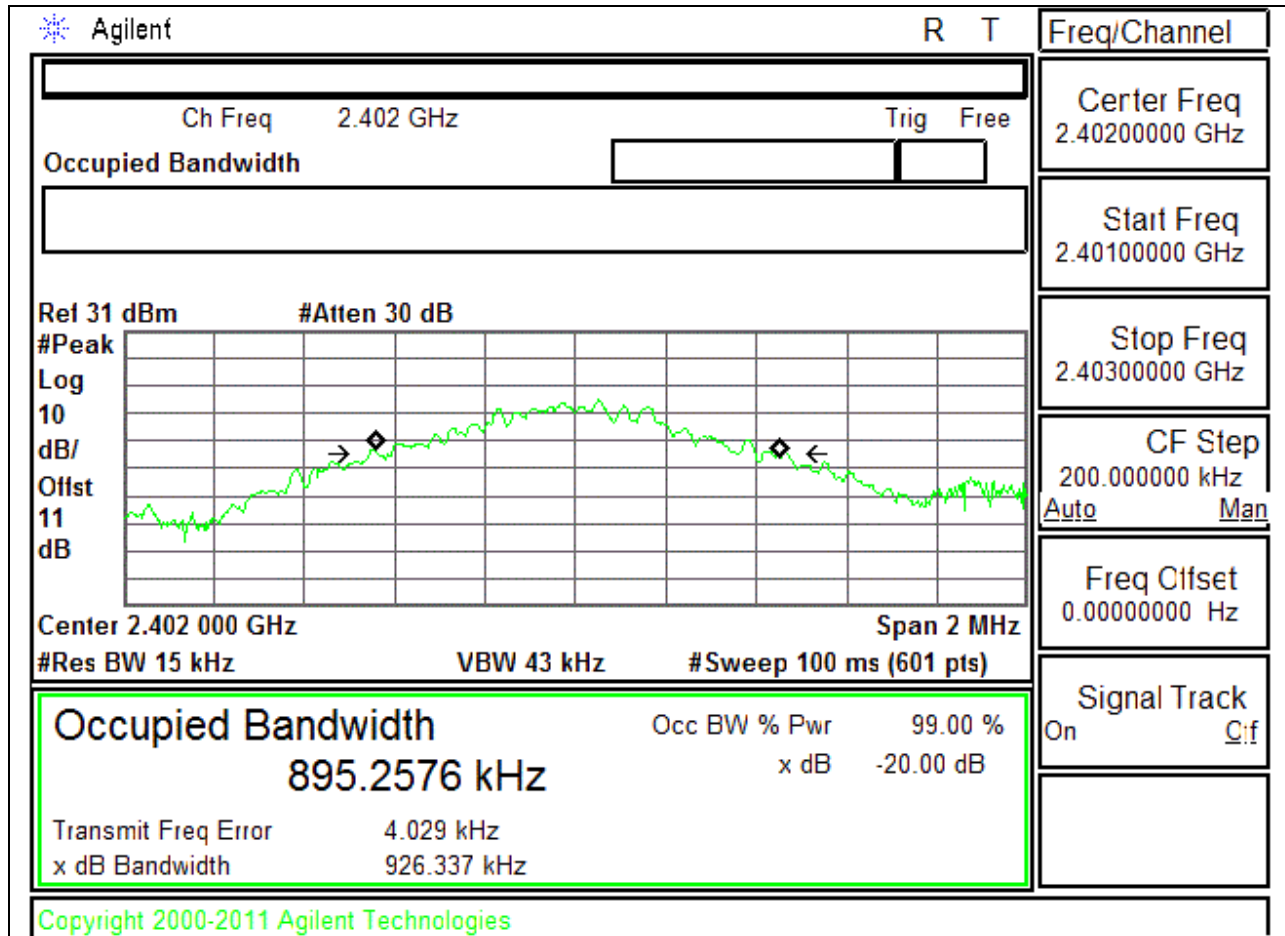

MID CHANNEL


Agilent	R T	Freq/Channel	
Ch Freq 2.441 GHz		Trig Free	
Occupied Bandwidth		Center Freq 2.44100000 GHz	
Ref 31 dBm #Atten 30 dB		Start Freq 2.44000000 GHz	
#Peak Log 10 dB/Offst 11 dB		Stop Freq 2.44200000 GHz	
		CF Step 200.000000 kHz Auto Man	
Center 2.441 000 GHz		Span 2 MHz	
#Res BW 15 kHz		VBW 43 kHz #Sweep 100 ms (601 pts)	
Occupied Bandwidth 881.7352 kHz		Occ BW % Pwr 99.00 % x dB -20.00 dB	
Transmit Freq Error -4.274 kHz		Signal Track On Cf	
x dB Bandwidth 926.784 kHz			
Copyright 2000-2011 Agilent Technologies			

HIGH CHANNEL


Agilent	R T	Freq/Channel	
Ch Freq 2.48 GHz Trig Free		Center Freq 2.4800000 GHz	
Occupied Bandwidth		Start Freq 2.4790000 GHz	
Ref 31 dBm #Atten 30 dB		Stop Freq 2.4810000 GHz	
#Peak Log 10 dB/Offst 11 dB		CF Step 200.000000 kHz Auto Man	
		Freq Offset 0.0000000 Hz	
Center 2.480 000 GHz Span 2 MHz		Signal Track On Cf	
#Res BW 15 kHz VBW 43 kHz #Sweep 100 ms (601 pts)			
Occupied Bandwidth <div style="text-align: center; font-size: 1.2em;">878.7715 kHz</div>		Occ BW % Pwr 99.00 % x dB -20.00 dB	
Transmit Freq Error -5.279 kHz x dB Bandwidth 927.288 kHz			
Copyright 2000-2011 Agilent Technologies			

GFSK 99% BANDWIDTH


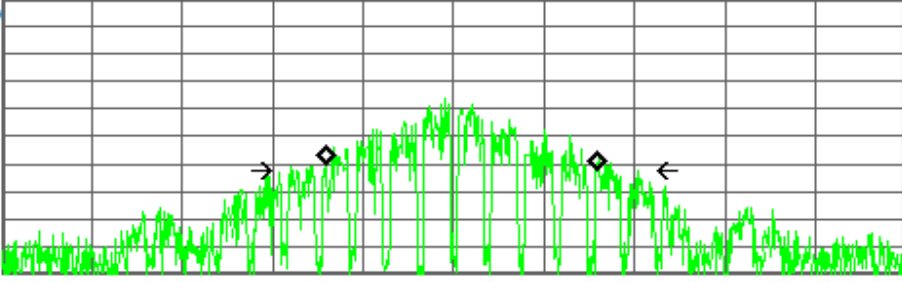
LOW CHANNEL

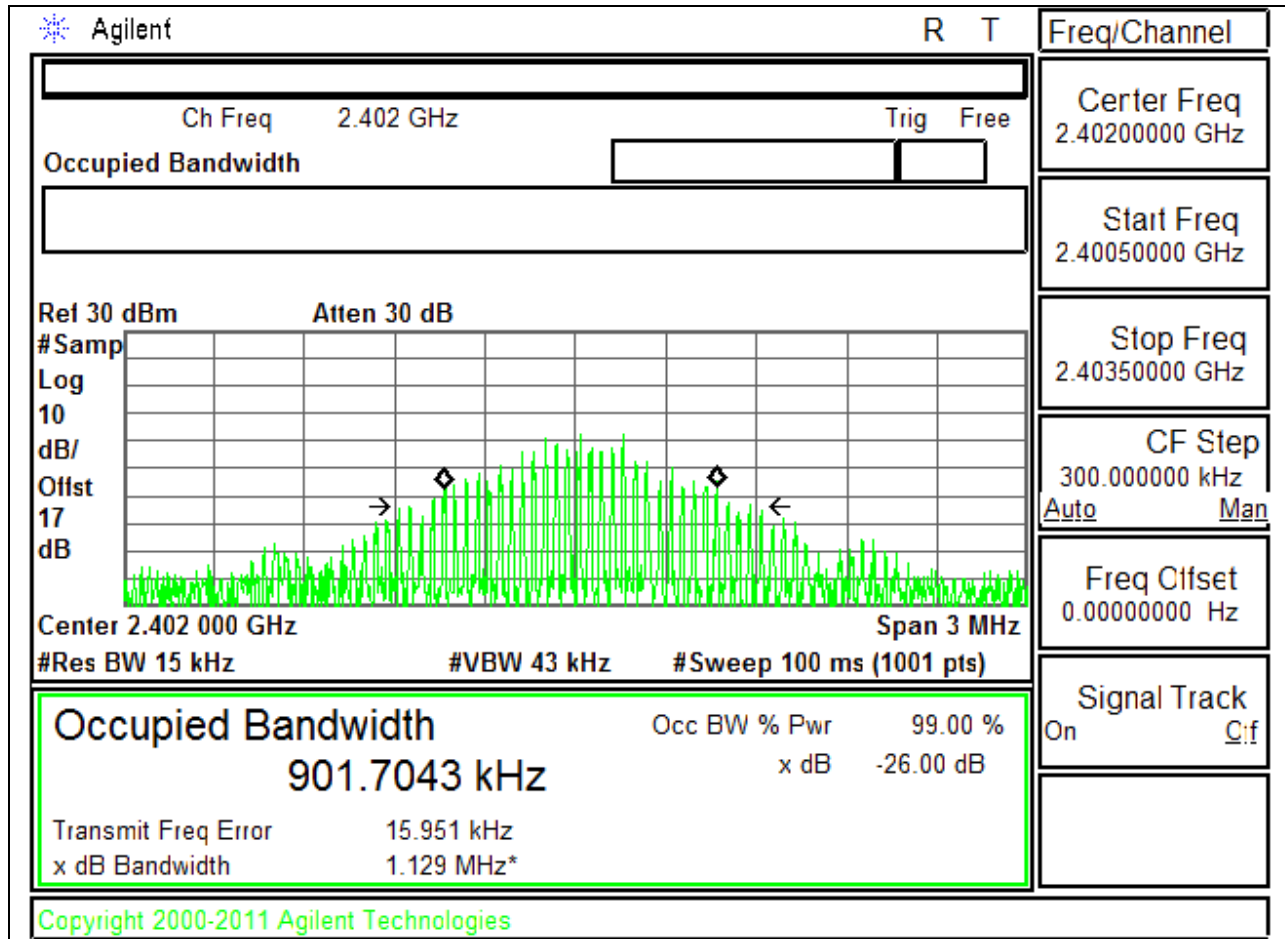

MID CHANNEL

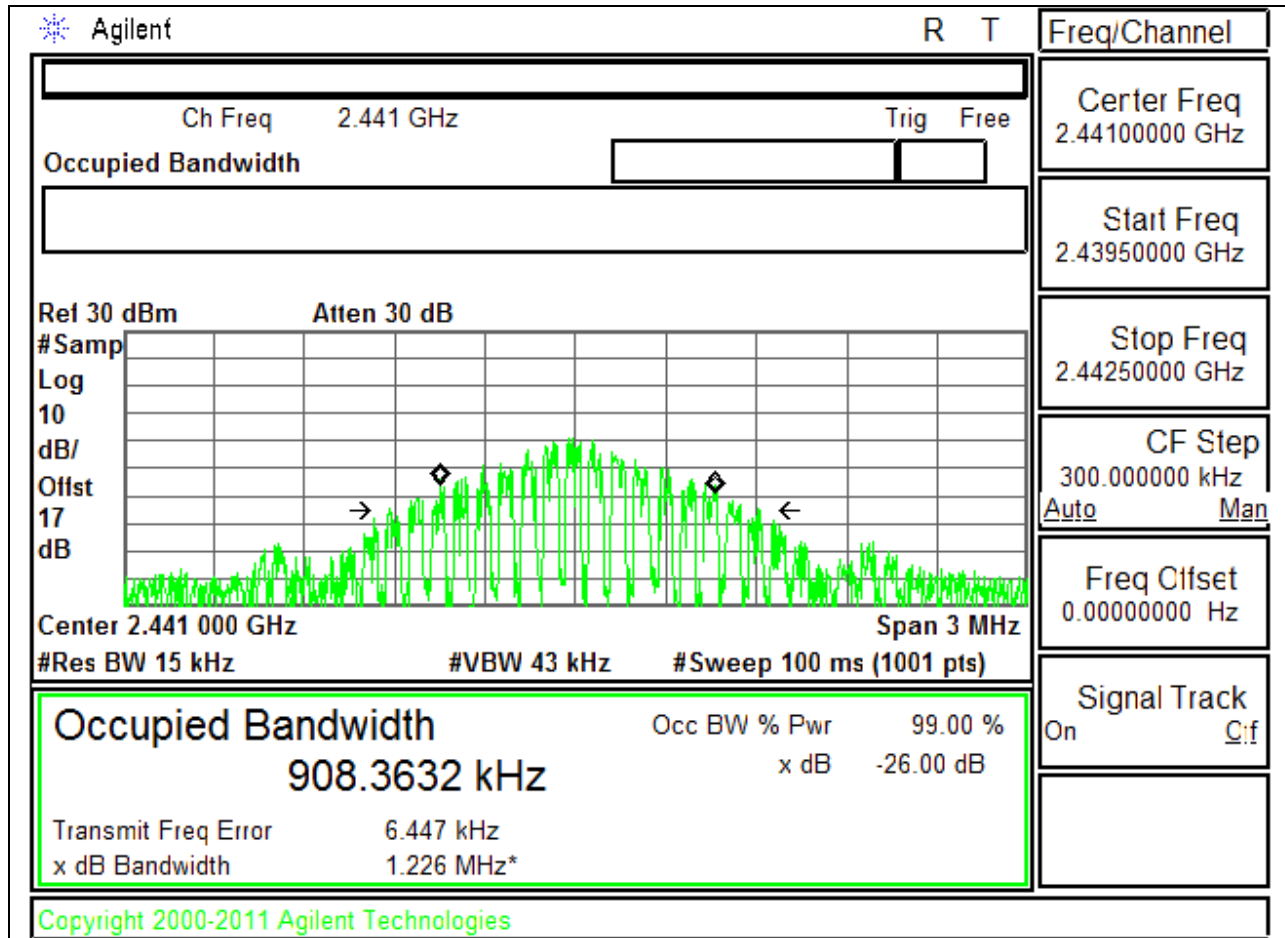


HIGH CHANNEL


 Agilent	R T	Freq/Channel	
Ch Freq 2.48 GHz Trig Free		Center Freq 2.4800000 GHz	
Occupied Bandwidth		Start Freq 2.4785000 GHz	
Ref 30 dBm Atten 30 dB # Samp Log 10 dB/ Offst 17 dB		Stop Freq 2.4815000 GHz	
		CF Step 300.000000 kHz Auto Man	
Center 2.480 000 GHz Span 3 MHz		Freq Offset 0.0000000 Hz	
#Res BW 15 kHz #VBW 43 kHz #Sweep 100 ms (1001 pts)		Signal Track On Cf	
Occupied Bandwidth 892.5241 kHz		Occ BW % Pwr 99.00 % x dB -26.00 dB	
Transmit Freq Error 25.848 kHz			
x dB Bandwidth 1.151 MHz*			
Copyright 2000-2011 Agilent Technologies			

8PSK 20 dB BANDWIDTH

LOW CHANNEL

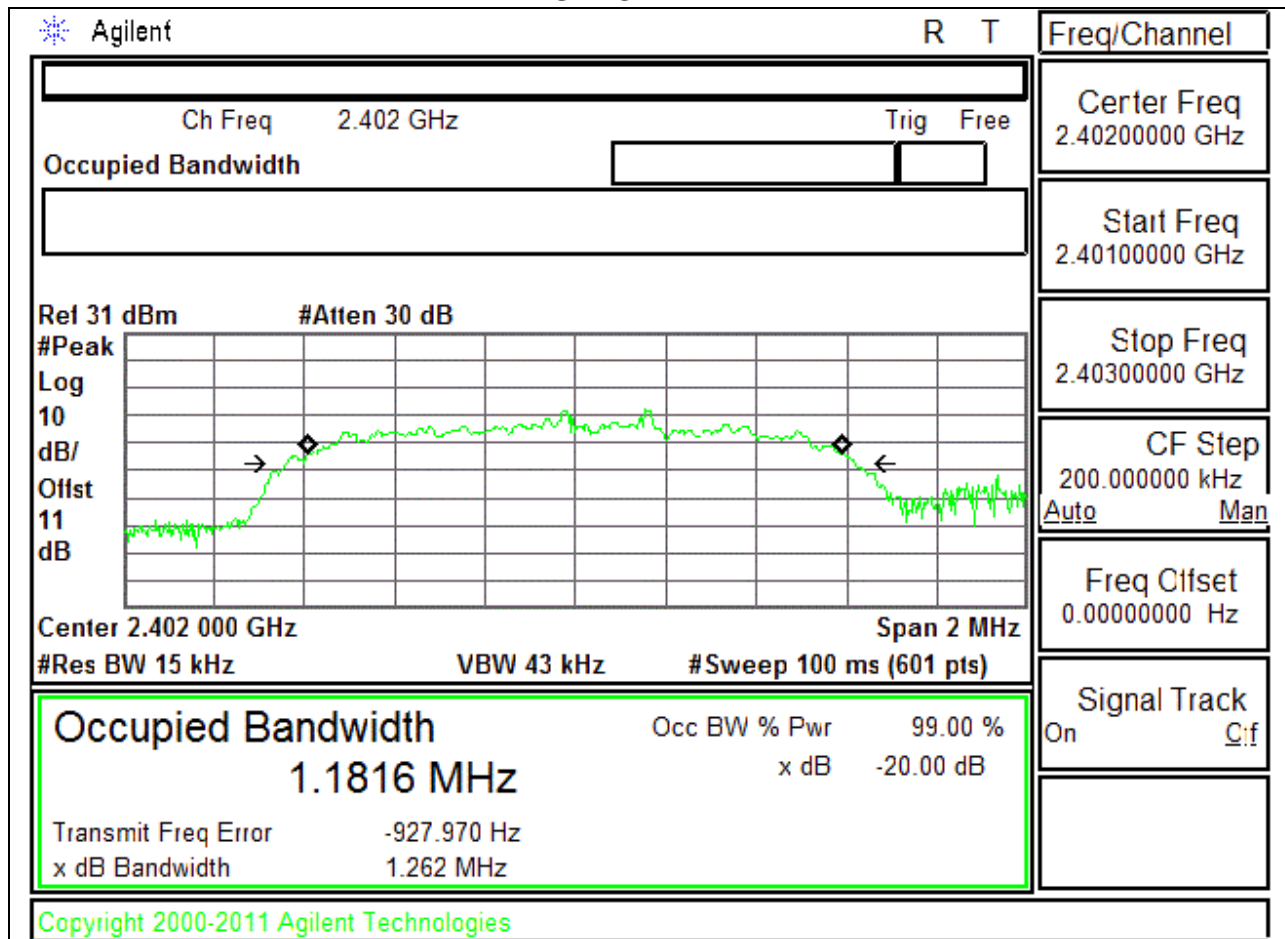

MID CHANNEL

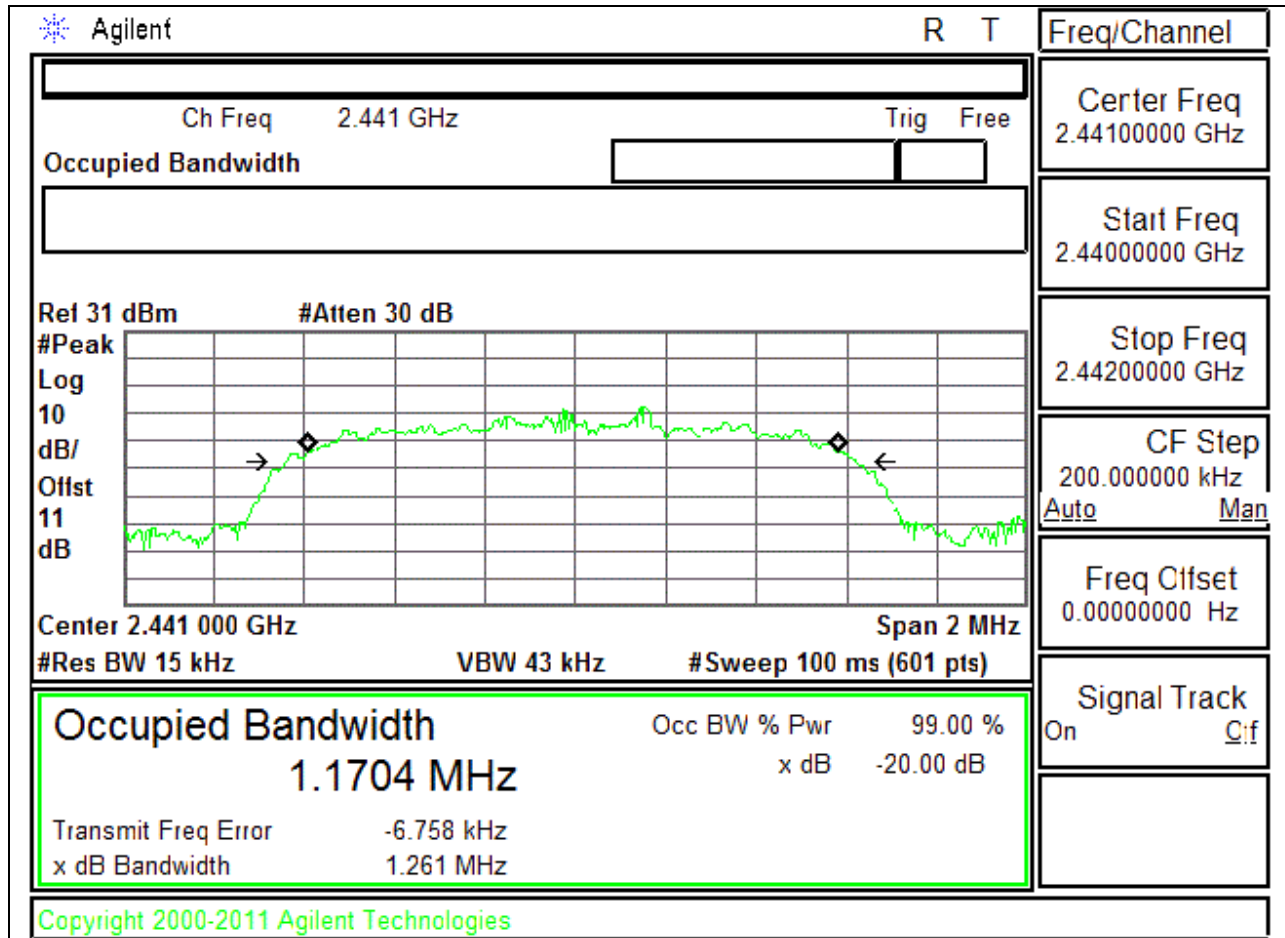


HIGH CHANNEL


Agilent	R T	Freq/Channel	
Ch Freq 2.48 GHz Trig Free		Center Freq 2.4800000 GHz	
Occupied Bandwidth		Start Freq 2.4790000 GHz	
Ref 31 dBm #Atten 30 dB		Stop Freq 2.4810000 GHz	
#Peak Log 10 dB/Offst 11 dB		CF Step 200.000000 kHz Auto Man	
		Freq Offset 0.0000000 Hz	
Center 2.480 000 GHz Span 2 MHz		Signal Track On Cf	
#Res BW 15 kHz VBW 43 kHz #Sweep 100 ms (601 pts)		Occupied Bandwidth 1.1708 MHz	
Occ BW % Pwr 99.00 % x dB -20.00 dB		Transmit Freq Error -6.987 kHz x dB Bandwidth 1.262 MHz	
Copyright 2000-2011 Agilent Technologies			

8PSK 99% BANDWIDTH

LOW CHANNEL

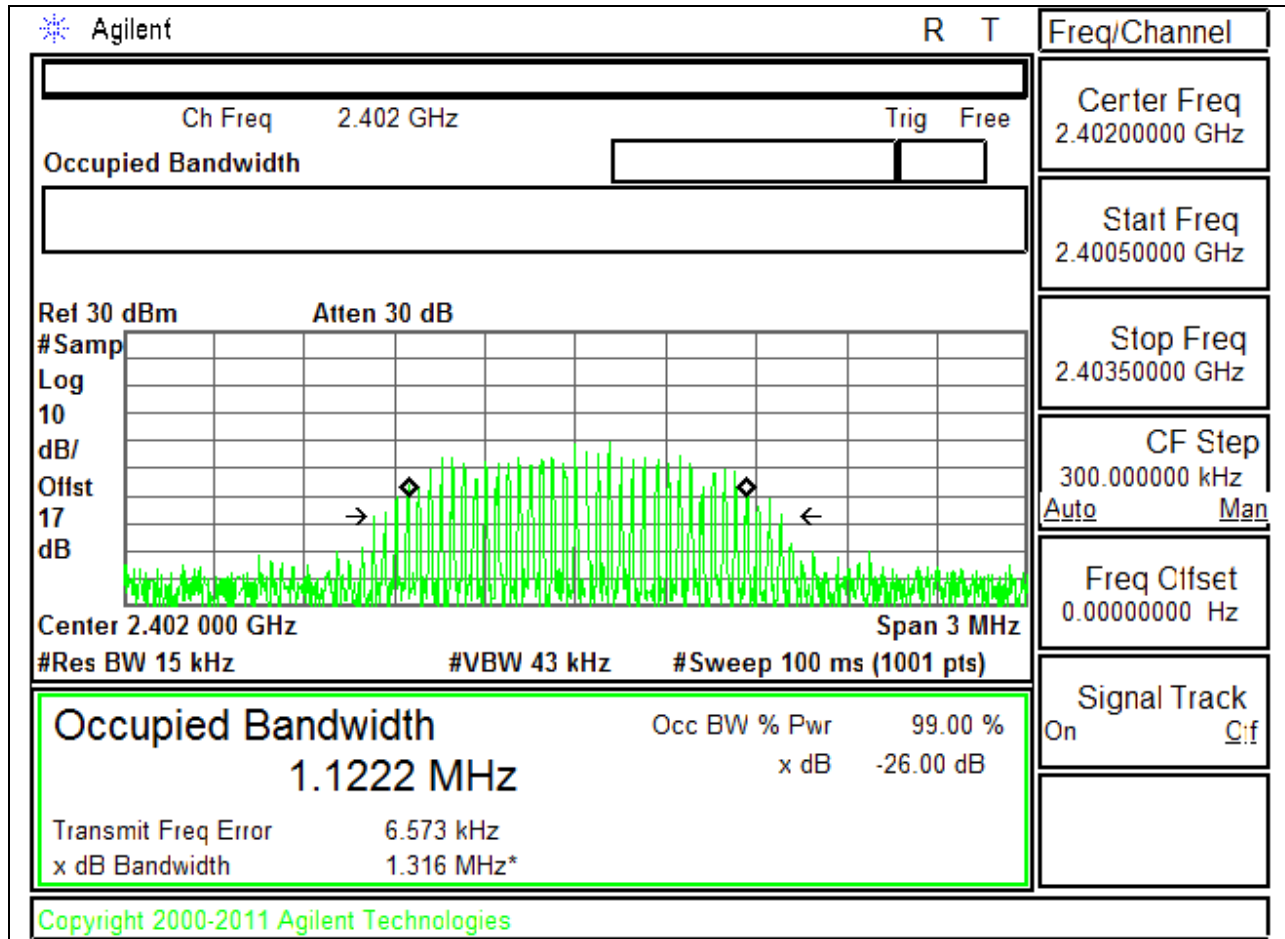

MID CHANNEL

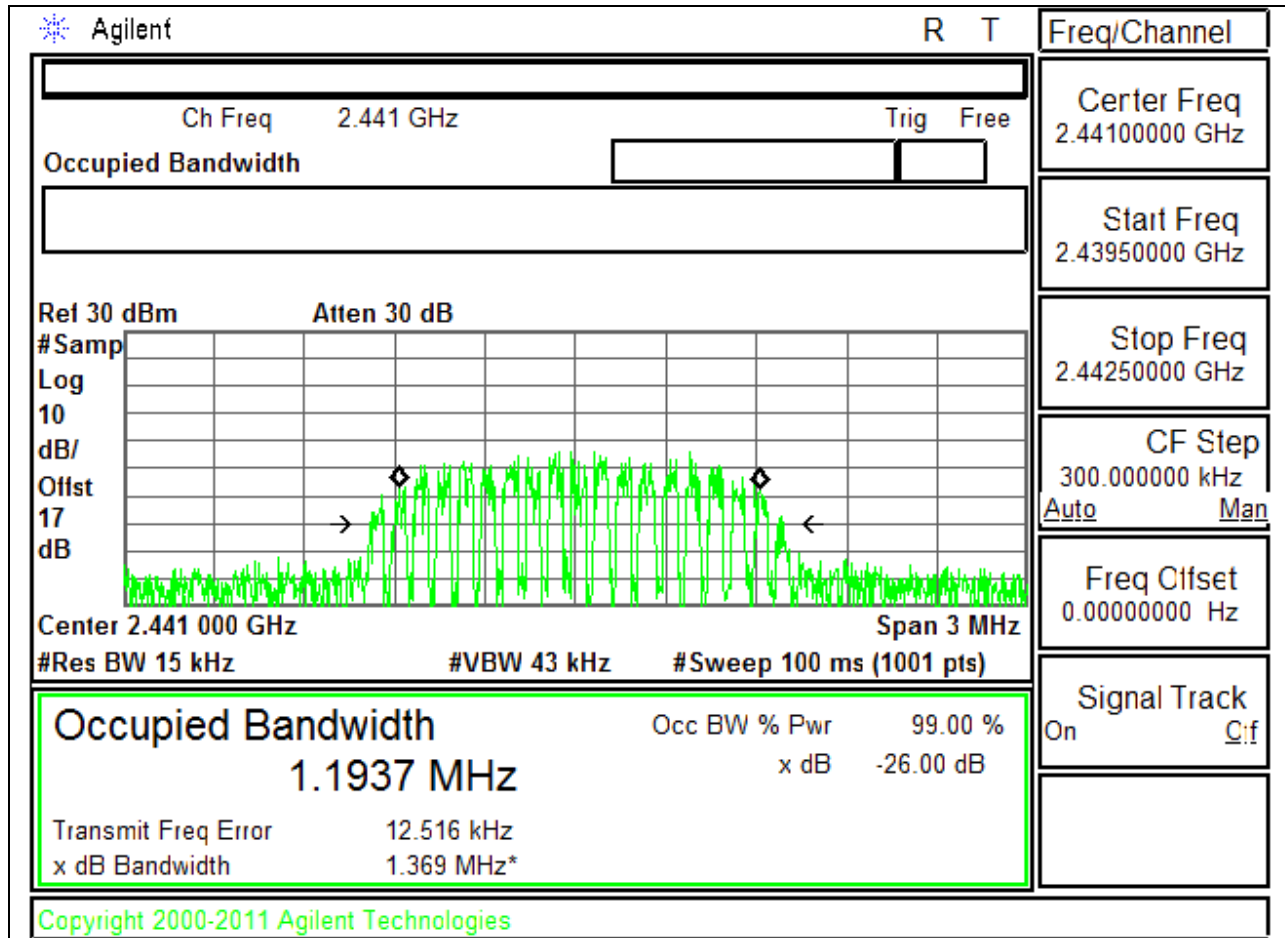

HIGH CHANNEL

Agilent	R T	Freq/Channel
Ch Freq 2.48 GHz Trig Free	Center Freq 2.4800000 GHz	
Occupied Bandwidth []	Start Freq 2.47850000 GHz	
Ref 30 dBm Atten 30 dB	Stop Freq 2.48150000 GHz	
# Samp Log 10 dB/ Offst 17 dB		CF Step 300.000000 kHz Auto Man
Center 2.480 000 GHz Span 3 MHz	Freq Offset 0.00000000 Hz	
#Res BW 15 kHz #VBW 43 kHz #Sweep 100 ms (1001 pts)	Signal Track On Cf	
Occupied Bandwidth <div style="text-align: center; font-size: 1.2em; font-weight: bold;">1.1651 MHz</div>	Occ BW % Pwr 99.00 % x dB -26.00 dB	
Transmit Freq Error 12.618 kHz x dB Bandwidth 1.373 MHz*		
Copyright 2000-2011 Agilent Technologies		

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

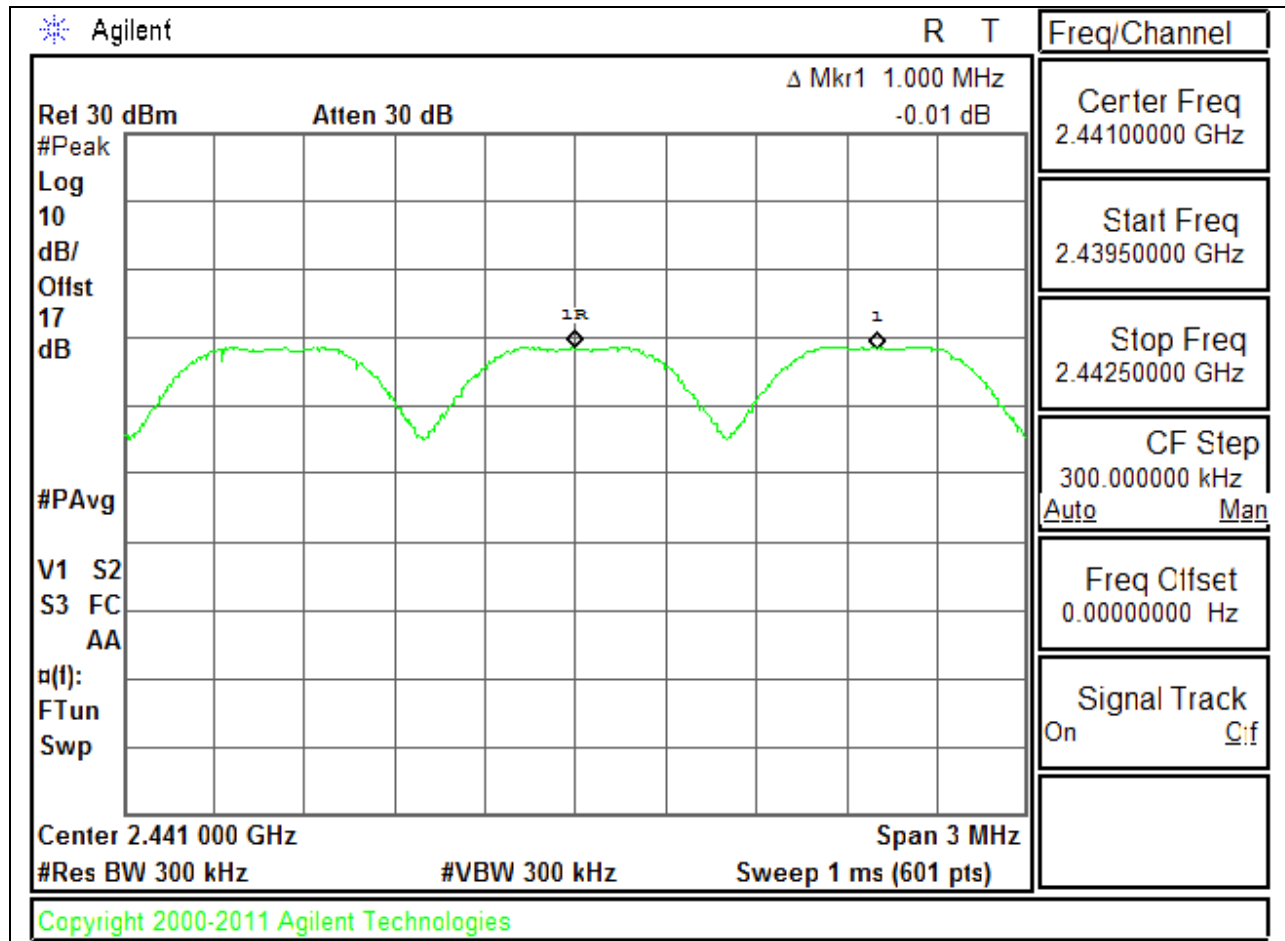

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS


NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

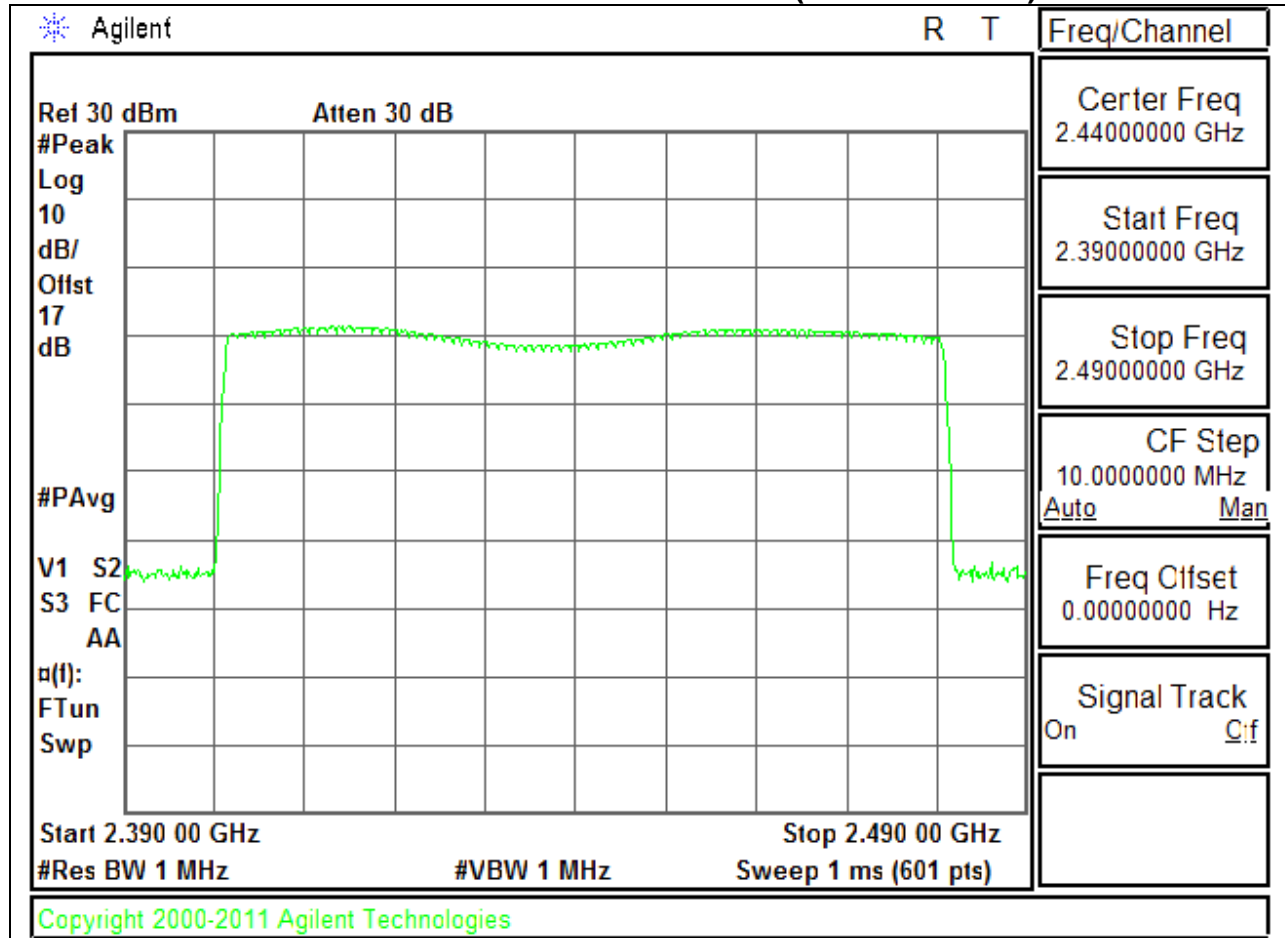


NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

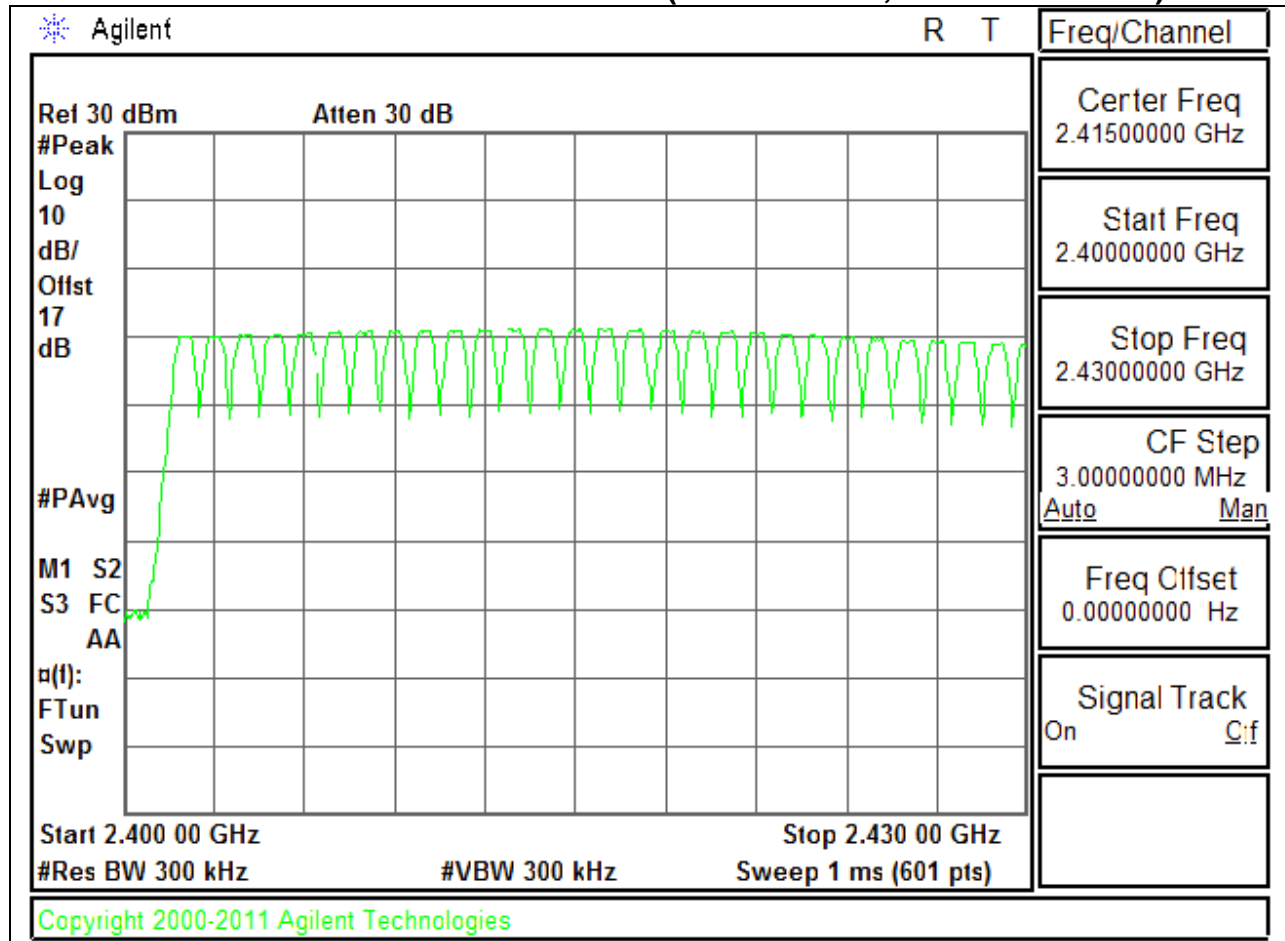

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

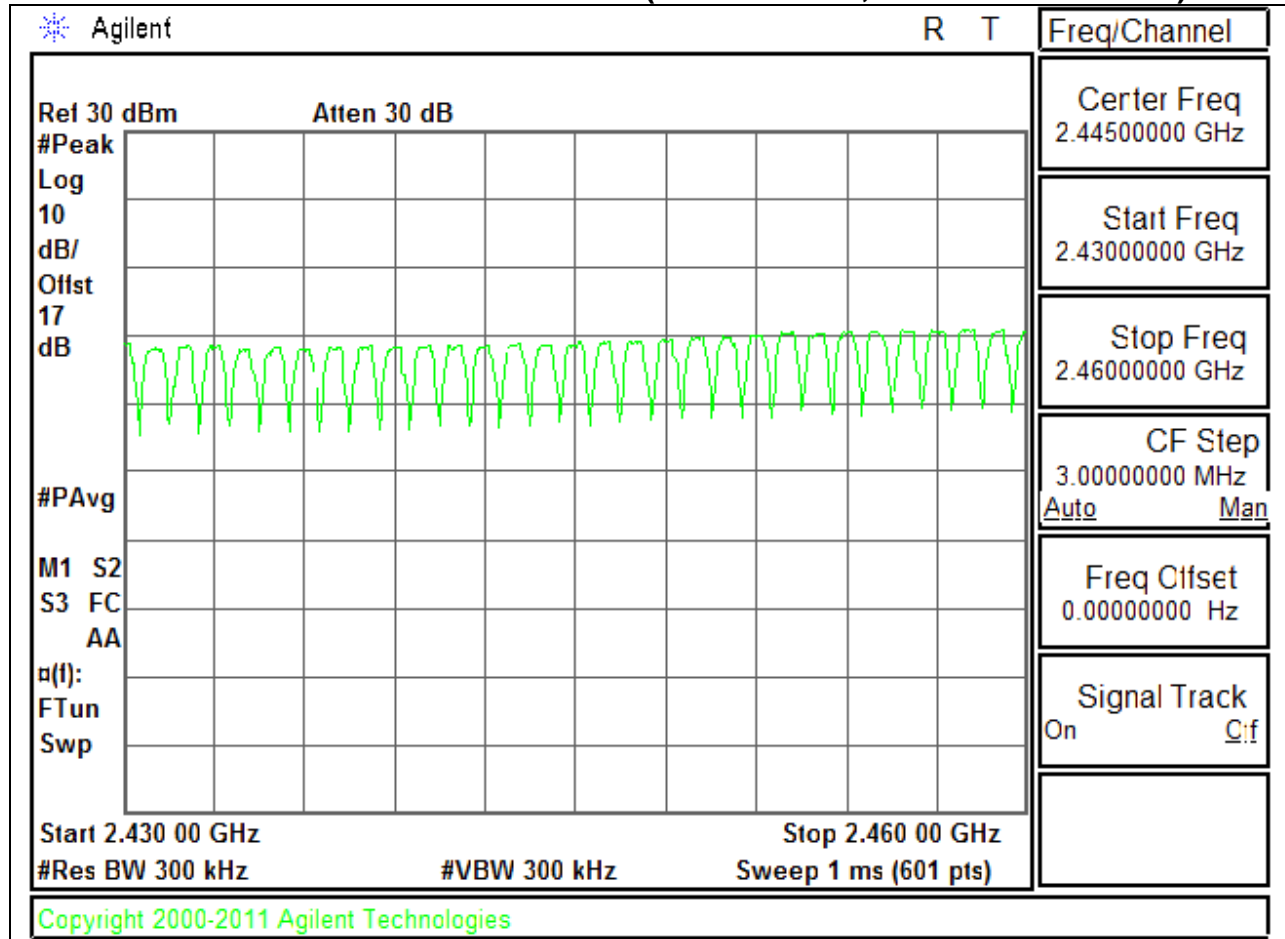

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

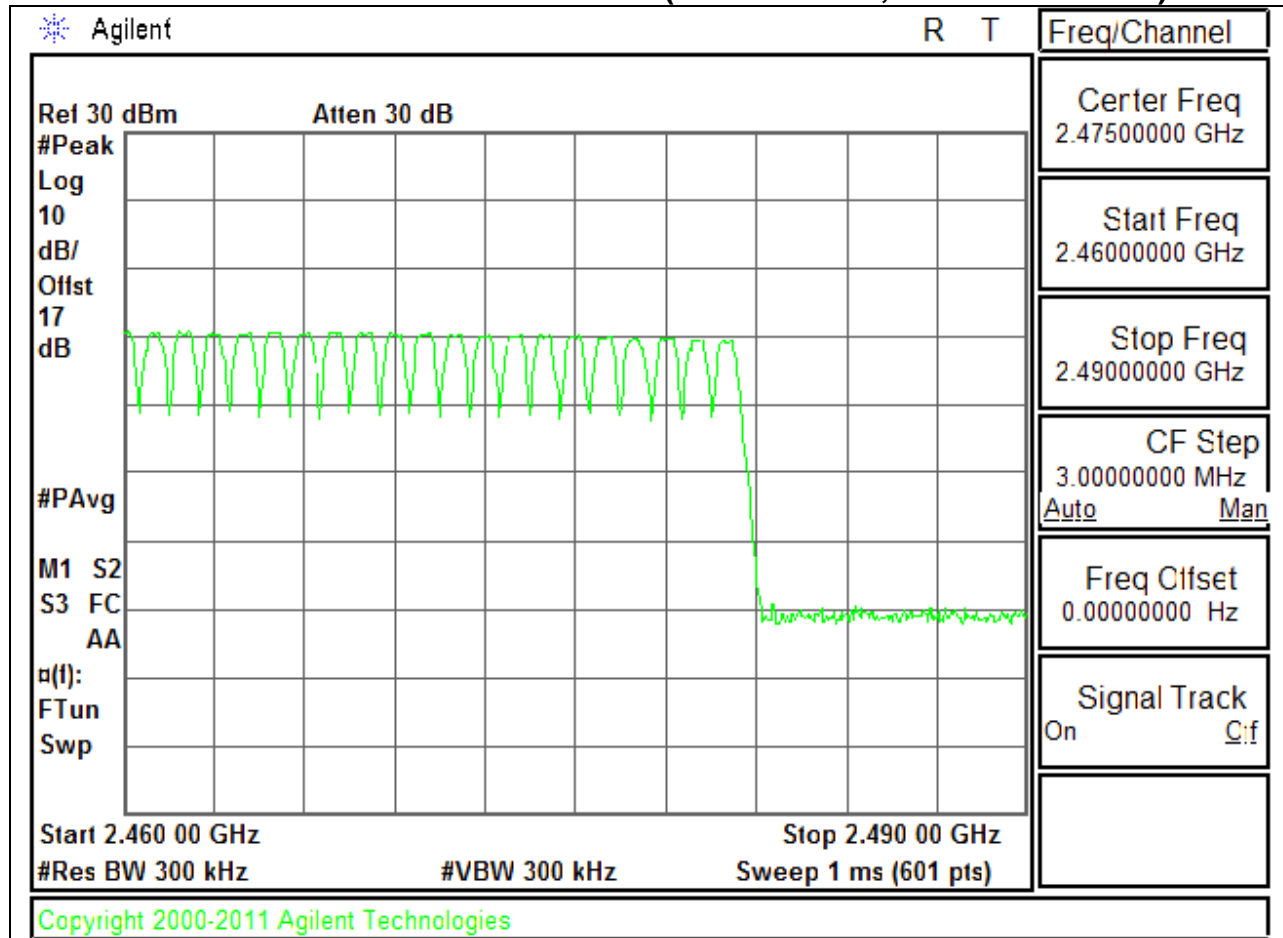

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.3583	32	0.115	0.4	-0.285
DH3	1.642	19	0.312	0.4	-0.088
DH5	2.875	13	0.374	0.4	-0.026
GFSK AFH Mode					
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.3583	8	0.029	0.4	-0.371
DH3	1.642	4.75	0.078	0.4	-0.322
DH5	2.875	3.25	0.093	0.4	-0.307


PULSE WIDTH - DH1

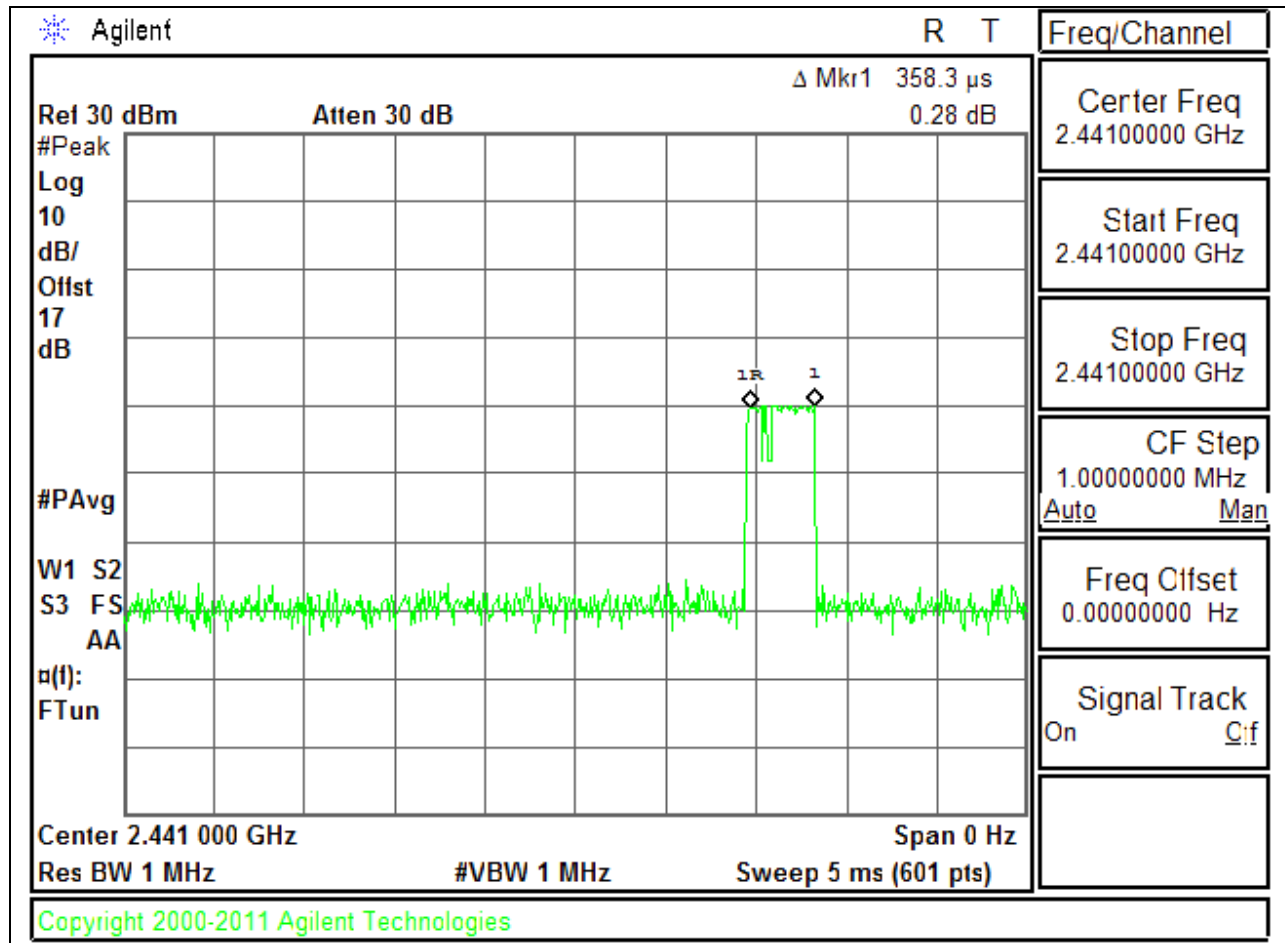


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

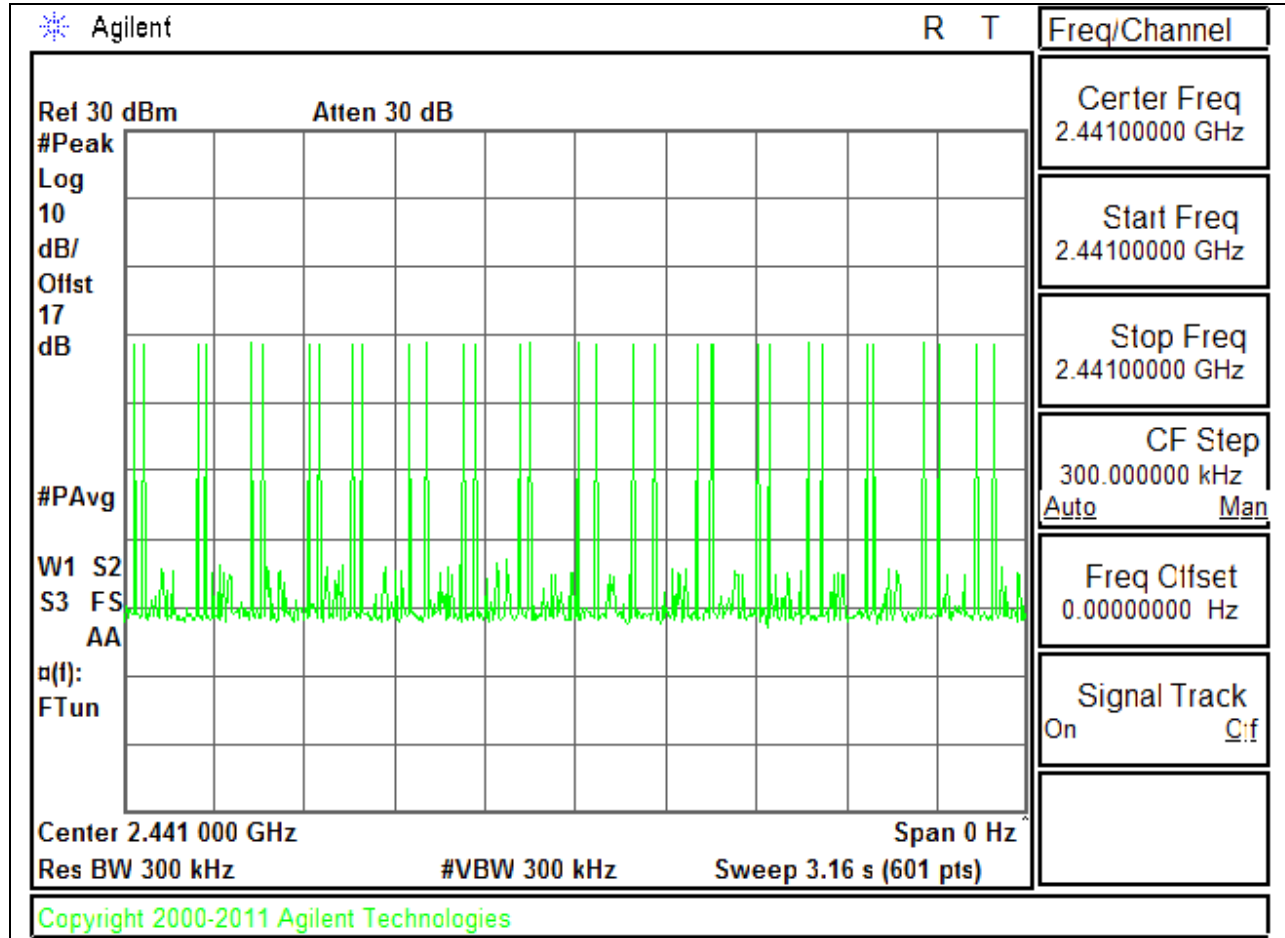


PULSE WIDTH - DH3

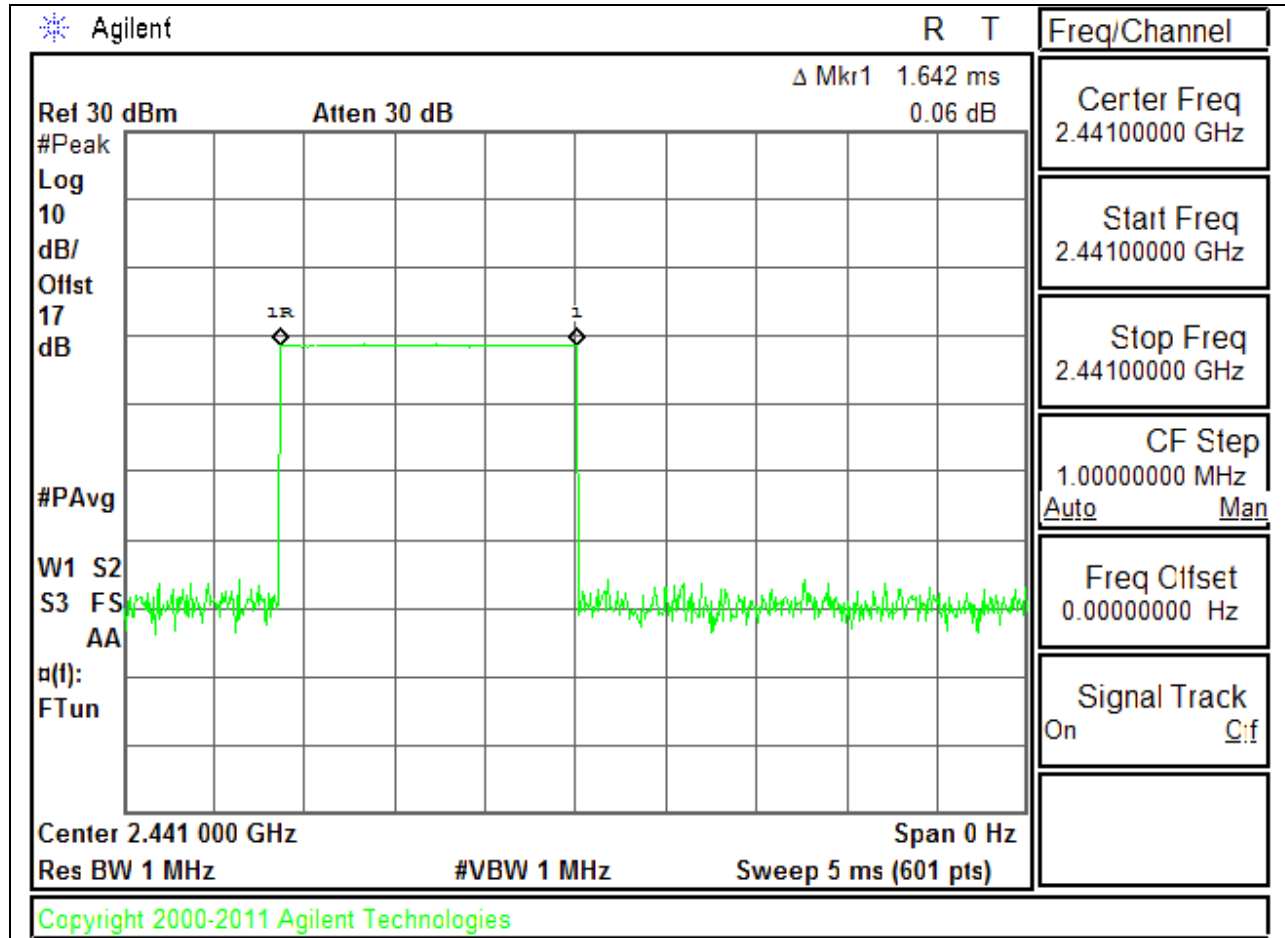

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

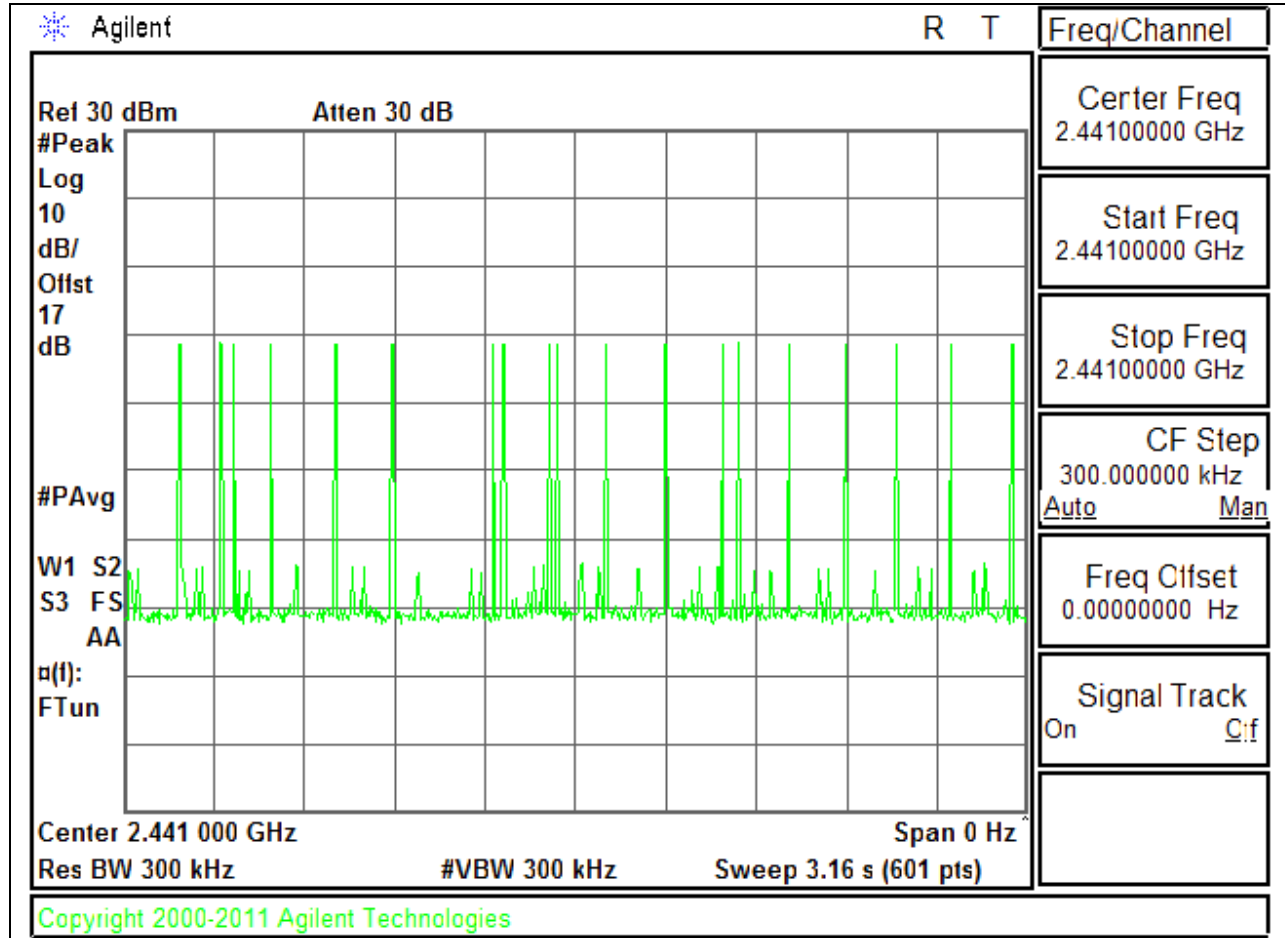

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

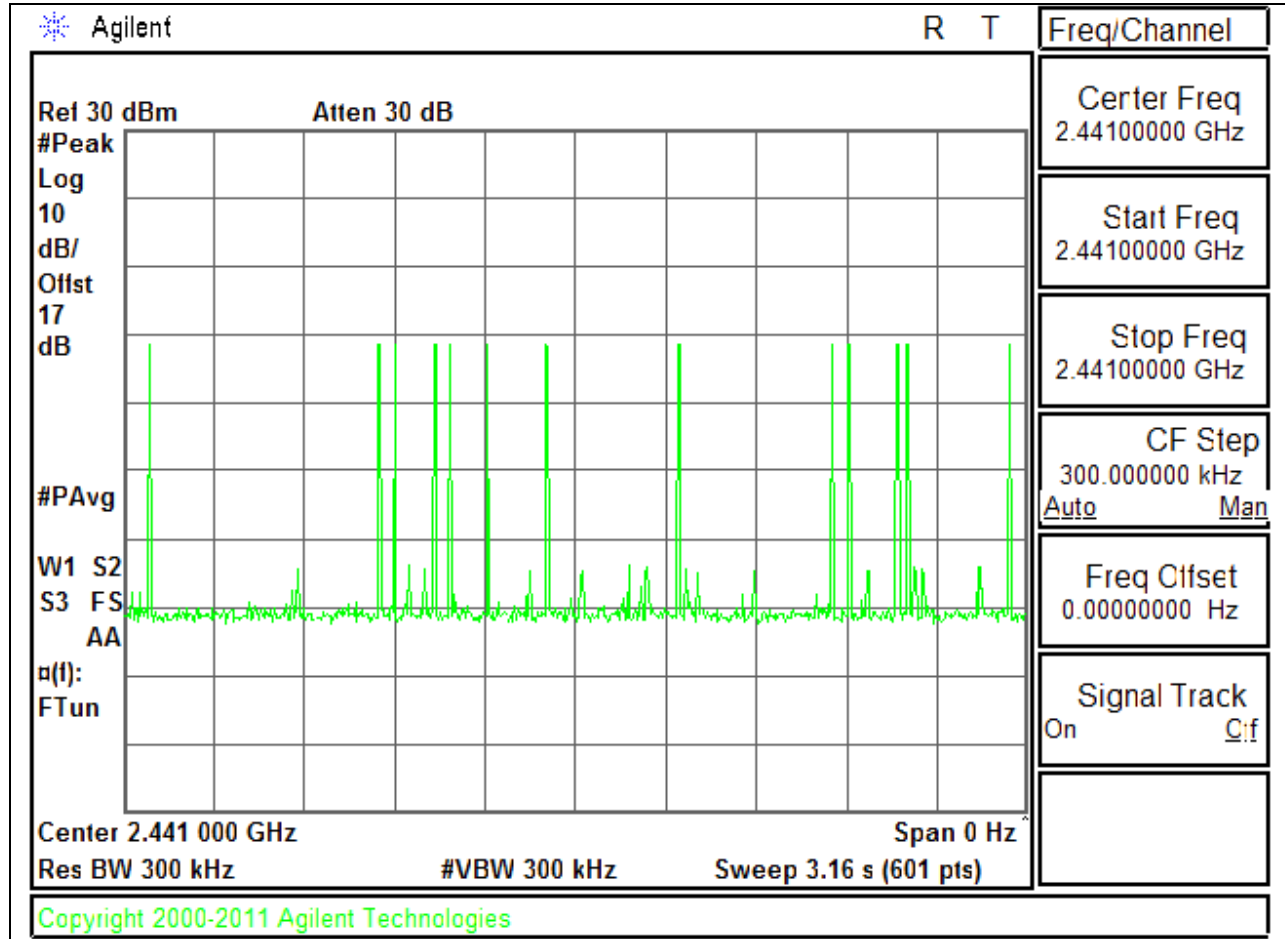

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.19	21	-10.81
Middle	2441	8.6	21	-12.4
High	2480	9.88	21	-11.12
Worst		10.19		-10.81


8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.65	21	-10.35
Middle	2441	9	21	-12
High	2480	10.26	21	-10.74
Worst		10.65		-10.35


8.5.3. OUTPUT POWER PLOTS

GFSK OUTPUT POWER

LOW CHANNEL

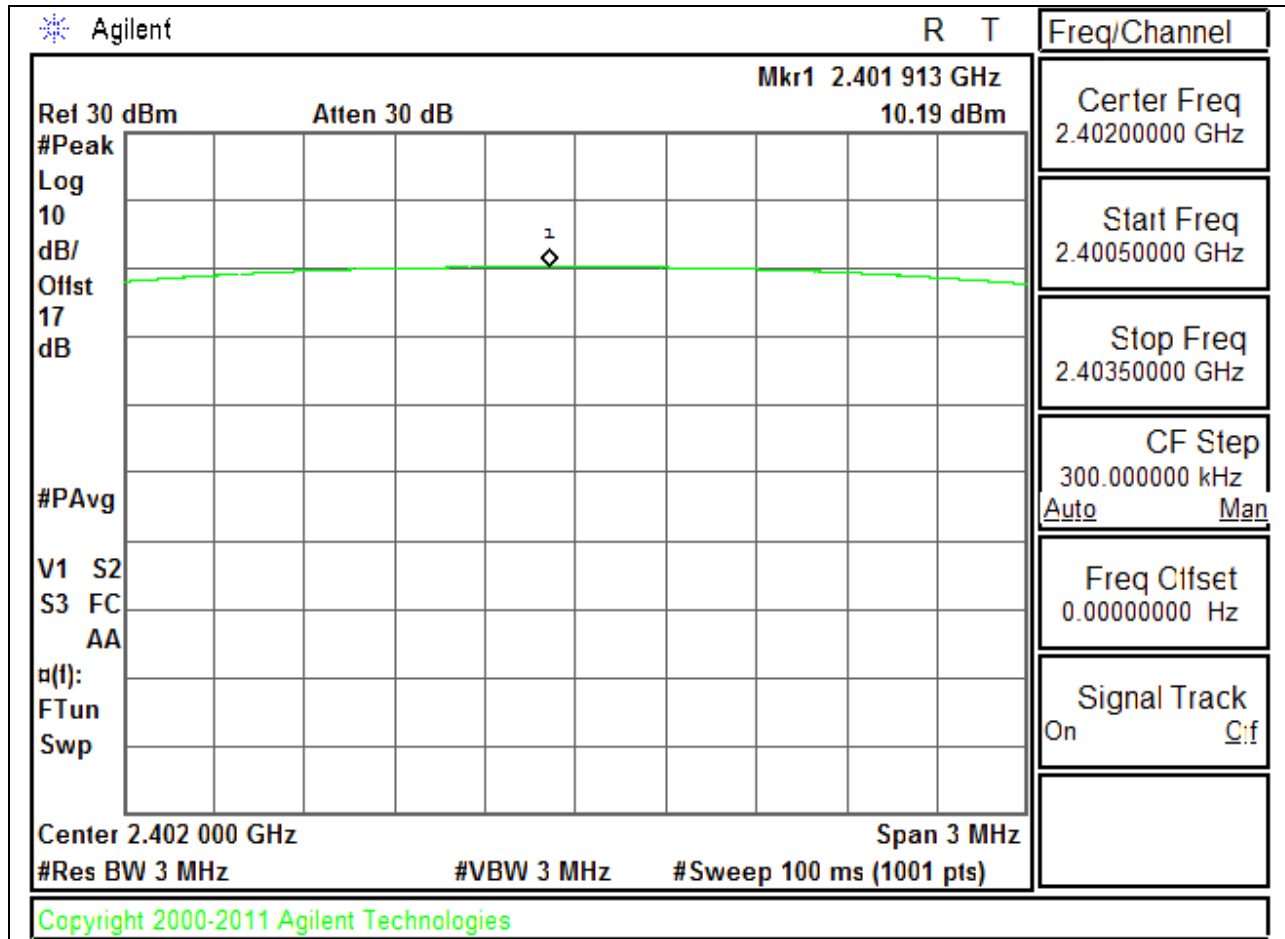


MID CHANNEL

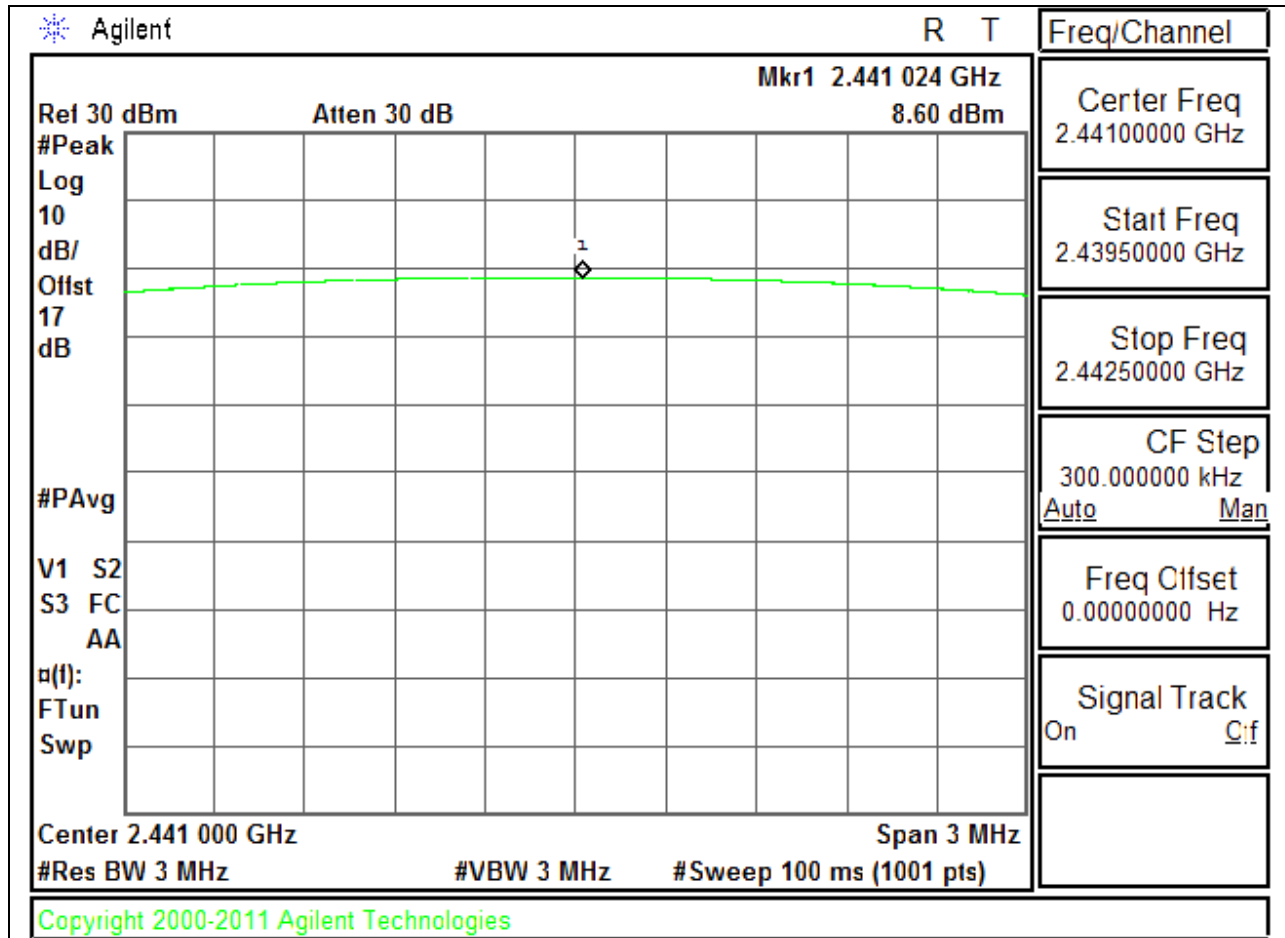


8PSK OUTPUT POWER


LOW CHANNEL

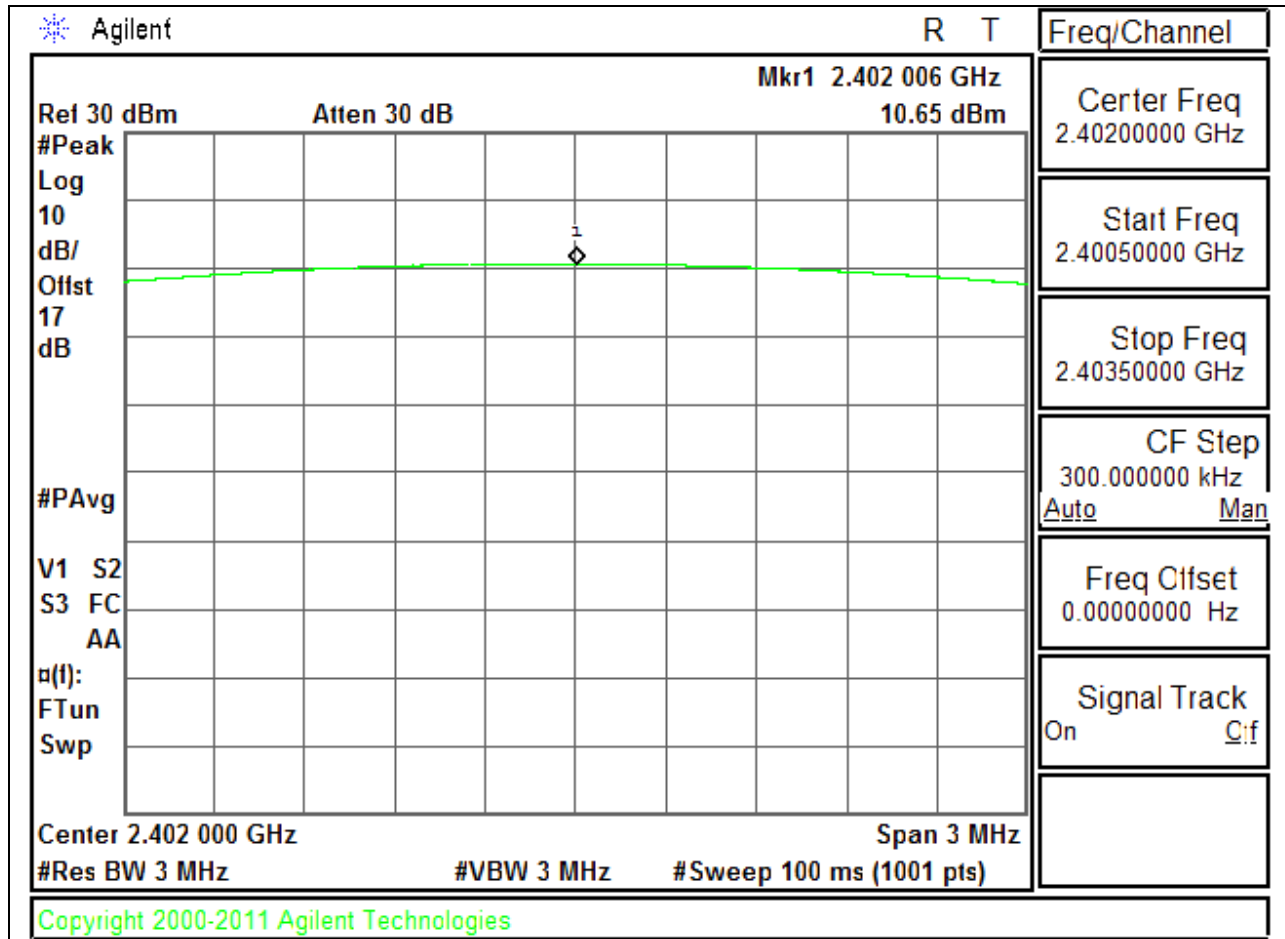

MID CHANNEL

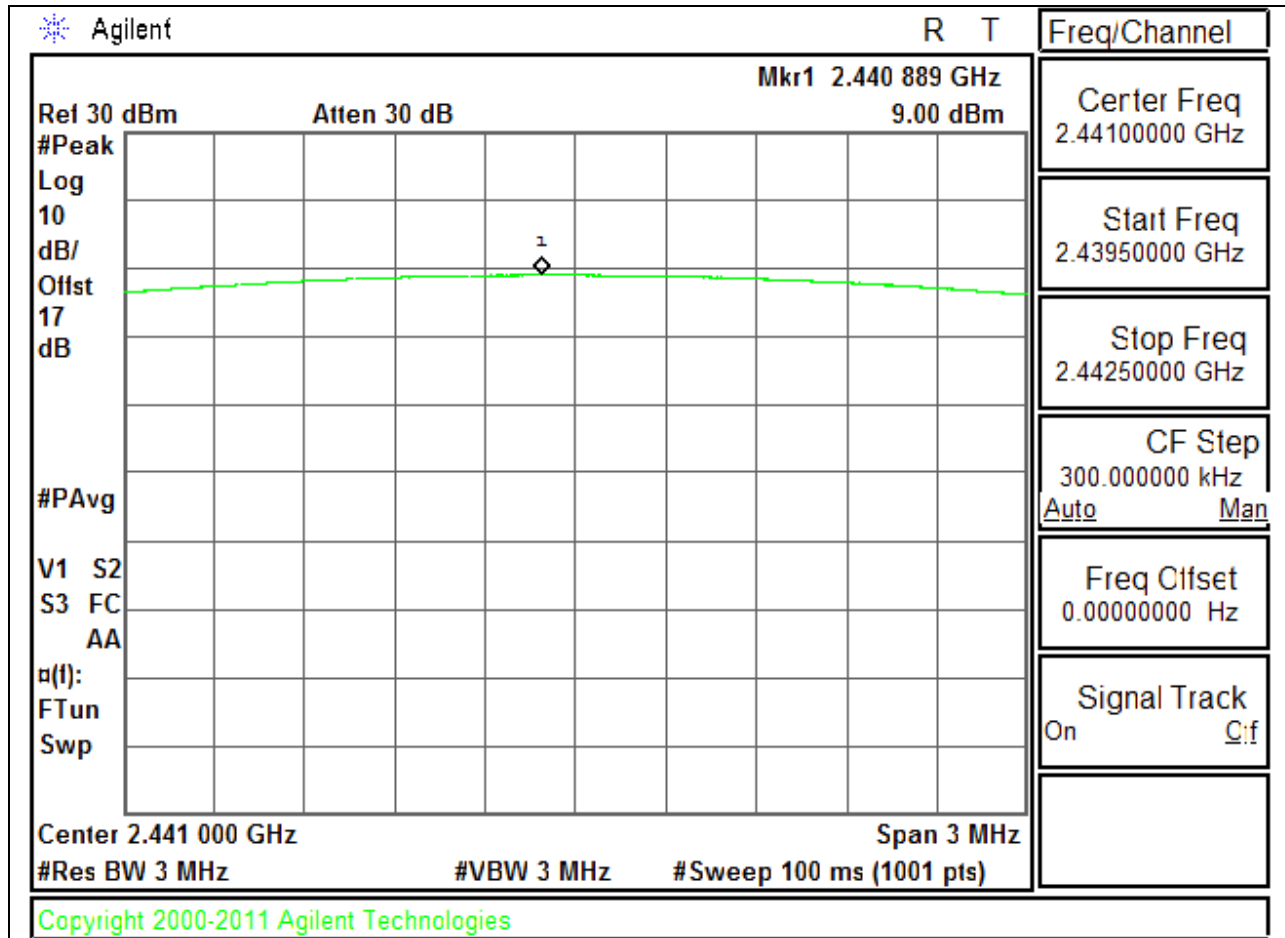

HIGH CHANNEL

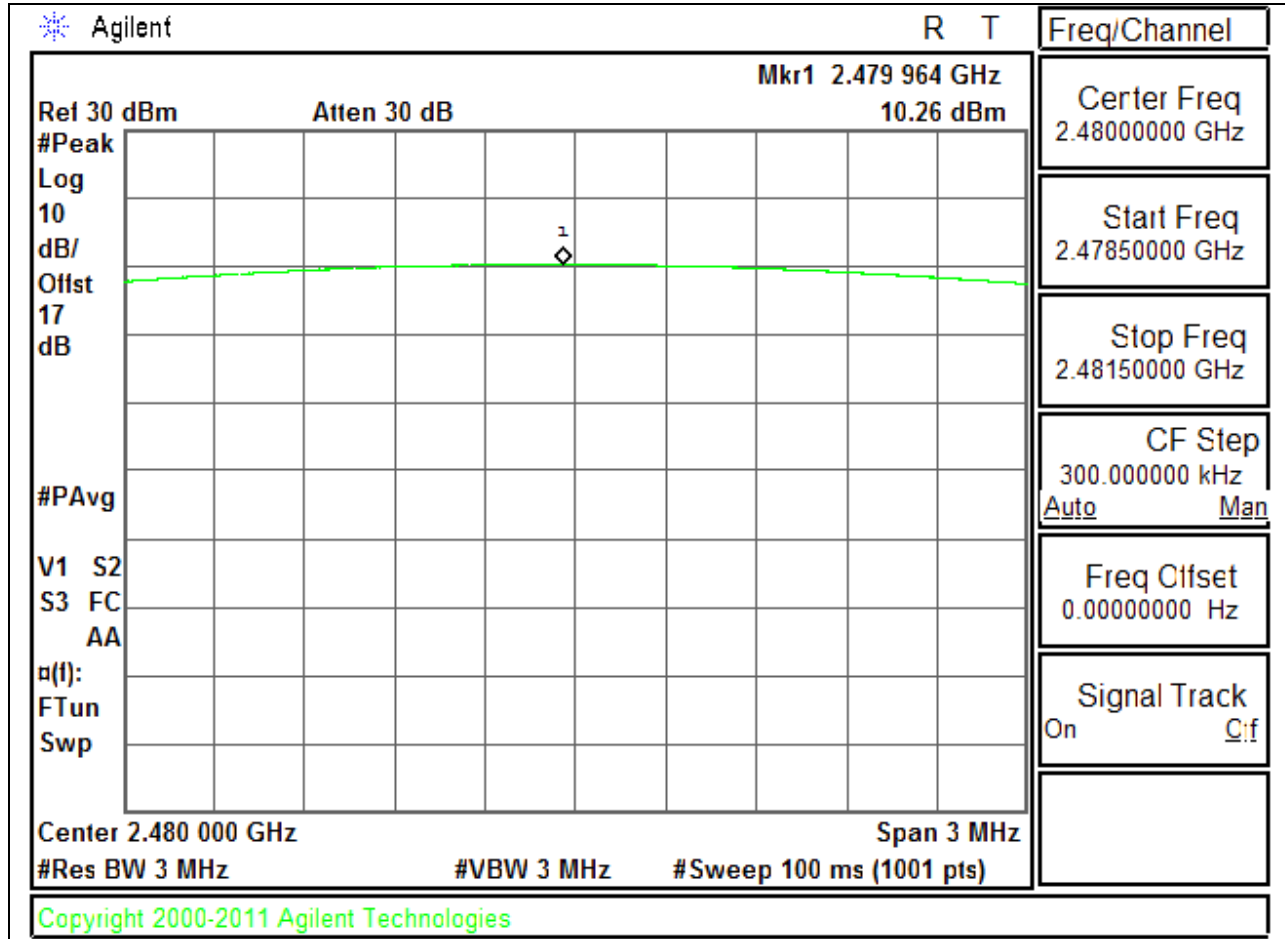

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.3
Middle	2441	7.9
High	2480	9
Worst		9.3

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.10
Middle	2441	5.60
High	2480	6.60
Worst		7.10

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.1
Middle	2441	5.6
High	2480	6.7
Worst		7.1

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

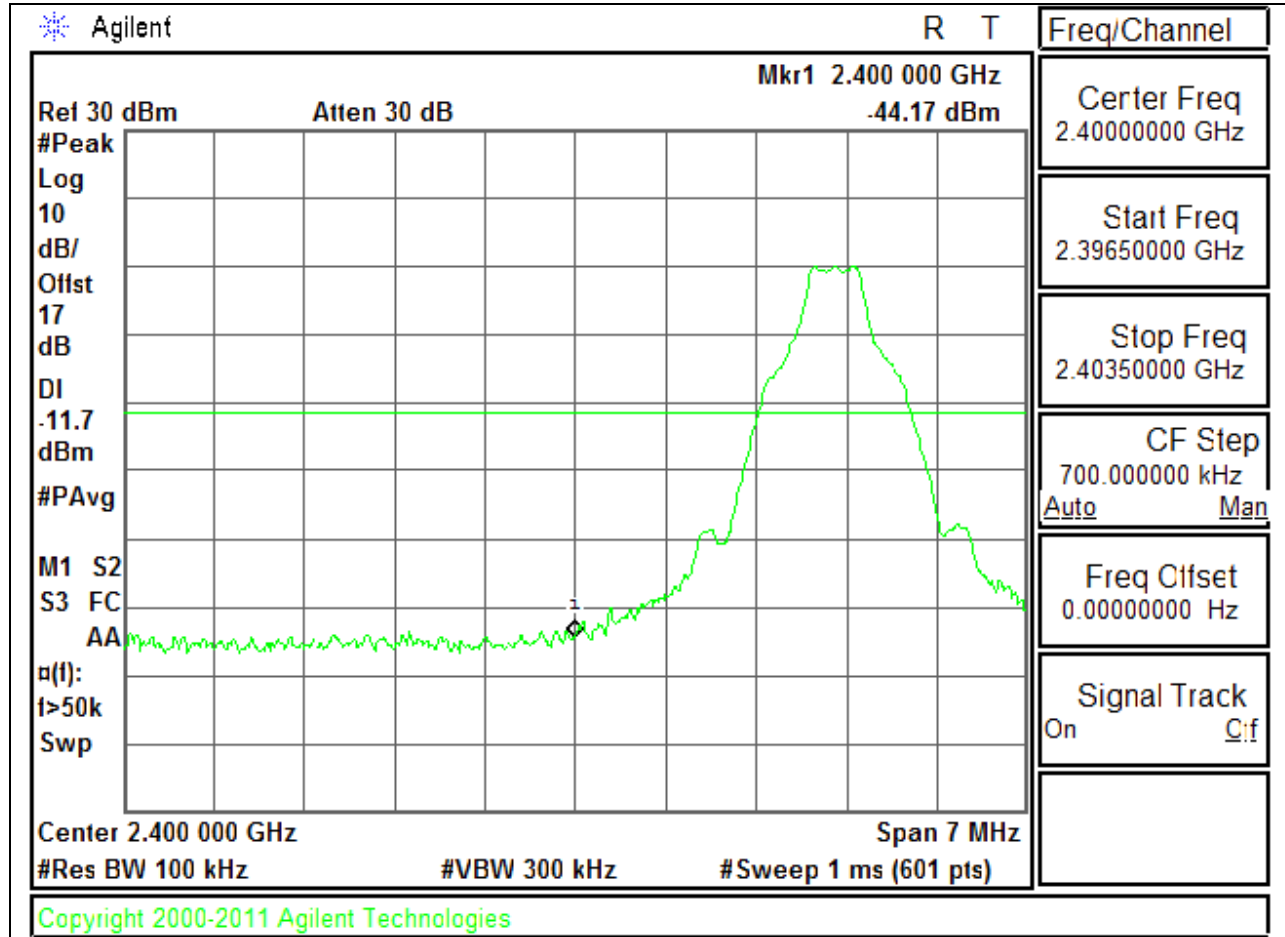


LOW CHANNEL SPURIOUS

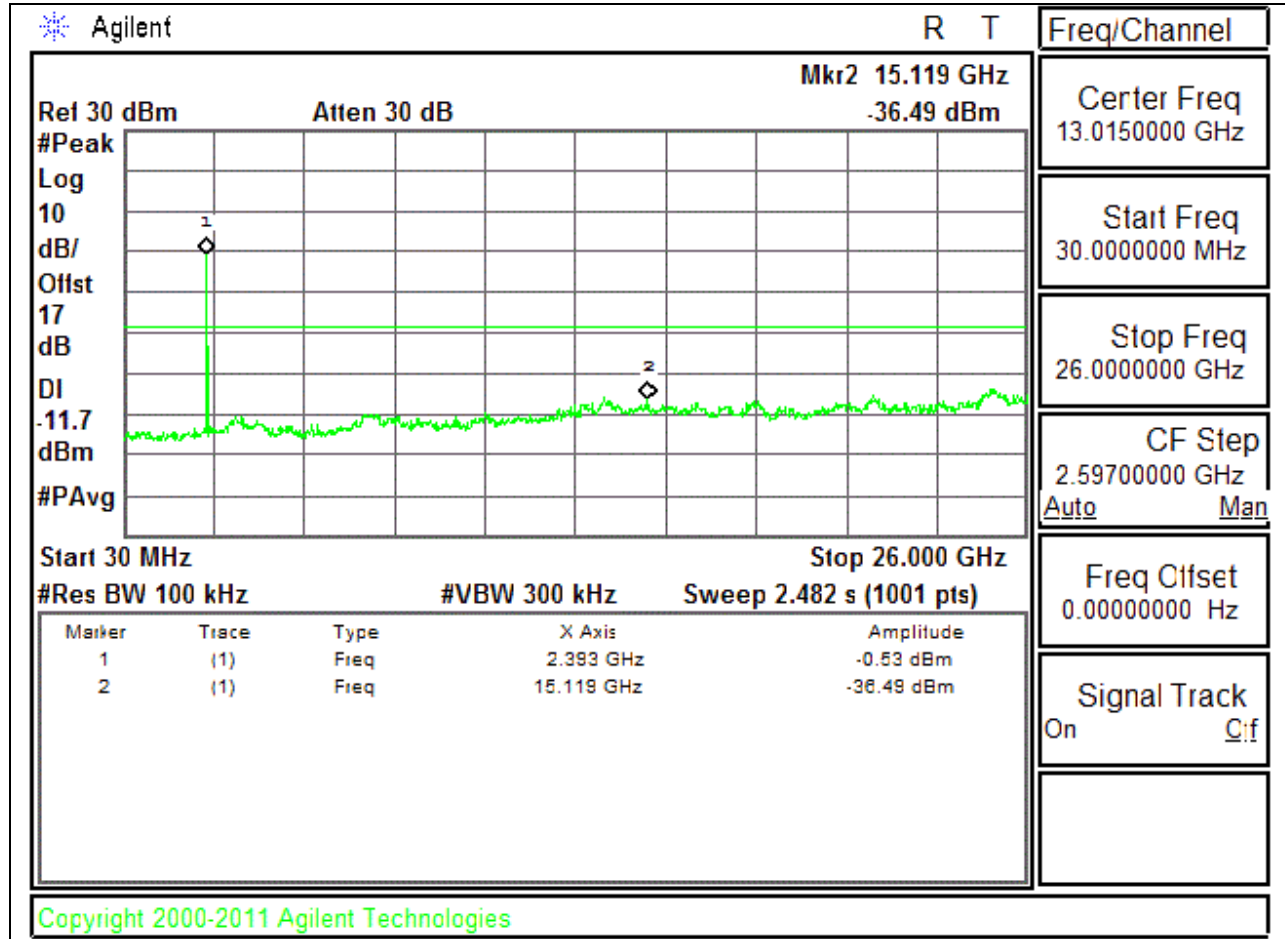


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL BANDEDGE

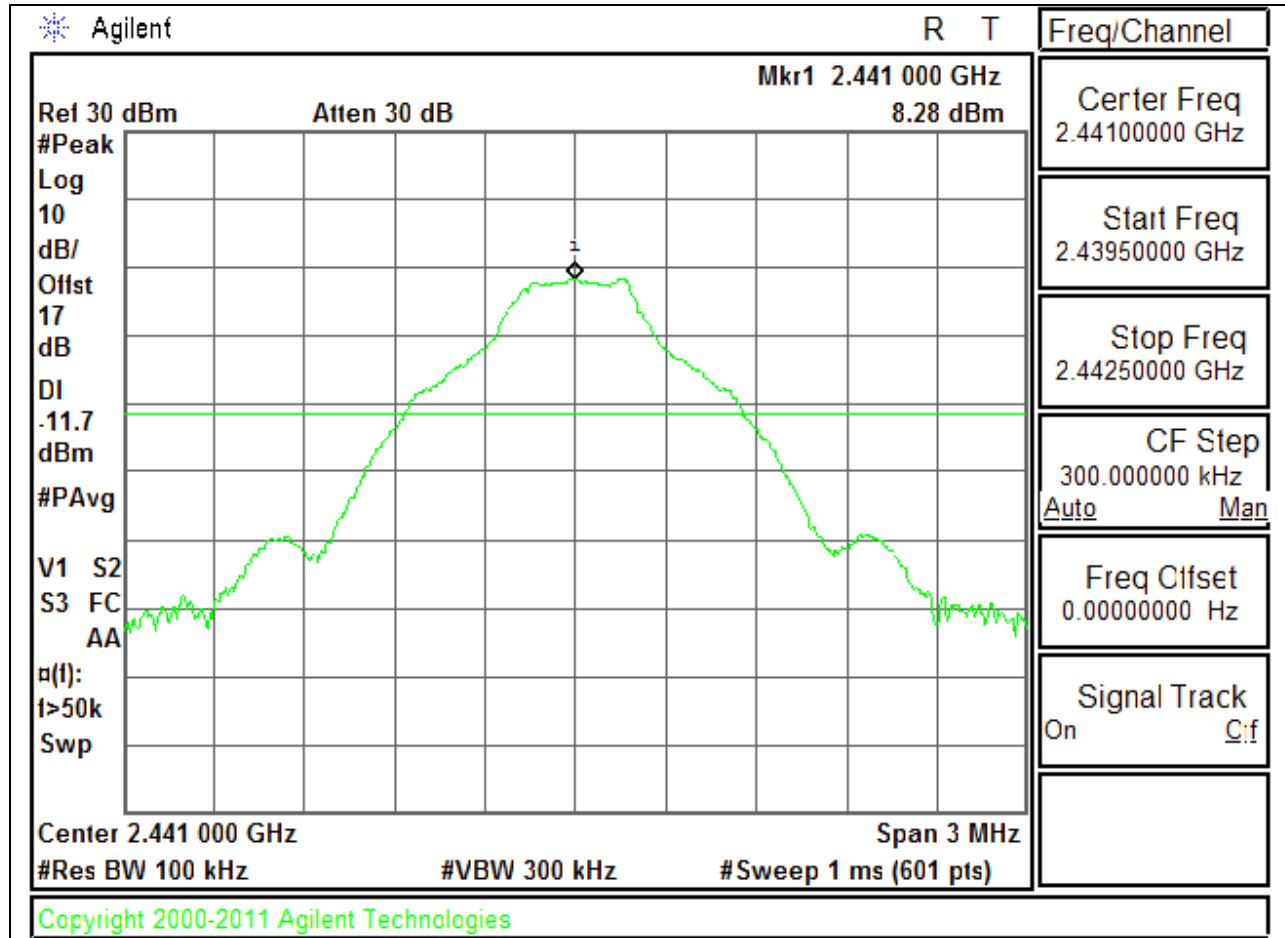


MID CHANNEL SPURIOUS

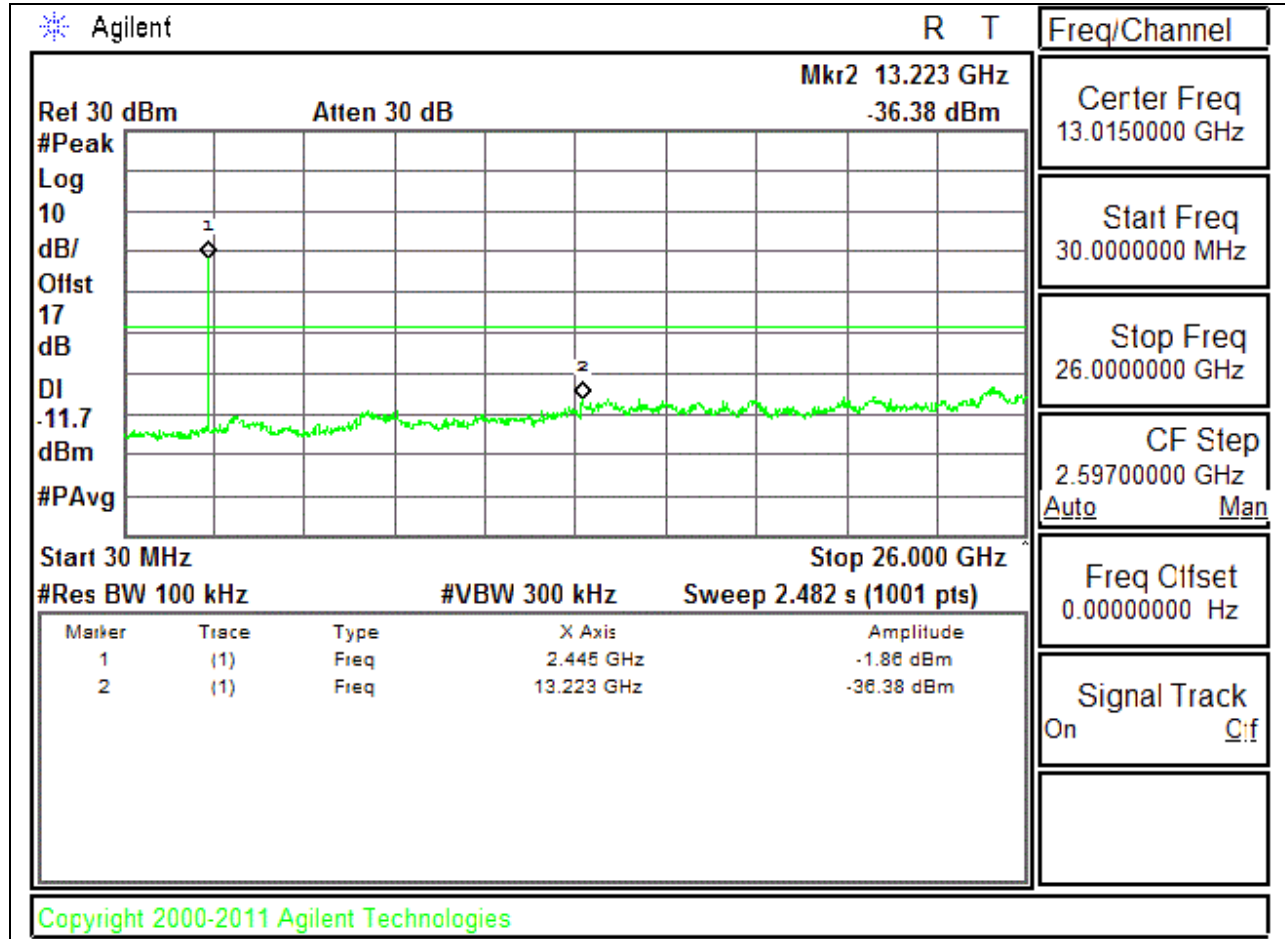


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

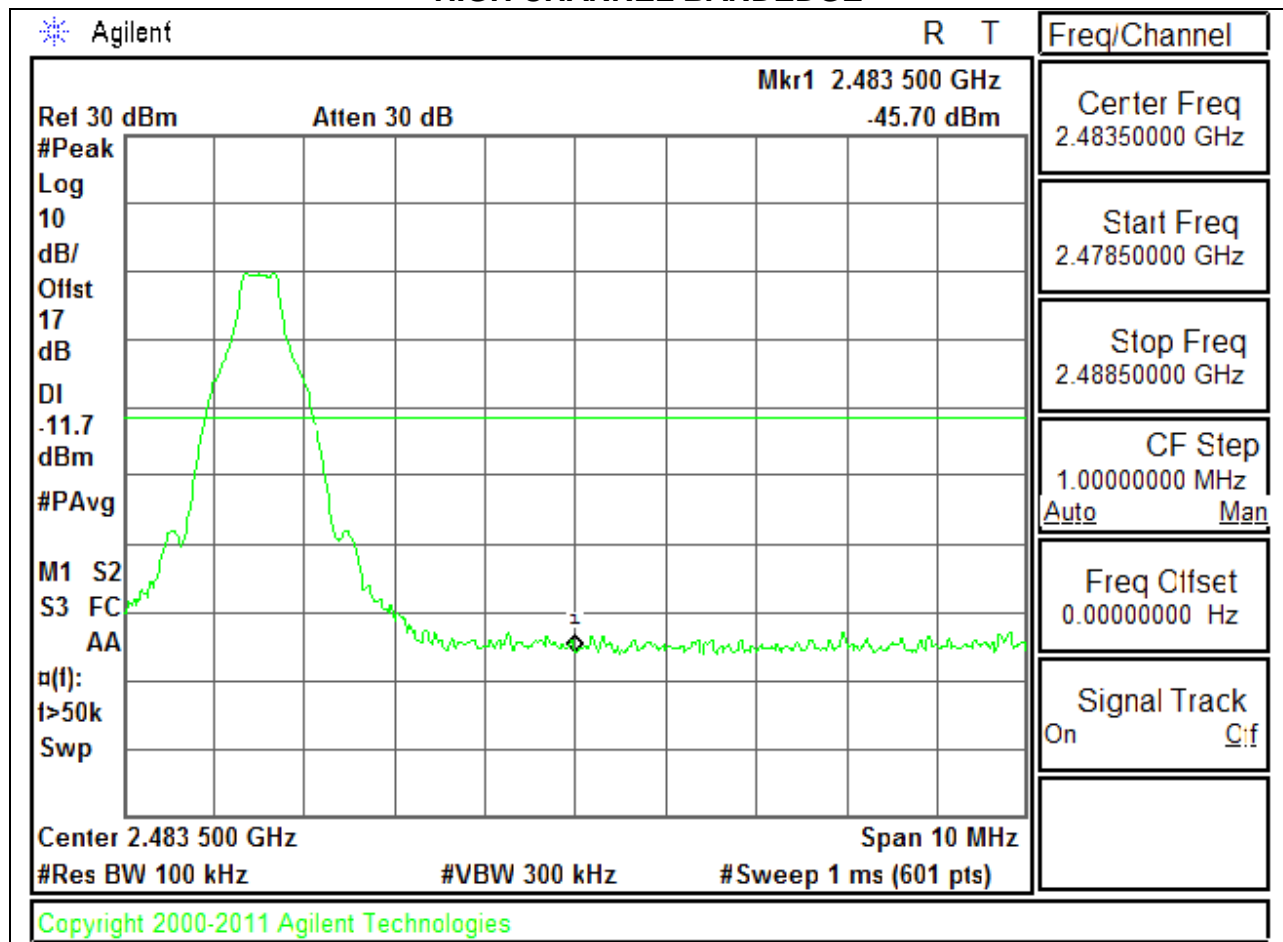


HIGH CHANNEL SPURIOUS

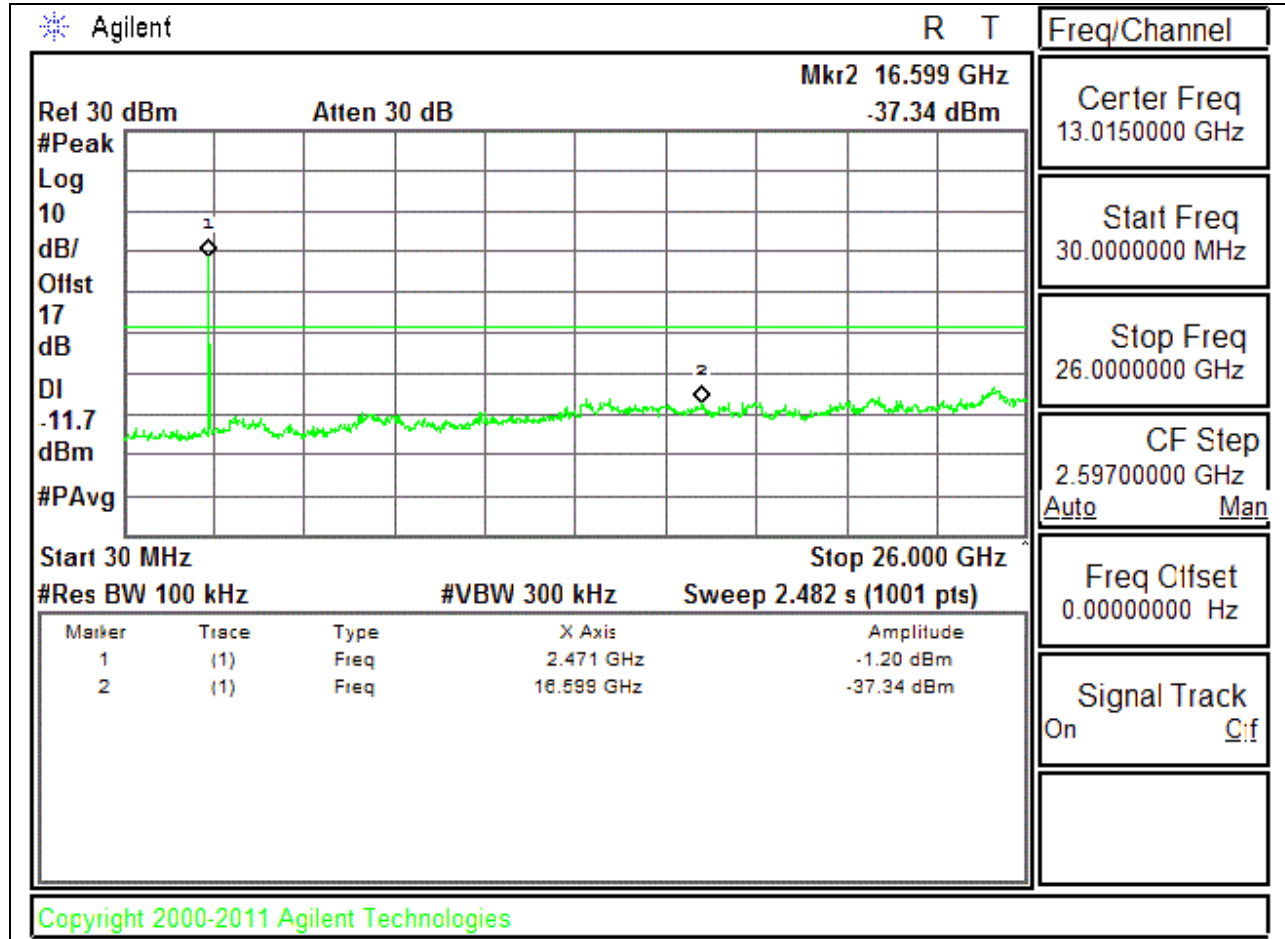


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

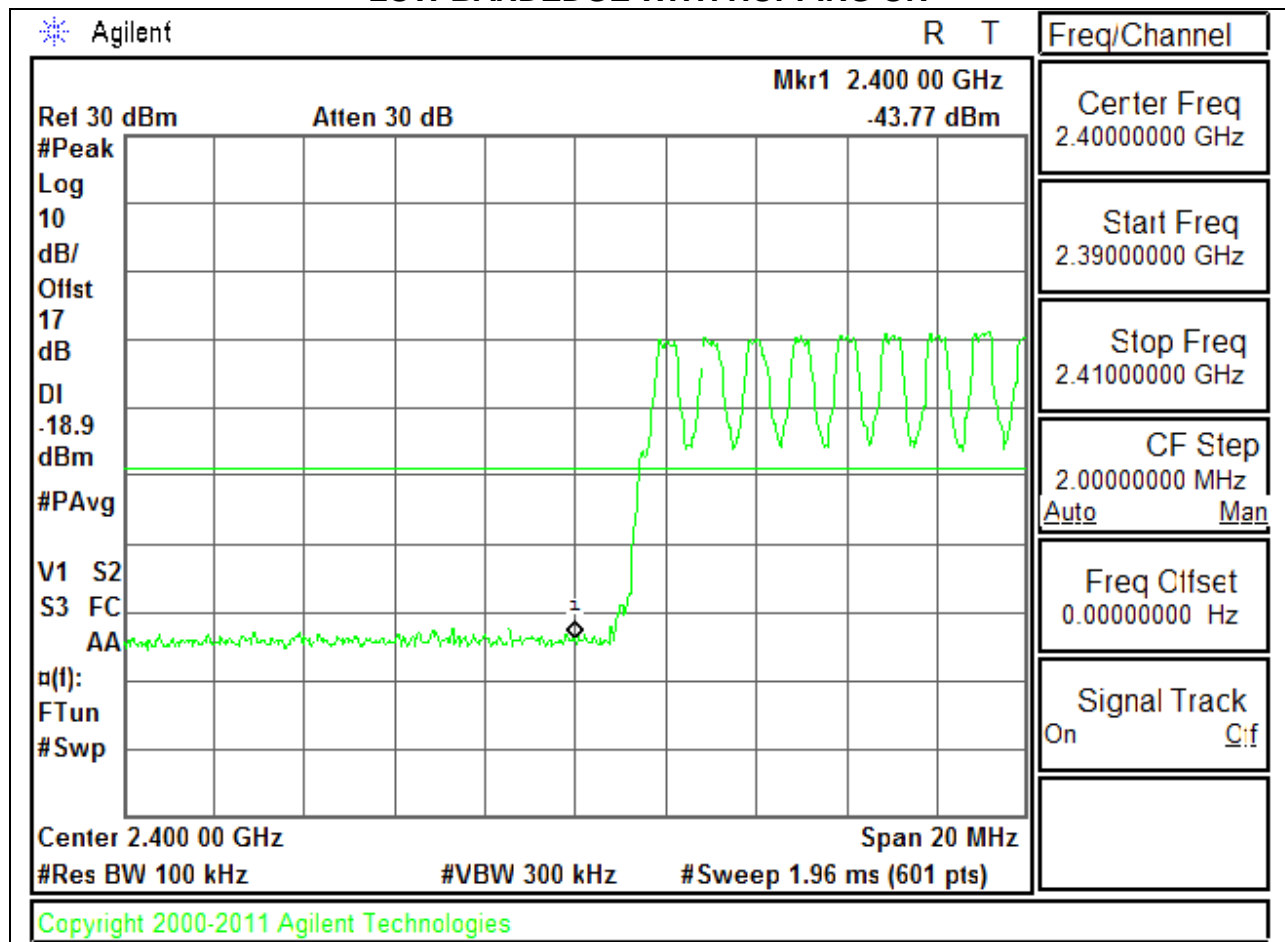


HIGH BANDEDGE WITH HOPPING ON

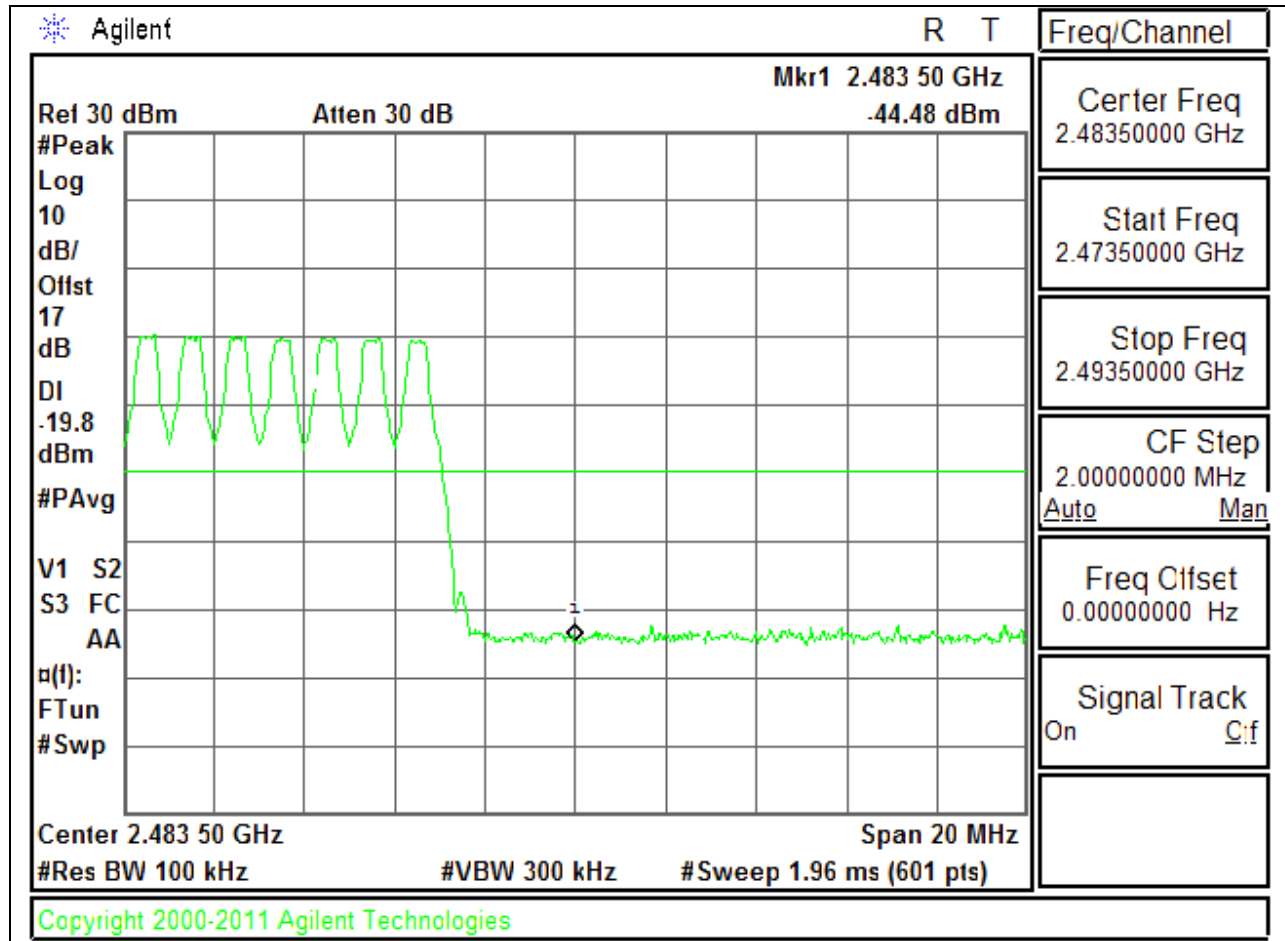


ENHANCED DATA RATE 8PSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

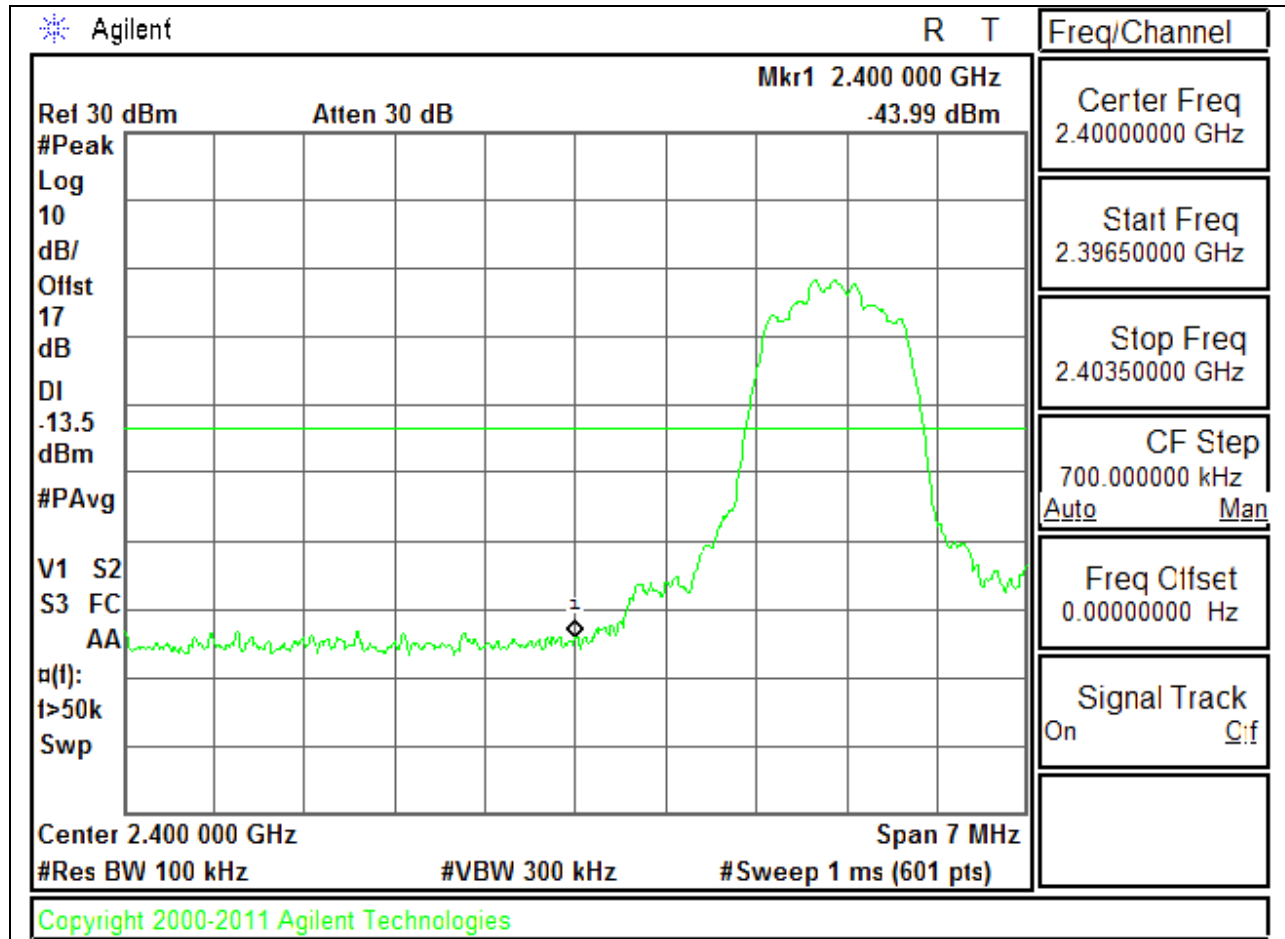


LOW CHANNEL SPURIOUS

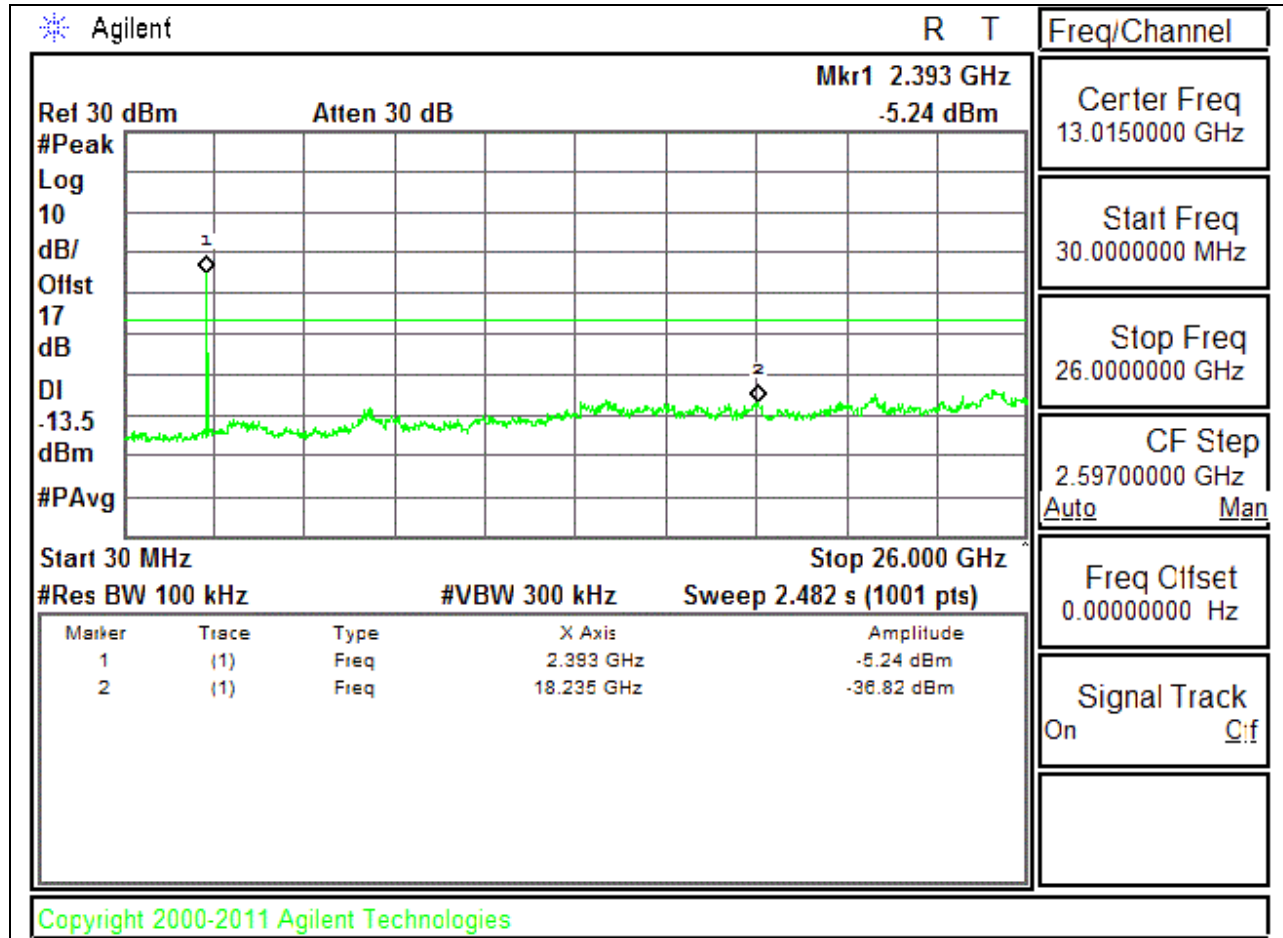


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL BANDEDGE

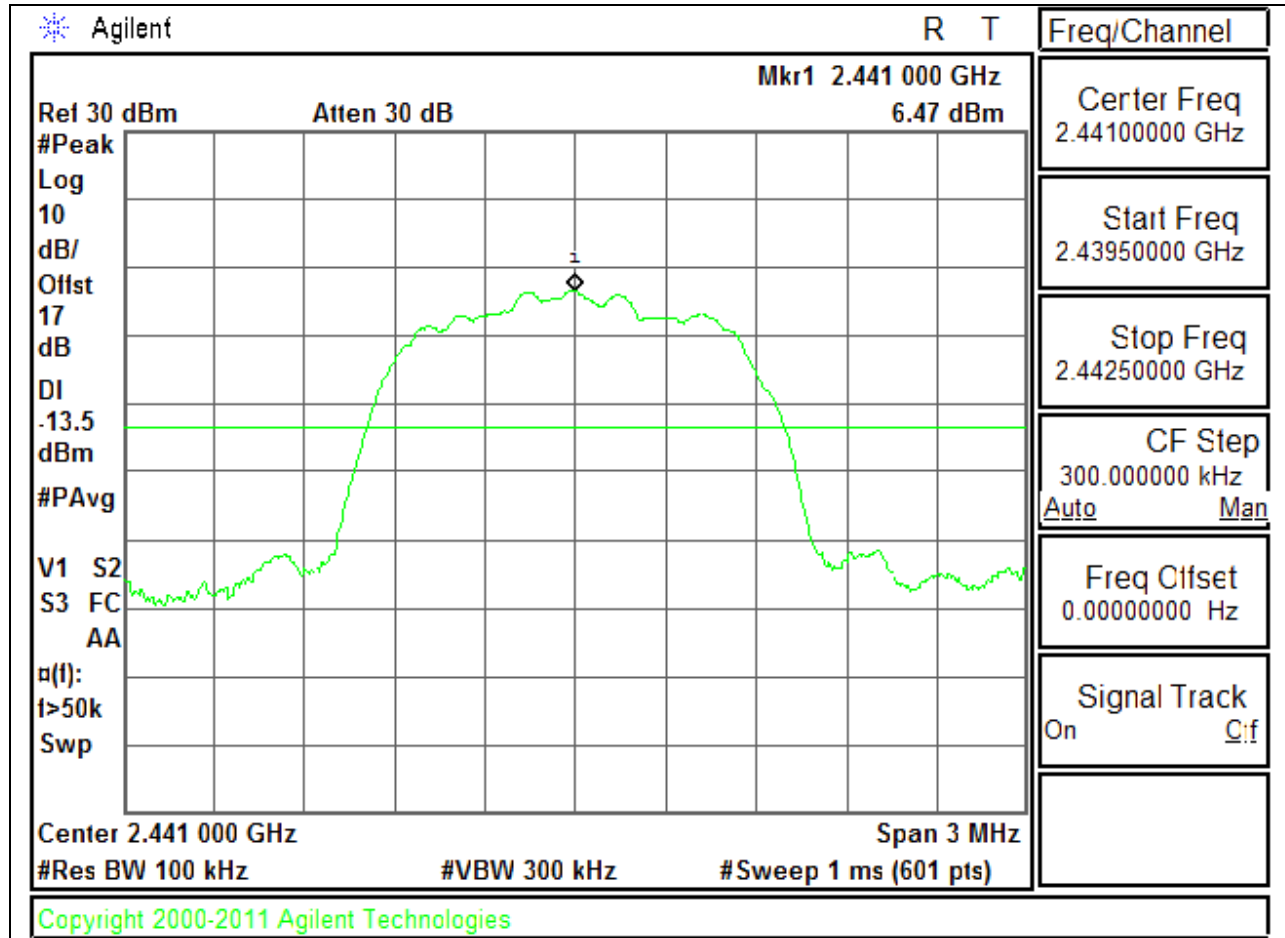


MID CHANNEL SPURIOUS

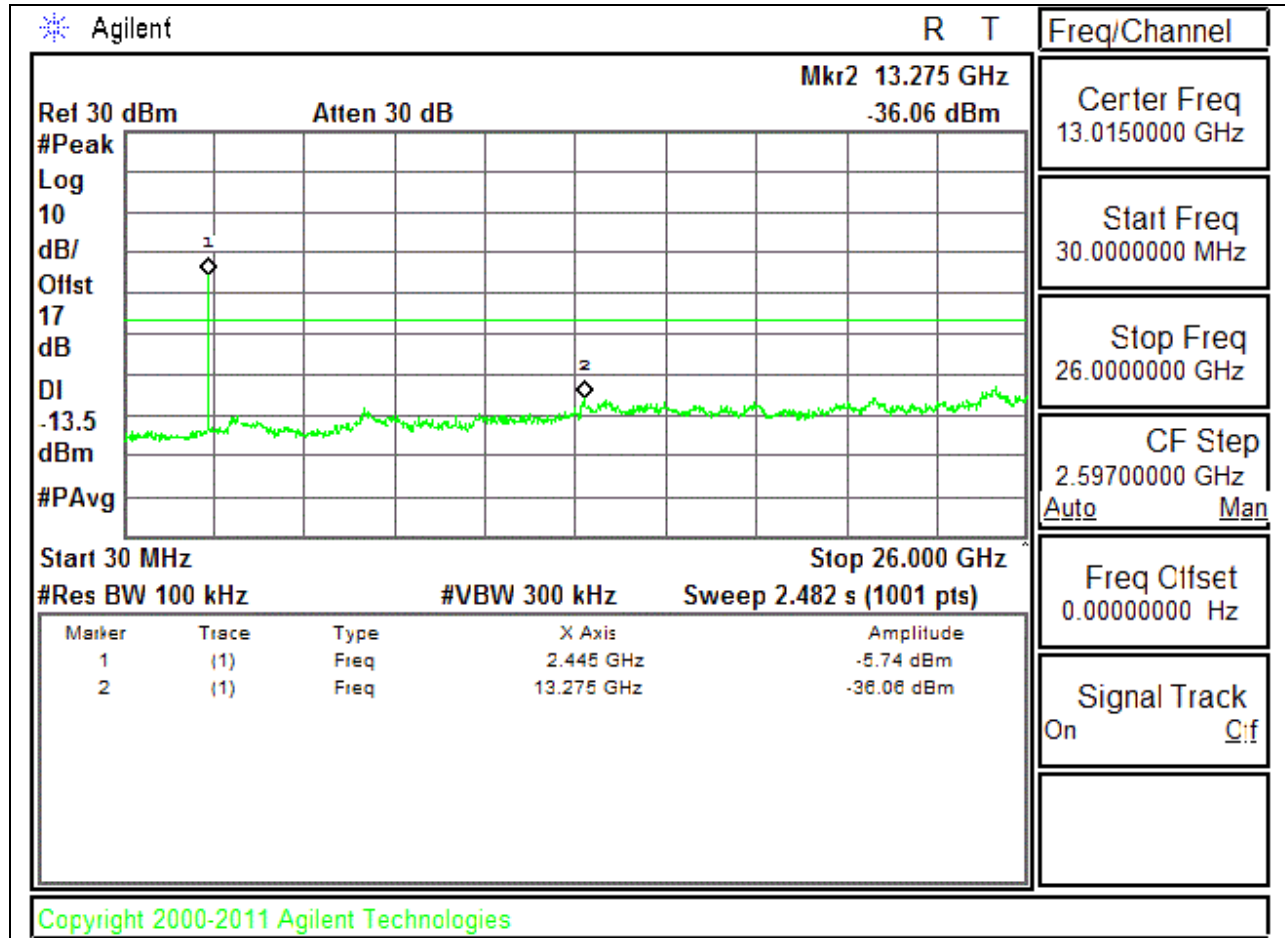


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

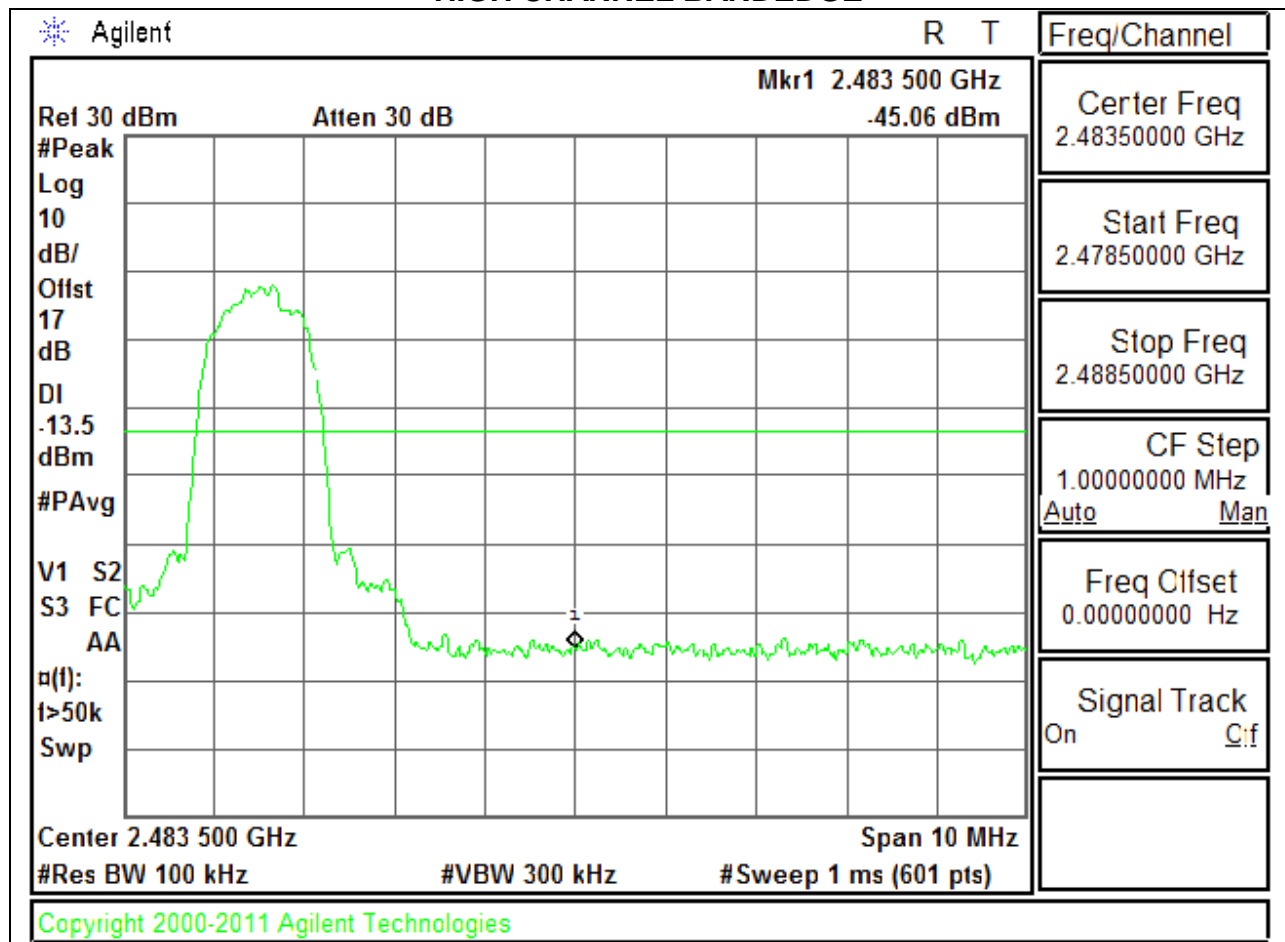


HIGH CHANNEL SPURIOUS

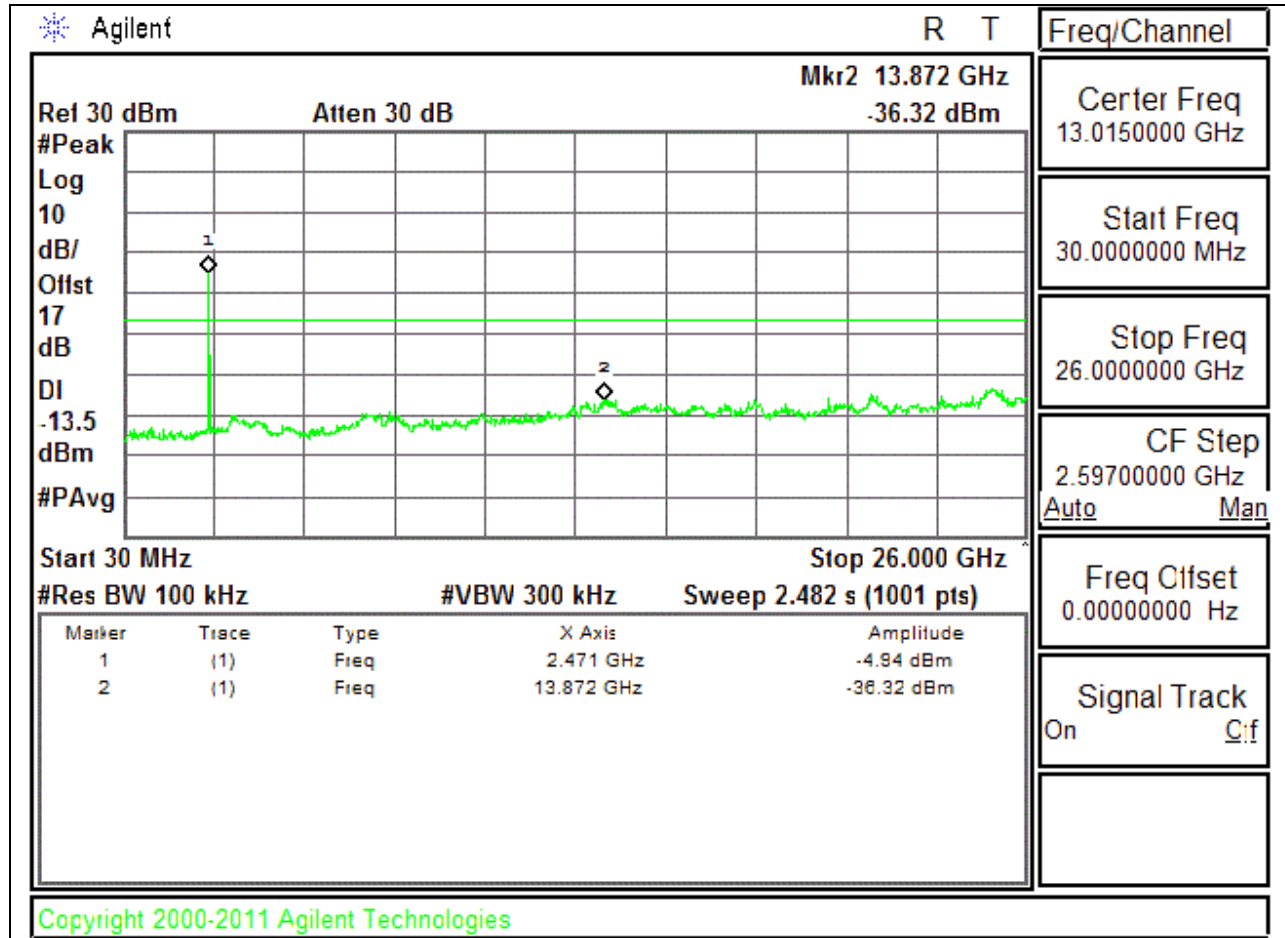


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

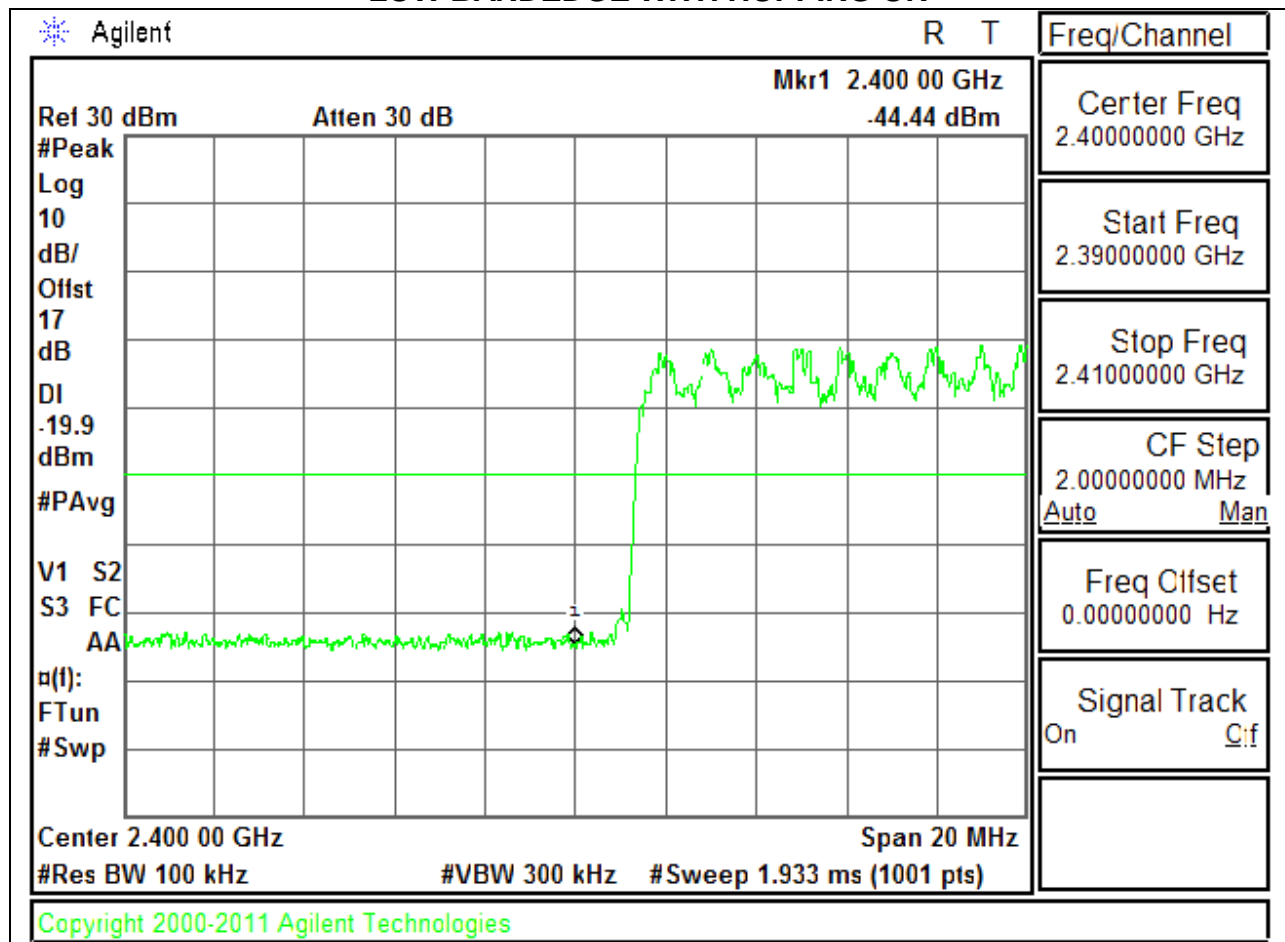

HIGH BANDEGE WITH HOPPING ON

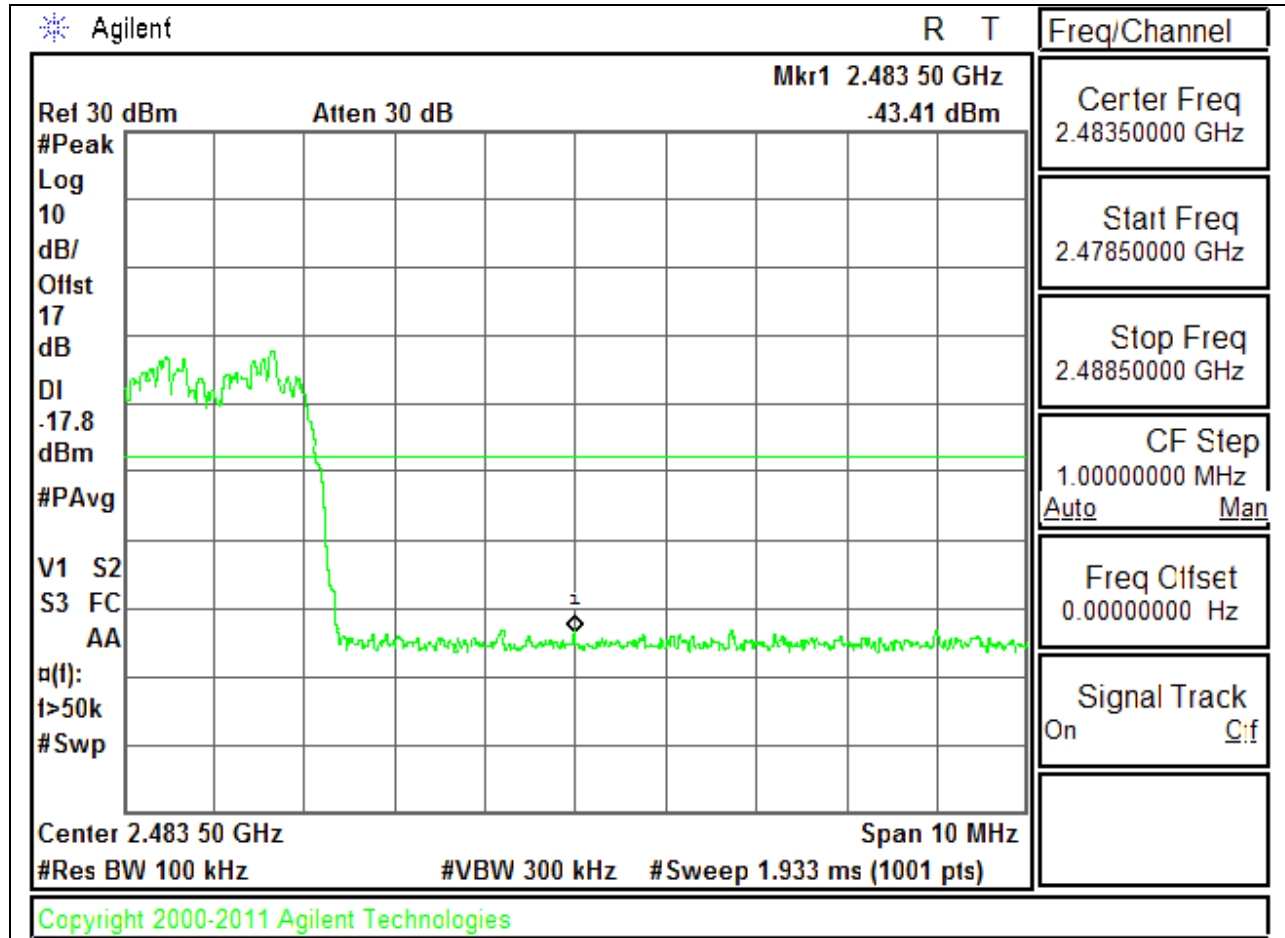

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.00288S = 360Hz$.

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

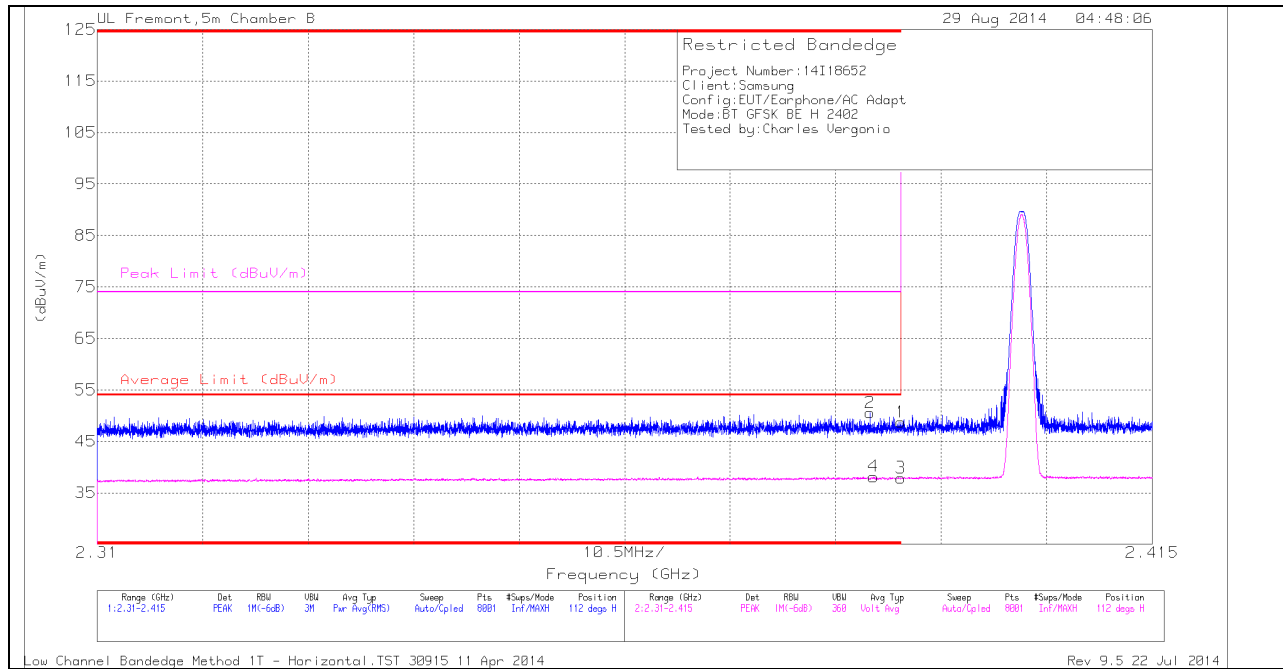

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.32	PK	32.1	-22.7	0	48.72	-	-	74	-25.28	112	378	H
2	* 2.387	41.18	PK	32.1	-22.7	0	50.58	-	-	74	-23.42	112	378	H
3	* 2.39	28.48	VB1T	32.1	-22.7	0	37.88	54	-16.12	-	-	112	378	H
4	* 2.387	28.77	VB1T	32.1	-22.7	0	38.17	54	-15.83	-	-	112	378	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

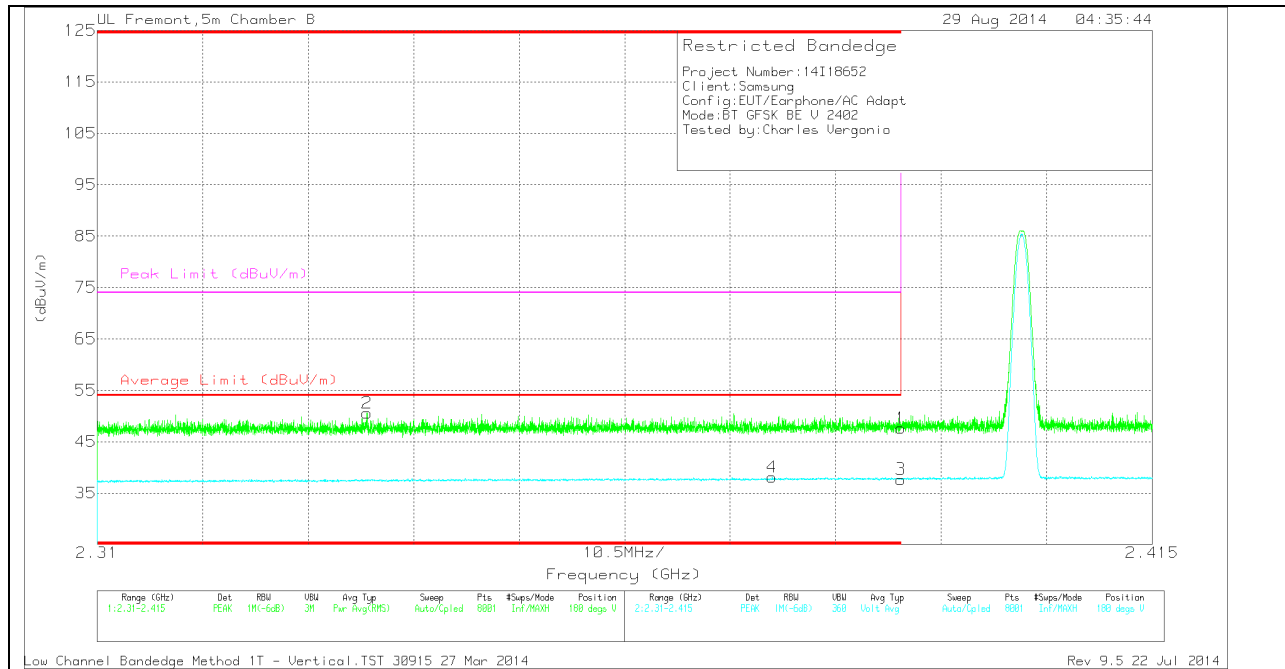

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.23	PK	32.1	-22.7	0	47.63	-	-	74	-26.37	180	260	V
2	* 2.337	41.57	PK	31.8	-22.8	0	50.57	-	-	74	-23.43	180	260	V
3	* 2.39	28.26	VB1T	32.1	-22.7	0	37.66	54	-16.34	-	-	180	260	V
4	* 2.377	28.89	VB1T	32	-22.8	0	38.09	54	-15.91	-	-	180	260	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

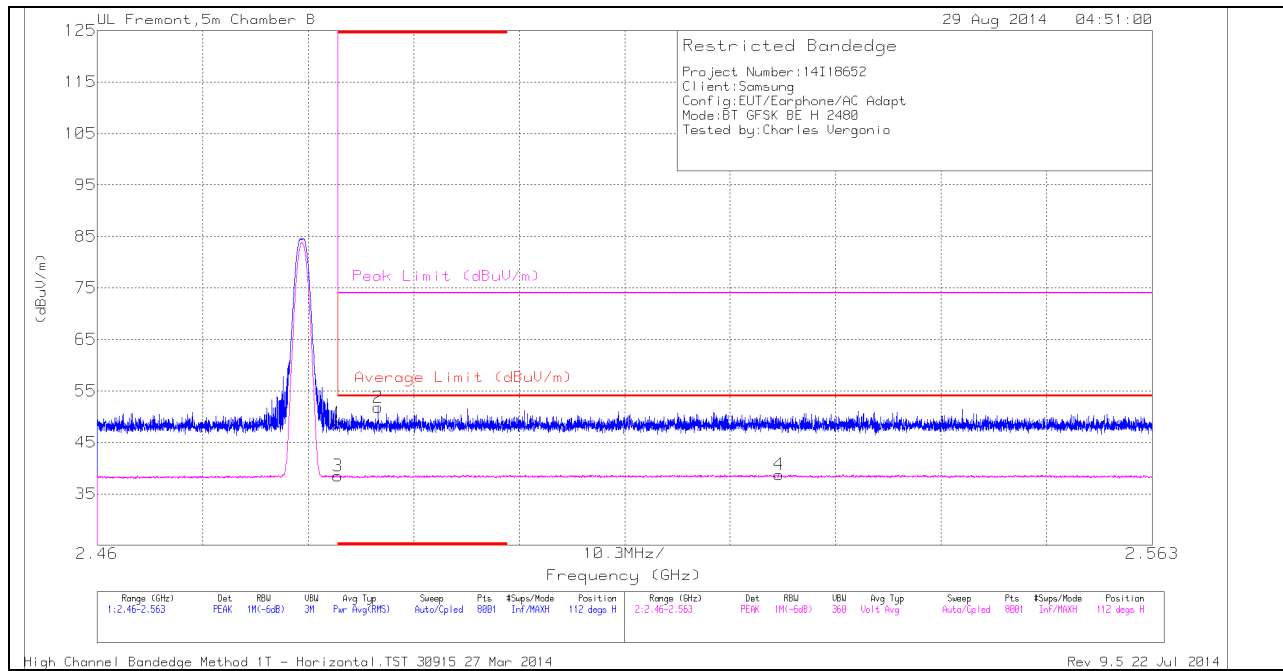

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.96	PK	32.4	-22.6	0	48.76	-	-	74	-25.24	112	378	H
2	* 2.487	41.98	PK	32.4	-22.6	0	51.78	-	-	74	-22.22	112	378	H
3	* 2.484	28.7	VB1T	32.4	-22.6	0	38.5	54	-15.5	-	-	112	378	H
4	2.527	28.76	VB1T	32.5	-22.5	0	38.76	54	-15.24	-	-	112	378	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

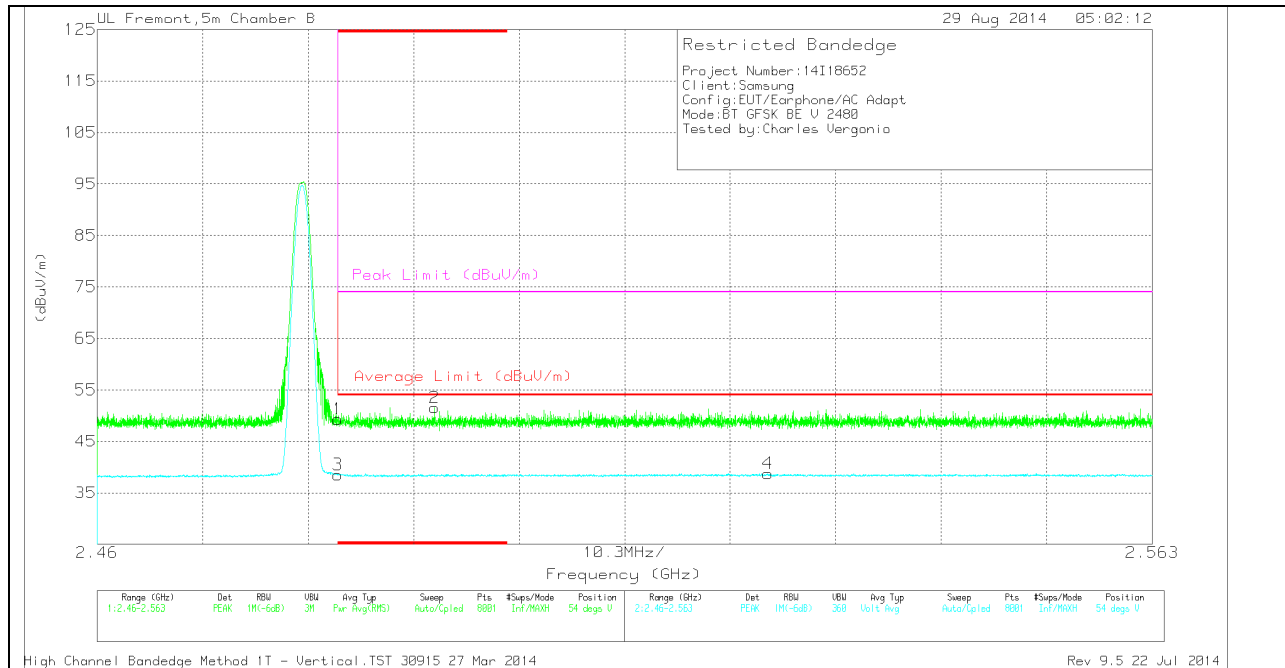

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.5	PK	32.4	-22.6	0	49.3	-	-	74	-24.7	54	354	V
2	* 2.493	41.65	PK	32.4	-22.5	0	51.55	-	-	74	-22.45	54	354	V
3	* 2.484	28.71	VB1T	32.4	-22.6	0	38.51	54	-15.49	-	-	54	354	V
4	2.525	28.76	VB1T	32.5	-22.5	0	38.76	54	-15.24	-	-	54	354	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

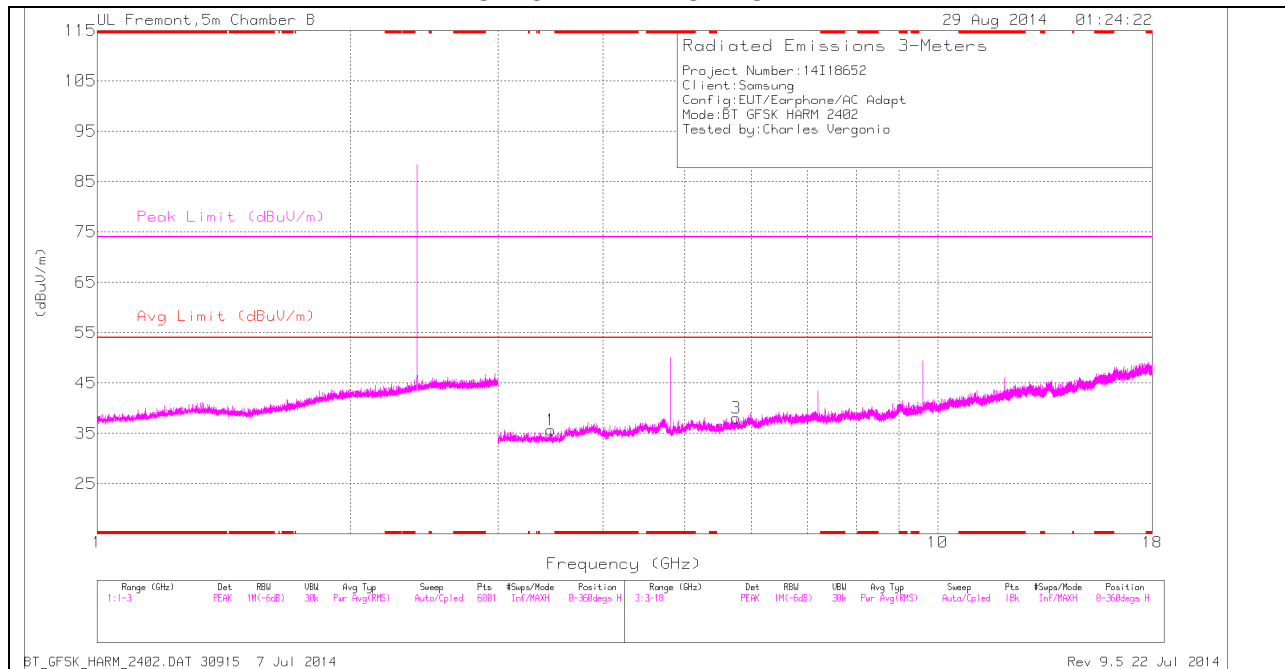

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

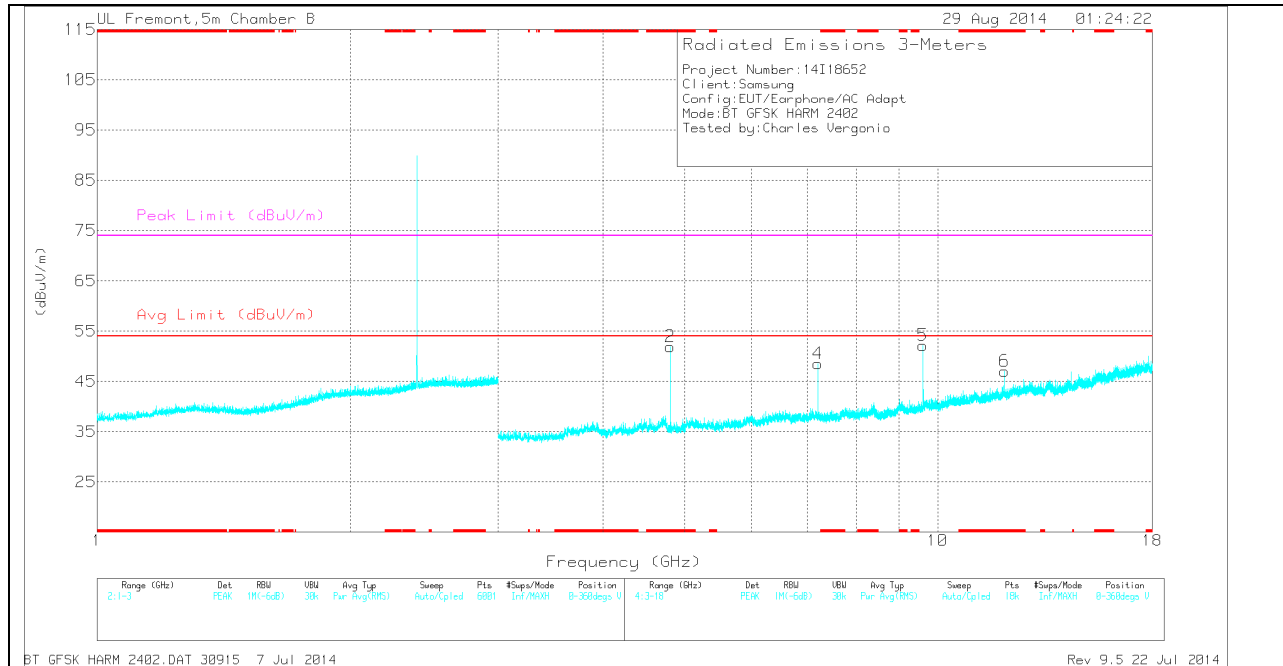

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.804	47.32	PK	34.2	-29.6	0	51.92	-	-	74	-22.08	0-360	101	V
6	* 12.01	30.46	PK	38.7	-22.1	0	47.06	-	-	74	-26.94	0-360	200	V
1	3.466	33.83	PK	32.8	-31	0	35.63	-	-	-	-	0-360	200	H
3	5.758	33.23	PK	34.6	-29.8	0	38.03	-	-	-	-	0-360	200	H
4	7.206	40.35	PK	35.5	-27.3	0	48.55	-	-	-	-	0-360	200	V
5	9.607	39.88	PK	36.8	-24.5	0	52.18	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	51.11	PK3	34.2	-29.6	0	55.71	-	-	74	-18.29	33	241	V
* 4.804	46.87	VB1T	34.2	-29.6	0	51.47	54	-2.53	-	-	33	241	V
* 12.01	37.71	PK3	38.7	-22.1	0	54.31	-	-	74	-19.69	148	201	V
* 12.01	29.01	VB1T	38.7	-22.1	0	45.61	54	-8.39	-	-	148	201	V
7.206	46.62	PK3	35.5	-27.3	0	54.82	-	-	-	-	112	205	V
7.206	39.85	VB1T	35.5	-27.3	0	48.05	-	-	-	-	112	205	V
9.608	45.88	PK3	36.8	-24.5	0	58.18	-	-	-	-	57	178	V
9.608	39.89	VB1T	36.8	-24.5	0	52.19	-	-	-	-	57	178	V
14.646	38.07	PK3	39.4	-20.9	0	56.57	-	-	-	-	30	345	V
14.646	28	VB1T	39.4	-20.9	0	46.5	-	-	-	-	30	345	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL HORIZONTAL

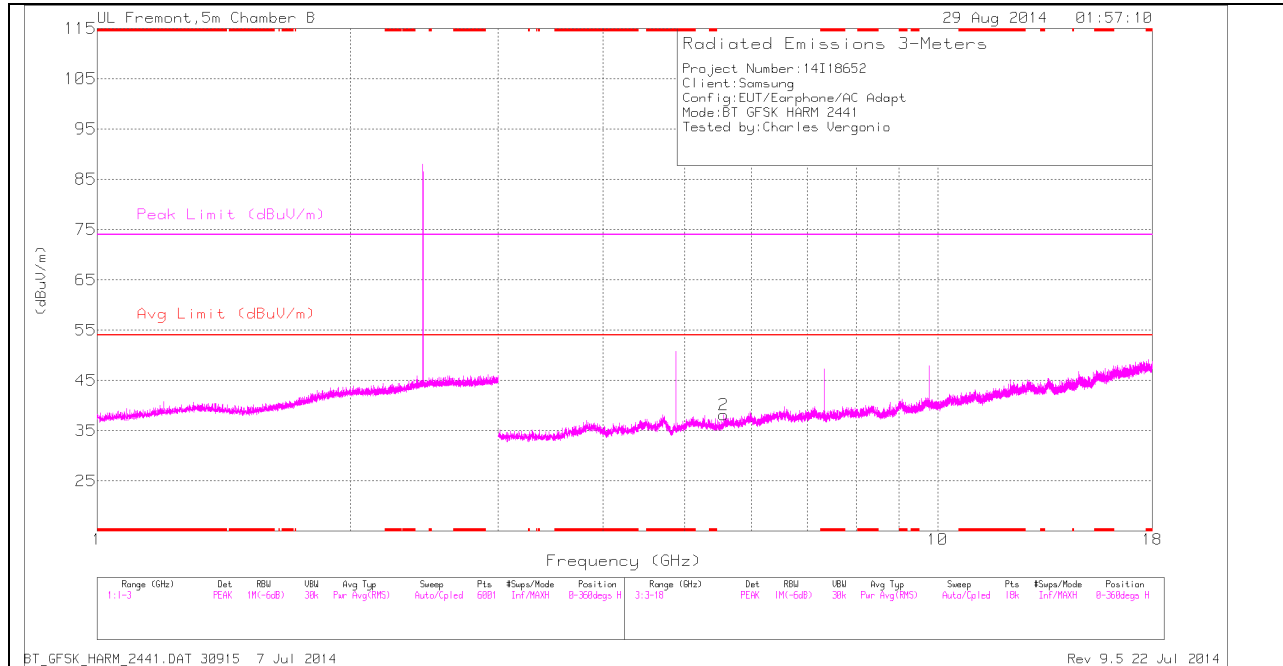

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

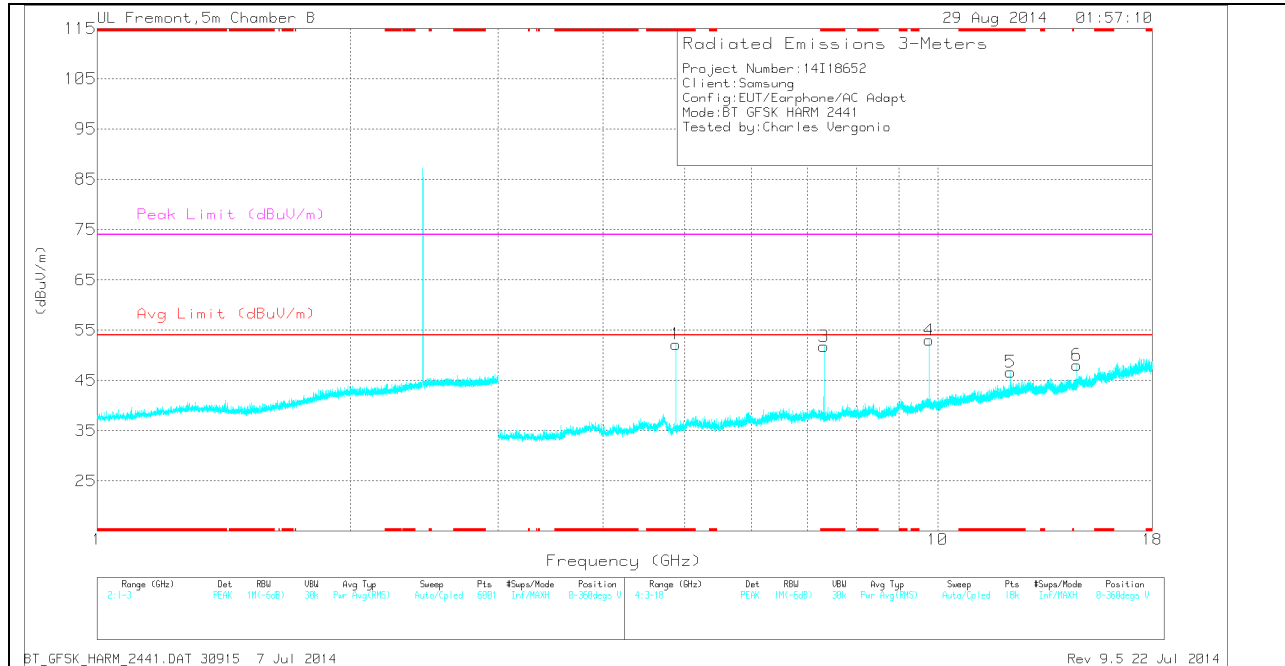

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.882	48.71	PK	34.2	-30.7	0	52.21	-	-	74	-21.79	0-360	101	V
3	* 7.322	44.58	PK	35.6	-28.4	0	51.78	-	-	74	-22.22	0-360	200	V
5	* 12.206	30.18	PK	38.9	-22.4	0	46.68	-	-	74	-27.32	0-360	200	V
2	5.562	33.77	PK	34.5	-30.1	0	38.17	-	-	-	-	0-360	200	H
4	9.764	40.43	PK	36.9	-24.3	0	53.03	-	-	-	-	0-360	200	V
6	14.646	29.56	PK	39.4	-20.9	0	48.06	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	52.77	PK3	34.2	-30.7	0	56.27	-	-	74	-17.73	55	238	V
* 4.882	49.13	VB1T	34.2	-30.7	0	52.63	54	-1.37	-	-	55	238	V
* 7.323	49.65	PK3	35.6	-28.4	0	56.85	-	-	74	-17.15	110	230	V
* 7.323	43.56	VB1T	35.6	-28.4	0	50.76	54	-3.24	-	-	110	230	V
* 12.204	38.37	PK3	38.9	-22.4	0	54.87	-	-	74	-19.13	50	200	V
* 12.205	27.43	VB1T	38.9	-22.4	0	43.93	54	-10.07	-	-	50	200	V
9.764	46.51	PK3	36.9	-24.3	0	59.11	-	-	-	-	74	179	V
9.764	39.89	VB1T	36.9	-24.3	0	52.49	-	-	-	-	74	179	V
14.646	38.07	PK3	39.4	-20.9	0	56.57	-	-	-	-	30	345	V
14.646	28	VB1T	39.4	-20.9	0	46.5	-	-	-	-	30	345	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

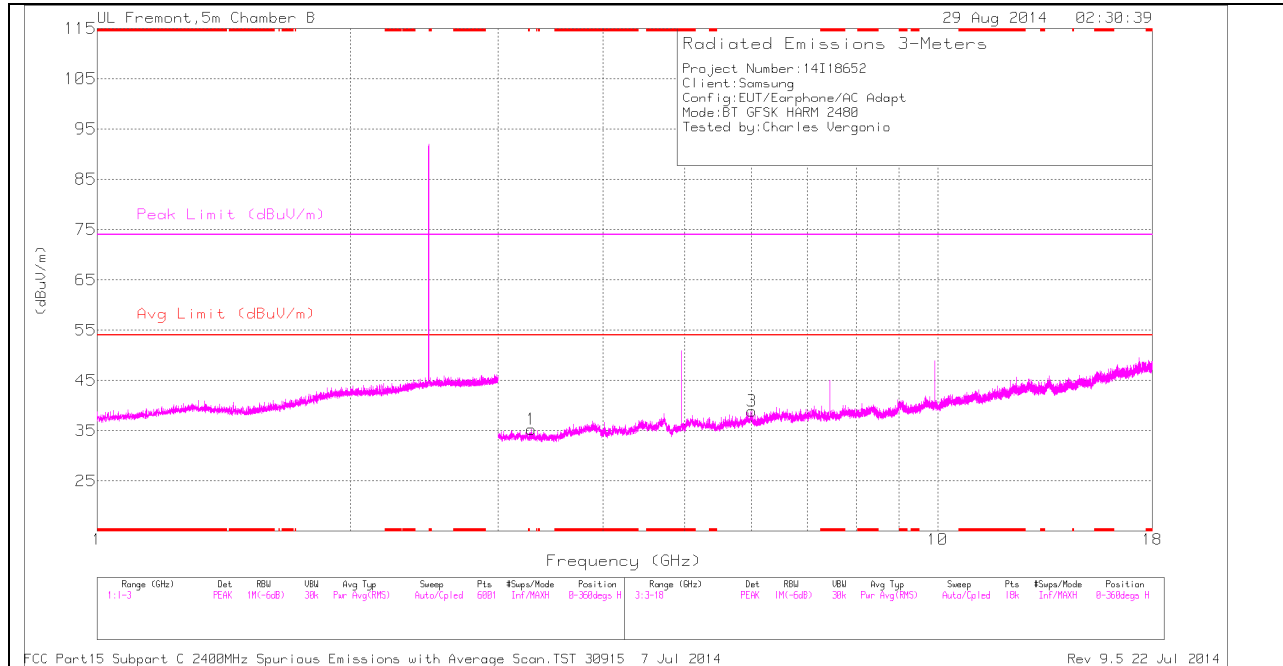

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

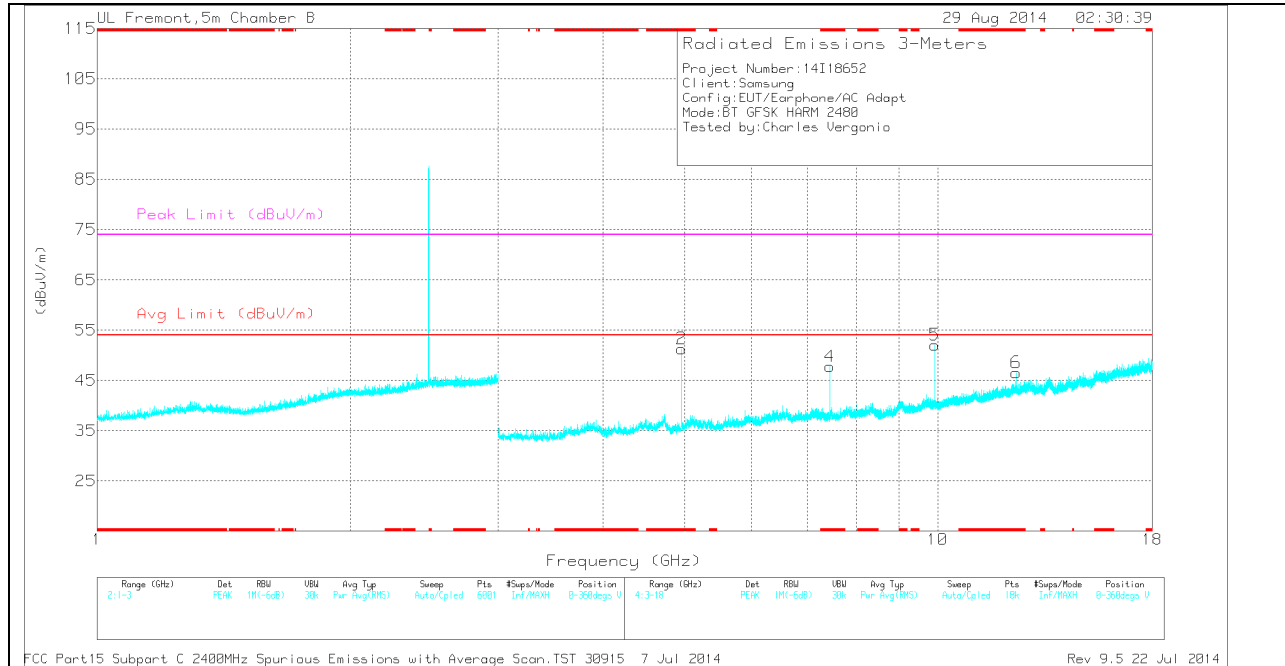

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.96	47.72	PK	34.2	-30.6	0	51.32	-	-	74	-22.68	0-360	101	V
4	* 7.44	39.15	PK	35.6	-27	0	47.75	-	-	74	-26.25	0-360	200	V
6	* 12.399	29.74	PK	39	-22.2	0	46.54	-	-	74	-27.46	0-360	200	V
1	3.287	33.68	PK	32.8	-31.2	0	35.28	-	-	-	-	0-360	101	H
3	6.008	32.68	PK	35.3	-29.1	0	38.88	-	-	-	-	0-360	200	H
5	9.92	39.17	PK	37	-24.1	0	52.07	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	52.23	PK3	34.2	-30.6	0	55.83	-	-	74	-18.17	46	257	V
* 4.96	48.02	VB1T	34.2	-30.6	0	51.62	54	-2.38	-	-	46	257	V
* 7.44	45.49	PK3	35.6	-26.9	0	54.19	-	-	74	-19.81	115	223	V
* 7.44	38.65	VB1T	35.6	-27	0	47.25	54	-6.75	-	-	115	223	V
* 12.4	38.41	PK3	39	-22.2	0	55.21	-	-	74	-18.79	177	151	V
* 12.4	27.28	VB1T	39	-22.2	0	44.08	54	-9.92	-	-	177	151	V
9.92	45.5	PK3	37	-24.1	0	58.4	-	-	-	-	81	203	V
9.92	39.58	VB1T	37	-24.1	0	52.48	-	-	-	-	81	203	V
9.92	45.82	PK3	37	-24.1	0	58.72	-	-	-	-	81	203	V
9.92	39.58	VB1T	37	-24.1	0	52.48	-	-	-	-	81	203	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

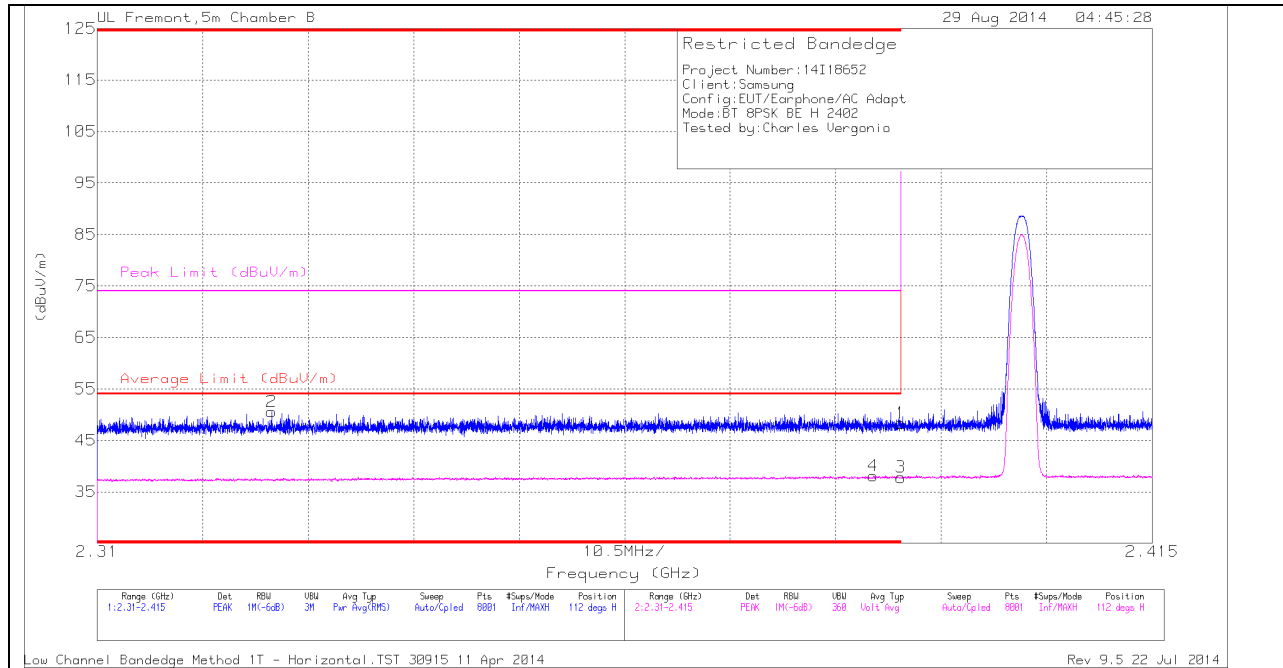

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.92	PK	32.1	-22.7	0	48.32	-	-	74	-25.68	112	378	H
2	* 2.327	41.56	PK	31.8	-22.8	0	50.56	-	-	74	-23.44	112	378	H
3	* 2.39	28.41	VB1T	32.1	-22.7	0	37.81	54	-16.19	-	-	112	378	H
4	* 2.387	28.7	VB1T	32.1	-22.7	0	38.1	54	-15.9	-	-	112	378	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

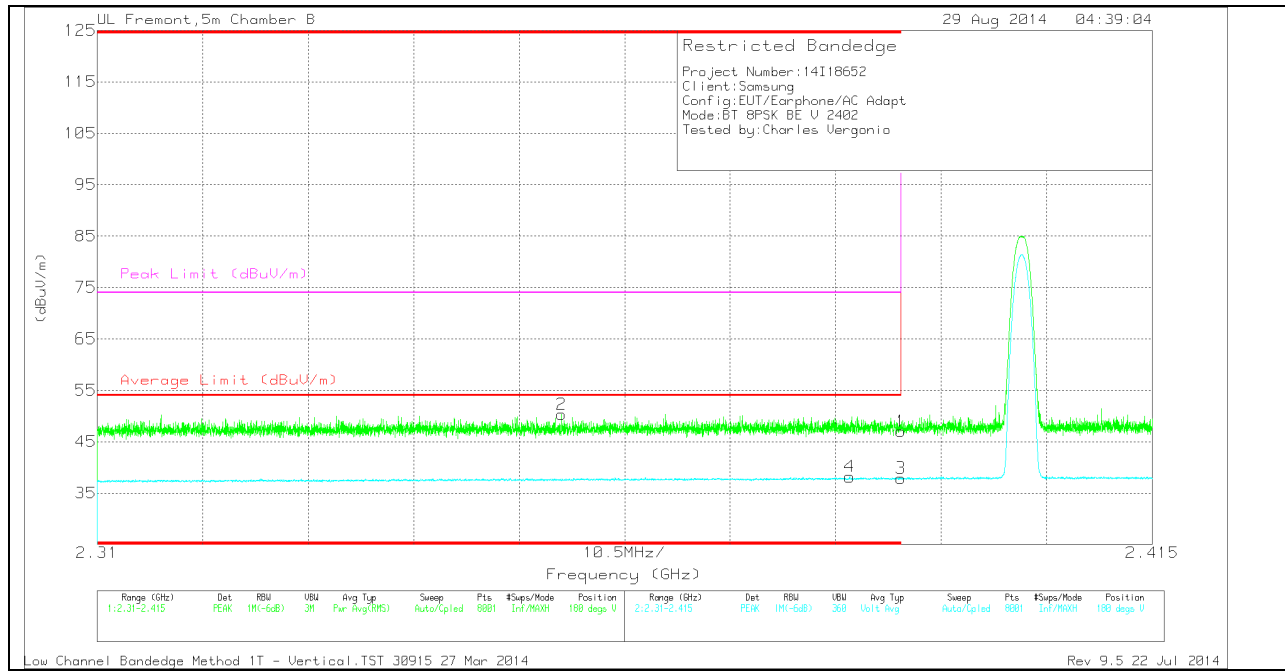

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.61	PK	32.1	-22.7	0	47.01	-	-	74	-26.99	180	260	V
2	* 2.356	41.22	PK	31.9	-22.8	0	50.32	-	-	74	-23.68	180	260	V
3	* 2.39	28.49	VB1T	32.1	-22.7	0	37.89	54	-16.11	-	-	180	260	V
4	* 2.385	28.78	VB1T	32.1	-22.7	0	38.18	54	-15.82	-	-	180	260	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

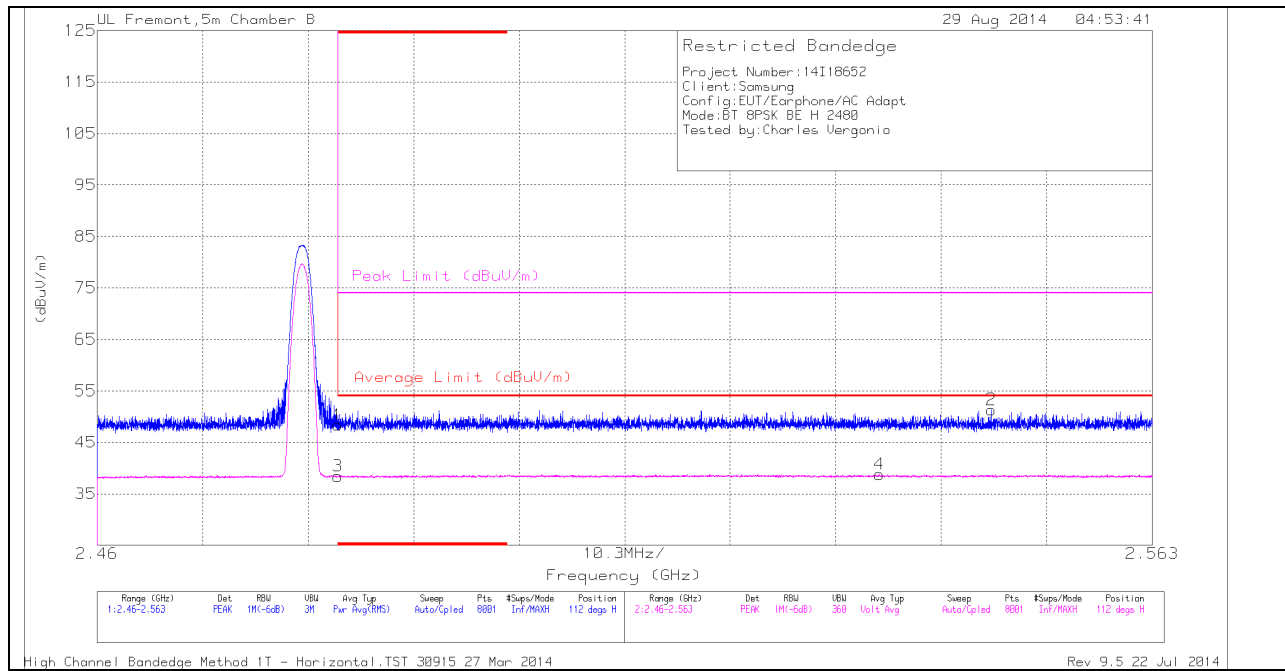

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.57	PK	32.4	-22.6	0	48.37	-	-	74	-25.63	112	378	H
3	* 2.484	28.62	VB1T	32.4	-22.6	0	38.42	54	-15.58	-	-	112	378	H
4	2.536	28.79	VB1T	32.5	-22.5	0	38.79	54	-15.21	-	-	112	378	H
2	2.547	41.33	PK	32.5	-22.5	0	51.33	-	-	74	-22.67	112	378	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

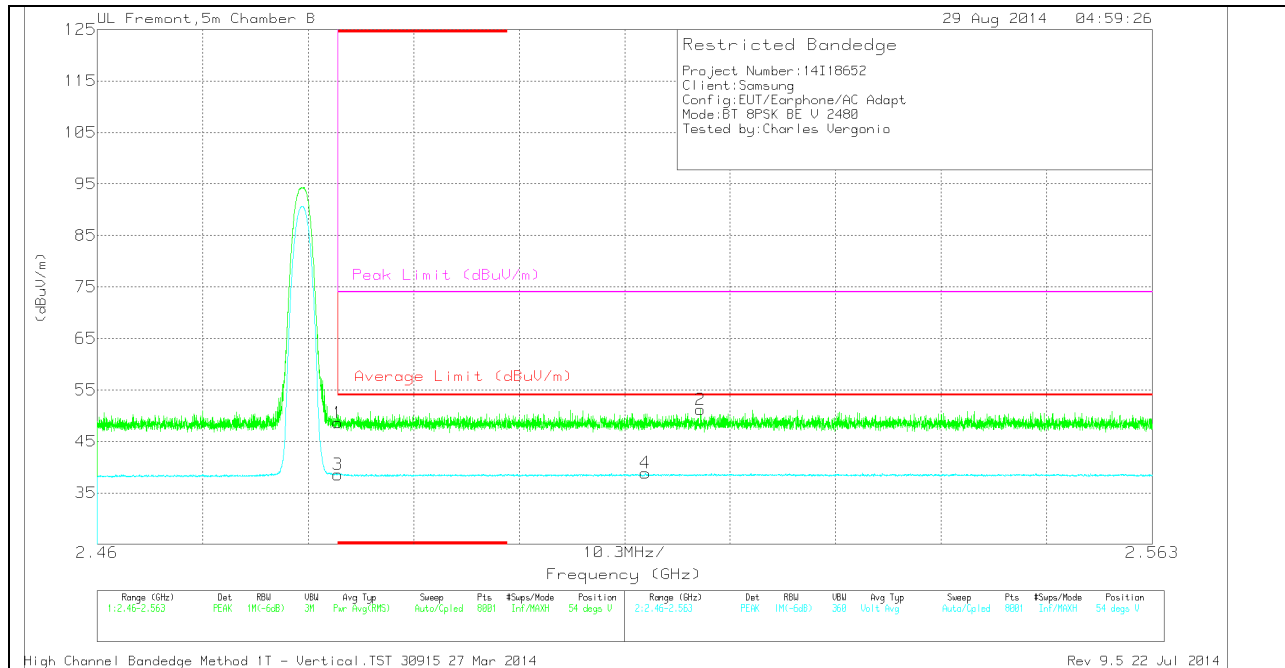

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.79	PK	32.4	-22.6	0	48.59	-	-	74	-25.41	54	354	V
3	* 2.484	28.75	VB1T	32.4	-22.6	0	38.55	54	-15.45	-	-	54	354	V
4	2.514	28.86	VB1T	32.5	-22.5	0	38.86	54	-15.14	-	-	54	354	V
2	2.519	41.19	PK	32.5	-22.5	0	51.19	-	-	74	-22.81	54	354	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

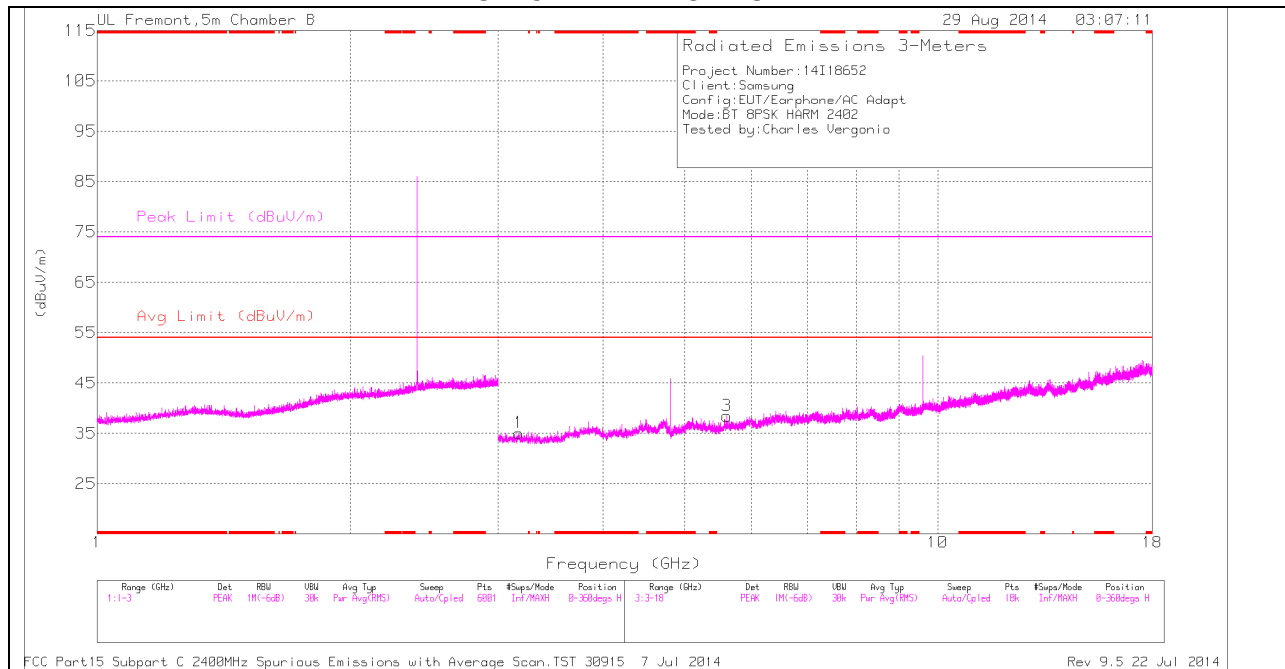

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

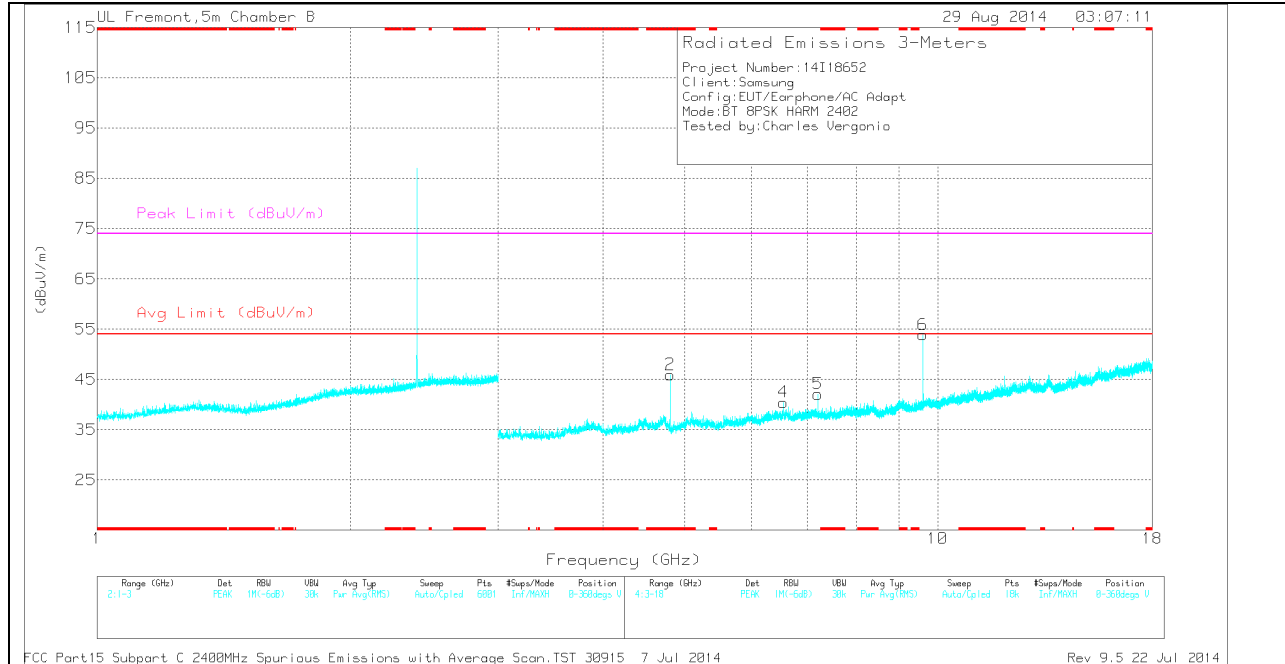

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.804	41.35	PK	34.2	-29.6	0	45.95	-	-	74	-28.05	0-360	101	V
1	3.174	33.39	PK	32.8	-31.1	0	35.09	-	-	-	-	0-360	199	H
3	5.61	33.38	PK	34.5	-29.4	0	38.48	-	-	-	-	0-360	101	H
4	6.551	33.17	PK	35.7	-28.4	0	40.47	-	-	-	-	0-360	199	V
5	7.206	33.9	PK	35.5	-27.3	0	42.1	-	-	-	-	0-360	199	V
6	9.608	41.59	PK	36.8	-24.5	0	53.89	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	50.32	PK3	34.2	-29.6	0	54.92	-	-	74	-19.08	35	267	V
* 4.804	41.75	VB1T	34.2	-29.6	0	46.35	54	-7.65	-	-	35	267	V
9.608	45.1	PK3	36.8	-24.5	0	57.4	-	-	-	-	78	237	V
9.608	41.52	VB1T	36.8	-24.5	0	53.82	-	-	-	-	78	237	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL HORIZONTAL

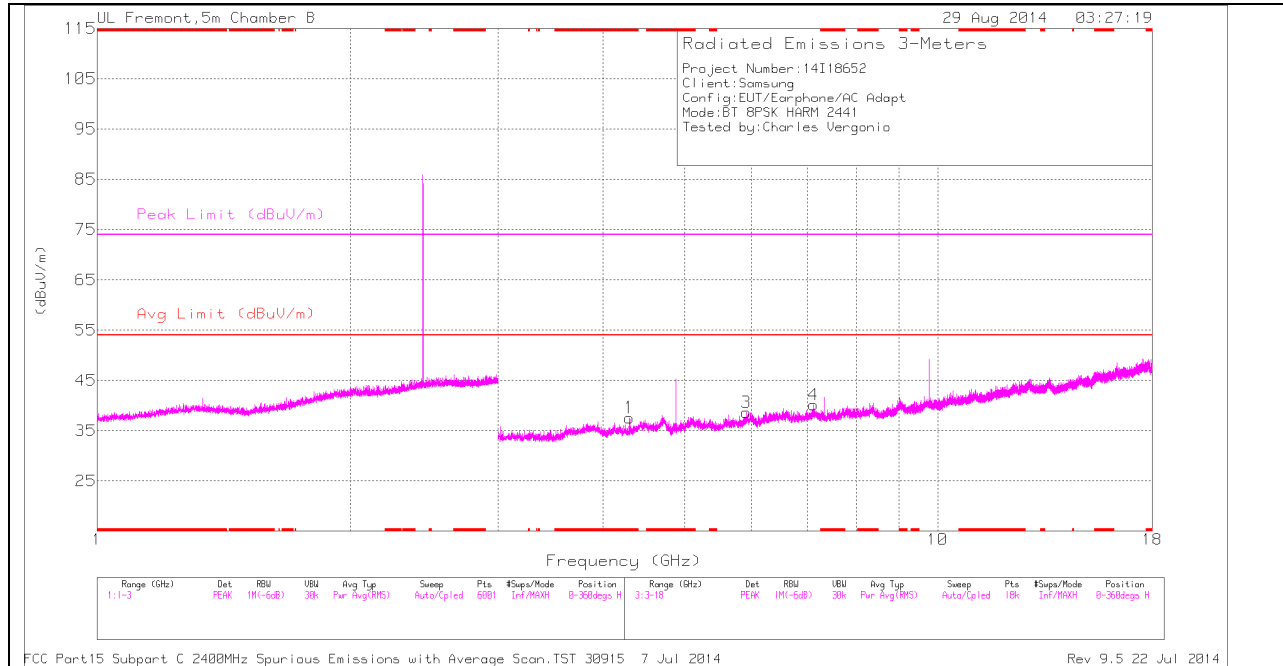

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

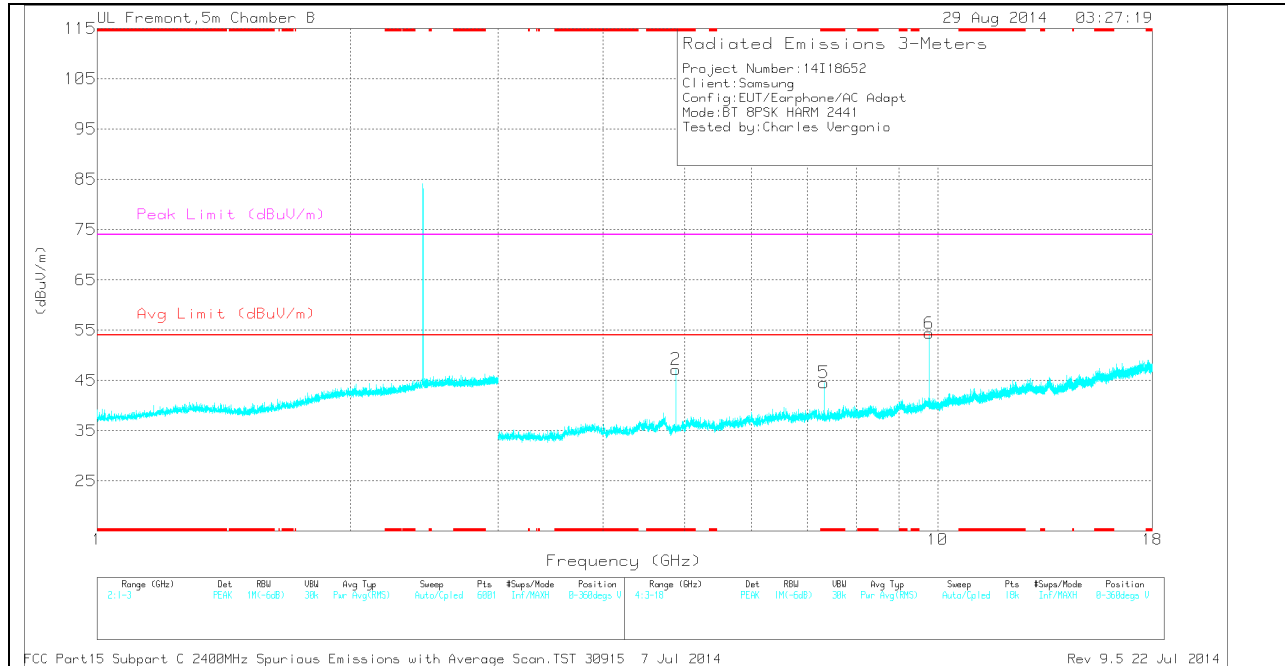

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.301	34.98	PK	33.7	-31.1	0	37.58	-	-	74	-36.42	0-360	101	H
2	* 4.882	43.67	PK	34.2	-30.7	0	47.17	-	-	74	-26.83	0-360	101	V
5	* 7.323	37.36	PK	35.6	-28.4	0	44.56	-	-	74	-29.44	0-360	200	V
3	5.917	32.26	PK	35	-28.6	0	38.66	-	-	-	-	0-360	200	H
4	7.113	31.75	PK	35.6	-27.2	0	40.15	-	-	-	-	0-360	101	H
6	9.764	41.8	PK	36.9	-24.3	0	54.4	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	51.05	PK3	34.2	-30.7	0	54.55	-	-	74	-19.45	38	236	V
* 4.882	42.7	VB1T	34.2	-30.7	0	46.2	54	-7.8	-	-	38	236	V
* 7.323	47.62	PK3	35.6	-28.4	0	54.82	-	-	74	-19.18	110	231	V
* 7.323	36.26	VB1T	35.6	-28.4	0	43.46	54	-10.54	-	-	110	231	V
9.764	45.5	PK3	36.9	-24.3	0	58.1	-	-	-	-	74	211	V
9.764	40.44	VB1T	36.9	-24.3	0	53.04	-	-	-	-	74	211	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

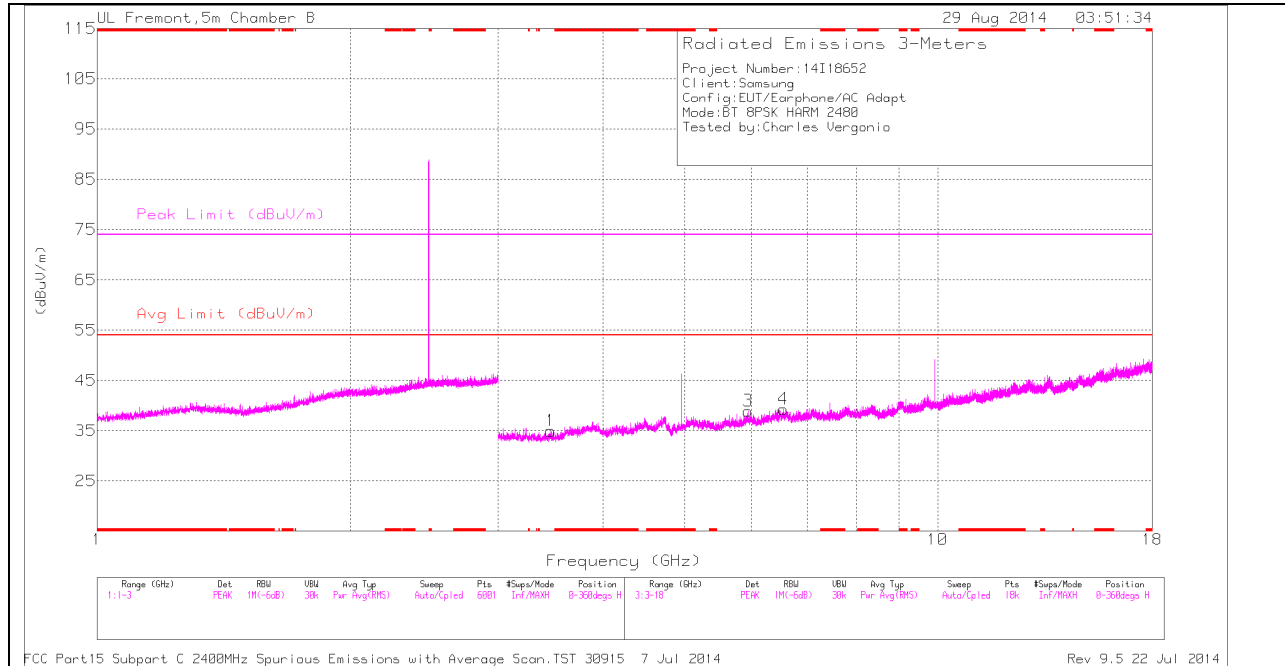

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

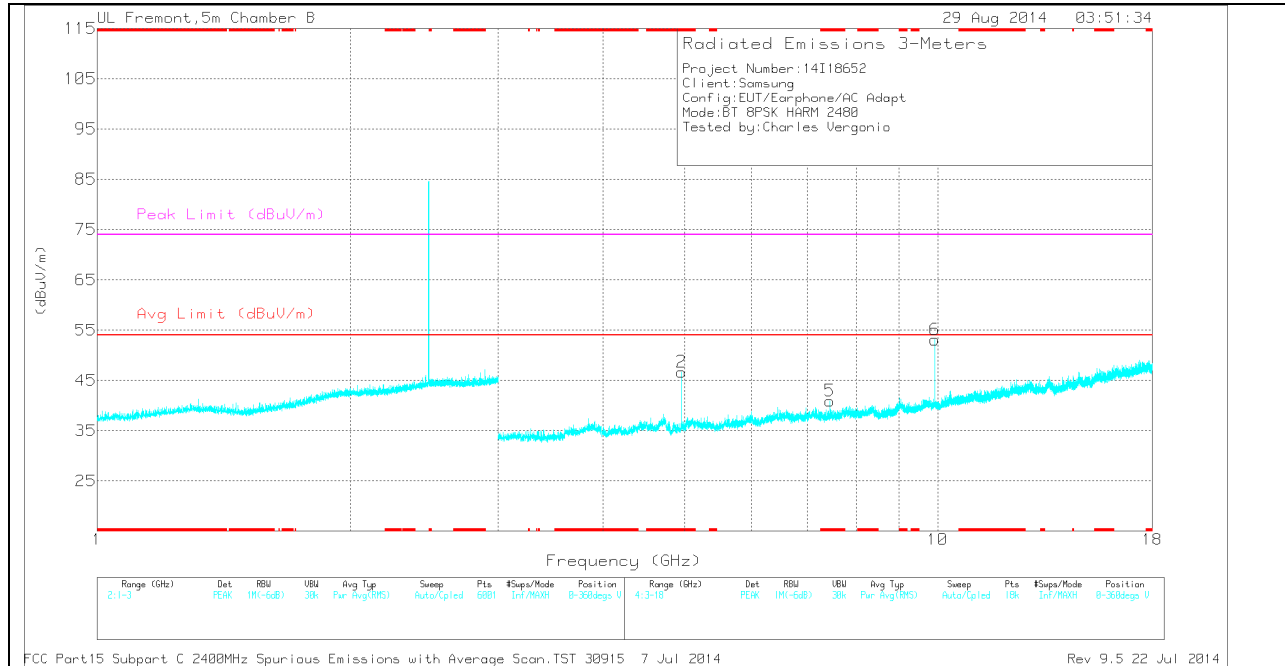

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.96	43.08	PK	34.2	-30.6	0	46.68	-	-	74	-27.32	0-360	101	V
5	* 7.44	32.34	PK	35.6	-27	0	40.94	-	-	74	-33.06	0-360	199	V
1	3.463	33.18	PK	32.8	-31	0	34.98	-	-	-	-	0-360	101	H
3	5.954	32.44	PK	35.1	-28.6	0	38.94	-	-	-	-	0-360	199	H
4	6.556	31.92	PK	35.7	-28.3	0	39.32	-	-	-	-	0-360	101	H
6	9.92	40.21	PK	37	-24.1	0	53.11	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	50.89	PK3	34.2	-30.6	0	54.49	-	-	74	-19.51	52	254	V
* 4.96	42.48	VB1T	34.2	-30.6	0	46.08	54	-7.92	-	-	52	254	V
* 7.44	44.06	PK3	35.6	-27	0	52.66	-	-	74	-21.34	114	226	V
* 7.44	32.26	VB1T	35.6	-27	0	40.86	54	-13.14	-	-	114	226	V
9.92	44.79	PK3	37	-24.1	0	57.69	-	-	-	-	81	203	V
9.92	40.4	VB1T	37	-24.1	0	53.3	-	-	-	-	81	203	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

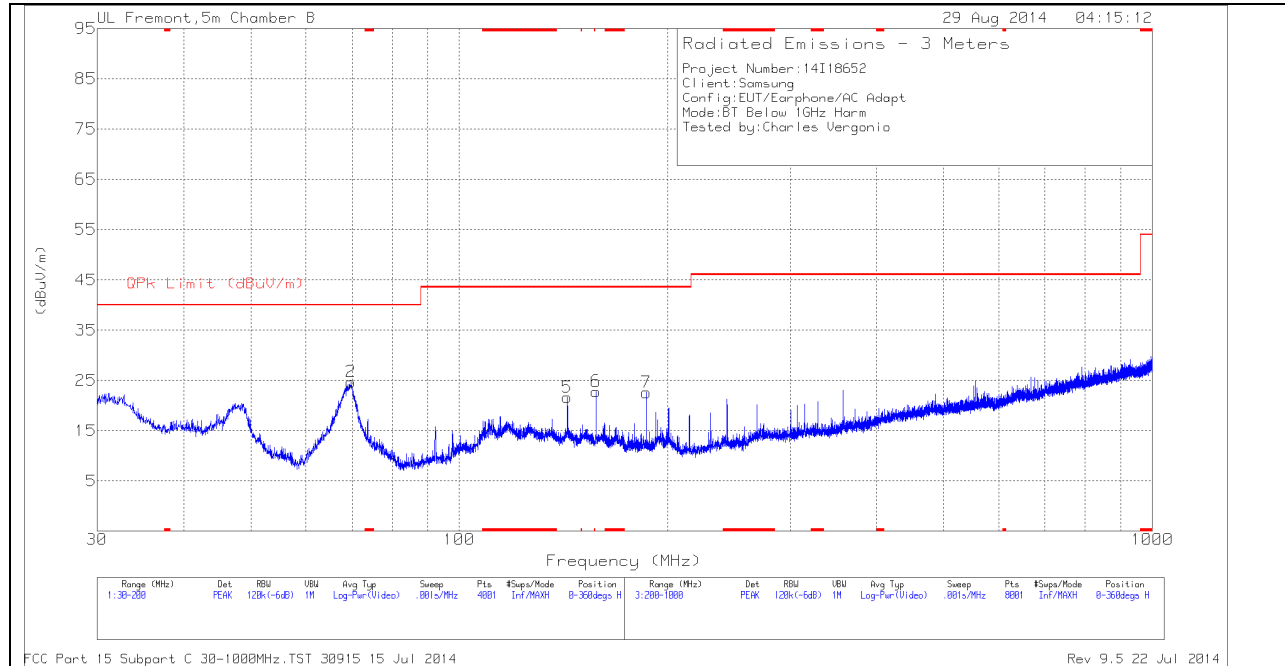

VERTICAL PLOT

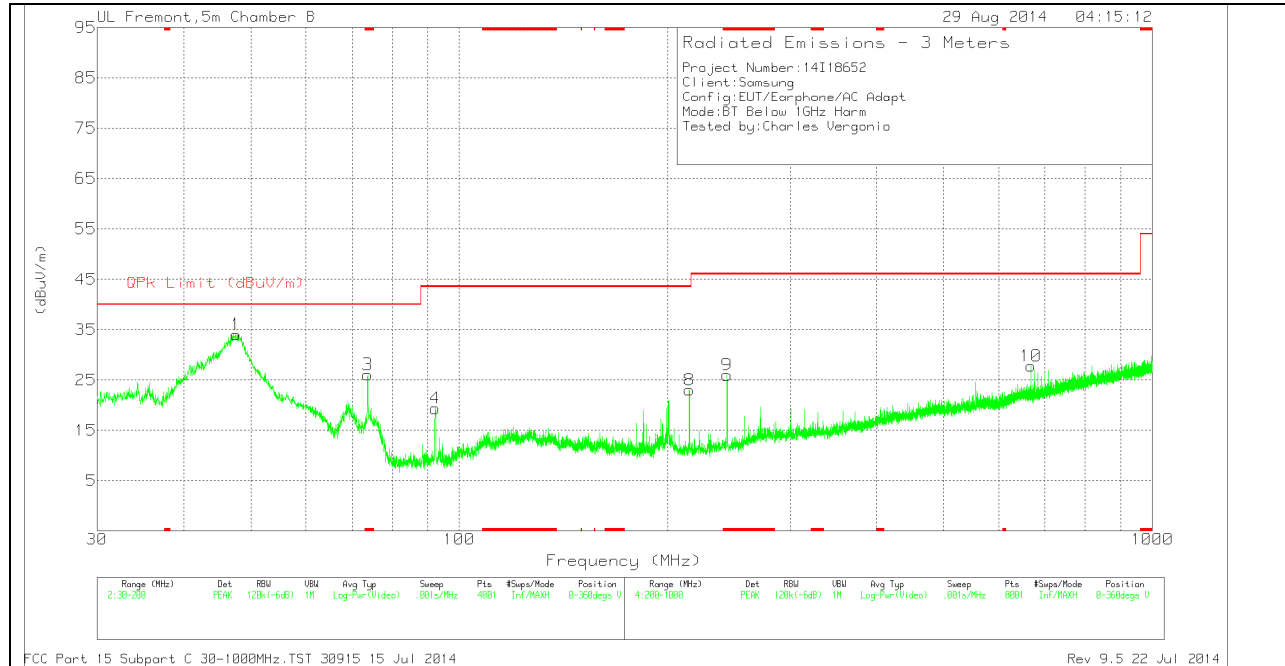

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 73.7325	46.25	PK	8.1	-28.3	26.05	40	-13.95	0-360	101	V
9	* 243.4	40.68	PK	11.7	-26.4	25.98	46.02	-20.04	0-360	300	V
1	47.6375	53.64	PK	9	-28.6	34.04	40	-5.96	0-360	101	V
2	69.7375	44.91	PK	8.1	-28.3	24.71	40	-15.29	0-360	200	H
4	92.305	39.26	PK	8.2	-28.1	19.36	43.52	-24.16	0-360	101	V
5	143.1775	36.42	PK	12.7	-27.5	21.62	43.52	-21.9	0-360	200	H
6	157.5	38.01	PK	12.2	-27.4	22.81	43.52	-20.71	0-360	101	H
7	186.145	38.71	PK	10.9	-27	22.61	43.52	-20.91	0-360	400	H
8	214.8	39.24	PK	10.6	-26.8	23.04	43.52	-20.48	0-360	200	V
10	668	33.07	PK	19.6	-24.9	27.77	46.02	-18.25	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


LINE 1 PLOT

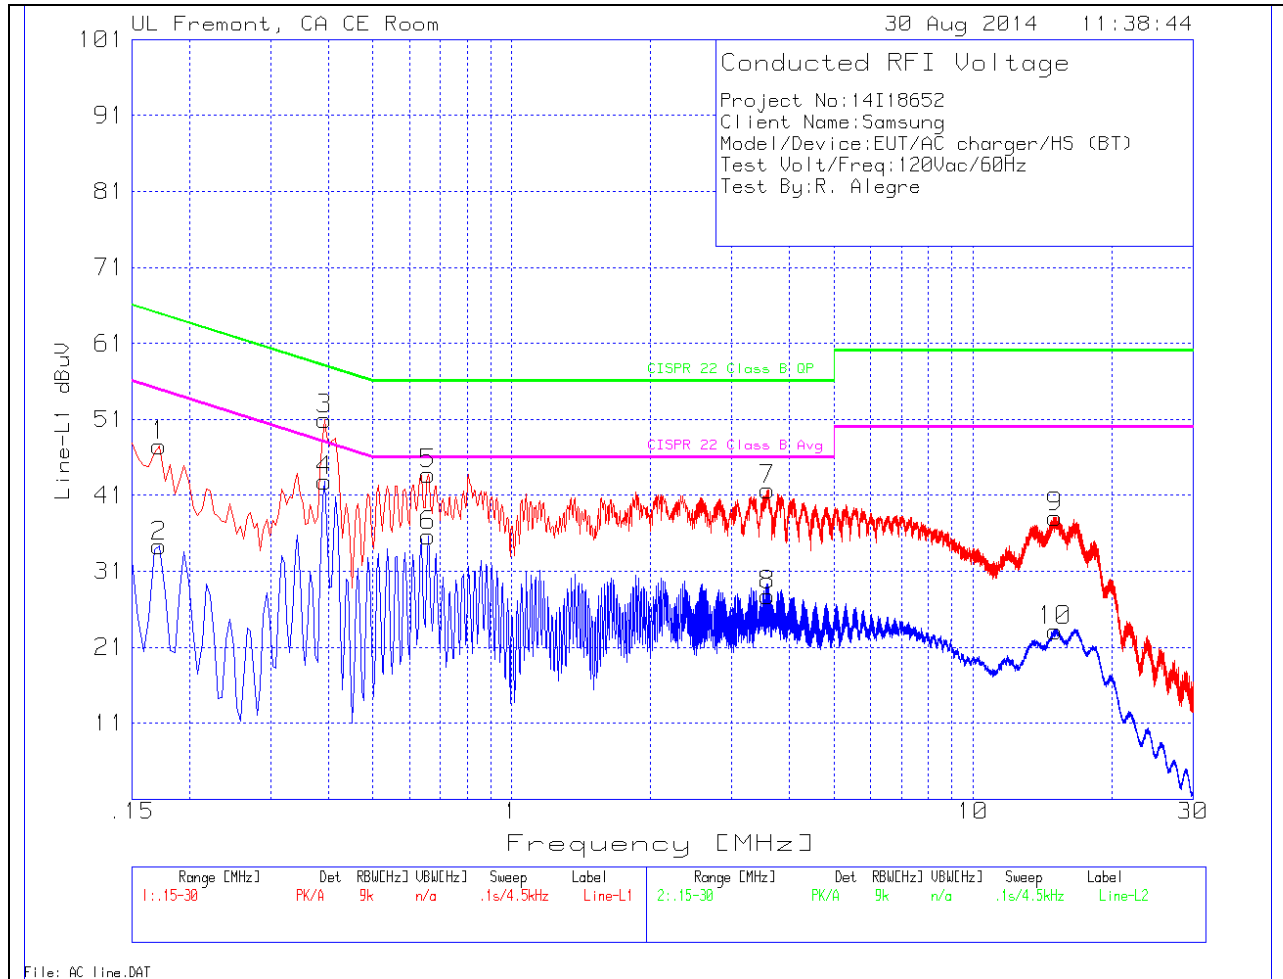

LINE 1 RESULTS

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1725	46.33	PK	1.2	0	47.53	64.8	-17.27	-	-
2	.1725	33.08	Av	1.2	0	34.28	-	-	54.8	-20.52
3	.393	50.63	PK	.4	0	51.03	58	-6.97	-	-
4	.393	42.42	Av	.4	0	42.82	-	-	48	-5.18
5	.6585	43.41	PK	.3	0	43.71	56	-12.29	-	-
6	.6585	35.33	Av	.3	0	35.63	-	-	46	-10.37
7	3.5925	41.42	PK	.2	.1	41.72	56	-14.28	-	-
8	3.5925	27.52	Av	.2	.1	27.82	-	-	46	-18.18
9	15.099	37.58	PK	.3	.2	38.08	60	-21.92	-	-
10	15.099	22.58	Av	.3	.2	23.08	-	-	50	-26.92

LINE 2 PLOT

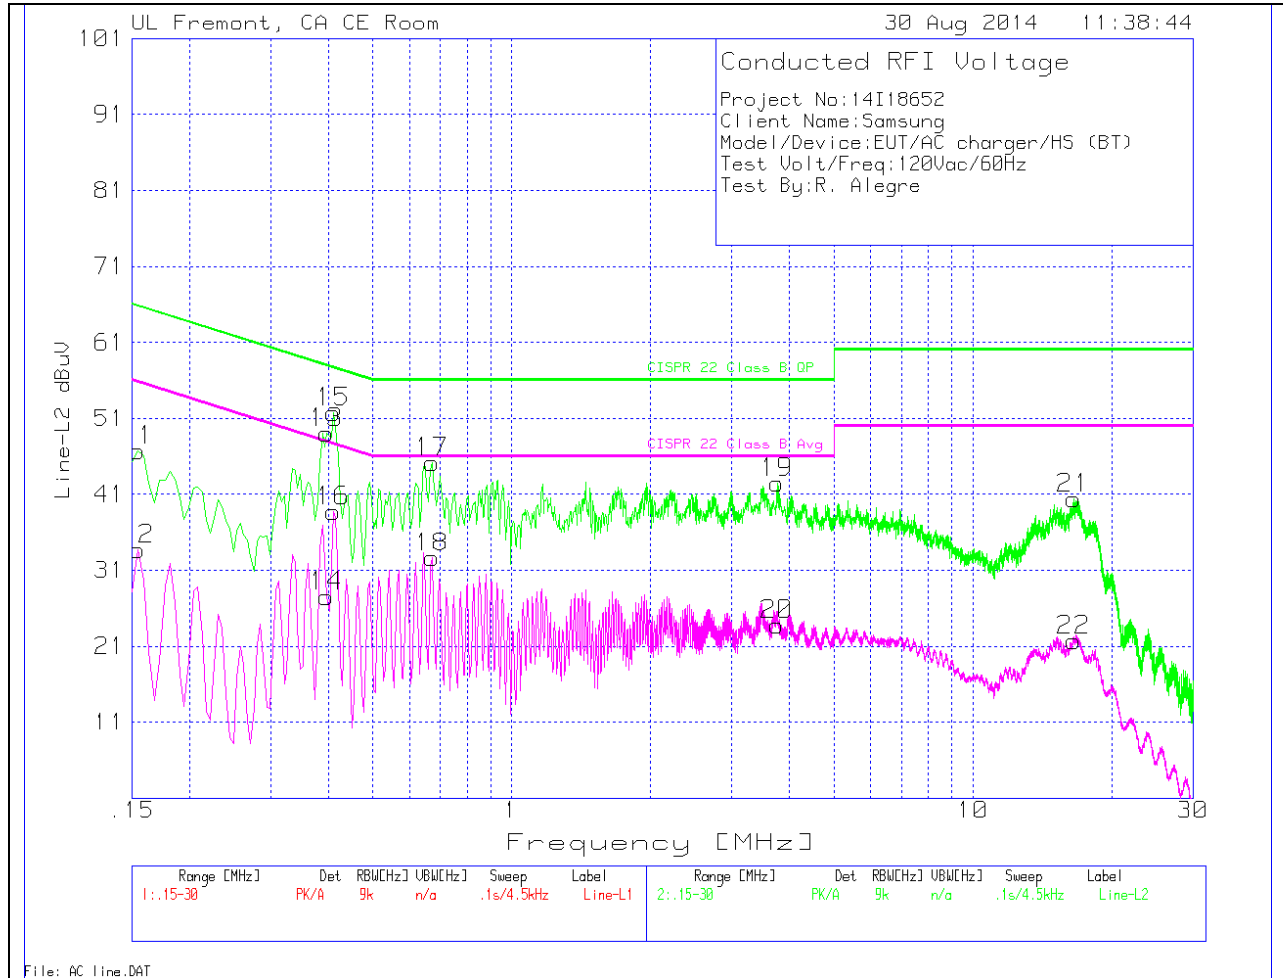

File: AC Line.DAT

LINE 2 RESULTS

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
11	.1545	45.28	PK	1.4	0	46.68	65.8	-19.12	-	-
12	.1545	32.33	Av	1.4	0	33.73	-	-	55.8	-22.07
13	.3975	48.67	PK	.4	0	49.07	57.9	-8.83	-	-
14	.3975	27.06	Av	.4	0	27.46	-	-	47.9	-20.44
15	.411	51.35	PK	.4	0	51.75	57.6	-5.85	-	-
16	.411	38.35	Av	.4	0	38.75	-	-	47.6	-8.85
17	.672	44.87	PK	.3	0	45.17	56	-10.83	-	-
18	.672	32.31	Av	.3	0	32.61	-	-	46	-13.39
19	3.759	42.15	PK	.2	.1	42.45	56	-13.55	-	-
20	3.759	23.49	Av	.2	.1	23.79	-	-	46	-22.21
21	16.539	39.91	PK	.3	.2	40.41	60	-19.59	-	-
22	16.539	21.26	Av	.3	.2	21.76	-	-	50	-28.24