

FCC Sub6 REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

January 21, 2022

Location:

HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-RF-2201-FC080

FCC ID: A3LSMA536U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A536U
 Additional Model(s): SM-A536U1/DS, SM-S536DL, SM-A536W
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n30 (5)	2307.5 – 2312.5	4M50G7D	PI/2 BPSK	0.119	20.76
		4M54G7D	QPSK	0.118	20.72
		4M53W7D	16QAM	0.093	19.70
		4M56W7D	64QAM	0.064	18.04
		4M53W7D	256QAM	0.041	16.11
Sub6 n30 (10)	2310.0	8M98G7D	PI/2 BPSK	0.088	19.47
		9M03G7D	QPSK	0.087	19.40
		9M01W7D	16QAM	0.079	18.97
		9M04W7D	64QAM	0.057	17.54
		9M01W7D	256QAM	0.040	16.06

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2201-FC080

REVIEWED BY



Report prepared by : Jung Ki Lim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2201-FC080	January 21, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	25
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST PLOTS.....	36
10. ANNEX A_ TEST SETUP PHOTO.....	178

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA536U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-A536U
Additional Model(s):	SM-A536U1/DS, SM-S536DL, SM-A536W
SCS(kHz):	15
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	2307.5 MHz – 2312.5 MHz (Sub6 n30 (5 MHz)) 2310.0 MHz (Sub6 n30 (10 MHz))
Date(s) of Tests:	November 15, 2021 ~ January 18, 2022
Serial number:	Radiated: R3CRA0Y79KT Conducted: 594d1d616f257ece

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven
by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = \text{Pg}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

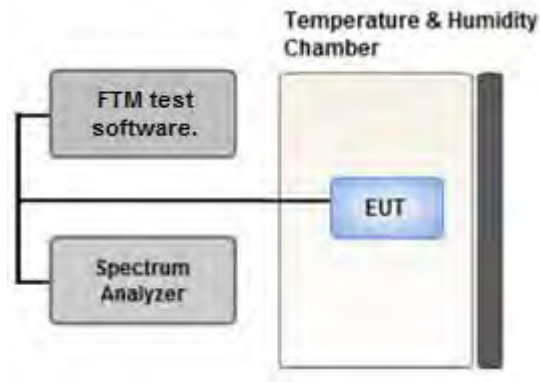

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. \text{ (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

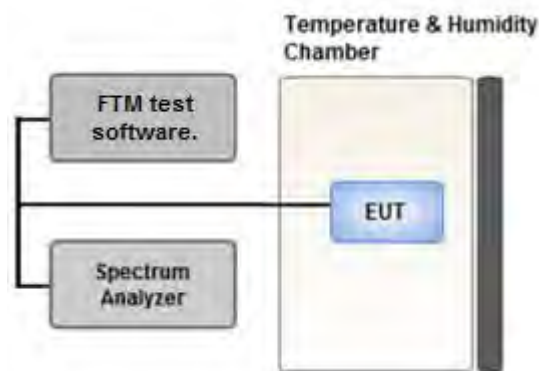

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

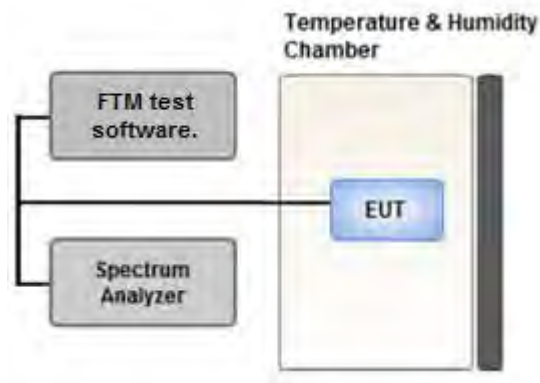

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 BAND EDGE

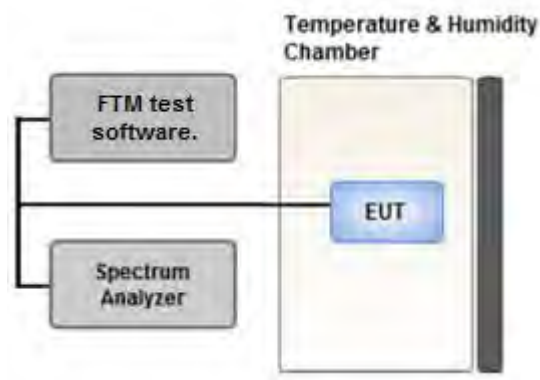

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Limit

§27.53(a)

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

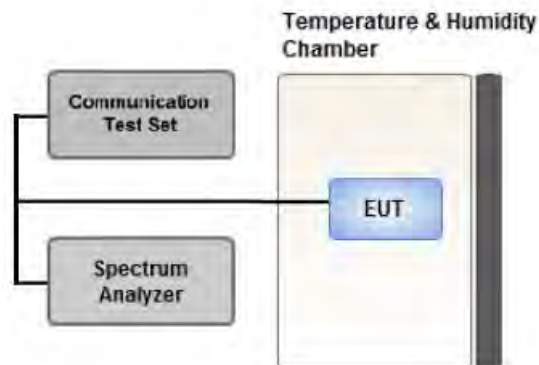

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.

Mode: NSA,SA

Worst case: NSA(12A-n30A)

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location. There has no significant emission raised.

Mode : WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)

- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).

All EN-DC mode of operation were investigated and the worst case configuration results are reported.

(Worst case: 12A-n30A(BW 10 MHz))

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-A536U & additional models were tested and the worst case results are reported.

(Worst case : SM-A536U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1	1	X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	1	1	Y

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA, NSA

Worst case: NSA(5A-n30A)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-A536U & additional models were tested and the worst case results are reported.

(Worst case : SM-A536U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Radio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5, 10	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low, Mid, High	1	0, 24
		10	Mid	1	0, 51
		5	Low, Mid, High	Full RB	0
		10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5	Low, Mid, High	1	1
		10	Mid	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	05/30/2022	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	05/30/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	02289	05/08/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	05/18/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	06/15/2022	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	06/15/2022	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	06/15/2022	Annual
LOW NOISE AMP (100 MHz ~ 18GHz)	CBLU1183540B-01	CERNEX	26822	06/15/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/15/2022	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Signal Analyzer(10Hz~26.5GHz)	N9020A	Agilent	MY51110063	04/22/2022	Annual
ATTENUATOR(20dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10Hz~40GHz)	FSV40	REOHDE & SCHWARZ	101436	03/02/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/25/2022	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/26/2022	Annual
SIGNAL GENERATOR (100kHz~40GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5Hz~40.0GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(a)	Section 3.7	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. All conducted tests except frequency stability were tested using FTM test software.
(Frequency stability was tested using 5G Wireless Tester.)

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(a)(3)	< 0.25 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(a)	< 70 + 10log10 (P[Watts])	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
462000	2310.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2307.5	Sub6 n30/ 5 MHz [15 kHz]	PI/2 BPSK	-25.07	11.32	10.16	2.35	V	< 2.00	0.082	19.13
		QPSK	-25.20	11.19	10.16	2.35	V		0.079	19.00
		16-QAM	-25.56	10.83	10.16	2.35	V		0.073	18.64
		64-QAM	-27.15	9.24	10.16	2.35	V		0.051	17.05
		256-QAM	-28.20	8.19	10.16	2.35	V		0.040	16.00
2310.0		PI/2 BPSK	-24.08	12.31	10.16	2.35	V		0.103	20.12
		QPSK	-24.19	12.20	10.16	2.35	V		0.100	20.01
		16-QAM	-24.72	11.67	10.16	2.35	V		0.089	19.48
		64-QAM	-26.27	10.12	10.16	2.35	V		0.062	17.93
		256-QAM	-28.09	8.30	10.16	2.35	V		0.041	16.11
2312.5		PI/2 BPSK	-23.44	12.95	10.16	2.35	V		0.119	20.76
		QPSK	-23.48	12.91	10.16	2.35	V		0.118	20.72
		16-QAM	-24.50	11.89	10.16	2.35	V		0.093	19.70
		64-QAM	-26.16	10.23	10.16	2.35	V		0.064	18.04
		256-QAM	-28.20	8.19	10.16	2.35	V		0.040	16.00

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2310.0	Sub6 n30/ 10 MHz [15 kHz]	PI/2 BPSK	-24.73	11.66	10.16	2.35	V	< 0.25	0.088	19.47
		QPSK	-24.80	11.59	10.16	2.35	V		0.087	19.40
		16-QAM	-25.23	11.16	10.16	2.35	V		0.079	18.97
		64-QAM	-26.66	9.73	10.16	2.35	V		0.057	17.54
		256-QAM	-28.14	8.25	10.16	2.35	V		0.040	16.06

8.2 RADIATED SPURIOUS EMISSIONS

■ NR Band:	<u>N30</u>
■ Bandwidth:	<u>5 MHz</u>
■ Modulation:	<u>PI/2 BPSK</u>
■ Distance:	<u>1 meters</u>
■ SCS:	<u>15 kHz</u>
■ Limit: 70+10log10 (W)	<u>62.89 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	Detector
461500 (2307.5)	4 615.00	-56.65	11.87	-58.54	3.58	H	-50.25	71.01	Average
	6 922.50	-63.48	11.10	-56.81	4.33	V	-50.04	70.80	Peak
	9 230.00	-61.87	11.16	-52.23	5.06	V	-46.13	66.89	Peak
	11 537.50	-65.02	12.48	-51.93	5.77	V	-45.22	65.97	Peak
	13 845.00	-70.42	13.01	-56.94	6.41	V	-50.34	71.09	Average
	16 152.50	-73.60	16.50	-61.11	7.01	V	-51.62	72.37	Average
462000 (2310.0)	4 620.00	-54.24	11.86	-55.87	3.57	H	-47.58	68.34	Average
	6 930.00	-59.31	11.10	-52.18	4.32	H	-45.40	66.16	Peak
	9 240.00	-61.89	11.18	-51.89	5.04	V	-45.75	66.50	Peak
	11 550.00	-64.25	12.50	-50.84	5.79	V	-44.13	64.88	Peak
	13 860.00	-69.79	13.00	-56.69	6.42	V	-50.11	70.87	Average
	16 170.00	-73.59	16.50	-60.94	7.06	V	-51.50	72.26	Average
462500 (2312.5)	4 625.00	-50.85	11.85	-52.76	3.57	H	-44.48	65.23	Average
	6 937.50	-59.07	11.10	-51.70	4.34	H	-44.94	65.69	Peak
	9 250.00	-61.46	11.20	-51.15	5.02	V	-44.97	65.73	Peak
	11 562.50	-64.30	12.54	-51.06	5.81	V	-44.33	65.08	Peak
	13 875.00	-70.00	13.00	-57.57	6.41	V	-50.98	71.74	Average
	16 187.50	-73.33	16.50	-61.73	7.05	V	-52.28	73.04	Average

- ☒ NR Band: N30
- ☒ Bandwidth: 10 MHz
- ☒ Modulation: PI/2 BPSK
- ☒ Distance: 1 meters
- ☒ SCS: 15 kHz
- ☒ Limit: $70+10\log_{10}(W)$ 62.68 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	Detector
462000 (2310.0)	4 620.00	-55.00	11.86	-56.63	3.57	V	-48.34	67.81	Average
	6 930.00	-61.46	11.10	-54.33	4.32	H	-47.55	67.02	Peak
	9 240.00	-60.86	11.18	-50.86	5.04	H	-44.72	64.18	Peak
	11 550.00	-74.70	12.50	-61.29	5.79	H	-54.58	74.04	Average
	13 860.00	-69.90	13.00	-56.80	6.42	H	-50.22	69.69	Average
	16 170.00	-73.60	16.50	-60.95	7.06	H	-51.51	70.98	Average

- ☒ ENDC-Mode : 12A(10 MHz)-n30A(10 MHz)

Band	Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
12	23095 (707.5)	1415.00	-60.87	7.61	-67.50	1.87	H	-61.75	-13.00
		2122.50	-61.58	8.98	-67.40	2.31	H	-60.73	-13.00
		2830.00	-61.16	10.52	-65.17	2.73	V	-57.38	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n30	5 MHz	2310.0	BPSK	25	0	3.64
			QPSK			4.68
			16-QAM			4.84
			64-QAM			4.59
			256-QAM			4.97
	10 MHz		BPSK	50		3.57
			QPSK			4.65
			16-QAM			4.88
			64-QAM			4.65
			256-QAM			4.92

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 47 ~ 56.
2. Peak- to- Average Ratio is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n30	5 MHz	2310.0	BPSK	25	0	4.5040
			QPSK			4.5417
			16-QAM			4.5290
			64-QAM			4.5575
			256-QAM			4.5251
	10 MHz		BPSK	50		8.9751
			QPSK			9.0319
			16-QAM			9.0057
			64-QAM			9.0427
			256-QAM			9.0127

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 37 ~ 46.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n30	5	2307.5	4.9133	30.200	-80.212	-50.012	-40.00
		2310.0	4.0300	30.200	-80.387	-50.187	
		2312.5	4.8779	30.200	-80.761	-50.561	
	10	2310.0	7.1750	30.815	-80.517	-49.702	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 170 ~ 177.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 BAND EDGE

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	BPSK	25/0	Below 2288	-64.604	-40
				2288 - 2292	-57.488	-37
				2292 - 2296	-46.045	-31
				2296 - 2300	-38.251	-25
				2300 - 2304	-16.173	-13
				2304 - 2305	-23.144	-13
				2315 - 2320	-37.924	-13
				2320 - 2324	-47.360	-25
				2324 - 2328	-53.448	-31
				2328 - 2337	-59.730	-37
				2337 - 2341	-64.348	-31
				2341 - 2345	-64.401	-25
				2345 - 2365	-62.708	-13
				Above 2365	-64.467	-40
	2310.0	BPSK	25/0	Below 2288	-64.690	-40
				2288 - 2292	-61.462	-37
				2292 - 2296	-49.144	-31
				2296 - 2300	-43.295	-25
				2300 - 2305	-20.073	-13
				2315 - 2320	-20.934	-13
				2320 - 2324	-44.443	-25
				2324 - 2328	-48.729	-31
				2328 - 2337	-57.578	-37
				2337 - 2341	-64.157	-31
				2341 - 2345	-64.301	-25
				2345 - 2365	-62.430	-13
				Above 2365	-64.468	-40
	2312.5	BPSK	25/0	Below 2288	-64.874	-40
				2288 - 2292	-63.577	-37
				2292 - 2296	-54.232	-31
				2296 - 2300	-46.886	-25
				2300 - 2305	-39.703	-13
				2315 - 2316	-23.449	-13

10	2310.0	BPSK	50/0	2316 - 2320	-20.126	-13
				2320 - 2324	-40.784	-25
				2324 - 2328	-47.223	-31
				2328 - 2337	-54.057	-37
				2337 - 2341	-64.374	-31
				2341 - 2345	-64.437	-25
				2345 - 2365	-62.353	-13
				Above 2365	-64.351	-40
				Below 2288	-64.444	-40
				2288 - 2292	-54.635	-37
				2292 - 2296	-42.184	-31
				2296 - 2300	-26.270	-25
				2300 - 2304	-21.549	-13
				2304 - 2305	-25.550	-13
				2315 - 2316	-30.171	-13
				2316 - 2320	-22.579	-13
				2320 - 2324	-27.163	-25
				2324 - 2328	-42.715	-31
				2328 - 2337	-48.990	-37
				2337 - 2341	-64.133	-31
				2341 - 2345	-64.319	-25
				2345 - 2365	-62.956	-13
				Above 2365	-64.500	-40

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	BPSK	1/0	Below 2288	-64.523	-40
				2288 - 2292	-58.724	-37
				2292 - 2296	-46.034	-31
				2296 - 2300	-42.572	-25
				2300 - 2304	-35.329	-13
				2304 - 2305	-15.572	-13
			1/24	2315 - 2320	-43.205	-13
				2320 - 2324	-47.078	-25
				2324 - 2328	-54.443	-31
				2328 - 2337	-60.936	-37
				2337 - 2341	-64.206	-31
				2341 - 2345	-64.373	-25
				2345 - 2365	-62.931	-13
				Above 2365	-64.482	-40
	2310.0	BPSK	1/0	Below 2288	-64.826	-40
				2288 - 2292	-62.120	-37
				2292 - 2296	-49.048	-31
				2296 - 2300	-42.480	-25
				2300 - 2305	-40.499	-13
			1/24	2315 - 2320	-41.140	-13
				2320 - 2324	-43.770	-25
				2324 - 2328	-48.814	-31
				2328 - 2337	-58.007	-37
				2337 - 2341	-64.357	-31
				2341 - 2345	-64.421	-25
				2345 - 2365	-62.199	-13
				Above 2365	-64.495	-40
	2312.5	BPSK	1/0	Below 2288	-64.795	-40
				2288 - 2292	-63.950	-37
				2292 - 2296	-54.522	-31
				2296 - 2300	-45.774	-25
				2300 - 2305	-42.415	-13
			1/24	2315 - 2316	-16.222	-13

10	2310.0	BPSK		2316 - 2320	-36.479	-13
				2320 - 2324	-43.668	-25
				2324 - 2328	-45.969	-31
				2328 - 2337	-54.381	-37
				2337 - 2341	-64.367	-31
				2341 - 2345	-64.317	-25
				2345 - 2365	-62.686	-13
				Above 2365	-64.465	-40
			1/0	Below 2288	-64.725	-40
				2288 - 2292	-62.060	-37
				2292 - 2296	-48.274	-31
				2296 - 2300	-43.301	-25
				2300 - 2304	-36.568	-13
				2304 - 2305	-16.520	-13
			1/51	2315 - 2316	-16.650	-13
				2316 - 2320	-36.913	-13
				2320 - 2324	-44.630	-25
				2324 - 2328	-48.160	-31
				2328 - 2337	-57.785	-37
				2337 - 2341	-64.358	-31
				2341 - 2345	-64.398	-25
				2345 - 2365	-63.106	-13
				Above 2365	-64.421	-40

Note:

- Plots of the EUT's Band Edge are shown Page 57 ~ 169.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2307.5	100 %	+20(Ref)	2307 500 006	0.0	0.000 000	0.000
	100 %	-30	2307 500 017	11.4	0.000 000	0.005
	100 %	-20	2307 500 013	6.9	0.000 000	0.003
	100 %	-10	2307 500 020	14.5	0.000 001	0.006
	100 %	0	2307 500 019	12.8	0.000 001	0.006
	100 %	+10	2307 500 014	8.0	0.000 000	0.003
	100 %	+30	2307 500 016	9.7	0.000 000	0.004
	100 %	+40	2307 500 013	7.1	0.000 000	0.003
	100 %	+50	2307 500 015	8.9	0.000 000	0.004
	Batt. Endpoint	+20	2307 500 018	11.7	0.000 001	0.005
2312.5	100 %	+20(Ref)	2312 500 016	0.0	0.000 000	0.000
	100 %	-30	2312 500 028	11.6	0.000 001	0.005
	100 %	-20	2312 500 029	12.6	0.000 001	0.005
	100 %	-10	2312 500 029	12.5	0.000 001	0.005
	100 %	0	2312 500 027	10.4	0.000 000	0.004
	100 %	+10	2312 500 028	11.4	0.000 000	0.005
	100 %	+30	2312 500 029	13.0	0.000 001	0.006
	100 %	+40	2312 500 025	9.1	0.000 000	0.004
	100 %	+50	2312 500 026	9.4	0.000 000	0.004
	Batt. Endpoint	+20	2312 500 022	5.8	0.000 000	0.003

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2310.0	100 %	+20(Ref)	2310 000 016	0.0	0.000 000	0.000
	100 %	-30	2310 000 023	7.5	0.000 000	0.003
	100 %	-20	2310 000 031	15.1	0.000 001	0.007
	100 %	-10	2310 000 021	4.8	0.000 000	0.002
	100 %	0	2310 000 025	8.8	0.000 000	0.004
	100 %	+10	2310 000 028	11.9	0.000 001	0.005
	100 %	+30	2310 000 023	7.5	0.000 000	0.003
	100 %	+40	2310 000 032	16.6	0.000 001	0.007
	100 %	+50	2310 000 020	4.3	0.000 000	0.002
	Batt. Endpoint	+20	2310 000 024	8.1	0.000 000	0.003

9. TEST PLOTS

Sub6 n30. Occupied Bandwidth Plot (5 MHz Ch.462000 BPSK RB 25)




Sub6 n30. Occupied Bandwidth Plot (5 MHz Ch.462000 QPSK RB 25)




Sub6 n30. Occupied Bandwidth Plot (5 MHz Ch.462000 16-QAM RB 25)




Sub6 n30. Occupied Bandwidth Plot (5 MHz Ch.462000 64-QAM RB 25)

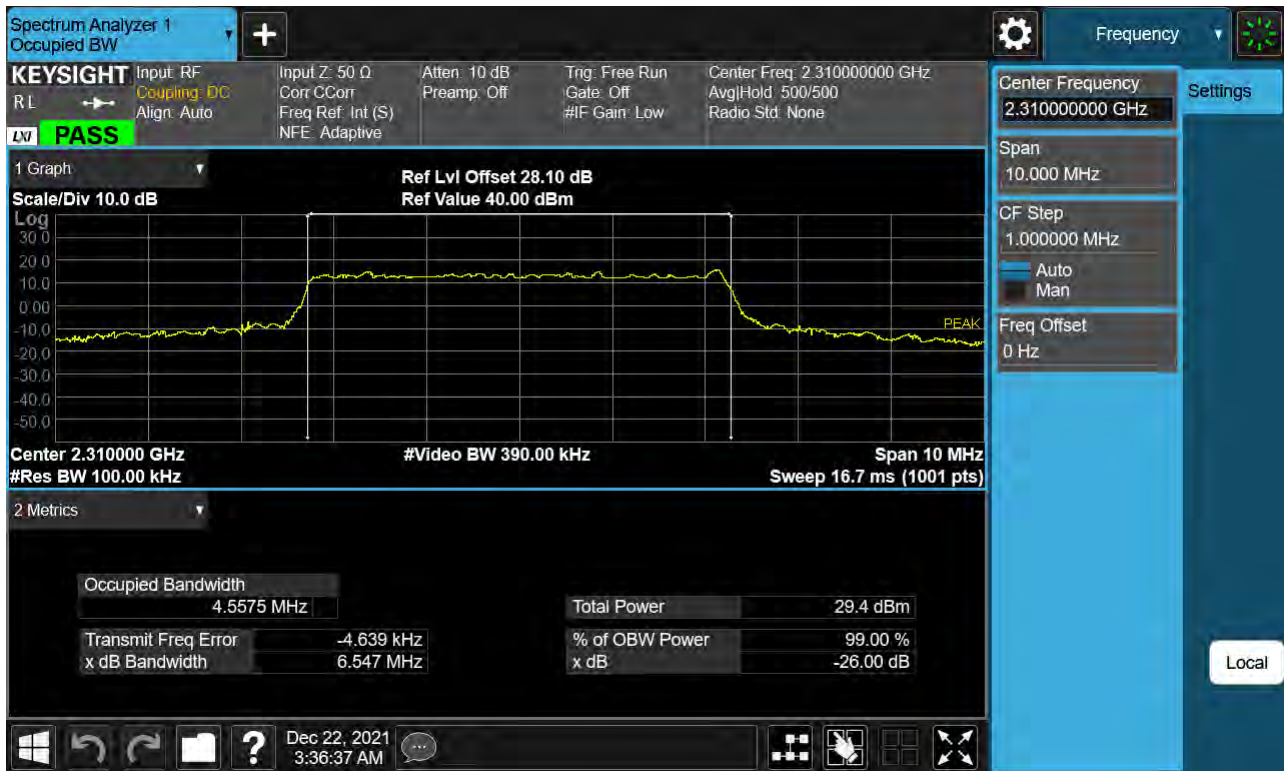

Sub6 n30. Occupied Bandwidth Plot (5 MHz Ch.462000 256-QAM RB 25)

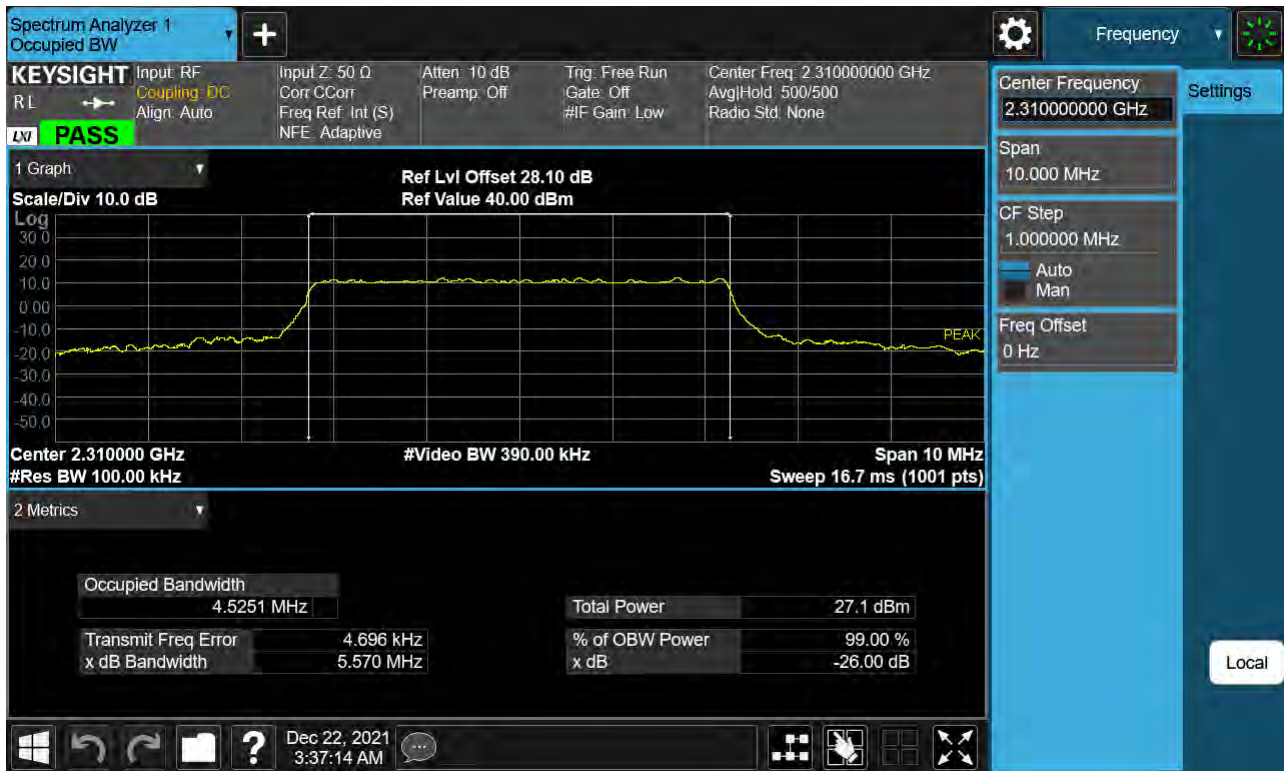


Sub6 n30. Occupied Bandwidth Plot (10 MHz Ch.462000 BPSK RB 50)

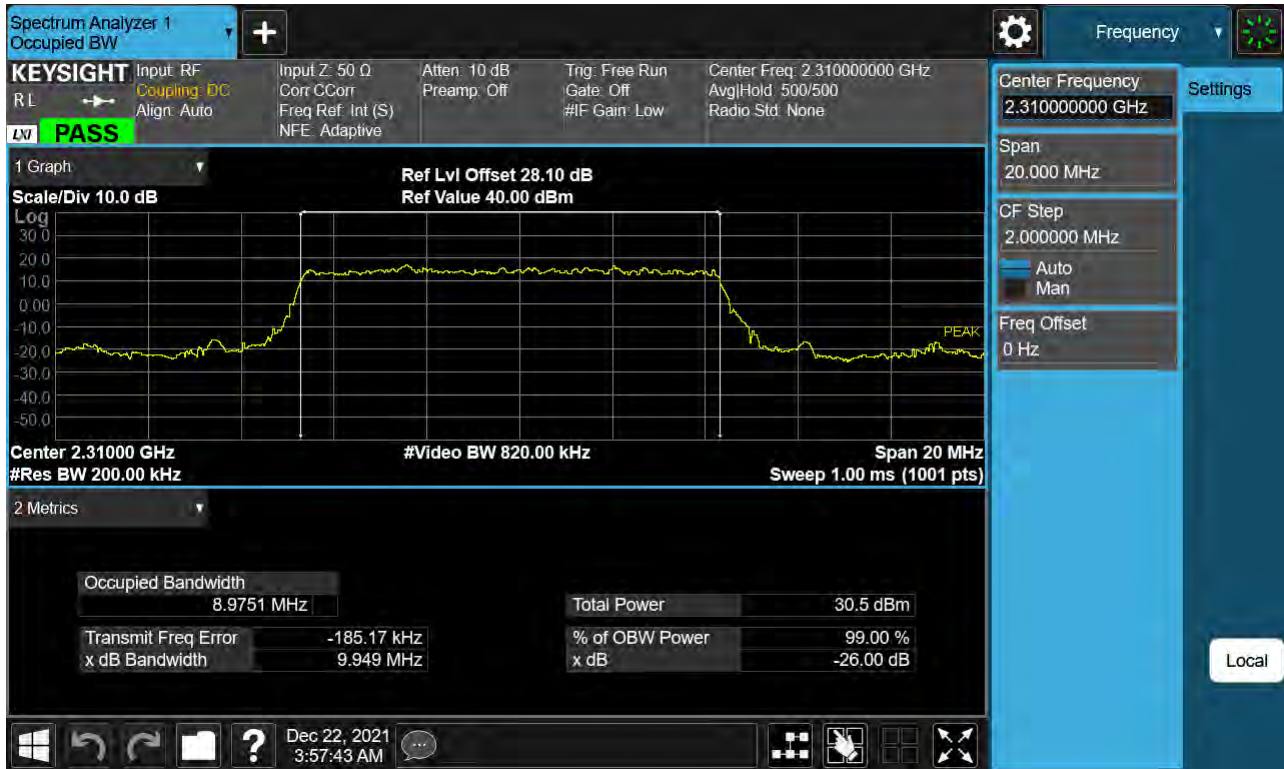


Sub6 n30. Occupied Bandwidth Plot (10 MHz Ch.462000 QPSK RB 50)




Sub6 n30. Occupied Bandwidth Plot (10 MHz Ch.462000 16-QAM RB 50)

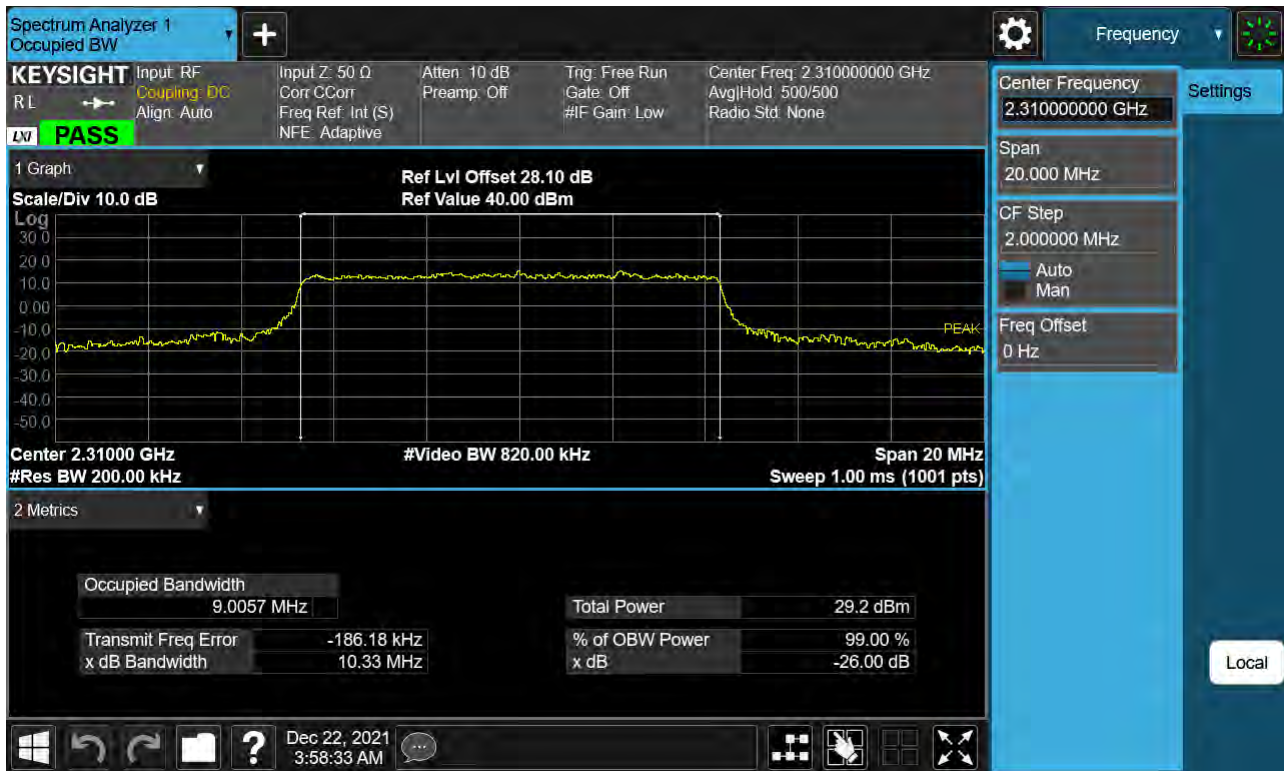

Sub6 n30. Occupied Bandwidth Plot (10 MHz Ch.462000 64-QAM RB 50)

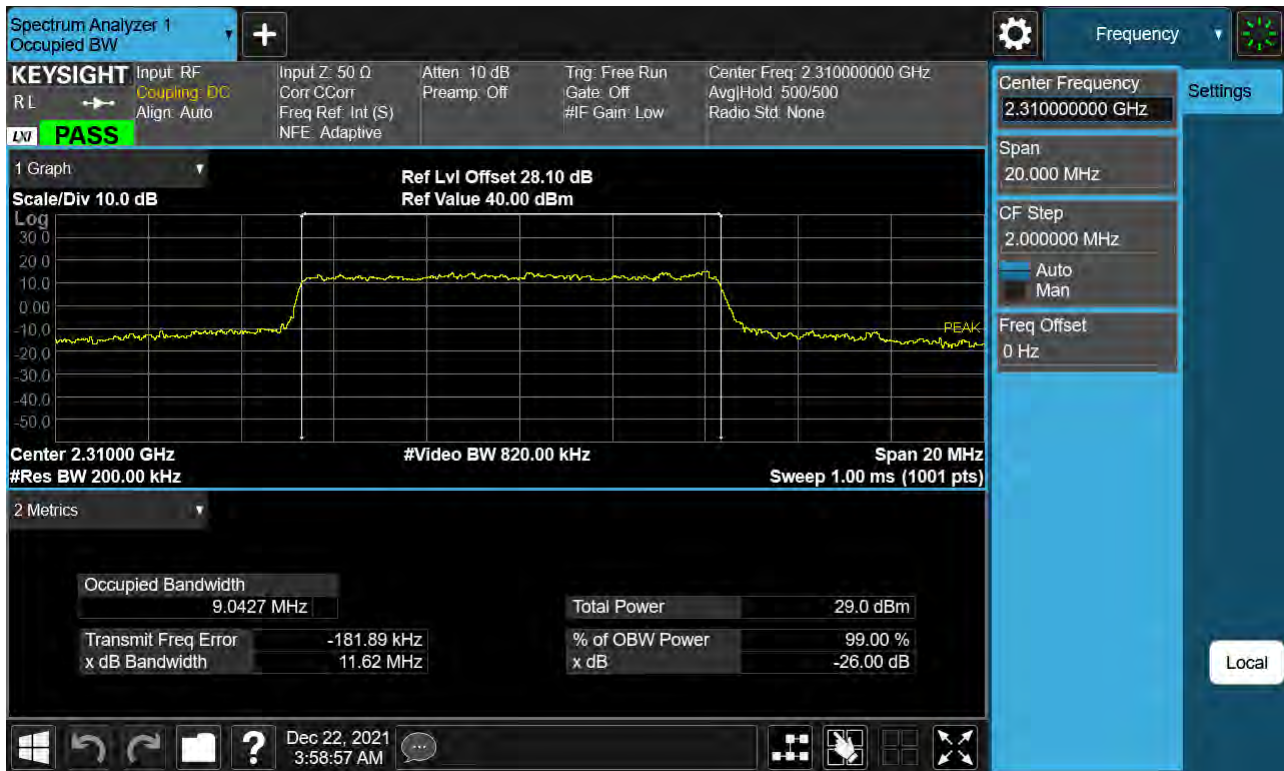

Sub6 n30. Occupied Bandwidth Plot (10 MHz Ch.462000 256-QAM RB 50)

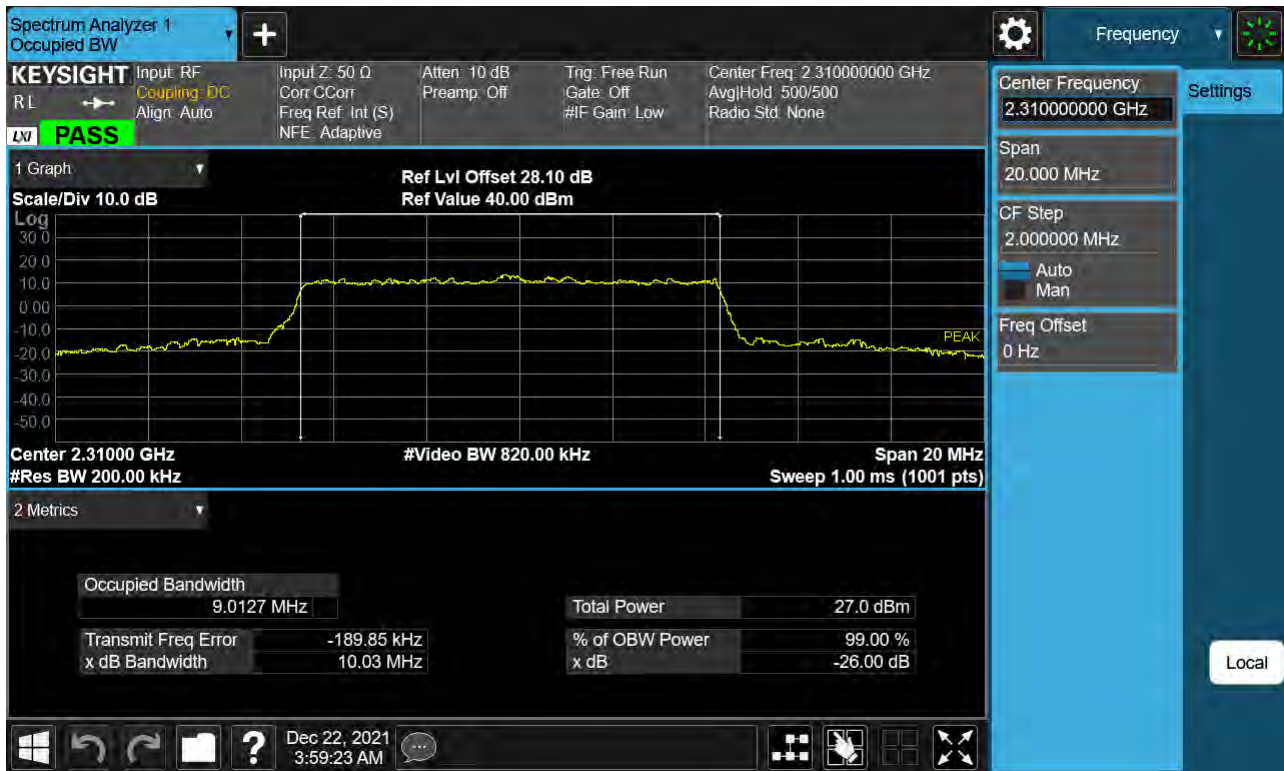

Sub6 n30. PAR Plot (5M BW_Ch.462000_BPSK_RB25_0)



Sub6 n30. PAR Plot (5M BW_Ch.462000_QPSK_RB25_0)



Sub6 n30. PAR Plot (5M BW_Ch.462000_16QAM_RB25_0)



Sub6 n30. PAR Plot (5M BW_Ch.462000_64QAM_RB25_0)



Sub6 n30. PAR Plot (5M BW_Ch.462000_256QAM_RB25_0)



Sub6 n30. PAR Plot (10M BW_Ch.462000_BPSK_RB50_0)



Sub6 n30. PAR Plot (10M BW_Ch.462000_QPSK_RB50_0)



Sub6 n30. PAR Plot (10M BW_Ch.462000_16QAM_RB50_0)



Sub6 n30. PAR Plot (10M BW_Ch.462000_64QAM_RB50_0)



Sub6 n30. PAR Plot (10M BW_Ch.462000_256QAM_RB50_0)



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_Mid_2310 MHz_BPSK_Full RB



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2280 MHz-2288 MHz)_High_2312.5 MHz_BPSK_Full RB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2288 MHz-2292 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2292 MHz-2296 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2296 MHz-2300 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2300 MHz-2304 MHz)_Low_2307.5 MHz_BPSK_1RB



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -45.329 dBm + 10 dB = -35.329 dBm

Sub6 n30. 5 M_BandEdge(2300 MHz-2304 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -26.173 dBm + 10 dB = -16.173 dBm

Sub6 n30. 5 M_BandEdge(2300 MHz-2305 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2300 MHz-2305 MHz)_Mid_2310 MHz_BPSK_FullRB




Sub6 n30. 5 M_BandEdge(2300 MHz-2305 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2300 MHz-2305 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2304 MHz-2305 MHz)_Low_2307.5 MHz_BPSK_1RB

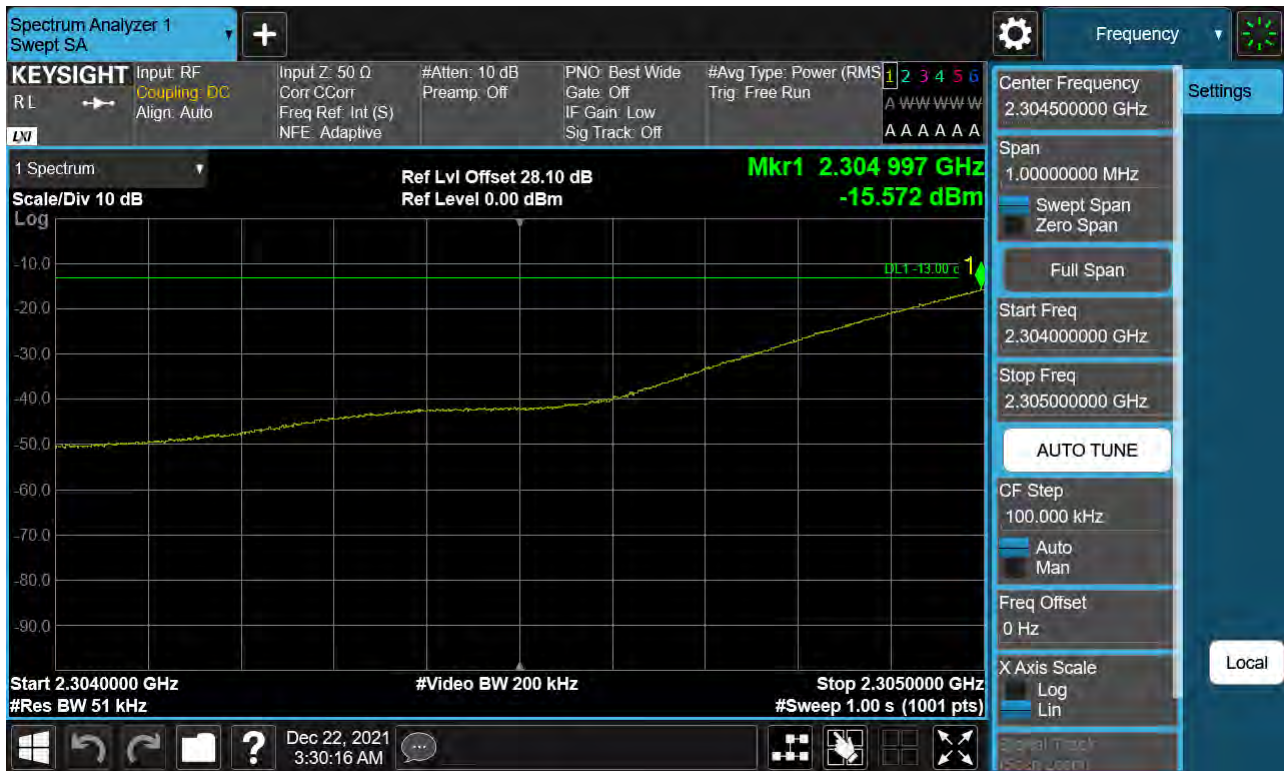

Sub6 n30. 5 M_BandEdge(2304 MHz-2305 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2315 MHz-2320 MHz)_Low_2307.5 MHz_BPSK_1RB



Spectrum Analyzer 1
Swept SA

KEYSIGHT
RL

Input RF
Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: Corr
Freq Ref: Int (S)
NFE: Adaptive

#Atten: 10 dB
Preamp: Off

PNO: Best Wide
Gate: Off
IF Gain: Low
Sig Track: Off

#Avg Type: Power (RMS)
Trig: Free Run

1 2 3 4 5 6
A W W W W W
A A A A A A

Center Frequency
2.317500000 GHz

Span
5.000000000 MHz
Swept Span
Zero Span
Full Span

Start Freq
2.315000000 GHz

Stop Freq
2.320000000 GHz

AUTO TUNE

CF Step
500.000 kHz
Auto
Man

Freq Offset
0 Hz

X Axis Scale
Log
Lin

Signal Track
Sweep Span

1 Spectrum
Scale/Div 10 dB
Log

Ref Lvl Offset 28.10 dB
Ref Level 0.00 dBm

Mkr1 2.315 000 GHz
-37.924 dBm

1

Start 2.315000 GHz
#Res BW 1.0 MHz

#Video BW 3.0 MHz

Stop 2.320000 GHz
#Sweep ~1.01 s (1001 pts)

Sub6 n30. 5 M_BandEdge(2315 MHz-2320 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2315 MHz-2320 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2315 MHz-2316 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2315 MHz-2316 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2316 MHz-2320 MHz)_High_2312.5 MHz_BPSK_1RB



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -46.479 dBm + 10 dB = -36.479 dBm

Sub6 n30. 5 M_BandEdge(2316 MHz-2320 MHz)_High_2312.5 MHz_BPSK_FullRB



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -30.126 dBm + 10 dB = -20.126 dBm

Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2320 MHz-2324 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2324 MHz-2328 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2328 MHz-2337 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2328 MHz-2337 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2328 MHz-2337 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2328 MHz-2337 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30.5 M_BandEdge(2328 MHz-2337 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2328 MHz-2337 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2337 MHz-2341 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2337 MHz-2341 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2337 MHz-2341 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2337 MHz-2341 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2337 MHz-2341 MHz)_High_2312.5 MHz_BPSK_1RB



Spectrum Analyzer 1
Swept SA

KEYSIGHT Input RF
Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

#Atten: 10 dB
Preamp: Off

PNO: Best Wide
Gate: Off
IF Gain: Low
Sig Track: Off

#Avg Type: Power (RMS)
Trig: Free Run

1 2 3 4 5 6
A W W W W W
A A A A A A

Center Frequency
2.339000000 GHz

Span
4.00000000 MHz

Swept Span
Zero Span

Full Span

Start Freq
2.337000000 GHz

Stop Freq
2.341000000 GHz

AUTO TUNE

CF Step
400.000 kHz

Auto
Man

Freq Offset
0 Hz

X Axis Scale
Log
Lin

Local

1 Spectrum
Ref Lvl Offset 28.10 dB
Ref Level 0.00 dBm

Mkr1 2.340 036 GHz
-64.374 dBm

Log

-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0

Start 2.337000 GHz
#Res BW 1.0 MHz

#Video BW 3.0 MHz

Stop 2.341000 GHz
#Sweep ~1.01 s (1001 pts)

1

RMS

2.340 036 GHz
-64.374 dBm

2.337000 GHz
-31.00 dBm

Windows Taskbar: Dec 22, 2021 3:50:02 AM

Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2341 MHz-2345 MHz)_High_2312.5 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_Low_2307.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_Low_2307.5 MHz_BPSK_FullIRB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_Mid_2310 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_Mid_2310 MHz_BPSK_FullRB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_High_2312.5 MHz_BPSK_1RB



Sub6 n30. 5 M_BandEdge(2345 MHz-2365 MHz)_High_2312.5 MHz_BPSK_FullRB

