

FCC DTS REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

February 15, 2022

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2202-FC028**FCC ID:** A3LSMA736B**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SM-A736B/DS**Additional Model:** SM-A736B**EUT Type:** Mobile phone**Average Output Power:** 802.11ax(HE20): 14.81 dBm**Frequency Range:** 2412 MHz ~ 2472 MHz**Modulation type:** OFDM, OFDMA**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2202-FC028

REVIEWED BY



Report prepared by : Chang Hee Hwang
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2202-FC028	February 15, 2022	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	26
9. TEST RESULT	27
9.1 DUTY CYCLE.....	27
9.2 6 dB BANDWIDTH	29
9.3 OUTPUT POWER	32
9.4 POWER SPECTRAL DENSITY	34
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	38
9.6 RADIATED SPURIOUS EMISSIONS	42
9.7 RADIATED RESTRICTED BAND EDGES	54
10. LIST OF TEST EQUIPMENT	67
11. ANNEX A_ TEST SETUP PHOTO	69

1. EUT DESCRIPTION

Model	SM-A736B/DS	
Additional Model	SM-A736B	
EUT Type	Mobile phone	
Power Supply	DC 3.86 V	
Frequency Range	2412 MHz ~ 2472 MHz	
Max. RF Output Power SUM (MIMO Ant 1 + MIMO Ant 2)	<u>Peak Power</u> (For information only)	23.53 dBm
	<u>Average Power</u>	14.81 dBm
Modulation Type	OFDM, OFDMA	
Number of Channels	13 Channels	
Date(s) of Tests	December 13, 2021~ February 15, 2022	
Serial number	Radiated: 5c887a1521287ece Conducted: 5c887a14dc287ece	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k = 2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k = 2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k = 2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k = 2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

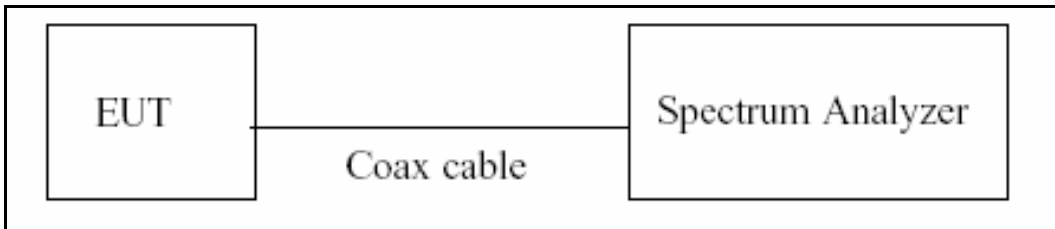

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.04
100	10.07
200	10.12
300	10.17
400	10.20
500	10.21
600	10.21
700	10.23
800	10.24
900	10.26
1000	10.27
2000	10.40
2400	10.43
2500	10.45
3000	10.52
4000	10.60
5000	10.71
6000	10.80
7000	10.85
8000	10.85
9000	10.91
10000	10.97
11000	11.02
12000	11.10
13000	11.19
14000	11.16
15000	11.21
16000	11.22
17000	11.25
18000	11.30
19000	11.32
20000	11.36
21000	11.48
22000	11.55
23000	11.55
24000	11.59
25000	11.68
26000	11.69

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(1ea)

3. EUT Cable Loss : 0.35 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

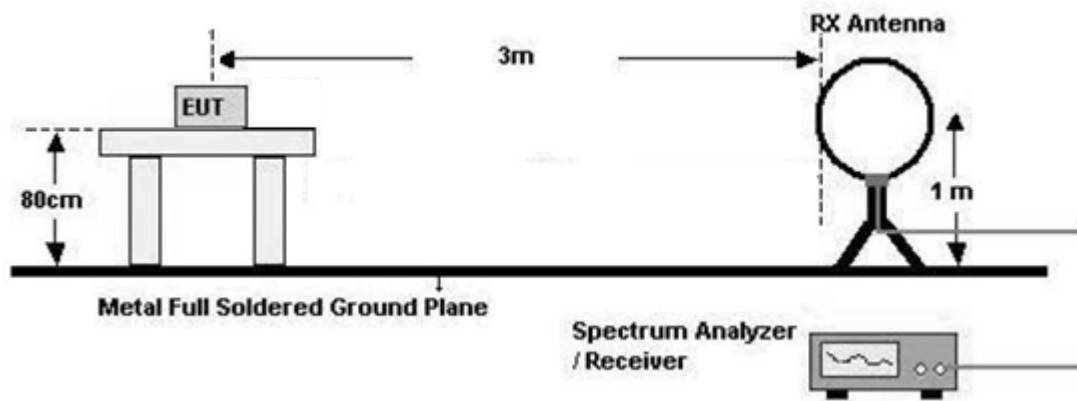

30 MHz - 1 GHz

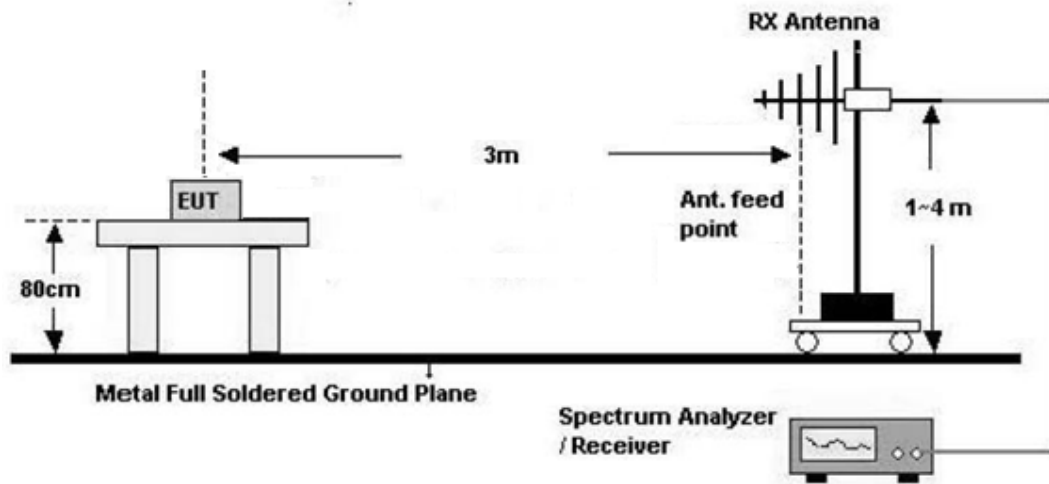

Above 1 GHz

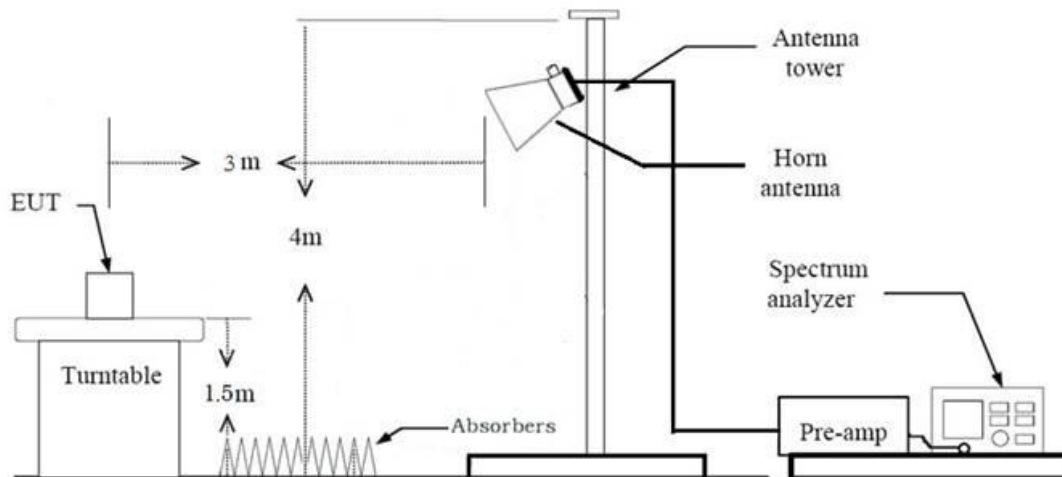

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average): Duty cycle $\geq 98 \%$,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (i.e., RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Test RU offset for Tones

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-

7.9. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
 - Worstcase : MCS0
2. Bandedge (Conducted)
 - : All Mode(Channel, Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Tone	Channel	RU Index
26	1, 11	0, 8
52	1, 11	37, 40
106	1, 11	53, 54
242	1, 11	61

3. SM-A736B/DS, SM-A736B were tested and the worst case results are reported.
 - Worstcase : SM-A736B/DS

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X, Z
3. All data rate of operation were investigated and the worst case results are reported.
 - Worst case : MCS0
4. All Antenna of operation were investigated and the worst case results are reported
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Test	Tone	RU Offset
RSE	WORST CASE : SU	-
	ADDITIONAL TONE : 26T, 52T, 106T, 242T	26T : CH1(RU8), CH6(RU8), CH11(RU0) 52T : CH1(RU40), CH6(RU40), CH11(RU37) 106T : CH1(RU54), CH6(RU54), CH11(RU53) 242T : CH1(RU61), CH6(RU61), CH11(RU61)
Band-Edge	WORST CASE : 242T	61
	ADDITIONAL TONE : 26T, 52T, 106T, SU	Low Edge : 0, 37, 53 High Edge : 8, 40, 54

8. SM-A736B/DS, SM-A736B were tested and the worst case results are reported.

- Worstcase : SM-A736B/DS

Radiated test(RSDB)

The following tables show the worst case configurations determined during testing.

Description	Bluetooth Emission	5 GHz Emission
Antenna	WIFI/BT	WIFI/BT
Channel	78	138
Data Rate	1 Mbps	MCS 0
Mode	GFSK : DH5	802.11ax (HE80)

Note : Please refer to the SM-A736B/DS [UNII ax] & [BT] Test Report.

AC Power line Conducted Emissions

1. Please refer to the SM-A736B/DS [DTS] Test Report.

2. SM-A736B/DS, SM-A736B were tested and the worst case results are reported.

- Worstcase : SM-A736B/DS

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS (Note1)
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note1:

1. Please refer to the SM-A736B/DS [DTS] Test Report.

9. TEST RESULT

9.1 DUTY CYCLE


Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	26	MCS0	2.597	2.617	0.992	0.034
	52	MCS0	2.592	2.614	0.991	0.038
	106	MCS0	1.436	1.457	0.986	0.061
	242	MCS0	0.676	0.697	0.971	0.128
802.11ax(SU)	BW 20	MCS0	0.676	0.697	0.971	0.128

Test Plots


Note:

In order to simplify the report, attached plots were only the most lowest datarate.


26 Tone MCS0

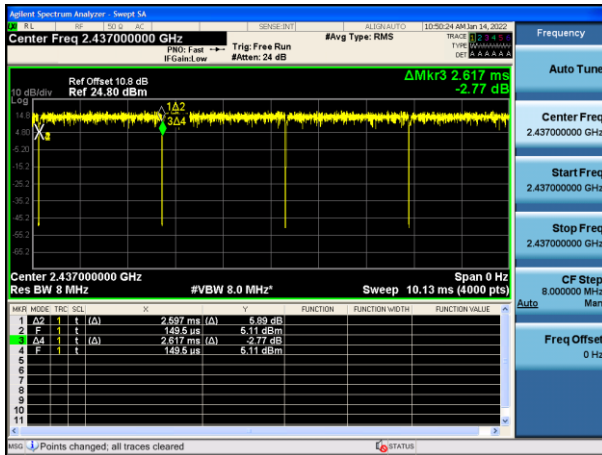


52 Tone MCS0

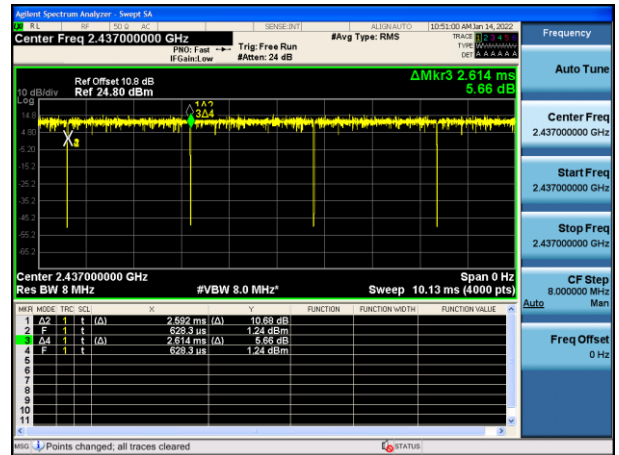


106 Tone MCS0

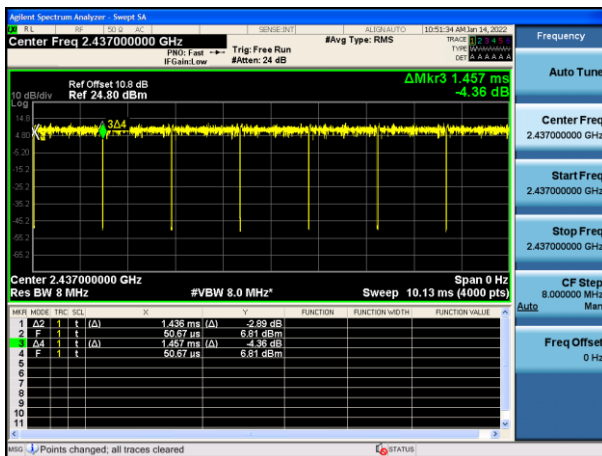

242 Tone MCS0

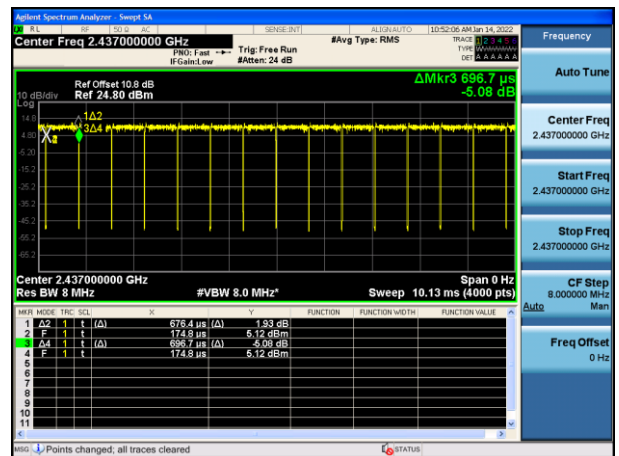

SU MCS0

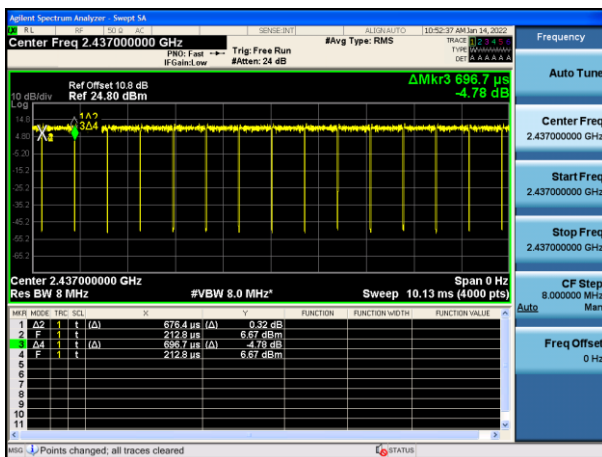

9.2 6 dB BANDWIDTH


BW	Frequency [MHz]	Channel No.	RU Index	6 dB BW (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	17.12	17.72	17.76	-	-
			Mid	8.918	15.73	-	18.86	18.30
			High	2.153	5.762	17.11	-	-
	2437	6	Low	2.110	17.13	17.76	-	-
			Mid	2.695	15.14	-	19.09	19.10
			High	2.160	17.08	17.17	-	-
	2462	11	Low	2.161	17.10	17.16	-	-
			Mid	2.699	15.11	-	19.05	19.05
			High	2.131	17.09	17.17	-	-
	2467	12	Low	2.149	17.10	17.17	-	-
			Mid	8.876	15.12	-	19.03	19.03
			High	17.05	17.09	17.17	-	-
	2472	13	Low	2.152	17.06	17.15	-	-
			Mid	2.714	15.11	-	18.76	18.76
			High	17.10	17.07	17.12	-	-


Limit : > 500 kHz

☐ Test Plots

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

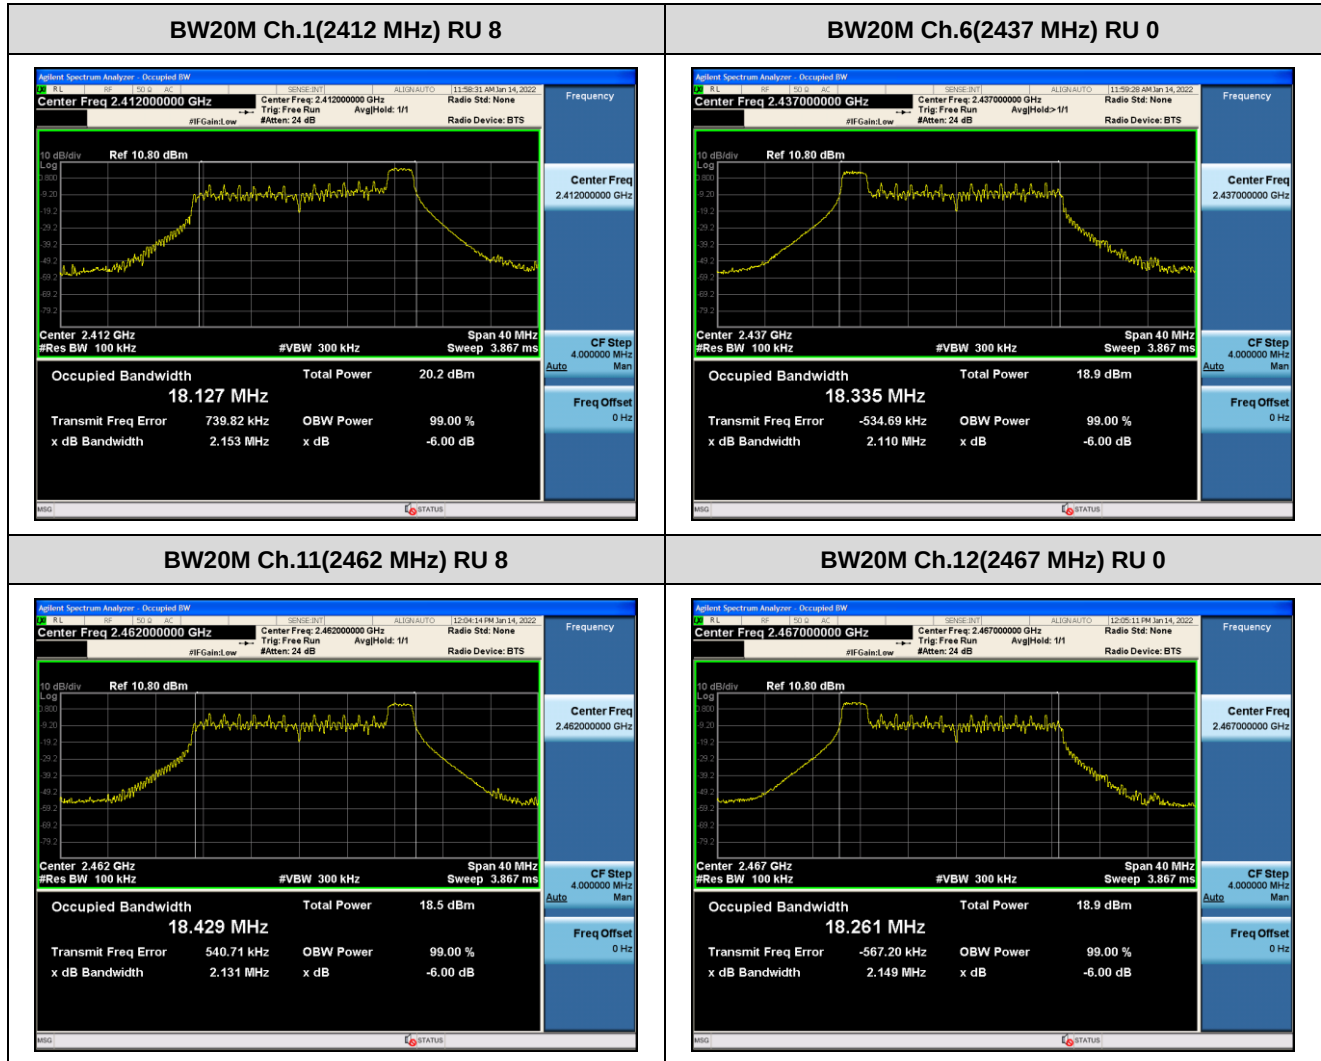

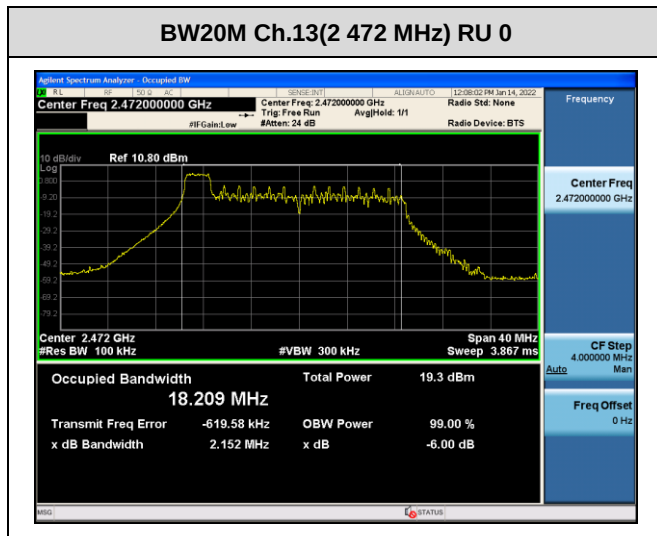

9.3 OUTPUT POWER

Peak Power

Power Meter offset

Attenuator loss(10 dB) + Cable loss + EUT Cable loss

BW	Frequency [MHz]	Channel No.	RU Index	Total Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	19.31	18.86	19.00	-	-
			Mid	19.10	18.89	-	18.30	23.53
			High	20.71	19.88	19.18	-	-
	2437	6	Low	19.93	19.50	19.50	-	-
			Mid	19.59	19.27	-	18.19	23.38
			High	20.48	19.76	19.44	-	-
	2462	11	Low	19.94	19.54	19.65	-	-
			Mid	19.40	19.54	-	18.07	23.16
			High	19.59	19.38	19.14	-	-
	2 467	12	Low	20.15	19.66	19.53	-	-
			Mid	19.34	19.30	-	17.87	20.05
			High	19.51	19.25	18.87	-	-
	2 472	13	Low	13.11	13.16	15.57	-	-
			Mid	12.34	12.82	-	17.07	19.99
			High	11.91	12.12	14.61	-	-

Limit : 30 dBm

Average Power

Power Meter offset

Attenuator loss(10 dB) + Cable loss + EUT Cable loss

BW	Frequency [MHz]	Channel No.	RU Index	Total Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	8.63	8.15	8.36	-	-
			Mid	8.32	8.06	-	9.52	14.81
			High	9.94	9.93	9.35	-	-
	2437	6	Low	9.63	9.28	9.25	-	-
			Mid	8.93	8.85	-	9.33	14.57
			High	9.69	9.41	9.39	-	-
	2462	11	Low	9.55	9.38	9.45	-	-
			Mid	9.03	9.16	-	9.30	14.42
			High	8.82	8.66	8.82	-	-
	2 467	12	Low	9.69	9.49	9.35	-	-
			Mid	8.74	9.03	-	9.17	11.26
			High	8.64	8.60	8.73	-	-
	2 472	13	Low	2.79	3.11	5.59	-	-
			Mid	2.05	2.65	-	8.20	11.26
			High	0.62	1.34	4.47	-	-

Limit : 30 dBm

9.4 POWER SPECTRAL DENSITY

Note :

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

Attenuator loss(10 dB) + Cable loss + EUT Cable loss

3. Total PSD = Measured Value + Duty Cycle Factor

BW	Frequency [MHz]	Channel No.	RU Index	Total PSD (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-8.579	-11.539	-13.895	-	-
			Mid	-8.594	-11.899	-	-14.463	-9.376
			High	-5.559	-8.707	-11.740	-	-
	2437	6	Low	-7.442	-10.326	-13.450	-	-
			Mid	-7.956	-10.924	-	-16.210	-11.000
			High	-7.234	-10.457	-13.183	-	-
	2462	11	Low	-7.573	-10.432	-13.225	-	-
			Mid	-8.085	-10.306	-	-16.535	-11.080
			High	-7.944	-10.926	-13.111	-	-
	2 467	12	Low	-7.265	-10.117	-12.623	-	-
			Mid	-8.054	-10.564	-	-16.358	-14.091
			High	-8.445	-10.891	-13.875	-	-
	2 472	13	Low	-13.981	-16.289	-16.931	-	-
			Mid	-14.968	-16.927	-	-17.011	-14.160
			High	-16.035	-18.190	-17.627	-	-


Limit : 8 dBm

Test Plots


Note:

1. In order to simplify the report, attached plots were only the worst case PSD channel.
2. Total PSD(dBm) = Measured Level + Duty Cycle Factor

BW20M Ch.1(2 412 MHz) RU 8

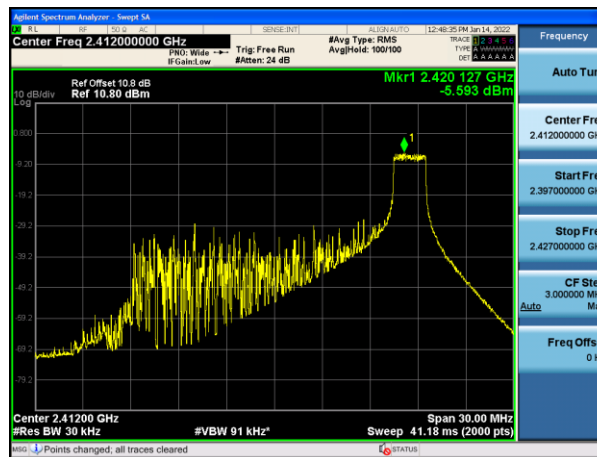


BW20M Ch.6(2 437 MHz) RU 8

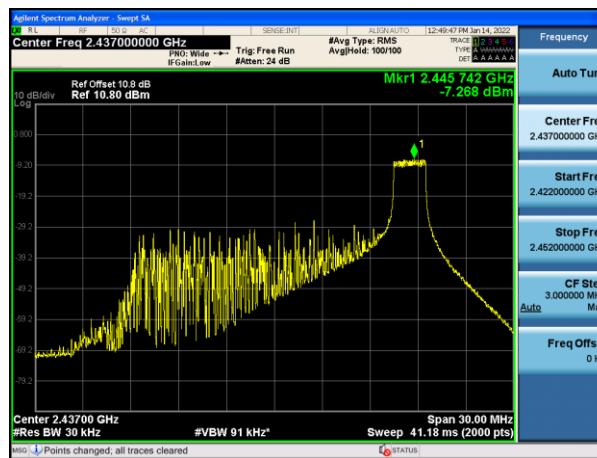


Frequency [MHz]	Measured PSD (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)
2 412	-5.593	0.034	-5.559
2 437	-7.268	0.034	-7.234


BW20M Ch.11(2 462 MHz) RU 0

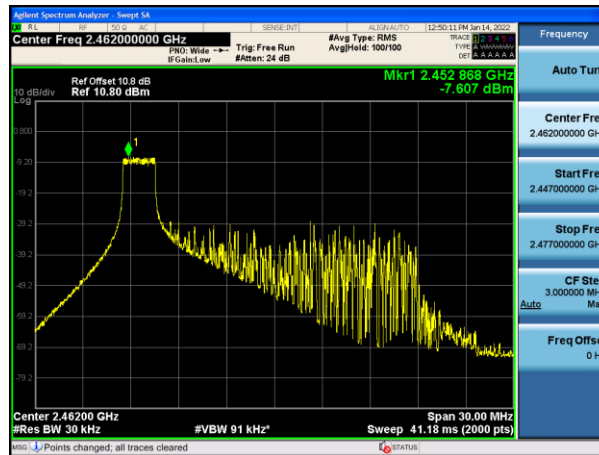

BW20M Ch.12(2 467 MHz) RU 0

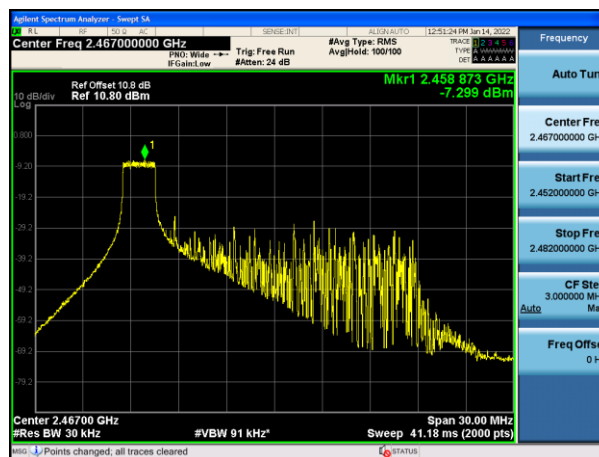

Frequency [MHz]	Measured PSD (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)
2 462	-7.607	0.034	-7.573
2 467	-7.299	0.034	-7.265

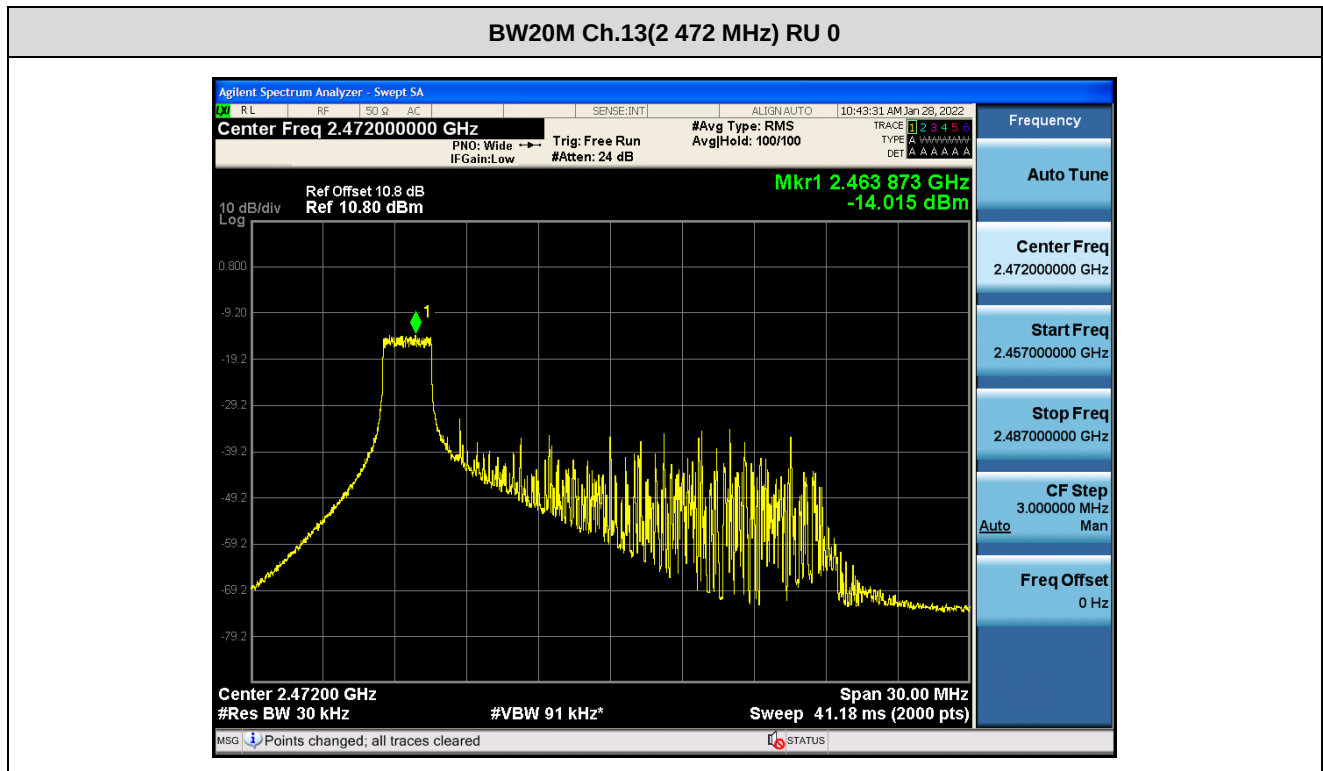

Frequency [MHz]	Measured PSD (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)
2 472	-14.015	0.034	-13.981

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Band Edge

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	34.386	32.889	33.585
	2462	11	Low	Lowest Bandedge	58.318	55.773	49.586
	2467	12	High	Highest Bandedge	58.364	53.016	45.666
	2472	13	High	Highest Bandedge	32.164	34.020	34.559

Limit : 30 dBc


BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	34.173	33.762
	2462	11		Lowest Bandedge	48.948	42.979
	2467	12		Highest Bandedge	44.197	45.666
	2472	13		Highest Bandedge	35.374	32.742

Limit : 30 dBc

Test Plots

Note:

In order to simplify the report, attached plots were only the worst case.

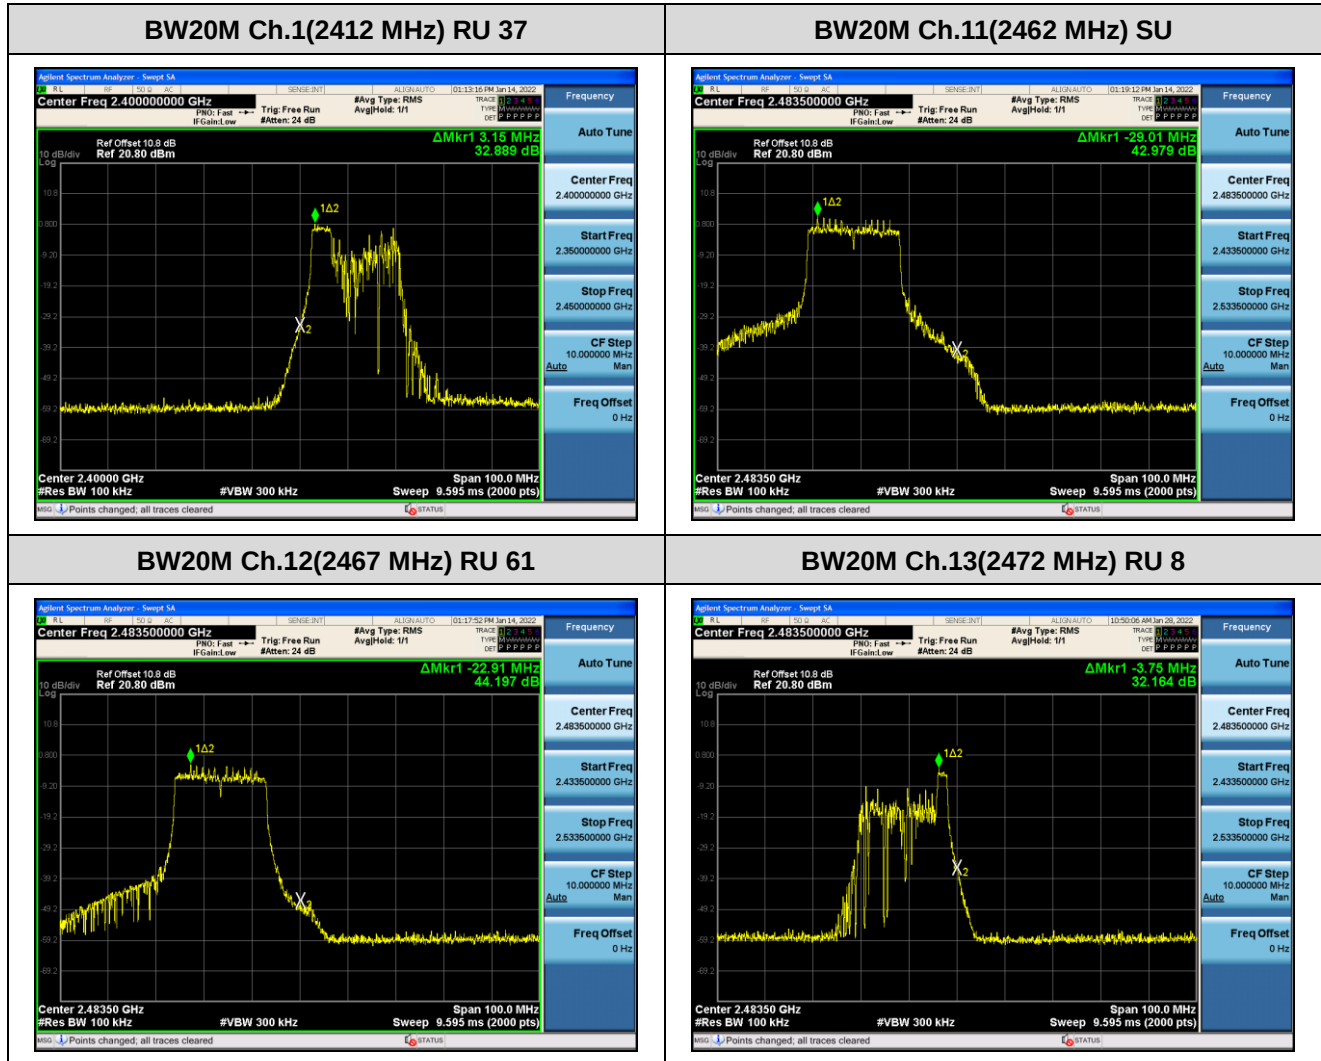

Conducted Spurious Emissions

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2 412	1	Low	43.600	42.413	39.962	-	-
			Mid	44.711	41.313	-	39.307	43.811
			High	46.781	45.439	42.820	-	-
	2 437	6	Low	45.941	44.328	40.590	-	-
			Mid	44.635	42.783	-	40.435	43.730
			High	45.423	43.698	40.178	-	-
	2 462	11	Low	45.506	43.207	40.637	-	-
			Mid	46.012	43.410	-	37.737	43.246
			High	45.185	43.376	40.176	-	-


Limit : 30 dBc

Note: Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

▣ Test Plots

Note:

In order to simplify the report, attached plots were only the worst case.

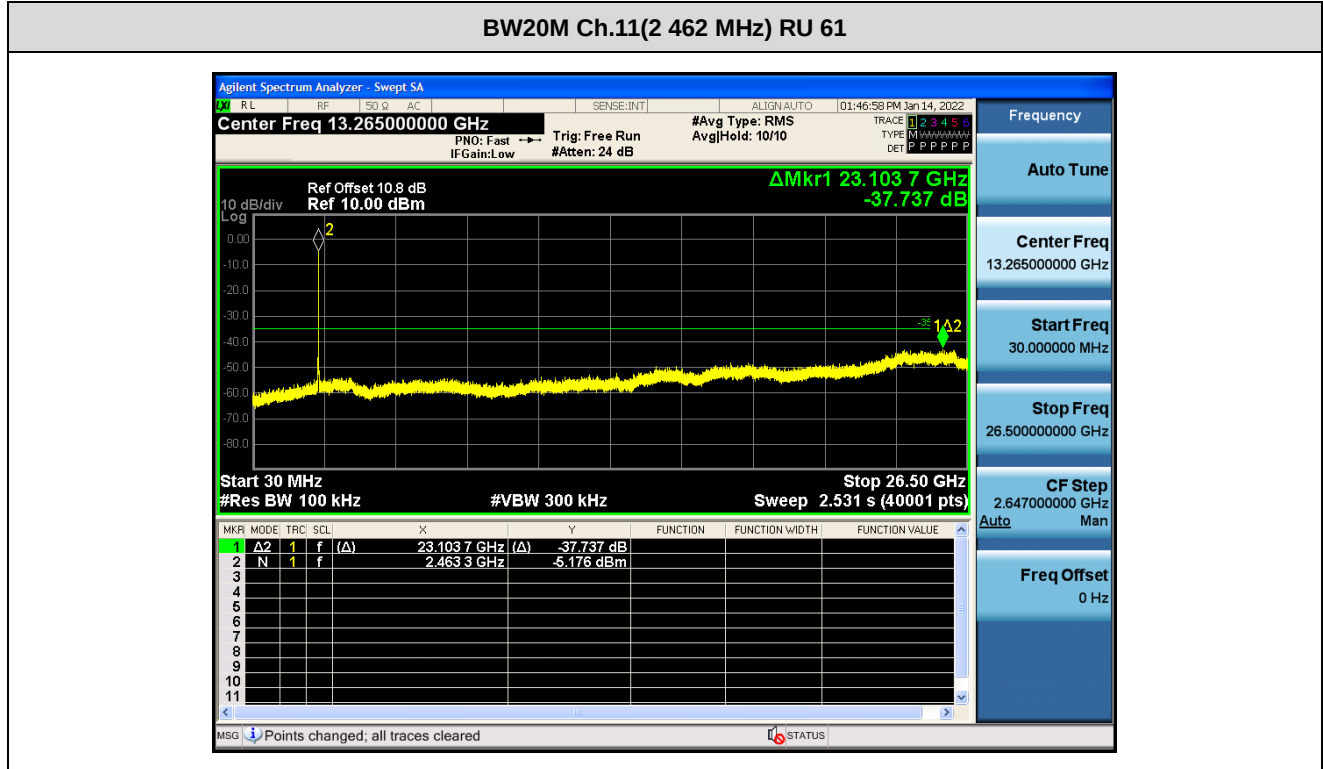

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Level	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Level	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz
1. 26 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	8

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	42.88	0.000	3.46	V	46.34	73.98	27.64	PK
4824	30.75	0.034	3.46	V	34.24	53.98	19.74	AV
7236	39.71	0.000	12.51	V	52.22	73.98	21.76	PK
7236	27.15	0.034	12.51	V	39.69	53.98	14.29	AV
4824	42.95	0.000	3.46	H	46.41	73.98	27.57	PK
4824	30.89	0.034	3.46	H	34.38	53.98	19.60	AV
7236	39.79	0.000	12.51	H	52.30	73.98	21.68	PK
7236	27.45	0.034	12.51	H	39.99	53.98	13.99	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	8

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.12	0.000	3.42	V	46.54	73.98	27.44	PK
4874	31.07	0.034	3.42	V	34.52	53.98	19.46	AV
7311	39.92	0.000	11.76	V	51.68	73.98	22.30	PK
7311	27.77	0.034	11.76	V	39.56	53.98	14.42	AV
4874	43.36	0.000	3.42	H	46.78	73.98	27.20	PK
4874	31.15	0.034	3.42	H	34.60	53.98	19.38	AV
7311	40.12	0.000	11.76	H	51.88	73.98	22.10	PK
7311	27.89	0.034	11.76	H	39.68	53.98	14.30	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	0

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.52	0.000	4.55	V	48.07	73.98	25.91	PK
4924	31.11	0.034	4.55	V	35.69	53.98	18.29	AV
7386	39.97	0.000	12.13	V	52.10	73.98	21.88	PK
7386	27.99	0.034	12.13	V	40.15	53.98	13.83	AV
4924	43.76	0.000	4.55	H	48.31	73.98	25.67	PK
4924	31.25	0.034	4.55	H	35.83	53.98	18.15	AV
7386	40.09	0.000	12.13	H	52.22	73.98	21.76	PK
7386	28.03	0.034	12.13	H	40.19	53.98	13.79	AV

2. 52 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	40

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	42.75	0.000	3.46	V	46.21	73.98	27.77	PK
4824	30.89	0.038	3.46	V	34.39	53.98	19.59	AV
7236	39.97	0.000	12.51	V	52.48	73.98	21.50	PK
7236	27.41	0.038	12.51	V	39.96	53.98	14.02	AV
4824	42.95	0.000	3.46	H	46.41	73.98	27.57	PK
4824	30.92	0.038	3.46	H	34.42	53.98	19.56	AV
7236	40.03	0.000	12.51	H	52.54	73.98	21.44	PK
7236	27.45	0.038	12.51	H	40.00	53.98	13.98	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	40

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.25	0.000	3.42	V	46.67	73.98	27.31	PK
4874	30.88	0.038	3.42	V	34.34	53.98	19.64	AV
7311	40.59	0.000	11.76	V	52.35	73.98	21.63	PK
7311	27.88	0.038	11.76	V	39.68	53.98	14.30	AV
4874	43.41	0.000	3.42	H	46.83	73.98	27.15	PK
4874	31.03	0.038	3.42	H	34.49	53.98	19.49	AV
7311	40.64	0.000	11.76	H	52.40	73.98	21.58	PK
7311	27.92	0.038	11.76	H	39.72	53.98	14.26	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	37

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.58	0.000	4.55	V	47.13	73.98	26.85	PK
4924	30.81	0.038	4.55	V	35.40	53.98	18.58	AV
7386	39.81	0.000	12.13	V	51.94	73.98	22.04	PK
7386	27.95	0.038	12.13	V	40.12	53.98	13.86	AV
4924	42.64	0.000	4.55	H	47.19	73.98	26.79	PK
4924	30.86	0.038	4.55	H	35.45	53.98	18.53	AV
7386	39.88	0.000	12.13	H	52.01	73.98	21.97	PK
7386	27.99	0.038	12.13	H	40.16	53.98	13.82	AV

3. 106 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	54

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	42.83	0.000	3.46	V	46.29	73.98	27.69	PK
4824	30.91	0.061	3.46	V	34.43	53.98	19.55	AV
7236	39.58	0.000	12.51	V	52.09	73.98	21.89	PK
7236	27.15	0.061	12.51	V	39.72	53.98	14.26	AV
4824	42.89	0.000	3.46	H	46.35	73.98	27.63	PK
4824	30.99	0.061	3.46	H	34.51	53.98	19.47	AV
7236	39.62	0.000	12.51	H	52.13	73.98	21.85	PK
7236	27.33	0.061	12.51	H	39.90	53.98	14.08	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	54

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.11	0.000	3.42	V	46.53	73.98	27.45	PK
4874	31.07	0.061	3.42	V	34.55	53.98	19.43	AV
7311	40.37	0.000	11.76	V	52.13	73.98	21.85	PK
7311	27.94	0.061	11.76	V	39.76	53.98	14.22	AV
4874	43.33	0.000	3.42	H	46.75	73.98	27.23	PK
4874	31.12	0.061	3.42	H	34.60	53.98	19.38	AV
7311	40.43	0.000	11.76	H	52.19	73.98	21.79	PK
7311	27.99	0.061	11.76	H	39.81	53.98	14.17	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	53

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.95	0.000	4.55	V	47.50	73.98	26.48	PK
4924	30.81	0.061	4.55	V	35.42	53.98	18.56	AV
7386	39.42	0.000	12.13	V	51.55	73.98	22.43	PK
7386	27.46	0.061	12.13	V	39.65	53.98	14.33	AV
4924	43.01	0.000	4.55	H	47.56	73.98	26.42	PK
4924	30.85	0.061	4.55	H	35.46	53.98	18.52	AV
7386	39.55	0.000	12.13	H	51.68	73.98	22.30	PK
7386	27.80	0.061	12.13	H	39.99	53.98	13.99	AV

4. 242 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	61

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	43.01	0.000	3.46	V	46.47	73.98	27.51	PK
4824	30.77	0.128	3.46	V	34.36	53.98	19.62	AV
7236	39.61	0.000	12.51	V	52.12	73.98	21.86	PK
7236	27.32	0.128	12.51	V	39.96	53.98	14.02	AV
4824	43.31	0.000	3.46	H	46.77	73.98	27.21	PK
4824	30.85	0.128	3.46	H	34.44	53.98	19.54	AV
7236	39.67	0.000	12.51	H	52.18	73.98	21.80	PK
7236	27.45	0.128	12.51	H	40.09	53.98	13.89	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	61

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.44	0.000	3.42	V	46.86	73.98	27.12	PK
4874	31.01	0.128	3.42	V	34.56	53.98	19.42	AV
7311	39.78	0.000	11.76	V	51.54	73.98	22.44	PK
7311	27.83	0.128	11.76	V	39.72	53.98	14.26	AV
4874	43.54	0.000	3.42	H	46.96	73.98	27.02	PK
4874	31.05	0.128	3.42	H	34.60	53.98	19.38	AV
7311	39.83	0.000	11.76	H	51.59	73.98	22.39	PK
7311	27.92	0.128	11.76	H	39.81	53.98	14.17	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	61

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	42.99	0.000	4.55	V	47.54	73.98	26.44	PK
4924	30.89	0.128	4.55	V	35.57	53.98	18.41	AV
7386	39.87	0.000	12.13	V	52.00	73.98	21.98	PK
7386	27.71	0.128	12.13	V	39.97	53.98	14.01	AV
4924	43.03	0.000	4.55	H	47.58	73.98	26.40	PK
4924	30.92	0.128	4.55	H	35.60	53.98	18.38	AV
7386	39.99	0.000	12.13	H	52.12	73.98	21.86	PK
7386	27.77	0.128	12.13	H	40.03	53.98	13.95	AV

5. SU

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	42.85	0.000	3.46	V	46.31	73.98	27.67	PK
4824	30.64	0.128	3.46	V	34.23	53.98	19.75	AV
7236	41.25	0.000	12.51	V	53.76	73.98	20.22	PK
7236	27.56	0.128	12.51	V	40.20	53.98	13.78	AV
4824	43.12	0.000	3.46	H	46.58	73.98	27.40	PK
4824	30.89	0.128	3.46	H	34.48	53.98	19.50	AV
7236	41.80	0.000	12.51	H	54.31	73.98	19.67	PK
7236	27.66	0.128	12.51	H	40.30	53.98	13.68	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	43.52	0.000	3.42	V	46.94	73.98	27.04	PK
4874	31.17	0.128	3.42	V	34.72	53.98	19.26	AV
7311	40.13	0.000	11.76	V	51.89	73.98	22.09	PK
7311	27.87	0.128	11.76	V	39.76	53.98	14.22	AV
4874	43.62	0.000	3.42	H	47.04	73.98	26.94	PK
4874	31.25	0.128	3.42	H	34.80	53.98	19.18	AV
7311	40.22	0.000	11.76	H	51.98	73.98	22.00	PK
7311	27.99	0.128	11.76	H	39.88	53.98	14.10	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	43.11	0.000	4.55	V	47.66	73.98	26.32	PK
4924	30.89	0.128	4.55	V	35.57	53.98	18.41	AV
7386	40.35	0.000	12.13	V	52.48	73.98	21.50	PK
7386	27.79	0.128	12.13	V	40.05	53.98	13.93	AV
4924	43.17	0.000	4.55	H	47.72	73.98	26.26	PK
4924	30.92	0.128	4.55	H	35.60	53.98	18.38	AV
7386	40.74	0.000	12.13	H	52.87	73.98	21.11	PK
7386	27.85	0.128	12.13	H	40.11	53.98	13.87	AV

Test Plots(SU) – X-H

Radiated Spurious Emissions plot – Average result (802.11ax(HE20) SU, Ch.1 3rd Harmonic)

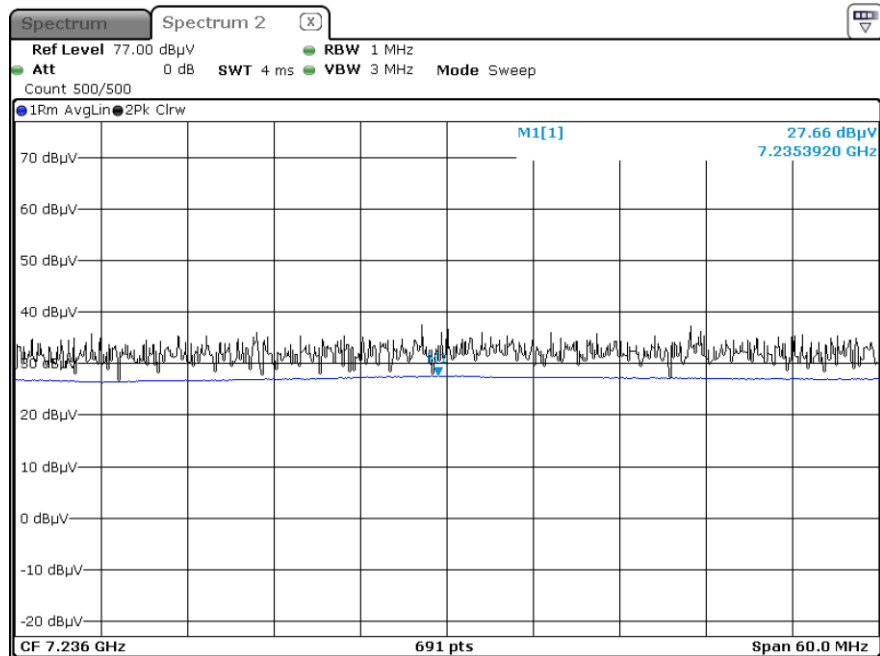

Radiated Spurious Emissions plot – Peak result (802.11ax(HE20) SU, Ch.1 3rd Harmonic)

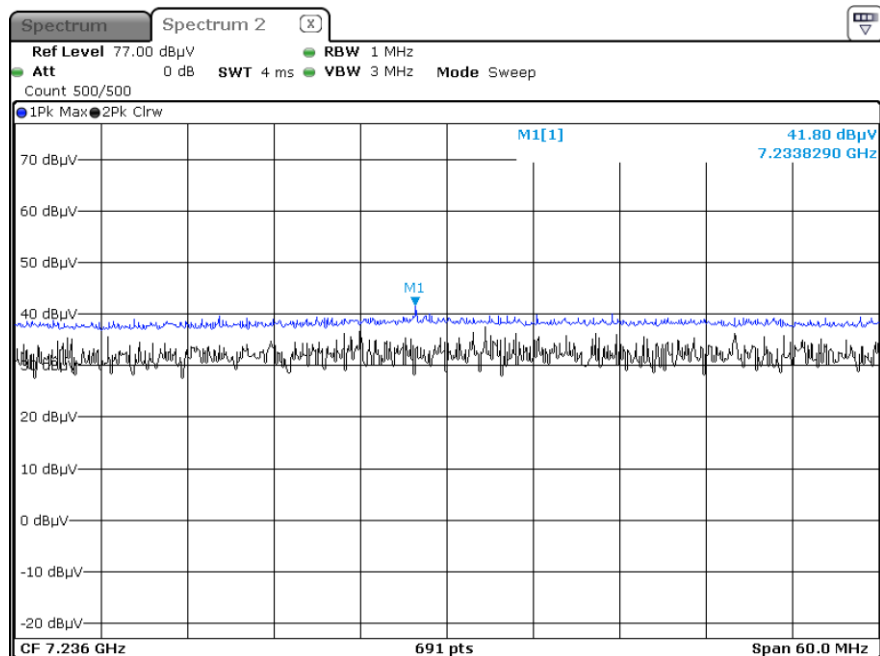

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

1. 26 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	19.846	0.000	34.04	H	53.89	73.98	20.09	PK
2390.0	7.322	0.034	34.04	H	41.40	53.98	12.58	AV
2390.0	19.678	0.000	34.04	V	53.72	73.98	20.26	PK
2390.0	7.299	0.034	34.04	V	41.37	53.98	12.61	AV
2483.5	19.425	0.000	35.00	H	54.43	73.98	19.56	PK
2483.5	7.403	0.034	35.00	H	42.44	53.98	11.54	AV
2483.5	21.502	0.000	35.00	V	56.50	73.98	17.48	PK
2483.5	7.575	0.034	35.00	V	42.61	53.98	11.37	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	23.110	0.000	35.00	H	58.11	73.98	15.87	PK
2483.5	7.718	0.034	35.00	H	42.75	53.98	11.23	AV
2483.5	23.290	0.000	35.00	V	58.29	73.98	15.69	PK
2483.5	7.749	0.034	35.00	V	42.78	53.98	11.20	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5~2484.5	31.725	0.000	35.00	H	66.73	73.98	7.26	PK
#2484.5~2485.5	27.137	0.000	35.00	H	62.14	73.98	11.84	PK
2485.5	34.229	0.000	35.00	H	69.23	73.98	4.75	PK
#2483.5~2484.5	16.401	0.034	35.00	H	51.44	53.98	2.54	AV
2484.5	14.779	0.034	35.00	H	49.81	53.98	4.17	AV
#2483.5~2484.5	31.910	0.000	35.00	V	66.91	73.98	7.07	PK
#2484.5~2485.5	27.360	0.000	35.00	V	62.36	73.98	11.62	PK
2485.5	34.449	0.000	35.00	V	69.45	73.98	4.53	PK
#2483.5~2484.5	16.510	0.034	35.00	V	51.54	53.98	2.44	AV
2484.5	14.992	0.034	35.00	V	50.03	53.98	3.95	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

2. 52 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.756	0.000	34.04	H	52.80	73.98	21.18	PK
2390.0	7.125	0.038	34.04	H	41.20	53.98	12.78	AV
2390.0	18.644	0.000	34.04	V	52.68	73.98	21.30	PK
2390.0	7.109	0.038	34.04	V	41.19	53.98	12.79	AV
2483.5	19.448	0.000	35.00	H	54.45	73.98	19.53	PK
2483.5	7.536	0.038	35.00	H	42.57	53.98	11.41	AV
2483.5	19.530	0.000	35.00	V	54.53	73.98	19.45	PK
2483.5	7.585	0.038	35.00	V	42.62	53.98	11.36	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	22.158	0.000	35.00	H	57.16	73.98	16.82	PK
2483.5	7.754	0.038	35.00	H	42.79	53.98	11.19	AV
2483.5	22.239	0.000	35.00	V	57.24	73.98	16.74	PK
2483.5	7.791	0.038	35.00	V	42.83	53.98	11.15	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5~2484.5	30.015	0.000	35.00	H	65.02	73.98	8.97	PK
#2484.5~2485.5	26.244	0.000	35.00	H	61.24	73.98	12.74	PK
2485.5	33.012	0.000	35.00	H	68.01	73.98	5.97	PK
#2483.5~2484.5	16.402	0.038	35.00	H	51.44	53.98	2.54	AV
2484.5	14.915	0.038	35.00	H	49.95	53.98	4.03	AV
#2483.5~2484.5	30.140	0.000	35.00	V	65.14	73.98	8.84	PK
#2484.5~2485.5	26.380	0.000	35.00	V	61.38	73.98	12.60	PK
2485.5	33.313	0.000	35.00	V	68.31	73.98	5.67	PK
#2483.5~2484.5	16.450	0.038	35.00	V	51.49	53.98	2.49	AV
2484.5	14.997	0.038	35.00	V	50.04	53.98	3.95	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

3. 106 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.894	0.000	34.04	H	52.93	73.98	21.05	PK
2390.0	7.231	0.061	34.04	H	41.33	53.98	12.65	AV
2390.0	18.884	0.000	34.04	V	52.92	73.98	21.06	PK
2390.0	7.198	0.061	34.04	V	41.30	53.98	12.68	AV
2483.5	19.311	0.000	35.00	H	54.31	73.98	19.67	PK
2483.5	7.438	0.061	35.00	H	42.50	53.98	11.48	AV
2483.5	19.334	0.000	35.00	V	54.33	73.98	19.65	PK
2483.5	7.483	0.061	35.00	V	42.54	53.98	11.44	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	24.158	0.000	35.00	H	59.16	73.98	14.82	PK
2483.5	10.167	0.061	35.00	H	45.23	53.98	8.75	AV
2483.5	24.298	0.000	35.00	V	59.30	73.98	14.68	PK
2483.5	10.206	0.061	35.00	V	45.27	53.98	8.71	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5~2484.5	28.211	0.000	35.00	H	63.21	73.98	10.77	PK
2484.5	33.985	0.000	35.00	H	68.99	73.98	5.00	PK
#2483.5~2484.5	15.986	0.061	35.00	H	51.05	53.98	2.93	AV
2484.5	15.398	0.061	35.00	H	50.46	53.98	3.52	AV
#2483.5~2484.5	28.440	0.000	35.00	V	63.44	73.98	10.54	PK
2484.5	34.105	0.000	35.00	V	69.11	73.98	4.88	PK
#2483.5~2484.5	16.140	0.061	35.00	V	51.20	53.98	2.78	AV
2484.5	15.578	0.061	35.00	V	50.64	53.98	3.34	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

4. 242 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.448	0.00	34.04	H	52.49	73.98	21.49	PK
2390.0	7.222	0.128	34.04	H	41.39	53.98	12.59	AV
2390.0	18.412	0.00	34.04	V	52.45	73.98	21.53	PK
2390.0	7.197	0.128	34.04	V	41.365	53.98	12.62	AV
2483.5	23.018	0.000	35.00	H	58.02	73.98	15.96	PK
2483.5	9.512	0.128	35.00	H	44.64	53.98	9.34	AV
2483.5	23.115	0.000	35.00	V	58.12	73.98	15.87	PK
2483.5	9.572	0.128	35.00	V	44.7	53.98	9.28	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	24.758	0.000	35.00	H	59.76	73.98	14.22	PK
2483.5	10.107	0.128	35.00	H	45.24	53.98	8.75	AV
2483.5	24.807	0.000	35.00	V	59.81	73.98	14.17	PK
2483.5	10.115	0.128	35.00	V	45.24	53.98	8.74	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
#2483.5~2484.5	31.252	0.000	35.00	H	66.25	73.98	7.73	PK
#2484.5~2485.5	26.985	0.000	35.00	H	61.99	73.98	12.00	PK
2485.5	33.712	0.000	35.00	H	68.71	73.98	5.27	PK
#2483.5~2484.5	16.421	0.128	35.00	H	51.55	53.98	2.43	AV
2484.5	15.985	0.128	35.00	H	51.11	53.98	2.87	AV
#2483.5~2484.5	31.550	0.000	35.00	V	66.55	73.98	7.43	PK
#2484.5~2485.5	27.290	0.000	35.00	V	62.29	73.98	11.69	PK
2485.5	33.919	0.000	35.00	V	68.92	73.98	5.06	PK
#2483.5~2484.5	16.640	0.128	35.00	V	51.77	53.98	2.21	AV
2484.5	16.098	0.128	35.00	V	51.23	53.98	2.75	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

5. SU

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.934	0.000	34.04	H	52.97	73.98	21.01	PK
2390.0	7.543	0.128	34.04	H	41.71	53.98	12.27	AV
2390.0	18.725	0.000	34.04	V	52.77	73.98	21.22	PK
2390.0	7.400	0.128	34.04	V	41.57	53.98	12.41	AV
2483.5	21.638	0.000	35.00	H	56.64	73.98	17.34	PK
2483.5	9.312	0.128	35.00	H	44.44	53.98	9.54	AV
2483.5	21.703	0.000	35.00	V	56.70	73.98	17.28	PK
2483.5	9.370	0.128	35.00	V	44.50	53.98	9.48	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	23.545	0.000	35.00	H	58.55	73.98	15.44	PK
2483.5	9.902	0.128	35.00	H	45.03	53.98	8.95	AV
2483.5	23.715	0.000	35.00	V	58.72	73.98	15.27	PK
2483.5	9.926	0.128	35.00	V	45.05	53.98	8.93	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L +D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	34.528	0.000	35.00	H	69.53	73.98	4.45	PK
#2483.5~2484.5	14.320	0.128	35.00	H	49.45	53.98	4.53	AV
2484.5	13.285	0.128	35.00	V	48.41	53.98	5.57	AV
2483.5	34.621	0.000	35.00	V	69.62	73.98	4.36	PK
#2483.5~2484.5	14.370	0.128	35.00	V	49.50	53.98	4.48	AV
2484.5	13.306	0.128	35.00	V	48.43	53.98	5.55	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

■ **Test Plots (242 Tone, RU 61) Z-V**


Radiated Restricted Band Edges plot – Average result (802.11ax(HE20) Ch.13)

Integration method used 2483.5 MHz ~ 2484.5 MHz

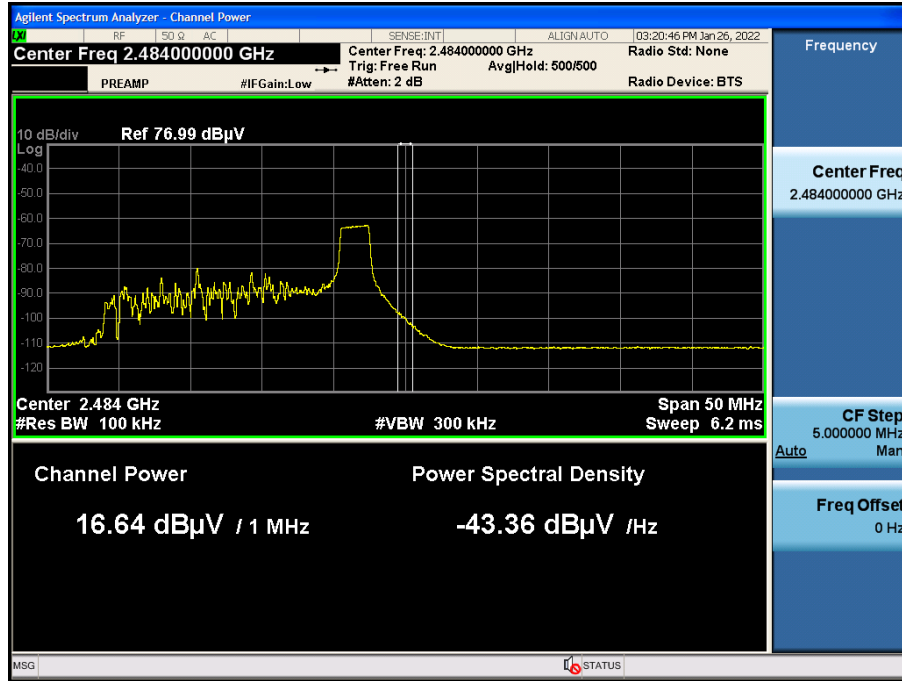


Radiated Restricted Band Edges plot – Average result (802.11ax(HE20) Ch.13)

Standard method used 2484.5 MHz

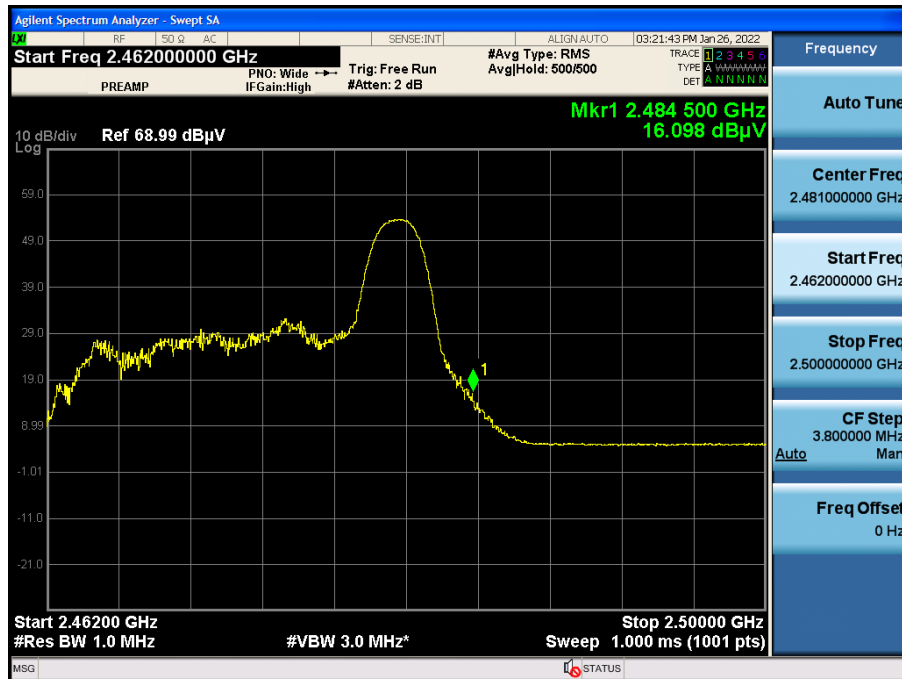


Radiated Restricted Band Edges plot – Peak result (802.11ax(HE20) Ch.13)

Integration method used 2483.5 MHz ~ 2484.5 MHz

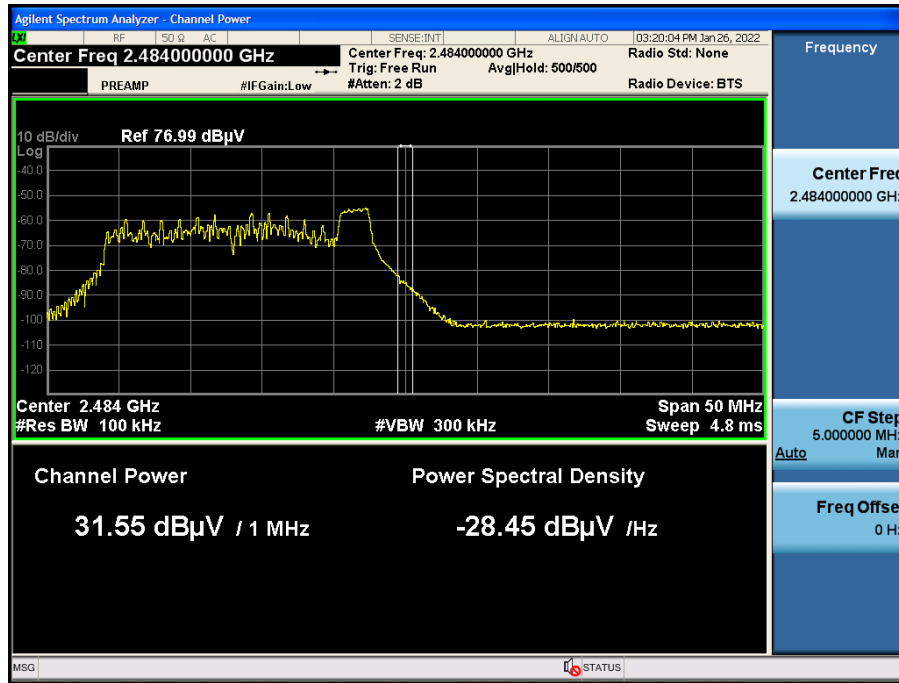


Radiated Restricted Band Edges plot – Peak result (802.11ax(HE20) Ch.13)

Integration method used 2484.5 MHz ~ 2485.5 MHz

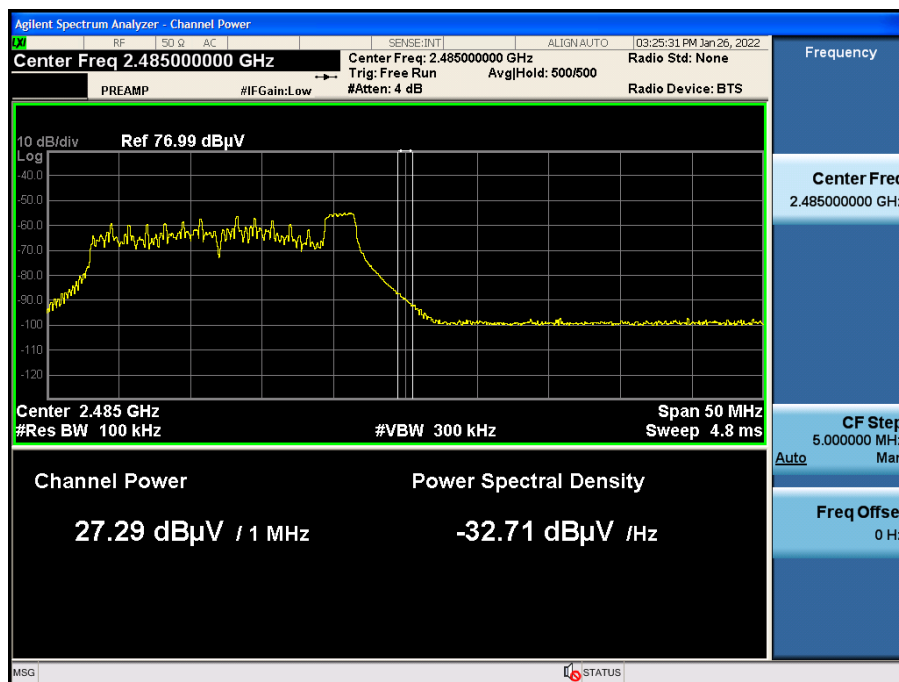

Radiated Restricted Band Edges plot – Peak result (802.11ax(HE20) Ch.13)

Standard method used 2485.5 MHz

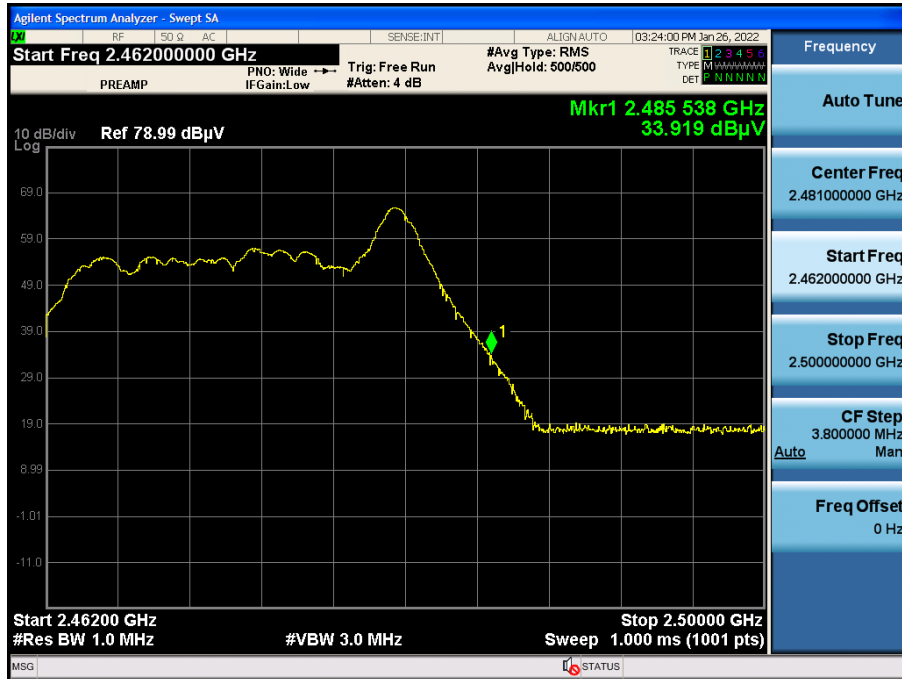

Note:

Plot of worst case are only reported.

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPAC	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2023	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	07/02/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Keysight	MY57820067	04/08/2022	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/20/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY50360067	02/16/2022	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/18/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/22/2023	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	05/19/2022	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170541	11/16/2023	Biennial
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	102168	07/05/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/24/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/24/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
High Pass Filter	WHK3.0/18G-10EF	Wainwright Instruments	8	01/21/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	25	01/21/2023	Annual
Attenuator (3 dB)	18B-03	Api tech.	1	01/21/2023	Annual
Attenuator(10 dB)	8493C-10	Agilent	08285	01/21/2023	Annual
Power Amplifier	CBLU1183540	CERNEX	22964	01/21/2023	Annual
Power Amplifier	CBL06185030	CERNEX	22965	01/21/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2202-FC028-P