

FCC LTE REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

February 15, 2022

Location:

HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-RF-2202-FC008

FCC ID:

A3LSMA736B

APPLICANT:

SAMSUNG Electronics Co., Ltd.

Model(s): SM-A736B/DS
Additional Model(s): SM-A736B
EUT Type: Mobile phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band12 (1.4)	699.7 – 715.3	1M09G7D	QPSK	0.060	17.79
		1M09W7D	16QAM	0.052	17.18
		1M09W7D	64QAM	0.041	16.11
		1M09W7D	256QAM	0.021	13.12
LTE – Band12 (3)	700.5 – 714.5	2M71G7D	QPSK	0.062	17.95
		2M70W7D	16QAM	0.054	17.29
		2M71W7D	64QAM	0.042	16.21
		2M70W7D	256QAM	0.021	13.19
LTE – Band12/17 (5)	701.5 – 713.5	4M50G7D	QPSK	0.062	17.93
		4M49W7D	16QAM	0.054	17.32
		4M50W7D	64QAM	0.041	16.18
		4M51W7D	256QAM	0.021	13.14
LTE – Band12/17 (10)	704.0 – 711.0	8M93G7D	QPSK	0.060	17.78
		8M94W7D	16QAM	0.052	17.14
		8M97W7D	64QAM	0.040	16.04
		8M96W7D	256QAM	0.019	12.75

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2202-FC008

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2202-FC008	February 15, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 OCCUPIED BANDWIDTH.	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.8 WORST CASE(RADIATED TEST)	14
3.9 WORST CASE(CONDUCTED TEST)	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	17
6. SUMMARY OF TEST RESULTS	18
7. SAMPLE CALCULATION	19
8. TEST DATA	21
8.1 EFFECTIVE RADIATED POWER.....	21
8.2 RADIATED SPURIOUS EMISSIONS	23
8.3 OCCUPIED BANDWIDTH	24
8.4 CONDUCTED SPURIOUS EMISSIONS	25
8.5 BAND EDGE	25
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	26
9. TEST PLOTS.....	38
10. ANNEX A_ TEST SETUP PHOTO.....	95

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA736B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-A736B/DS
Additional Model(s):	SM-A736B
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12/17 (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12/17 (10 MHz))
Date(s) of Tests:	January 10, 2022 ~ February 10, 2022
Serial number:	Radiated: R3CRB0BP4PA Conducted: 5a1ad468e1347ece

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

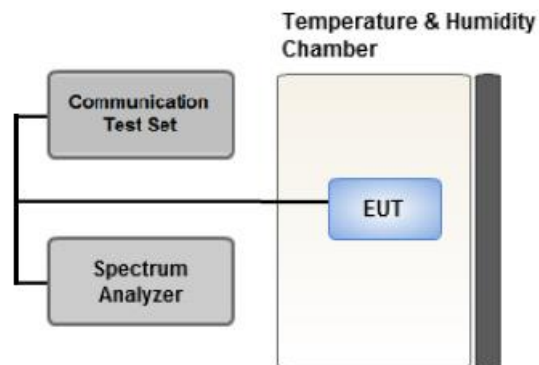

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

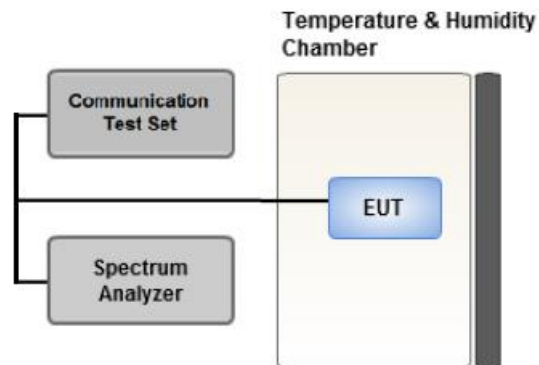

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.6 BAND EDGE

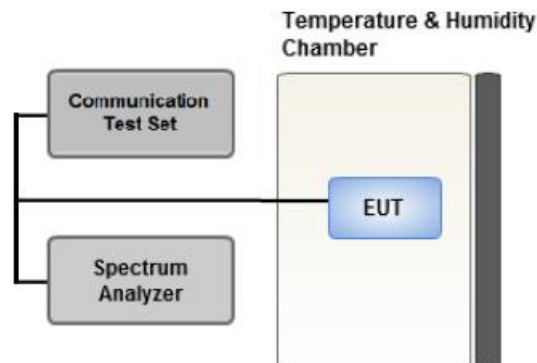

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

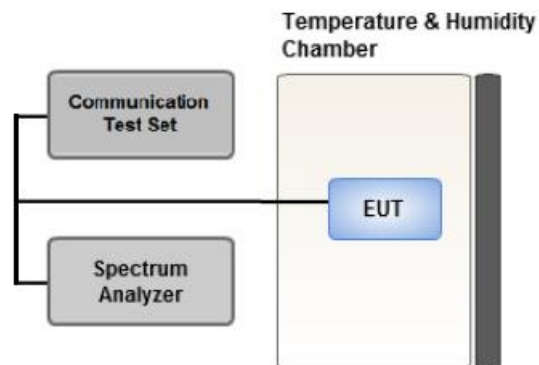

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- LTE Band 12 (699 – 716 MHz, 5/10 MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704 - 716 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 17 as well as Band 12.
- Please refer to the table below.
- SM-A736B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-A736B/DS)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Y
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 12 (699 – 716 MHz, 5/10 MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704 - 716 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 17 as well as Band 12.

- SM-A736B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A736B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		1.4, 3, 5, 10	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
699.7	LTE B12 (1.4 MHz)	QPSK	-31.15	28.99	-9.92	1.28	V	< 3.00	0.060	17.79
		16-QAM	-31.76	28.38	-9.92	1.28	V		0.052	17.18
		64-QAM	-32.83	27.31	-9.92	1.28	V		0.041	16.11
		256-QAM	-35.82	24.32	-9.92	1.28	V		0.021	13.12
707.5		QPSK	-31.59	28.49	-9.93	1.29	V		0.053	17.27
		16-QAM	-32.30	27.78	-9.93	1.29	V		0.045	16.56
		64-QAM	-33.34	26.74	-9.93	1.29	V		0.036	15.52
		256-QAM	-36.30	23.78	-9.93	1.29	V		0.018	12.56
715.3		QPSK	-31.44	28.69	-9.94	1.30	V		0.056	17.45
		16-QAM	-32.05	28.08	-9.94	1.30	V		0.048	16.84
		64-QAM	-33.05	27.08	-9.94	1.30	V		0.038	15.84
		256-QAM	-36.02	24.11	-9.94	1.30	V		0.019	12.87

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
700.5	LTE B12 (3 MHz)	QPSK	-31.03	29.15	-9.92	1.28	V	< 3.00	0.062	17.95
		16-QAM	-31.69	28.49	-9.92	1.28	V		0.054	17.29
		64-QAM	-32.77	27.41	-9.92	1.28	V		0.042	16.21
		256-QAM	-35.79	24.39	-9.92	1.28	V		0.021	13.19
707.5		QPSK	-31.51	28.57	-9.93	1.29	V		0.054	17.35
		16-QAM	-32.18	27.90	-9.93	1.29	V		0.047	16.68
		64-QAM	-33.19	26.89	-9.93	1.29	V		0.037	15.67
		256-QAM	-36.23	23.85	-9.93	1.29	V		0.018	12.63
714.5		QPSK	-31.42	28.74	-9.94	1.30	V		0.056	17.51
		16-QAM	-32.05	28.11	-9.94	1.30	V		0.049	16.88
		64-QAM	-33.15	27.01	-9.94	1.30	V		0.038	15.78
		256-QAM	-36.11	24.05	-9.94	1.30	V		0.019	12.82

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
701.5	LTE B12/17 (5 MHz)	QPSK	-31.08	29.13	-9.92	1.28	V	< 3.00	0.062	17.93
		16-QAM	-31.69	28.52	-9.92	1.28	V		0.054	17.32
		64-QAM	-32.83	27.38	-9.92	1.28	V		0.041	16.18
		256-QAM	-35.87	24.34	-9.92	1.28	V		0.021	13.14
707.5		QPSK	-31.48	28.60	-9.93	1.29	V		0.055	17.38
		16-QAM	-32.15	27.93	-9.93	1.29	V		0.047	16.71
		64-QAM	-33.21	26.87	-9.93	1.29	V		0.037	15.65
		256-QAM	-36.24	23.84	-9.93	1.29	V		0.018	12.62
713.5		QPSK	-31.55	28.60	-9.94	1.29	V		0.055	17.37
		16-QAM	-32.17	27.98	-9.94	1.29	V		0.047	16.75
		64-QAM	-33.27	26.88	-9.94	1.29	V		0.037	15.65
		256-QAM	-36.29	23.86	-9.94	1.29	V		0.018	12.63

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
704.0	LTE B12/17 (10 MHz)	QPSK	-31.16	28.98	-9.92	1.28	V	< 3.00	0.060	17.78
		16-QAM	-31.80	28.34	-9.92	1.28	V		0.052	17.14
		64-QAM	-32.90	27.24	-9.92	1.28	V		0.040	16.04
		256-QAM	-36.19	23.95	-9.92	1.28	V		0.019	12.75
707.5		QPSK	-31.41	28.67	-9.93	1.29	V		0.056	17.45
		16-QAM	-32.05	28.03	-9.93	1.29	V		0.048	16.81
		64-QAM	-33.11	26.97	-9.93	1.29	V		0.038	15.75
		256-QAM	-36.47	23.61	-9.93	1.29	V		0.017	12.39
711.0		QPSK	-31.56	28.48	-9.94	1.29	V		0.053	17.25
		16-QAM	-32.24	27.80	-9.94	1.29	V		0.045	16.57
		64-QAM	-33.26	26.78	-9.94	1.29	V		0.036	15.55
		256-QAM	-36.59	23.45	-9.94	1.29	V		0.017	12.22

8.2 RADIATED SPURIOUS EMISSIONS

☐ MODE: LTE B12
☐ MODULATION SIGNAL: 3 MHz QPSK
☐ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
23025 (700.5)	1 401.00	-51.42	7.60	-59.79	1.85	V	-54.04	-13.00
	2 101.50	-55.05	9.60	-58.93	2.27	H	-51.60	-13.00
	2 802.00	-56.53	10.80	-58.68	2.67	H	-50.55	-13.00
23095 (707.5)	1 415.00	-51.26	7.72	-59.98	1.86	V	-54.11	-13.00
	2 122.50	-55.73	9.44	-58.92	2.28	V	-51.76	-13.00
	2 830.00	-57.10	10.80	-59.11	2.65	H	-50.96	-13.00
23165 (714.5)	1 429.00	-51.51	7.84	-60.29	1.86	V	-54.31	-13.00
	2 143.50	-55.43	9.28	-58.21	2.29	V	-51.22	-13.00
	2 858.00	-56.31	10.84	-58.15	2.67	H	-49.98	-13.00

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
12	1.4 MHz	707.5	QPSK	6	0	1.0926
			16-QAM			1.0879
			64-QAM			1.0918
			256-QAM			1.0909
	3 MHz		QPSK	15		2.7099
			16-QAM			2.6974
			64-QAM			2.7062
			256-QAM			2.7039
12(17)	5 MHz		QPSK	25		4.5040
			16-QAM			4.4900
			64-QAM			4.5012
			256-QAM			4.5095
	10 MHz		QPSK	50		8.9315
			16-QAM			8.9424
			64-QAM			8.9715
			256-QAM			8.9573

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 39 ~ 54.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.7	3.6745	27.976	-67.393	-39.417	-13.00
		707.5	3.6885	27.976	-67.152	-39.176	
		715.3	3.7084	27.976	-66.972	-38.996	
	3	700.5	3.7099	27.976	-67.098	-39.122	
		707.5	3.7015	27.976	-67.496	-39.520	
		714.5	3.6835	27.976	-67.284	-39.308	
12(17)	5	701.5	3.7194	27.976	-67.342	-39.366	
		707.5	3.6995	27.976	-67.090	-39.114	
		713.5	3.6960	27.976	-67.044	-39.068	
	10	704.0	3.7000	27.976	-67.119	-39.143	
		707.5	3.7089	27.976	-67.290	-39.314	
		711.0	3.6795	27.976	-67.231	-39.255	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 83 ~ 94.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 55 ~ 82.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 699,700,000 Hz
- ▣ CHANNEL: 23017 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	699 700 036	0.0	0.000 000	0.000
100 %		-30	699 700 071	35.1	0.000 005	0.050
100 %		-20	699 700 068	32.3	0.000 005	0.046
100 %		-10	699 700 074	38.1	0.000 005	0.054
100 %		0	699 700 069	32.7	0.000 005	0.047
100 %		+10	699 700 070	33.7	0.000 005	0.048
100 %		+30	699 700 069	32.9	0.000 005	0.047
100 %		+40	699 700 070	34.0	0.000 005	0.049
100 %		+50	699 700 068	32.1	0.000 005	0.046
Batt. Endpoint	3.550	+20	699 700 002	-33.7	-0.000 005	-0.048

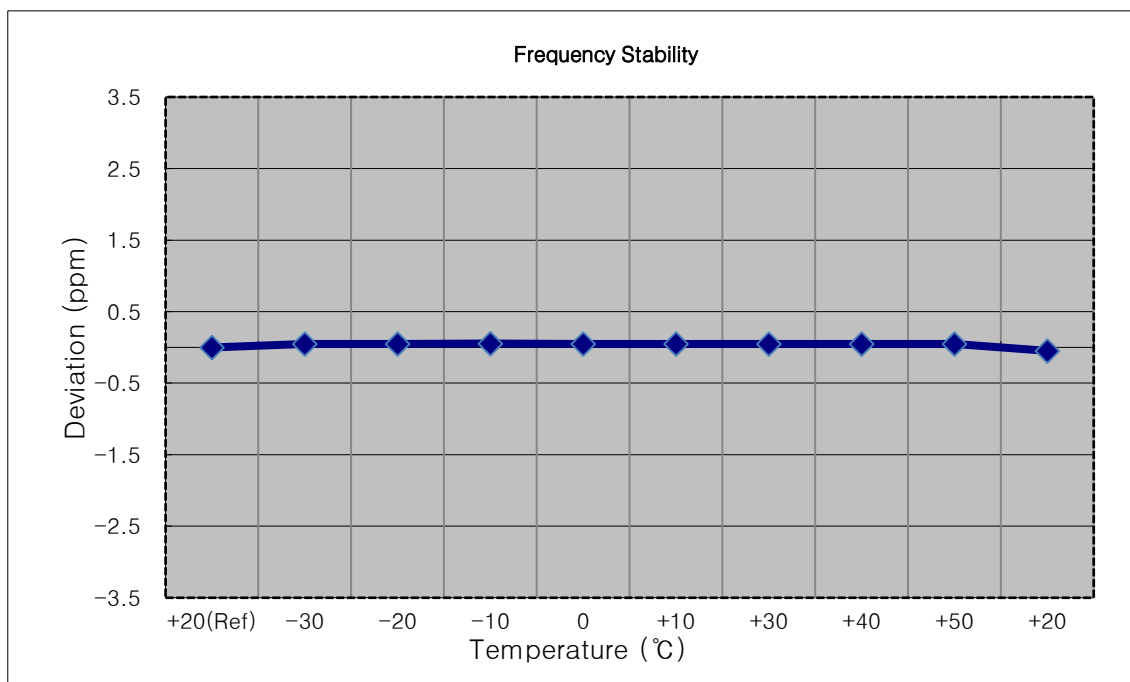


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 700,500,000 Hz
- ▣ CHANNEL: 23025 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	700 500 030	0.0	0.000 000	0.000
100 %		-30	700 500 061	30.7	0.000 004	0.044
100 %		-20	700 500 060	30.3	0.000 004	0.043
100 %		-10	700 500 059	29.0	0.000 004	0.041
100 %		0	700 500 062	31.7	0.000 005	0.045
100 %		+10	700 500 063	33.2	0.000 005	0.047
100 %		+30	700 500 064	33.6	0.000 005	0.048
100 %		+40	700 500 068	37.9	0.000 005	0.054
100 %		+50	700 500 063	32.6	0.000 005	0.047
Batt. Endpoint	3.550	+20	700 500 068	37.8	0.000 005	0.054

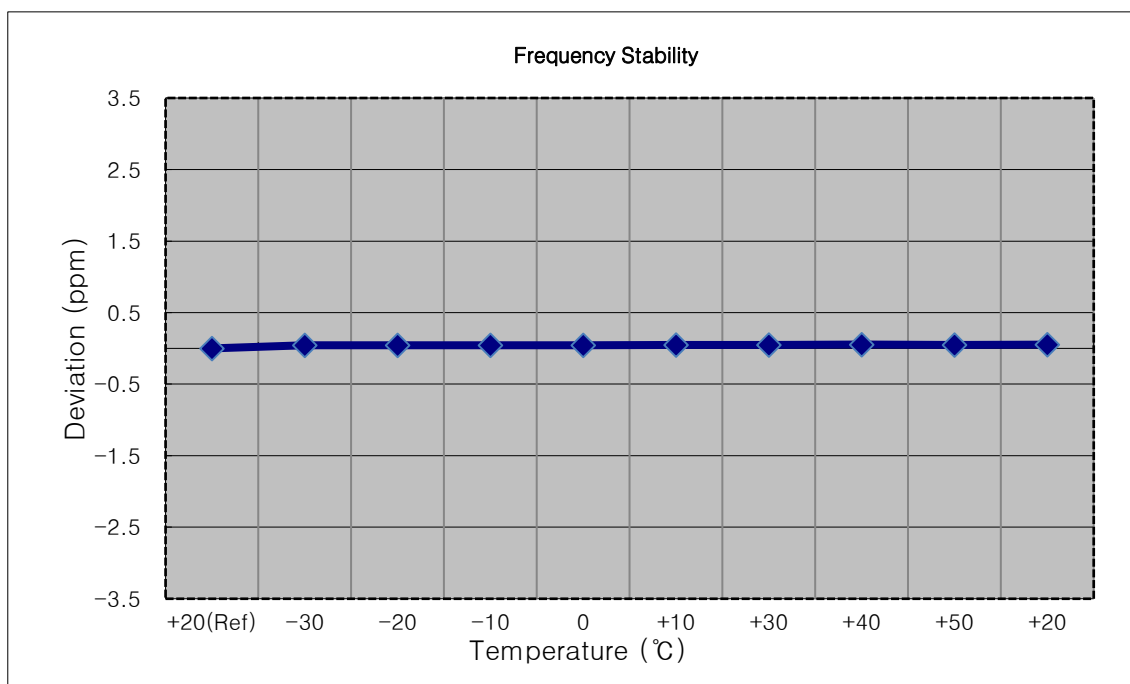


- ☐ MODE: LTE B12/17
☐ OPERATING FREQUENCY: 701,500,000 Hz
☐ CHANNEL: 23035 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	701 500 028	0.0	0.000 000	0.000
100 %		-30	701 500 058	30.2	0.000 004	0.043
100 %		-20	701 500 058	29.9	0.000 004	0.043
100 %		-10	701 500 057	29.4	0.000 004	0.042
100 %		0	701 500 056	27.9	0.000 004	0.040
100 %		+10	701 500 057	29.4	0.000 004	0.042
100 %		+30	701 500 054	25.9	0.000 004	0.037
100 %		+40	701 500 058	30.4	0.000 004	0.043
100 %		+50	701 500 056	27.6	0.000 004	0.039
Batt. Endpoint	3.550	+20	701 500 053	25.3	0.000 004	0.036

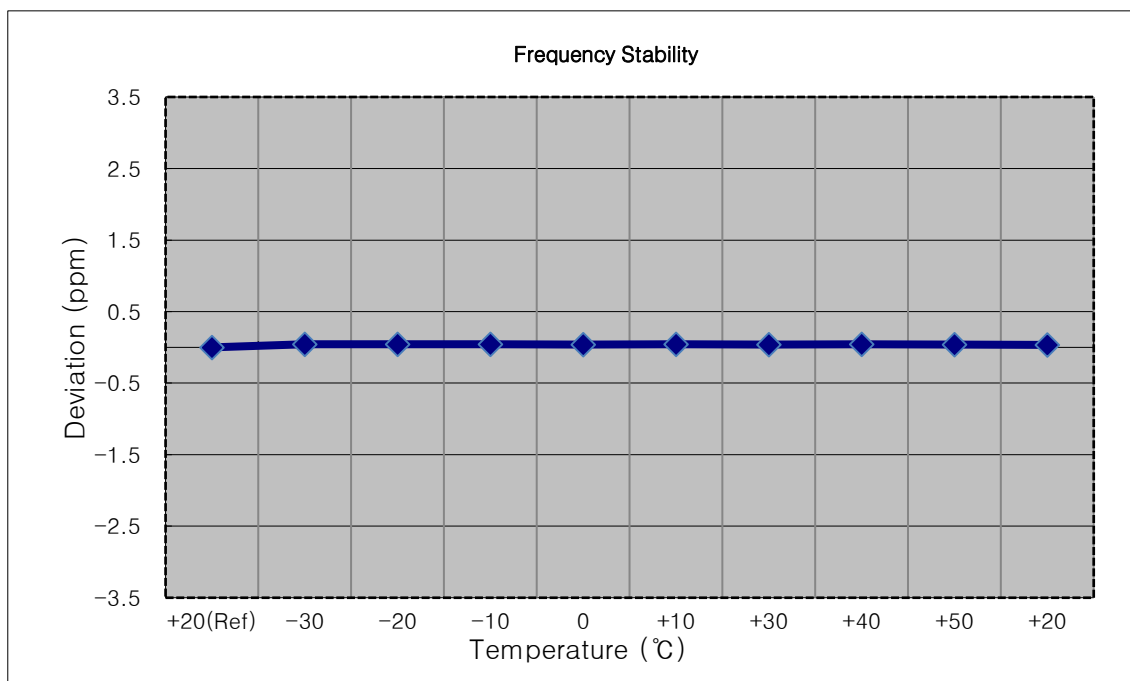


- ☐ MODE: LTE B12/17
☐ OPERATING FREQUENCY: 704,000,000 Hz
☐ CHANNEL: 23060 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	704 000 030	0.0	0.000 000	0.000
100 %		-30	704 000 062	31.9	0.000 005	0.045
100 %		-20	704 000 057	27.7	0.000 004	0.039
100 %		-10	704 000 060	29.8	0.000 004	0.042
100 %		0	704 000 062	32.5	0.000 005	0.046
100 %		+10	704 000 059	29.0	0.000 004	0.041
100 %		+30	704 000 059	28.8	0.000 004	0.041
100 %		+40	704 000 058	28.0	0.000 004	0.040
100 %		+50	704 000 063	33.5	0.000 005	0.048
Batt. Endpoint	3.550	+20	704 000 064	34.1	0.000 005	0.048

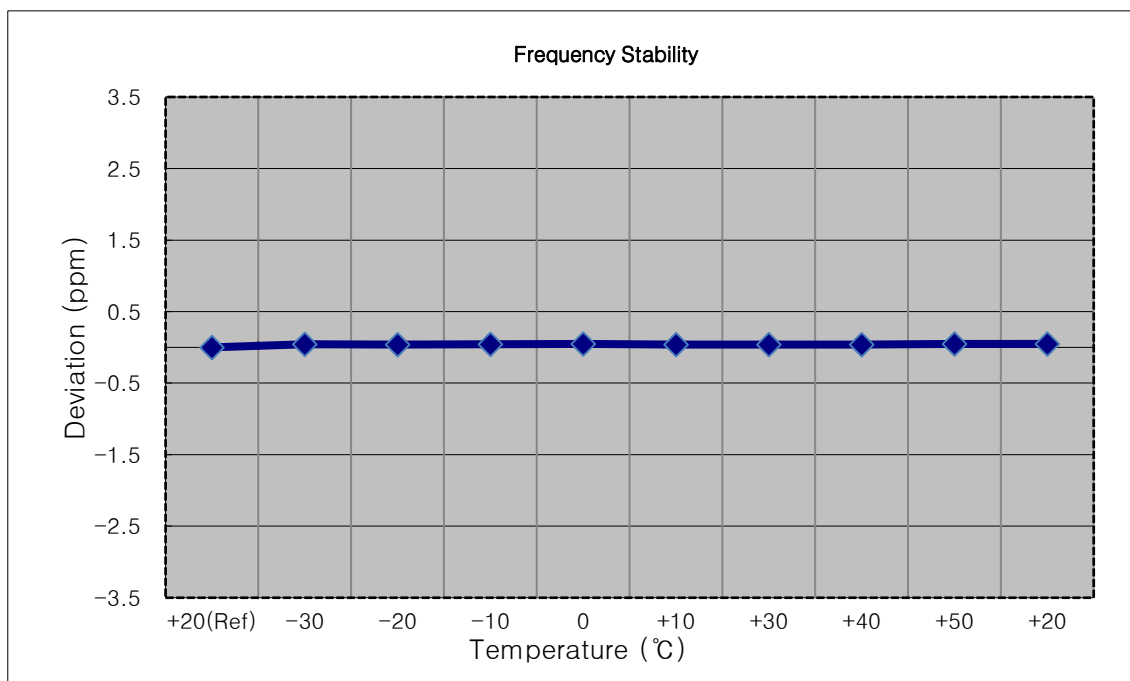


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	707 500 034	0.0	0.000 000	0.000
100 %		-30	707 500 068	33.9	0.000 005	0.048
100 %		-20	707 500 070	35.9	0.000 005	0.051
100 %		-10	707 500 065	30.7	0.000 004	0.043
100 %		0	707 500 067	32.5	0.000 005	0.046
100 %		+10	707 500 067	32.7	0.000 005	0.046
100 %		+30	707 500 065	30.8	0.000 004	0.044
100 %		+40	707 500 007	-27.7	-0.000 004	-0.039
100 %		+50	707 500 067	32.8	0.000 005	0.046
Batt. Endpoint	3.550	+20	707 500 065	31.0	0.000 004	0.044

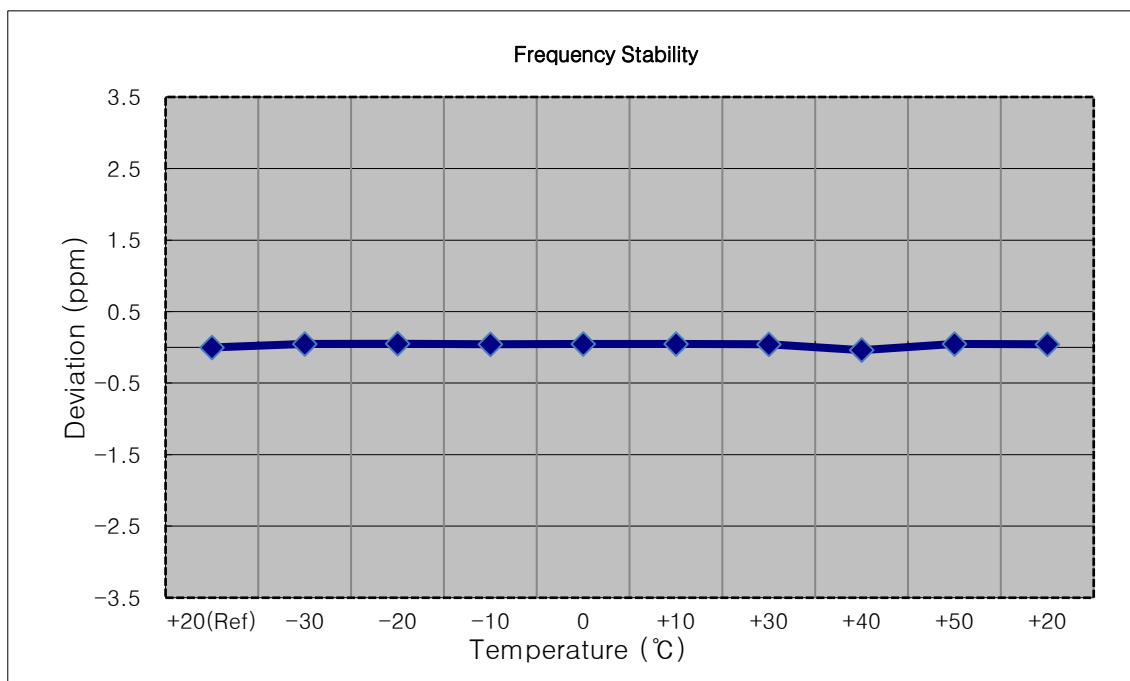


- ☐ MODE: LTE B12
☐ OPERATING FREQUENCY: 707,500,000 Hz
☐ CHANNEL: 23095 (3 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	707 500 031	0.0	0.000 000	0.000
100 %		-30	707 500 060	28.3	0.000 004	0.040
100 %		-20	707 500 061	29.2	0.000 004	0.041
100 %		-10	707 500 061	29.3	0.000 004	0.041
100 %		0	707 500 061	29.3	0.000 004	0.041
100 %		+10	707 500 062	30.9	0.000 004	0.044
100 %		+30	707 500 059	28.1	0.000 004	0.040
100 %		+40	707 500 070	38.3	0.000 005	0.054
100 %		+50	707 500 064	32.7	0.000 005	0.046
Batt. Endpoint	3.550	+20	707 500 065	33.7	0.000 005	0.048

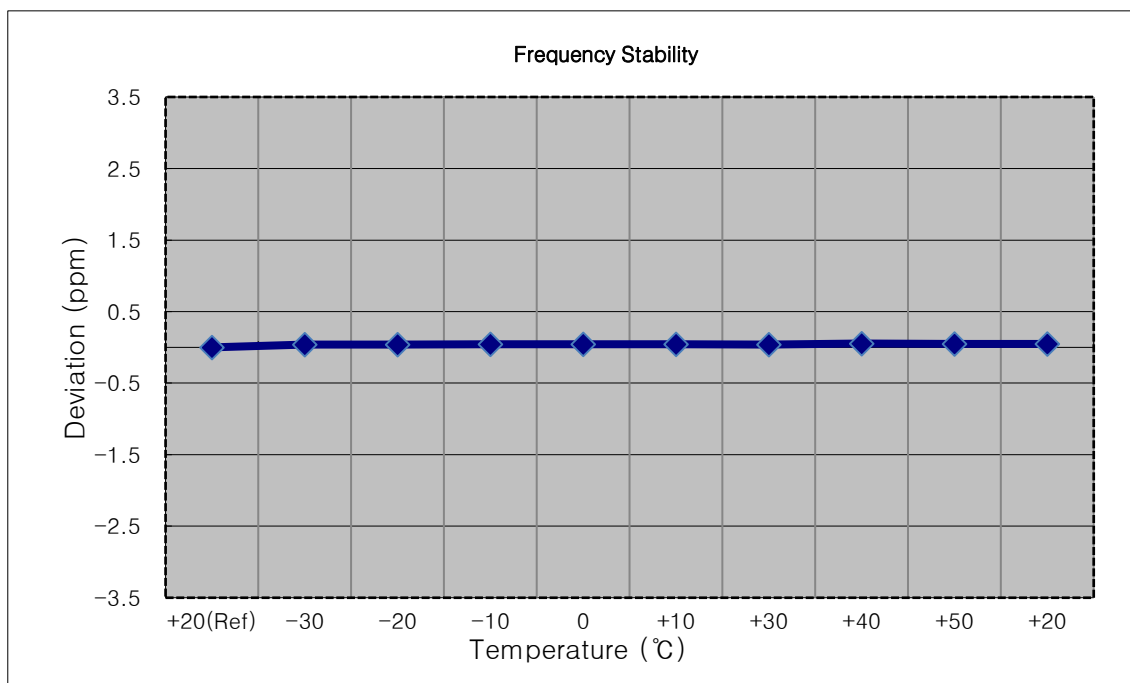


- ▣ MODE: LTE B12/17
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	707 500 027	0.0	0.000 000	0.000
100 %		-30	707 500 059	31.7	0.000 004	0.045
100 %		-20	707 500 055	27.9	0.000 004	0.039
100 %		-10	707 500 005	-22.7	-0.000 003	-0.032
100 %		0	707 500 057	29.9	0.000 004	0.042
100 %		+10	707 500 057	29.4	0.000 004	0.042
100 %		+30	707 500 053	25.6	0.000 004	0.036
100 %		+40	707 500 051	23.3	0.000 003	0.033
100 %		+50	707 500 052	24.6	0.000 003	0.035
Batt. Endpoint	3.550	+20	707 500 057	30.1	0.000 004	0.043

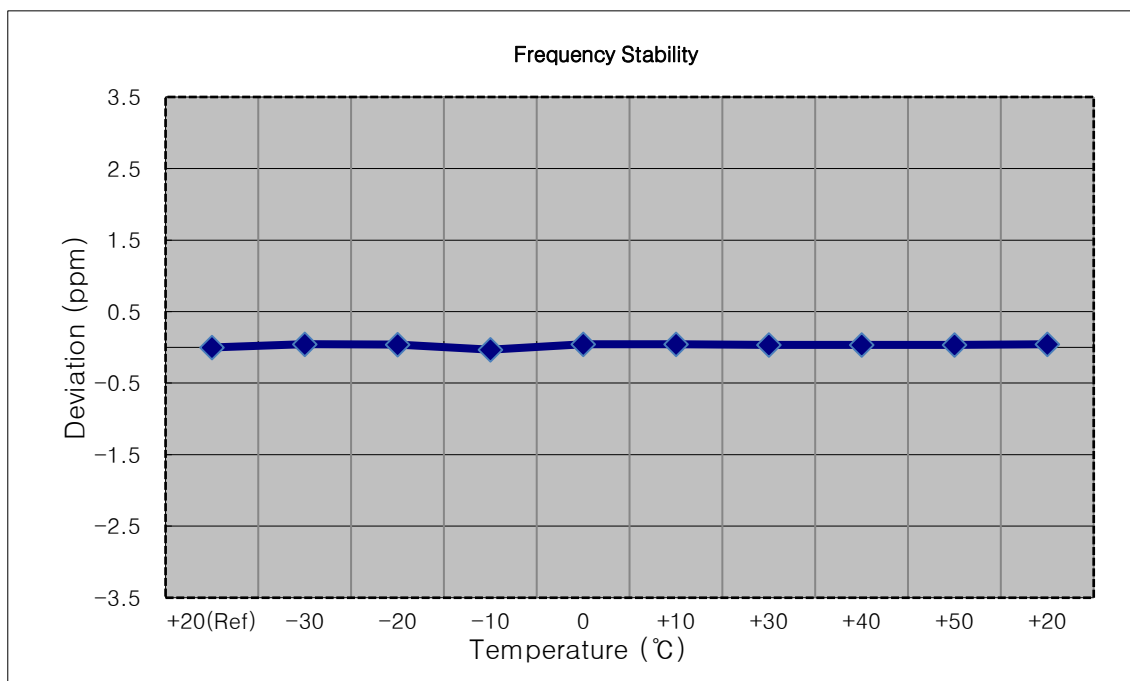


- ☐ MODE: LTE B12/17
☐ OPERATING FREQUENCY: 707,500,000 Hz
☐ CHANNEL: 23095 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	707 500 030	0.0	0.000 000	0.000
100 %		-30	707 500 056	26.0	0.000 004	0.037
100 %		-20	707 500 061	31.1	0.000 004	0.044
100 %		-10	707 500 064	33.3	0.000 005	0.047
100 %		0	707 500 061	30.8	0.000 004	0.044
100 %		+10	707 500 063	32.5	0.000 005	0.046
100 %		+30	707 500 062	31.5	0.000 004	0.045
100 %		+40	707 500 059	29.0	0.000 004	0.041
100 %		+50	707 500 060	29.7	0.000 004	0.042
Batt. Endpoint	3.550	+20	707 500 062	31.3	0.000 004	0.044

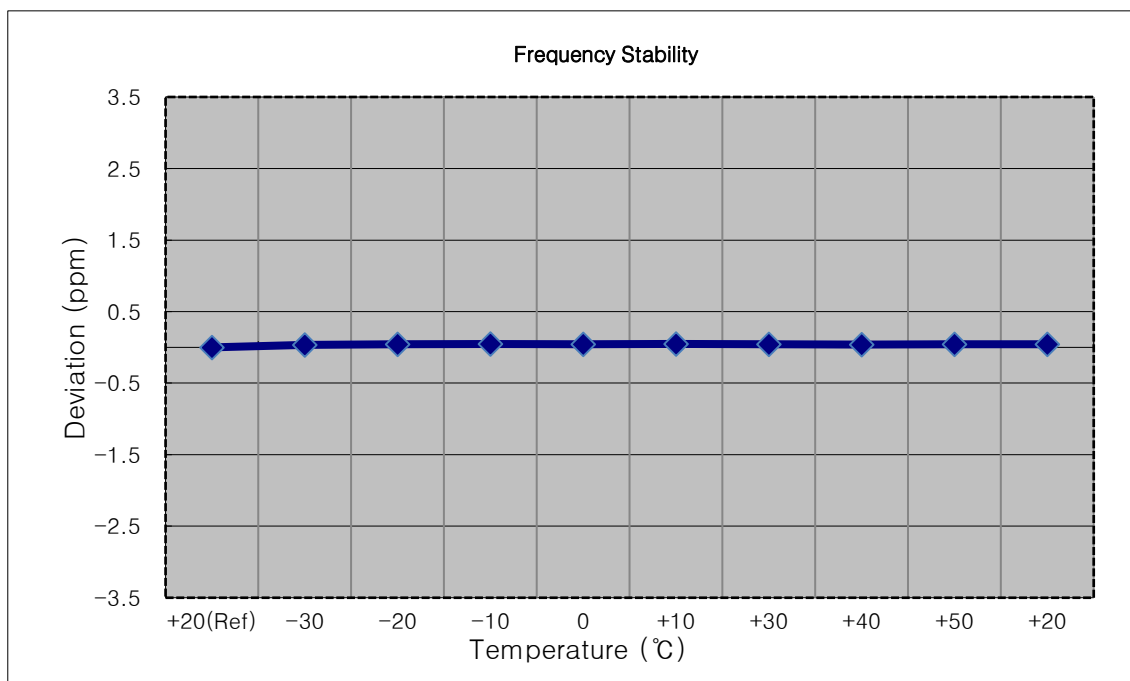


- ☐ MODE: LTE B12
☐ OPERATING FREQUENCY: 715,300,000 Hz
☐ CHANNEL: 23173 (1.4 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	715 300 029	0.0	0.000 000	0.000
100 %		-30	715 300 064	35.2	0.000 005	0.049
100 %		-20	715 300 060	30.7	0.000 004	0.043
100 %		-10	715 300 056	27.3	0.000 004	0.038
100 %		0	715 300 058	28.7	0.000 004	0.040
100 %		+10	715 299 999	-30.2	-0.000 004	-0.042
100 %		+30	715 300 062	33.1	0.000 005	0.046
100 %		+40	715 299 993	-35.9	-0.000 005	-0.050
100 %		+50	715 299 999	-30.0	-0.000 004	-0.042
Batt. Endpoint	3.550	+20	715 300 060	31.1	0.000 004	0.043

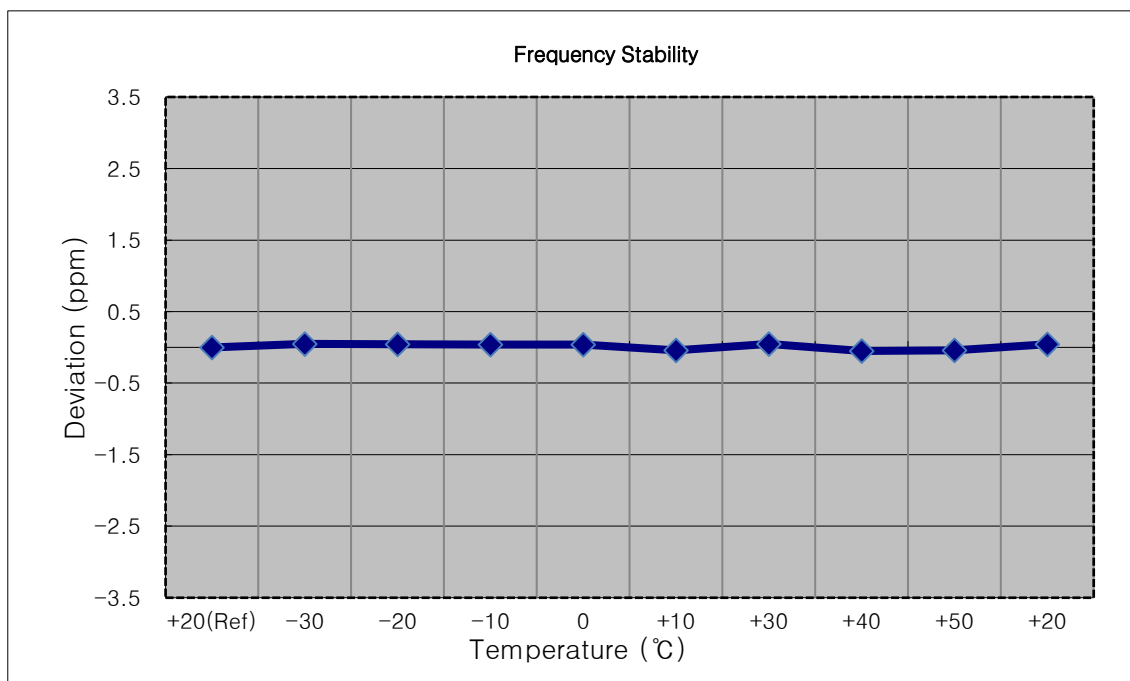


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 714,500,000 Hz
- ▣ CHANNEL: 23165 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	714 500 042	0.0	0.000 000	0.000
100 %		-30	714 500 074	32.6	0.000 005	0.046
100 %		-20	714 500 073	31.8	0.000 004	0.045
100 %		-10	714 500 082	40.1	0.000 006	0.056
100 %		0	714 500 073	31.1	0.000 004	0.044
100 %		+10	714 500 082	40.6	0.000 006	0.057
100 %		+30	714 500 080	38.3	0.000 005	0.054
100 %		+40	714 500 078	36.5	0.000 005	0.051
100 %		+50	714 500 082	40.2	0.000 006	0.056
Batt. Endpoint	3.550	+20	714 500 091	49.0	0.000 007	0.069

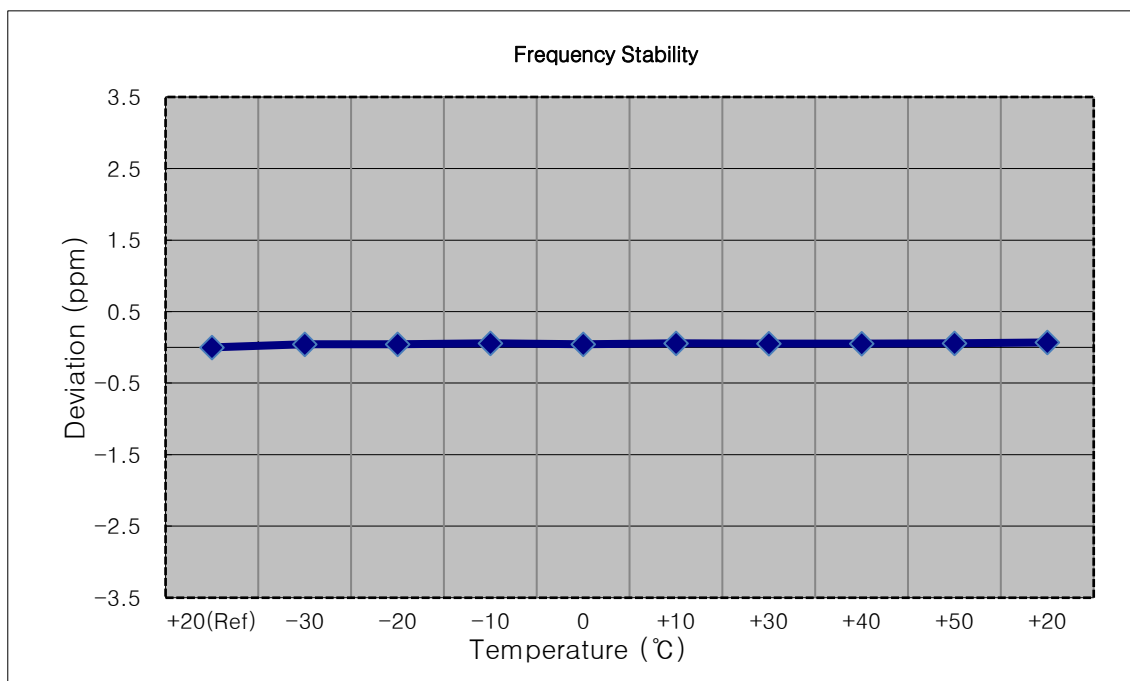


- ▣ MODE: LTE B12/17
- ▣ OPERATING FREQUENCY: 713,500,000 Hz
- ▣ CHANNEL: 23155 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	713 499 967	0.0	0.000 000	0.000
100 %		-30	713 499 937	-30.2	-0.000 004	-0.042
100 %		-20	713 500 003	35.6	0.000 005	0.050
100 %		-10	713 499 937	-30.0	-0.000 004	-0.042
100 %		0	713 499 930	-36.8	-0.000 005	-0.052
100 %		+10	713 500 000	32.5	0.000 005	0.046
100 %		+30	713 499 937	-30.5	-0.000 004	-0.043
100 %		+40	713 499 935	-32.1	-0.000 004	-0.045
100 %		+50	713 499 934	-33.4	-0.000 005	-0.047
Batt. Endpoint	3.550	+20	713 499 937	-29.9	-0.000 004	-0.042

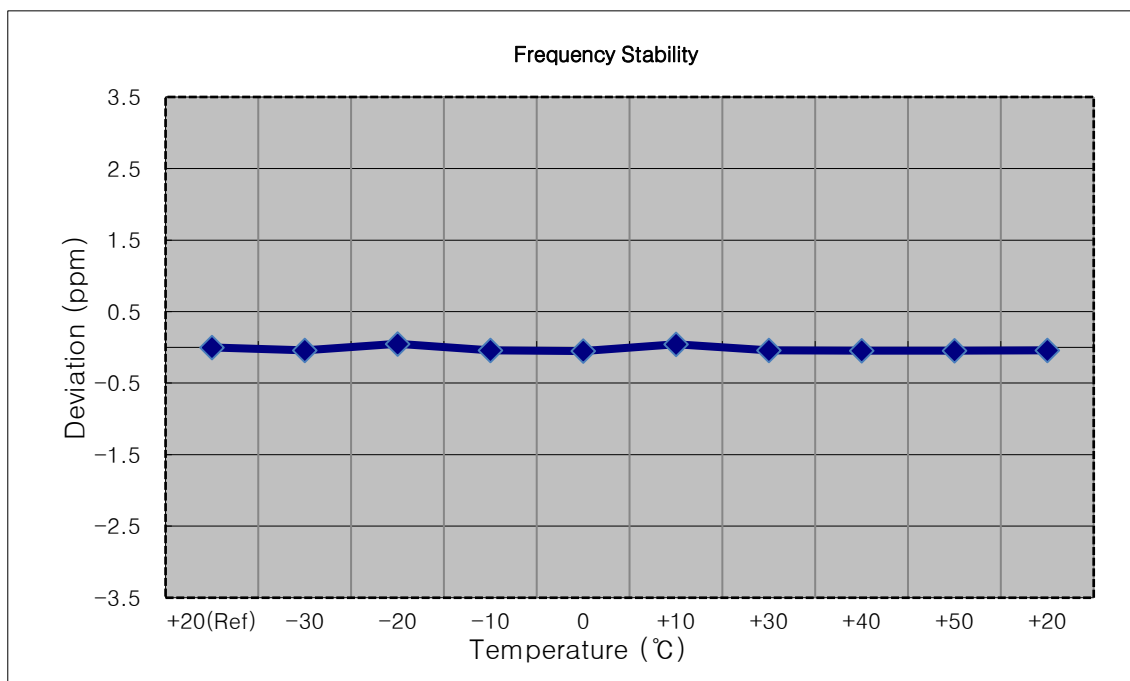


- ☐ MODE: LTE B12/17
☐ OPERATING FREQUENCY: 711,000,000 Hz
☐ CHANNEL: 23130 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	710 999 962	0.0	0.000 000	0.000
100 %		-30	710 999 996	34.7	0.000 005	0.049
100 %		-20	711 000 000	38.2	0.000 005	0.054
100 %		-10	710 999 926	-35.1	-0.000 005	-0.049
100 %		0	710 999 999	37.0	0.000 005	0.052
100 %		+10	711 000 001	39.1	0.000 005	0.055
100 %		+30	711 000 002	40.8	0.000 006	0.057
100 %		+40	710 999 998	36.8	0.000 005	0.052
100 %		+50	710 999 999	37.4	0.000 005	0.053
Batt. Endpoint	3.550	+20	710 999 998	36.0	0.000 005	0.051

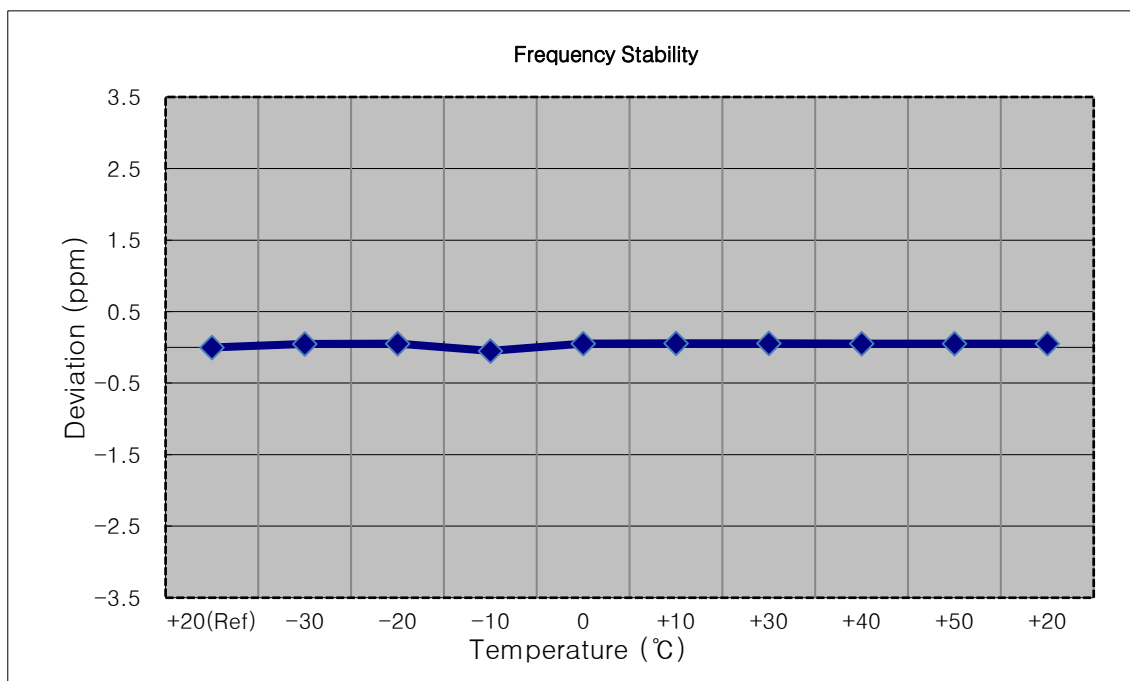


9. TEST PLOTS


BAND 12. Occupied Bandwidth Plot (1.4 M BW Ch.23095 QPSK_RB6_0)

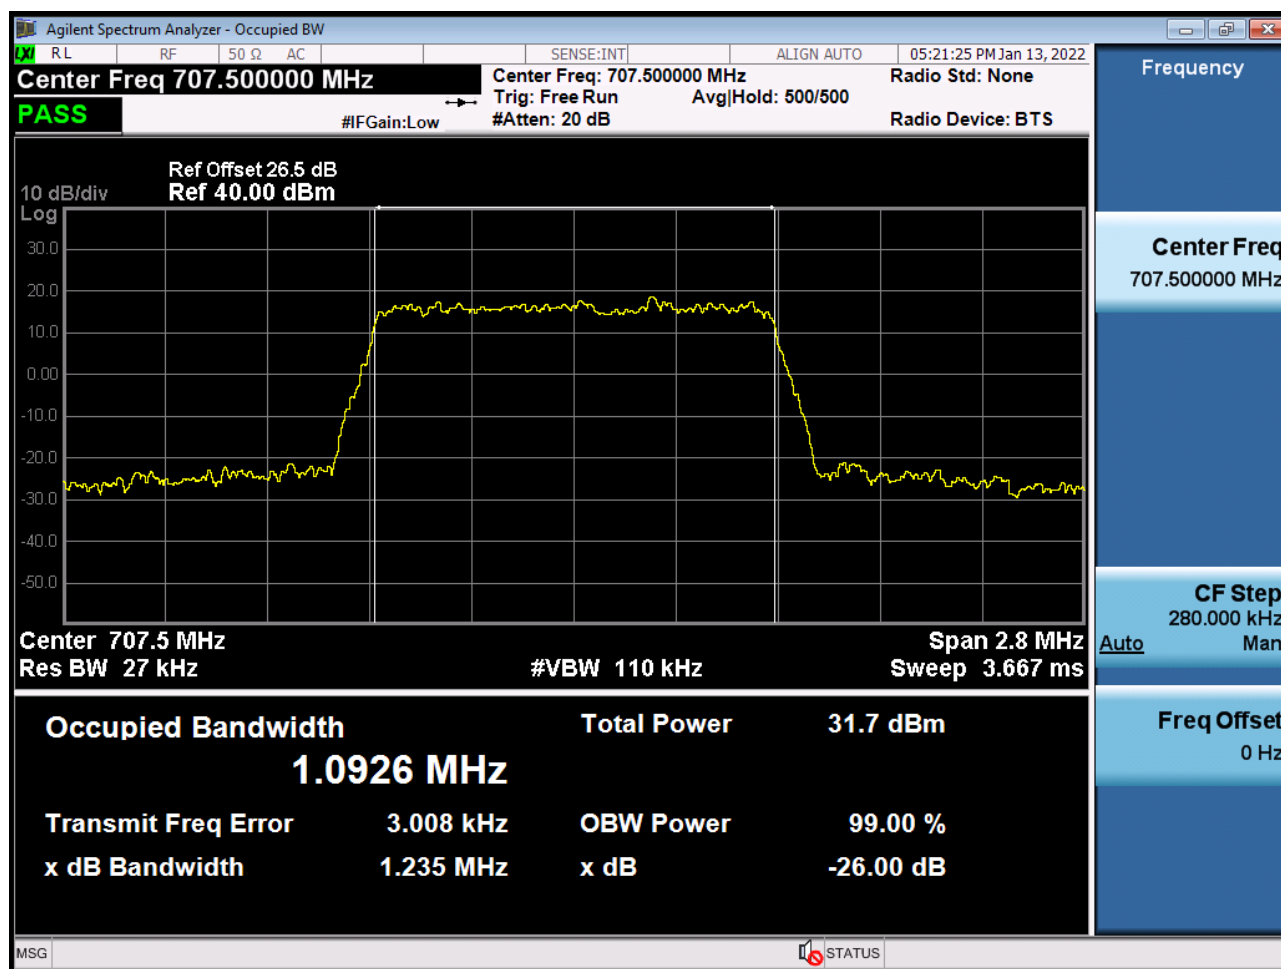


BAND 12. Occupied Bandwidth Plot (1.4 M BW Ch.23095 16QAM_RB6_0)

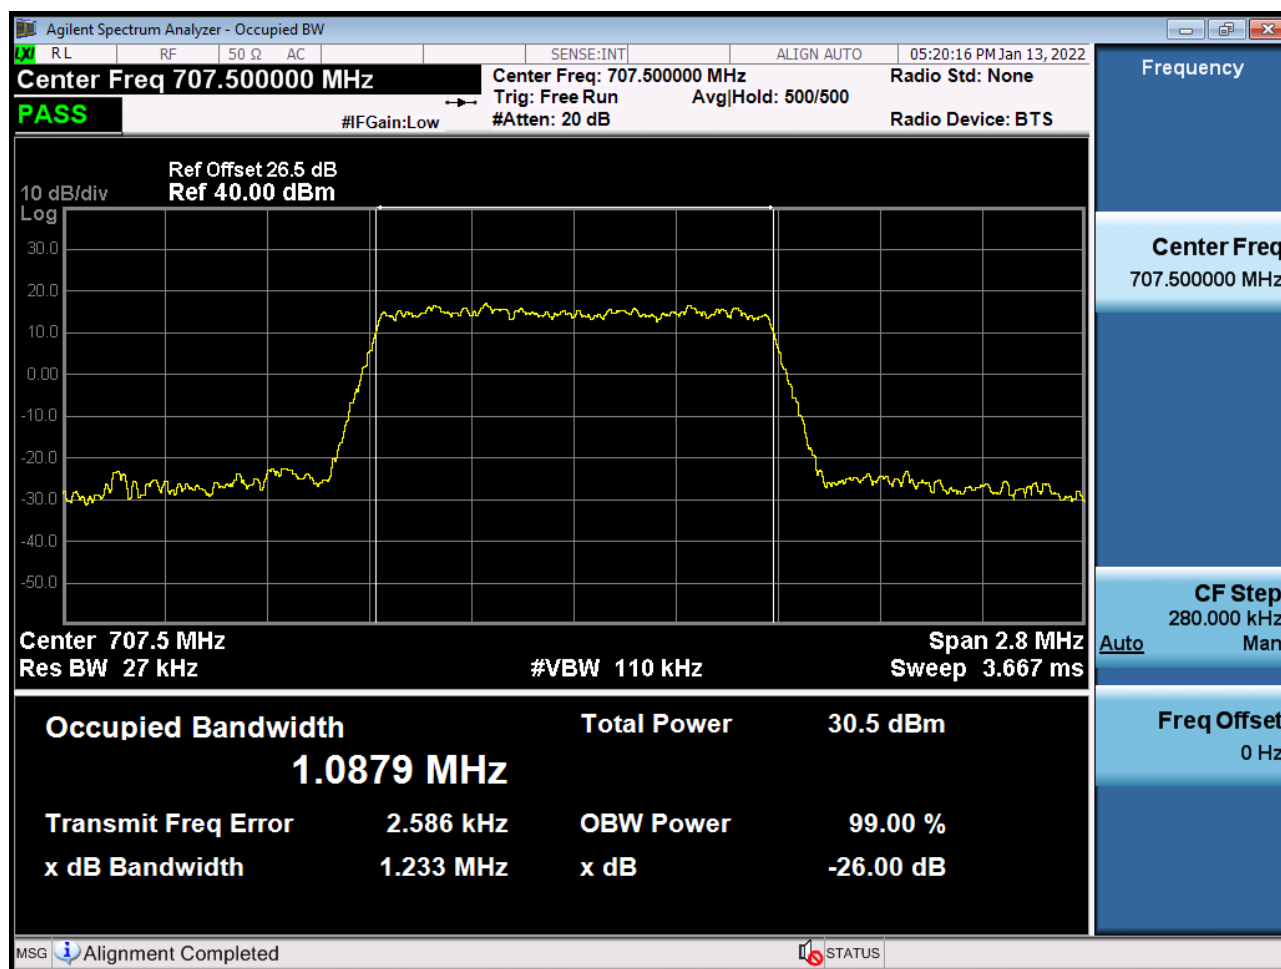


BAND 12. Occupied Bandwidth Plot (1.4 M BW Ch.23095 64QAM_RB6_0)

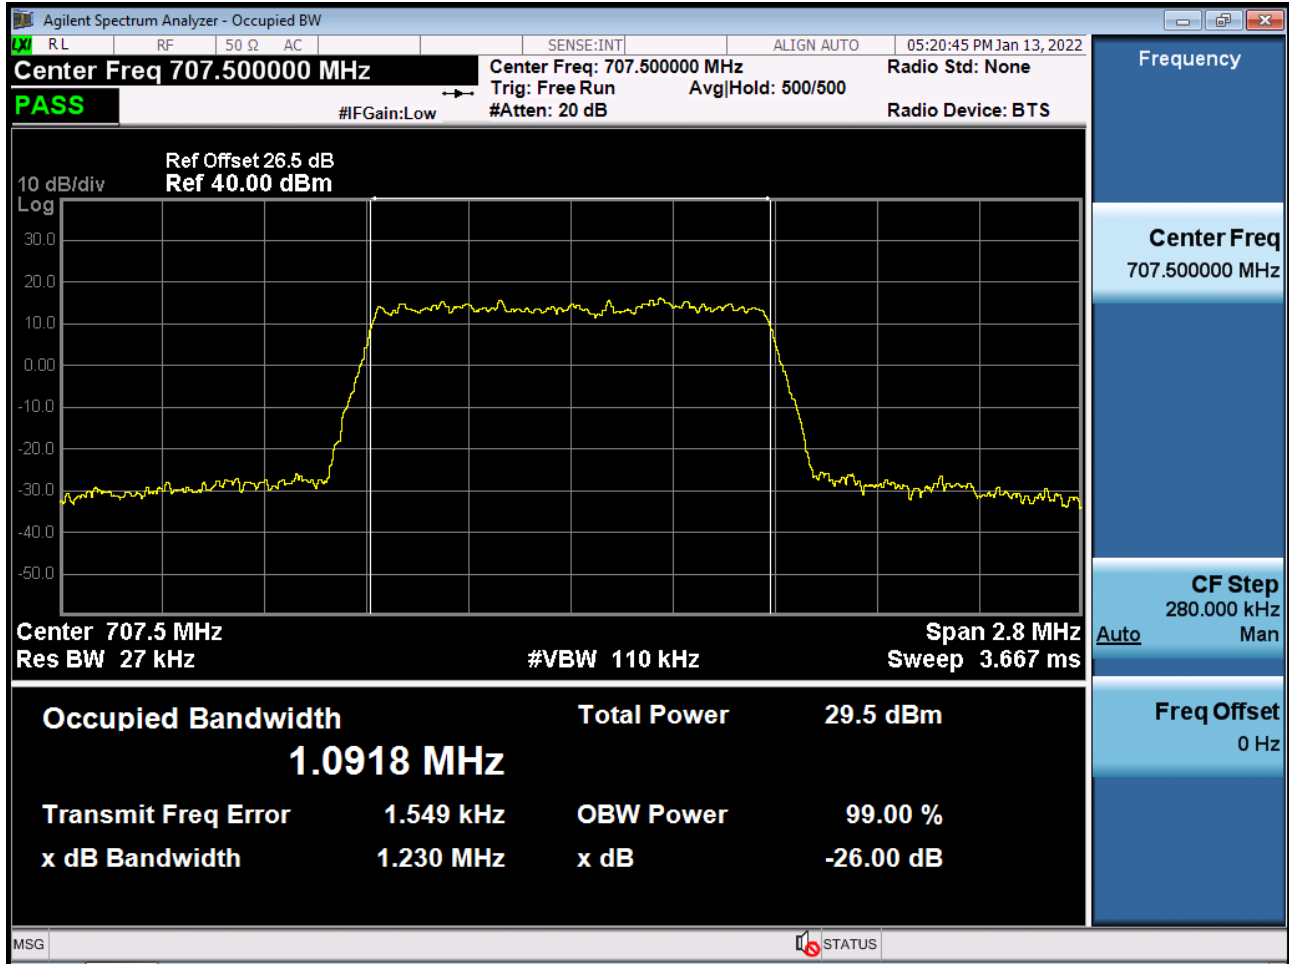


BAND 12. Occupied Bandwidth Plot (1.4 M BW Ch.23095 256QAM_RB6_0)

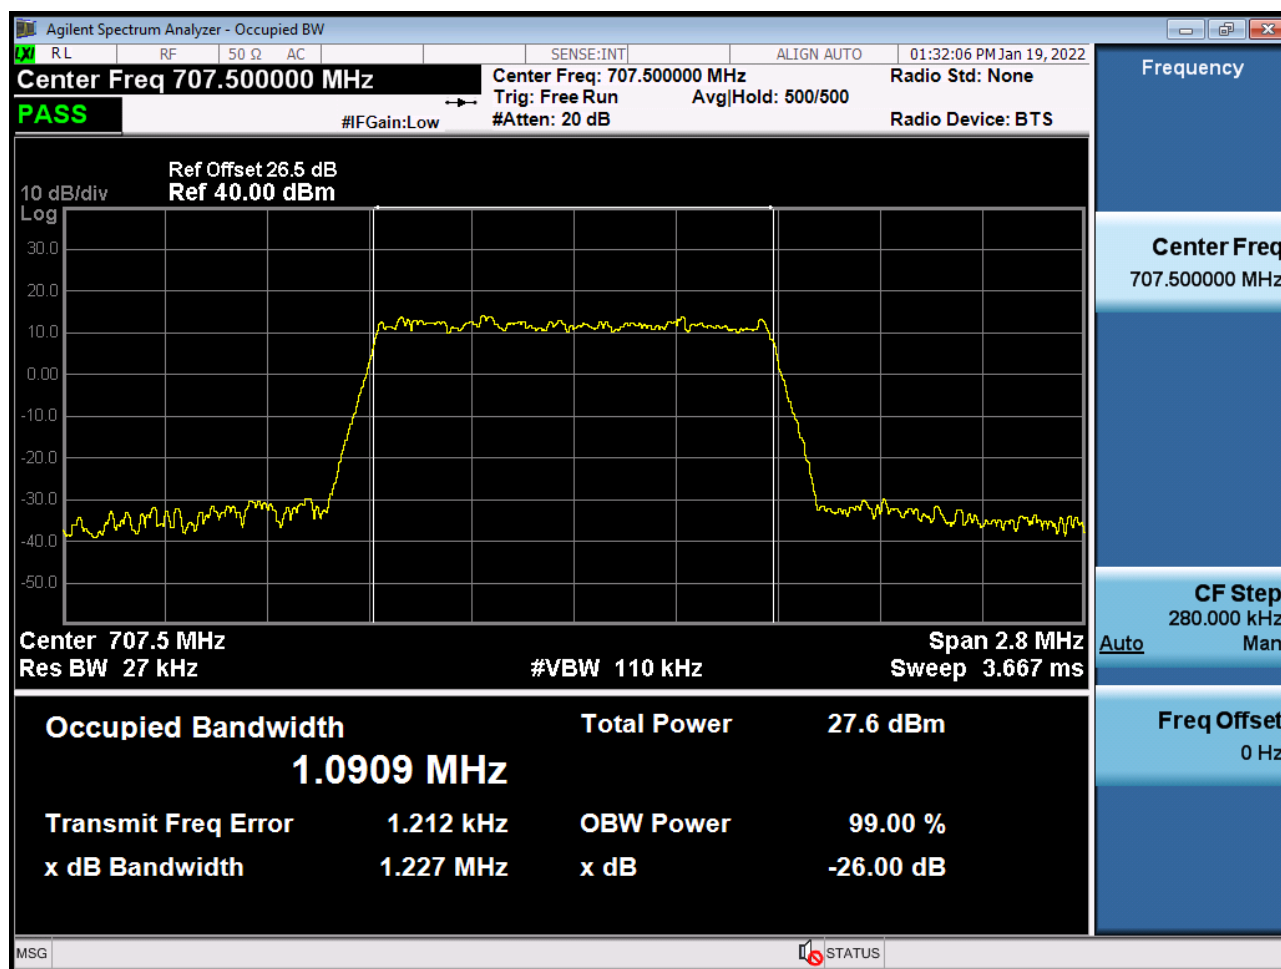


BAND 12. Occupied Bandwidth Plot (3 M BW Ch.23095 QPSK_RB15_0)

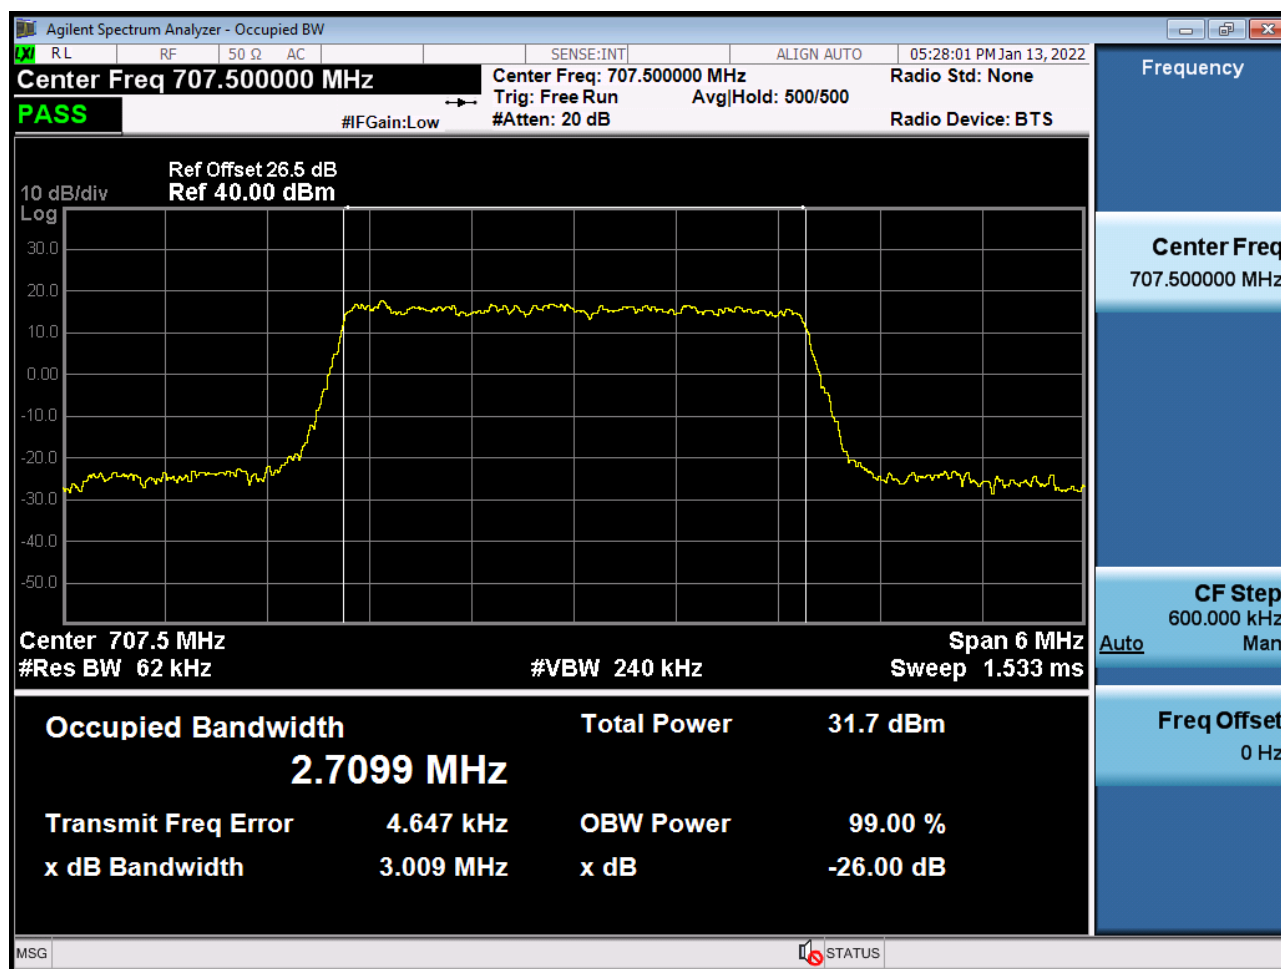


BAND 12. Occupied Bandwidth Plot (3 M BW Ch.23095 16QAM_RB15_0)

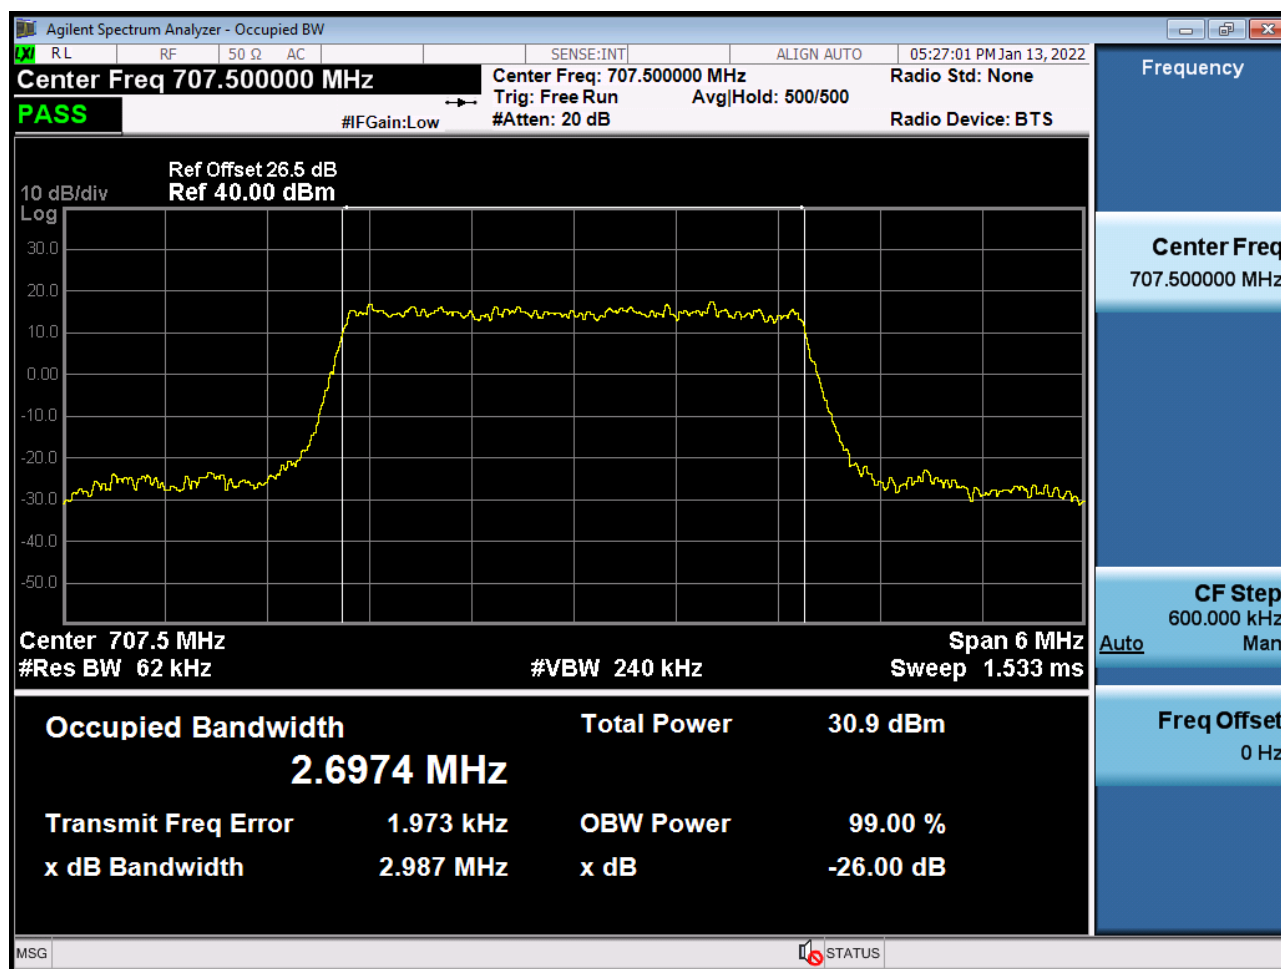


BAND 12. Occupied Bandwidth Plot (3 M BW Ch.23095 64QAM_RB15_0)

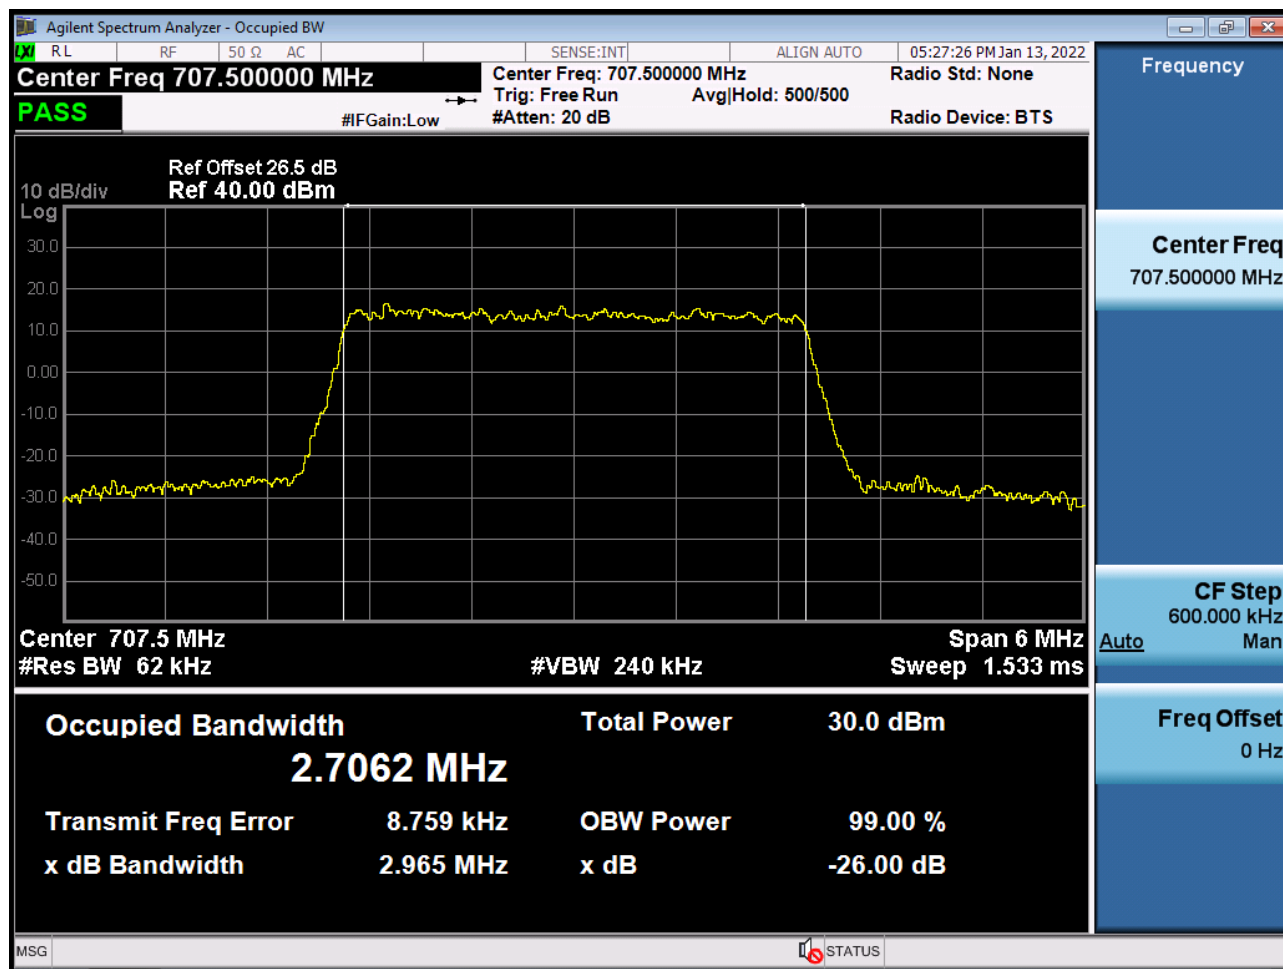


BAND 12. Occupied Bandwidth Plot (3 M BW Ch.23095 256QAM_RB15_0)

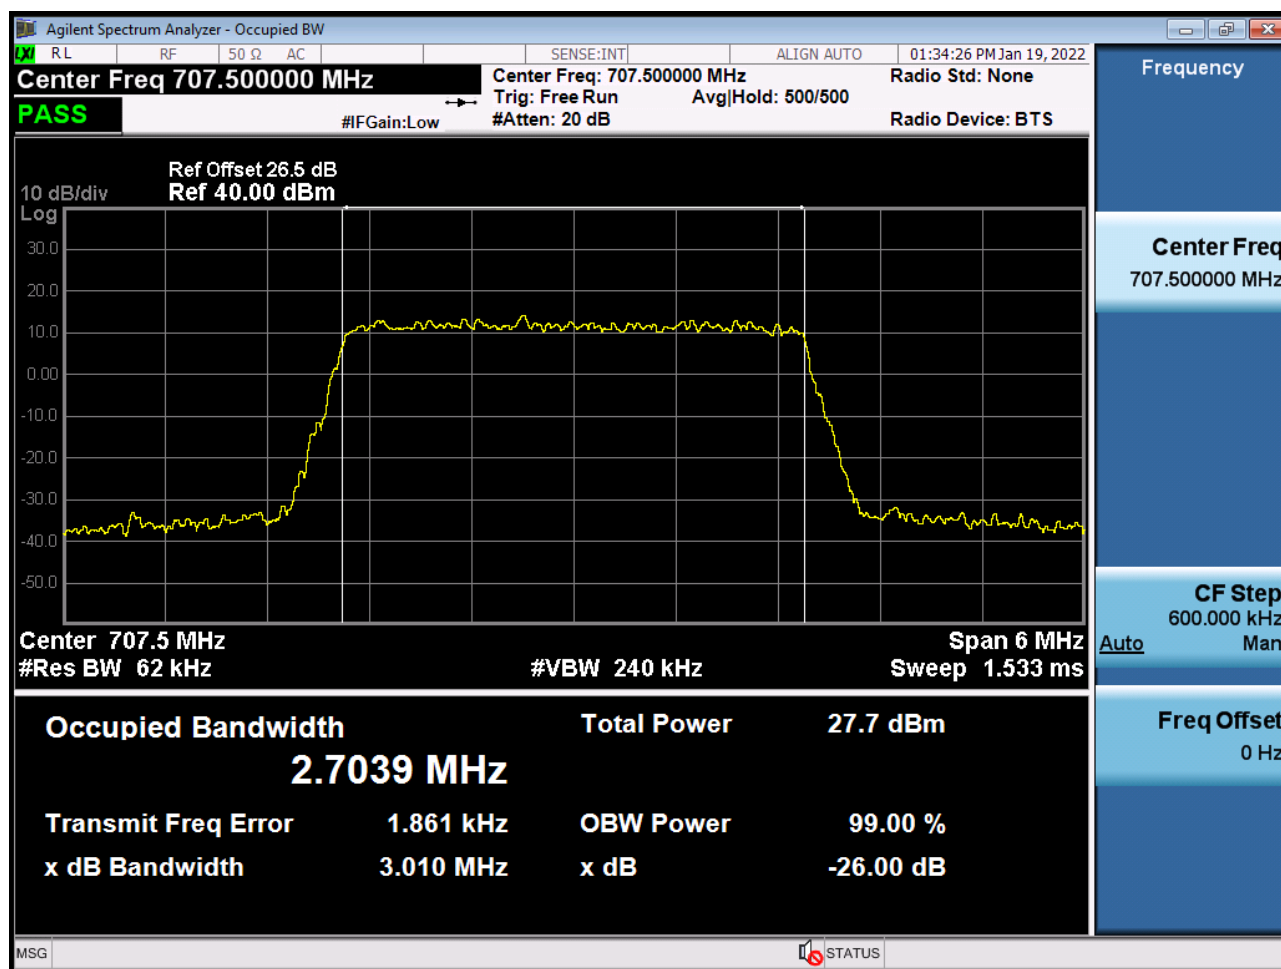


BAND 12/17. Occupied Bandwidth Plot (5 M BW Ch.23095 QPSK_RB25_0)

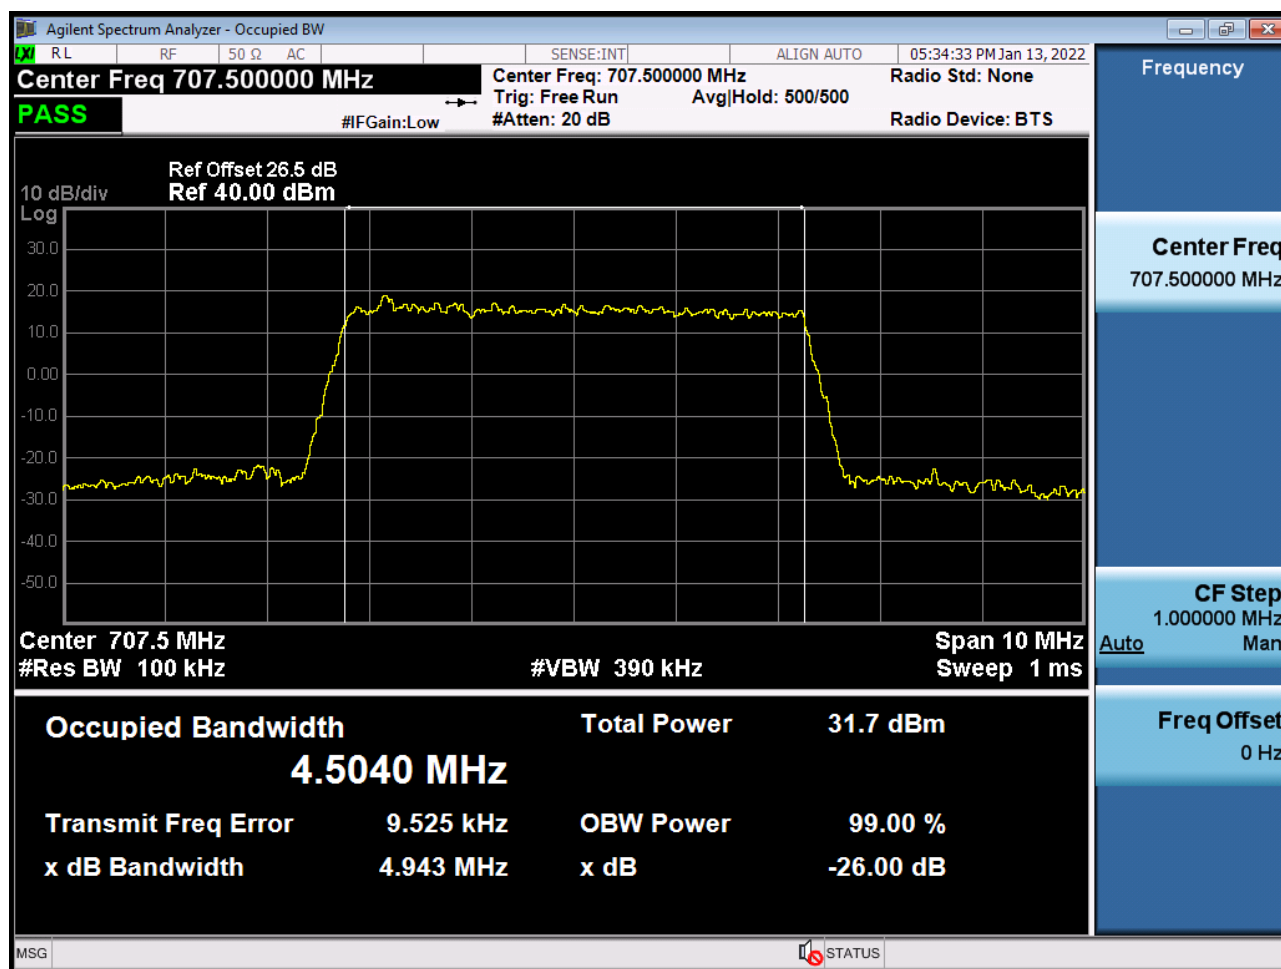


BAND 12/17. Occupied Bandwidth Plot (5 M BW Ch.23095 16QAM_RB25_0)

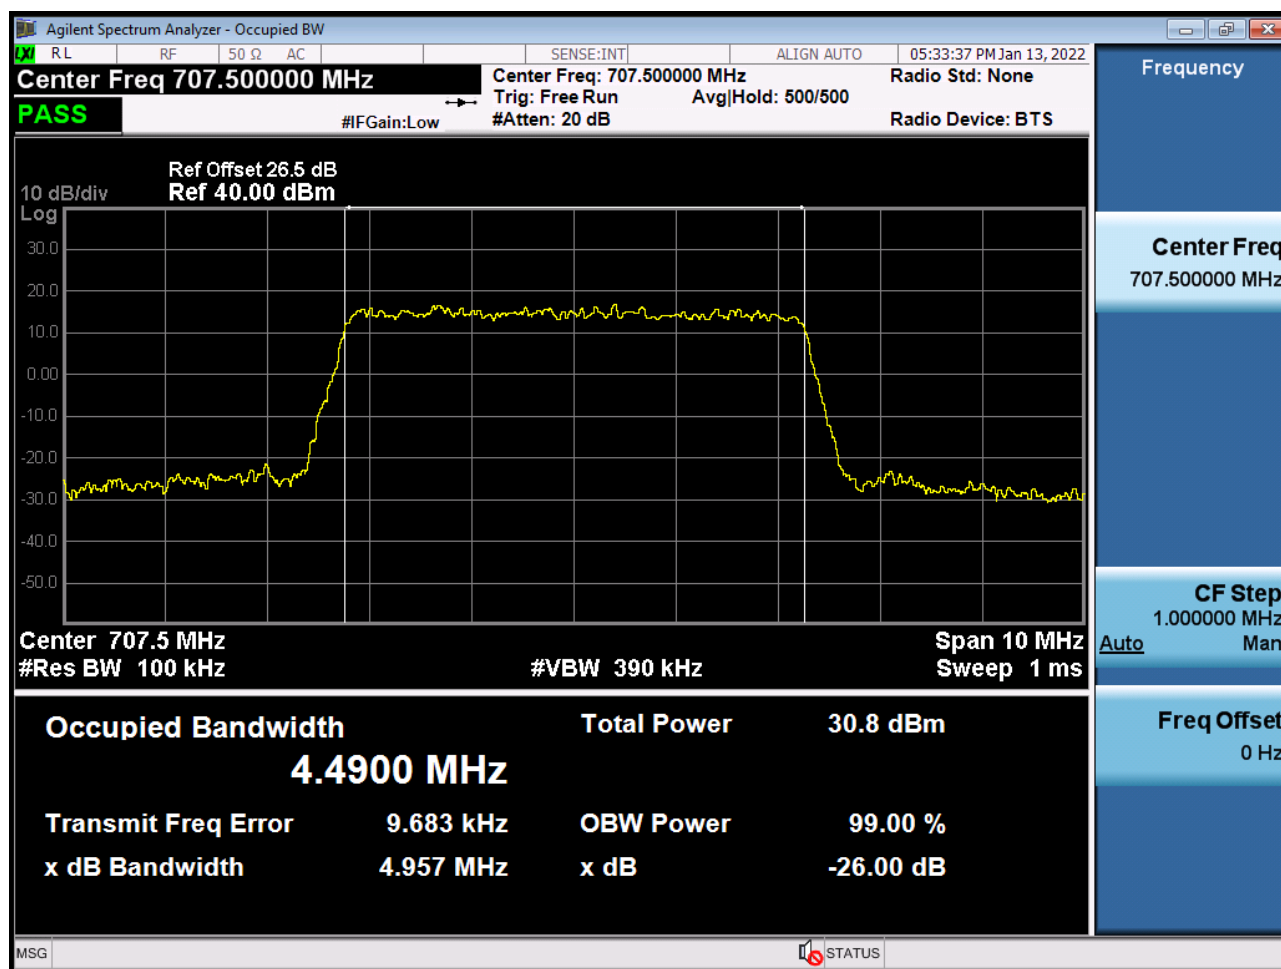


BAND 12/17. Occupied Bandwidth Plot (5 M BW Ch.23095 64QAM_RB25_0)

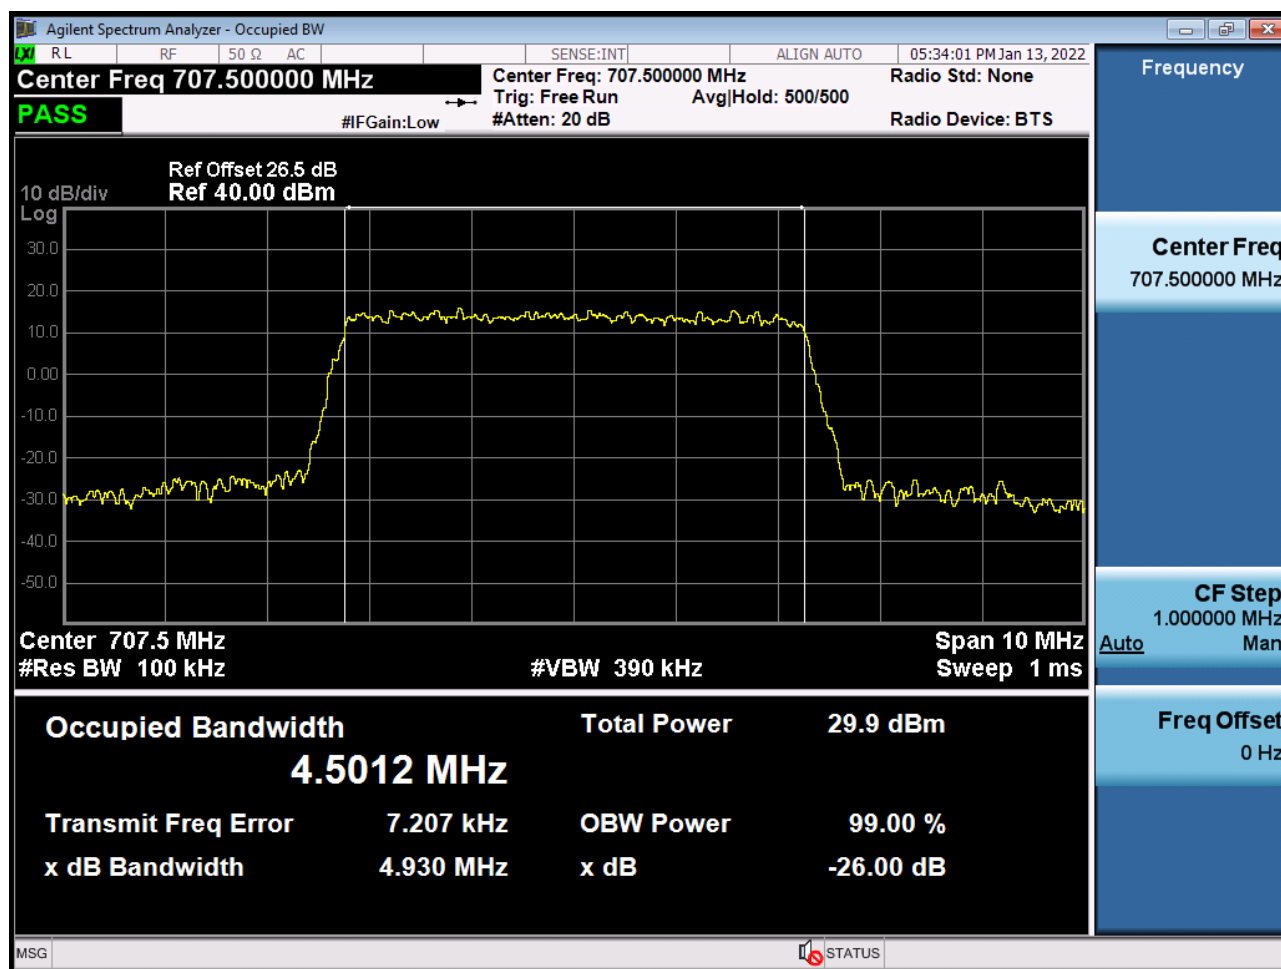


BAND 12/17. Occupied Bandwidth Plot (5 M BW Ch.23095 256QAM_RB25_0)

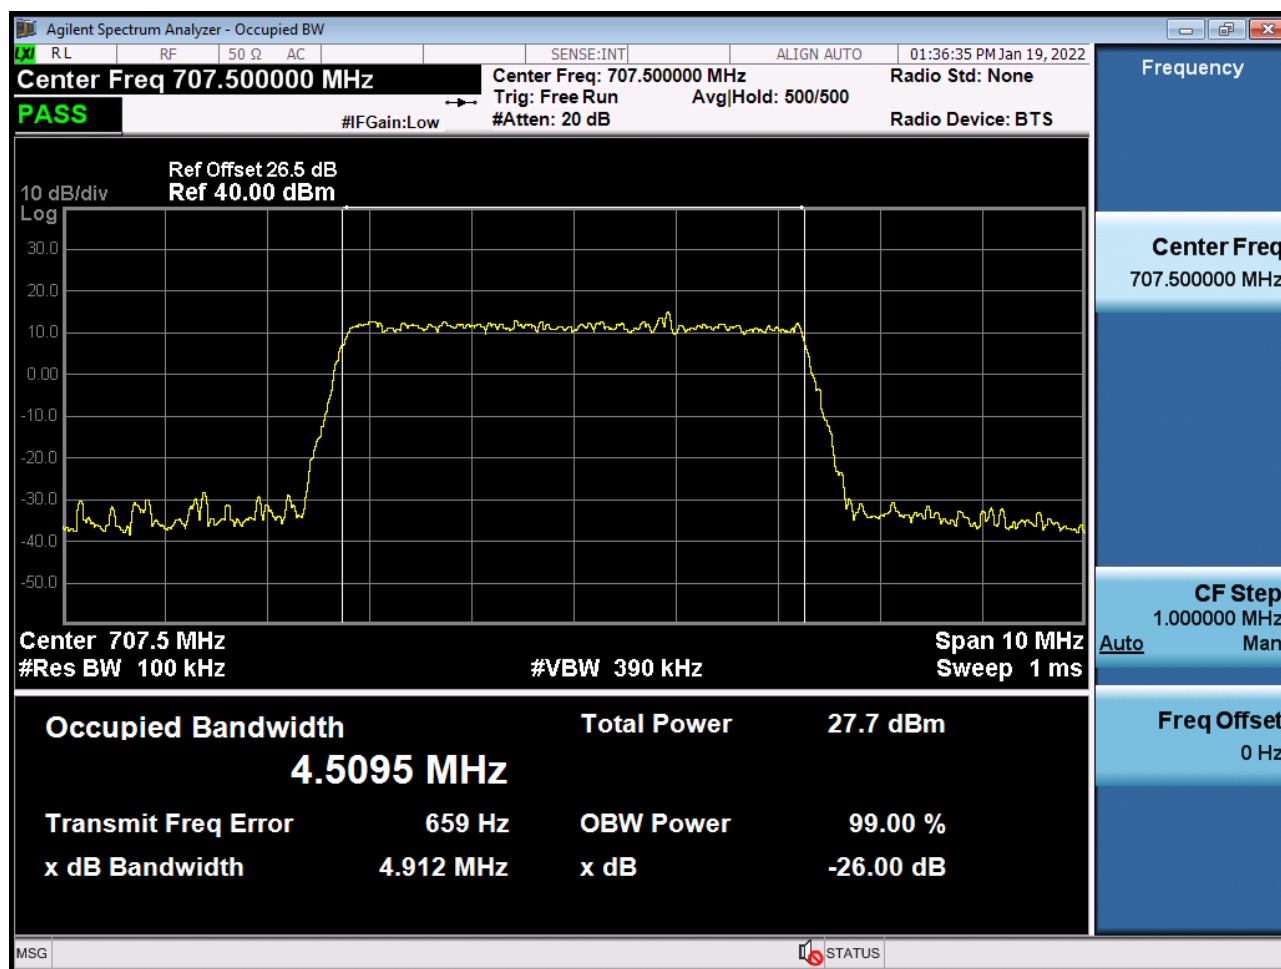


BAND 12/17. Occupied Bandwidth Plot (10 M BW Ch.23095 QPSK_RB50_0)

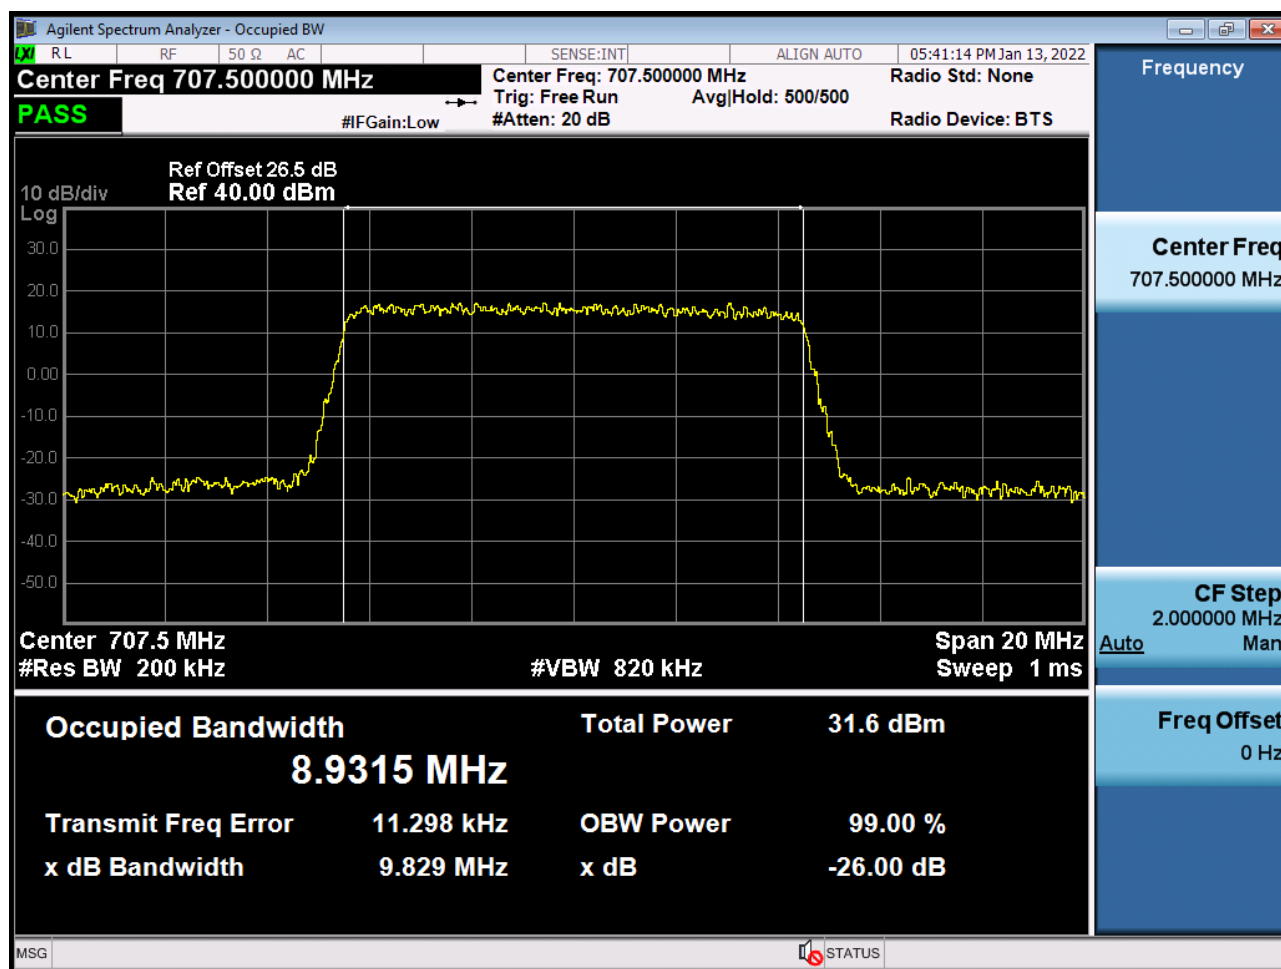


BAND 12/17. Occupied Bandwidth Plot (10 M BW Ch.23095 16QAM_RB50_0)

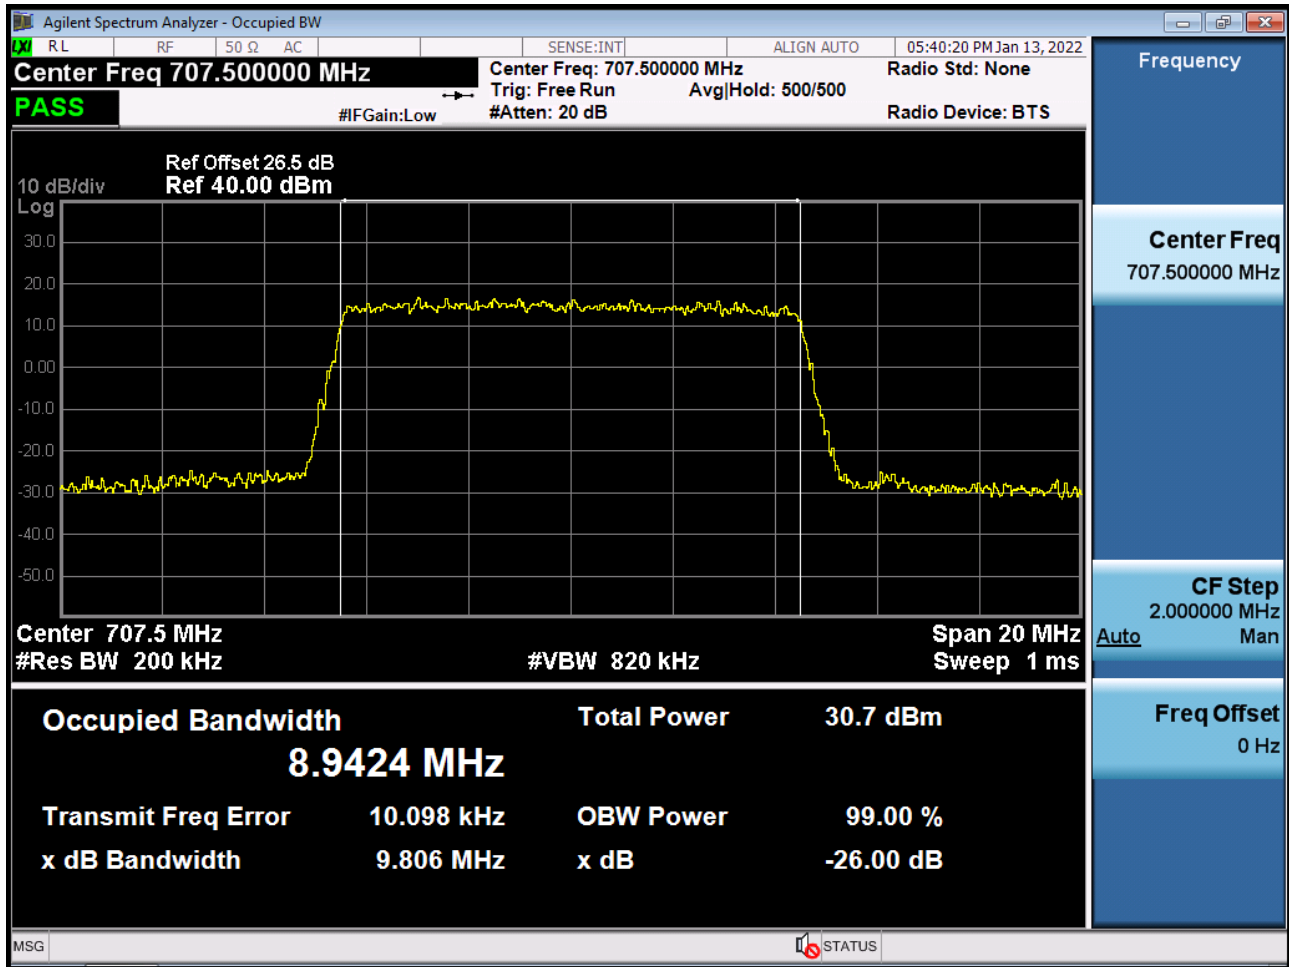


BAND 12/17. Occupied Bandwidth Plot (10 M BW Ch.23095 64QAM_RB50_0)

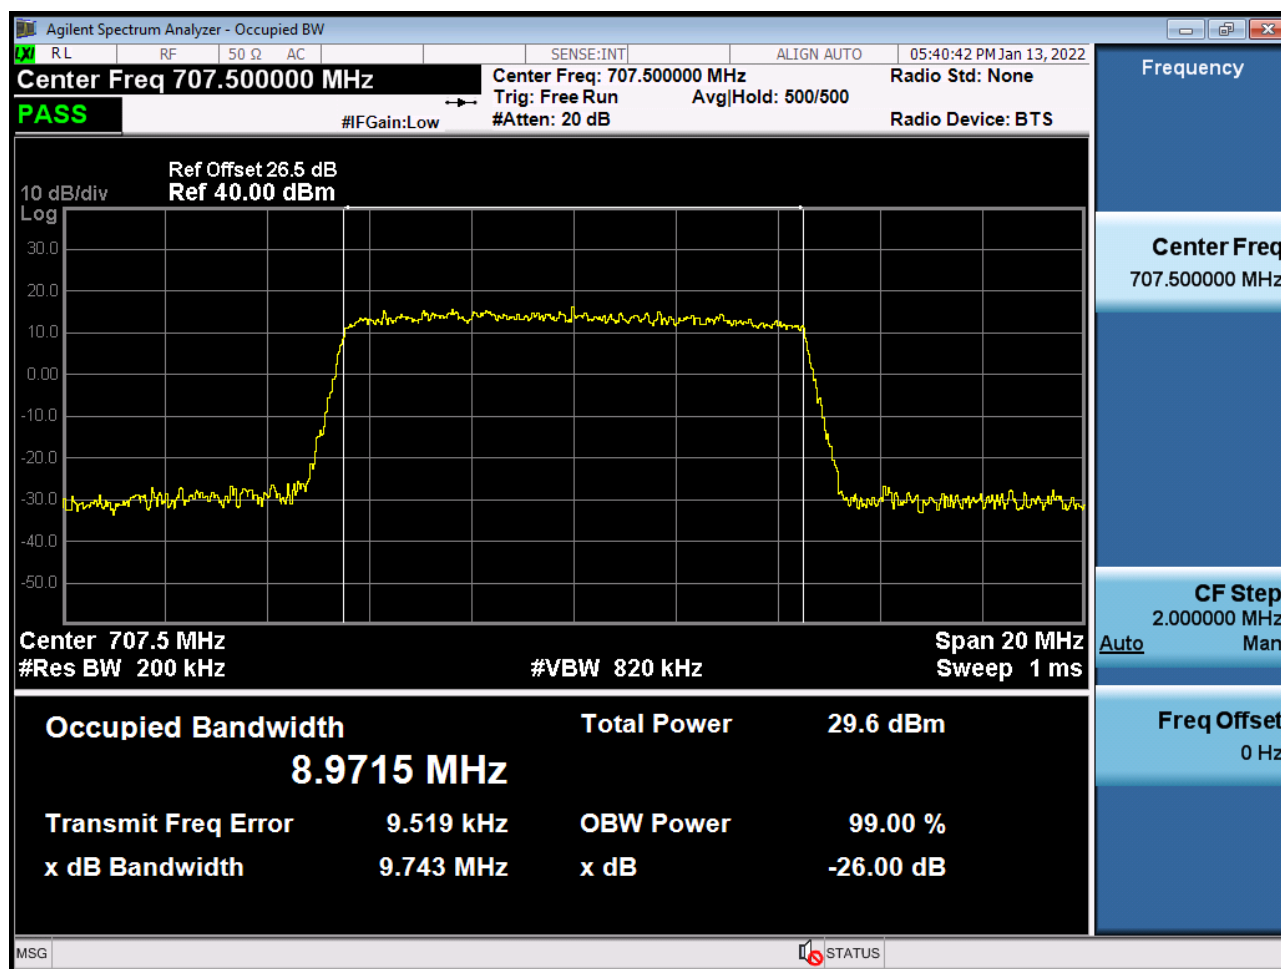


BAND 12/17. Occupied Bandwidth Plot (10 M BW Ch.23095 256QAM_RB50_0)

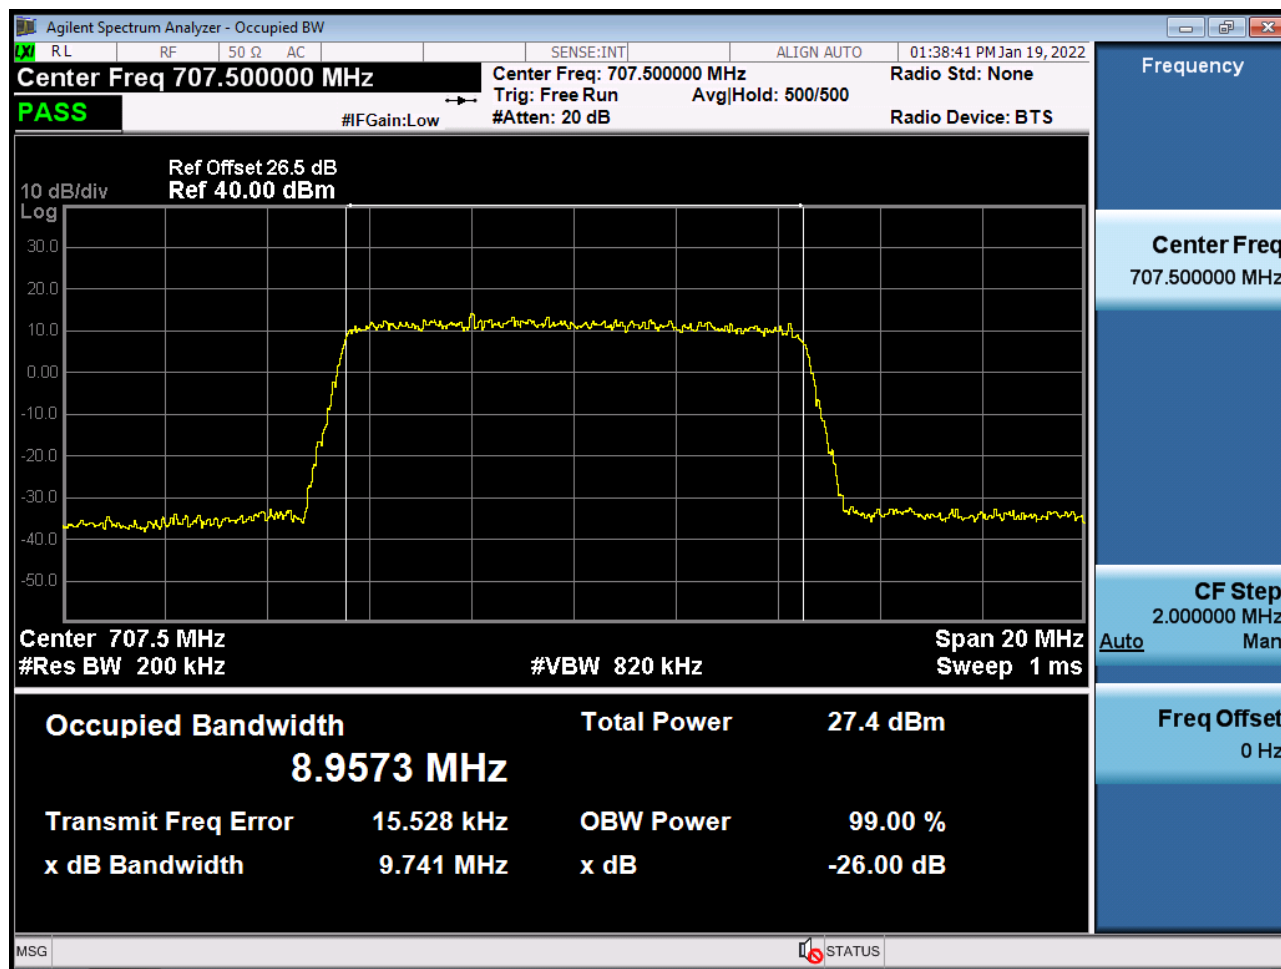

BAND 12. Lower Band Edge Plot (1.4 M BW Ch.23017 QPSK_RB1_Offset 0)

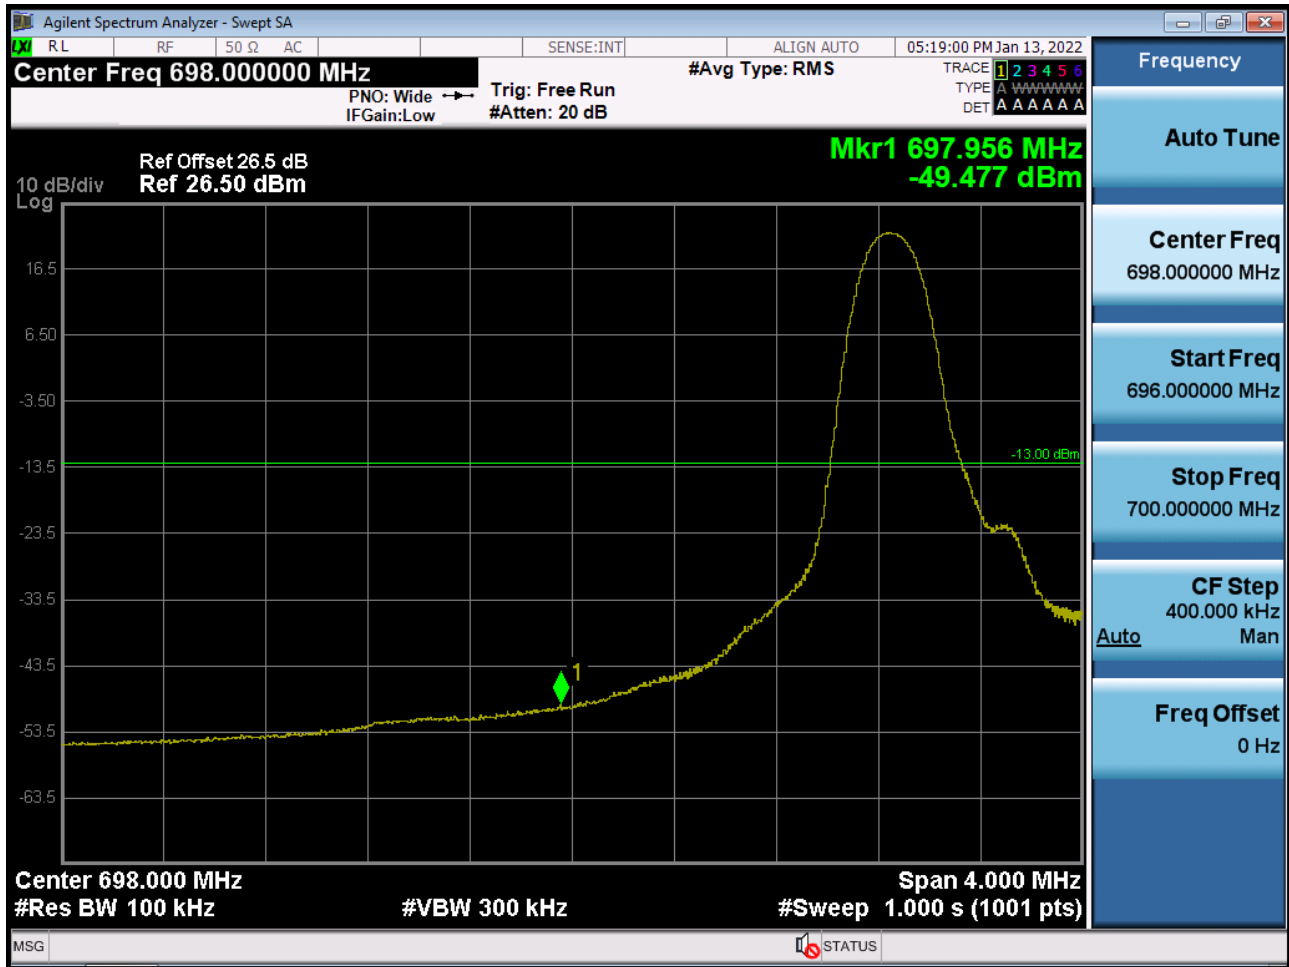

BAND 12. Lower Band Edge Plot (1.4 M BW Ch.23017 QPSK_RB6_Offset 0)

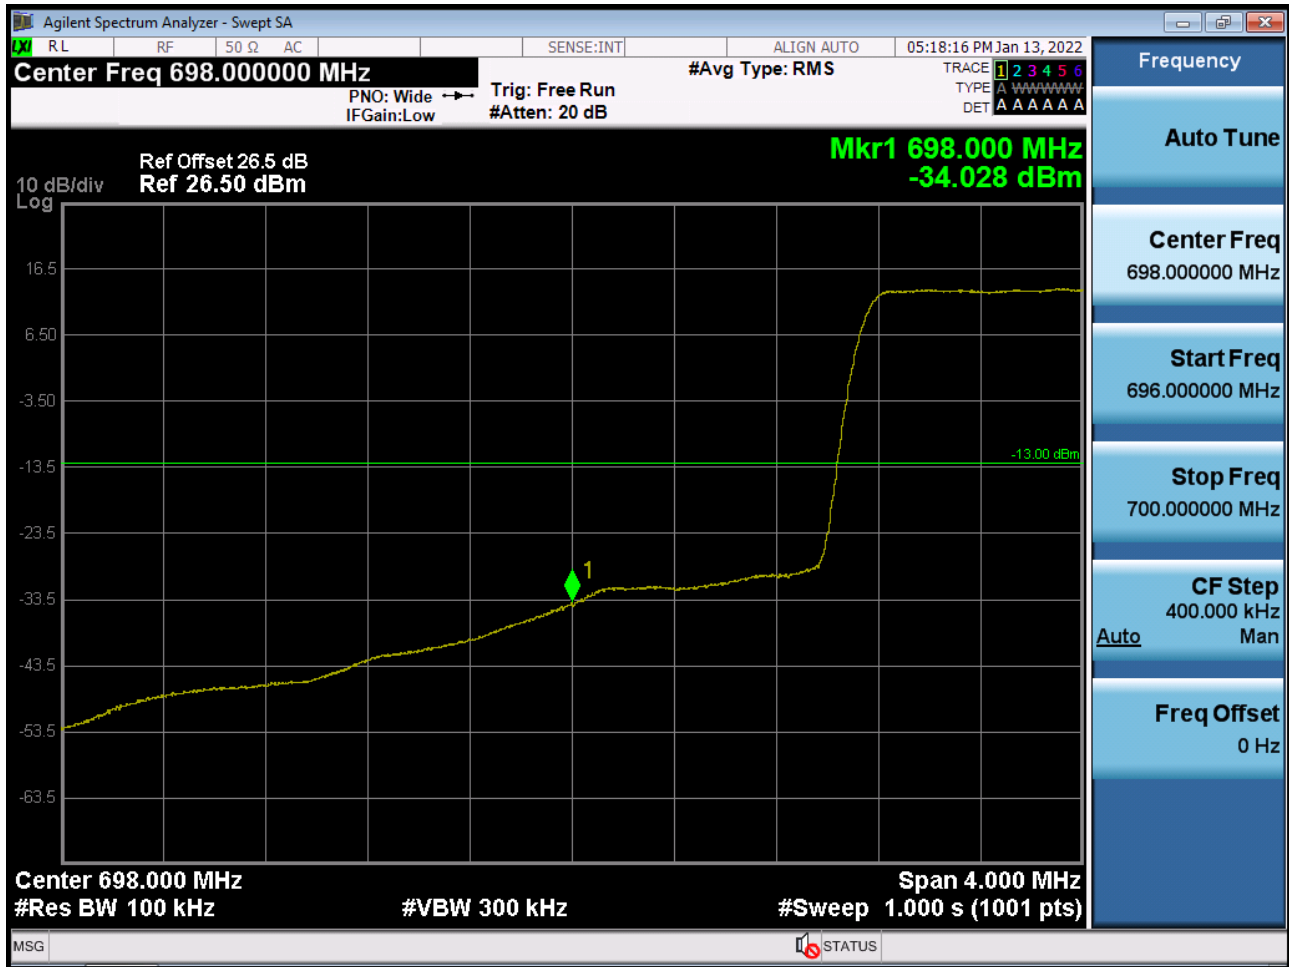

BAND 12. Lower Extended Band Edge Plot (1.4 M BW Ch.23017 QPSK_RB6_0)



BAND 12. Lower Band Edge Plot (3 M BW Ch.23025 QPSK_RB1_Offset 0)




BAND 12. Lower Band Edge Plot (3 M BW Ch.23025 QPSK_RB15_Offset 0)



BAND 12. Lower Extended Band Edge Plot (3 M BW Ch.23025 QPSK_RB15_0)



BAND 12/17. Lower Band Edge Plot (5 M BW Ch.23035 QPSK_RB1_Offset 0)

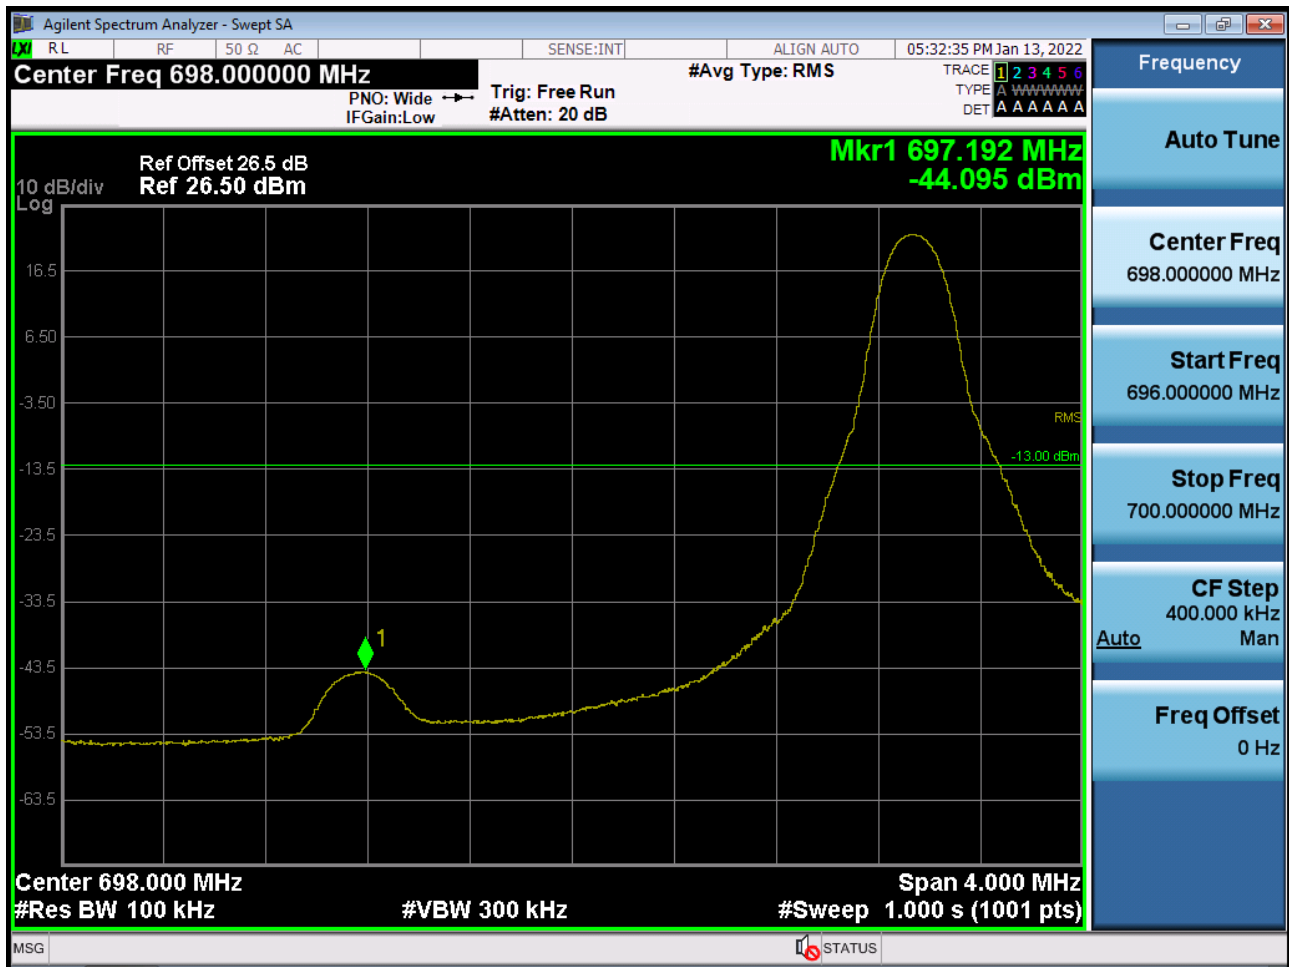


BAND 12/17. Lower Band Edge Plot (5 M BW Ch.23035 QPSK_RB25_Offset 0)



BAND 12/17. Lower Extended Band Edge Plot (5 M BW Ch.23035 QPSK_RB25_0)



BAND 12/17. Lower Band Edge Plot (10 M BW Ch.23060 QPSK_RB1_Offset 0)

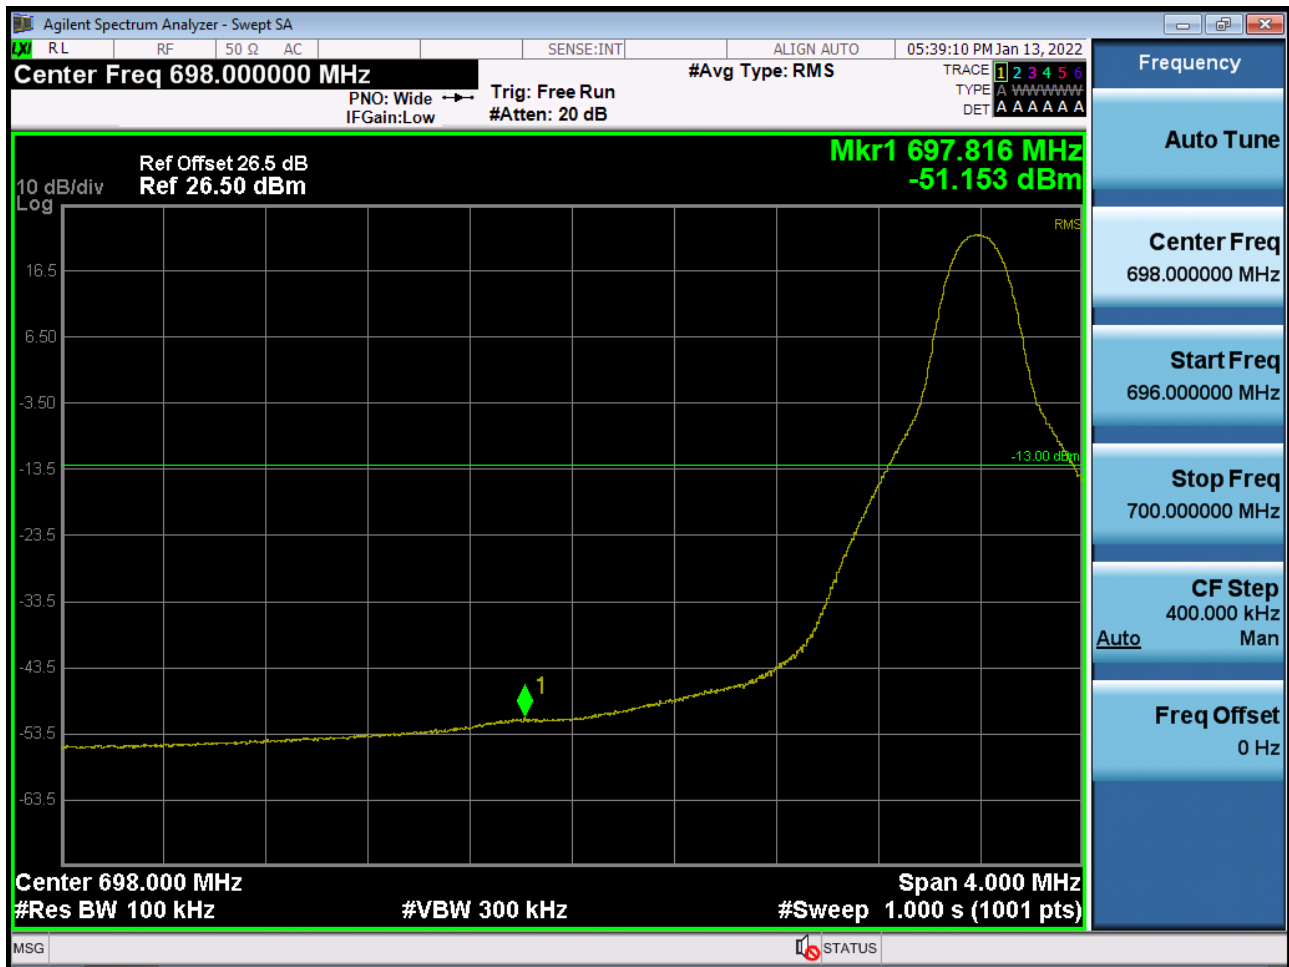


BAND 12/17. Lower Band Edge Plot (10 M BW Ch.23060 QPSK_RB50_Offset 0)



BAND 12/17. Lower Extended Band Edge Plot (10 M BW Ch.23060 QPSK_RB50_0)



BAND 12. Upper Band Edge Plot (1.4 M BW Ch.23173 QPSK_RB1_Offset 5)_1

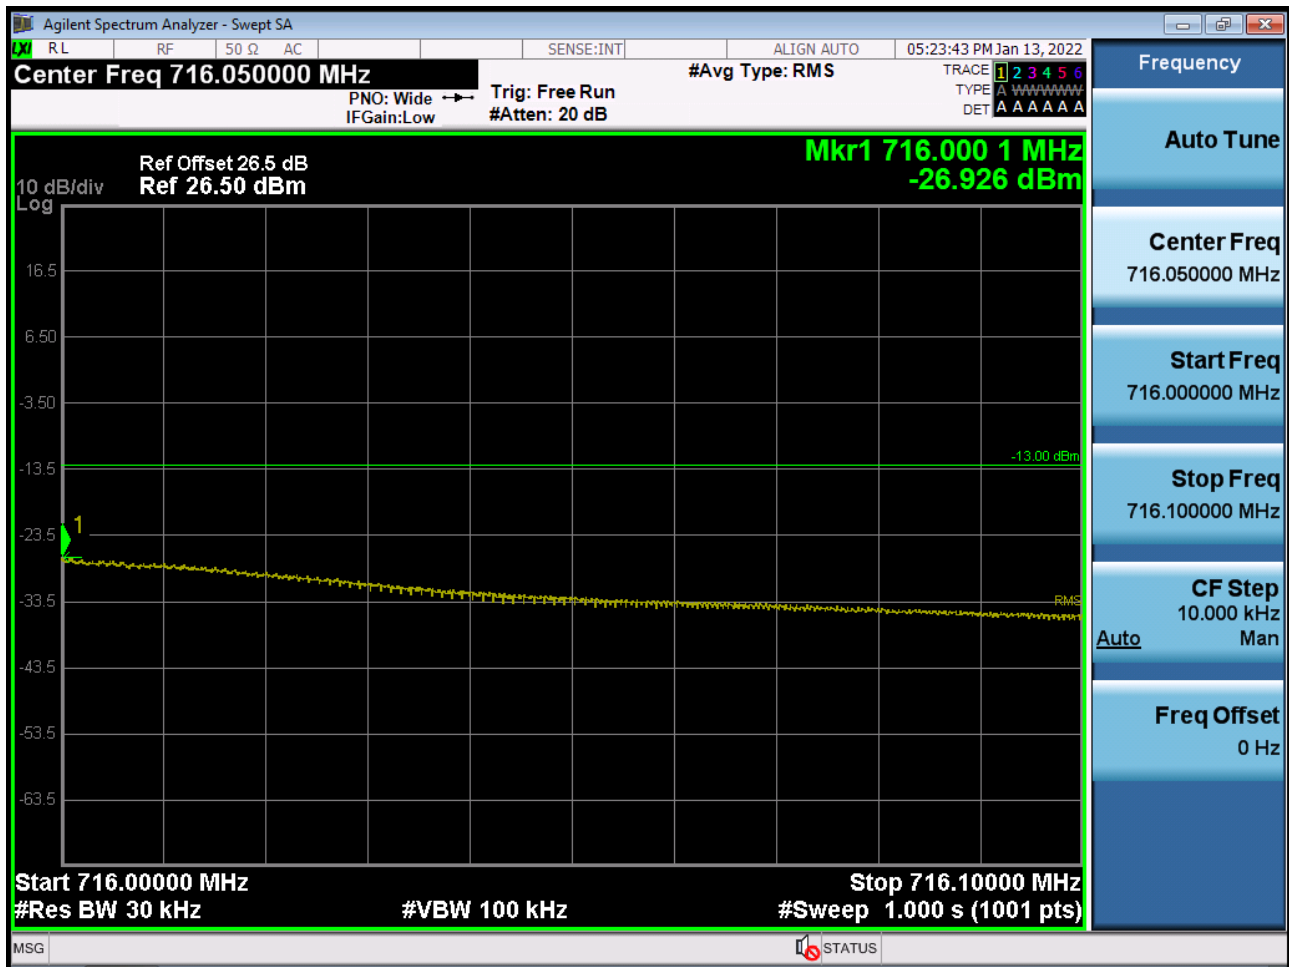


BAND 12. Upper Band Edge Plot (1.4 M BW Ch.23173 QPSK_RB1_Offset 5)_2




BAND 12. Upper Band Edge Plot (1.4 M BW Ch.23173 QPSK_RB6_Offset 0)



BAND 12. Upper Extended Band Edge Plot (1.4 M BW Ch.23173 QPSK_RB6_0)

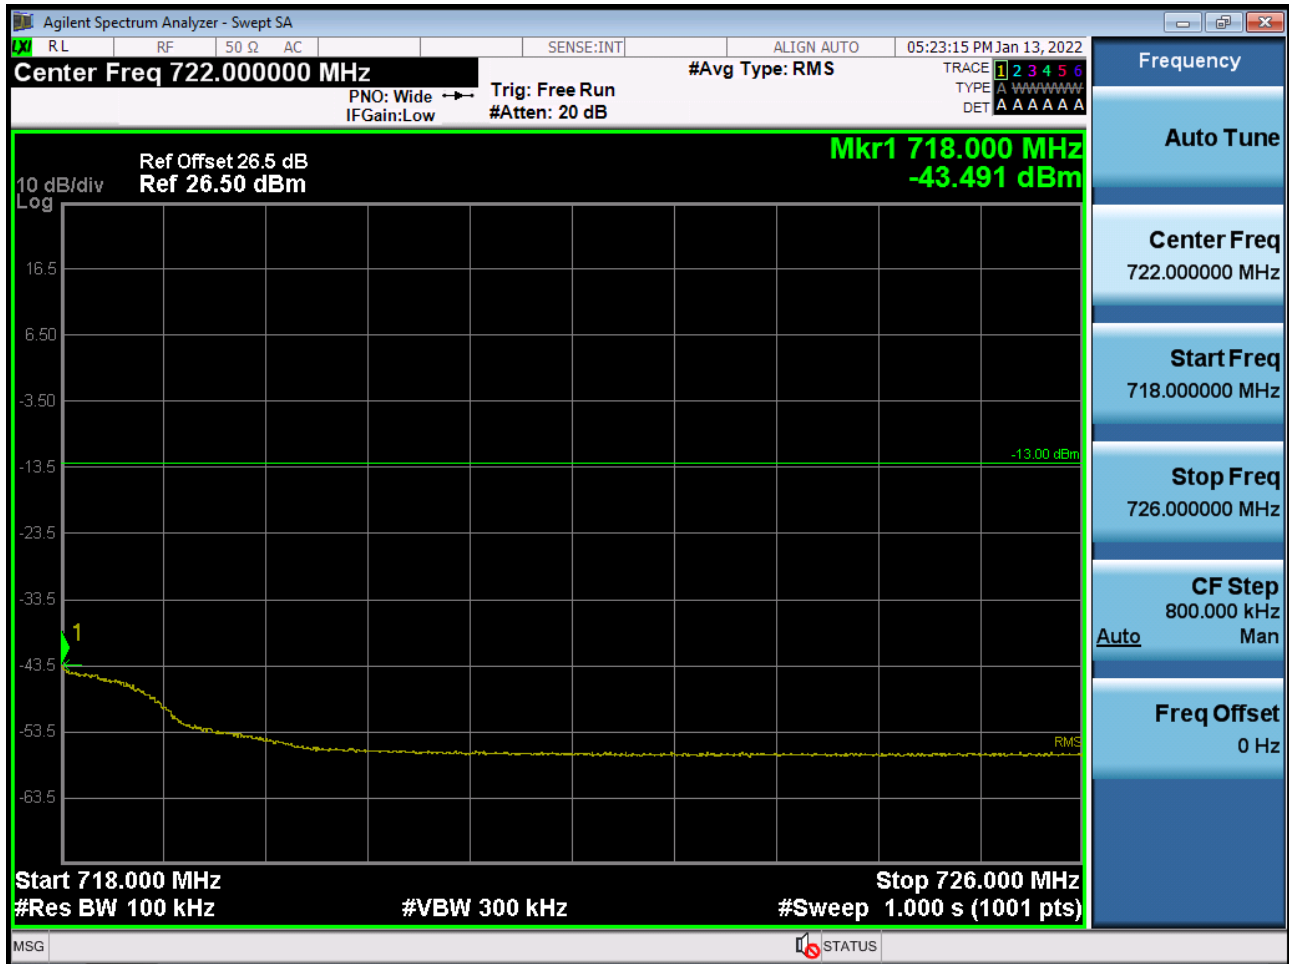

BAND 12. Upper Band Edge Plot (3 M BW Ch.23165 QPSK_RB1_Offset 14)-1

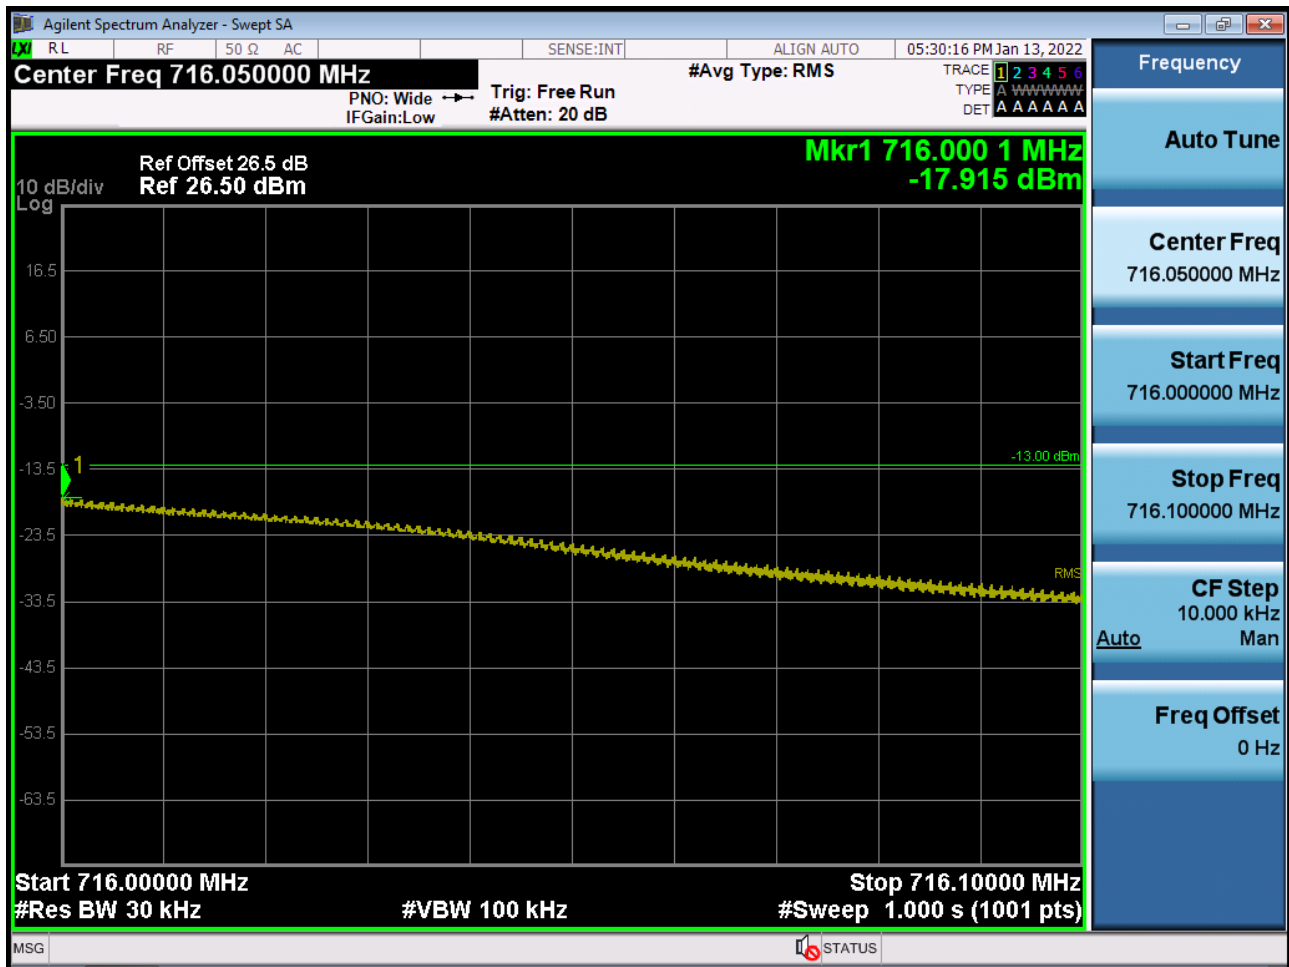

BAND 12. Upper Band Edge Plot (3 M BW Ch.23165 QPSK_RB1_Offset 14)-2




BAND 12. Upper Band Edge Plot (3 M BW Ch.23165 QPSK_RB15_Offset 0)



BAND 12. Upper Extended Band Edge Plot (3 M BW Ch.23165 QPSK_RB15_0)



BAND 12/17. Upper Band Edge Plot (5 M BW Ch.23155 QPSK_RB1_Offset 24)_1

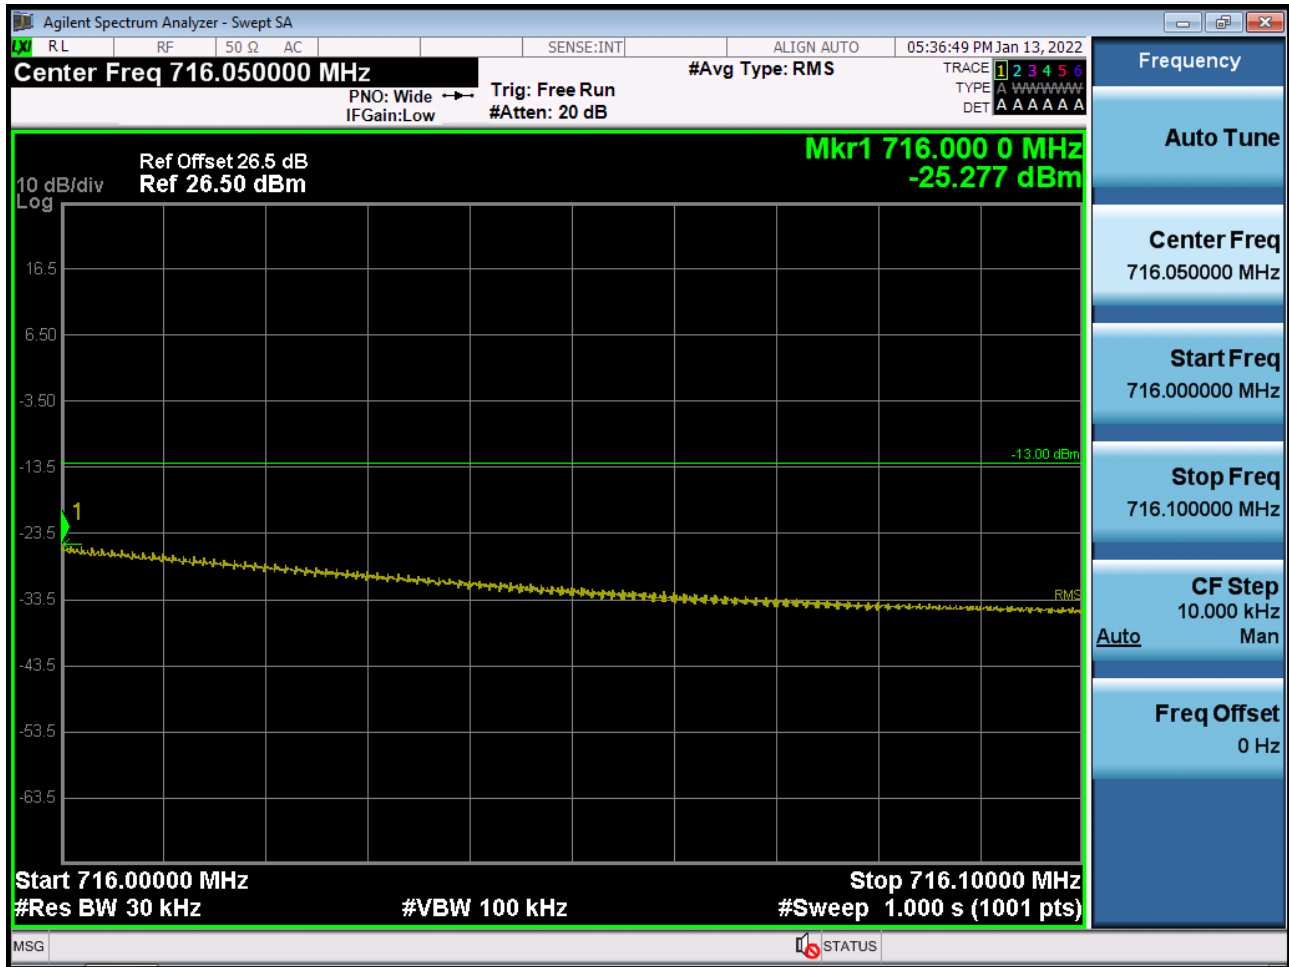

BAND 12/17. Upper Band Edge Plot (5 M BW Ch.23155 QPSK_RB1_Offset 24)_2




BAND 12/17. Upper Band Edge Plot (5 M BW Ch.23155 QPSK_RB25_Offset 0)



BAND 12/17. Upper Extended Band Edge Plot (5 M BW Ch.23155 QPSK_RB25_0)



BAND 12/17. Upper Band Edge Plot (10 M BW Ch.23130 QPSK_RB1_Offset 49)_1

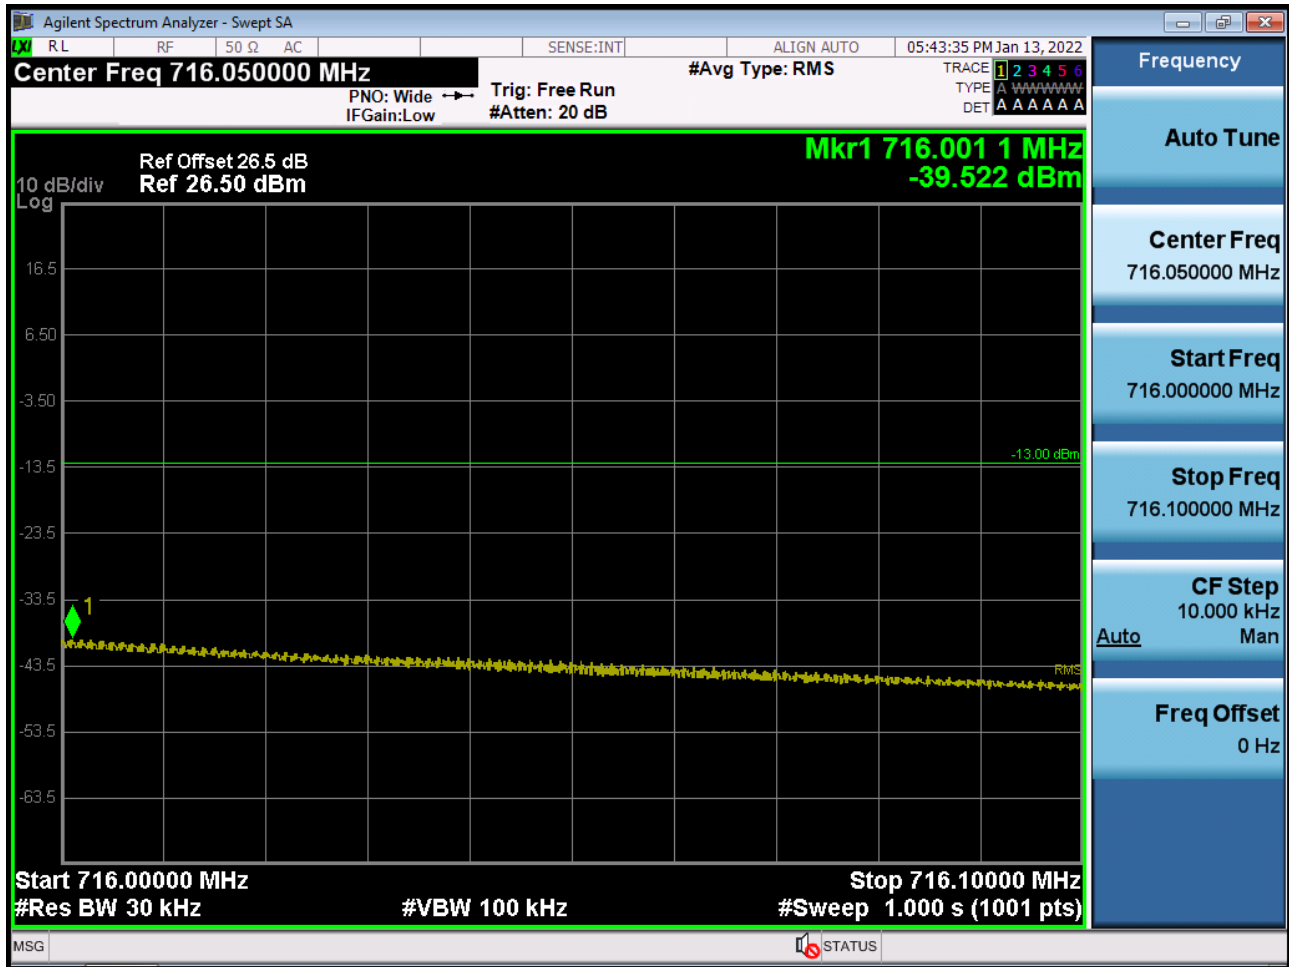

BAND 12/17. Upper Band Edge Plot (10 M BW Ch.23130 QPSK_RB1_Offset 49)_2




BAND 12/17. Upper Band Edge Plot (10 M BW Ch.23130 QPSK_RB50_Offset 0)




BAND 12/17. Upper Extended Band Edge Plot (10 M BW Ch.23130 QPSK_RB50_0)




BAND 12. Conducted Spurious Plot _ (23017ch_1.4 MHz_QPSK_RB 1_0)

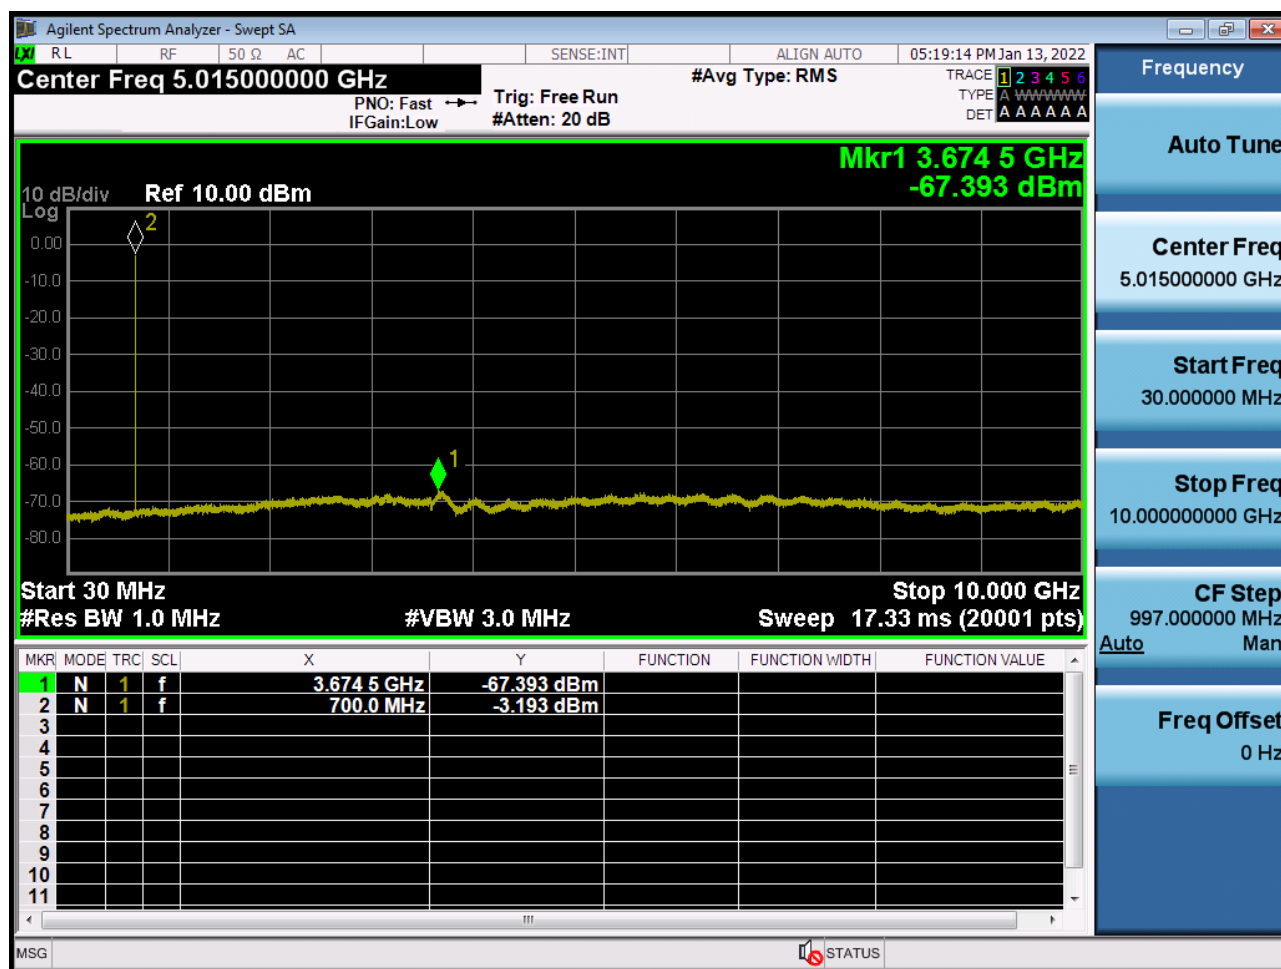


BAND 12. Conducted Spurious Plot _ (23095ch_1.4 MHz_QPSK_RB 1_0)

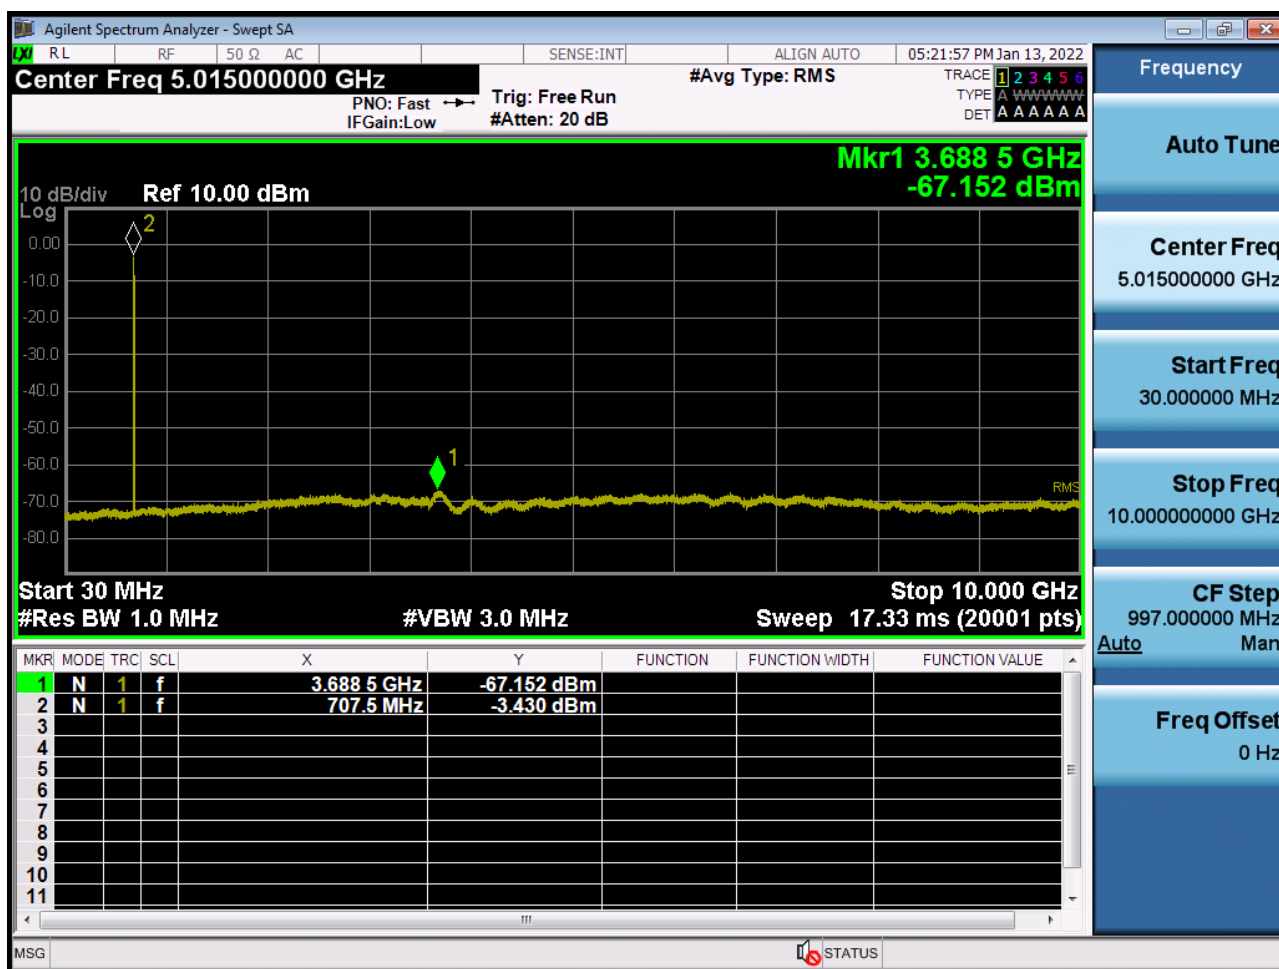


BAND 12. Conducted Spurious Plot _ (23173ch_1.4 MHz_QPSK_RB 1_0)

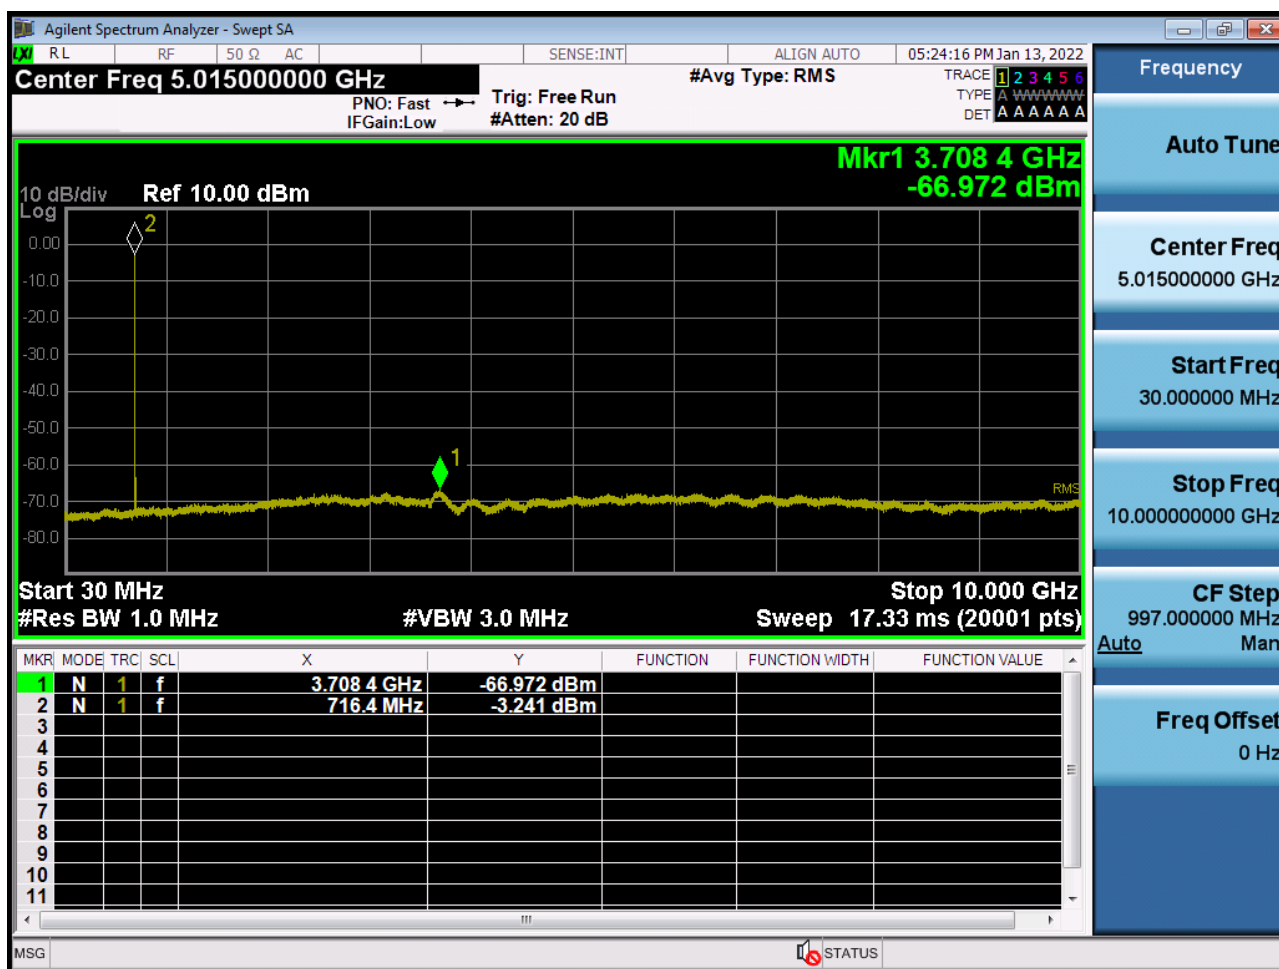


BAND 12. Conducted Spurious Plot _ (23025ch_3 MHz_QPSK_RB 1_0)

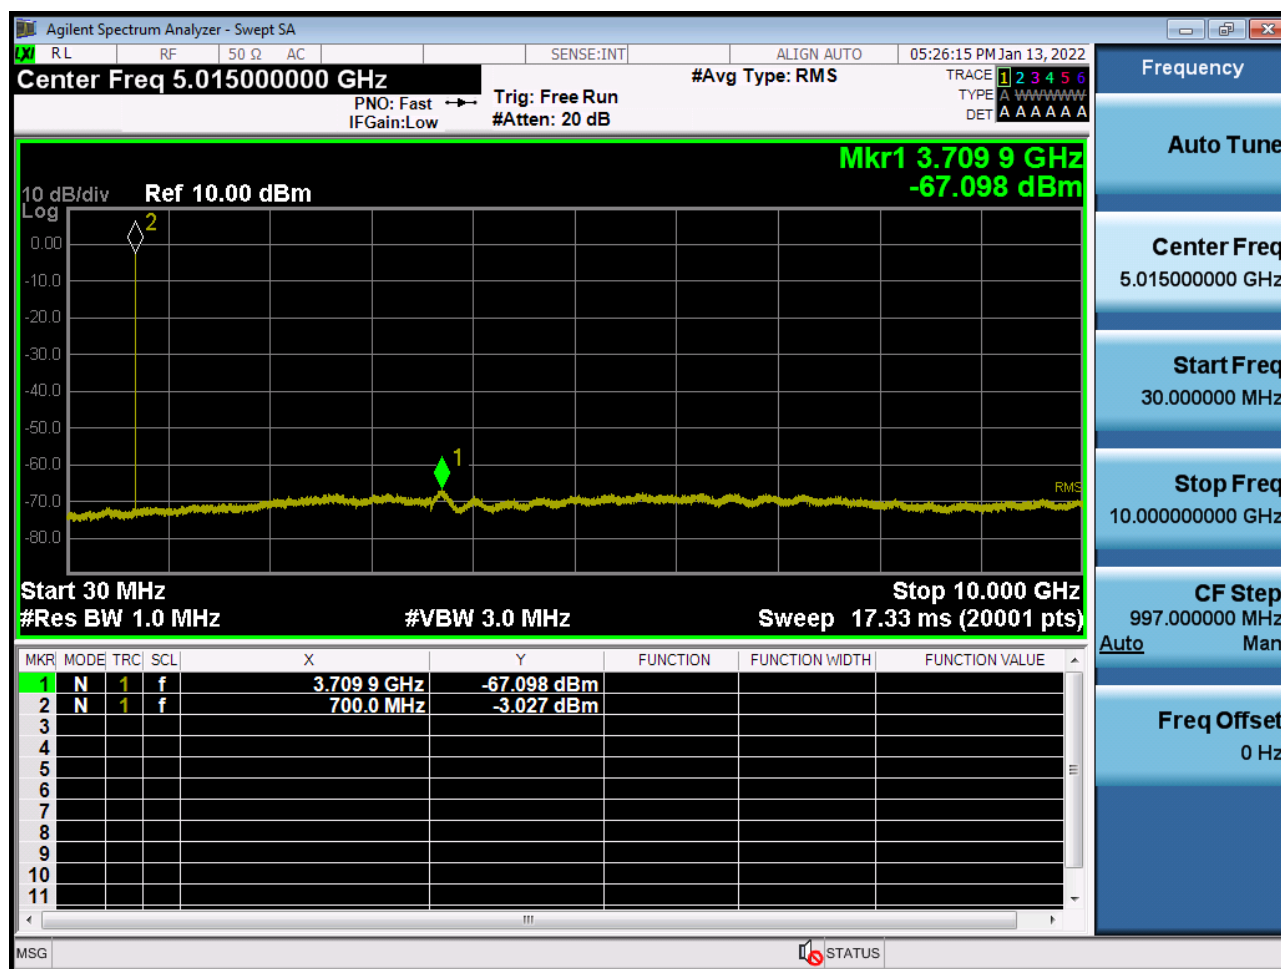


BAND 12. Conducted Spurious Plot _ (23095ch_3 MHz_QPSK_RB 1_0)

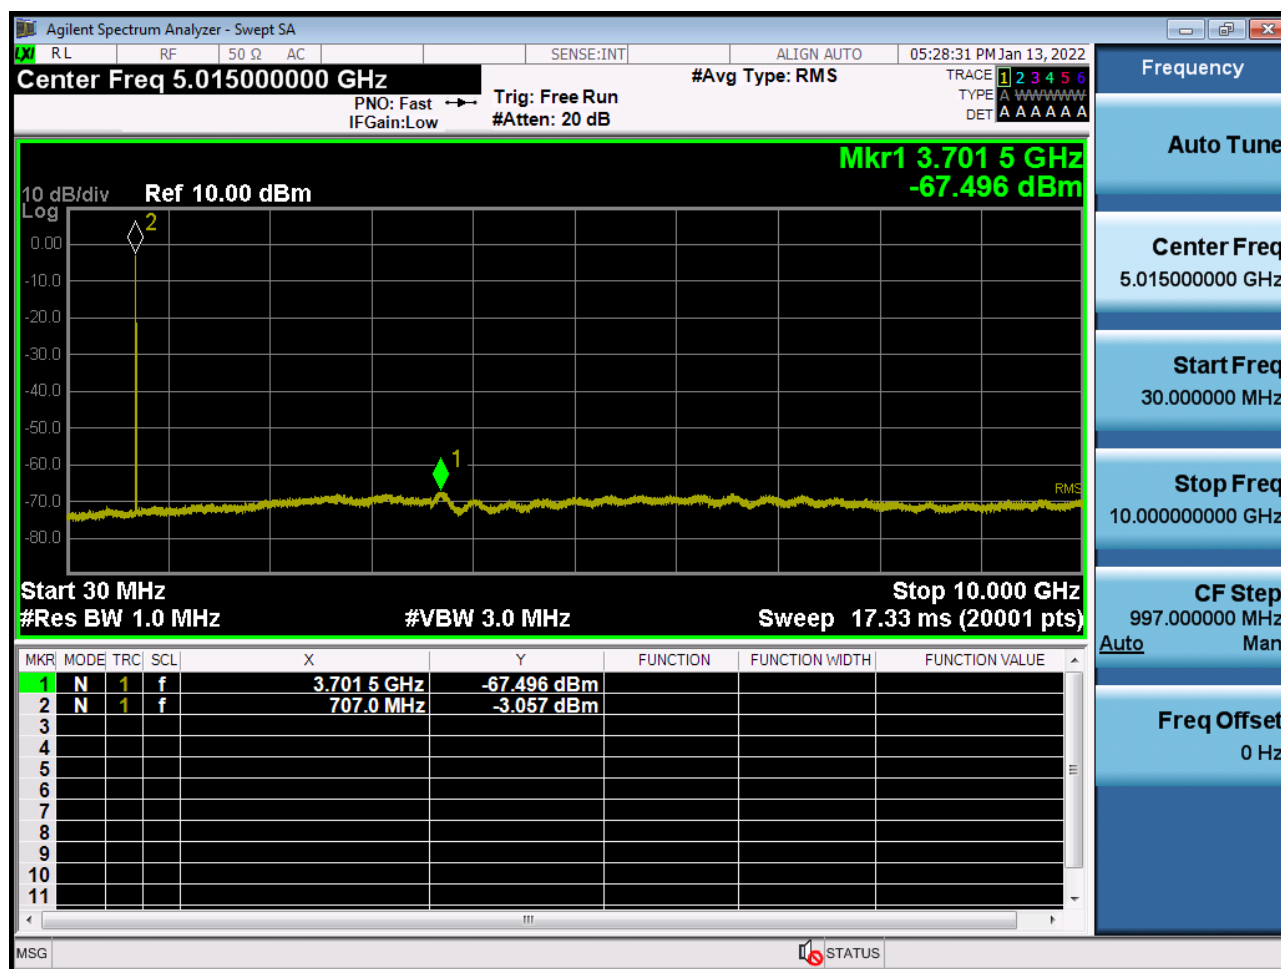


BAND 12. Conducted Spurious Plot _ (23165ch_3 MHz_QPSK_RB 1_0)

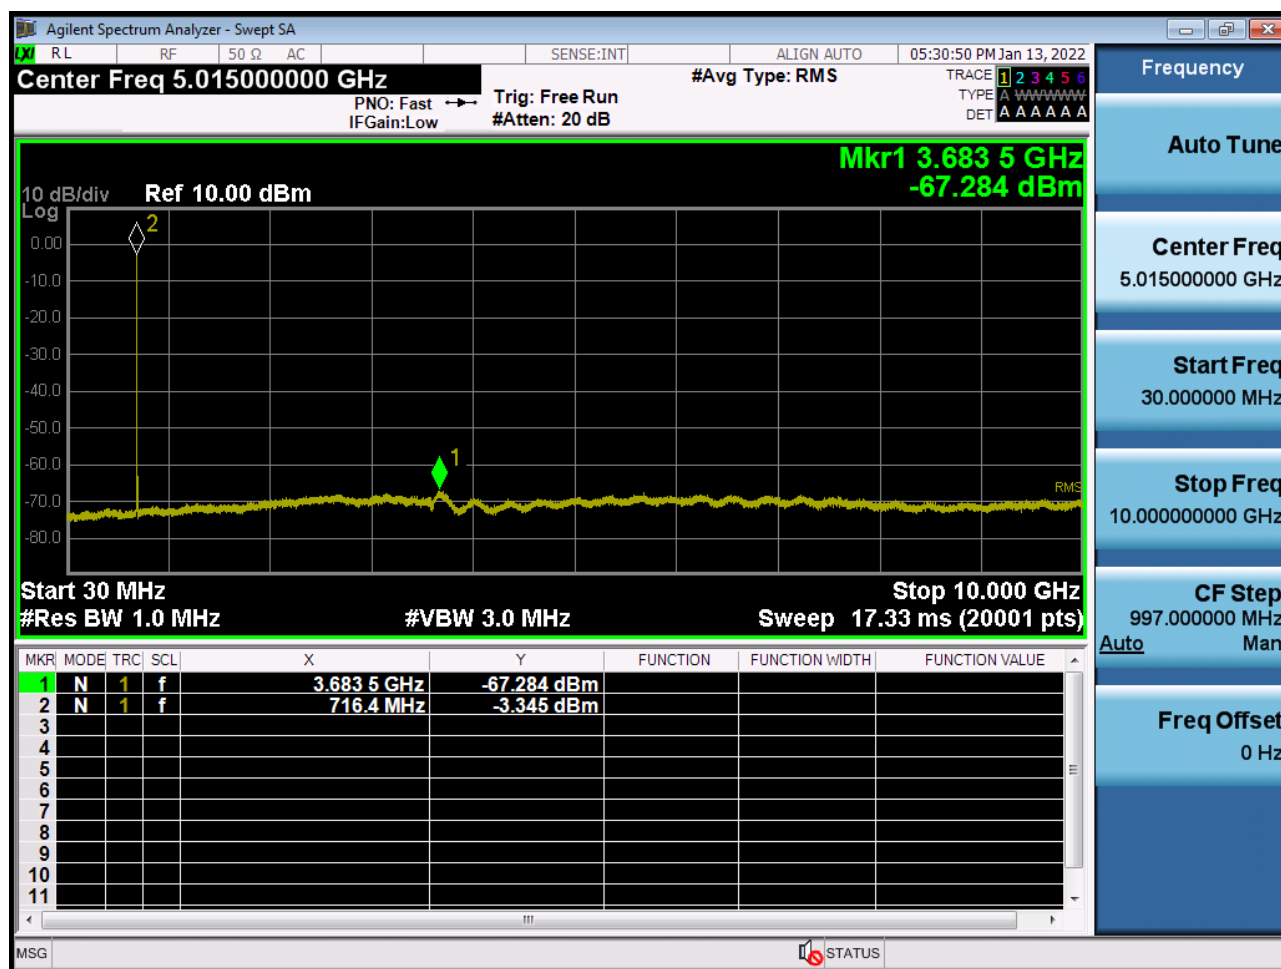


BAND 12/17. Conducted Spurious Plot _ (23035ch_5 MHz_QPSK_RB 1_0)

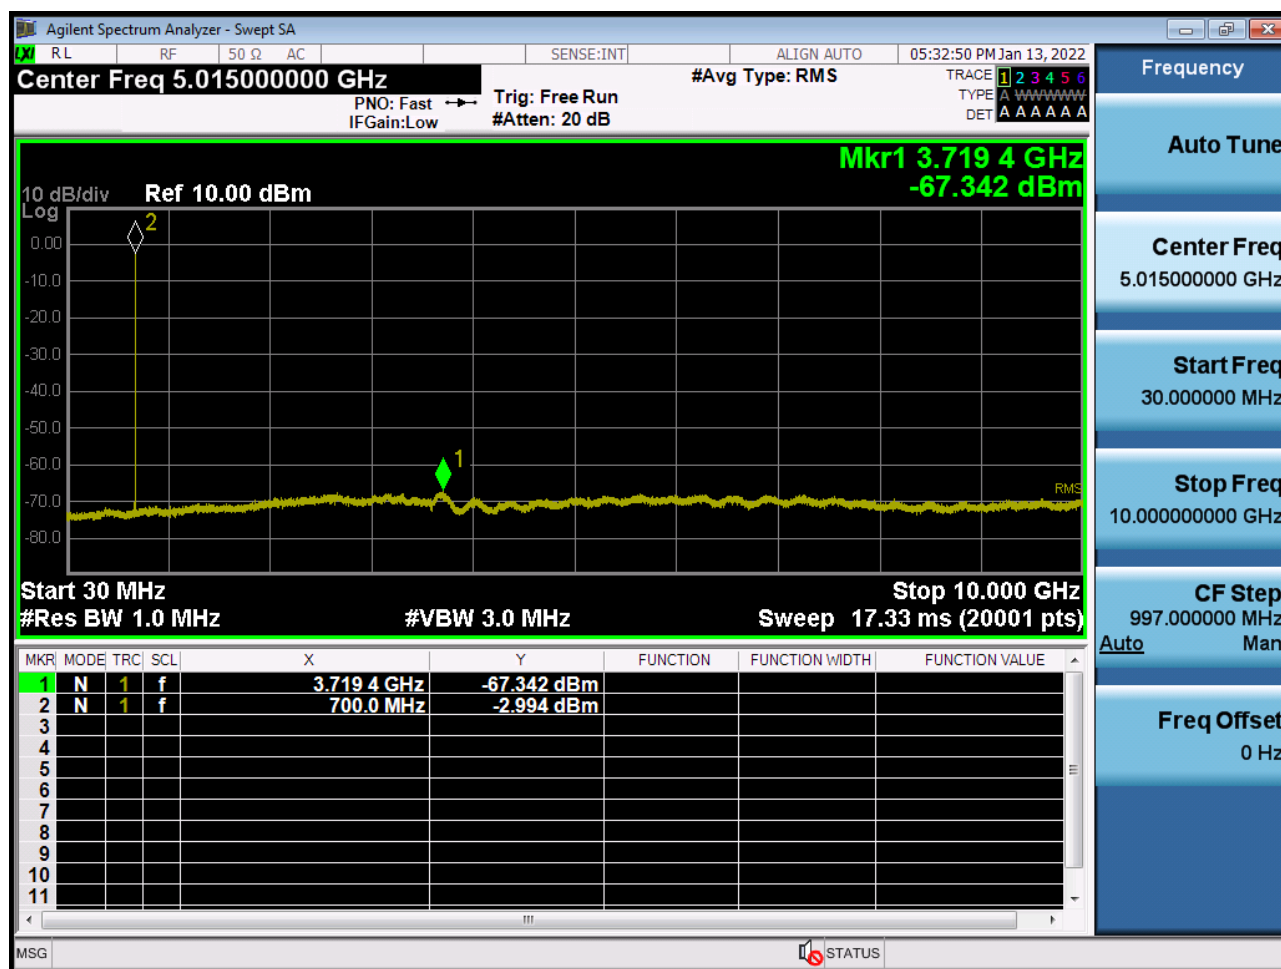


BAND 12/17. Conducted Spurious Plot _ (23095ch_5 MHz_QPSK_RB 1_0)

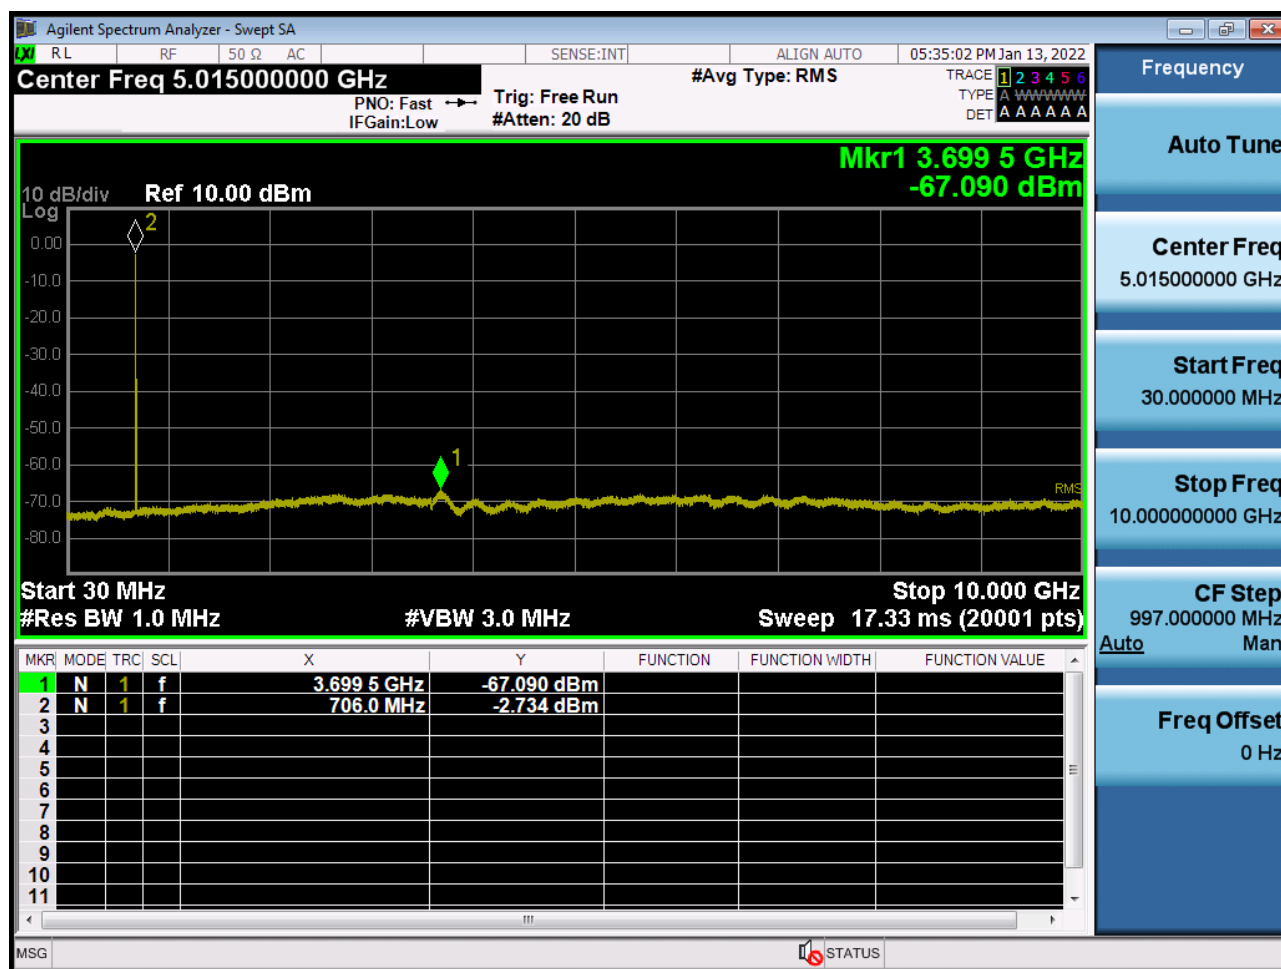


BAND 12/17. Conducted Spurious Plot _ (23155ch_5 MHz_QPSK_RB 1_0)

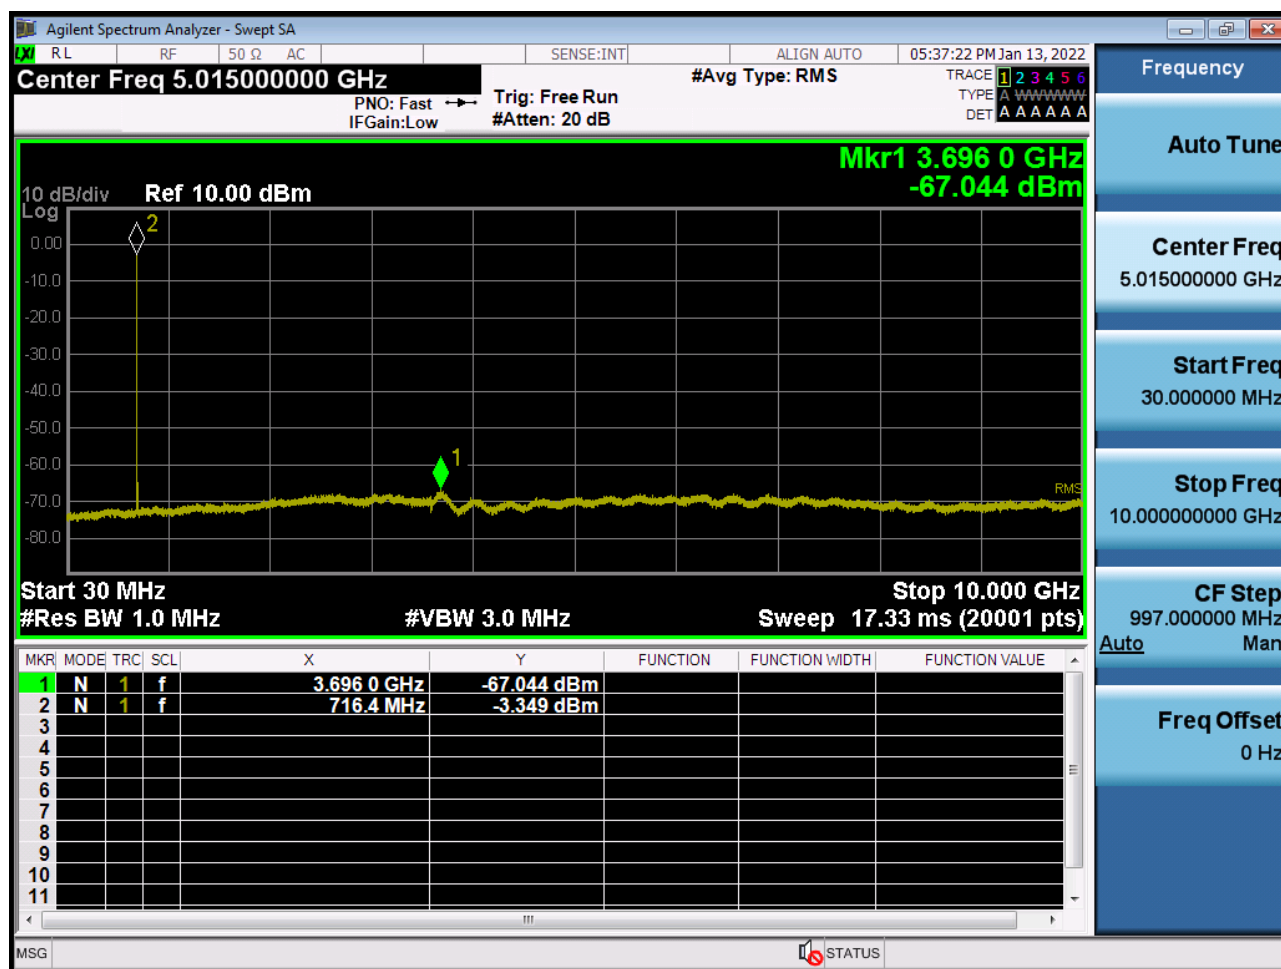


BAND 12/17. Conducted Spurious Plot _ (23060ch_10 MHz_QPSK_RB 1_0)

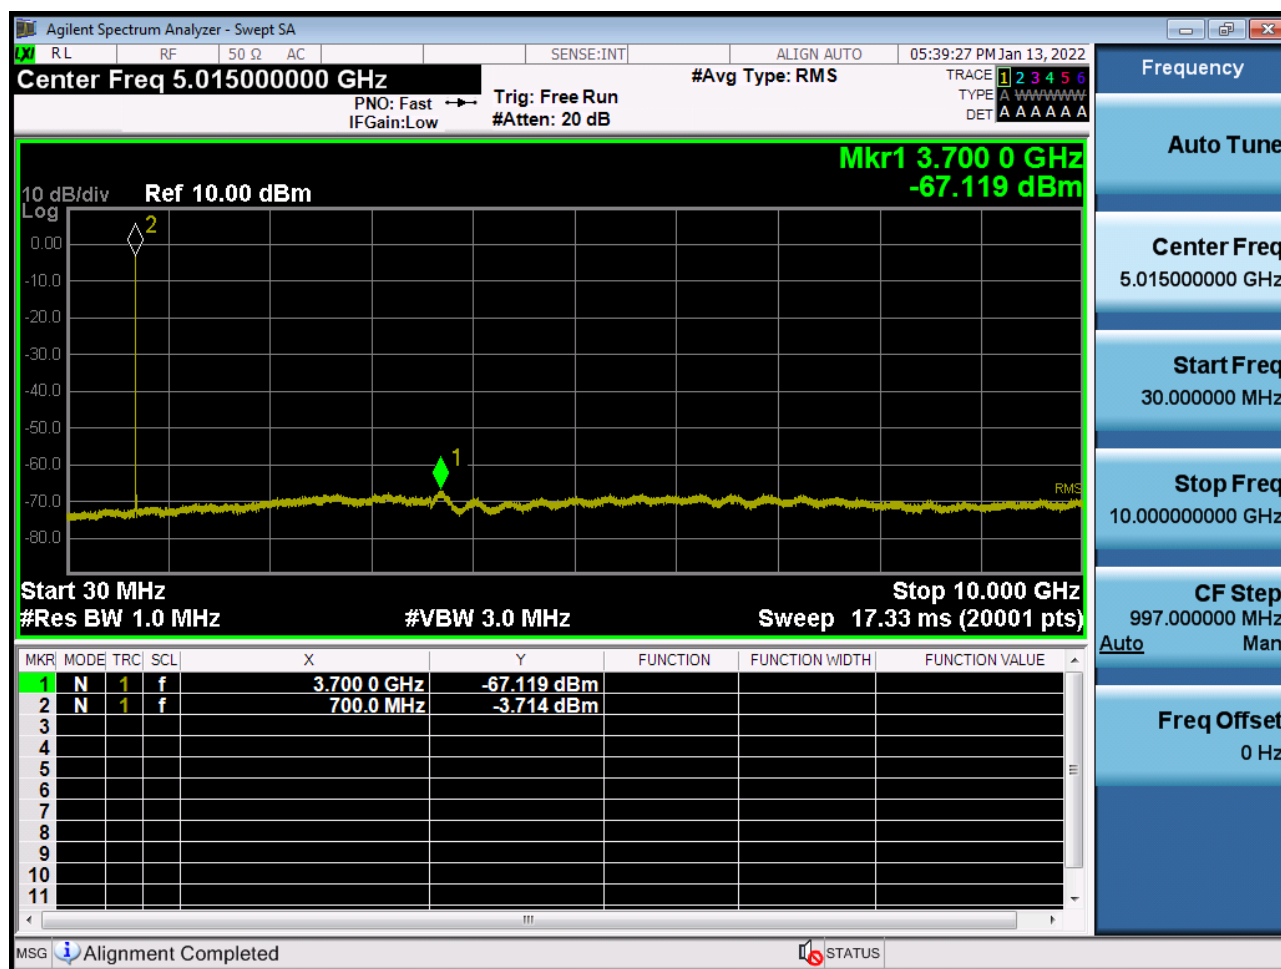

BAND 12/17. Conducted Spurious Plot _ (23095ch_10 MHz_QPSK_RB 1_0)

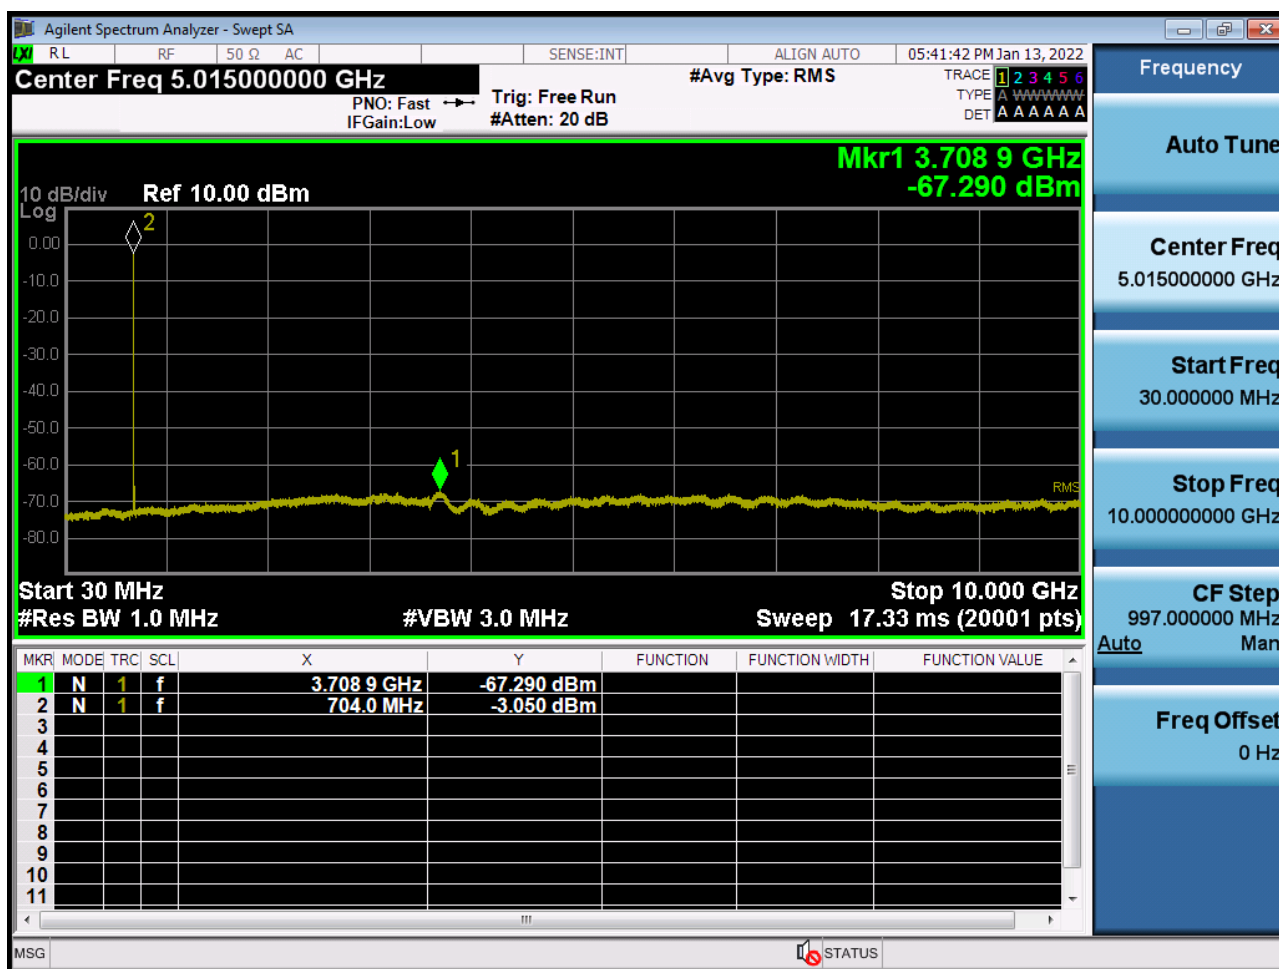

BAND 12/17. Conducted Spurious Plot _ (23130ch_10 MHz_QPSK_RB 1_0)

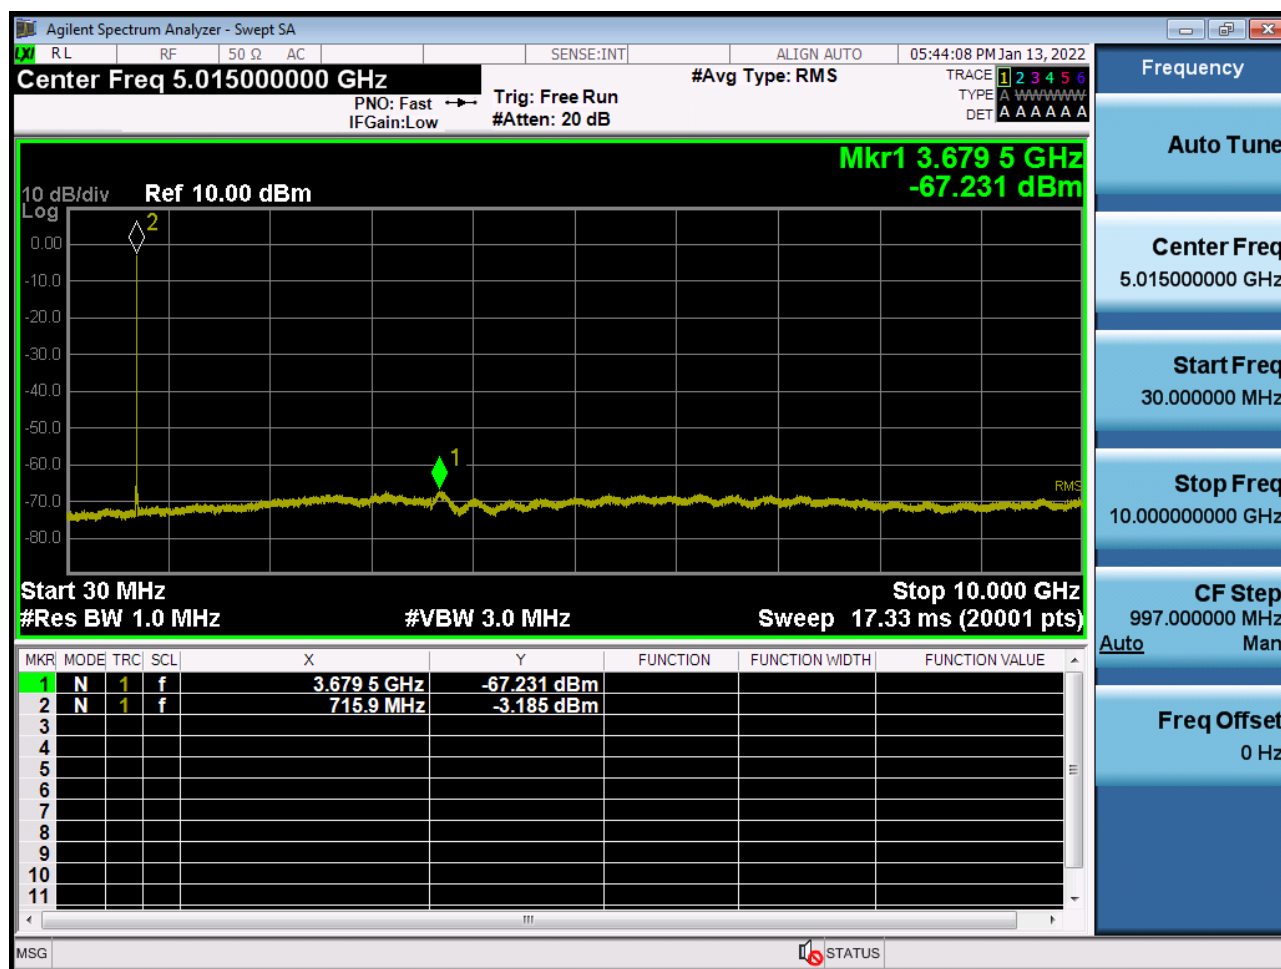

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2202-FC008-P