



## **SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Standard 1528-2013**

*For*  
**GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n**

**Model: SM-G313MY  
FCC ID: A3LSMG313MY**

**Report Number: 14I18409-S1  
Issue Date: 07/30/2014**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

## REVISION HISTORY



Rev.	Issue Date	Revisions	Revised By
--	7/30/2014	Initial Issue	--

## Table of Contents

<b>1.</b>	<b>Attestation of Test Results</b> .....	<b>5</b>
<b>2.</b>	<b>Test Specification, Methods and Procedures</b> .....	<b>6</b>
<b>3.</b>	<b>Facilities and Accreditation</b> .....	<b>6</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment</b> .....	<b>7</b>
4.1.	<i>SAR Measurement System</i> .....	7
4.2.	<i>Test Equipment</i> .....	8
<b>5.</b>	<b>Device Under Test (DUT) Information</b> .....	<b>9</b>
5.1.	<i>DUT Description</i> .....	9
5.2.	<i>Wireless Technologies</i> .....	9
5.3.	<i>Nominal and Maximum Output Power</i> .....	10
5.4.	<i>Simultaneous Transmission Condition</i> .....	10
5.5.	<i>Antenna Dimensions and Separation Distances</i> .....	11
<b>6.</b>	<b>RF Exposure Conditions (Test Configurations)</b> .....	<b>12</b>
6.1.	<i>Head</i> .....	12
6.2.	<i>Body-worn Accessory</i> .....	12
6.3.	<i>Wireless Router (Hotspot) and Wi-Fi Direct</i> .....	12
<b>7.</b>	<b>Conducted Output Power Measurements</b> .....	<b>13</b>
7.1.	<i>GSM850 and GSM1900</i> .....	13
7.2.	<i>W-CDMA Band II</i> .....	14
7.3.	<i>Wi-Fi (2.4 GHz Band) (reference to additional KDB in footnote)</i> .....	16
7.4.	<i>Bluetooth</i> .....	17
<b>8.</b>	<b>Dielectric Property Measurements</b> .....	<b>18</b>
8.1.	<i>Tissue Dielectric Parameters</i> .....	18
8.2.	<i>Dielectric Property Measurements Results</i> .....	19
<b>9.</b>	<b>System Check</b> .....	<b>20</b>
9.1.	<i>Reference Target SAR Values</i> .....	20
9.2.	<i>System Check Results</i> .....	20
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results</b> .....	<b>21</b>
10.1.	<i>GSM850</i> .....	22
10.2.	<i>GSM1900</i> .....	22
10.3.	<i>W-CDMA Band II</i> .....	23
10.4.	<i>Wi-Fi (DTS Band)</i> .....	23
10.5.	<i>Bluetooth</i> .....	24

10.5.1.	Standalone SAR Test Exclusion Considerations .....	24
10.5.2.	Estimated SAR.....	24
<b>11.</b>	<b>SAR Measurement Variability .....</b>	<b>25</b>
11.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band.....</i>	<i>25</i>
11.2.	<i>Repeated Measurement Results.....</i>	<i>25</i>
<b>12.</b>	<b>Simultaneous Transmission SAR Analysis .....</b>	<b>26</b>
12.1.	<i>Sum of the SAR for GSM850 &amp; Wi-Fi &amp; BT .....</i>	<i>27</i>
12.2.	<i>Sum of the SAR for GSM1900 &amp; Wi-Fi &amp; BT .....</i>	<i>27</i>
12.3.	<i>Sum of the SAR for WCDMA Band II &amp; Wi-Fi &amp; BT .....</i>	<i>28</i>
<b>13.</b>	<b>Appendixes .....</b>	<b>29</b>
13.1.	<i>Photos and Antenna Locations .....</i>	<i>29</i>
13.2.	<i>System Performance Check Plots .....</i>	<i>29</i>
13.3.	<i>Highest SAR Test Plots.....</i>	<i>29</i>
13.4.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3902.....</i>	<i>29</i>
13.5.	<i>Calibration Certificate for D835V2 - SN 4d002 .....</i>	<i>29</i>
13.6.	<i>Calibration Certificate for D1900V2- SN 5d043 .....</i>	<i>29</i>
13.7.	<i>Calibration Certificate for D2450V2 - SN 899 .....</i>	<i>29</i>

### 1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO., LTD.		
Application Purpose	<input checked="" type="checkbox"/> Original Grant <input type="checkbox"/> Class II Permissive Change		
FCC ID	A3LSMG313MY		
DUT Description	GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n		
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)		
The highest reported SAR	RF Exposure Conditions	Equipment Class	
		Licensed	DTS
	Head	0.445 W/kg	0.592 W/kg
	Body-worn Accessory	0.946 W/kg	0.164 W/kg
	Wireless Router (Hotspot)		
	Wi-Fi Direct	N/A	
Simultaneous Transmission	Head: 1.037 W/kg Body: 1.110 W/kg		
Highest SAR across exposure conditions	0.946 W/kg		
Applicable Standards	FCC 47 CFR § 2.1093 KDB publication IEEE Standard 1528-2013		
Test Results	Pass		
Date tested	7/28/2014 – 7/30/2014		
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>			
Approved & Released By:	Prepared By:		
			
Devin Chang Senior Engineer UL Verification Services Inc.	Coltyce Sanders Laboratory Engineer UL Verification Services Inc.		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2003 & 2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

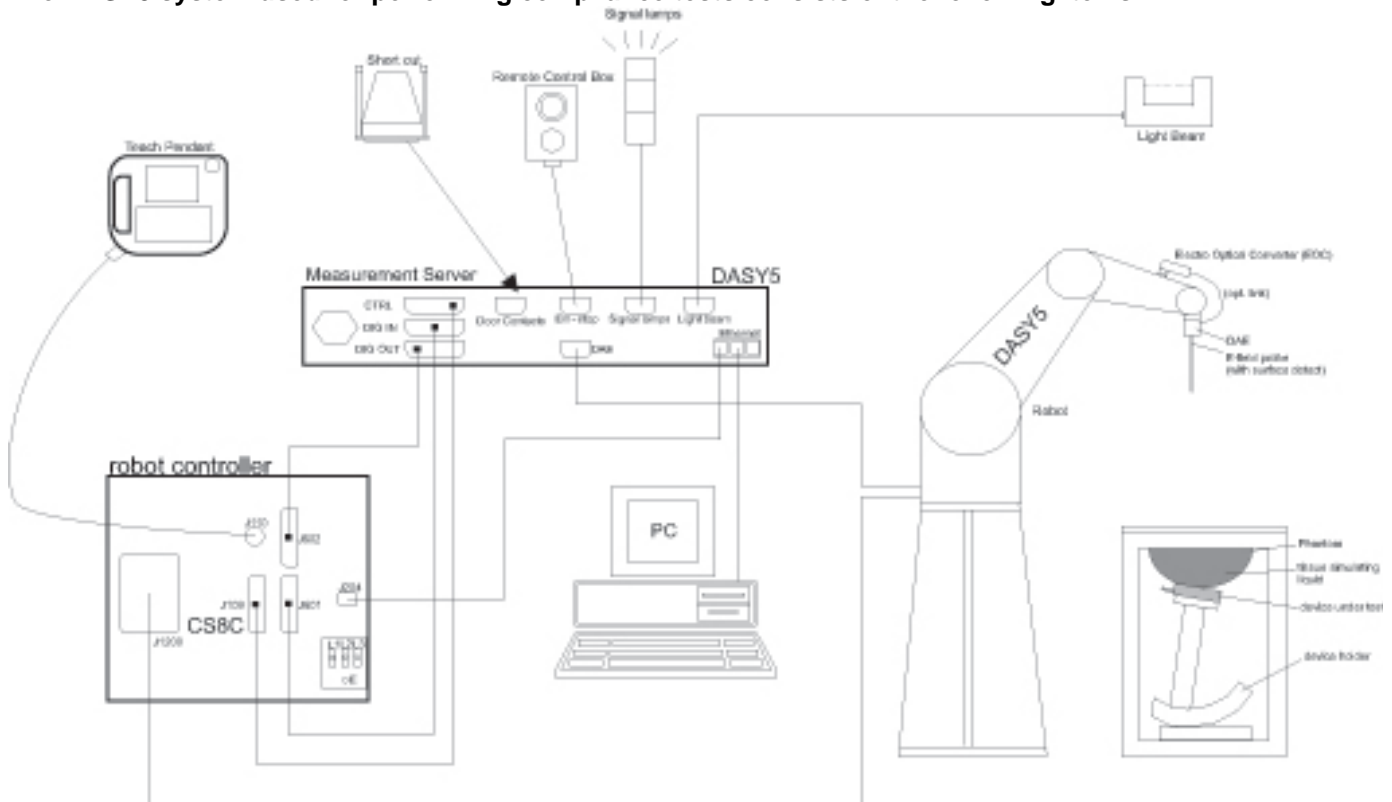

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	ENA Series/E5071B	MY42100131	2/24/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1087	11/13/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	9/19/2014
Thermometer	EXTECH	445703	CCS-200	3/24/2015

### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Meter	HP	437B	3125U09516	9/30/2014
Power Sensor	Agilent	8481A	2237A31744	10/2/2014
Power Sensor	Agilent	8481A	2349A36506	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	Sorensen Ametek	XT15-4	1319A02778	N/A
HP Signal Generator	HP	8665B	3438A00633	7/10/2015
Power Meter	HP	438A	3513U04320	10/2/2014
Power Sensor	Agilent	8481A	2702A66876	9/30/2014
Power Sensor	Agilent	8481A	3318A95392	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 1)	SPEAG	EX3DV4	3902	5/19/2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE3	427	1/14/2015
System Validation Dipole	SPEAG	D835V2	4d002	11/15/2015
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2015
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-2305	3/24/2015

### Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Sensor	Agilent	N1921A	MY52200012	9/25/2014
Power Meter	Agilent	N1911A	MY53060016	8/3/2014
Base Station Simulator	R & S	CMW500	132910-cp	4/25/2015

## 5. Device Under Test (DUT) Information

### 5.1. DUT Description

Model: SM-G313MY	
Device Dimension	Overall (Length x Width): 122 mm x 63 mm Overall Diagonal: 129 mm Display Diagonal: 102 mm
Battery Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Normal Battery Cover with NFC <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover with NFC.
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8Vdc, 5.70Wh <input type="checkbox"/> Extended (large capacity)
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)
SIM Information	<input checked="" type="checkbox"/> Single SIM <input type="checkbox"/> Dual SIM

### 5.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850 and 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK) RX Only	GSM Voice: 12.5%; GPRS/EGPRS: 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%,
		GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33 - Four Up Does this device support DTM (Dual Transfer Mode): <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
W-CDMA (UMTS)	Band II	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 7, CAT 14) HSUPA (Rel. 6, CAT 6)	100%
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.0 LE + EDR	32.25% (DH1), 66.68% (DH3), 77.52% (DH5)

### 5.3. Nominal and Maximum Output Power

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	32.6	33.1
	GPRS 1 slot	32.6	33.1
	GPRS 2 slots	29.6	30.1
	GPRS 3 slots	28.6	29.1
	GPRS 4 slots	26.6	27.1
GSM1900	Voice	29.7	30.2
	GPRS 1 slot	29.7	30.2
	GPRS 2 slots	26.7	27.2
	GPRS 3 slots	25.7	26.2
	GPRS 4 slots	23.7	24.2
W-CDMA Band II	R99	22.0	22.5
	HSDPA	22.0	22.5
	HSUPA	22.0	22.5

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5
	802.11g	14.0	14.5
	802.11n HT20	13.0	13.5
Bluetooth		9.0	9.5
Bluetooth LE		8.0	8.5

### 5.4. Simultaneous Transmission Condition


Item	Capable Transmit Configurations	RF Exposure Condition			Notes
		Head	Body-worn Accessory	Hotspot (Wireless Router) & Wi-Fi Direct	
1	GSM 850/1900 Voice + Wi-Fi 2.4 GHz	✓	✓	✓	
2	GSM 850/1900 (GPRS) + Wi-Fi 2.4 GHz (VoIP)	✓	✓	✓	
3	WCDMA Band II + Wi-Fi 2.4 GHz	✓	✓	✓	
6	GSM 850/1900 Voice + BT		✓		
7	GSM 850/1900 (GPRS) + BT(VoIP)		✓		
8	WCDMA Band II + BT		✓		

**Notes:**

1. Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct.
2. GPRS and WCDMA support Hotspot.
3. VoIP is support in GPRS and WCDMA.
4. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.

### 5.5. Antenna Dimensions and Separation Distances

- ① Wi-Fi / BT Ant (TX & RX)
- ② Main Ant (TX & RX)
  - GSM 850 / 1900
  - W-CDMA Band II

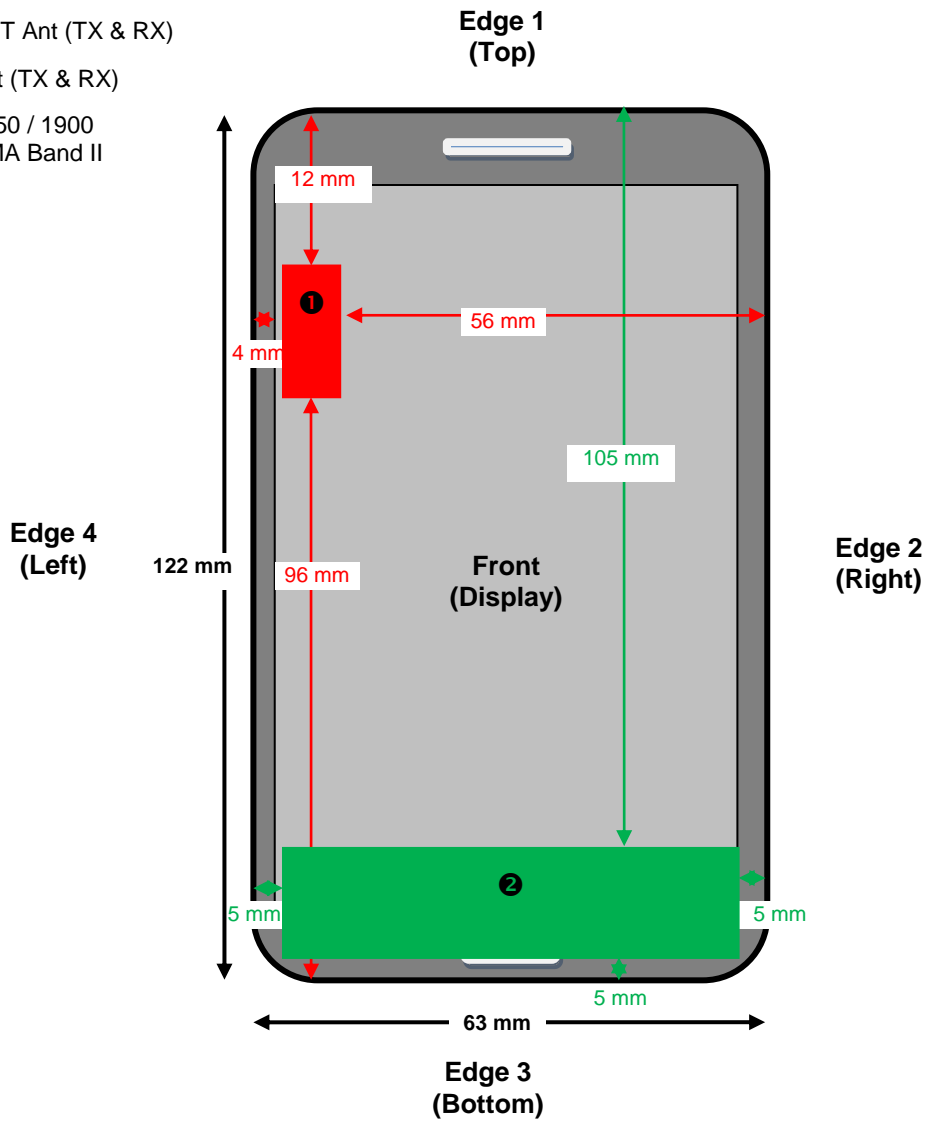

## 6. RF Exposure Conditions (Test Configurations)

Refer to Appendix 13.1.Photos and Antenna Locations for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

### 6.1. Head

#### For WWAN and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

### 6.2. Body-worn Accessory

#### For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	4 mm	Yes	

#### For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

### 6.3. Wireless Router (Hotspot) and Wi-Fi Direct

#### For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	4 mm	Yes	
Edge 1 (Top)	105 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	5 mm	Yes	
Edge 3 (Bottom)	5 mm	Yes	
Edge 4 (Left)	5 mm	Yes	

#### For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	12 mm	Yes	
Edge 2 (Right)	56 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 3 (Bottom)	96 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 4 (Left)	4 mm	Yes	

## 7. Conducted Output Power Measurements

The proprietary logic is used to determine when head/body power table is used.

### 7.1. GSM850 and GSM1900

#### GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	
850	GSM (Voice)	CS1	1	128	824.2	32.6	23.6	
				190	836.6	32.7	23.6	
				251	848.8	32.7	23.6	
	GPRS (GMSK)	CS1	1	1	128	824.2	32.6	23.6
					190	836.6	32.6	23.6
					251	848.8	32.6	23.6
			2	1	128	824.2	29.5	23.4
					190	836.6	29.5	23.5
					251	848.8	29.5	23.5
			3	1	128	824.2	28.4	24.2
					190	836.6	28.5	24.2
					251	848.8	28.5	24.2
			4	1	128	824.2	26.4	23.4
					190	836.6	26.5	23.5
					251	848.8	26.5	23.5

EGPRS (8PSK) is Rx only

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- EGPRS (8PSK) mode is RX Only

#### GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	
1900	GSM (Voice)	CS1	1	512	1850.2	29.6	20.5	
				661	1880.0	29.7	20.6	
				810	1909.8	29.7	20.7	
	GPRS (GMSK)	CS1	1	1	512	1850.2	29.6	20.5
					661	1880.0	29.7	20.6
					810	1909.8	29.7	20.7
			2	1	512	1850.2	26.6	20.5
					661	1880.0	26.7	20.7
					810	1909.8	26.8	20.8
			3	1	512	1850.2	25.5	21.3
					661	1880.0	25.7	21.4
					810	1909.8	25.8	21.5
			4	1	512	1850.2	23.5	20.5
					661	1880.0	23.7	20.6
					810	1909.8	23.8	20.8

EGPRS (8PSK) is Rx only

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- EGPRS (8PSK) mode is RX Only

## 7.2. W-CDMA Band II

### Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.5
		9400	1880.0	22.5
		9538	1907.6	22.4

### HSDPA

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
$\beta_{hs}$	4/15	24/15	30/15	30/15	
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

### Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.9
		9400	1880.0	0	21.9
		9538	1907.6	0	21.6
	Subtest 2	9262	1852.4	0	21.8
		9400	1880.0	0	22.0
		9538	1907.6	0	21.7
	Subtest 3	9262	1852.4	0.5	21.8
		9400	1880.0	0.5	21.9
		9538	1907.6	0.5	21.5
	Subtest 4	9262	1852.4	0.5	21.8
		9400	1880.0	0.5	21.8
		9538	1907.6	0.5	21.6

Maximum output power levels that are possible for all subtests reported.

**HSPA (HSDPA & HSUPA)**

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	11/15	15/9	2/15	15/0
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
Maximum Channelisation Codes	2xSF2				SF4	

**Measured Results**

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	20.5
		9400	1880.0	0	20.9
		9538	1907.6	0	20.6
	Subtest 2	9262	1852.4	2	19.9
		9400	1880.0	2	20.1
		9538	1907.6	2	19.9
	Subtest 3	9262	1852.4	1	20.6
		9400	1880.0	1	21.1
		9538	1907.6	1	20.0
	Subtest 4	9262	1852.4	2	20.5
		9400	1880.0	2	20.5
		9538	1907.6	2	20.4
	Subtest 5	9262	1852.4	0	22.4
		9400	1880.0	0	22.4
		9538	1907.6	0	22.1

### 7.3. Wi-Fi (2.4 GHz Band) (reference to additional KDB in footnote)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 <sup>#</sup>	√	∇
		2.437	6	√	∇
		2.462	11 <sup>#</sup>	√	∇

**Notes:**

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

<sup>#</sup> = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

#### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	16.6	Yes
			6	2437	17.5	
			11	2462	17.4	
	802.11g	6 Mbps	1	2412	14.5	No
			6	2437	14.5	
			11	2462	14.1	
	802.11n (HT20)	MCS0	1	2412	13.5	No
			6	2437	13.3	
			11	2462	13.0	

**Note(s):**

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

#### Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	17.5	Yes
			2 Mbps	17.5	No
			5.5 Mbps	17.5	No
			11 Mbps	17.5	No

## 7.4. Bluetooth

Maximum tune-up tolerance limit is 9.50 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing. Refer to Standalone SAR Test Exclusion Considerations Section.

## 8. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

### 8.1. Tissue Dielectric Parameters

#### FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3

## 8.2. Dielectric Property Measurements Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

### SAR Lab 1

	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit $\pm$ (%)	
		e'						
7/28/2014	Body 1900	e'	51.9900	Relative Permittivity ( $\epsilon_r$ ):	51.99	53.30	-2.46	5
		e"	14.3300	Conductivity ( $\sigma$ ):	1.51	1.52	-0.40	5
	Body 1850	e'	52.1900	Relative Permittivity ( $\epsilon_r$ ):	52.19	53.30	-2.08	5
		e"	14.1900	Conductivity ( $\sigma$ ):	1.46	1.52	-3.97	5
	Body 1910	e'	51.9500	Relative Permittivity ( $\epsilon_r$ ):	51.95	53.30	-2.53	5
		e"	14.3600	Conductivity ( $\sigma$ ):	1.53	1.52	0.33	5
7/28/2014	Head 1900	e'	38.7400	Relative Permittivity ( $\epsilon_r$ ):	38.74	40.00	-3.15	5
		e"	13.3700	Conductivity ( $\sigma$ ):	1.41	1.40	0.89	5
	Head 1850	e'	38.9900	Relative Permittivity ( $\epsilon_r$ ):	38.99	40.00	-2.53	5
		e"	13.2500	Conductivity ( $\sigma$ ):	1.36	1.40	-2.64	5
	Head 1910	e'	38.6900	Relative Permittivity ( $\epsilon_r$ ):	38.69	40.00	-3.28	5
		e"	13.3900	Conductivity ( $\sigma$ ):	1.42	1.40	1.57	5
7/28/2014	Body 835	e'	54.2100	Relative Permittivity ( $\epsilon_r$ ):	54.21	55.20	-1.79	5
		e"	21.5300	Conductivity ( $\sigma$ ):	1.00	0.97	3.05	5
	Body 820	e'	54.3300	Relative Permittivity ( $\epsilon_r$ ):	54.33	55.28	-1.71	5
		e"	21.5700	Conductivity ( $\sigma$ ):	0.98	0.97	1.55	5
	Body 850	e'	54.0500	Relative Permittivity ( $\epsilon_r$ ):	54.05	55.16	-2.01	5
		e"	21.4900	Conductivity ( $\sigma$ ):	1.02	0.99	2.89	5
7/29/2014	Head 835	e'	40.6300	Relative Permittivity ( $\epsilon_r$ ):	40.63	41.50	-2.10	5
		e"	19.4500	Conductivity ( $\sigma$ ):	0.90	0.90	0.34	5
	Head 820	e'	40.8100	Relative Permittivity ( $\epsilon_r$ ):	40.81	41.60	-1.91	5
		e"	19.5000	Conductivity ( $\sigma$ ):	0.89	0.90	-1.04	5
	Head 850	e'	40.4300	Relative Permittivity ( $\epsilon_r$ ):	40.43	41.50	-2.58	5
		e"	19.4100	Conductivity ( $\sigma$ ):	0.92	0.92	0.26	5
7/29/2014	Body 2450	e'	50.7900	Relative Permittivity ( $\epsilon_r$ ):	50.79	52.70	-3.62	5
		e"	14.3800	Conductivity ( $\sigma$ ):	1.96	1.95	0.46	5
	Body 2410	e'	50.8900	Relative Permittivity ( $\epsilon_r$ ):	50.89	52.76	-3.54	5
		e"	14.3000	Conductivity ( $\sigma$ ):	1.92	1.91	0.46	5
	Body 2475	e'	50.7300	Relative Permittivity ( $\epsilon_r$ ):	50.73	52.67	-3.68	5
		e"	14.4200	Conductivity ( $\sigma$ ):	1.98	1.99	-0.03	5
7/29/2014	Head 2450	e'	39.6700	Relative Permittivity ( $\epsilon_r$ ):	39.67	39.20	1.20	5
		e"	13.6300	Conductivity ( $\sigma$ ):	1.86	1.80	3.15	5
	Head 2410	e'	39.8700	Relative Permittivity ( $\epsilon_r$ ):	39.87	39.28	1.50	5
		e"	13.5200	Conductivity ( $\sigma$ ):	1.81	1.76	2.91	5
	Head 2475	e'	39.5900	Relative Permittivity ( $\epsilon_r$ ):	39.59	39.17	1.08	5
		e"	13.7300	Conductivity ( $\sigma$ ):	1.89	1.83	3.42	5

## 9. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are measured again or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### 9.1. Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d002	11/15/2013	835	1g	9.49	9.43
				10g	6.18	6.21
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D2450V2	899	11/10/2013	2450	1g	51.3	49.7
				10g	23.9	23.3

### 9.2. System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

#### SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
7/28/2014	Body	5d043	1900	1g	3.84	3.76	37.60	39.00	-3.59	2.08	1,2
				10g	1.95	1.97	19.70	20.80	-5.29		
7/28/2014	Head	5d043	1900	1g	4.09	4.01	40.10	40.10	0.00	1.96	
				10g	2.11	2.07	20.70	21.10	-1.90		
7/28/2014	Body	4d002	835	1g	0.99	0.98	9.81	9.43	4.03	0.91	3,4
				10g	0.67	0.65	6.46	6.21	4.03		
7/28/2014	Head	4d002	835	1g	0.99	0.97	9.7	9.49	2.53	1.42	
				10g	0.664	0.640	6.4	6.18	3.56		
7/29/2014	Body	899	2450	1g	5.23	5.21	52.1	49.70	4.83	0.38	
				10g	2.250	2.400	24.0	23.30	3.00		
7/29/2014	Head	899	2450	1g	5.69	5.55	55.5	51.30	8.19	2.46	5,6
				10g	2.480	2.510	25.1	23.90	5.02		

## 10. Measured and Reported (Scaled) SAR Results

**SAR Test Reduction criteria are as follows:**

**KDB 447498 D01 General RF Exposure Guidance:**

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

**KDB 648474 D04 Handset SAR:**

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

**KDB 941225 D01 SAR test for 3G devices:**

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least  $\frac{1}{4}$  dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

**KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):**

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration. When the extrapolated maximum peak SAR for the maximum output channel is  $\leq 1.6$  W/kg and the 1-g averaged SAR is  $\leq 0.8$  W/kg, testing of other channels in the "default test channels" or "required test channels" configuration is optional.

**10.1. GSM850**

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.1	32.7	0.329	0.361	1
			Left Tilt	190	836.6	33.1	32.7	0.211	0.231	
			Right Touch	190	836.6	33.1	32.7	0.334	0.366	
			Right Tilt	190	836.6	33.1	32.7	0.221	0.242	
Head VoIP	GPRS 3 Slots	0	Left Touch	190	836.6	29.1	28.5	0.365	0.419	2
			Left Tilt	190	836.6	29.1	28.5	0.239	0.274	
			Right Touch	190	836.6	29.1	28.5	0.388	<b>0.445</b>	
			Right Tilt	190	836.6	29.1	28.5	0.265	0.304	
Body-worn	Voice	10	Rear	190	836.6	33.1	32.7	0.558	0.612	3
			Front	190	836.6	33.1	32.7	0.373	0.409	
Body-worn(VoIP) & Hotspot	GPRS 3 Slots	10	Rear	190	836.6	29.1	28.5	0.629	0.722	4
Front			190	836.6	29.1	28.5	0.435	0.499		
Hotspot			Edge 2	190	836.6	29.1	28.5	0.298	0.342	
			Edge 3	190	836.6	29.1	28.5	0.093	0.107	
			Edge 4	190	836.6	29.1	28.5	0.327	0.375	

**10.2. GSM1900**

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.2	29.7	0.223	0.250	5
			Left Tilt	661	1880.0	30.2	29.7	0.123	0.138	
			Right Touch	661	1880.0	30.2	29.7	0.247	<b>0.277</b>	
			Right Tilt	661	1880.0	30.2	29.7	0.094	0.105	
Head VoIP	GPRS 3 Slots	0	Left Touch	661	1880.0	26.2	25.7	0.264	0.296	6
			Left Tilt	661	1880.0	26.2	25.7	0.140	0.157	
			Right Touch	661	1880.0	26.2	25.7	0.295	<b>0.331</b>	
			Right Tilt	661	1880.0	26.2	25.7	0.116	0.130	
Body-worn	Voice	10	Rear	661	1880.0	30.2	29.7	0.601	<b>0.674</b>	7
			Front	661	1880.0	30.2	29.7	0.478	0.536	
Body-worn(VoIP) & Hotspot	GPRS 3 Slots	10	Rear	661	1880.0	26.2	25.7	0.707	<b>0.793</b>	8
Front			661	1880.0	26.2	25.7	0.566	0.635		
Hotspot			Edge 2	661	1880.0	26.2	25.7	0.080	0.090	
			Edge 3	661	1880.0	26.2	25.7	0.347	0.389	
			Edge 4	661	1880.0	26.2	25.7	0.078	0.088	

**10.3. W-CDMA Band II**

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	22.5	22.5	0.317	0.317	
			Left Tilt	9400	1880.0	22.5	22.5	0.162	0.162	
			Right Touch	9400	1880.0	22.5	22.5	0.352	<b>0.352</b>	9
			Right Tilt	9400	1880.0	22.5	22.5	0.137	0.137	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9262	1852.4	22.5	22.5	0.836	0.836	
				9400	1880.0	22.5	22.5	0.832	0.832	
				9538	1907.6	22.5	22.4	0.924	<b>0.946</b>	10
			Front	9400	1880.0	22.5	22.5	0.655	0.655	
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	22.5	22.5	0.106	0.106	
			Edge 3	9400	1880.0	22.5	22.5	0.511	0.511	
			Edge 4	9400	1880.0	22.5	22.5	0.091	0.091	

**10.4. Wi-Fi (DTS Band)**

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	17.5	17.5	0.254	0.254	
				Left Tilt	6	2437.0	17.5	17.5	0.233	0.233	
				Right Touch	6	2437.0	17.5	17.5	0.592	<b>0.592</b>	11
				Right Tilt	6	2437.0	17.5	17.5	0.225	0.225	
	Body-worn Hotspot & Wi-Fi Direct	802.11b 1 Mbps	10	Rear	6	2437.0	17.5	17.5	0.164	<b>0.164</b>	12
				Front	6	2437.0	17.5	17.5	0.090	0.090	
	Hotspot & Wi-Fi Direct	802.11b 1 Mbps	10	Edge 1	6	2437.0	17.5	17.5	0.068	0.068	
				Edge 4	6	2437.0	17.5	17.5	0.145	0.145	

## 10.5. Bluetooth

### 10.5.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

#### Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
9.5	9	10	2.480	1.4

#### Conclusion:

The computed value is  $< 3$ ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

### 10.5.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$  for test separation distances  $\leq 50$  mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.

#### Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	9	10	2.480	0.189

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

### 11.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Wireless Router (Hotspot) (W/kg)	Repeated SAR (Yes/No)
850	GSM 850		0.629		No
1900	GSM 1900				
	WCDMA Band II		<b>0.924</b>		Yes
2400	Wi-Fi 802.11b/g/n	0.592			No

### 11.2. Repeated Measurement Results

#### Head

N/A

#### Body-worn Accessory & Wireless Router (Hotspot)

Frequency band	Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
						Original	Repeated		
WCDMA band II	Rear	10	Rel.99 RMC 12.2 kbps	9538	1907.6	0.924	0.894	1.03	1

#### Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

## 12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$\mathbf{SPLSR} = (\mathbf{SAR}_1 + \mathbf{SAR}_2)^{1.5} / \mathbf{Ri}$$

Where:

**SAR<sub>1</sub>** is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**Ri** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(\mathbf{SAR}_1 + \mathbf{SAR}_2)^{1.5} / \mathbf{Ri} < 0.04$$

**12.1. Sum of the SAR for GSM850 & Wi-Fi & BT**

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			$\Sigma$ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM850	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.419	0.254		0.673	No
	Left Tilt	① + ②	0.274	0.233		0.507	No
	Right Touch	① + ②	0.445	0.592		<b>1.037</b>	No
	Right Tilt	① + ②	0.304	0.225		0.529	No
Body-worn Accessory Hotspot & Wi-Fi Direct	Rear	① + ②	0.722	0.164		0.886	No
		① + ③	0.722		0.189	0.911	No
	Front	① + ②	0.499	0.090		0.589	No
		① + ③	0.499		0.189	0.688	No
Hotspot & Wi-Fi Direct	Edge 1	① + ②		0.068		0.068	No
	Edge 2	① + ②	0.342			0.342	No
	Edge 3	① + ②	0.107			0.107	No
	Edge 4	① + ②	0.375	0.145		0.520	No

**SAR to Peak Location Separation Ratio (SPLSR)**

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

**12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT**

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			$\Sigma$ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM1900	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.296	0.254		0.550	No
	Left Tilt	① + ②	0.157	0.233		0.390	No
	Right Touch	① + ②	0.331	0.592		0.923	No
	Right Tilt	① + ②	0.130	0.225		0.355	No
Body-worn Accessory Hotspot & Wi-Fi Direct	Rear	① + ②	0.793	0.164		0.957	No
		① + ③	0.793		0.189	0.982	No
	Front	① + ②	0.635	0.090		0.725	No
		① + ③	0.635		0.189	0.824	No
Hotspot & Wi-Fi Direct	Edge 1	① + ②		0.068		0.068	No
	Edge 2	① + ②	0.090			0.090	No
	Edge 3	① + ②	0.389			0.389	No
	Edge 4	① + ②	0.088	0.145		0.233	No

**SAR to Peak Location Separation Ratio (SPLSR)**

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

**12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT**

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			$\Sigma$ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band II	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.317	0.254		0.571	No
	Left Tilt	① + ②	0.162	0.233		0.395	No
	Right Touch	① + ②	0.352	0.592		0.944	No
	Right Tilt	① + ②	0.137	0.225		0.362	No
Body-worn Accessory Hotspot & Wi-Fi Direct	Rear	① + ②	0.946	0.164		<b>1.110</b>	No
		① + ③	0.946		0.189	1.135	No
	Front	① + ②	0.655	0.090		0.745	No
		① + ③	0.655		0.189	0.844	No
Hotspot & Wi-Fi Direct	Edge 1	① + ②		0.068		0.068	No
	Edge 2	① + ②	0.106			0.106	No
	Edge 3	① + ②	0.511			0.511	No
	Edge 4	① + ②	0.091	0.145		0.236	No

**SAR to Peak Location Separation Ratio (SPLSR)**

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

## **13. Appendixes**

**Refer to separated files for the following appendixes.**

- 13.1. Photos and Antenna Locations**
- 13.2. System Performance Check Plots**
- 13.3. Highest SAR Test Plots**
- 13.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902**
- 13.5. Calibration Certificate for D835V2 - SN 4d002**
- 13.6. Calibration Certificate for D1900V2- SN 5d043**
- 13.7. Calibration Certificate for D2450V2 - SN 899**

**END OF REPORT**