

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.**Address:**
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea**Date of Issue:**

March 05, 2019

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1902-FC036-R2**FCC ID:** A3LSMT515**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model(s):** SM-T515
Additional Model(s): SM-T515N, SM-T517
EUT Type: Tablet
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band12 (1.4)	699.7 – 715.3	1M10G7D	QPSK	0.064	18.05
		1M10W7D	16QAM	0.048	16.79
LTE – Band12 (3)	700.5 – 714.5	2M71G7D	QPSK	0.062	17.92
		2M71W7D	16QAM	0.046	16.65
LTE – Band12/17 (5)	701.5 – 713.5	4M53G7D	QPSK	0.059	17.68
		4M53W7D	16QAM	0.044	16.41
LTE – Band12/17 (10)	704.0 – 711.0	9M04G7D	QPSK	0.051	17.06
		9M04W7D	16QAM	0.037	15.65

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by : Jae Ryang Do**
Engineer of Telecommunication Testing Center**Report approved by : Jong Seok Lee**
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1902-FC036	February 22, 2019	- First Approval Report
HCT-RF-1902-FC036-R1	February 28, 2019	- Modified Equipment Class
HCT-RF-1902-FC036-R2	March 05, 2019	- Added MCC Blocking mechanism

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION.....	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY.....	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE.....	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS.....	8
3.4 OCCUPIED BANDWIDTH.....	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 BAND EDGE	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
3.8 WORST CASE(RADIATED TEST).....	13
3.9 WORST CASE(CONDUCTED TEST)	14
4. LIST OF TEST EQUIPMENT	15
5. MEASUREMENT UNCERTAINTY	16
6. SUMMARY OF TEST RESULTS	17
7. SAMPLE CALCULATION	18
8. TEST DATA	20
8.1 EFFECTIVE RADIATED POWER	20
8.2 RADIATED SPURIOUS EMISSIONS.....	22
8.3 OCCUPIED BANDWIDTH.....	26
8.4 CONDUCTED SPURIOUS EMISSIONS	27
8.5 BAND EDGE	27
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	28
8.7 GEO-LOCATION MECHANISM	40
9. TEST PLOTS.....	47
10. APPENDIX A_ TEST SETUP PHOTO.....	94

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMT515
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-T515
Additional Model(s):	SM-T515N, SM-T517
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12/17 (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12/17 (10 MHz))
Date(s) of Tests:	February 02, 2019 ~ February 18, 2019 MCC Bloking : March 05, 2019

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), ANT+, Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

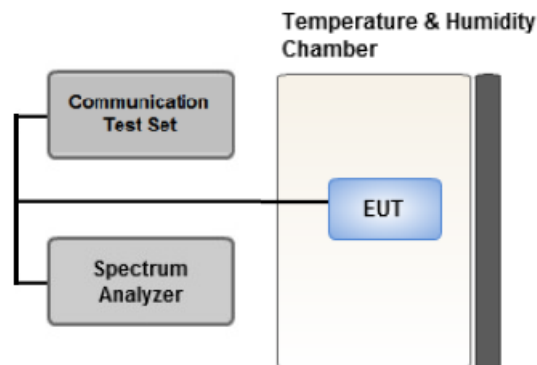

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

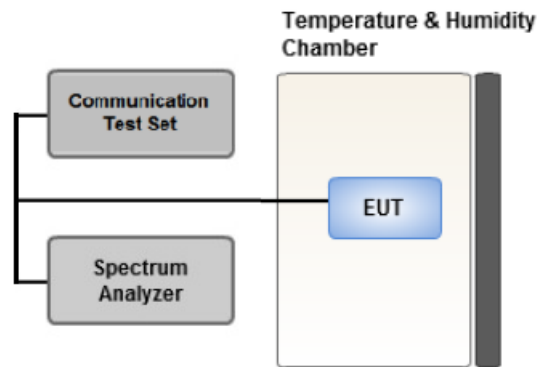

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.6 BAND EDGE

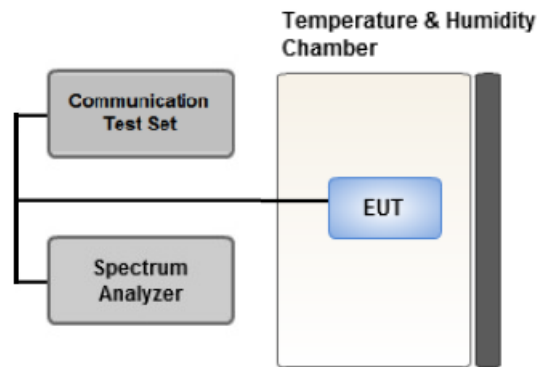

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

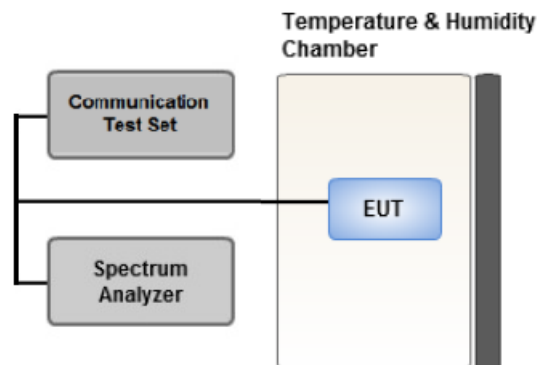

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- LTE Band 12 (698 – 716 MHz, 5/10MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704-716 MHz) and they have the same Tune-up power.
Therefore, test data provided in this report covers Band 17 as well as Band 12.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

Note:

- SM-T515 & additional models were tested and the worst case results are reported.
(Worst case : SM-T515)

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

- LTE Band 12 (698 – 716 MHz, 5/10MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704-716 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 17 as well as Band 12.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10	Low, Mid, High	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		1.4, 3, 5, 10	Low, High	Full RB	0
Channel Edge	* QPSK	1.4, 3, 5, 10	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

Note:

- SM-T515 & additional models were tested and the worst case results are reported.

(Worst case : SM-T515)

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
699.7	LTE B12 (1.4 MHz)	QPSK	-30.50	26.85	-10.16	0.78	V	< 3.00	0.039	15.91
		16-QAM	-31.75	25.60	-10.16	0.78	V		0.029	14.66
707.5		QPSK	-28.90	28.39	-10.17	0.78	V		0.055	17.44
		16-QAM	-30.07	27.22	-10.17	0.78	V		0.042	16.27
715.3		QPSK	-28.20	29.01	-10.18	0.78	V		0.064	18.05
		16-QAM	-29.46	27.75	-10.18	0.78	V		0.048	16.79

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
700.5	LTE B12 (3 MHz)	QPSK	-30.63	26.74	-10.16	0.78	V	< 3.00	0.038	15.80
		16-QAM	-31.93	25.44	-10.16	0.78	V		0.028	14.50
707.5		QPSK	-29.02	28.27	-10.17	0.78	V		0.054	17.32
		16-QAM	-30.33	26.96	-10.17	0.78	V		0.040	16.01
714.5		QPSK	-28.31	28.88	-10.18	0.78	V		0.062	17.92
		16-QAM	-29.58	27.61	-10.18	0.78	V		0.046	16.65

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
701.5	LTE B12/17 (5 MHz)	QPSK	-30.58	26.82	-10.16	0.78	V	< 3.00	0.039	15.88
		16-QAM	-31.83	25.57	-10.16	0.78	V		0.029	14.63
707.5		QPSK	-29.14	28.15	-10.17	0.78	V		0.052	17.20
		16-QAM	-30.43	26.86	-10.17	0.78	V		0.039	15.91
713.5		QPSK	-28.54	28.64	-10.18	0.78	V		0.059	17.68
		16-QAM	-29.81	27.37	-10.18	0.78	V		0.044	16.41

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
704.0	LTE B12/17 (10 MHz)	QPSK	-30.32	27.08	-10.16	0.78	V	< 3.00	0.041	16.14
		16-QAM	-31.58	25.82	-10.16	0.78	V		0.031	14.88
707.5		QPSK	-29.54	27.75	-10.17	0.78	V		0.048	16.80
		16-QAM	-30.83	26.46	-10.17	0.78	V		0.036	15.51
711.0		QPSK	-29.20	28.02	-10.18	0.78	V		0.051	17.06
		16-QAM	-30.61	26.61	-10.18	0.78	V		0.037	15.65

8.2 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY: 715.30 MHz
- MEASURED OUTPUT POWER: 18.05 dBm = 0.064 W
- MODE: LTE B12
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23017 (699.7)	1,399.40	-51.06	5.32	-57.62	1.16	H	-55.61	73.66
	2,099.10	-49.48	7.68	-55.97	1.44	V	-51.88	69.93
	2,798.80	-56.93	9.00	-62.01	1.72	H	-56.88	74.93
23095 (707.5)	1,415.00	-53.10	5.41	-59.52	1.17	H	-57.43	75.47
	2,122.50	-49.00	7.58	-54.91	1.46	V	-50.94	68.98
	2,830.00	-57.16	9.08	-62.37	1.72	H	-57.16	75.20
23173 (715.3)	1,430.60	-50.54	5.55	-57.43	1.17	V	-55.20	73.25
	2,145.90	-51.02	7.32	-56.28	1.47	H	-52.58	70.63
	2,861.20	-57.55	9.16	-62.54	1.74	H	-57.27	75.32

- OPERATING FREQUENCY: 714.50 MHz
- MEASURED OUTPUT POWER: 17.92 dBm = 0.062 W
- MODE: LTE B12
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.92 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23025 (700.5)	1,401.00	-51.33	5.32	-57.89	1.16	H	-55.88	73.80
	2,101.50	-49.49	7.68	-55.98	1.44	V	-51.89	69.81
	2,802.00	-57.85	9.00	-62.93	1.72	H	-57.80	75.72
23095 (707.5)	1,415.00	-51.86	5.41	-58.28	1.17	H	-56.19	74.10
	2,122.50	-48.94	7.58	-54.85	1.46	V	-50.88	68.80
	2,830.00	-57.43	9.08	-62.64	1.72	V	-57.43	75.34
23165 (714.5)	1,429.00	-50.65	5.55	-57.54	1.17	V	-55.31	73.23
	2,143.50	-48.37	7.32	-53.63	1.47	H	-49.93	67.85
	2,858.00	-57.95	9.16	-62.94	1.74	H	-57.67	75.59

- OPERATING FREQUENCY: 713.50 MHz
- MEASURED OUTPUT POWER: 17.68 dBm = 0.059 W
- MODE: LTE B12/B17
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.68 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23035 (701.5)	1,403.00	-50.87	5.32	-57.43	1.16	H	-55.42	73.10
	2,104.50	-48.91	7.66	-55.14	1.45	H	-51.08	68.76
	2,806.00	-58.06	9.01	-63.14	1.70	V	-57.98	75.66
23095 (707.5)	1,415.00	-51.48	5.41	-57.90	1.17	H	-55.81	73.48
	2,122.50	-49.29	7.58	-55.20	1.46	H	-51.23	68.91
	2,830.00	-58.28	9.08	-63.49	1.72	H	-58.28	75.96
23155 (713.5)	1,427.00	-49.97	5.55	-56.86	1.17	V	-54.63	72.31
	2,140.50	-47.70	7.37	-52.95	1.47	H	-49.20	66.88
	2,854.00	-57.15	9.16	-62.22	1.73	V	-56.94	74.62

- OPERATING FREQUENCY: 711.00 MHz
- MEASURED OUTPUT POWER: 17.06 dBm = 0.051 W
- MODE: LTE B12/B17
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.06 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23060 (704.0)	1,408.00	-51.55	5.38	-57.88	1.17	V	-55.82	72.88
	2,112.00	-48.46	7.63	-54.43	1.45	V	-50.40	67.46
	2,816.00	-57.78	9.03	-62.98	1.70	H	-57.80	74.85
23095 (707.5)	1,415.00	-50.93	5.41	-57.35	1.17	H	-55.26	72.31
	2,122.50	-51.46	7.58	-57.37	1.46	H	-53.40	70.46
	2,830.00	-58.21	9.08	-63.42	1.72	V	-58.21	75.26
23130 (711.0)	1,422.00	-53.14	5.44	-59.64	1.17	V	-57.52	74.57
	2,133.00	-48.99	7.47	-54.74	1.47	H	-50.89	67.94
	2,844.00	-57.37	9.13	-62.51	1.71	H	-57.24	74.30

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
12	1.4 MHz	707.5	QPSK	6	0	1.0998
			16-QAM	6	0	1.0968
	3 MHz		QPSK	15	0	2.7143
			16-QAM	15	0	2.7137
12/17	5 MHz		QPSK	25	0	4.5335
			16-QAM	25	0	4.5318
	10 MHz		QPSK	50	0	9.0389
			16-QAM	50	0	9.0444

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 48 ~ 55.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.7	3.7124	27.976	-67.106	-39.130	-13.00
		707.5	3.6955	27.976	-67.262	-39.286	
		715.3	3.7015	27.976	-67.192	-39.216	
	3	700.5	3.7189	27.976	-67.271	-39.295	
		707.5	3.7059	27.976	-67.207	-39.231	
		714.5	3.6845	27.976	-67.381	-39.405	
12/17	5	701.5	3.6890	27.976	-67.231	-39.255	
		707.5	3.7069	27.976	-67.298	-39.322	
		713.5	3.7194	27.976	-67.157	-39.181	
	10	704.0	3.6970	27.976	-67.369	-39.393	
		707.5	3.7069	27.976	-67.246	-39.270	
		711.0	3.6840	27.976	-67.278	-39.302	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 82 ~ 93.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 56 ~ 81.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE B12
- OPERATING FREQUENCY: 699,700,000 Hz
- CHANNEL: 23017 (1.4 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	699 700 003	0.0	0.000 000	0.000
100%		-30	699 700 000	-3.1	0.000 000	-0.004
100%		-20	699 700 001	-2.1	0.000 000	-0.003
100%		-10	699 700 007	3.9	0.000 001	0.006
100%		0	699 700 007	4.0	0.000 001	0.006
100%		+10	699 700 007	4.1	0.000 001	0.006
100%		+30	699 700 007	4.0	0.000 001	0.006
100%		+40	699 700 005	2.4	0.000 000	0.003
100%		+50	699 700 006	3.6	0.000 001	0.005
Batt. Endpoint	3.400	+20	699 700 005	2.2	0.000 000	0.003

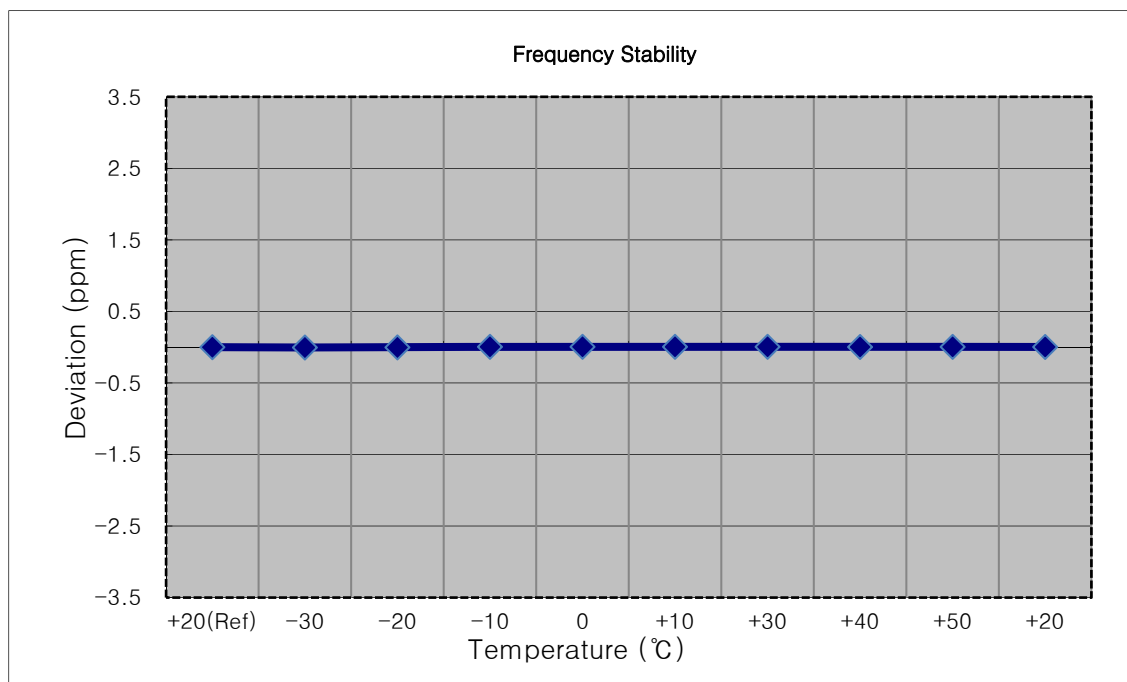


- MODE: LTE B12
- OPERATING FREQUENCY: 700,500,000 Hz
- CHANNEL: 23025 (3 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	700 500 002	0.0	0.000 000	0.000
100%		-30	700 500 005	2.5	0.000 000	0.004
100%		-20	700 500 005	3.4	0.000 000	0.005
100%		-10	700 500 006	3.5	0.000 000	0.005
100%		0	700 499 999	-2.7	0.000 000	-0.004
100%		+10	700 500 006	4.1	0.000 001	0.006
100%		+30	700 500 005	3.4	0.000 000	0.005
100%		+40	700 500 006	4.4	0.000 001	0.006
100%		+50	700 499 999	-3.4	0.000 000	-0.005
Batt. Endpoint	3.400	+20	700 500 004	2.3	0.000 000	0.003

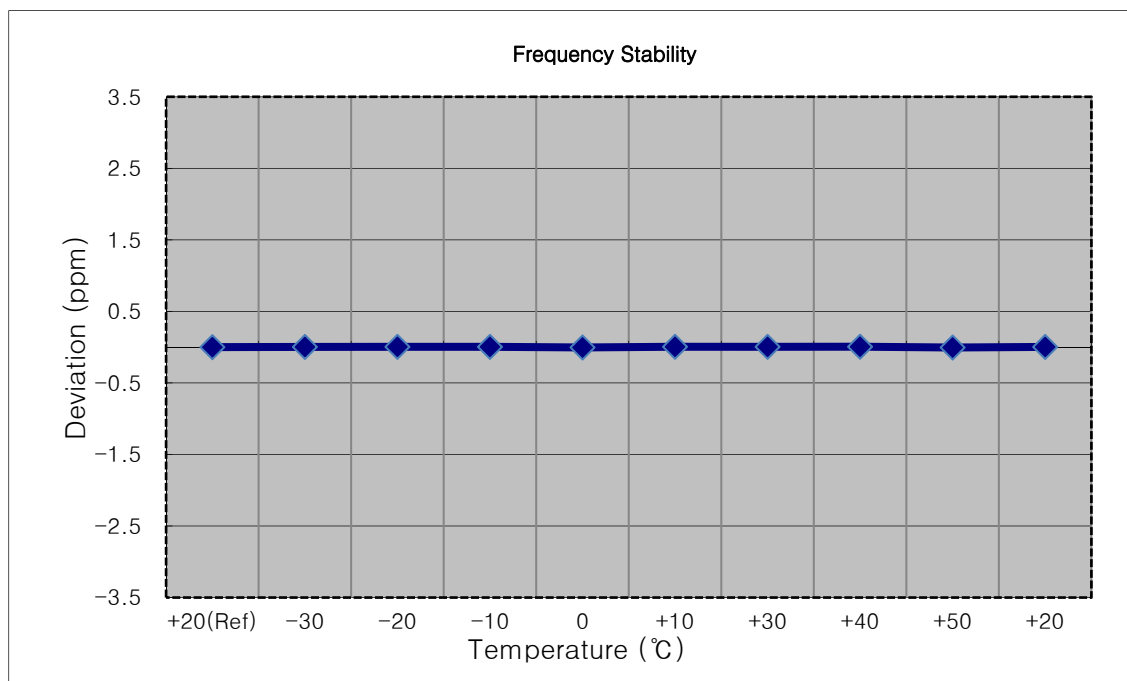


- MODE: LTE B12/B17
- OPERATING FREQUENCY: 701,500,000 Hz
- CHANNEL: 23035 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	701 500 002	0.0	0.000 000	0.000
100%		-30	701 500 000	-2.7	0.000 000	-0.004
100%		-20	701 500 006	3.7	0.000 001	0.005
100%		-10	701 500 004	1.9	0.000 000	0.003
100%		0	701 500 006	3.4	0.000 000	0.005
100%		+10	701 500 004	2.2	0.000 000	0.003
100%		+30	701 500 006	3.5	0.000 000	0.005
100%		+40	701 500 006	3.8	0.000 001	0.005
100%		+50	701 499 998	-4.3	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	701 500 005	2.7	0.000 000	0.004

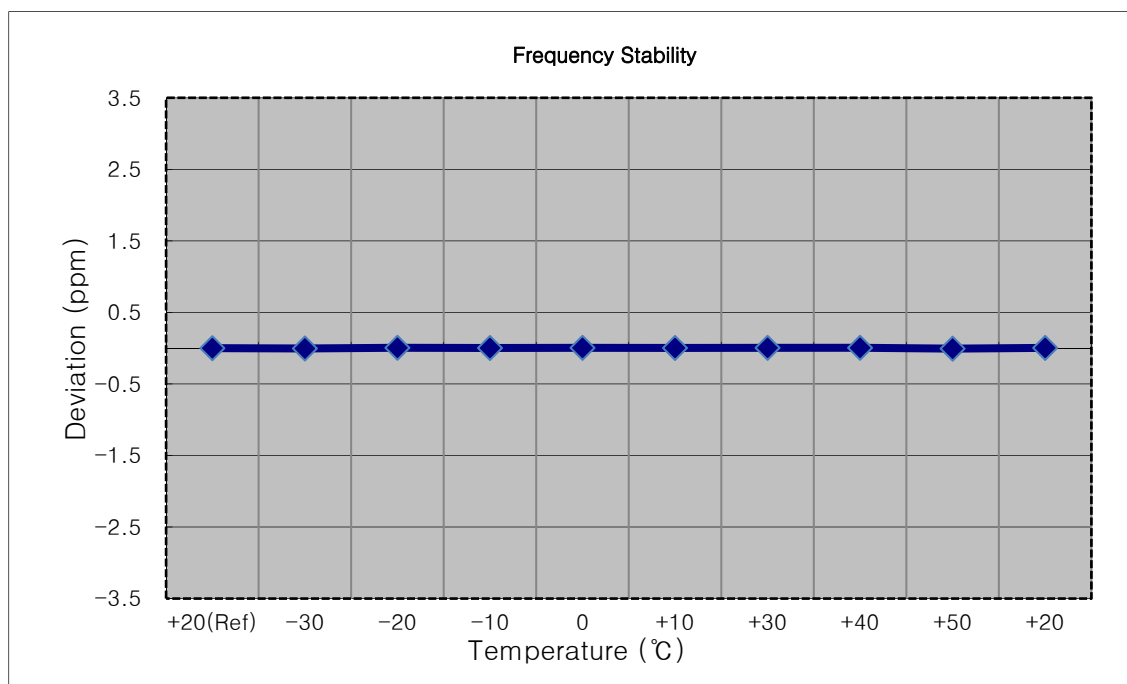


- MODE: LTE B12/B17
- OPERATING FREQUENCY: 704,000,000 Hz
- CHANNEL: 23060 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	704 000 003	0.0	0.000 000	0.000
100%		-30	703 999 998	-4.8	-0.000 001	-0.007
100%		-20	704 000 007	4.1	0.000 001	0.006
100%		-10	704 000 006	3.3	0.000 000	0.005
100%		0	703 999 999	-3.8	-0.000 001	-0.005
100%		+10	703 999 998	-4.8	-0.000 001	-0.007
100%		+30	704 000 007	4.3	0.000 001	0.006
100%		+40	704 000 000	-3.3	0.000 000	-0.005
100%		+50	703 999 999	-3.6	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	703 999 999	-4.3	-0.000 001	-0.006

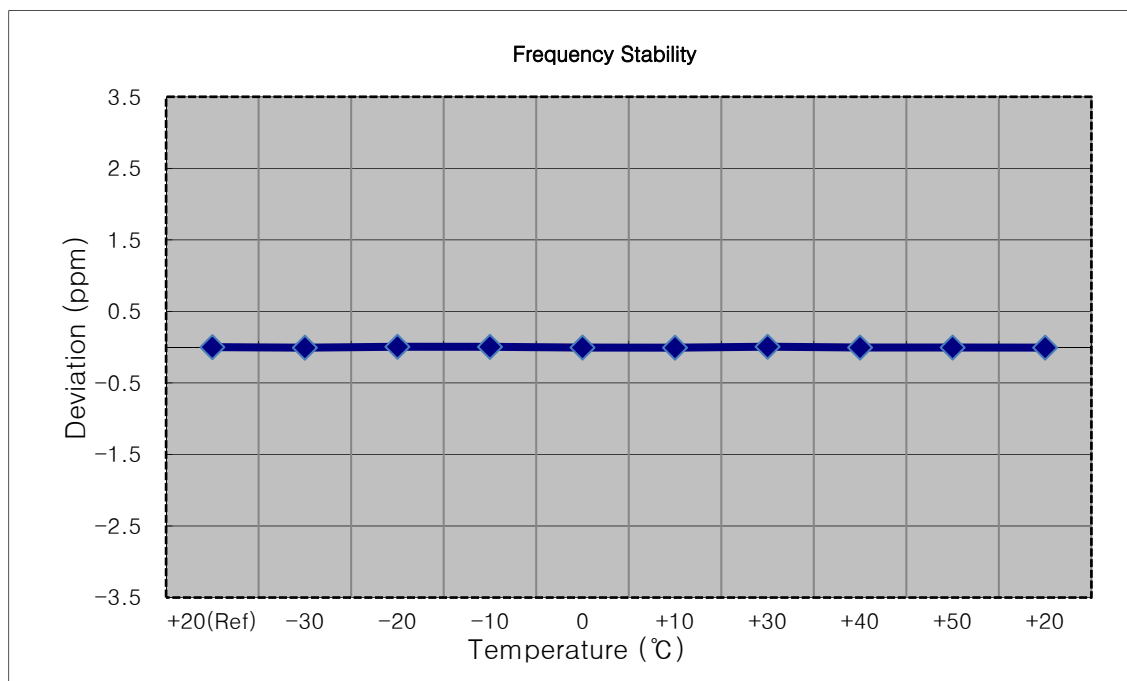


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (1.4 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 003	0.0	0.000 000	0.000
100%		-30	707 500 001	-1.9	0.000 000	-0.003
100%		-20	707 500 000	-3.1	0.000 000	-0.004
100%		-10	707 500 004	1.4	0.000 000	0.002
100%		0	707 500 004	1.4	0.000 000	0.002
100%		+10	707 500 004	1.4	0.000 000	0.002
100%		+30	707 500 000	-2.6	0.000 000	-0.004
100%		+40	707 500 007	3.5	0.000 000	0.005
100%		+50	707 500 006	3.0	0.000 000	0.004
Batt. Endpoint	3.400	+20	707 500 005	2.4	0.000 000	0.003

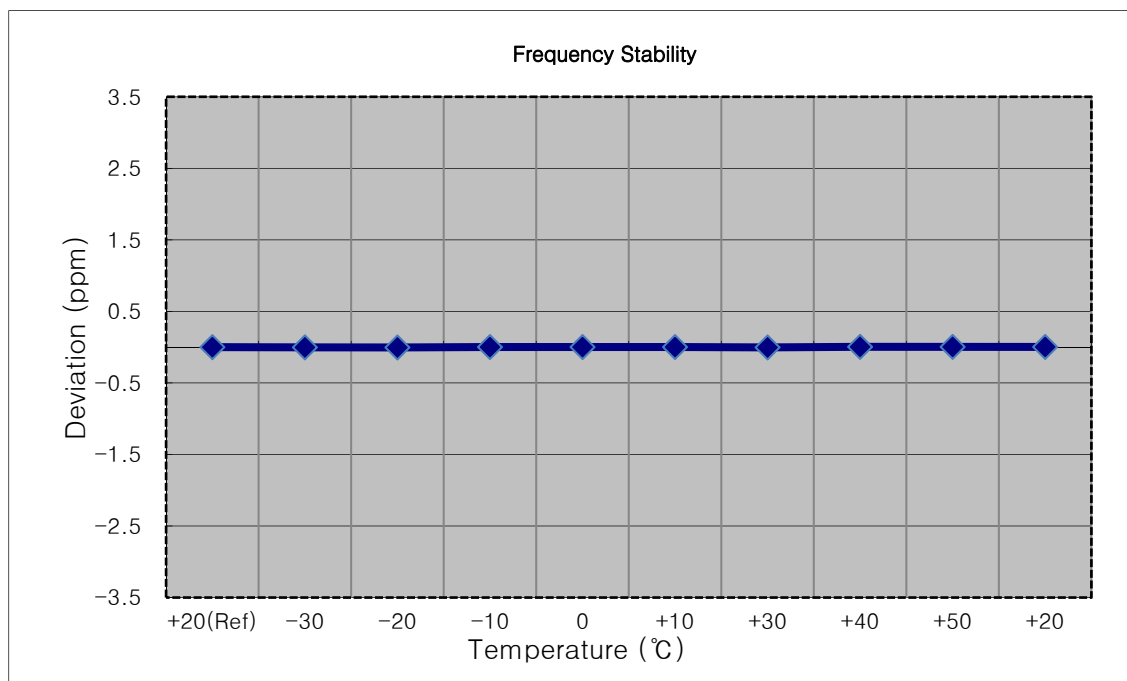


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (3 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 003	0.0	0.000 000	0.000
100%		-30	707 500 004	1.3	0.000 000	0.002
100%		-20	707 500 006	3.2	0.000 000	0.005
100%		-10	707 500 007	3.8	0.000 001	0.005
100%		0	707 500 001	-1.5	0.000 000	-0.002
100%		+10	707 500 005	2.5	0.000 000	0.004
100%		+30	707 500 005	2.5	0.000 000	0.004
100%		+40	707 500 005	2.6	0.000 000	0.004
100%		+50	707 500 008	5.0	0.000 001	0.007
Batt. Endpoint	3.400	+20	707 500 005	2.1	0.000 000	0.003

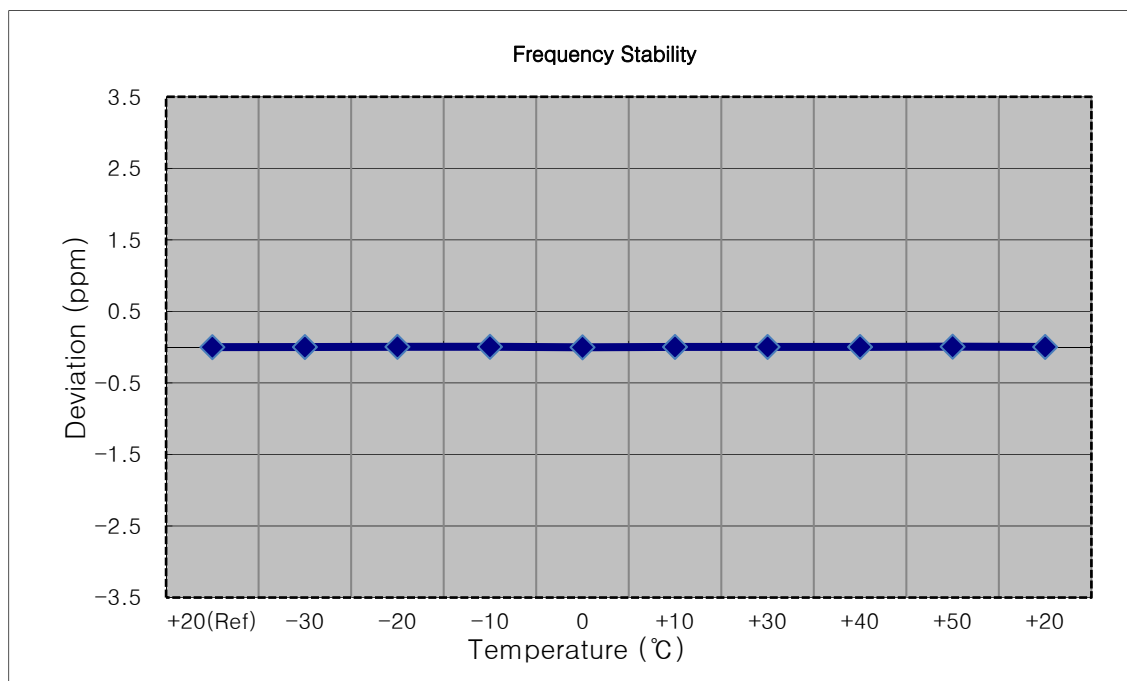


- MODE: LTE B12/B17
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 004	0.0	0.000 000	0.000
100%		-30	707 500 006	2.3	0.000 000	0.003
100%		-20	707 500 001	-2.5	0.000 000	-0.004
100%		-10	707 500 001	-3.2	0.000 000	-0.005
100%		0	707 500 006	2.4	0.000 000	0.003
100%		+10	707 500 001	-2.5	0.000 000	-0.004
100%		+30	707 500 001	-3.0	0.000 000	-0.004
100%		+40	707 500 002	-2.2	0.000 000	-0.003
100%		+50	707 500 002	-1.5	0.000 000	-0.002
Batt. Endpoint	3.400	+20	707 500 006	1.7	0.000 000	0.002

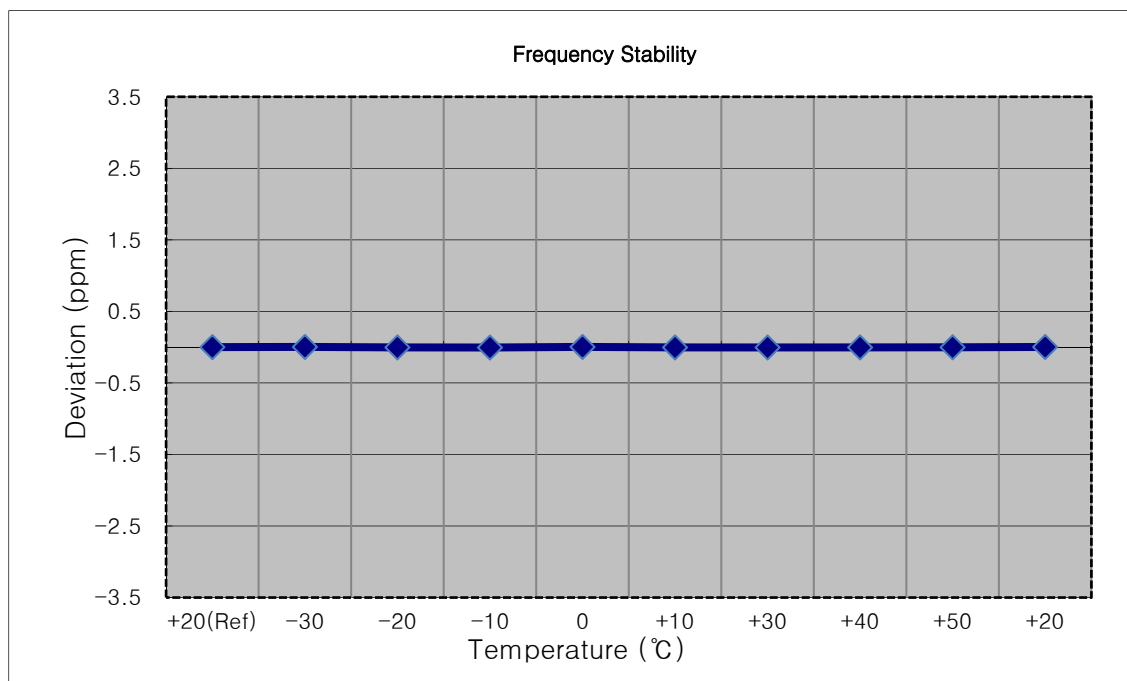


- MODE: LTE B12/B17
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 001	0.0	0.000 000	0.000
100%		-30	707 500 003	1.8	0.000 000	0.003
100%		-20	707 500 000	-1.6	0.000 000	-0.002
100%		-10	707 500 005	3.4	0.000 000	0.005
100%		0	707 499 999	-2.3	0.000 000	-0.003
100%		+10	707 500 005	3.7	0.000 001	0.005
100%		+30	707 500 004	2.8	0.000 000	0.004
100%		+40	707 500 004	2.4	0.000 000	0.003
100%		+50	707 500 003	2.1	0.000 000	0.003
Batt. Endpoint	3.400	+20	707 500 003	2.1	0.000 000	0.003

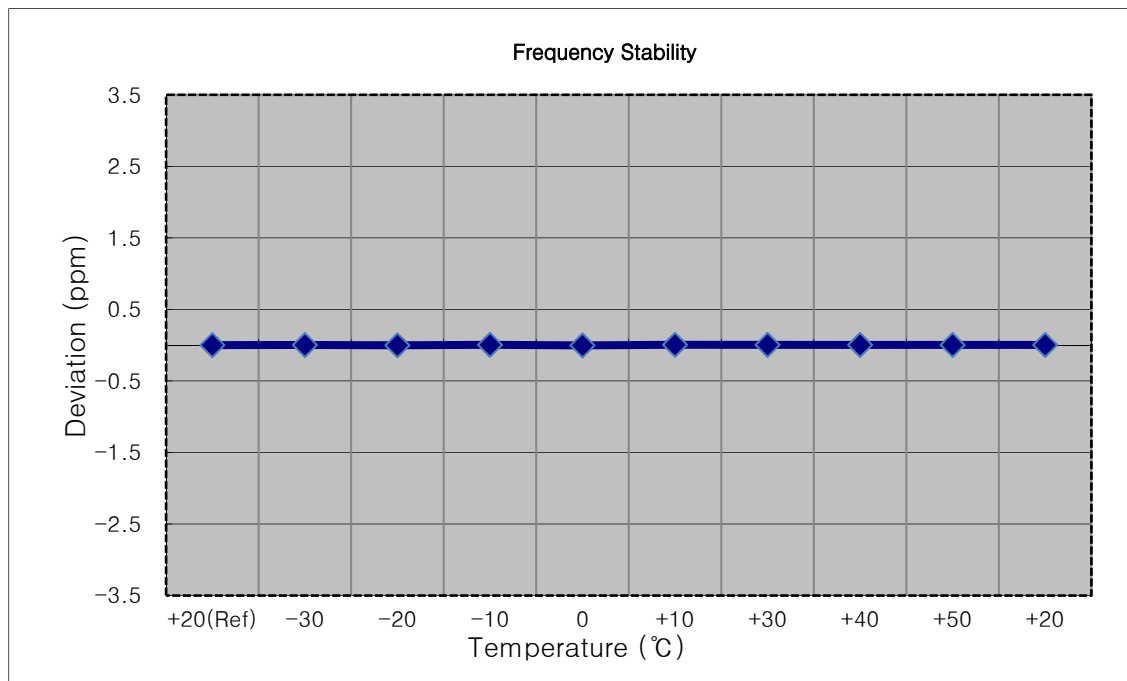


- MODE: LTE B12
- OPERATING FREQUENCY: 715,300,000 Hz
- CHANNEL: 23173 (1.4 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	715 299 996	0.0	0.000 000	0.000
100%		-30	715 299 992	-3.3	0.000 000	-0.005
100%		-20	715 299 999	3.3	0.000 000	0.005
100%		-10	715 299 993	-2.5	0.000 000	-0.003
100%		0	715 299 999	3.7	0.000 001	0.005
100%		+10	715 299 998	2.4	0.000 000	0.003
100%		+30	715 299 993	-2.3	0.000 000	-0.003
100%		+40	715 299 998	2.6	0.000 000	0.004
100%		+50	715 299 999	3.1	0.000 000	0.004
Batt. Endpoint	3.400	+20	715 300 000	4.5	0.000 001	0.006

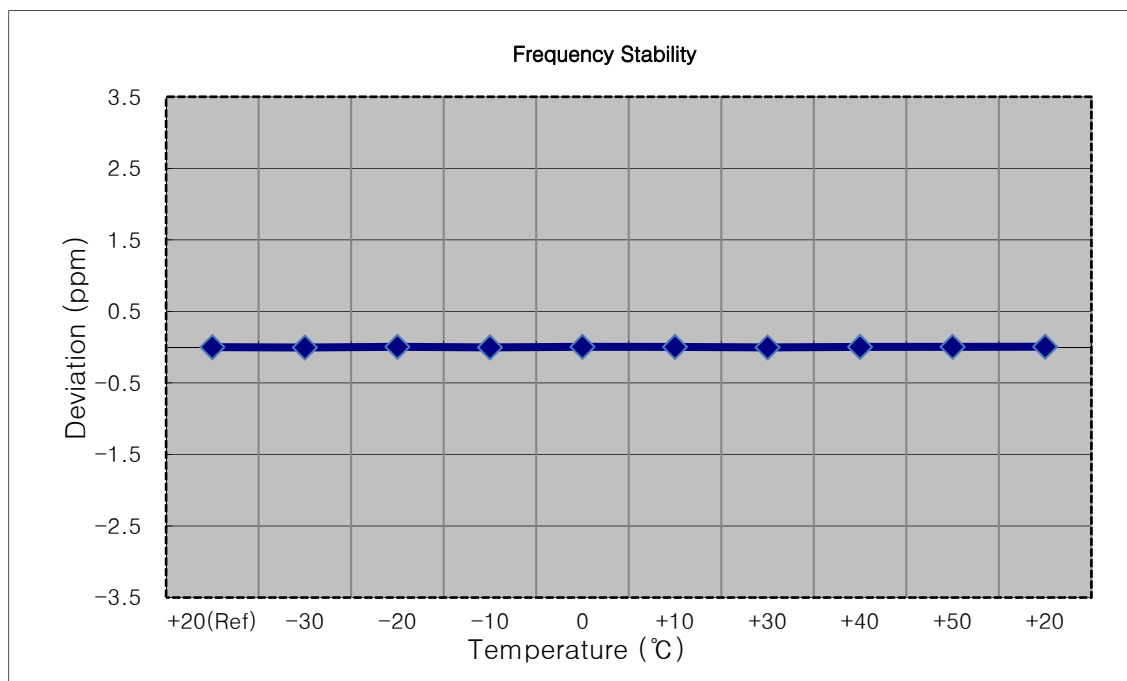


- MODE: LTE B12
- OPERATING FREQUENCY: 714,500,000 Hz
- CHANNEL: 23165 (3 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	714 500 007	0.0	0.000 000	0.000
100%		-30	714 500 012	4.4	0.000 001	0.006
100%		-20	714 500 013	5.8	0.000 001	0.008
100%		-10	714 500 012	4.4	0.000 001	0.006
100%		0	714 500 015	7.5	0.000 001	0.010
100%		+10	714 500 014	6.4	0.000 001	0.009
100%		+30	714 500 018	10.2	0.000 001	0.014
100%		+40	714 500 002	-5.6	-0.000 001	-0.008
100%		+50	714 500 012	5.0	0.000 001	0.007
Batt. Endpoint	3.400	+20	714 500 005	-2.6	0.000 000	-0.004

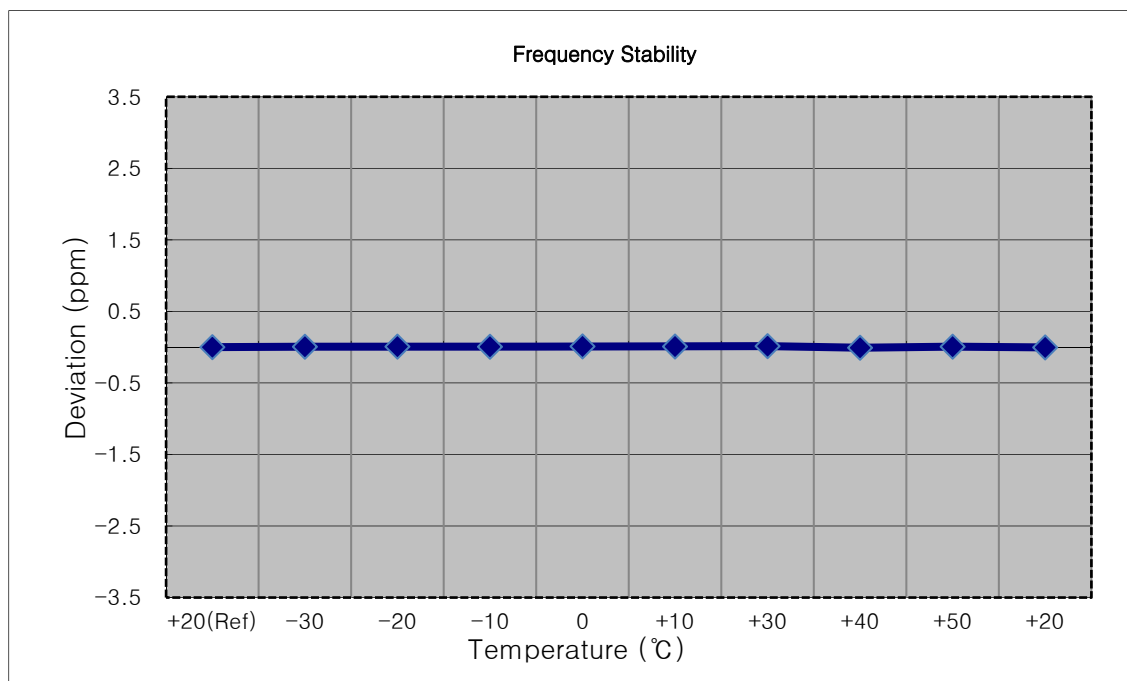


- MODE: LTE B12/B17
- OPERATING FREQUENCY: 713,500,000 Hz
- CHANNEL: 23155 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	713 500 003	0.0	0.000 000	0.000
100%		-30	713 500 007	3.5	0.000 000	0.005
100%		-20	713 500 008	5.2	0.000 001	0.007
100%		-10	713 500 005	1.9	0.000 000	0.003
100%		0	713 500 008	4.5	0.000 001	0.006
100%		+10	713 500 001	-1.8	0.000 000	-0.003
100%		+30	713 500 007	3.9	0.000 001	0.005
100%		+40	713 500 005	2.2	0.000 000	0.003
100%		+50	713 500 006	3.0	0.000 000	0.004
Batt. Endpoint	3.400	+20	713 500 001	-2.4	0.000 000	-0.003

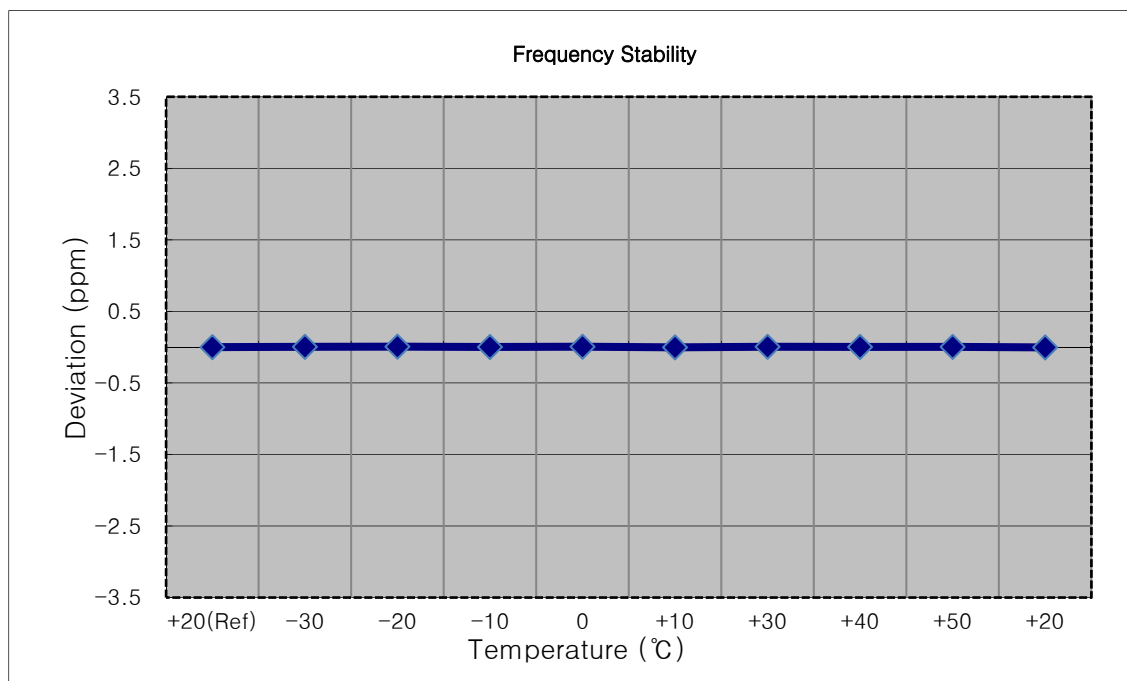

- MODE: LTE B12/B17
- OPERATING FREQUENCY: 711,000,000 Hz
- CHANNEL: 23130 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	711 000 003	0.0	0.000 000	0.000
100%		-30	711 000 006	2.9	0.000 000	0.004
100%		-20	711 000 001	-1.8	0.000 000	-0.003
100%		-10	711 000 001	-2.1	0.000 000	-0.003
100%		0	711 000 006	2.7	0.000 000	0.004
100%		+10	711 000 006	3.1	0.000 000	0.004
100%		+30	711 000 001	-2.1	0.000 000	-0.003
100%		+40	711 000 001	-2.0	0.000 000	-0.003
100%		+50	711 000 006	2.8	0.000 000	0.004
Batt. Endpoint	3.400	+20	711 000 006	2.5	0.000 000	0.004

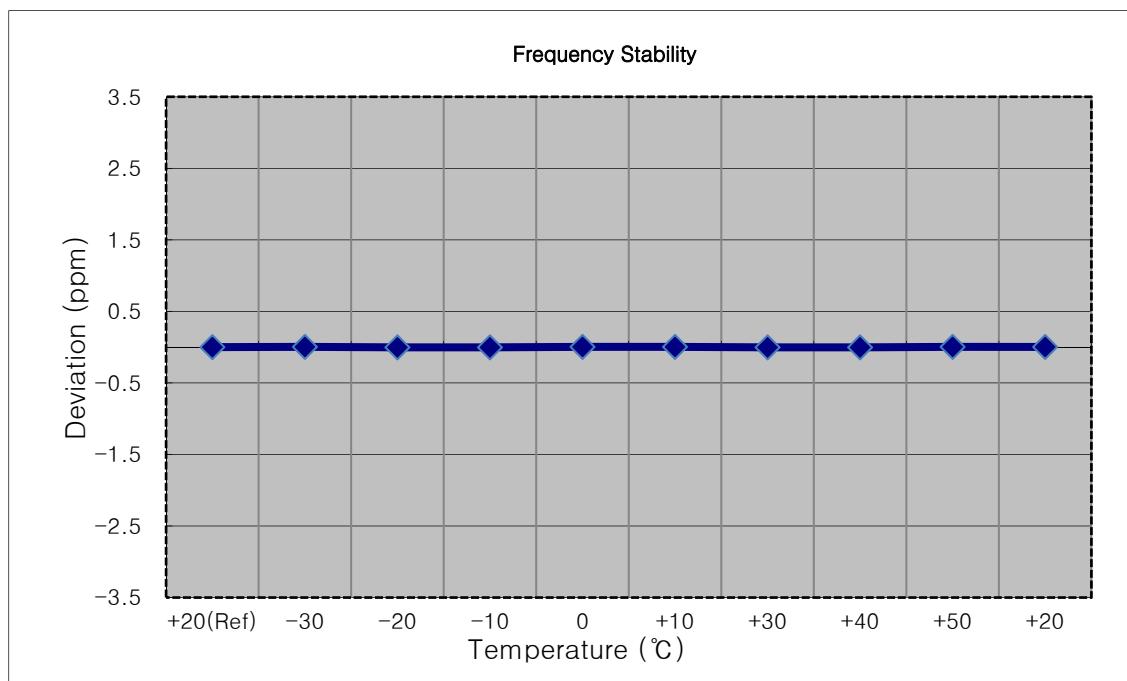

8.7 GEO-LOCATION MECHANISM


The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain LTE bands when the device is not in the USA.


The validation of this mechanism is provided below. The device was configured for cellular communications to a test set and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the LTE band is supported.


Band	MCC = USA	MCC = non US
7	Did not connect	Connected (Canada)
38	Did not connect	Connected (Canada)
40	Did not connect	Connected (Canada)


The verification tests confirmed the operational of the geo-location mechanism.


Verification test

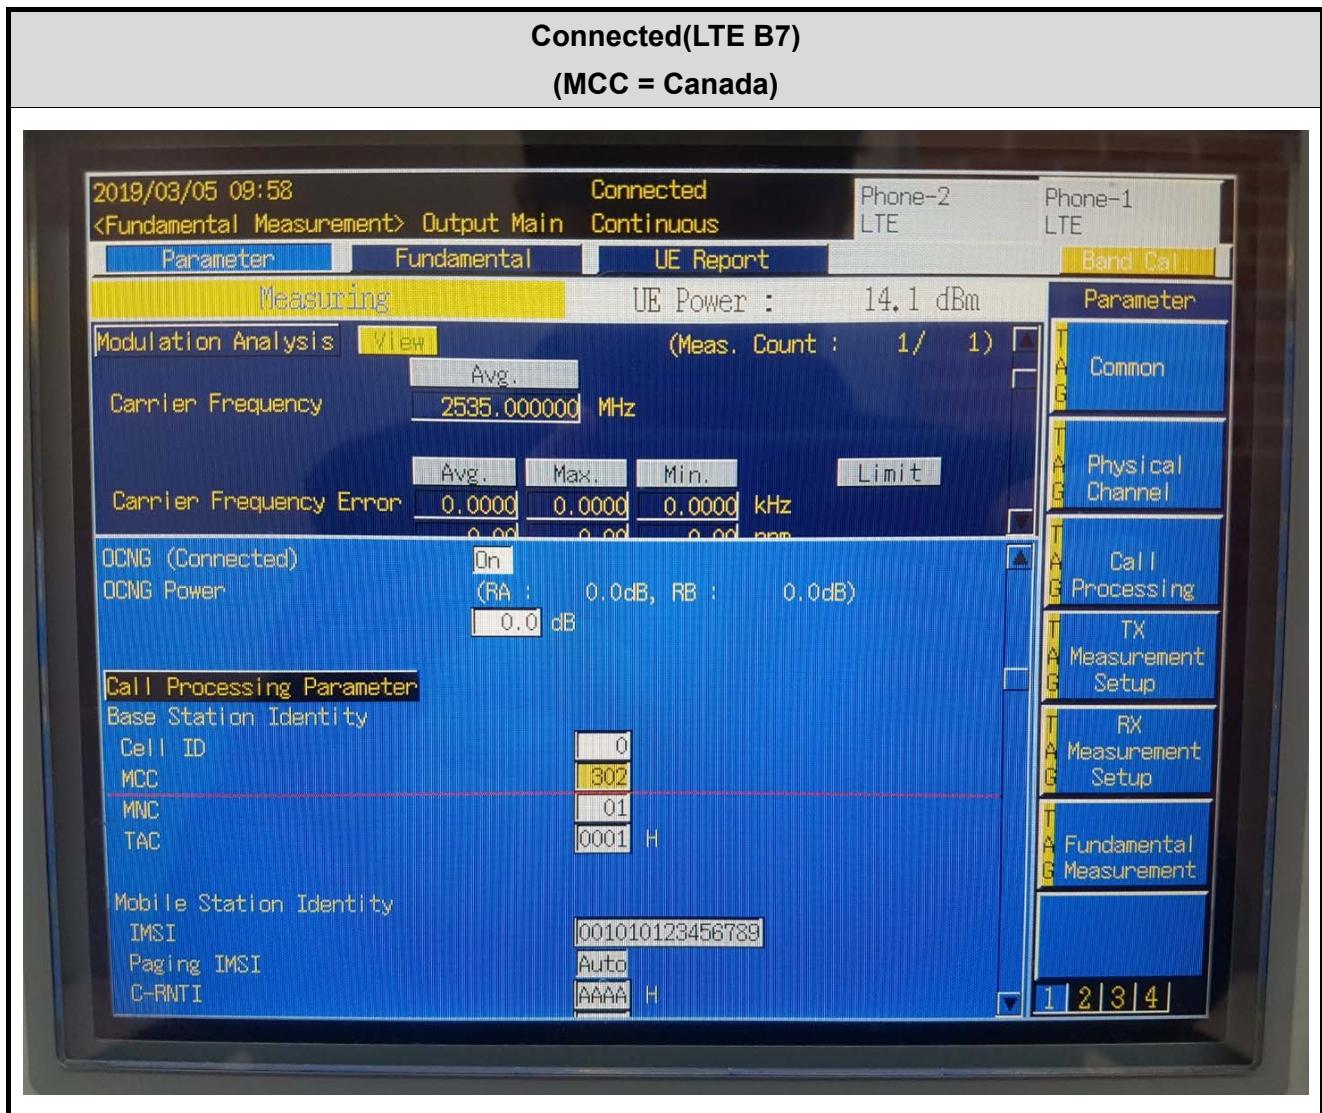


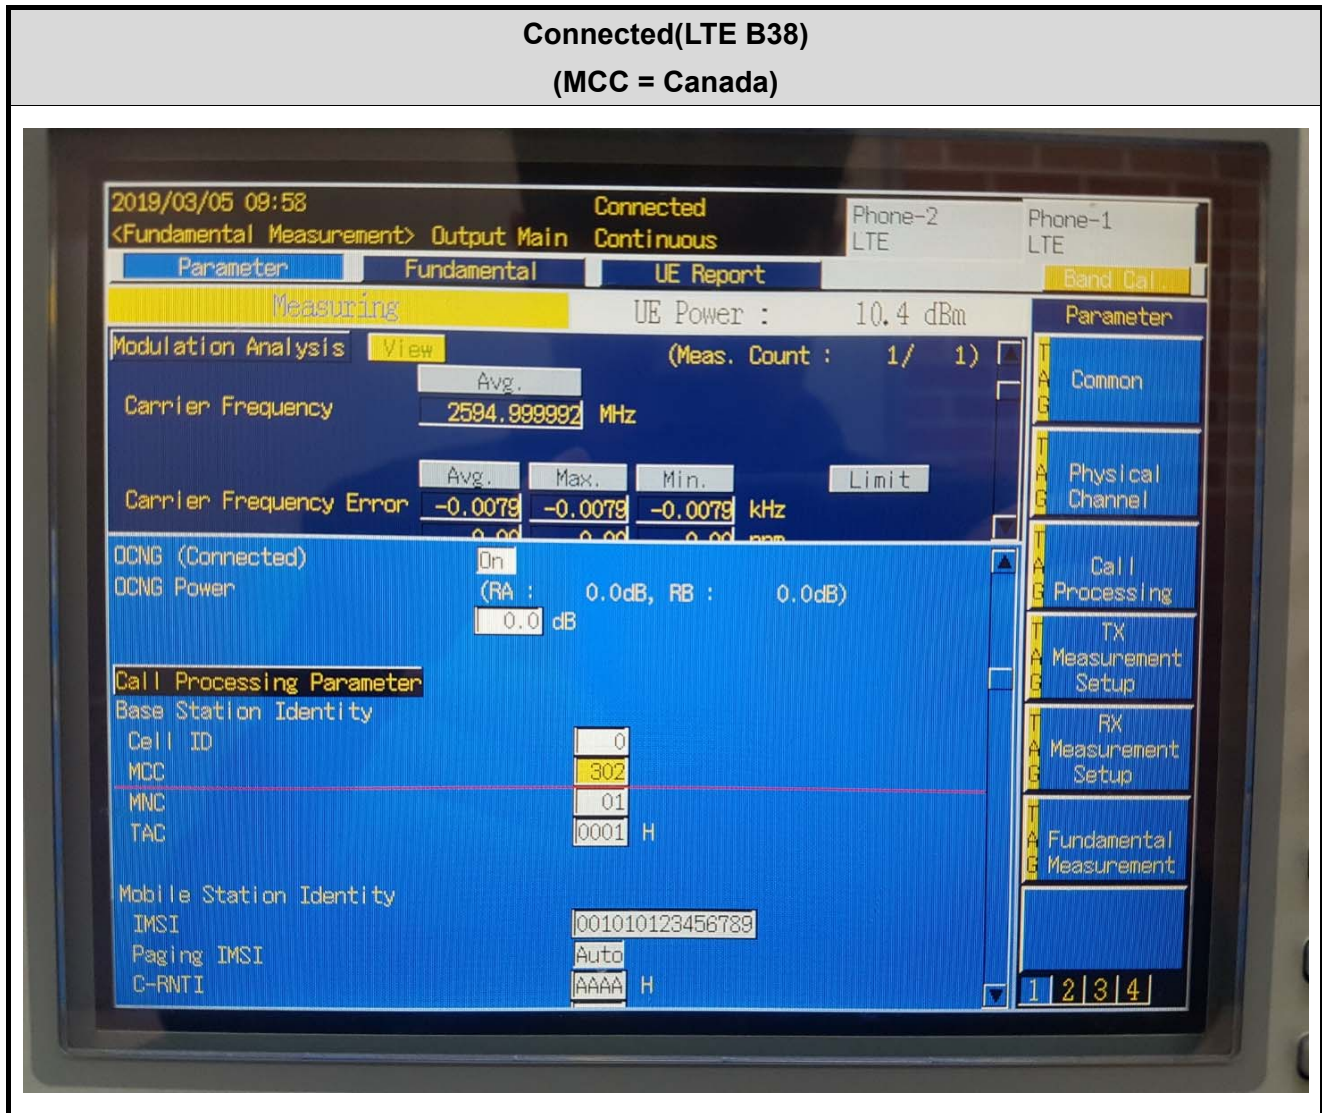

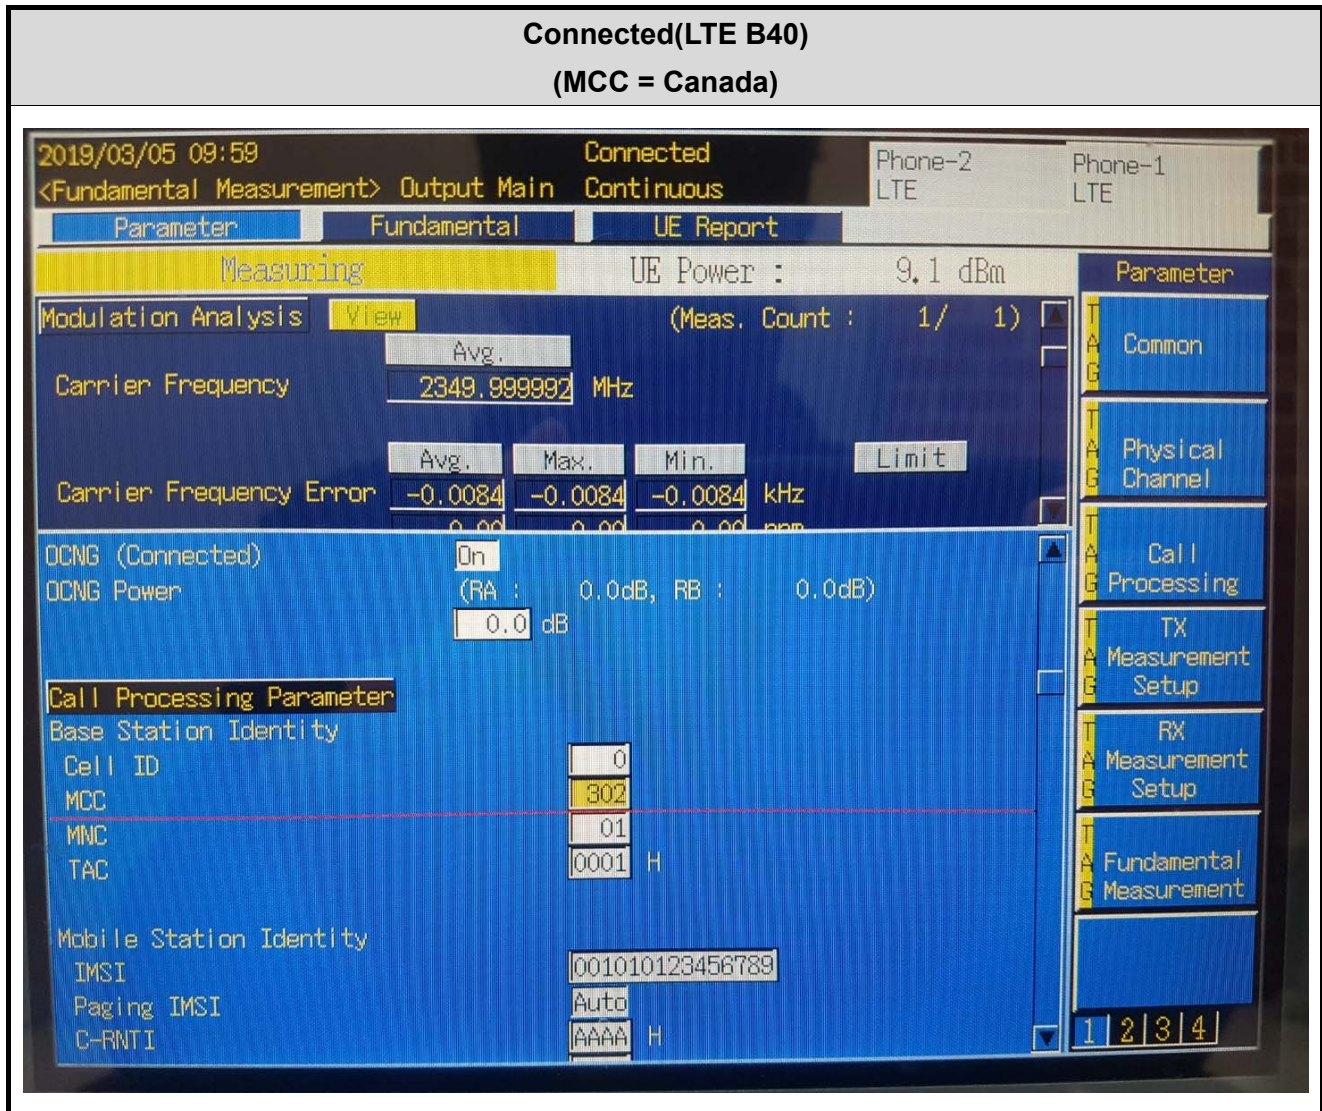

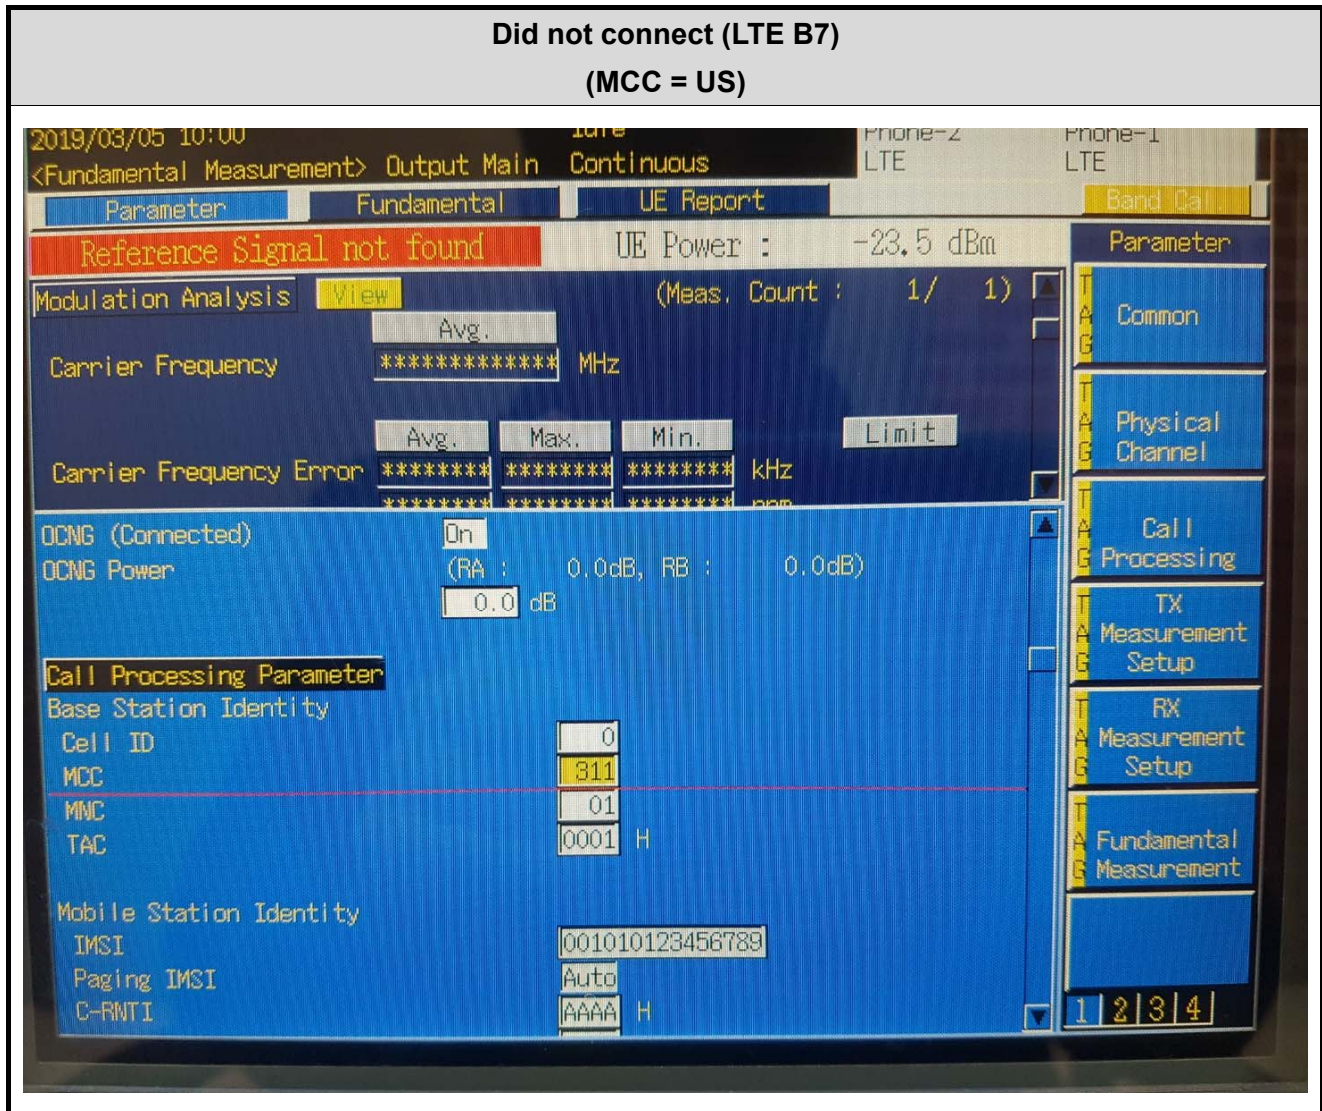


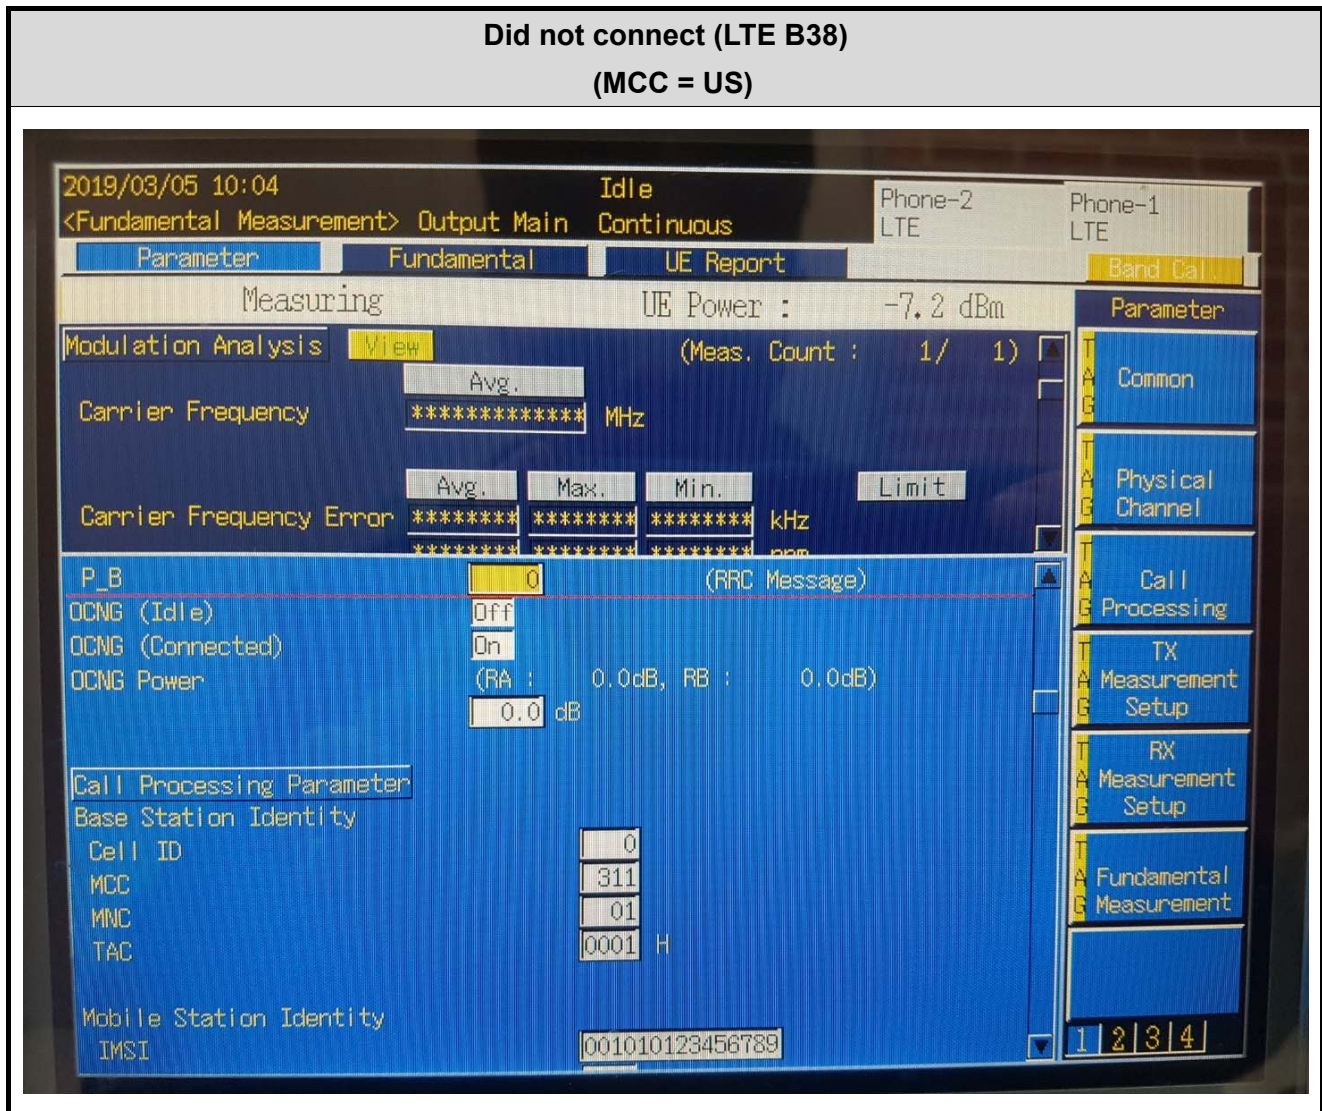

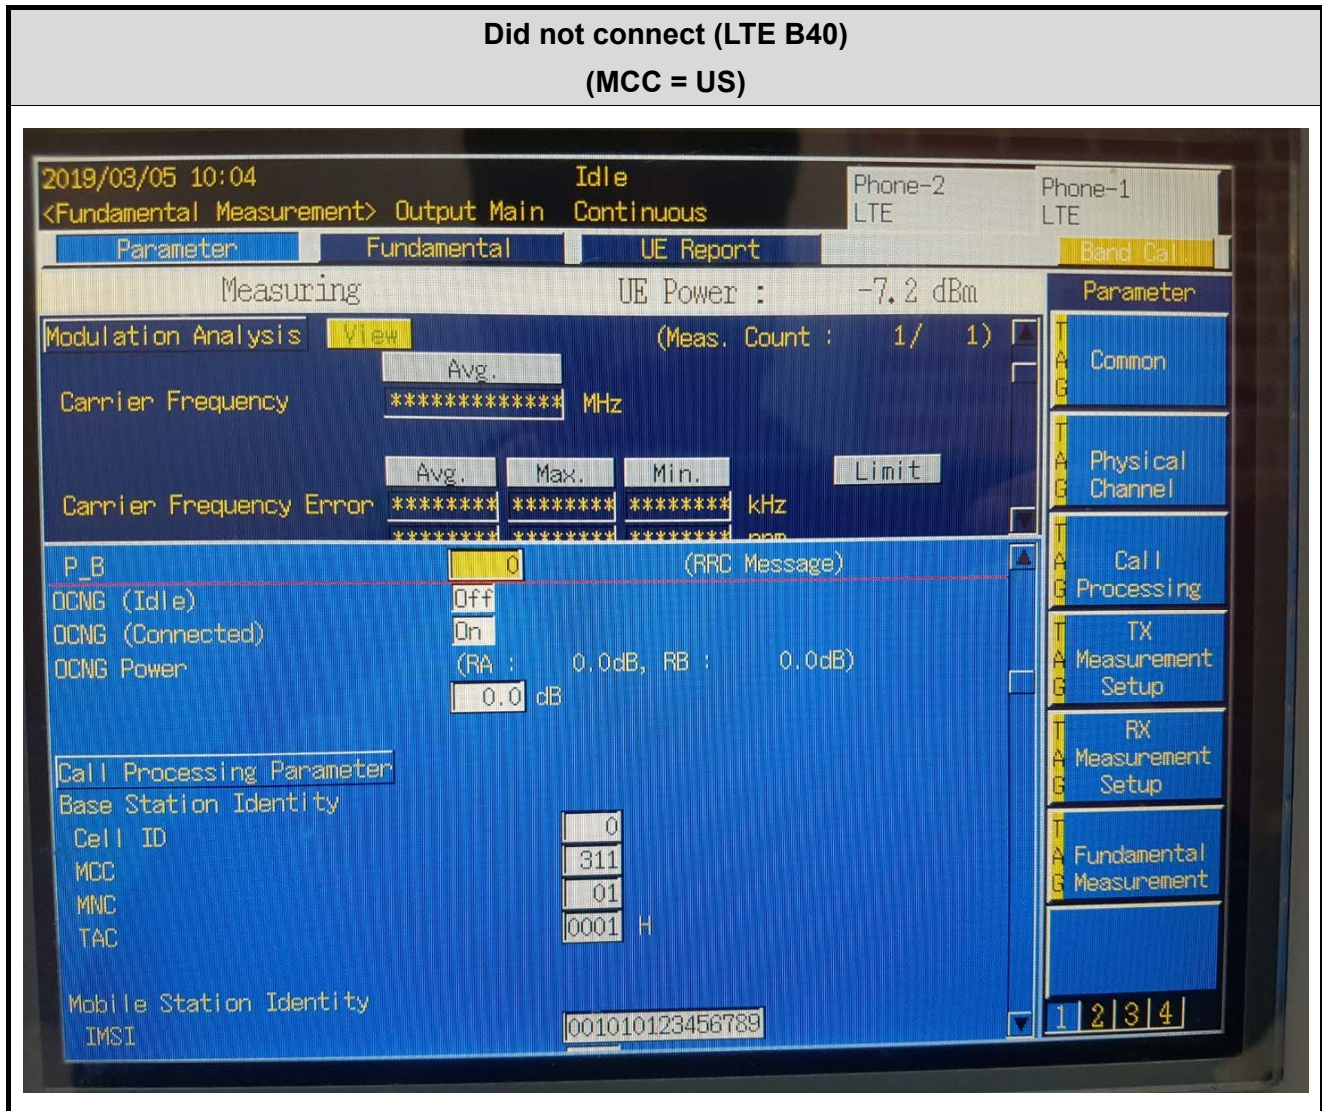


9. TEST PLOTS


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 QPSK_RB6_0)

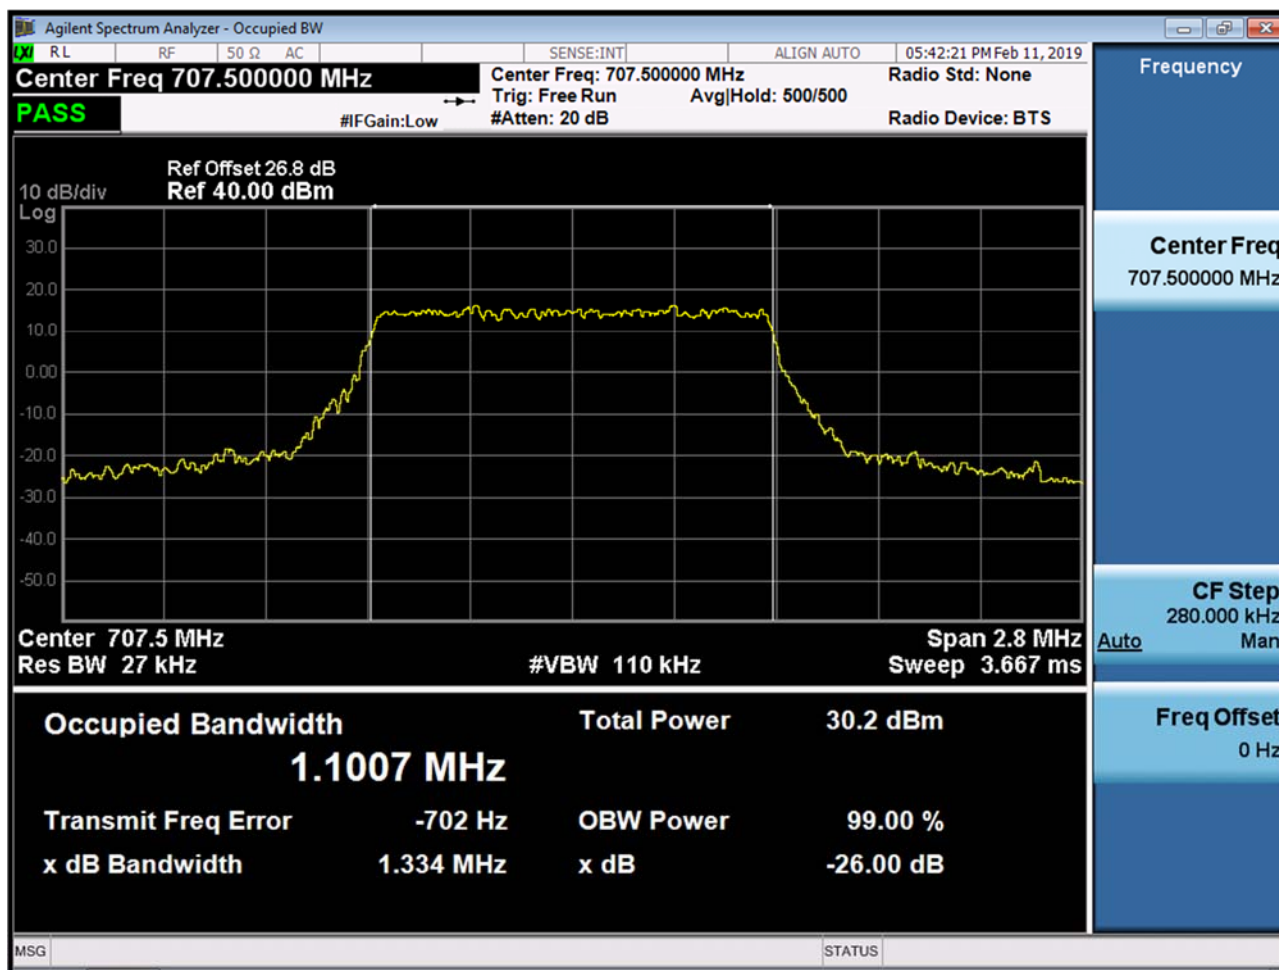


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 16QAM_RB6_0)

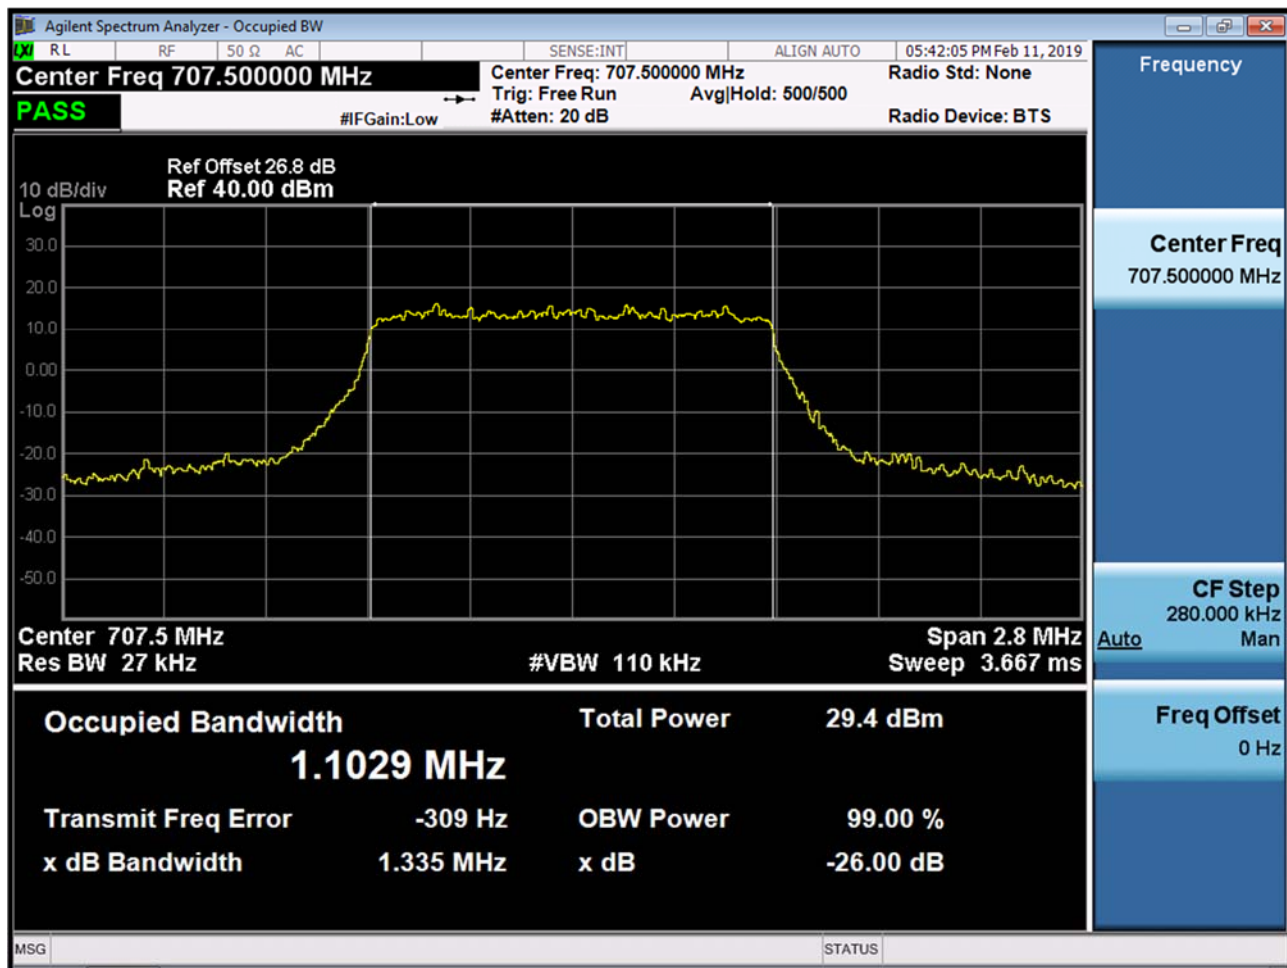


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 QPSK_RB15_0)

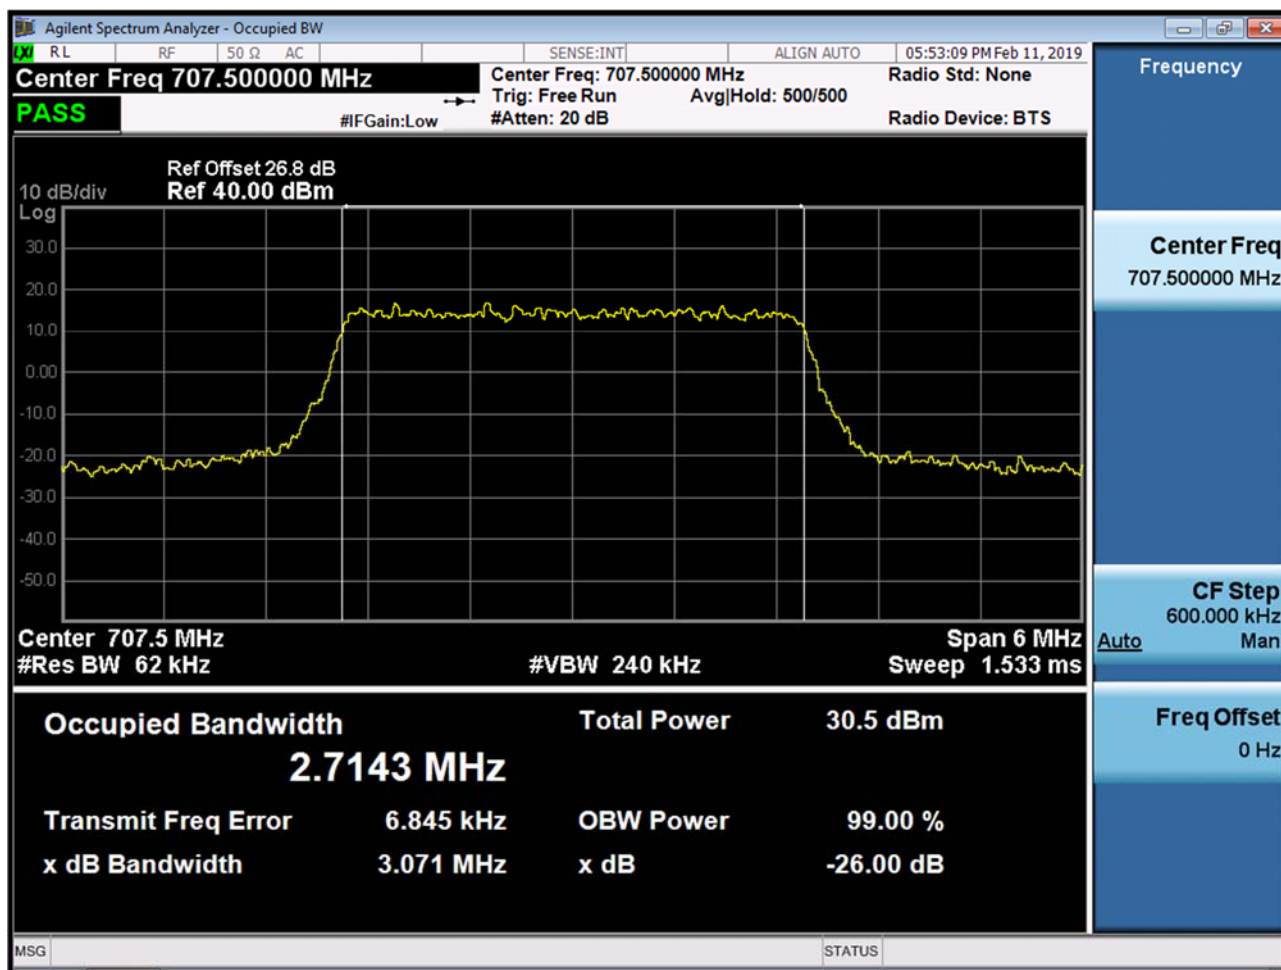


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 16QAM_RB15_0)

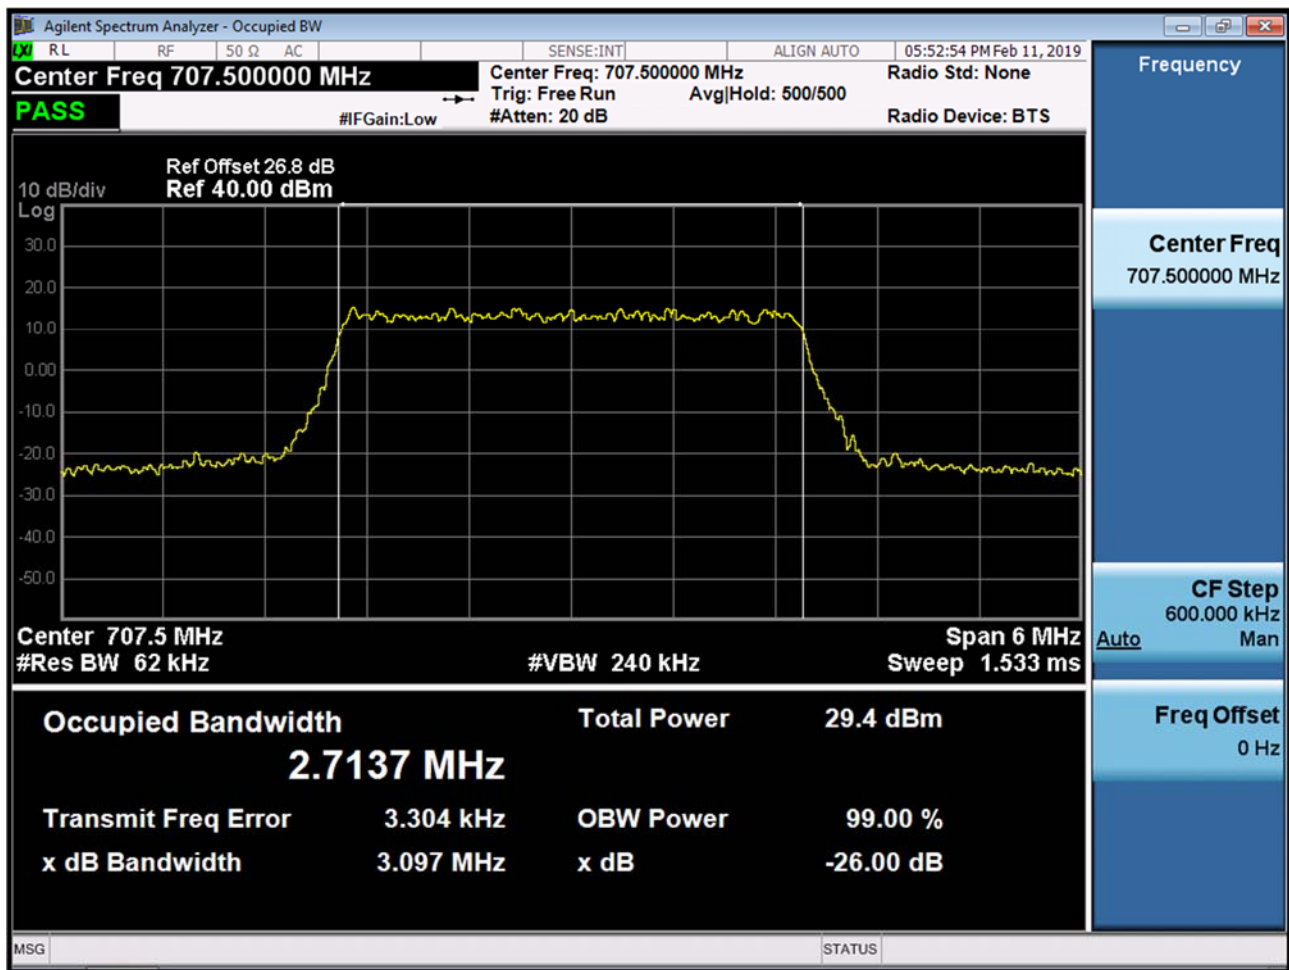


BAND 12/17. Occupied Bandwidth Plot (5M BW Ch.23795 QPSK_RB25_0)

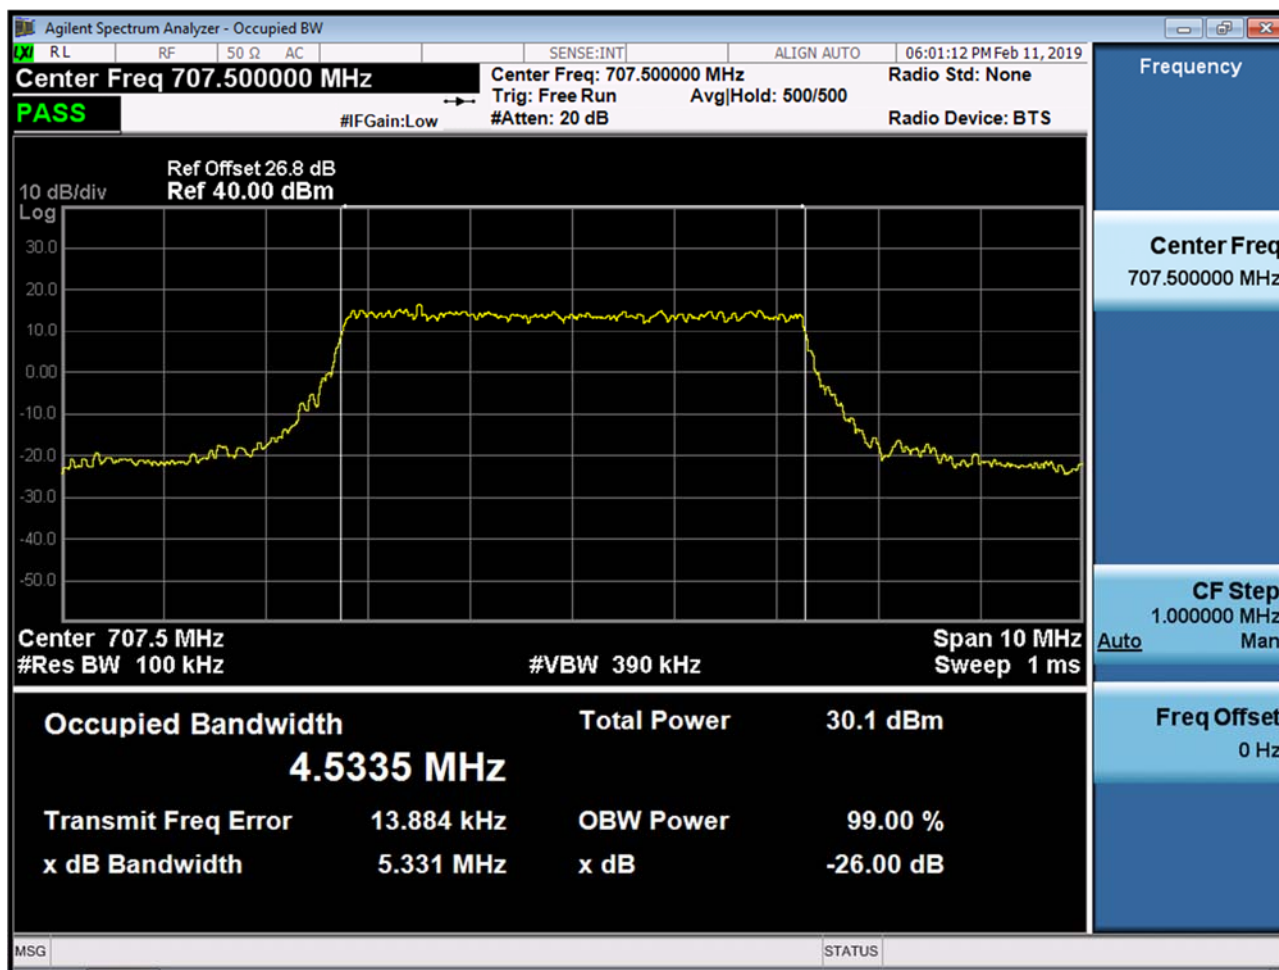


BAND 12/17. Occupied Bandwidth Plot (5M BW Ch.23795 16QAM_RB25_0)

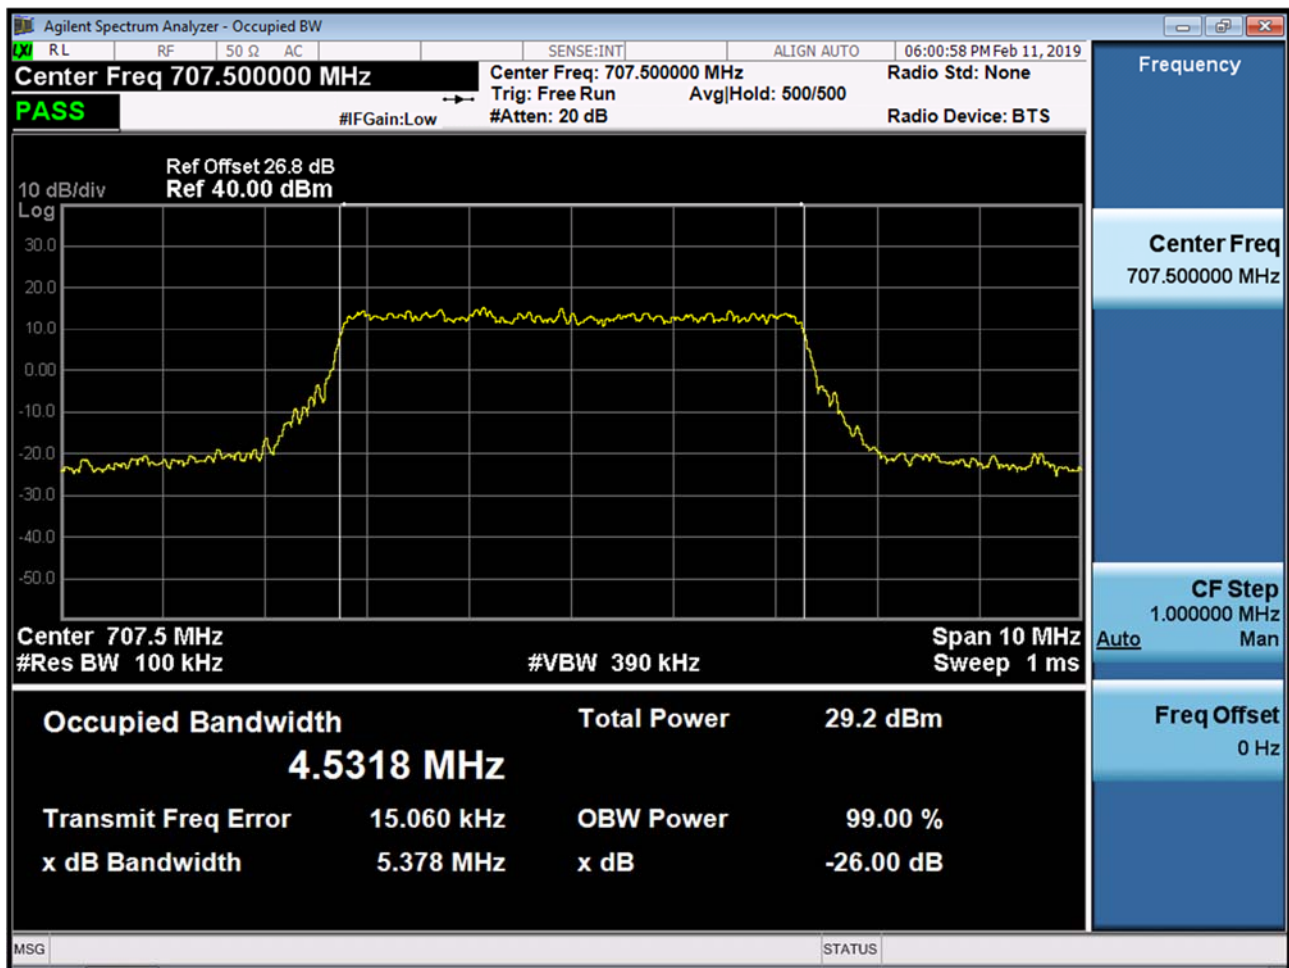

BAND 12/17. Occupied Bandwidth Plot (10M BW Ch.23795 QPSK_RB50_0)

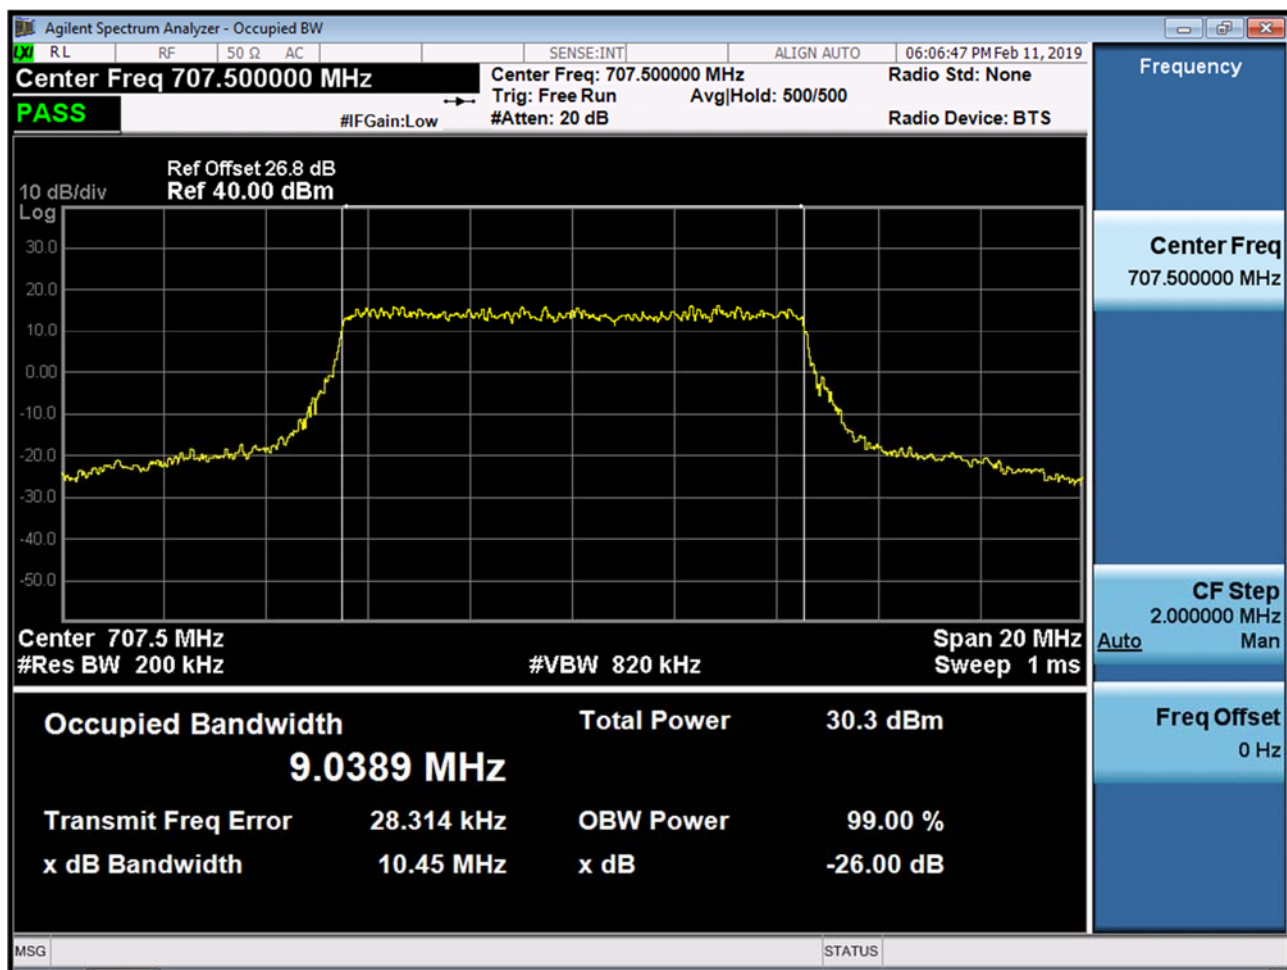

BAND 12/17. Occupied Bandwidth Plot (10M BW Ch.23795 16QAM_RB50_0)

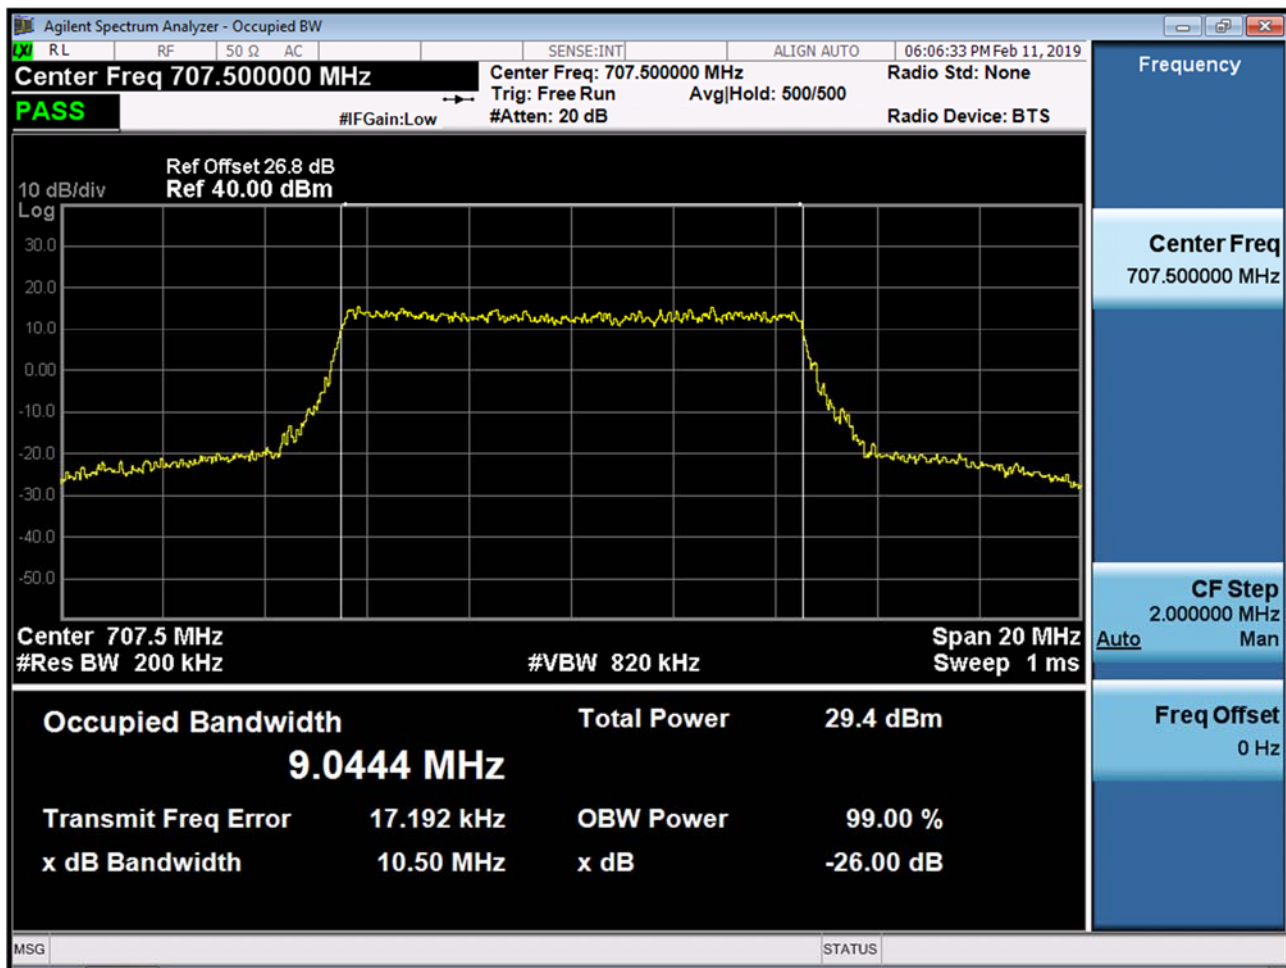

BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB1_Offset 0)



BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_Offset 0)



BAND 12. Lower Extended Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_0)



BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB1_Offset 0)



BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB15_Offset 0)



BAND 12. Lower Extended Band Edge Plot (3M BW Ch.23025 QPSK_RB15_0)



BAND 12/17. Lower Band Edge Plot (5M BW Ch.23755 QPSK_RB1_Offset 0)



BAND 12/17. Lower Band Edge Plot (5M BW Ch.23755 QPSK_RB25_Offset 0)




BAND 12/17. Lower Extended Band Edge Plot (5M BW Ch.23755 QPSK_RB25_0)



BAND 12/17. Lower Band Edge Plot (10M BW Ch.23780 QPSK_RB1_Offset 0)



BAND 12/17. Lower Band Edge Plot (10M BW Ch.23780 QPSK_RB50_Offset 0)

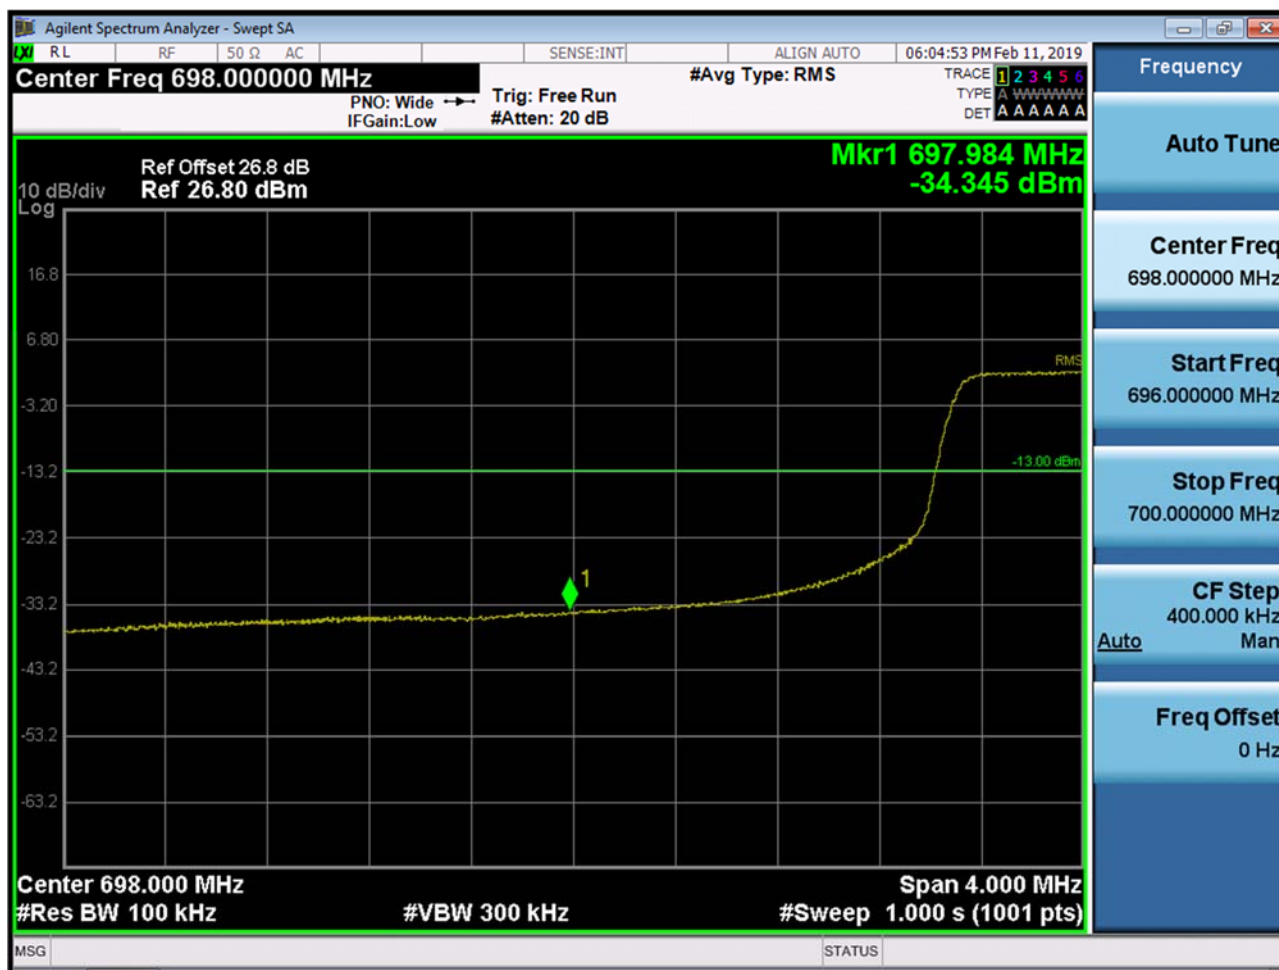

BAND 12/17. Lower Extended Band Edge Plot (10M BW Ch.23780 QPSK_RB50_0)



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB1_Offset 5)-1

