

TEST REPORT

FCC 2G3G Test for SM-T727V
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-1905-FC032-R1

DATE OF ISSUE
28 May 2019

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC 2G3G Test for
SM-T727V

REPORT NO.

HCT-RF-1905-FC032-R1

DATE OF ISSUE

28 May 2019

Other ID

FCC: A3LSMT727V

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Eut Type Model Name

Tablet
SM-T727

Date of Receipt

May 03, 2019

FCC Rule Part(s)

§ 22, § 24, § 2

FCC Classification

PCS Licensed Transmitter (PCB)

Manufacturer

SAMSUNG Electronics Co., Ltd.

Tested by
Kwon Jeong

Technical Manager
Jong Seok Lee

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 28, 2019	Initial Release
1	June 13, 2019	Revised the Description of EUT

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

CONTENTS

1. GENERAL INFORMATION	6
1.1. MAXIMUM OUTPUT POWER	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER	10
3.3 RADIATED SPURIOUS EMISSIONS	12
3.4 PEAK- TO- AVERAGE RATIO	13
3.5 OCCUPIED BANDWIDTH.	16
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	18
3.7 BAND EDGE	20
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	22
3.9 WORST CASE(CONDUCTED TEST)	24
3.10 WORST CASE(RADIATED TEST)	25
4. LIST OF TEST EQUIPMENT	26
5. MEASUREMENT UNCERTAINTY	27
6. SUMMARY OF TEST RESULTS	28
6.1 Test Condition : Conducted Test	28
6.2 Test Condition : Radiated Test	28
7. SAMPLE CALCULATION	29
7.1 ERP Sample Calculation	29
7.2 EIRP Sample Calculation	30
7.3. Emission Designator	31
8. TEST DATA	32
8.1 EFFECTIVE RADIATED POWER	32
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	33
8.3 RADIATED SPURIOUS EMISSIONS	34
8.4 PEAK-TO-AVERAGE RATIO	36
8.5 OCCUPIED BANDWIDTH	37
8.6 CONDUCTED SPURIOUS EMISSIONS	38
8.7 BAND EDGE	38
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	39
9. TEST PLOTS	43

10. ANNEX A_ TEST SETUP PHOTO	68
11. ANNEX B_ EMI TEST RESULT	69

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMT727V
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 22, § 24, § 2
EUT Type:	Tablet
Model(s):	SM-T727V
Keyboard Information	Model : EJ-FT720 Manufacture: SAMSUNG
Charging Doc Information	Model : EE-D3200 Manufacture: SAMSUNG
Ear-jack Information	Model : EHS64AVFWE Manufacture: ALMUS
Tx Frequency:	826.40 - 846.60 MHz (WCDMA850) 1 852.4 - 1 907.6 MHz (WCDMA1900)
Rx Frequency:	871.40 - 891.60 MHz (WCDMA850) 1 932.4 - 1 987.6 MHz (WCDMA1900)
Date(s) of Tests:	May 03, 2019 ~ May 28, 2019

1.1. MAXIMUM OUTPUT POWER

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.105	20.23

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M15F9W	0.184	22.64

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), ANT+, Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps.
10. The trace was allowed to stabilize.

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution

antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization.

the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat

3.4 PEAK- TO- AVERAGE RATIO

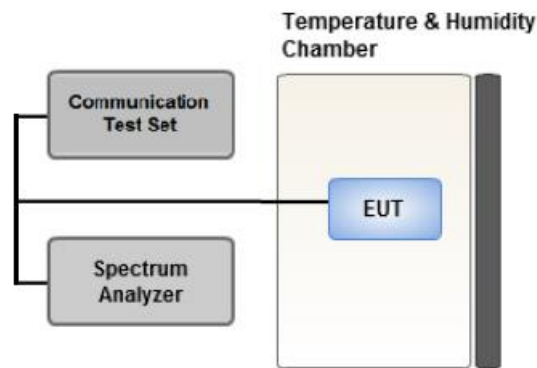

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average

power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a $VBW \geq 3 \times RBW$.


1. Set the $RBW \geq OBW$.
2. Set $VBW \geq 3 \times RBW$.
3. Set span $\geq 2 \times OBW$.
4. Sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})$.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set $RBW \geq OBW$.
3. Set $VBW \geq 3 \times RBW$.
4. Set number of measurement points in sweep $\geq 2 \times \text{span} / RBW$.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)

9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

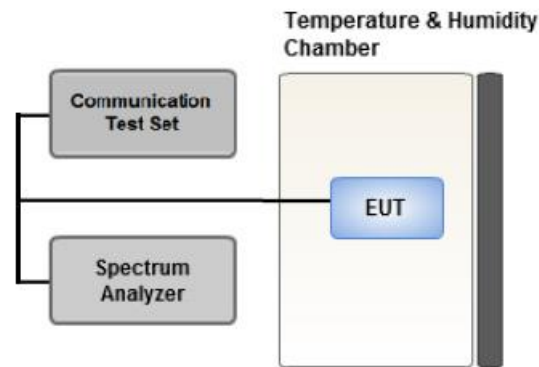

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak

5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within
1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

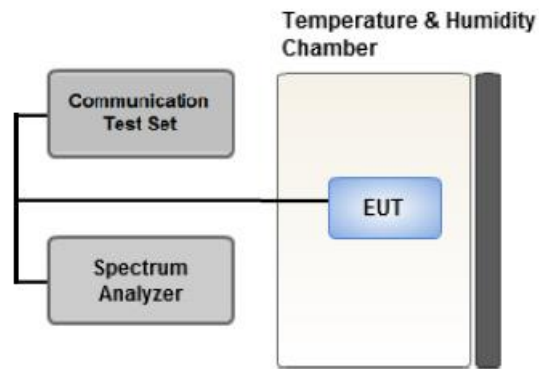

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.7 BAND EDGE

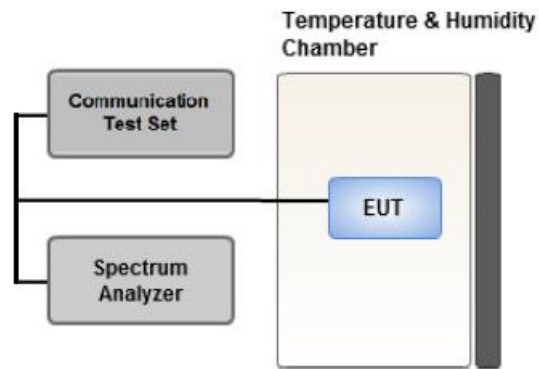

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple

9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

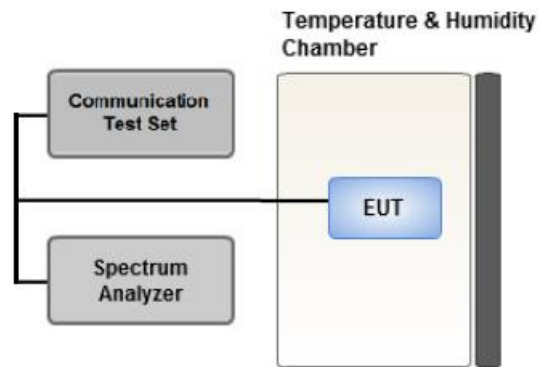

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	3G : QPSK	Low, Mid, High
Peak-To-Average Ratio	3G : QPSK	Mid
Band Edge	3G : QPSK	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	3G : QPSK	Low, Mid, High

[Test Channel]

	UplinkChannel	
	3G (WCDMA B2)	3G (WCDMA B5)
Low	9262	4132
Mid	9400	4183
High	9538	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
 - Please refer to the table below.
 - SM-T727V with Stand alone, Keyboard, Ear-jack and Charging pad were tested and the worst case results are reported.
- (Worst case : Stand alone)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Y WCDMA B5 : Z	Low, Mid, High

[Test Channel]

	UplinkChannel	
	3G (WCDMA B2)	3G (WCDMA B5)
Low	9262	4132
Mid	9400	4183
High	9538	4233

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/16/2019	Annual	04/16/2020
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/02/2019	Annual	04/02/2020
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/02/2019	Annual	04/02/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	MY40004326	07/05/2018	Annual	07/05/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	E
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a), § 24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS
	§ 24.235	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§ 24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a), § 24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measure d Level (dBm)	Substitut e LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq. (MHz)						W	W	dBm
WCDMA850	4132	826.4	-31.35	30.06	-10.26	0.86	H	< 7.00	0.078	18.94
	4183	836.6	-31.30	31.00	-10.21	0.87	H		0.098	19.92
	4233	846.6	-31.07	31.27	-10.17	0.87	H		0.105	20.23

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measure d Level (dBm)	Substitut e LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq. (MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-18.33	13.71	10.27	1.34	H	< 2.00	0.184	22.64
	9400	1880.0	-18.77	13.36	10.29	1.36	H		0.169	22.29
	9538	1907.6	-19.90	12.63	10.31	1.37	H		0.143	21.57

8.3 RADIATED SPURIOUS EMISSIONS

- MEASURED OUTPUT POWER: 20.23 dBm = 0.105 W
 ■ MODULATION SIGNAL: WCDMA850
 ■ DISTANCE: 3 meters
 ■ LIMIT: $43 + 10 \log_{10} (W) =$ 33.23 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4,132 (826.4)	1,652.80	-57.09	7.46	-65.98	1.27	V	-61.94	82.17
	2,479.20	-57.96	8.71	-64.33	1.60	H	-59.37	79.60
	3,305.60	-57.67	10.32	-63.70	1.87	V	-57.40	77.63
4,183 (836.6)	1,673.20	-58.17	7.53	-67.16	1.28	H	-63.06	83.28
	2,509.80	-57.83	8.83	-64.15	1.62	V	-59.09	79.32
	3,346.40	-57.70	10.51	-64.02	1.91	H	-57.57	77.80
4,233 (846.6)	1,693.20	-57.66	7.67	-66.69	1.28	H	-62.45	82.68
	2,539.80	-57.99	8.85	-63.77	1.61	V	-58.68	78.91
	3,386.40	-57.78	10.56	-64.06	1.93	V	-57.58	77.81

■ MEASURED OUTPUT POWER: 22.64 dBm = 0.184 W
 ■ MODULATION SIGNAL: WCDMA1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: $43 + 10 \log_{10} (W) =$ 35.64 dBc

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	dBc
9262 (1852.4)	3,704.80	-57.69	12.50	-64.32	1.99	H	-53.81	76.45
	5,557.20	-56.74	13.64	-57.98	2.71	H	-47.05	69.69
	7,409.60	-57.70	11.50	-52.41	2.93	H	-43.84	66.48
9400 (1880.0)	3,760.00	-57.28	12.40	-63.72	2.00	V	-53.32	75.96
	5,640.00	-50.18	13.78	-51.01	2.70	H	-39.93	62.57
	7,520.00	-58.35	11.57	-53.14	2.93	V	-44.50	67.14
9538 (1907.6)	3,815.20	-57.86	12.52	-64.23	2.06	H	-53.76	76.40
	5,722.80	-48.41	13.70	-48.10	2.72	H	-37.12	59.76
	7,630.40	-58.02	11.95	-53.21	2.98	H	-44.24	66.87

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail	
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)				
WCDMA1900	9400	CCDF Procedure						3.06	13	Pass

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 50.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \log (1/x), \quad x = Tx_{On} / Tx_{Total}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
WCDMA850	4132	826.40	4.1625
	4183	836.60	4.1421
	4233	846.60	4.1665
WCDMA1900	9262	1852.40	4.1526
	9400	1880.00	4.1349
	9538	1907.60	4.1436

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 44 ~ 49.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
WCDMA 850	4132	3.7005	27.976	-77.086	-49.110	-13.00
	4183	3.6975	27.976	-77.062	-49.086	
	4233	2.5434	27.976	-75.870	-47.894	
WCDMA 1900	9262	18.9290	29.489	-72.781	-43.292	
	9400	18.9207	29.489	-73.022	-43.533	
	9538	18.9210	29.489	-72.771	-43.282	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 59 ~67.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 51 ~ 58.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


Mode:	WCDMA850
OPERATING FREQUENCY:	836,600,000 Hz
CHANNEL:	4183
REFERENCE VOLTAGE:	3.85 VDC
DEVIATION LIMIT:	$\pm 0.00025\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 599 999	0.0	0.000 000	0.0000
100%		-30	836 599 998	-1.4	0.000 000	-0.0017
100%		-20	836 599 997	-1.5	0.000 000	-0.0018
100%		-10	836 599 997	-1.6	0.000 000	-0.0020
100%		0	836 599 998	-0.8	0.000 000	-0.0010
100%		+10	836 599 998	-1.3	0.000 000	-0.0015
100%		+30	836 599 998	-0.9	0.000 000	-0.0011
100%		+40	836 600 000	0.8	0.000 000	0.0009
100%		+50	836 599 998	-1.1	0.000 000	-0.0013
Batt. Endpoint	3.400	+20	836 599 997	-1.8	0.000 000	-0.0021

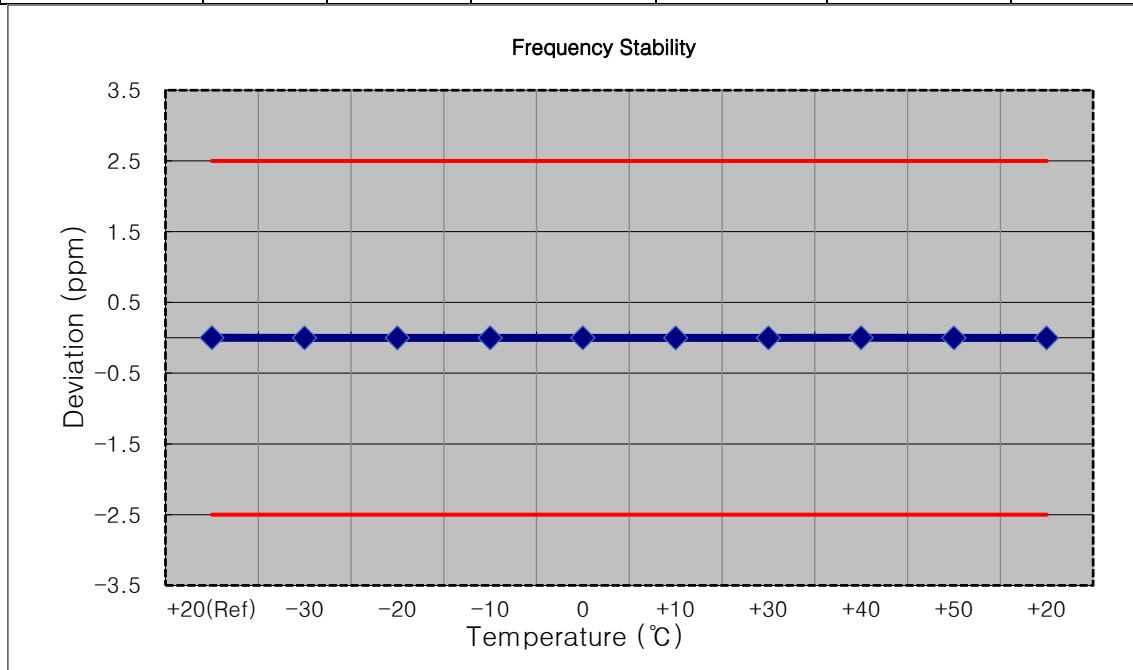


■ Mode: WCDMA1900
 ■ OPERATING FREQUENCY: 1,852,400,000 Hz
 ■ CHANNEL: 9262
 ■ REFERENCE VOLTAGE: 3.85 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1852 400 016	0.0	0.000 000	0.0000
100%		-30	1852 400 032	16.0	0.000 001	0.0086
100%		-20	1852 400 031	15.2	0.000 001	0.0082
100%		-10	1852 400 031	15.2	0.000 001	0.0082
100%		0	1852 400 032	16.0	0.000 001	0.0086
100%		+10	1852 400 031	15.8	0.000 001	0.0085
100%		+30	1852 400 030	14.4	0.000 001	0.0078
100%		+40	1852 400 030	14.6	0.000 001	0.0079
100%		+50	1852 400 031	15.6	0.000 001	0.0084
100%		+20	1852 400 030	14.7	0.000 001	0.0079
Batt. Endpoint	3.400	+20	1852 400 030	14.7	0.000 001	0.0079

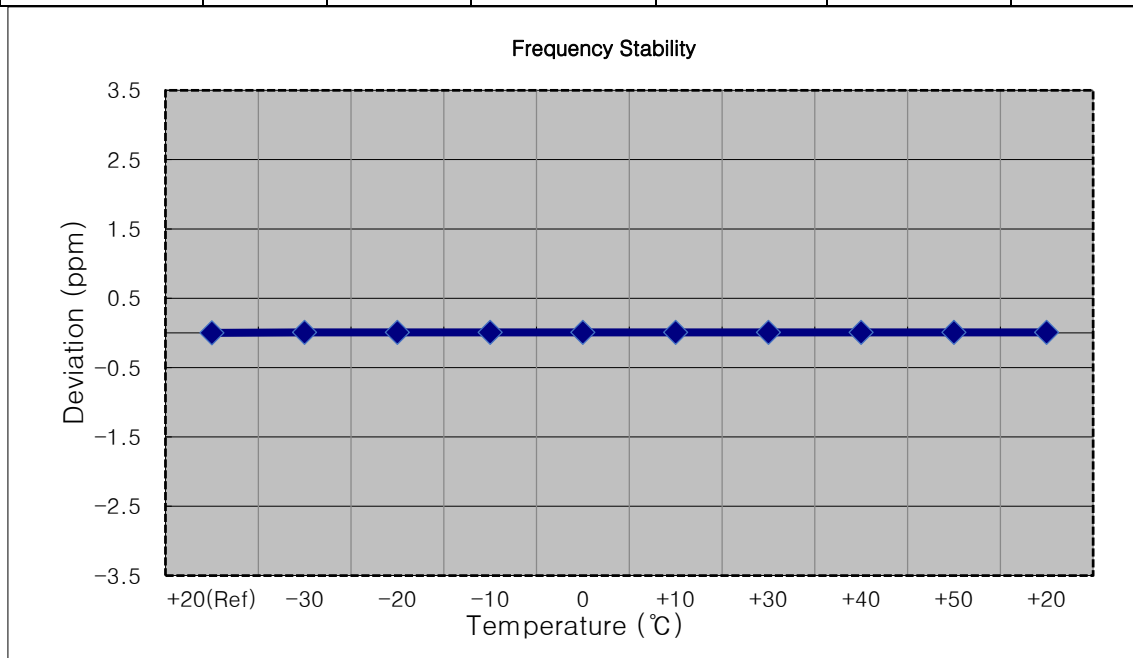


■ Mode: WCDMA1900
 ■ OPERATING FREQUENCY: 1,880,000,000 Hz
 ■ CHANNEL: 9400
 ■ REFERENCE VOLTAGE: 3.85 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1880 000 014	0.0	0.000 000	0.0000
100%		-30	1880 000 027	12.5	0.000 001	0.0066
100%		-20	1880 000 028	13.9	0.000 001	0.0074
100%		-10	1880 000 026	12.1	0.000 001	0.0064
100%		0	1880 000 027	12.4	0.000 001	0.0066
100%		+10	1880 000 027	13.1	0.000 001	0.0070
100%		+30	1880 000 028	14.3	0.000 001	0.0076
100%		+40	1880 000 027	12.5	0.000 001	0.0066
100%		+50	1880 000 027	13.0	0.000 001	0.0069
100%		+20	1880 000 027	13.3	0.000 001	0.0071
Batt. Endpoint	3.400	+20	1880 000 027	13.3	0.000 001	0.0071

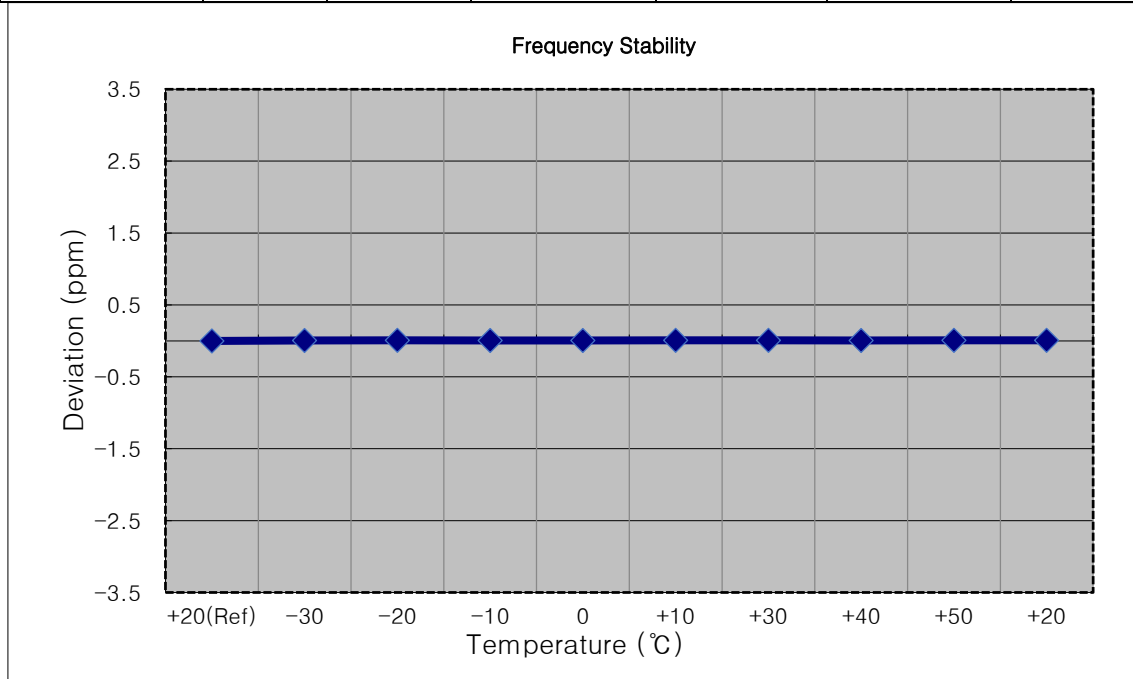


■ Mode: WCDMA1900
 ■ OPERATING FREQUENCY: 1,907,600,000 Hz
 ■ CHANNEL: 9538
 ■ REFERENCE VOLTAGE: 3.85 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1907 600 010	0.0	0.000 000	0.0000
100%		-30	1907 600 020	9.8	0.000 001	0.0052
100%		-20	1907 600 020	10.7	0.000 001	0.0056
100%		-10	1907 600 021	10.8	0.000 001	0.0057
100%		0	1907 600 020	9.9	0.000 001	0.0052
100%		+10	1907 600 020	10.6	0.000 001	0.0056
100%		+30	1907 600 020	9.8	0.000 001	0.0051
100%		+40	1907 600 020	10.2	0.000 001	0.0054
100%		+50	1907 600 019	9.6	0.000 001	0.0050
100%		+20	1907 600 020	10.0	0.000 001	0.0053
Batt. Endpoint	3.400	+20	1907 600 020	10.0	0.000 001	0.0053

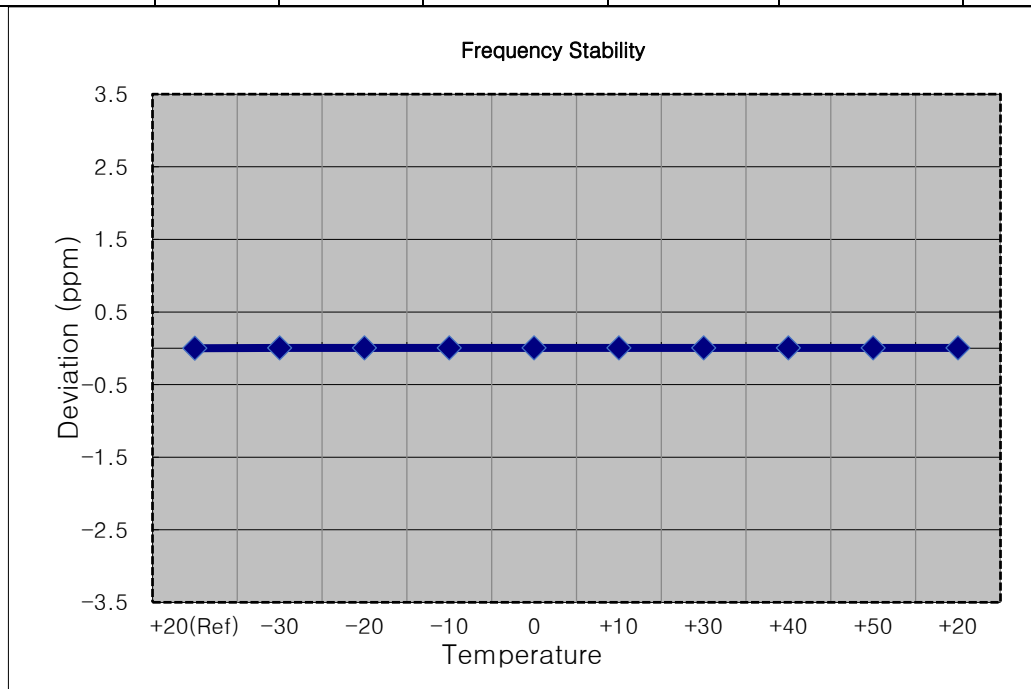


9. TEST PLOTS


WCDMA850 MODE (4132 CH.) Occupied Bandwidth

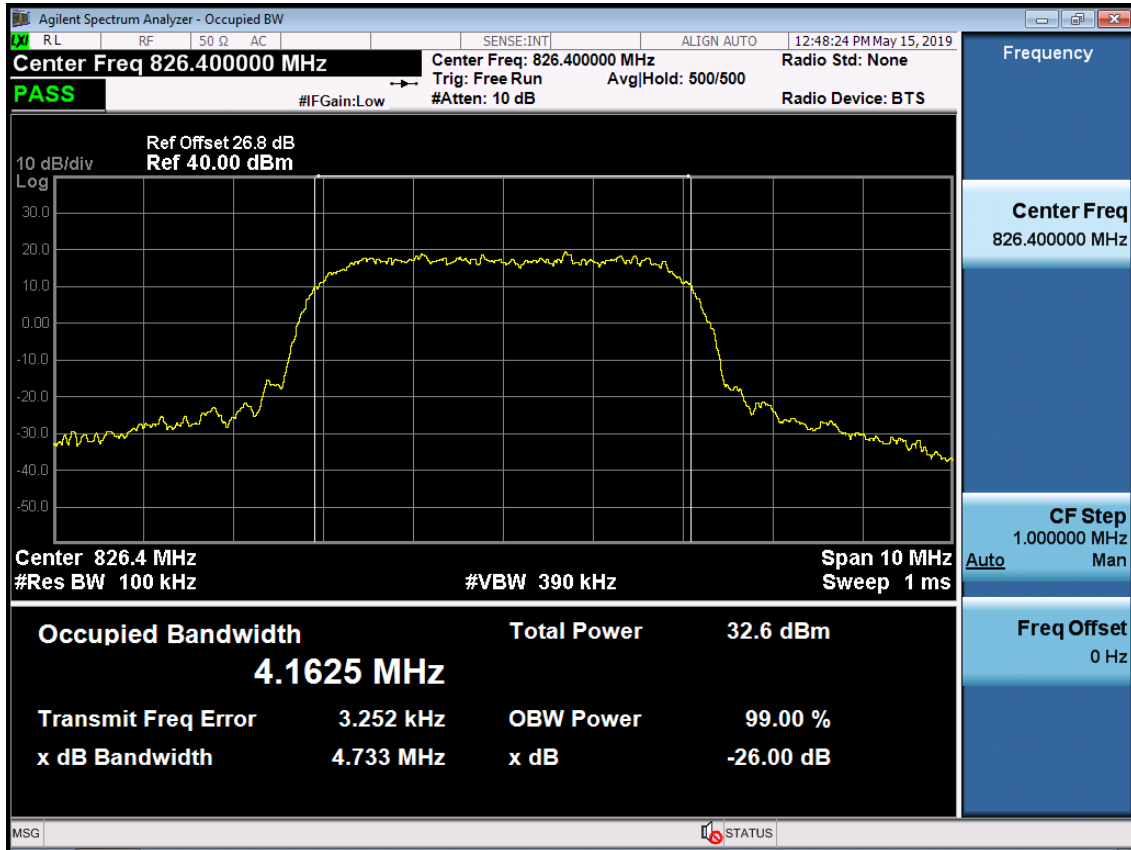


WCDMA850 MODE (4183 CH.) Occupied Bandwidth

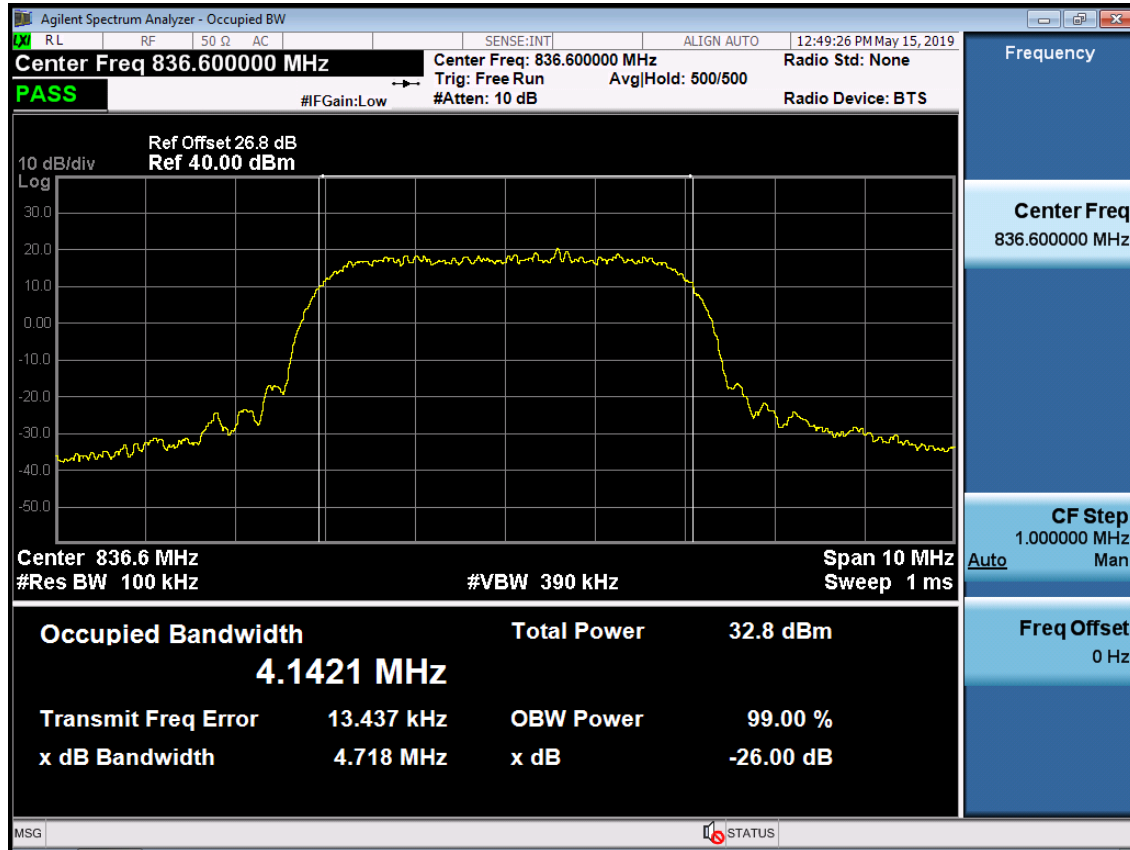


WCDMA850MODE (4233 CH.) Occupied Bandwidth

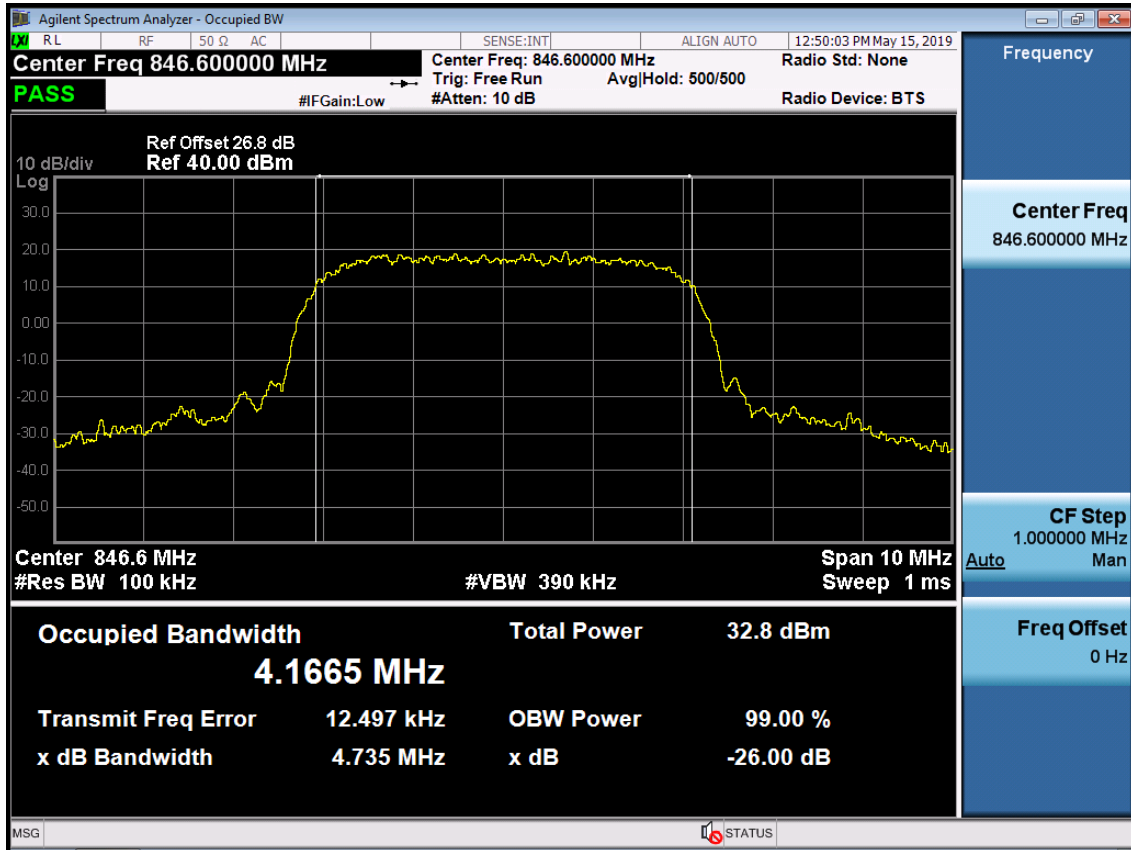


WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

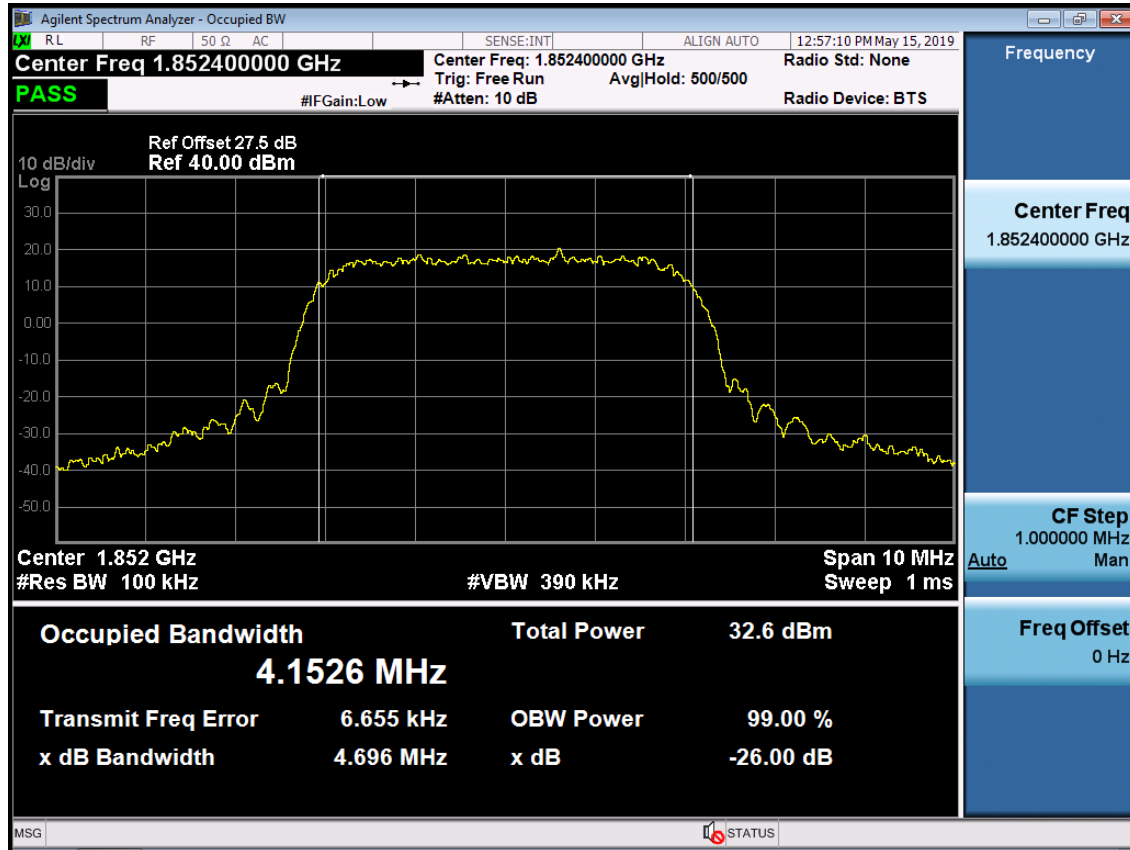


WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

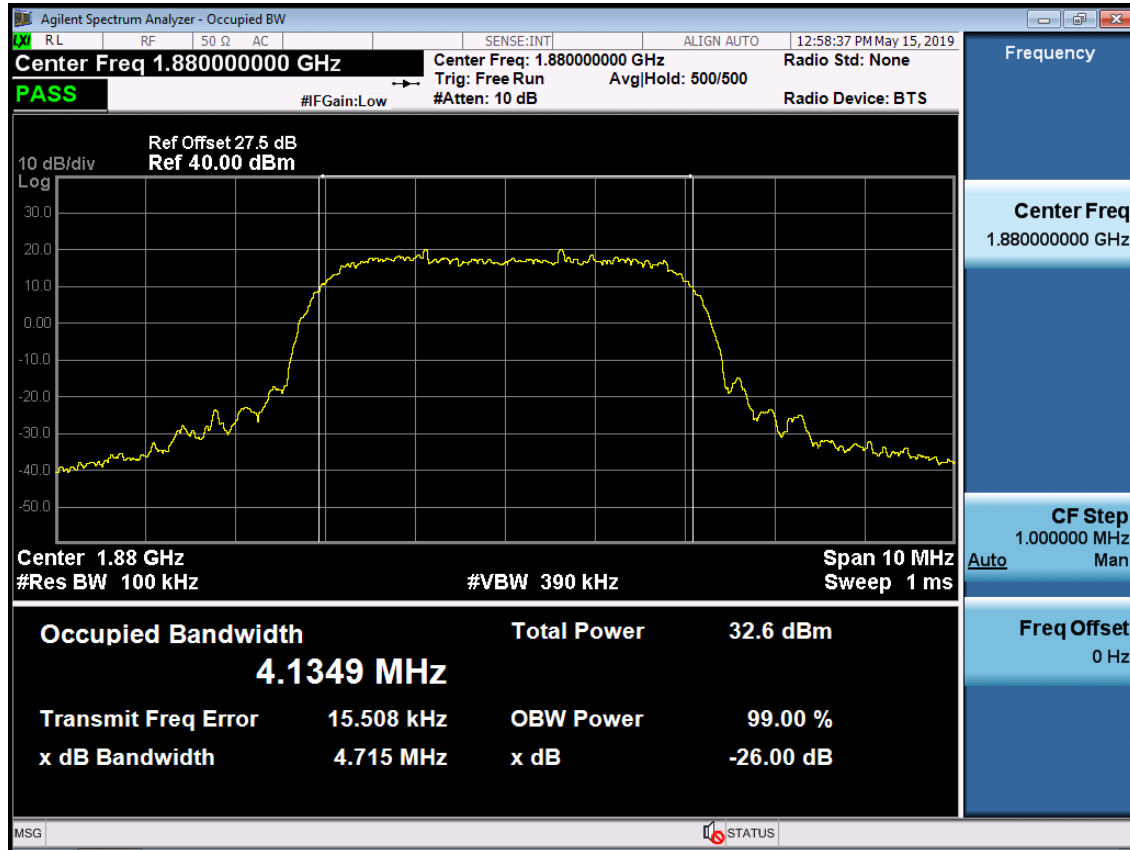


WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

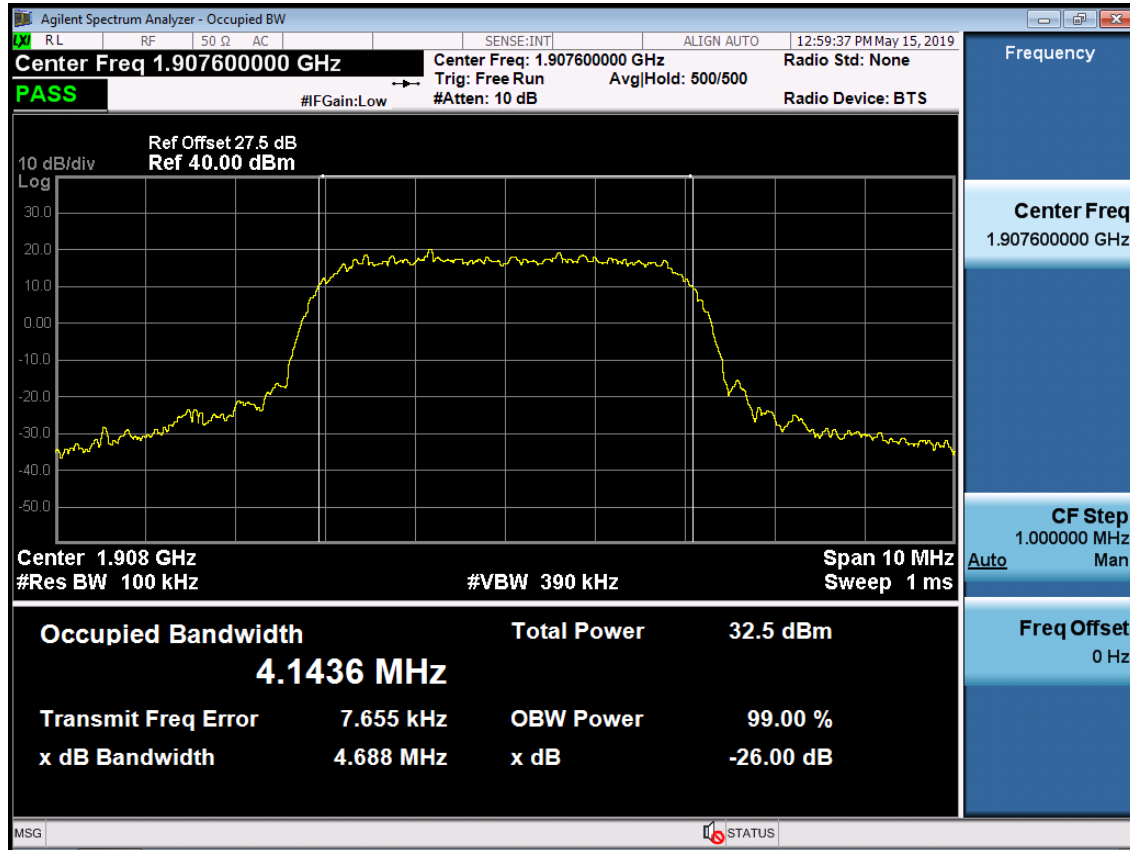

WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

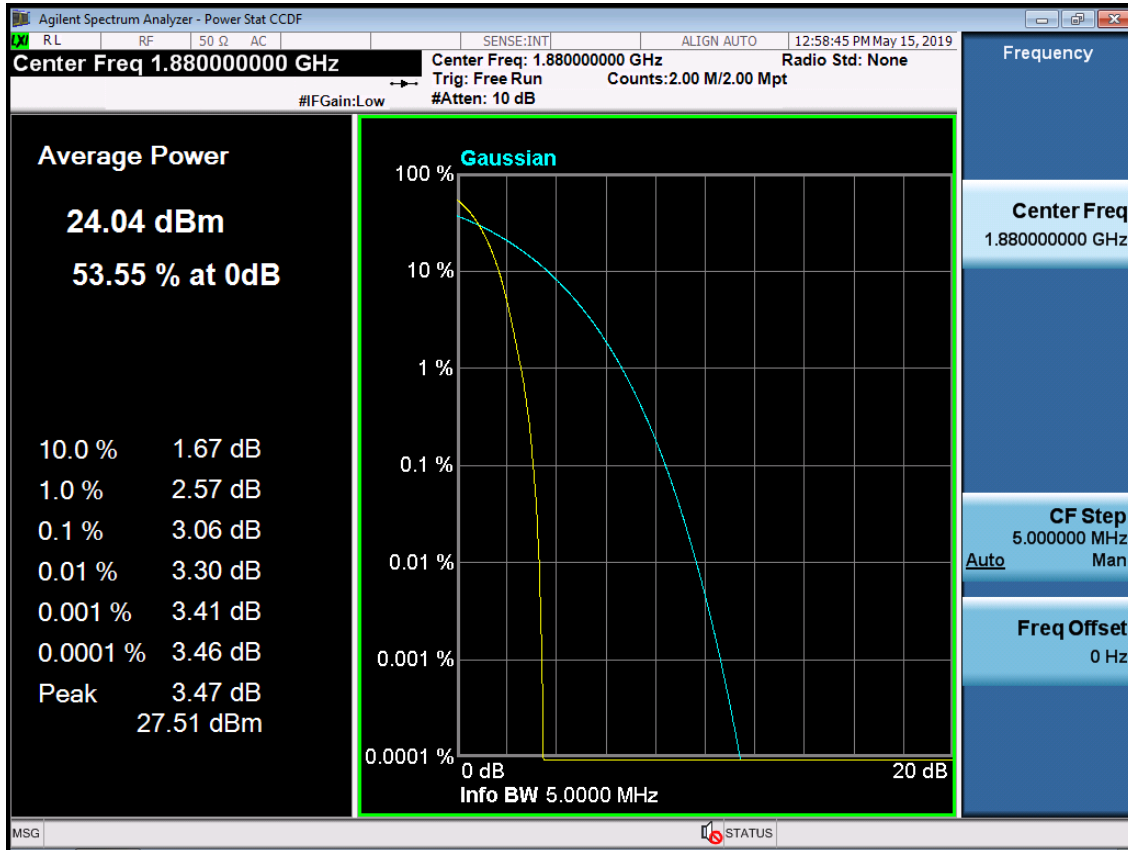

■ WCDMA850 MODE (4132 CH.) Block Edge

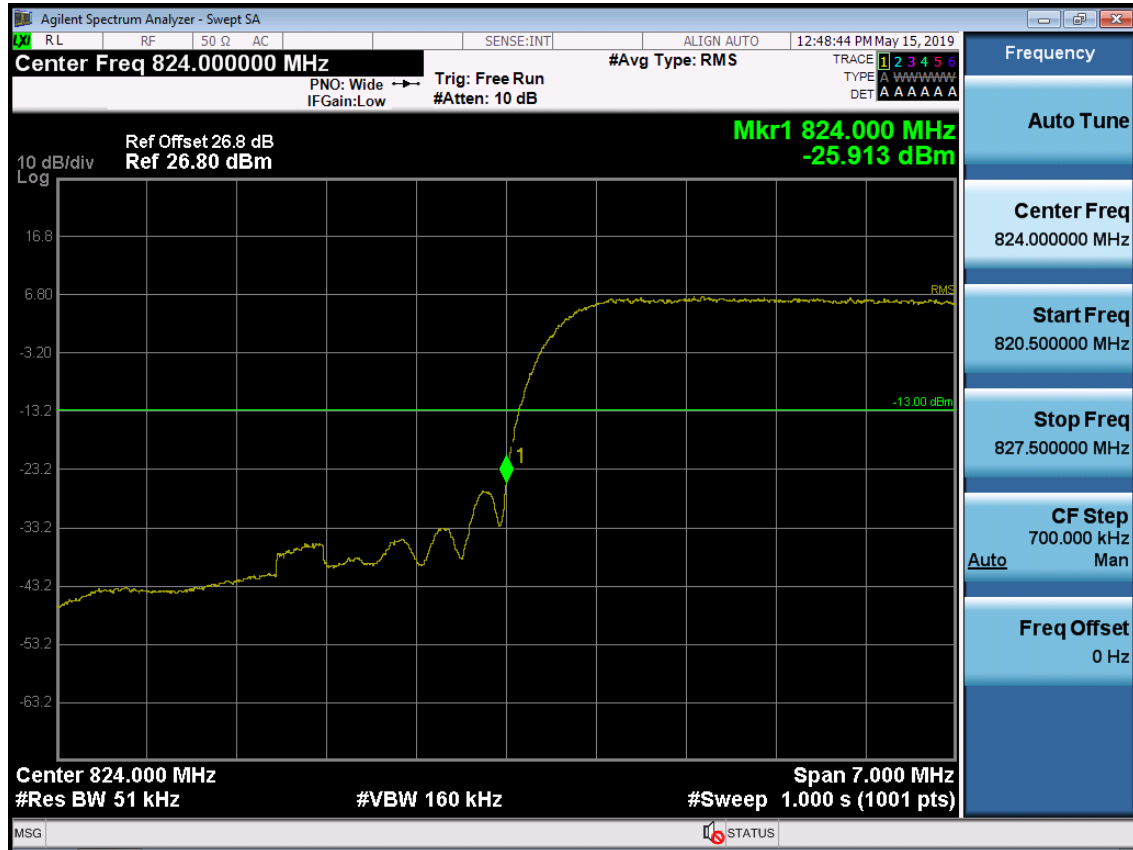

■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span




■ WCDMA1900 MODE (9538 CH.) Block Edge




■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span




■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

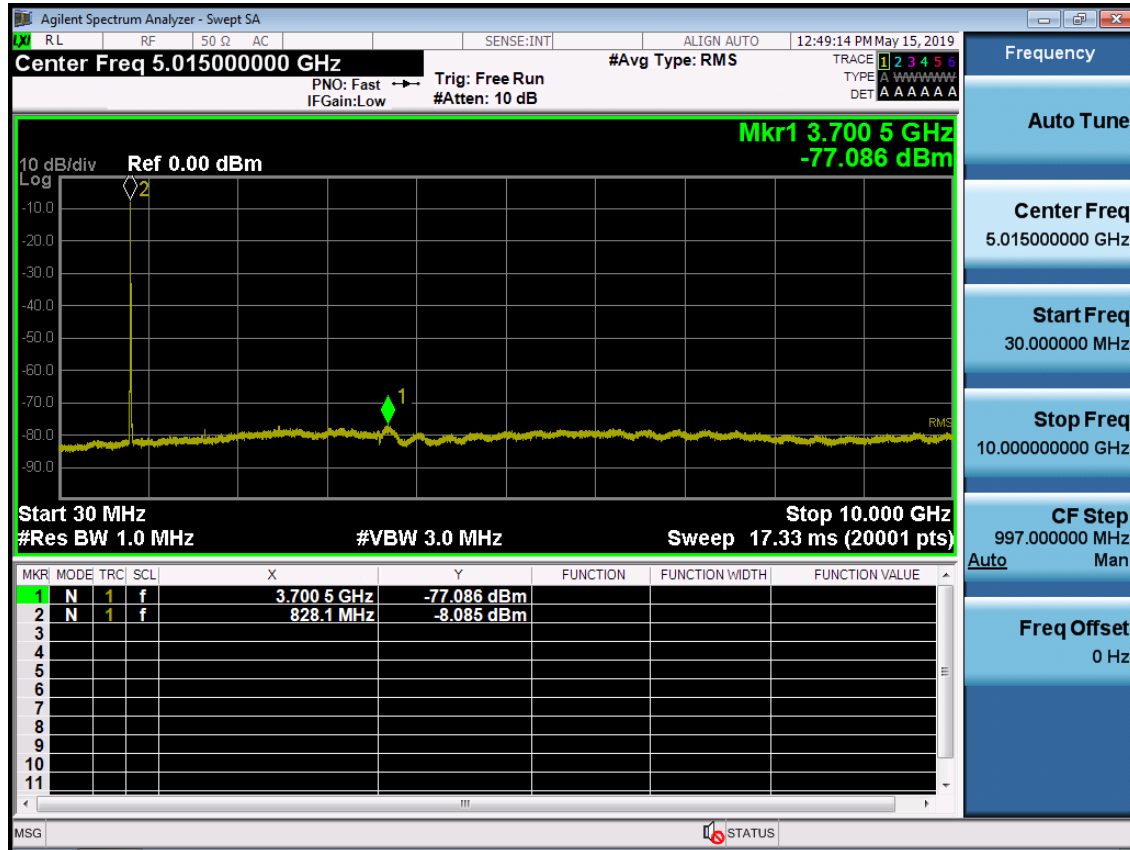


WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

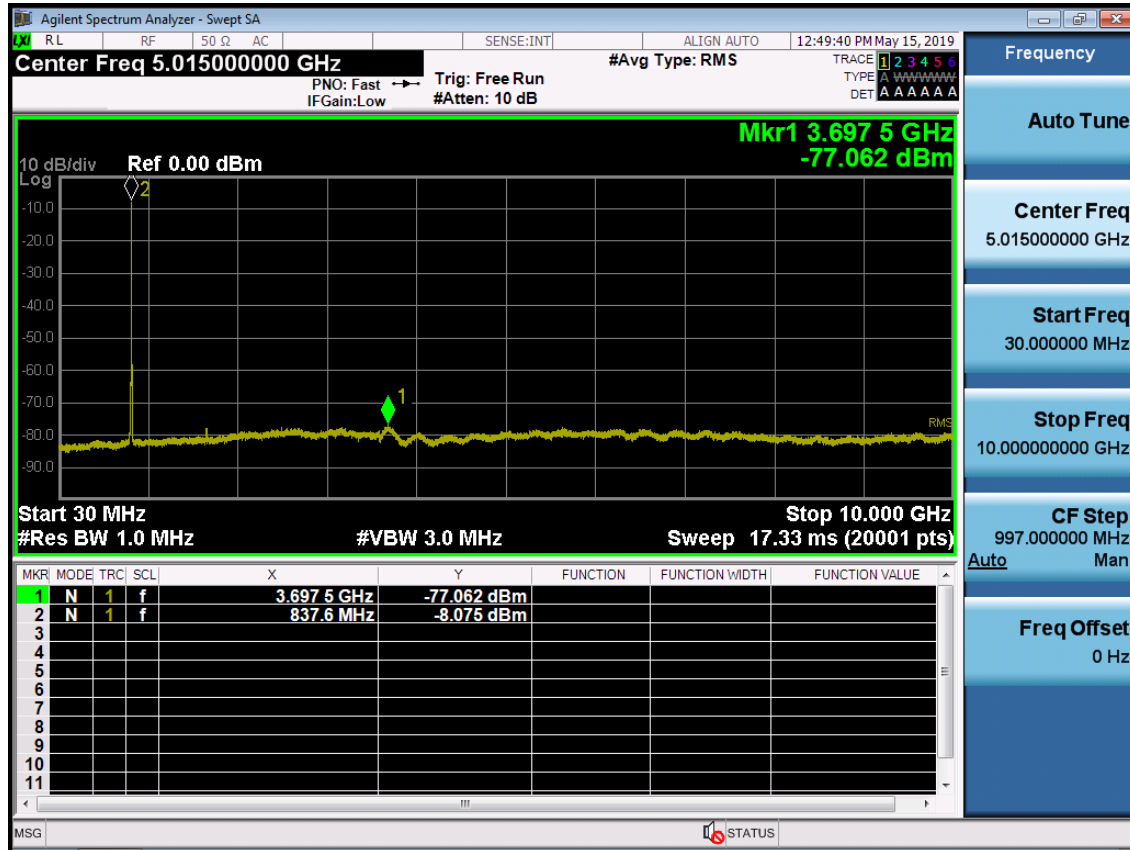

WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

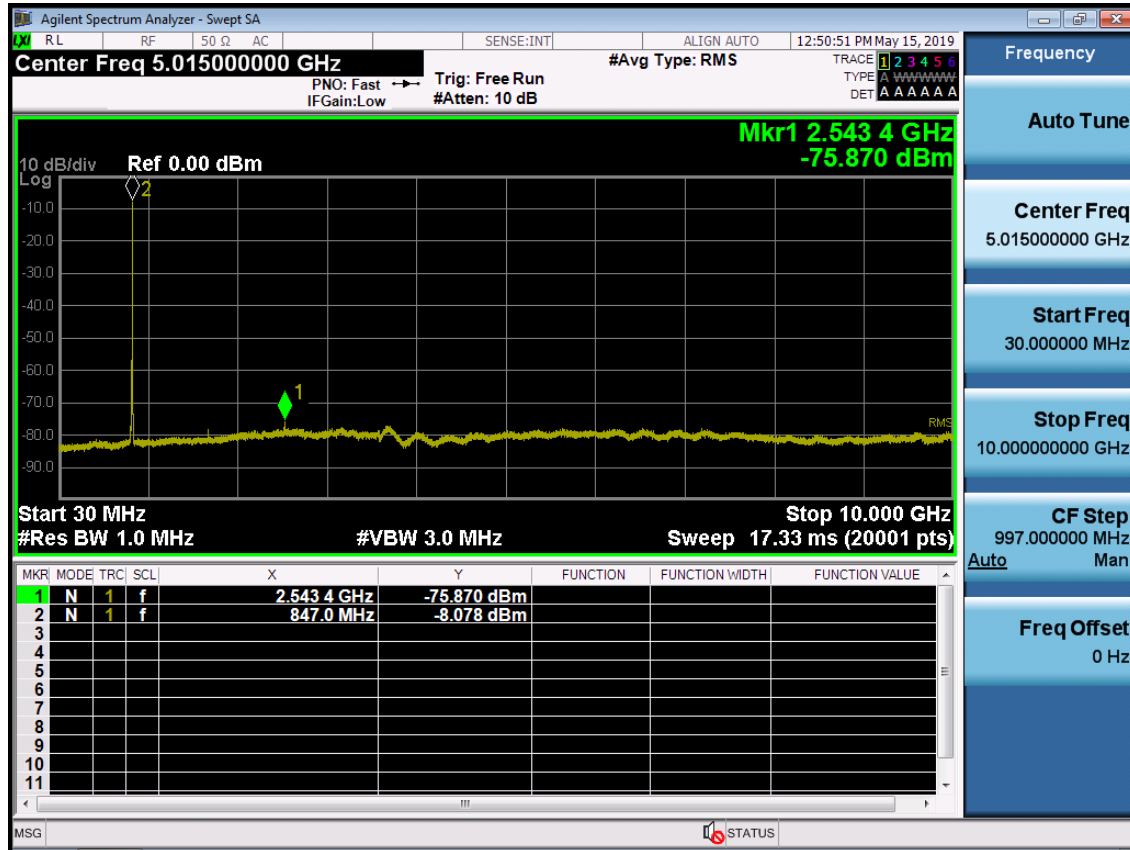


WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

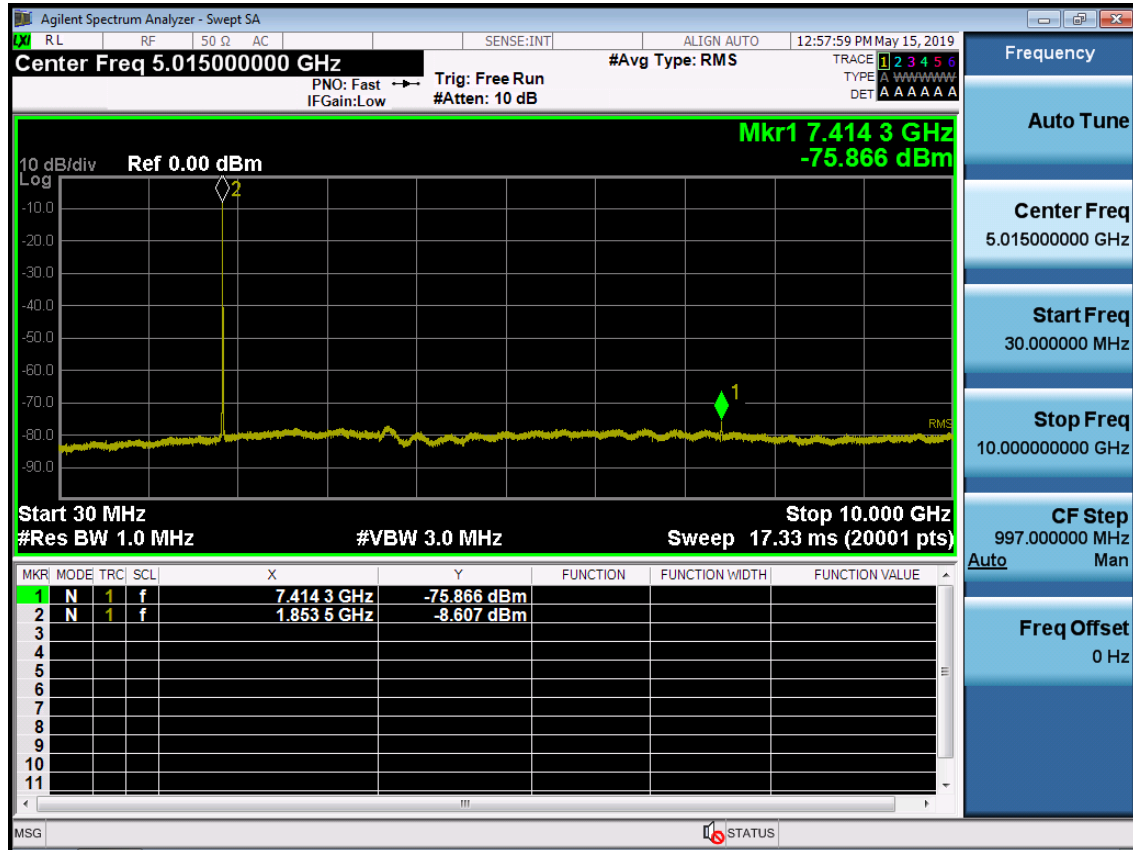

WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

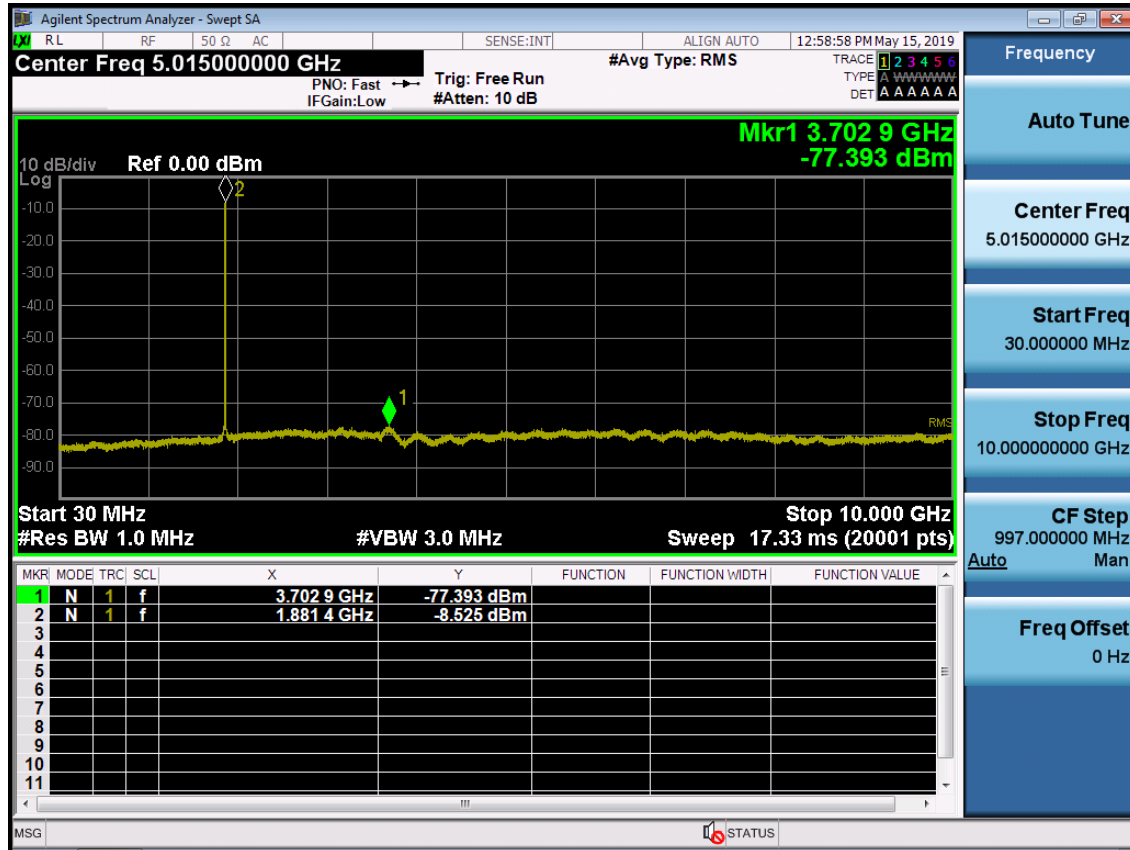

WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2



WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

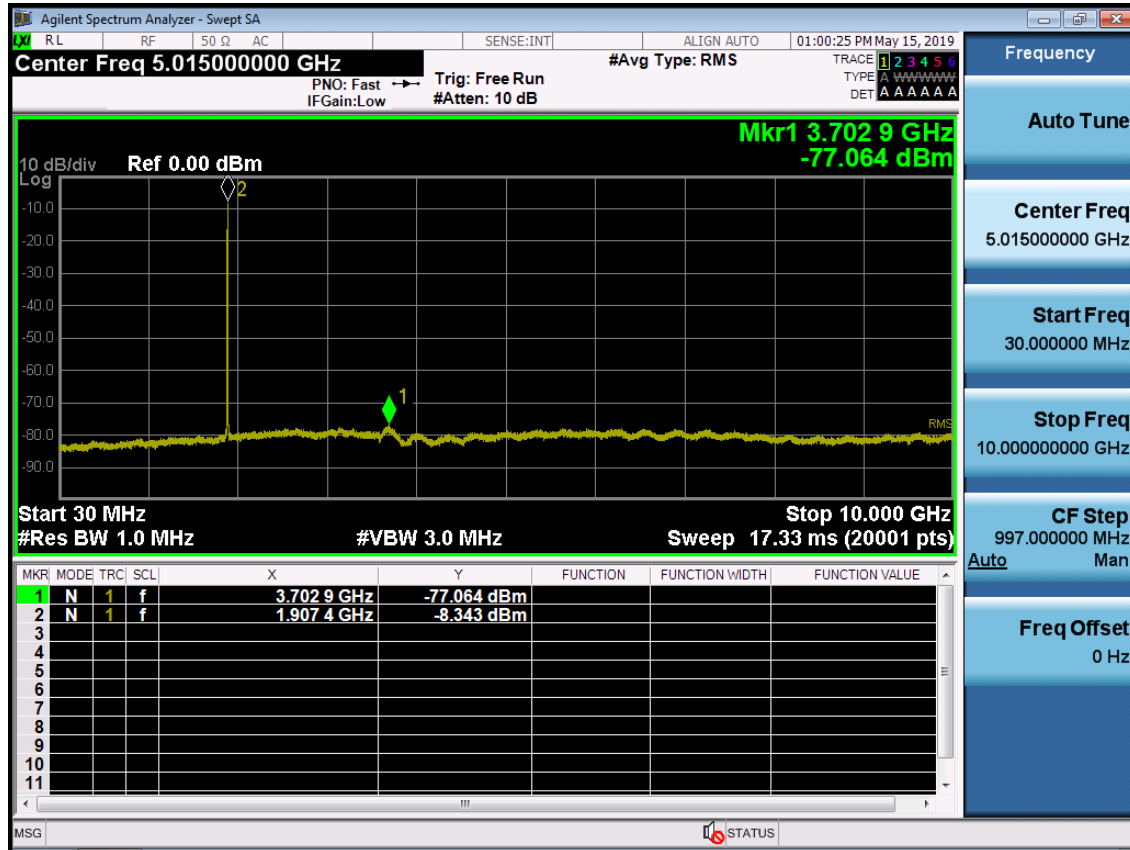

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1905-FC032-P

11. ANNEX B_ EMI TEST RESULT

EMI test result is described in Annex B. Please refer to Annex B