

FCC LTE REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: November 24, 2021
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-2111-FC047

FCC ID:	A3LSMX808U
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-X808U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band71 (5)	665.5 - 695.5	4M50G7D	QPSK	0.089	19.50
		4M52W7D	16QAM	0.075	18.75
		4M53W7D	64QAM	0.059	17.67
		4M52W7D	256QAM	0.029	14.55
LTE – Band71 (10)	668.0 - 693.0	8M99G7D	QPSK	0.094	19.72
		8M99W7D	16QAM	0.078	18.94
		9M00W7D	64QAM	0.061	17.88
		8M98W7D	256QAM	0.027	14.27
LTE – Band71 (15)	670.5 - 690.5	13M5G7D	QPSK	0.094	19.73
		13M5W7D	16QAM	0.077	18.88
		13M5W7D	64QAM	0.061	17.83
		13M5W7D	256QAM	0.028	14.53
LTE – Band71 (20)	673.0 - 688.0	17M9G7D	QPSK	0.089	19.51
		17M9W7D	16QAM	0.077	18.88
		17M9W7D	64QAM	0.059	17.71
		17M9W7D	256QAM	0.027	14.30

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2111-FC047

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2111-FC047	November 24, 2021	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 OCCUPIED BANDWIDTH.	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.8 WORST CASE(RADIATED TEST)	14
3.9 WORST CASE(CONDUCTED TEST)	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	17
6. SUMMARY OF TEST RESULTS	18
7. SAMPLE CALCULATION	19
8. TEST DATA	21
8.1 EFFECTIVE RADIATED POWER.....	21
8.2 RADIATED SPURIOUS EMISSIONS	23
8.3 OCCUPIED BANDWIDTH	24
8.4 CONDUCTED SPURIOUS EMISSIONS	25
8.5 BAND EDGE	25
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	26
9. TEST PLOTS.....	38
10. ANNEX A_ TEST SETUP PHOTO.....	91

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX808U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X808U
Tx Frequency:	665.5 MHz – 695.5 MHz (LTE – Band 71 (5 MHz)) 668.0 MHz – 693.0 MHz (LTE – Band 71 (10 MHz)) 670.5 MHz – 690.5 MHz (LTE – Band 71 (15 MHz)) 673.0 MHz – 688.0 MHz (LTE – Band 71 (20 MHz))
Date(s) of Tests:	September 17, 2021 ~ November 16, 2021
Serial number:	Radiated: R32R9001N1N Conducted: R32R9001H5N

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), WIFI 6E, Bluetooth, BT LE, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven
by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

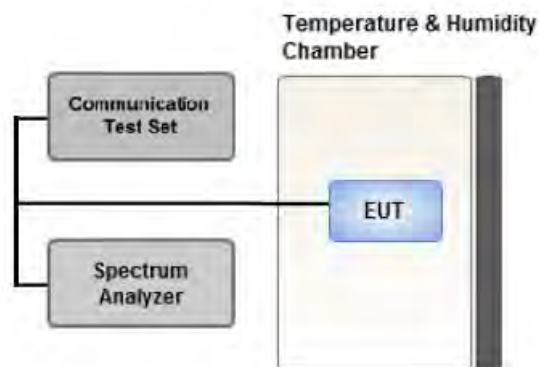

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

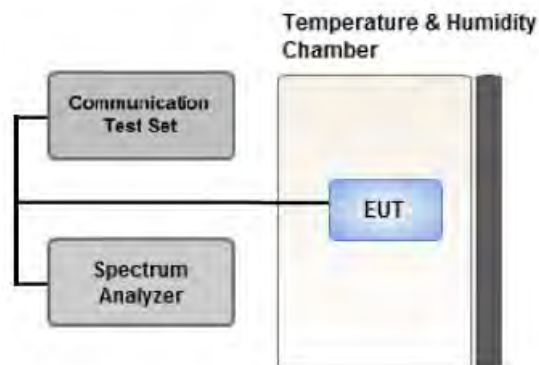

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.6 BAND EDGE

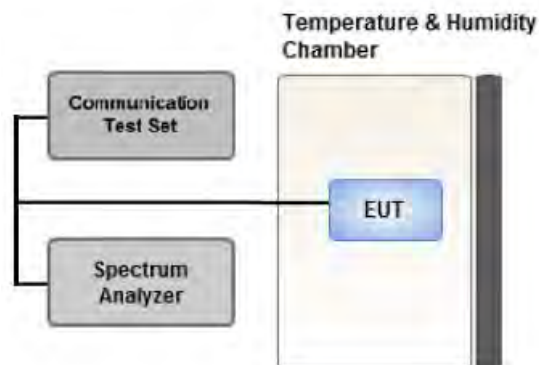

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

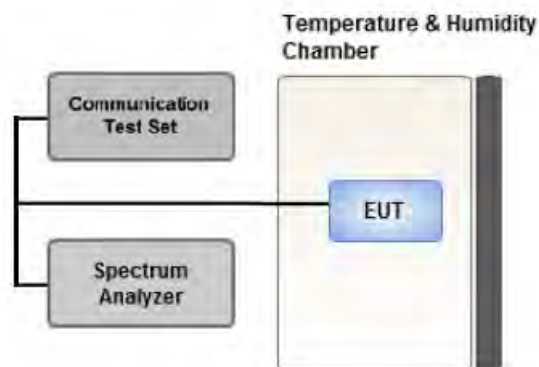

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 15 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, keyboard, AC adapter, etc)
Worst case : Stand alone

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
	QPSK	5,10,15,20	Low, High	Full RB	0
			Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
665.5	LTE B71 (5 MHz)	QPSK	-31.74	27.46	-9.76	1.25	V	< 3.00	0.044	16.45
		16-QAM	-32.48	26.72	-9.76	1.25	V		0.037	15.71
		64-QAM	-33.57	25.63	-9.76	1.25	V		0.029	14.62
		256-QAM	-36.87	22.33	-9.76	1.25	V		0.014	11.32
680.5		QPSK	-28.50	30.33	-9.78	1.26	V		0.085	19.29
		16-QAM	-29.21	29.62	-9.78	1.26	V		0.072	18.58
		64-QAM	-30.26	28.57	-9.78	1.26	V		0.057	17.53
		256-QAM	-33.46	25.37	-9.78	1.26	V		0.027	14.33
695.5		QPSK	-28.43	30.57	-9.79	1.28	V		0.089	19.50
		16-QAM	-29.18	29.82	-9.79	1.28	V		0.075	18.75
		64-QAM	-30.26	28.74	-9.79	1.28	V		0.059	17.67
		256-QAM	-33.38	25.62	-9.79	1.28	V		0.029	14.55

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
668.0	LTE B71 (10 MHz)	QPSK	-31.76	27.54	-9.76	1.25	V	< 3.00	0.045	16.53
		16-QAM	-32.51	26.79	-9.76	1.25	V		0.038	15.78
		64-QAM	-33.59	25.71	-9.76	1.25	V		0.030	14.70
		256-QAM	-37.05	22.25	-9.76	1.25	V		0.013	11.24
680.5		QPSK	-28.67	30.16	-9.78	1.26	V		0.082	19.12
		16-QAM	-29.45	29.38	-9.78	1.26	V		0.068	18.34
		64-QAM	-30.55	28.28	-9.78	1.26	V		0.053	17.24
		256-QAM	-33.99	24.84	-9.78	1.26	V		0.024	13.80
693.0		QPSK	-28.17	30.78	-9.79	1.27	V		0.094	19.72
		16-QAM	-28.95	30.00	-9.79	1.27	V		0.078	18.94
		64-QAM	-30.01	28.94	-9.79	1.27	V		0.061	17.88
		256-QAM	-33.62	25.33	-9.79	1.27	V		0.027	14.27

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
670.5	LTE B71 (15 MHz)	QPSK	-31.55	27.77	-9.77	1.25	V	< 3.00	0.047	16.75
		16-QAM	-32.52	26.80	-9.77	1.25	V		0.038	15.78
		64-QAM	-33.55	25.77	-9.77	1.25	V		0.030	14.75
		256-QAM	-36.86	22.46	-9.77	1.25	V		0.014	11.44
680.5		QPSK	-29.11	29.72	-9.78	1.26	V		0.074	18.68
		16-QAM	-29.95	28.88	-9.78	1.26	V		0.061	17.84
		64-QAM	-30.99	27.84	-9.78	1.26	V		0.048	16.80
		256-QAM	-34.30	24.53	-9.78	1.26	V		0.022	13.49
690.5		QPSK	-28.13	30.79	-9.79	1.27	V		0.094	19.73
		16-QAM	-28.98	29.94	-9.79	1.27	V		0.077	18.88
		64-QAM	-30.03	28.89	-9.79	1.27	V		0.061	17.83
		256-QAM	-33.33	25.59	-9.79	1.27	V		0.028	14.53

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
673.0	LTE B71 (20 MHz)	QPSK	-31.00	28.15	-9.77	1.25	V	< 3.00	0.052	17.13
		16-QAM	-31.90	27.25	-9.77	1.25	V		0.042	16.23
		64-QAM	-32.91	26.24	-9.77	1.25	V		0.033	15.22
		256-QAM	-36.32	22.83	-9.77	1.25	V		0.015	11.81
680.5		QPSK	-29.67	29.16	-9.78	1.26	V		0.065	18.12
		16-QAM	-30.55	28.28	-9.78	1.26	V		0.053	17.24
		64-QAM	-31.58	27.25	-9.78	1.26	V		0.042	16.21
		256-QAM	-35.02	23.81	-9.78	1.26	V		0.019	12.77
688.0		QPSK	-28.38	30.56	-9.78	1.27	V		0.089	19.51
		16-QAM	-29.01	29.93	-9.78	1.27	V		0.077	18.88
		64-QAM	-30.18	28.76	-9.78	1.27	V		0.059	17.71
		256-QAM	-33.59	25.35	-9.78	1.27	V		0.027	14.30

8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B71
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
133197 (670.5)	1 341.00	-51.67	7.28	-59.66	1.80	H	-54.18	-13.00
	2 011.50	-54.25	10.24	-61.24	2.22	V	-53.22	-13.00
	2 682.00	-55.96	10.76	-58.37	2.57	H	-50.18	-13.00
133297 (680.5)	1 361.00	-51.83	7.36	-60.08	1.81	H	-54.53	-13.00
	2 041.50	-54.89	10.06	-60.67	2.23	V	-52.84	-13.00
	2 722.00	-56.49	10.80	-59.73	2.61	H	-51.54	-13.00
133397 (690.5)	1 381.00	-52.05	7.48	-60.46	1.82	H	-54.80	-13.00
	2 071.50	-55.00	9.84	-60.25	2.26	V	-52.67	-13.00
	2 762.00	-56.15	10.80	-58.90	2.66	V	-50.76	-13.00

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
71	5 MHz	680.5	QPSK	25	0	4.5008
			16-QAM			4.5161
			64-QAM			4.5307
			256-QAM			4.5153
	10 MHz		QPSK	50		8.9881
			16-QAM			8.9893
			64-QAM			8.9997
			256-QAM			8.9824
	15 MHz		QPSK	75		13.458
			16-QAM			13.458
			64-QAM			13.456
			256-QAM			13.455
	20 MHz		QPSK	100		17.905
			16-QAM			17.884
			64-QAM			17.874
			256-QAM			17.893

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 39 ~ 54.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
71	5	665.5	3.6790	27.976	-67.480	-39.504	-13.00
		680.5	3.7169	27.976	-67.269	-39.293	
		695.5	3.7174	27.976	-67.273	-39.297	
	10	668.0	3.7169	27.976	-67.264	-39.288	
		680.5	3.6785	27.976	-67.303	-39.327	
		693.0	3.7154	27.976	-67.233	-39.257	
	15	670.5	3.7159	27.976	-67.465	-39.489	
		680.5	3.6955	27.976	-67.276	-39.300	
		690.5	3.7049	27.976	-67.476	-39.500	
	20	673.0	3.6875	27.976	-67.150	-39.174	
		680.5	3.6920	27.976	-67.338	-39.362	
		688.0	3.6651	27.976	-67.507	-39.531	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 79 ~ 90.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 55 ~ 78.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE B71
 OPERATING FREQUENCY: 665,500,000 Hz
 CHANNEL: 133147 (5 MHz)
 REFERENCE VOLTAGE: 3.860 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	665 500 008	0.0	0.000 000	0.000
100 %		-30	665 500 014	6.1	0.000 001	0.009
100 %		-20	665 500 016	8.3	0.000 001	0.012
100 %		-10	665 500 015	7.0	0.000 001	0.011
100 %		0	665 500 016	7.6	0.000 001	0.011
100 %		+10	665 500 013	5.2	0.000 001	0.008
100 %		+30	665 500 013	5.1	0.000 001	0.008
100 %		+40	665 500 015	6.5	0.000 001	0.010
100 %		+50	665 500 014	6.1	0.000 001	0.009
Batt. Endpoint	3.400	+20	665 500 016	7.7	0.000 001	0.012

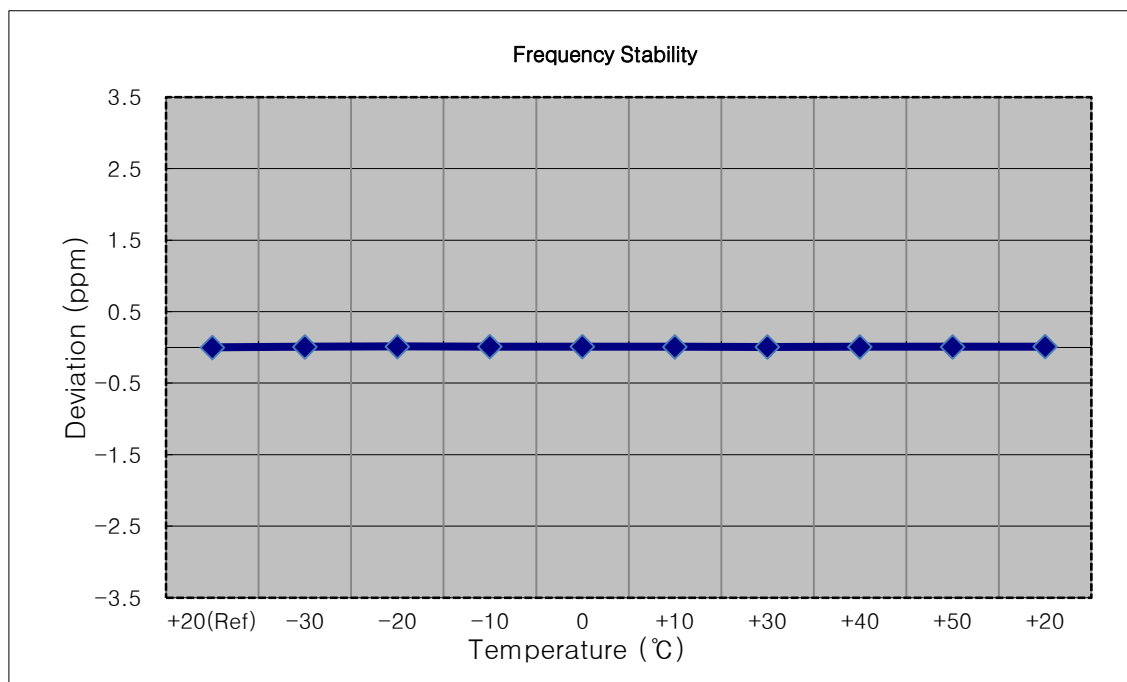


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 668,000,000 Hz
- ▣ CHANNEL: 133172 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	668 000 004	0.0	0.000 000	0.000
100 %		-30	668 000 011	6.9	0.000 001	0.010
100 %		-20	668 000 011	6.7	0.000 001	0.010
100 %		-10	668 000 011	7.1	0.000 001	0.011
100 %		0	668 000 012	7.3	0.000 001	0.011
100 %		+10	668 000 012	8.1	0.000 001	0.012
100 %		+30	668 000 011	6.4	0.000 001	0.010
100 %		+40	668 000 007	3.0	0.000 000	0.004
100 %		+50	668 000 010	5.9	0.000 001	0.009
Batt. Endpoint	3.400	+20	668 000 011	6.7	0.000 001	0.010

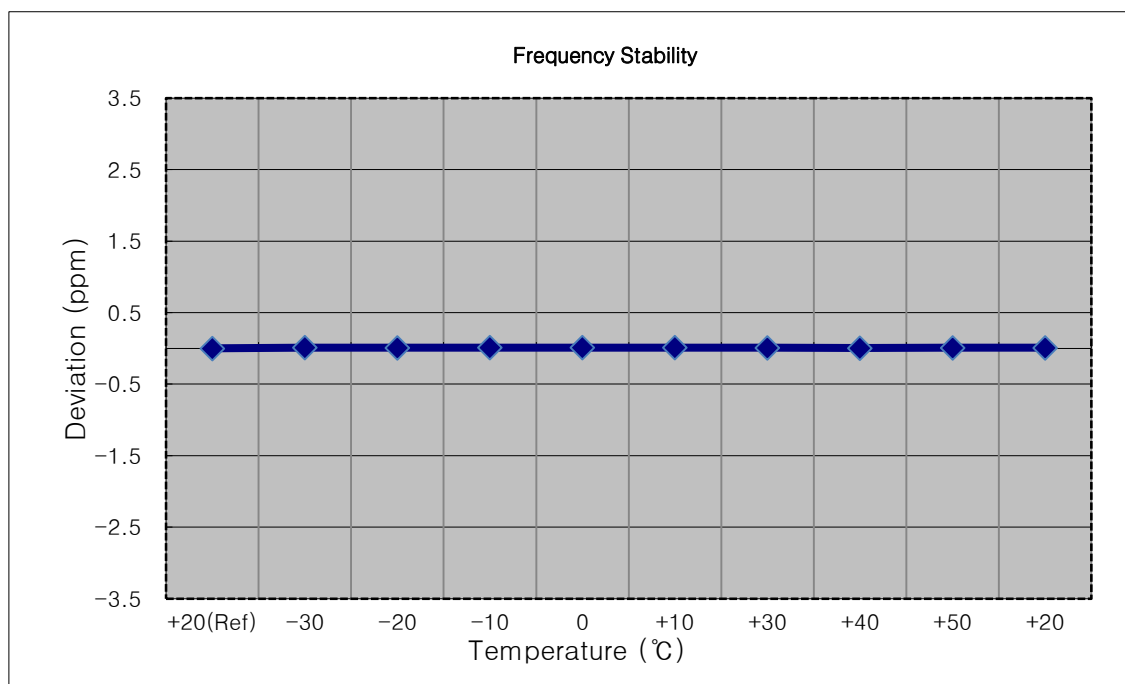


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 670,500,000 Hz
☐ CHANNEL: 133197 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	670 500 004	0.0	0.000 000	0.000
100 %		-30	670 500 013	9.0	0.000 001	0.013
100 %		-20	670 500 010	5.6	0.000 001	0.008
100 %		-10	670 500 009	5.3	0.000 001	0.008
100 %		0	670 500 008	4.2	0.000 001	0.006
100 %		+10	670 500 008	3.8	0.000 001	0.006
100 %		+30	670 500 011	6.5	0.000 001	0.010
100 %		+40	670 500 012	7.9	0.000 001	0.012
100 %		+50	670 500 011	6.5	0.000 001	0.010
Batt. Endpoint	3.400	+20	670 500 009	4.8	0.000 001	0.007

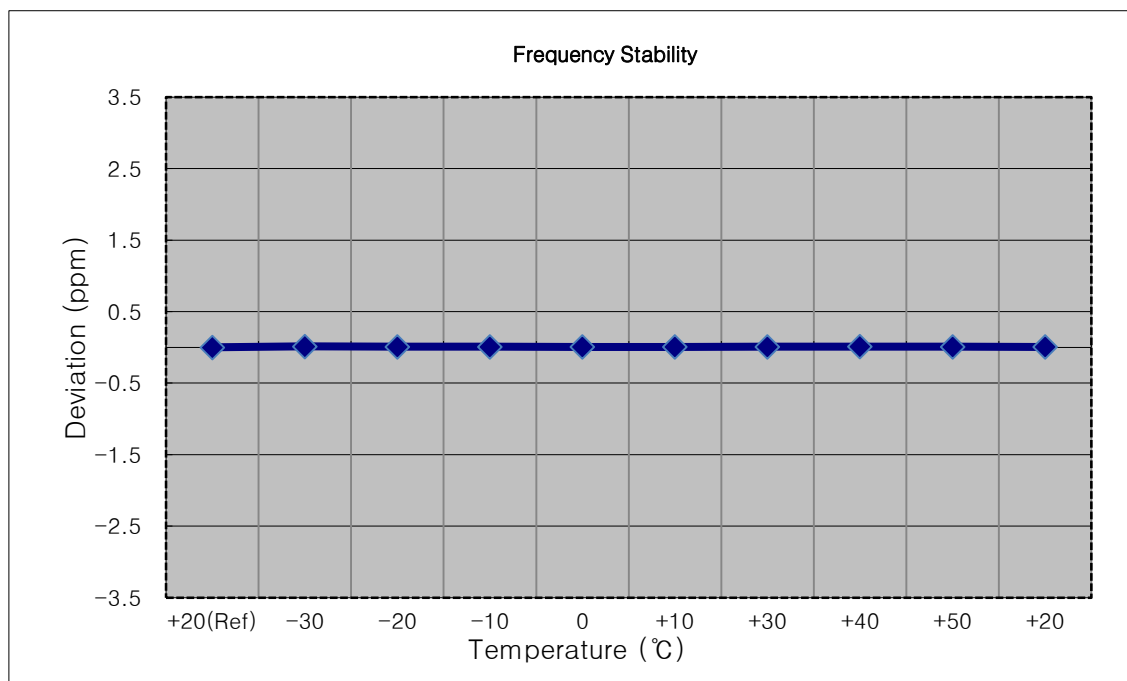


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 673,000,000 Hz
☐ CHANNEL: 133222 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	673 000 007	0.0	0.000 000	0.000
100 %		-30	673 000 011	4.9	0.000 001	0.007
100 %		-20	673 000 011	4.9	0.000 001	0.007
100 %		-10	673 000 011	4.5	0.000 001	0.007
100 %		0	673 000 013	6.3	0.000 001	0.009
100 %		+10	673 000 012	5.3	0.000 001	0.008
100 %		+30	673 000 013	6.0	0.000 001	0.009
100 %		+40	673 000 012	5.5	0.000 001	0.008
100 %		+50	673 000 011	4.5	0.000 001	0.007
Batt. Endpoint	3.400	+20	673 000 011	4.1	0.000 001	0.006

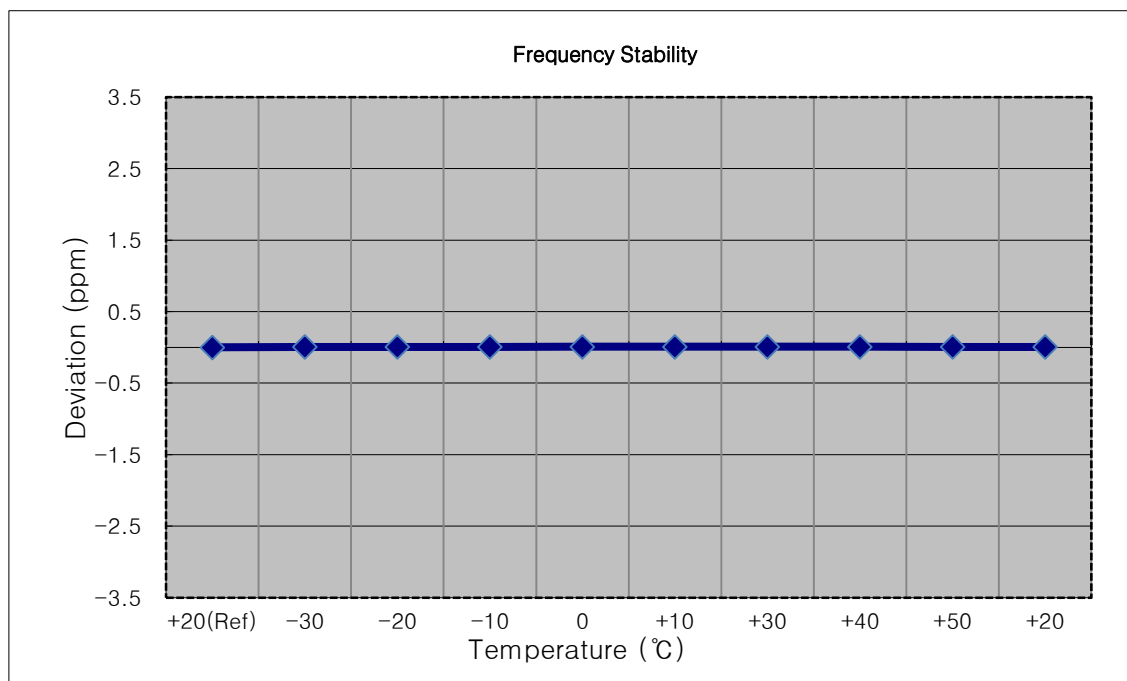


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 680,500,000 Hz
☐ CHANNEL: 133297 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	680 500 004	0.0	0.000 000	0.000
100 %		-30	680 500 007	3.0	0.000 000	0.004
100 %		-20	680 499 999	-4.2	-0.000 001	-0.006
100 %		-10	680 499 999	-4.4	-0.000 001	-0.006
100 %		0	680 499 998	-5.2	-0.000 001	-0.008
100 %		+10	680 500 007	3.9	0.000 001	0.006
100 %		+30	680 500 008	4.0	0.000 001	0.006
100 %		+40	680 500 006	2.3	0.000 000	0.003
100 %		+50	680 500 001	-3.0	0.000 000	-0.004
Batt. Endpoint	3.400	+20	680 500 008	4.6	0.000 001	0.007

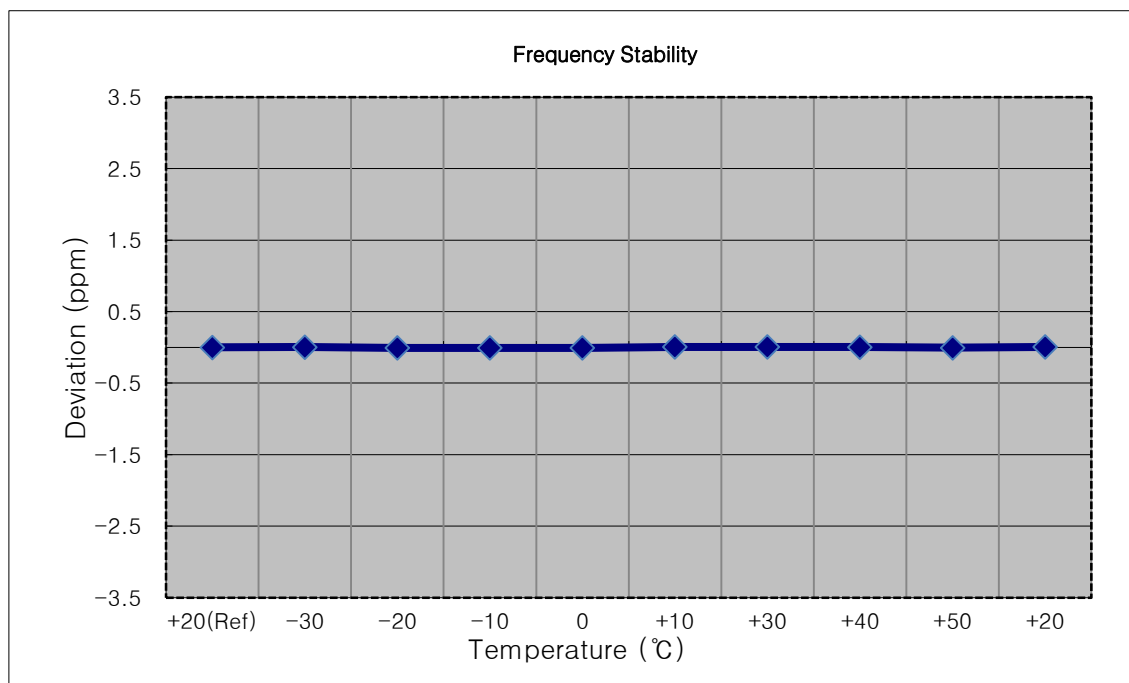


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 680,500,000 Hz
☐ CHANNEL: 133297 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	680 500 005	0.0	0.000 000	0.000
100 %		-30	680 500 009	4.5	0.000 001	0.007
100 %		-20	680 500 013	7.6	0.000 001	0.011
100 %		-10	680 500 010	5.4	0.000 001	0.008
100 %		0	680 500 011	6.0	0.000 001	0.009
100 %		+10	680 500 010	4.8	0.000 001	0.007
100 %		+30	680 500 009	4.4	0.000 001	0.006
100 %		+40	680 500 012	7.4	0.000 001	0.011
100 %		+50	680 500 009	4.1	0.000 001	0.006
Batt. Endpoint	3.400	+20	680 500 010	4.7	0.000 001	0.007

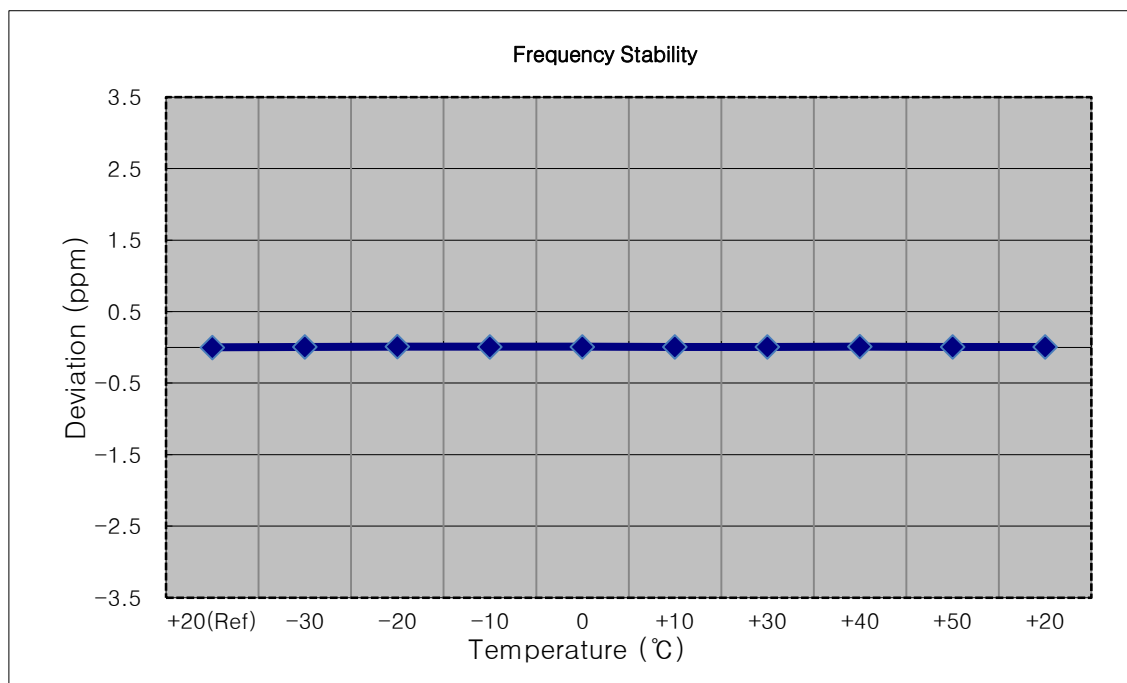


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 680,500,000 Hz
☐ CHANNEL: 133297 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	680 500 007	0.0	0.000 000	0.000
100 %		-30	680 500 013	6.7	0.000 001	0.010
100 %		-20	680 500 011	4.7	0.000 001	0.007
100 %		-10	680 500 013	6.0	0.000 001	0.009
100 %		0	680 500 010	3.2	0.000 000	0.005
100 %		+10	680 500 011	4.2	0.000 001	0.006
100 %		+30	680 500 011	4.3	0.000 001	0.006
100 %		+40	680 500 012	5.2	0.000 001	0.008
100 %		+50	680 500 013	6.9	0.000 001	0.010
Batt. Endpoint	3.400	+20	680 500 003	-3.5	-0.000 001	-0.005

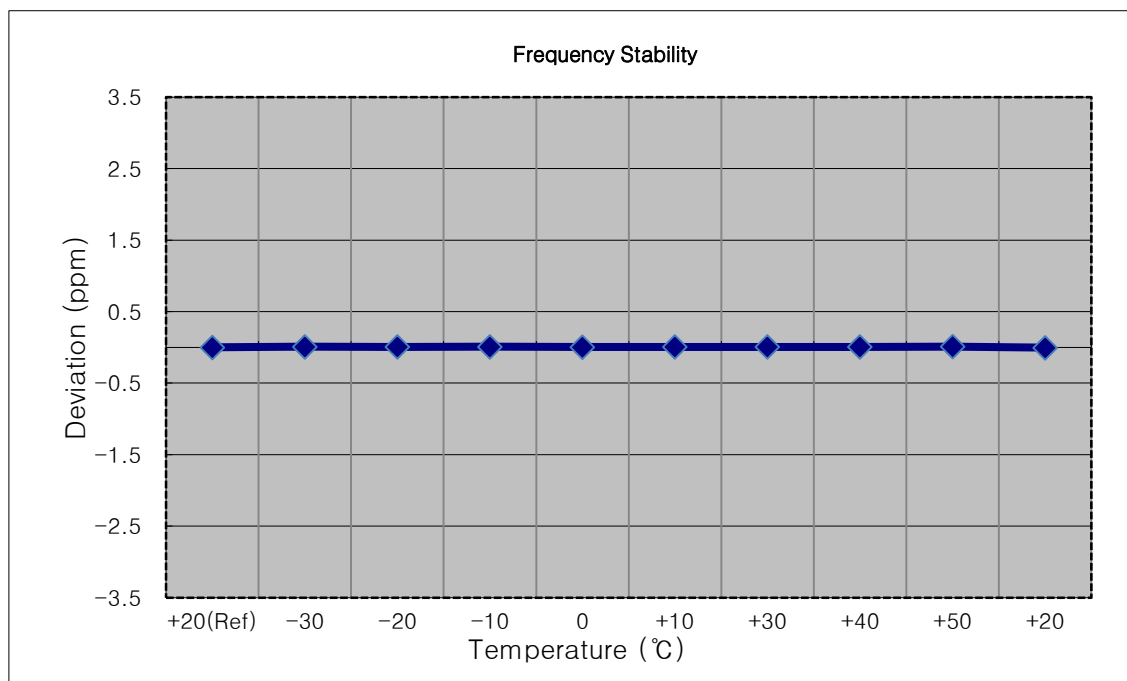


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 680,500,000 Hz
☐ CHANNEL: 133297 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	680 500 005	0.0	0.000 000	0.000
100 %		-30	680 500 014	9.6	0.000 001	0.014
100 %		-20	680 500 011	6.0	0.000 001	0.009
100 %		-10	680 500 010	5.2	0.000 001	0.008
100 %		0	680 500 012	7.3	0.000 001	0.011
100 %		+10	680 500 009	4.5	0.000 001	0.007
100 %		+30	680 500 011	6.4	0.000 001	0.009
100 %		+40	680 500 010	4.8	0.000 001	0.007
100 %		+50	680 500 011	6.6	0.000 001	0.010
Batt. Endpoint	3.400	+20	680 500 009	3.9	0.000 001	0.006

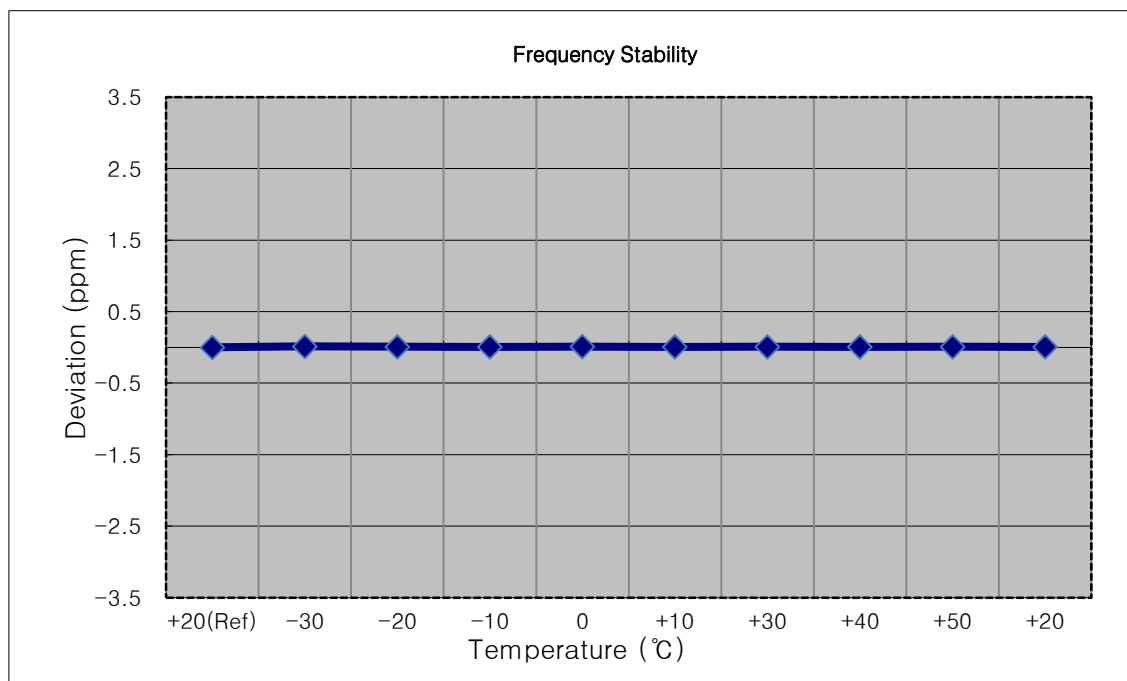


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 695,500,000 Hz
☐ CHANNEL: 133447 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	695 499 997	0.0	0.000 000	0.000
100 %		-30	695 499 992	-5.0	-0.000 001	-0.007
100 %		-20	695 499 993	-3.7	-0.000 001	-0.005
100 %		-10	695 499 993	-4.3	-0.000 001	-0.006
100 %		0	695 499 993	-4.1	-0.000 001	-0.006
100 %		+10	695 499 993	-3.8	-0.000 001	-0.005
100 %		+30	695 499 994	-2.8	0.000 000	-0.004
100 %		+40	695 499 994	-3.1	0.000 000	-0.004
100 %		+50	695 500 004	6.7	0.000 001	0.010
Batt. Endpoint	3.400	+20	695 499 994	-2.4	0.000 000	-0.003

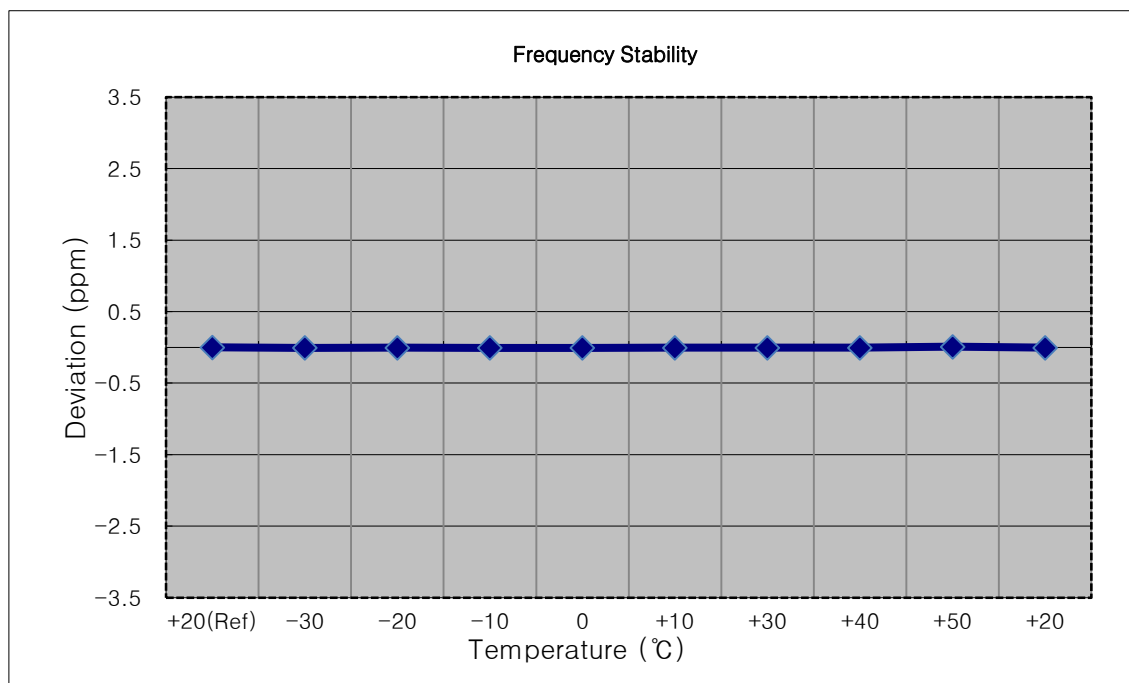


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 693,000,000 Hz
☐ CHANNEL: 133422 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	692 999 991	0.0	0.000 000	0.000
100 %		-30	692 999 984	-7.0	-0.000 001	-0.010
100 %		-20	692 999 984	-6.4	-0.000 001	-0.009
100 %		-10	692 999 987	-3.6	-0.000 001	-0.005
100 %		0	692 999 984	-6.2	-0.000 001	-0.009
100 %		+10	692 999 984	-6.1	-0.000 001	-0.009
100 %		+30	692 999 985	-5.2	-0.000 001	-0.008
100 %		+40	692 999 983	-7.3	-0.000 001	-0.011
100 %		+50	692 999 985	-5.2	-0.000 001	-0.008
Batt. Endpoint	3.400	+20	692 999 983	-7.2	-0.000 001	-0.010

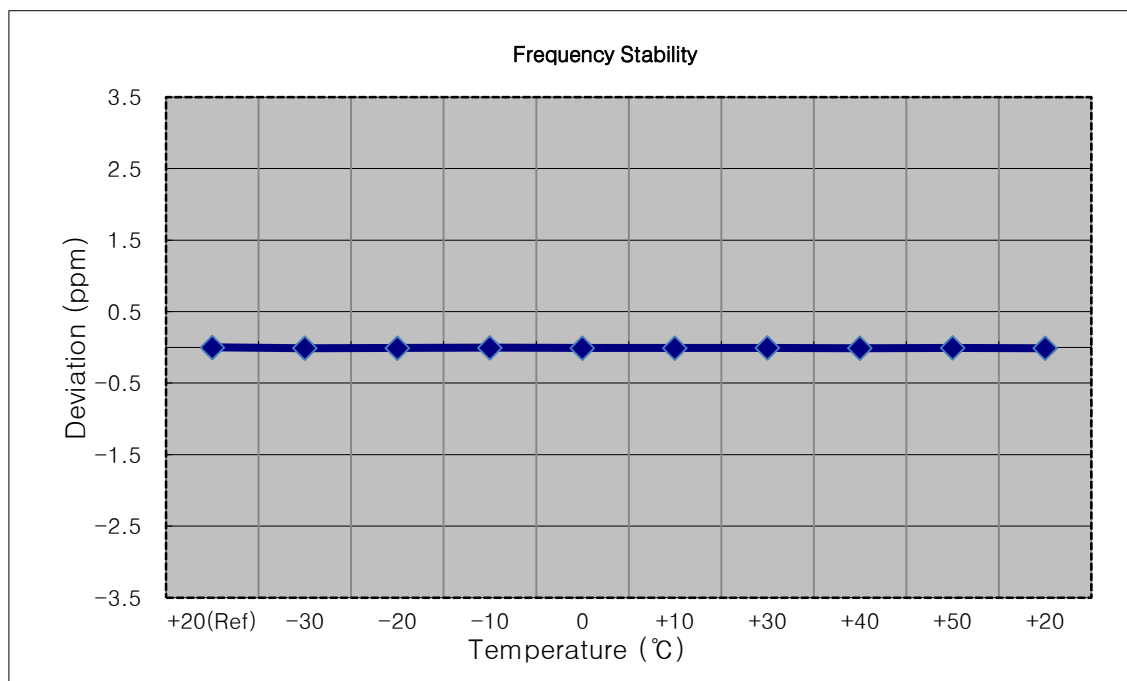


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 690,500,000 Hz
- ▣ CHANNEL: 133397 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	690 499 993	0.0	0.000 000	0.000
100 %		-30	690 499 985	-8.6	-0.000 001	-0.012
100 %		-20	690 499 986	-7.6	-0.000 001	-0.011
100 %		-10	690 499 987	-5.9	-0.000 001	-0.009
100 %		0	690 499 988	-4.9	-0.000 001	-0.007
100 %		+10	690 499 986	-7.3	-0.000 001	-0.011
100 %		+30	690 499 990	-3.7	-0.000 001	-0.005
100 %		+40	690 499 984	-9.1	-0.000 001	-0.013
100 %		+50	690 499 988	-5.7	-0.000 001	-0.008
Batt. Endpoint	3.400	+20	690 499 987	-6.2	-0.000 001	-0.009

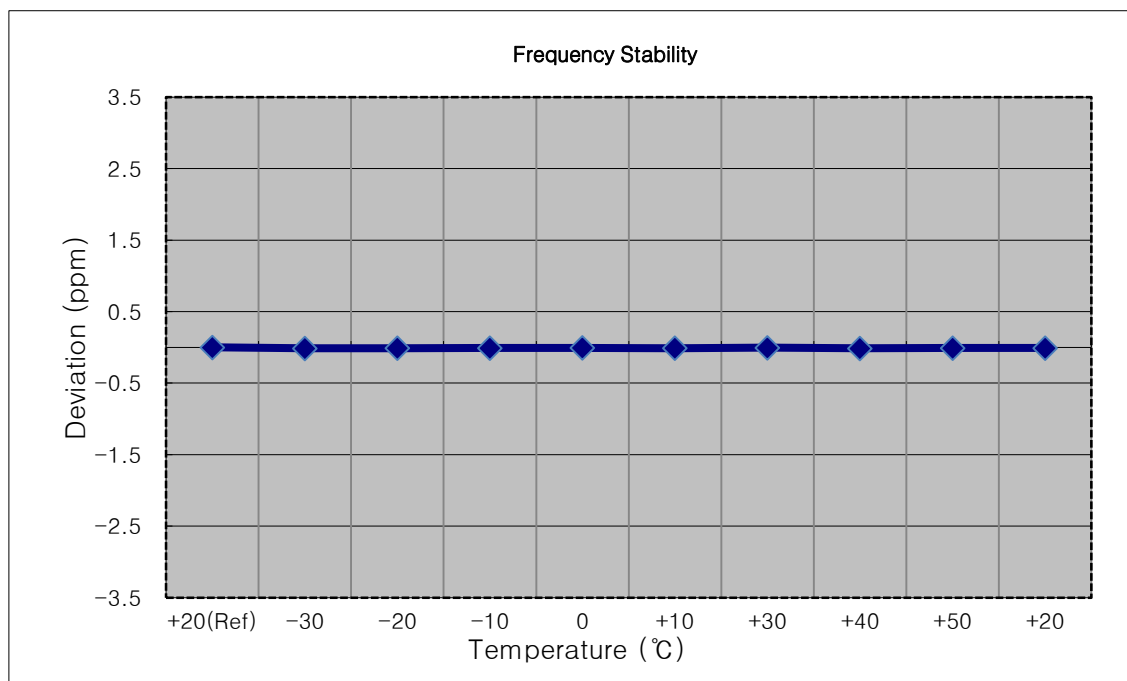


- ☐ MODE: LTE B71
☐ OPERATING FREQUENCY: 688,000,000 Hz
☐ CHANNEL: 133372 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	687 999 993	0.0	0.000 000	0.000
100 %		-30	687 999 987	-5.8	-0.000 001	-0.008
100 %		-20	687 999 986	-6.4	-0.000 001	-0.009
100 %		-10	687 999 986	-6.8	-0.000 001	-0.010
100 %		0	687 999 986	-6.3	-0.000 001	-0.009
100 %		+10	687 999 985	-7.6	-0.000 001	-0.011
100 %		+30	687 999 987	-5.6	-0.000 001	-0.008
100 %		+40	687 999 985	-7.4	-0.000 001	-0.011
100 %		+50	687 999 988	-4.2	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	687 999 987	-5.7	-0.000 001	-0.008

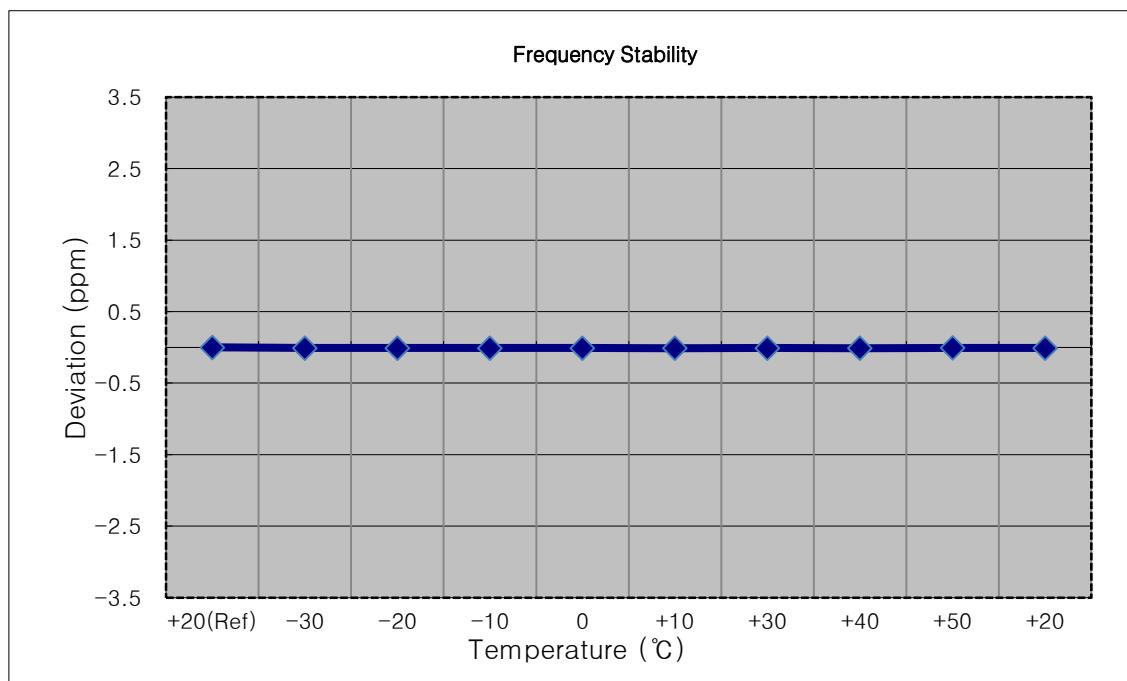


9. TEST PLOTS


BAND 71. Occupied Bandwidth Plot (5 M BW Ch.133297 QPSK_RB6_0)

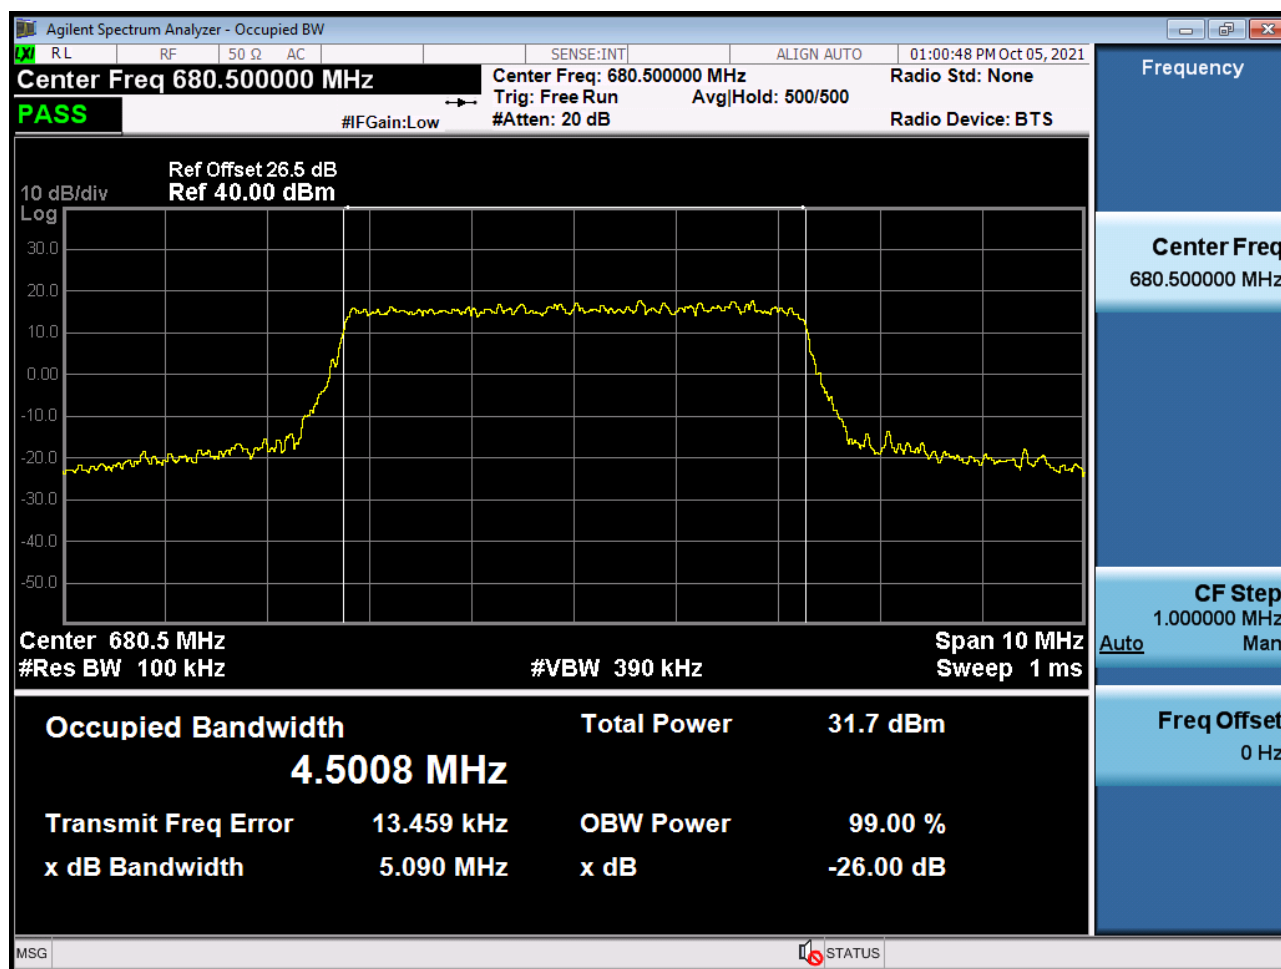


BAND 71. Occupied Bandwidth Plot (5 M BW Ch.133297 16QAM_RB6_0)

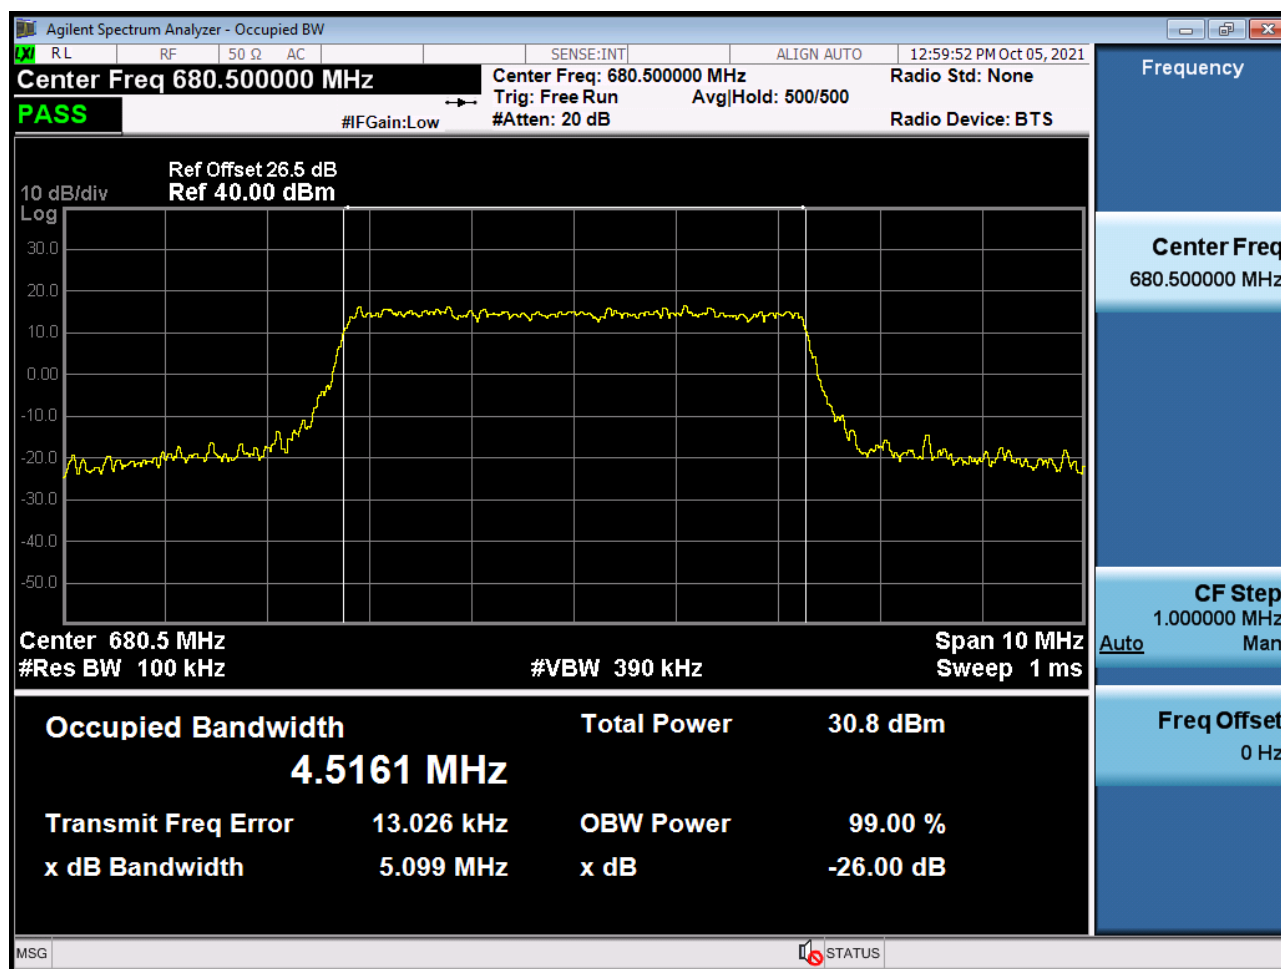


BAND 71. Occupied Bandwidth Plot (5 M BW Ch.133297 64QAM_RB6_0)

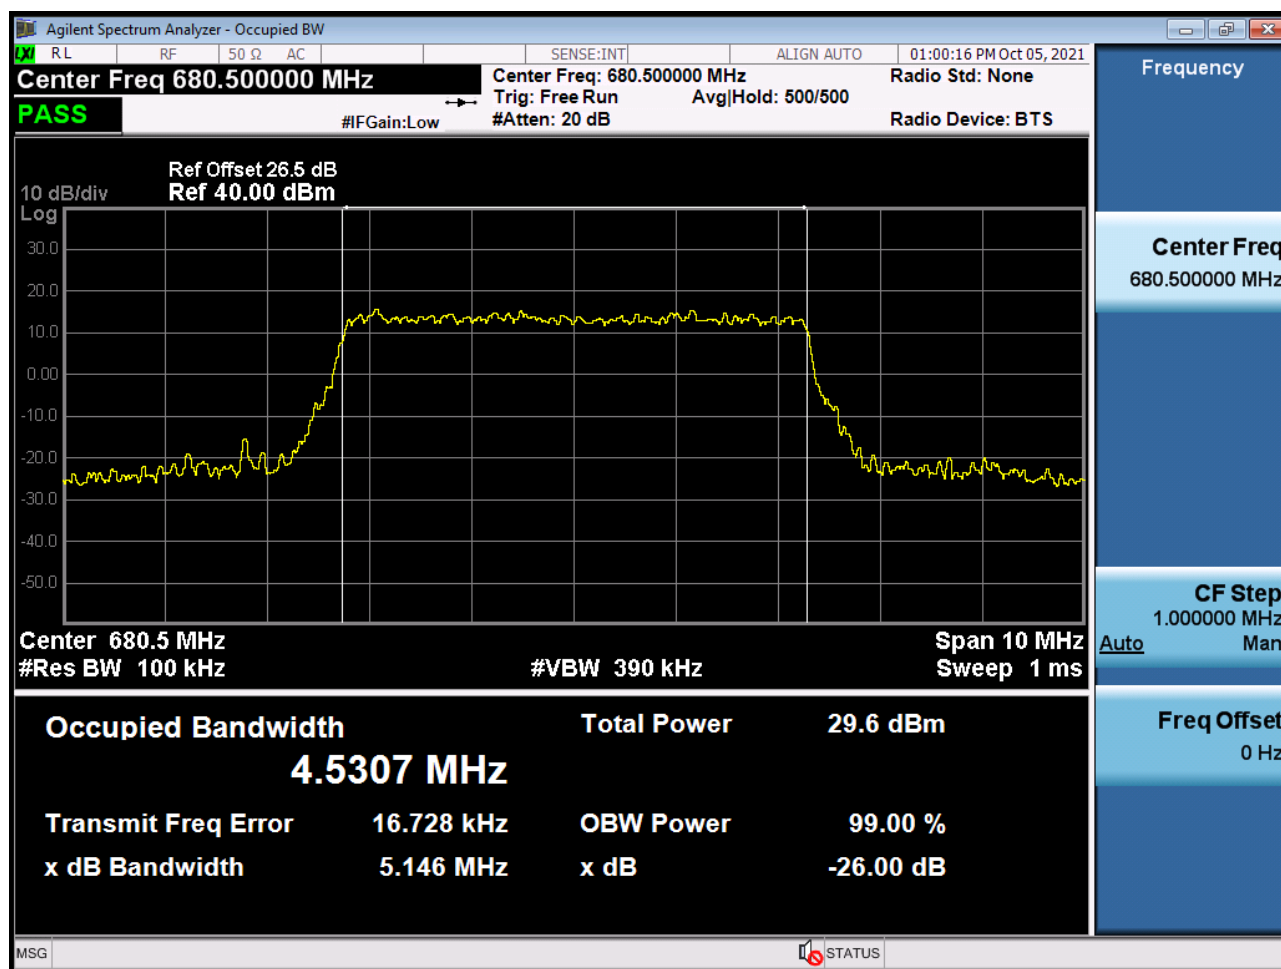


BAND 71. Occupied Bandwidth Plot (5 M BW Ch.133297 256QAM_RB6_0)

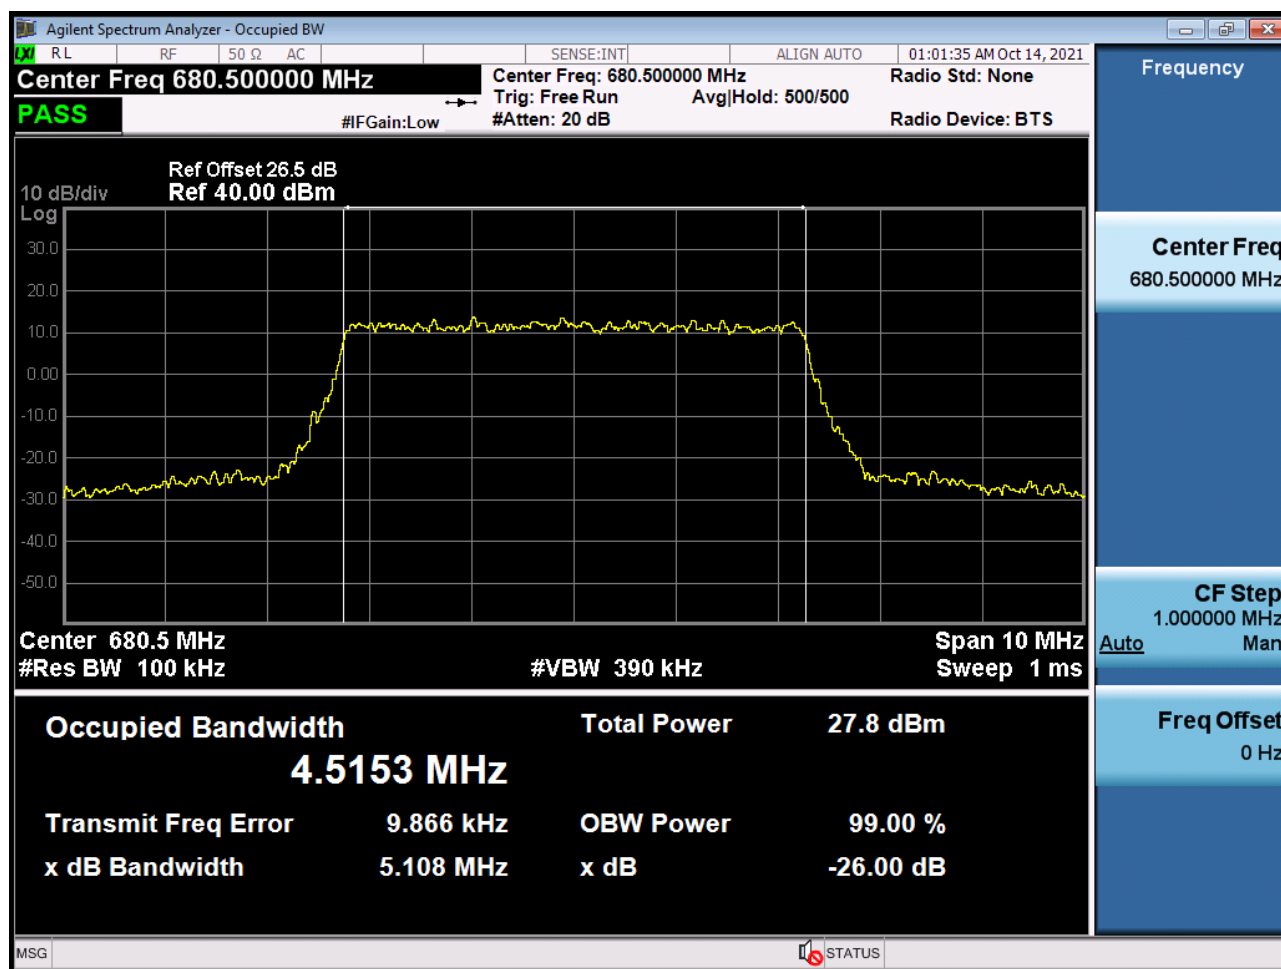


BAND 71. Occupied Bandwidth Plot (10 M BW Ch.133297 QPSK_RB15_0)

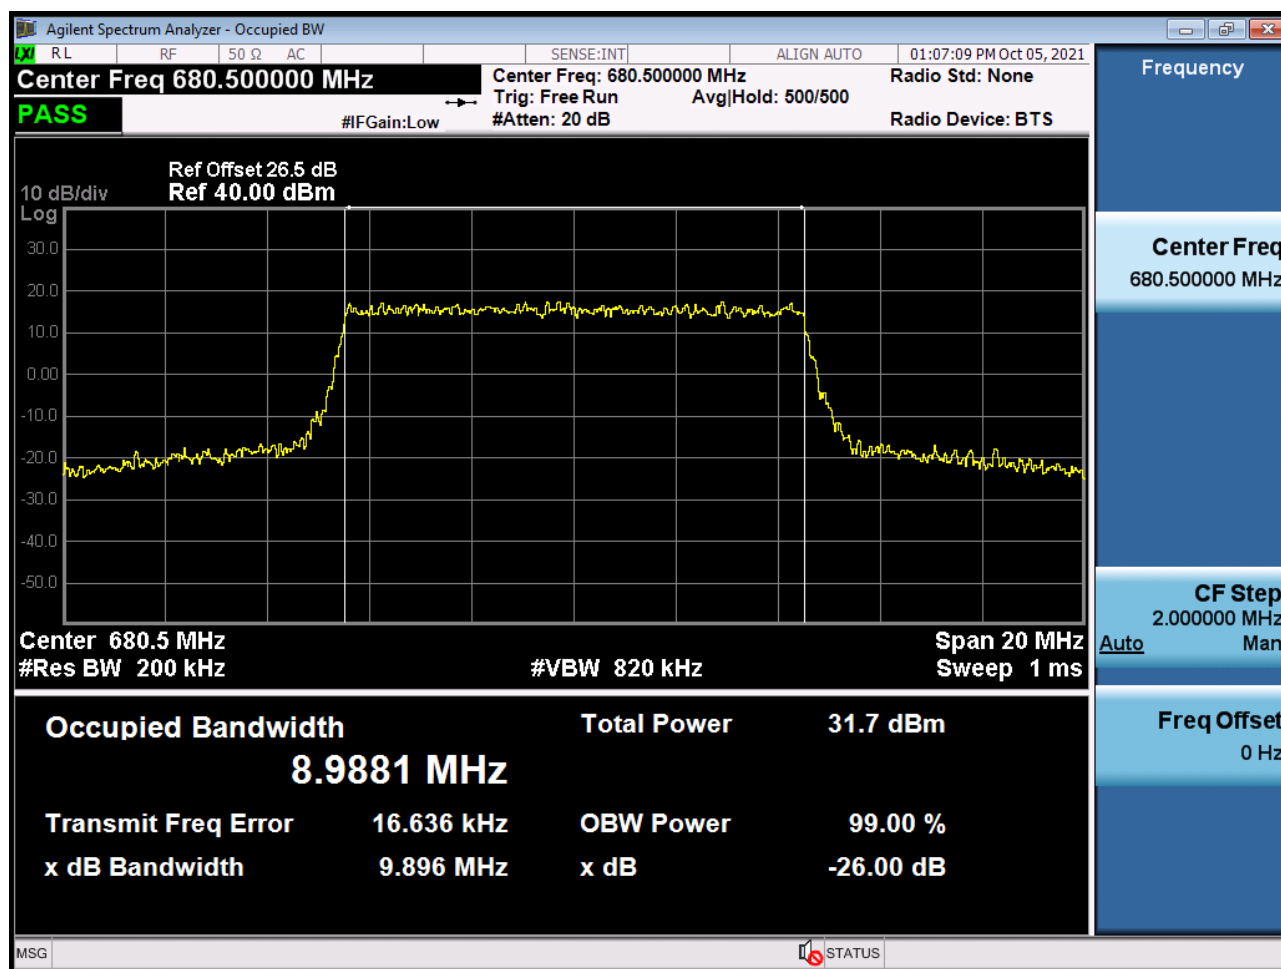


BAND 71. Occupied Bandwidth Plot (10 M BW Ch.133297 16QAM_RB15_0)

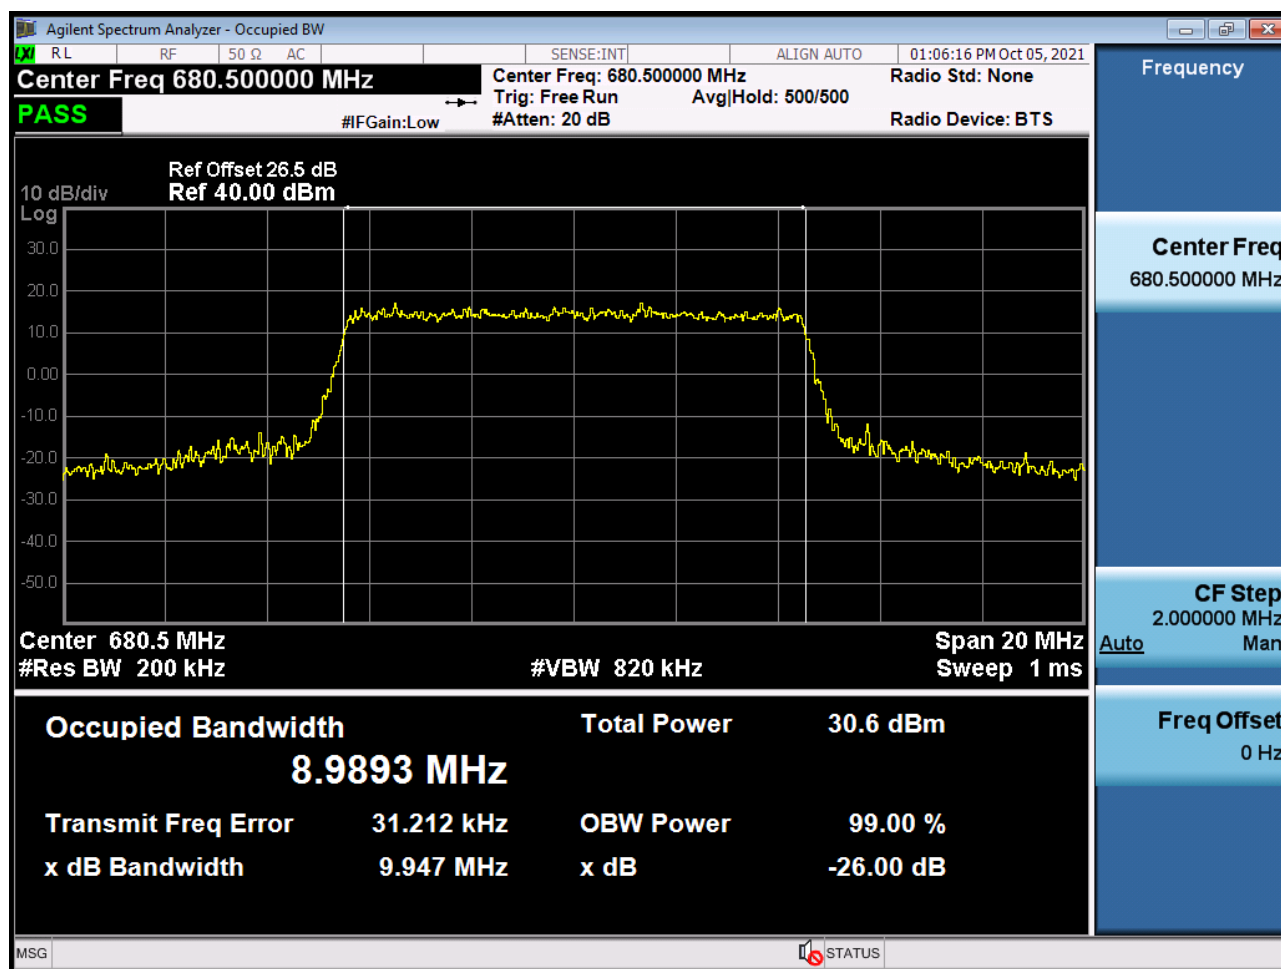


BAND 71. Occupied Bandwidth Plot (10 M BW Ch.133297 64QAM_RB15_0)

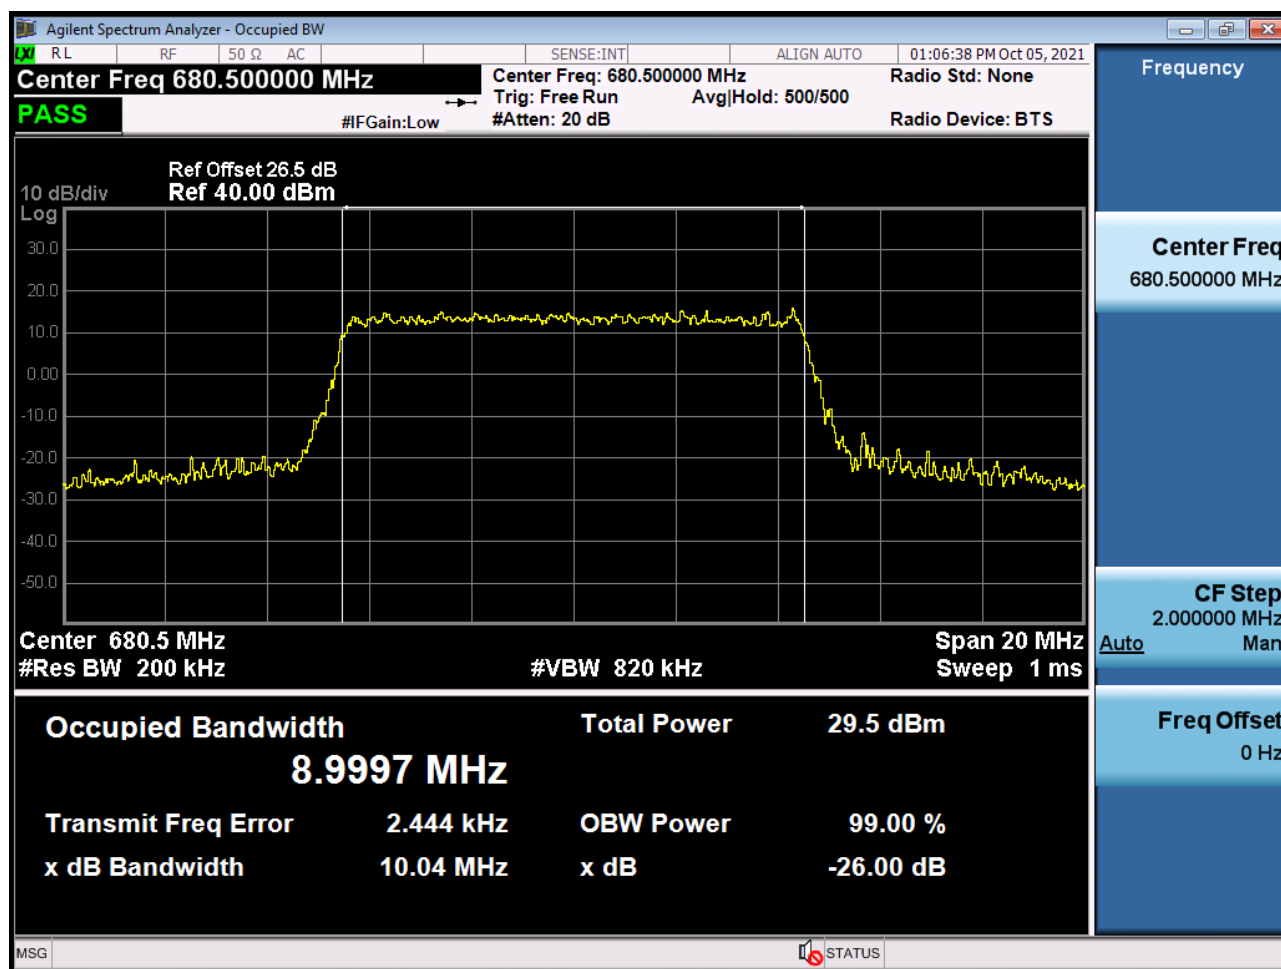


BAND 71. Occupied Bandwidth Plot (10 M BW Ch.133297 256QAM_RB15_0)

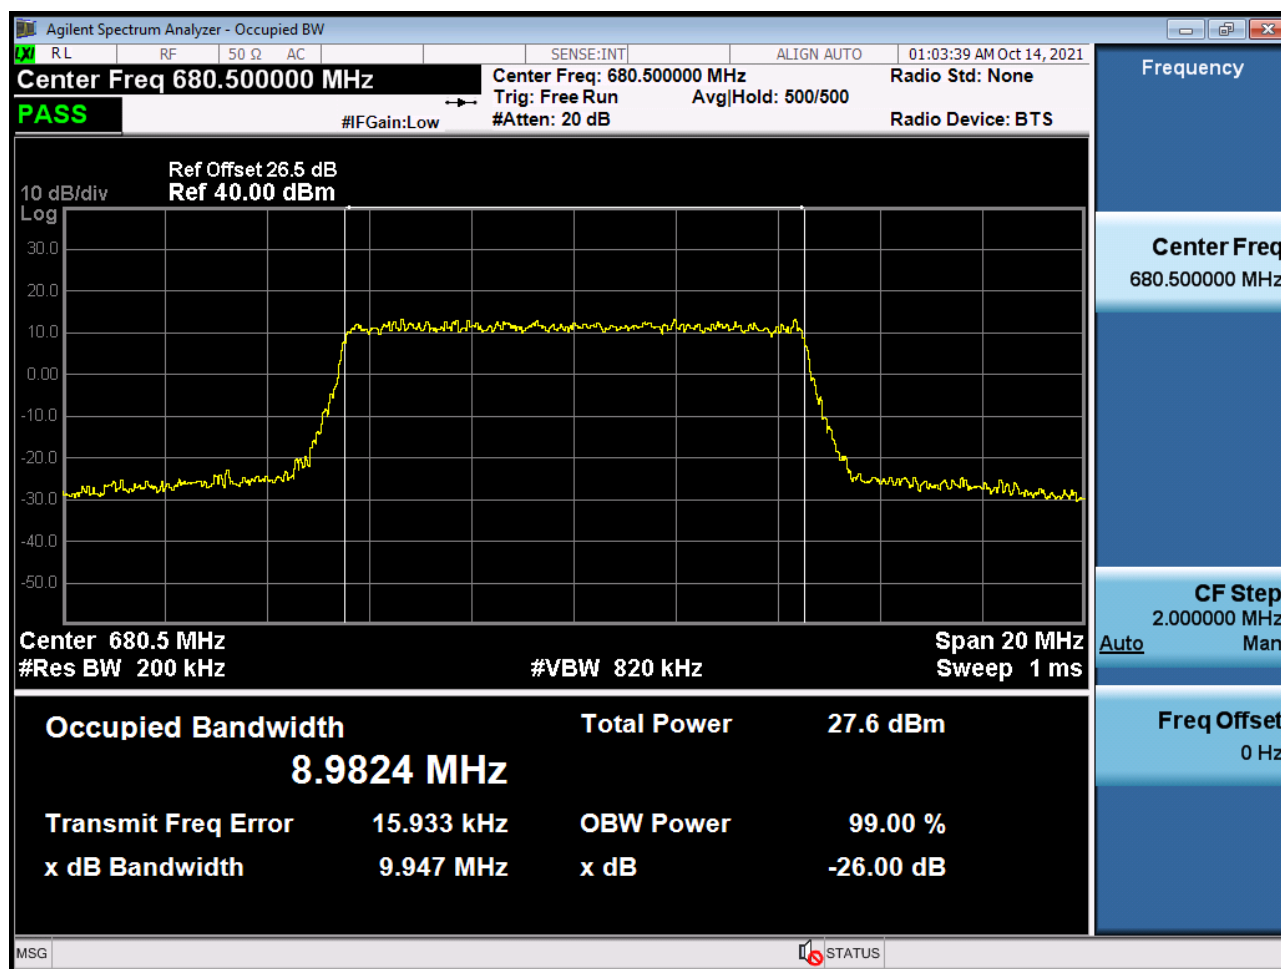


BAND 71. Occupied Bandwidth Plot (15 M BW Ch.133297 QPSK_RB25_0)

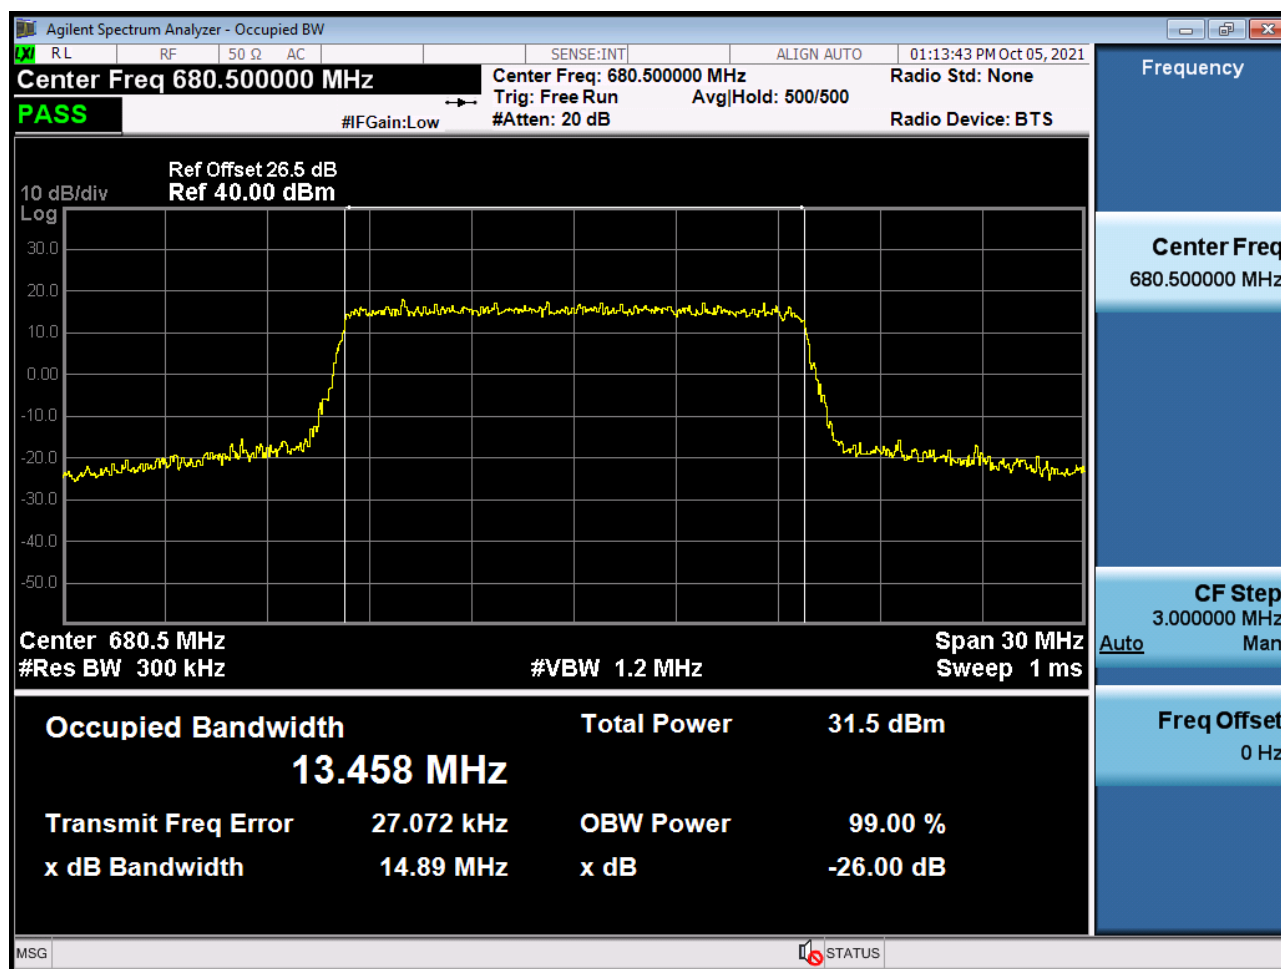


BAND 71. Occupied Bandwidth Plot (15 M BW Ch.133297 16QAM_RB25_0)

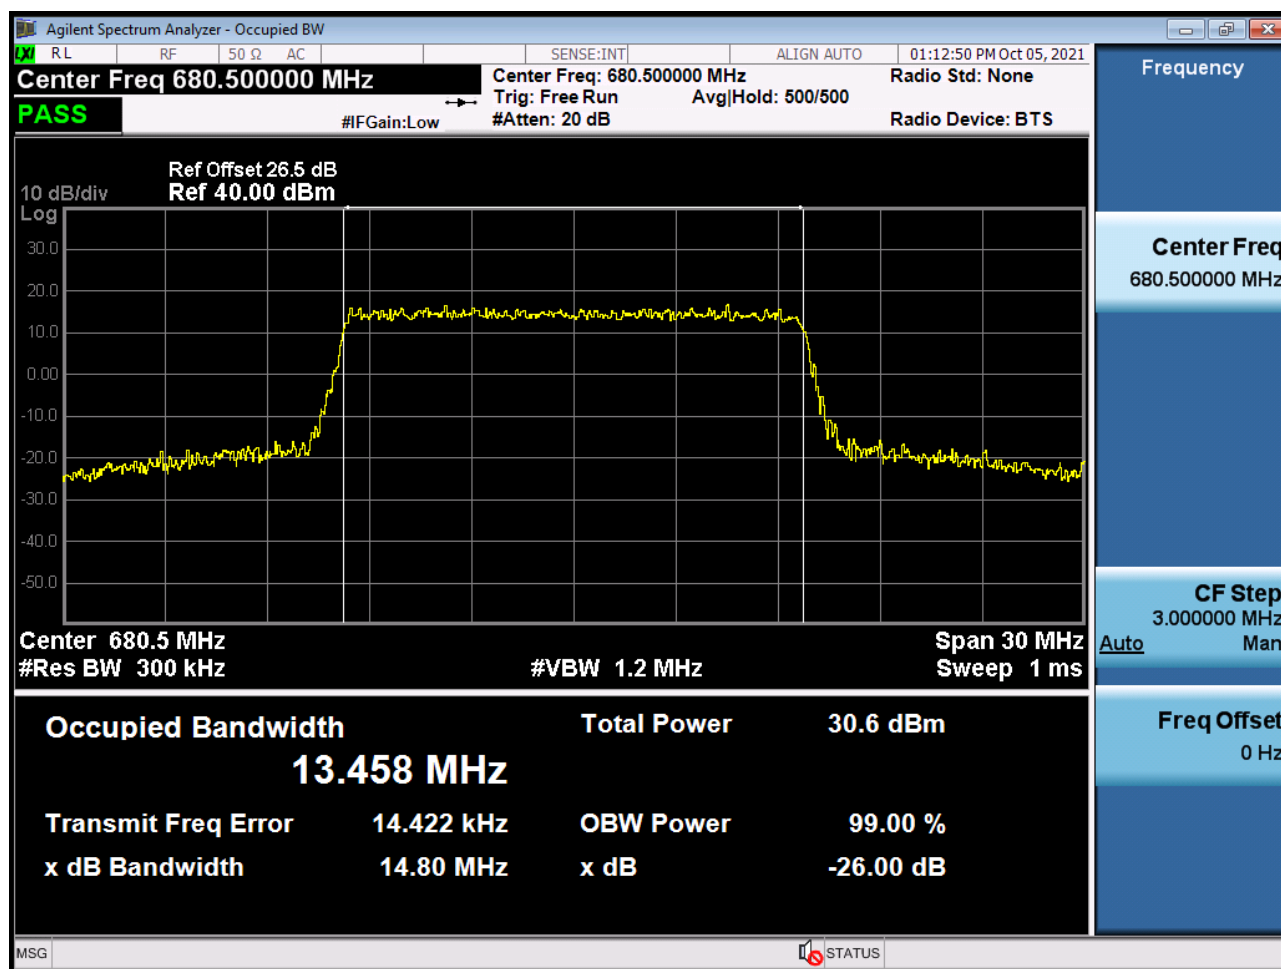


BAND 71. Occupied Bandwidth Plot (15 M BW Ch.133297 64QAM_RB25_0)

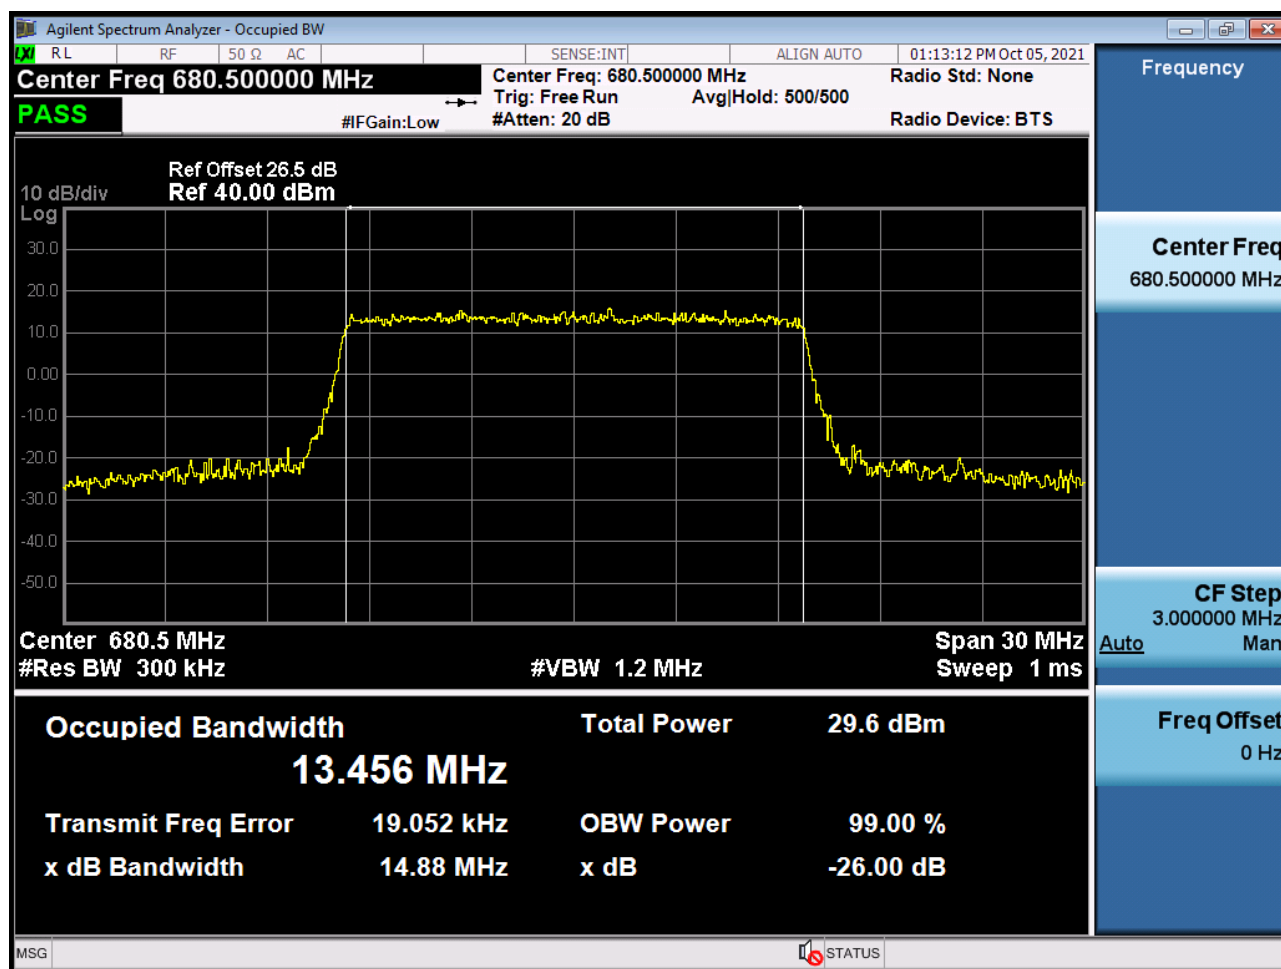


BAND 71. Occupied Bandwidth Plot (15 M BW Ch.133297 256QAM_RB25_0)

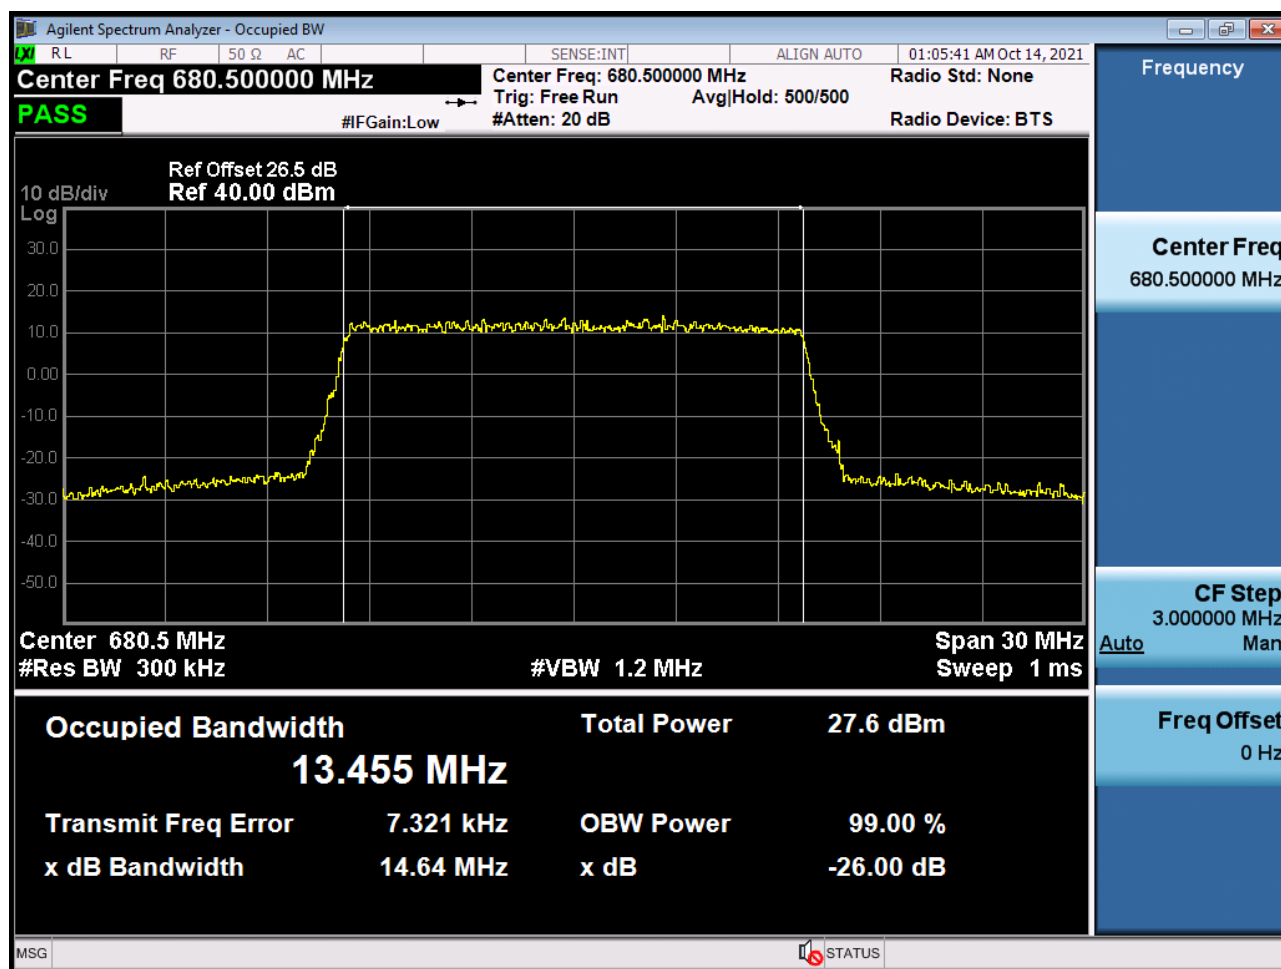


BAND 71. Occupied Bandwidth Plot (20 M BW Ch.133297 QPSK_RB50_0)

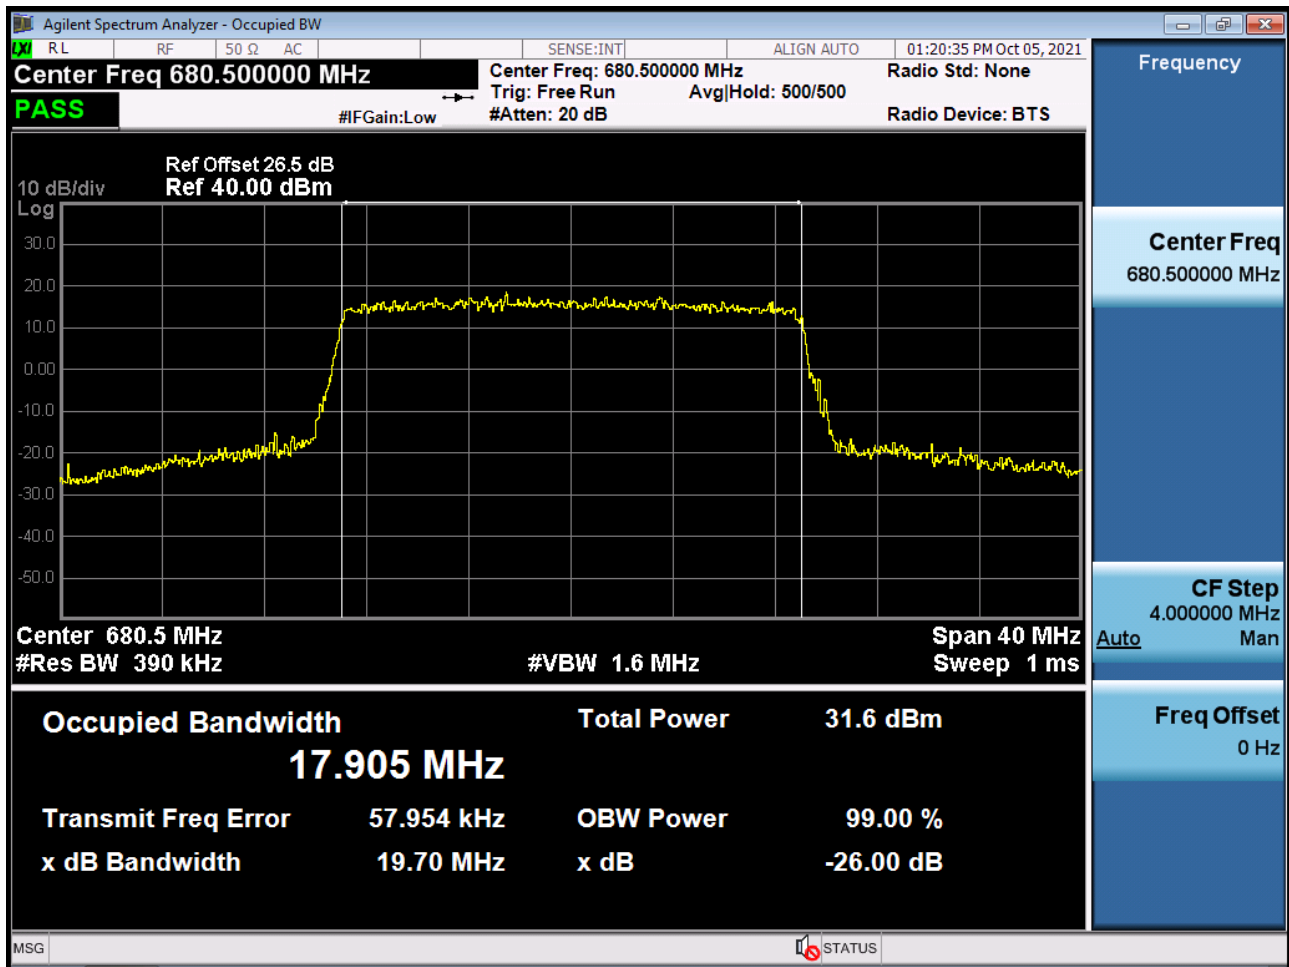


BAND 71. Occupied Bandwidth Plot (20 M BW Ch.133297 16QAM_RB50_0)

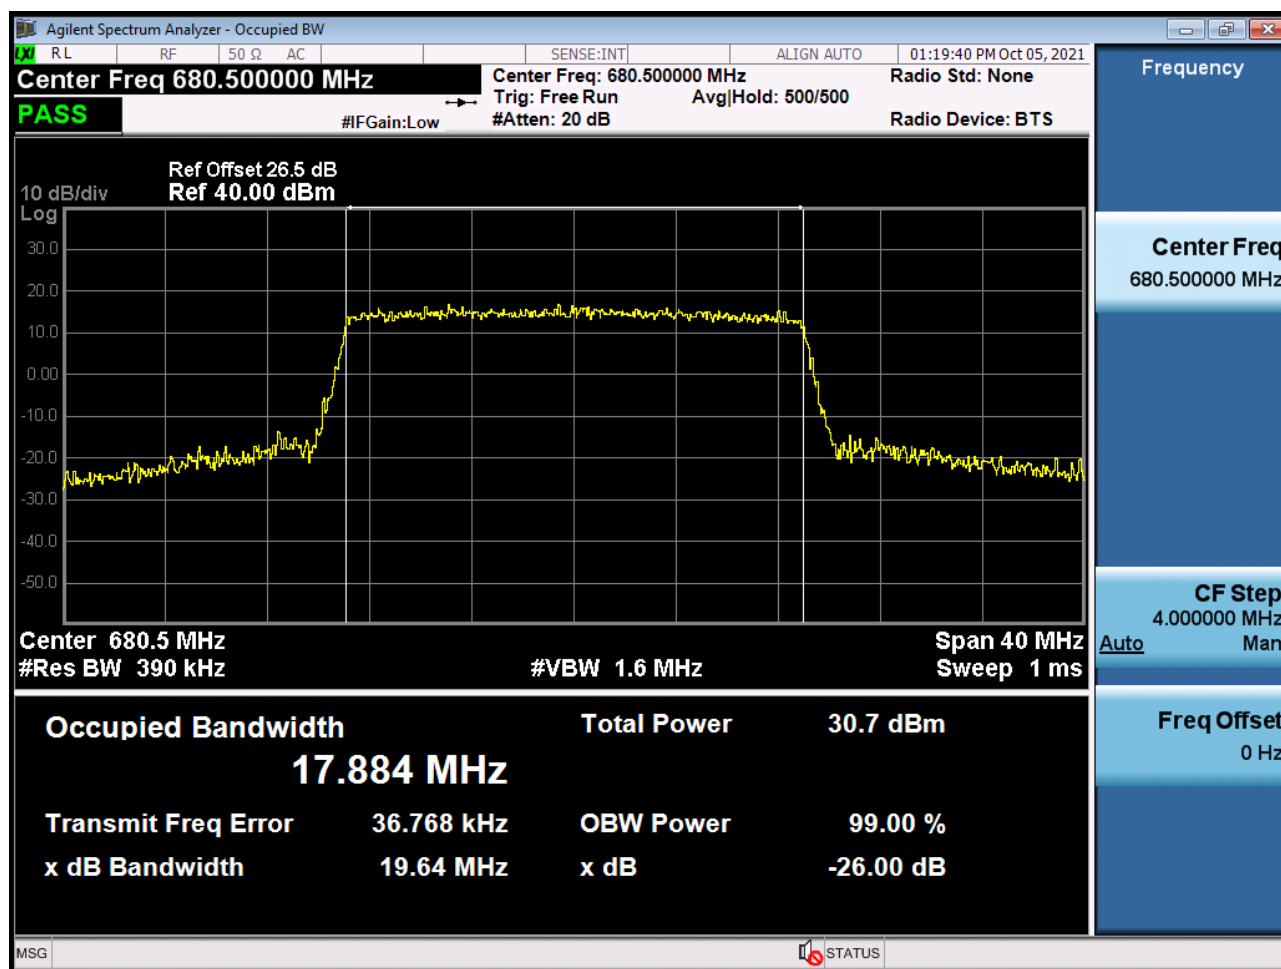


BAND 71. Occupied Bandwidth Plot (20 M BW Ch.133297 64QAM_RB50_0)

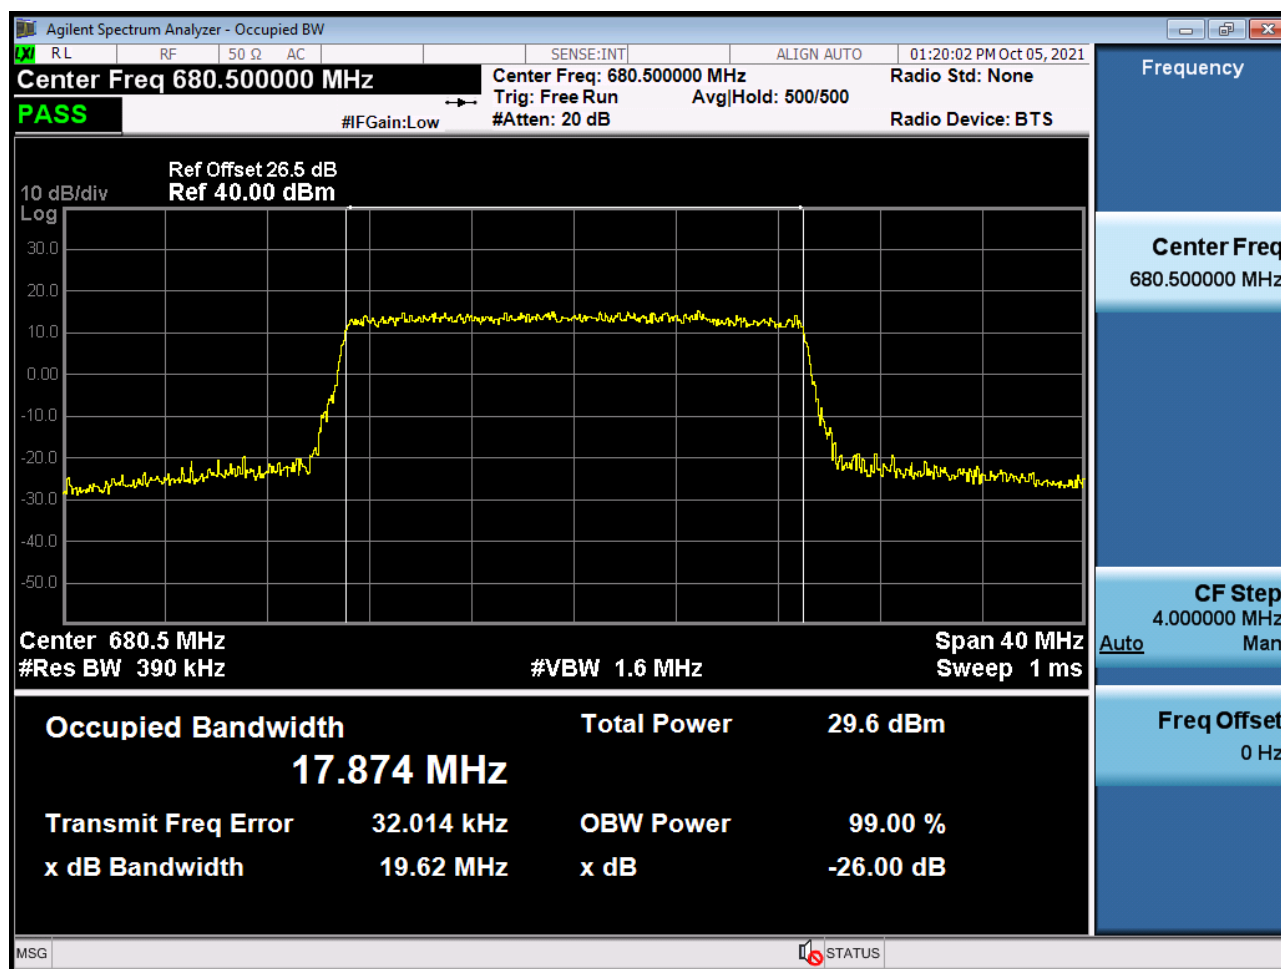

BAND 71. Occupied Bandwidth Plot (20 M BW Ch.133297 256QAM_RB50_0)

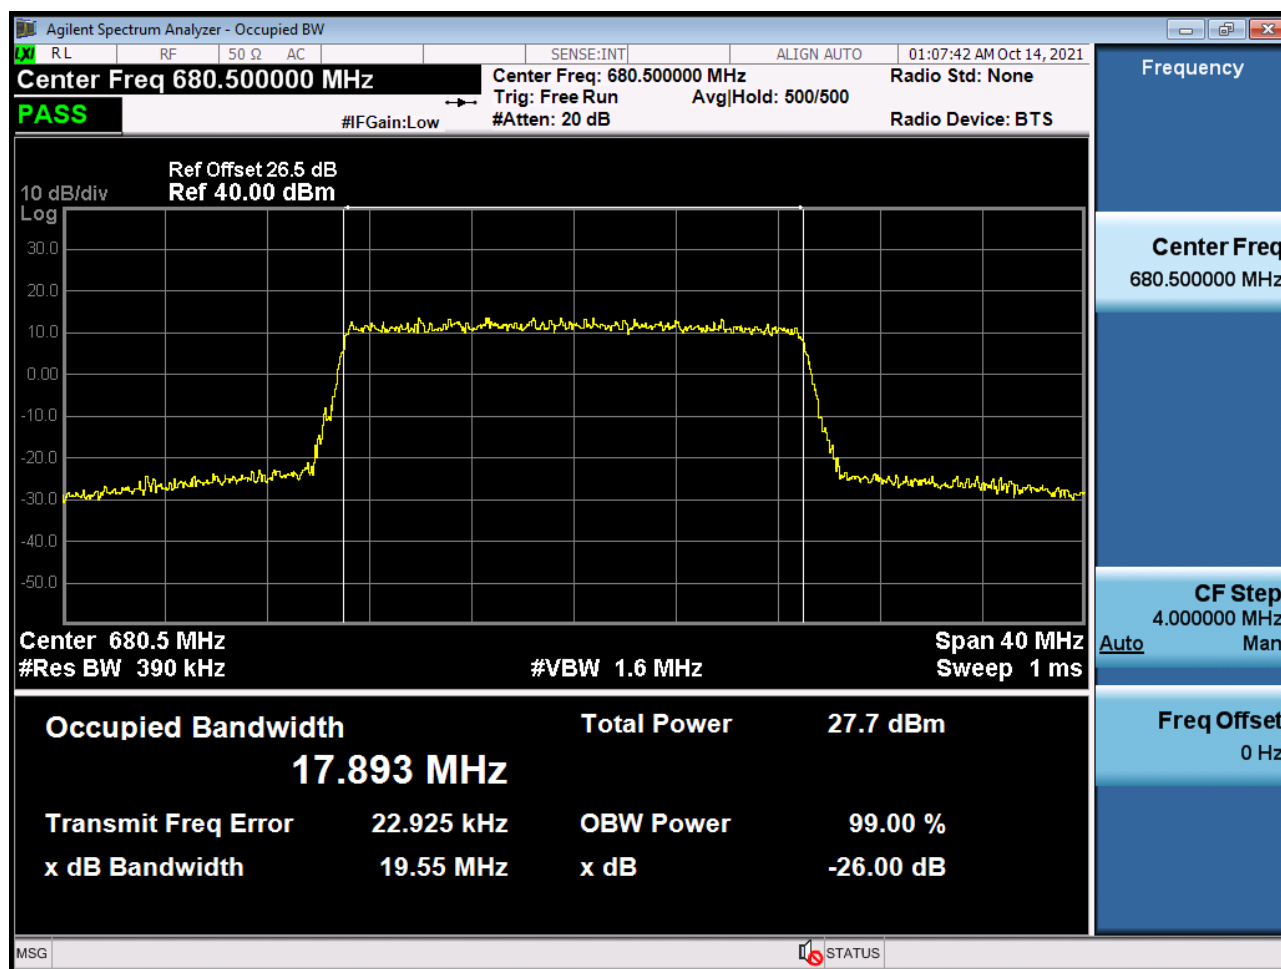

BAND 71. Lower Band Edge Plot (5 M BW Ch.133147 QPSK_RB1_Offset 0)

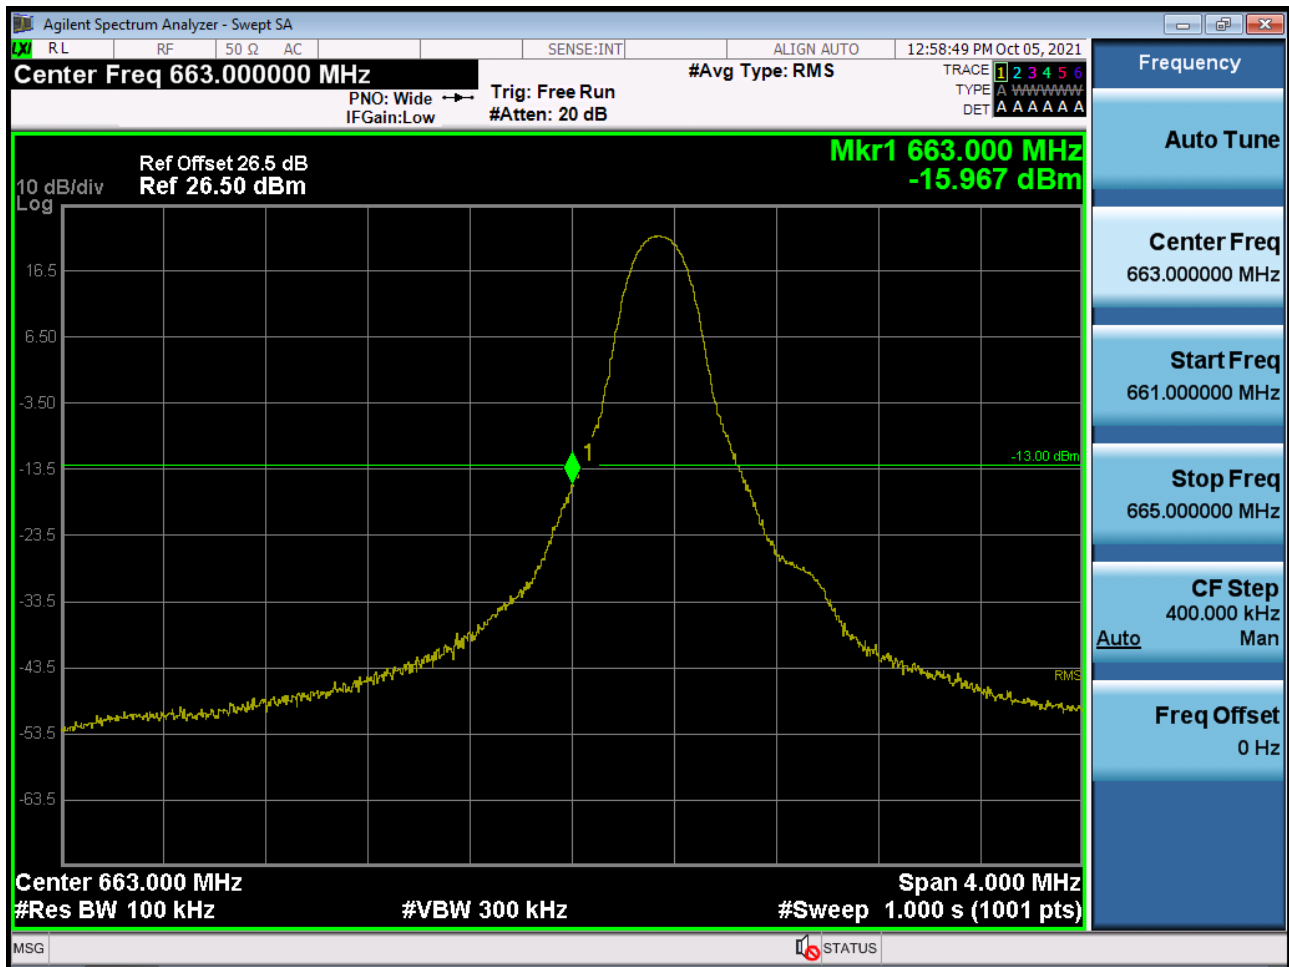

BAND 71. Lower Band Edge Plot (5 M BW Ch.133147 QPSK_RB6_Offset 0)



BAND 71. Lower Extended Band Edge Plot (5 M BW Ch.133147 QPSK_RB6_0)



BAND 71. Lower Band Edge Plot (10 M BW Ch.133172 QPSK_RB1_Offset 0)




BAND 71. Lower Band Edge Plot (10 M BW Ch.133172 QPSK_RB15_Offset 0)




BAND 71. Lower Extended Band Edge Plot (10 M BW Ch.133172 QPSK_RB15_0)



BAND 71. Lower Band Edge Plot (15 M BW Ch.133197 QPSK_RB1_Offset 0)

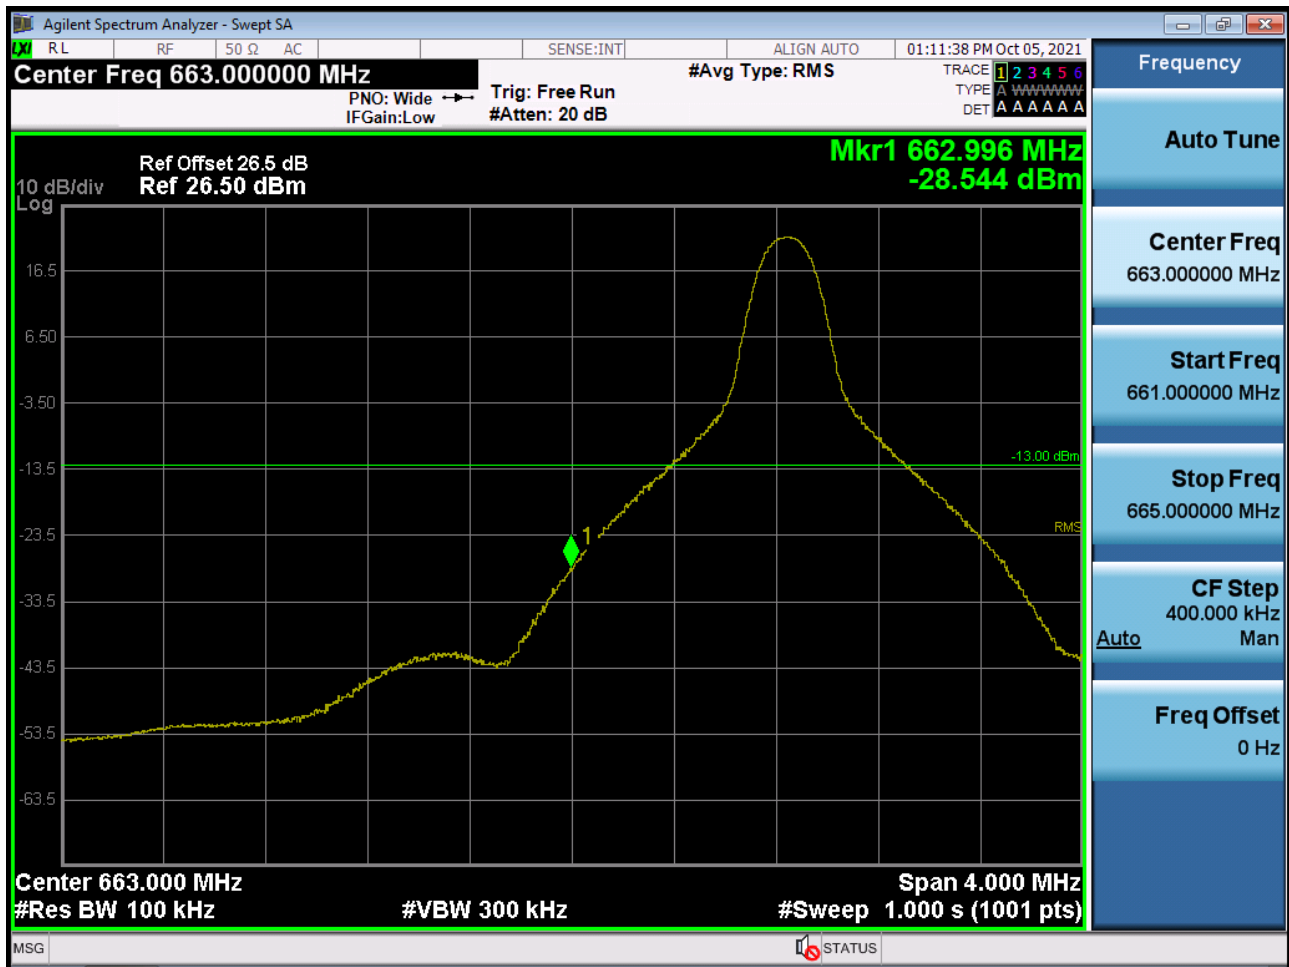

BAND 71. Lower Band Edge Plot (15 M BW Ch.133197 QPSK_RB25_Offset 0)

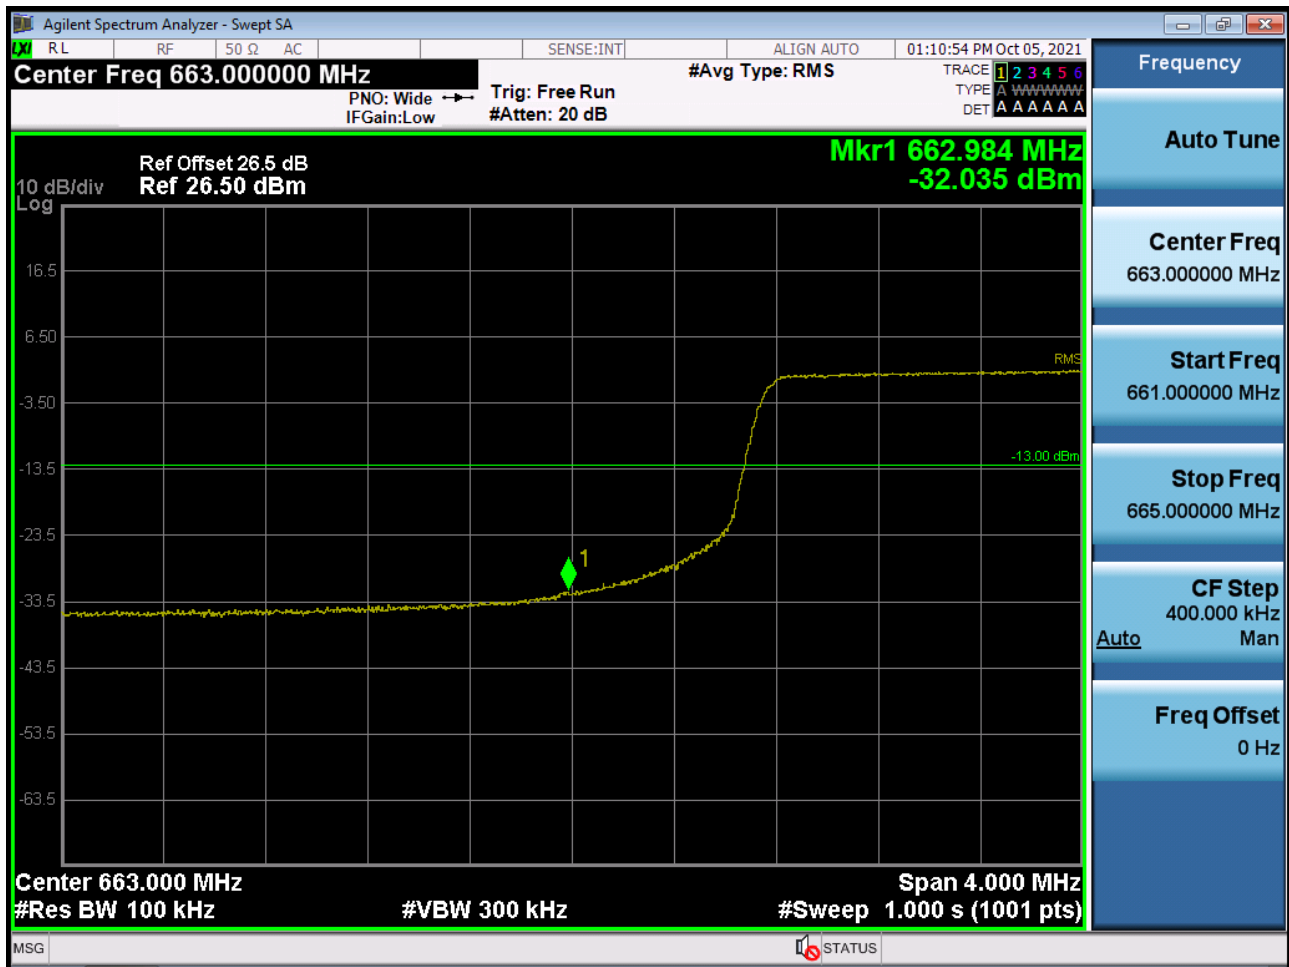

BAND 71. Lower Extended Band Edge Plot (15 M BW Ch.133197 QPSK_RB25_0)



BAND 71. Lower Band Edge Plot (20 M BW Ch.133222 QPSK_RB1_Offset 0)




BAND 71. Lower Band Edge Plot (20 M BW Ch.133222 QPSK_RB50_Offset 0)



BAND 71. Lower Extended Band Edge Plot (20 M BW Ch.133222 QPSK_RB50_0)



BAND 71. Upper Band Edge Plot (5 M BW Ch.133447 QPSK_RB1_Offset 5)

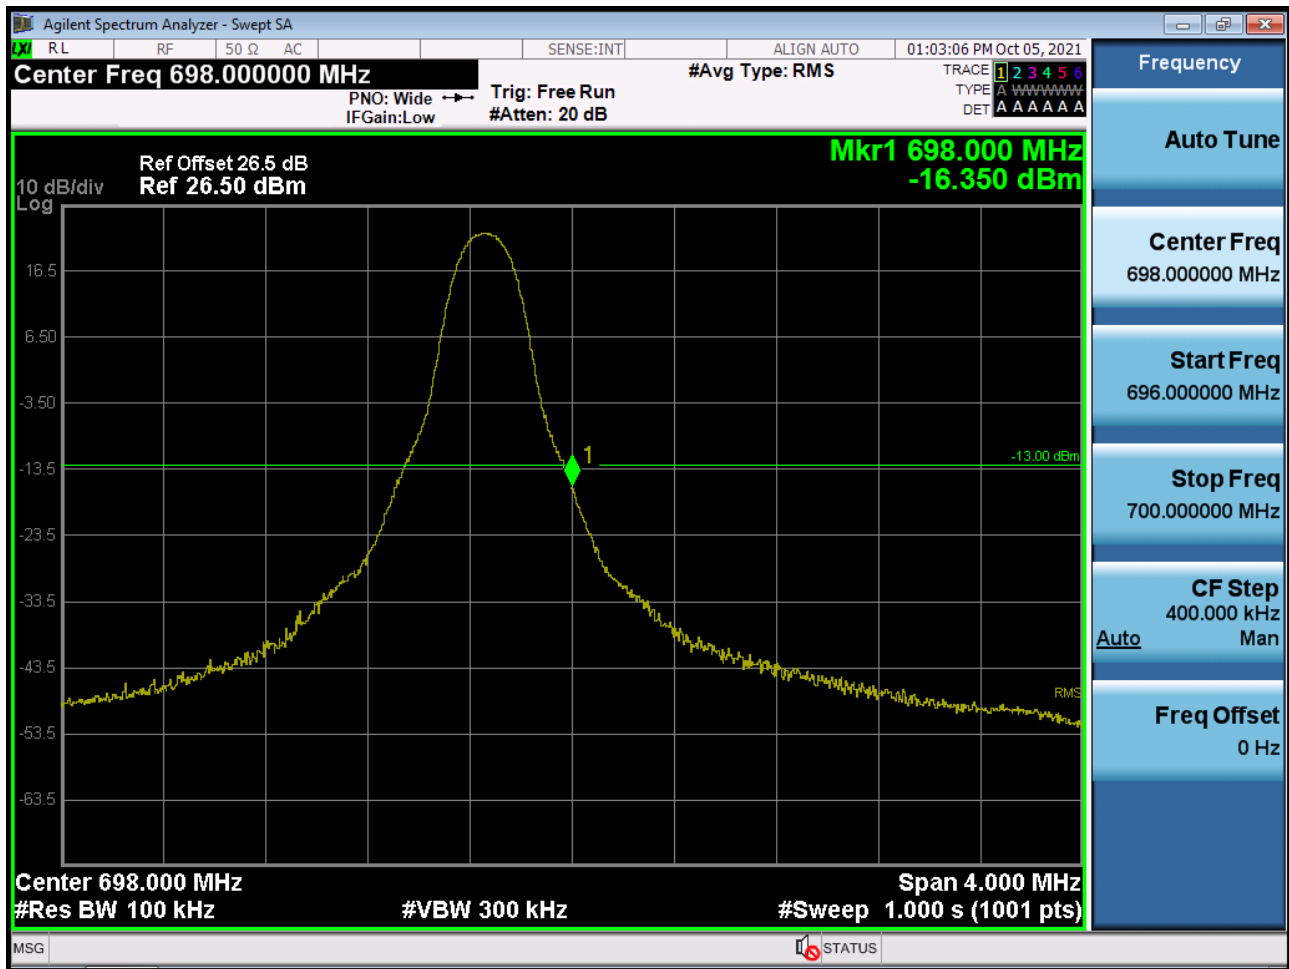

BAND 71. Upper Band Edge Plot (5 M BW Ch.133447 QPSK_RB1_Offset 5)



BAND 71. Upper Extended Band Edge Plot (5 M BW Ch.133447 QPSK_RB6_0)



BAND 71. Upper Band Edge Plot (10 M BW Ch.133422 QPSK_RB1_Offset 14)



BAND 71. Upper Band Edge Plot (10 M BW Ch.133422 QPSK_RB1_Offset 14)



BAND 71. Upper Extended Band Edge Plot (10 M BW Ch.133422 QPSK_RB15_0)




BAND 71. Upper Band Edge Plot (15 M BW Ch.133397 QPSK_RB1_Offset 24)



BAND 71. Upper Band Edge Plot (15 M BW Ch.133397 QPSK_RB25_Offset 0)



BAND 71. Upper Extended Band Edge Plot (15 M BW Ch.133397 QPSK_RB25_0)

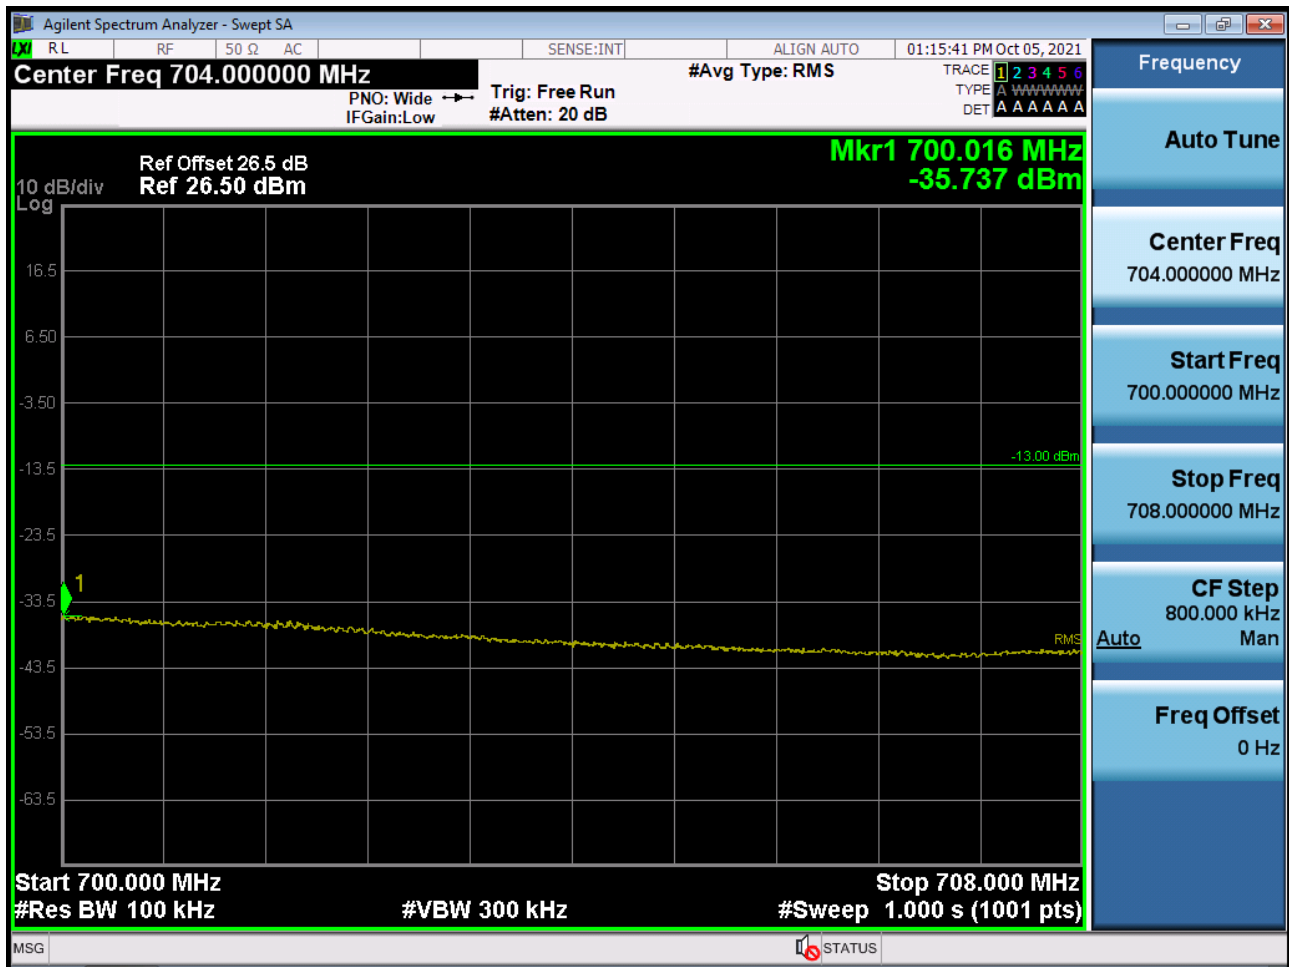


BAND 71. Upper Band Edge Plot (20 M BW Ch.133372 QPSK_RB1_Offset 49)




BAND 71. Upper Band Edge Plot (20 M BW Ch.133372 QPSK_RB50_Offset 0)




BAND 71. Upper Extended Band Edge Plot (20 M BW Ch.133372 QPSK_RB50_0)

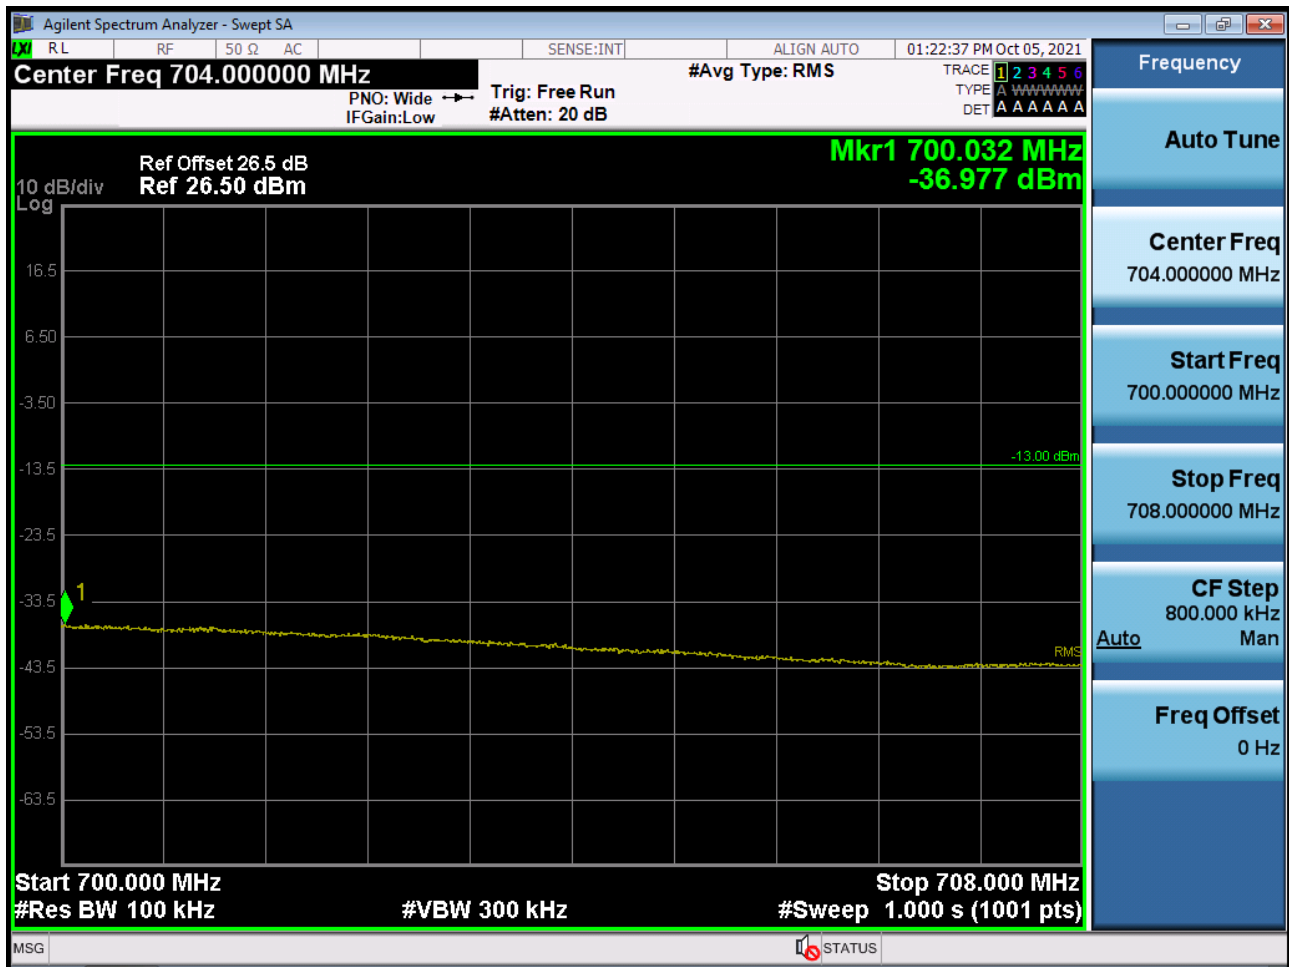


BAND 71. Conducted Spurious Plot _ (133147ch_5 MHz_QPSK_RB 1_0)

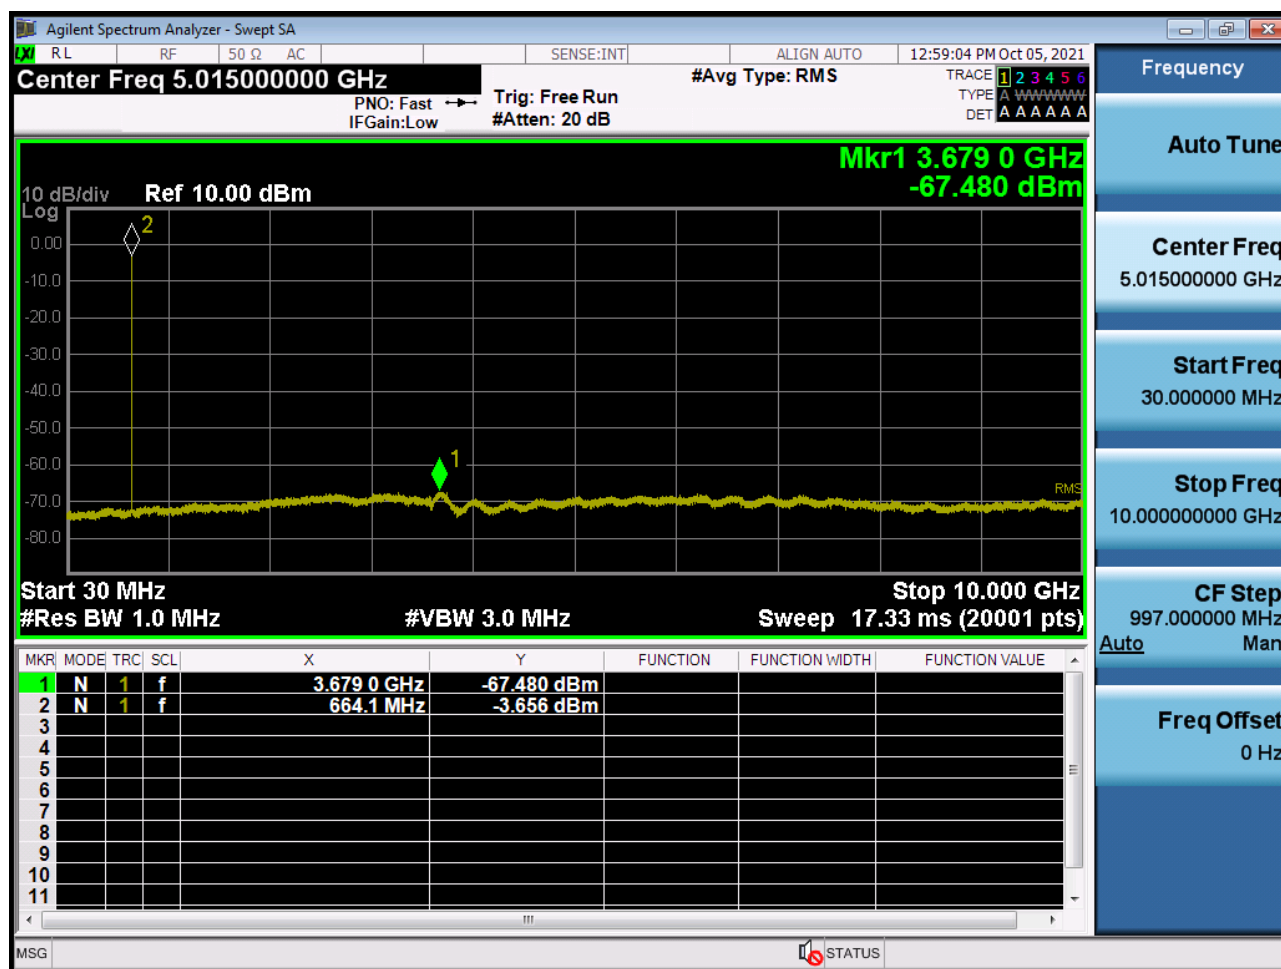


BAND 71. Conducted Spurious Plot _ (133297ch_5 MHz_QPSK_RB 1_0)

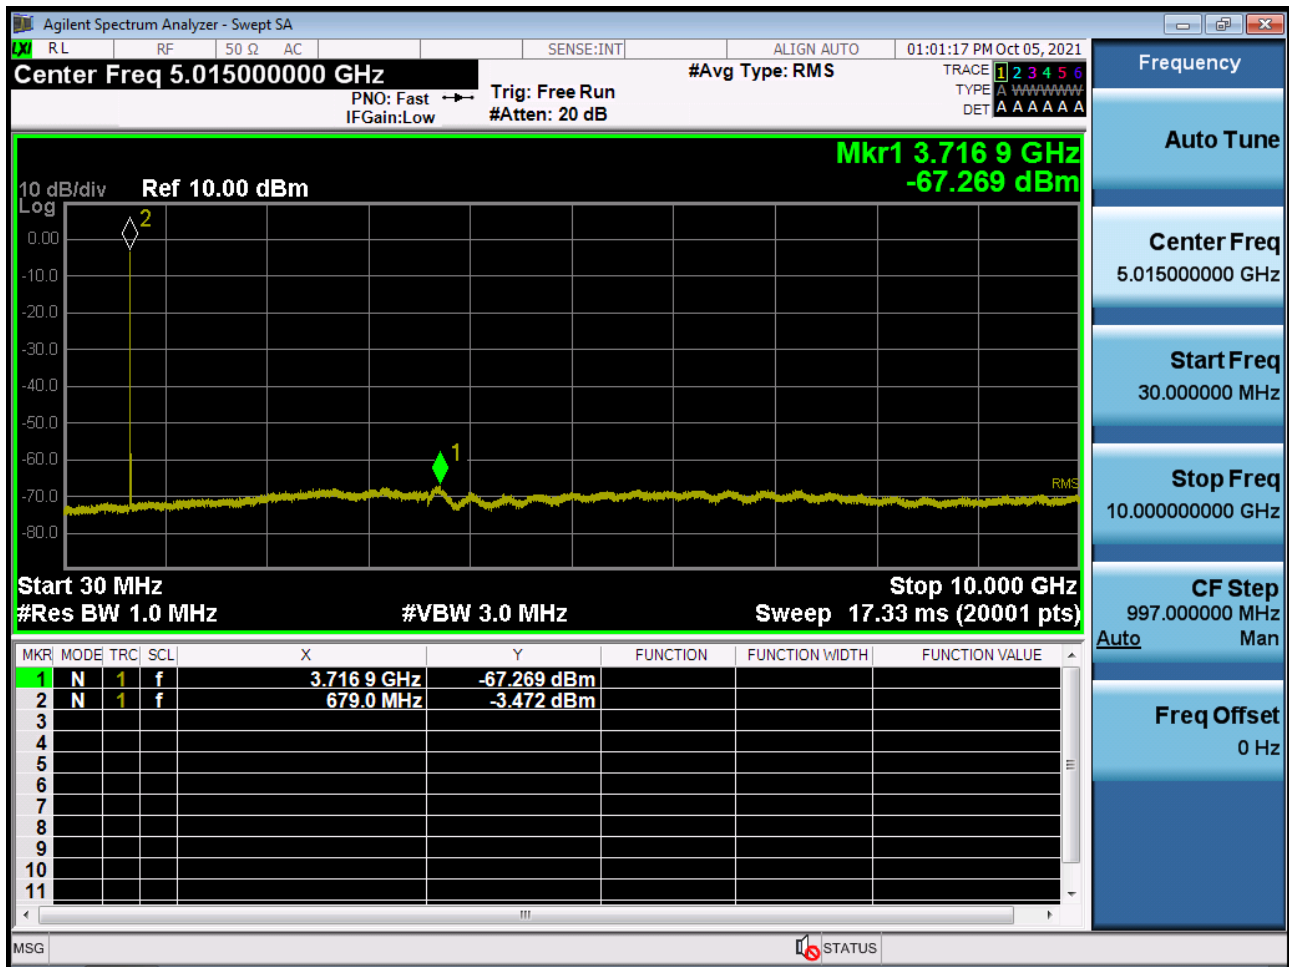


BAND 71. Conducted Spurious Plot _ (133447ch_5 MHz_QPSK_RB 1_0)

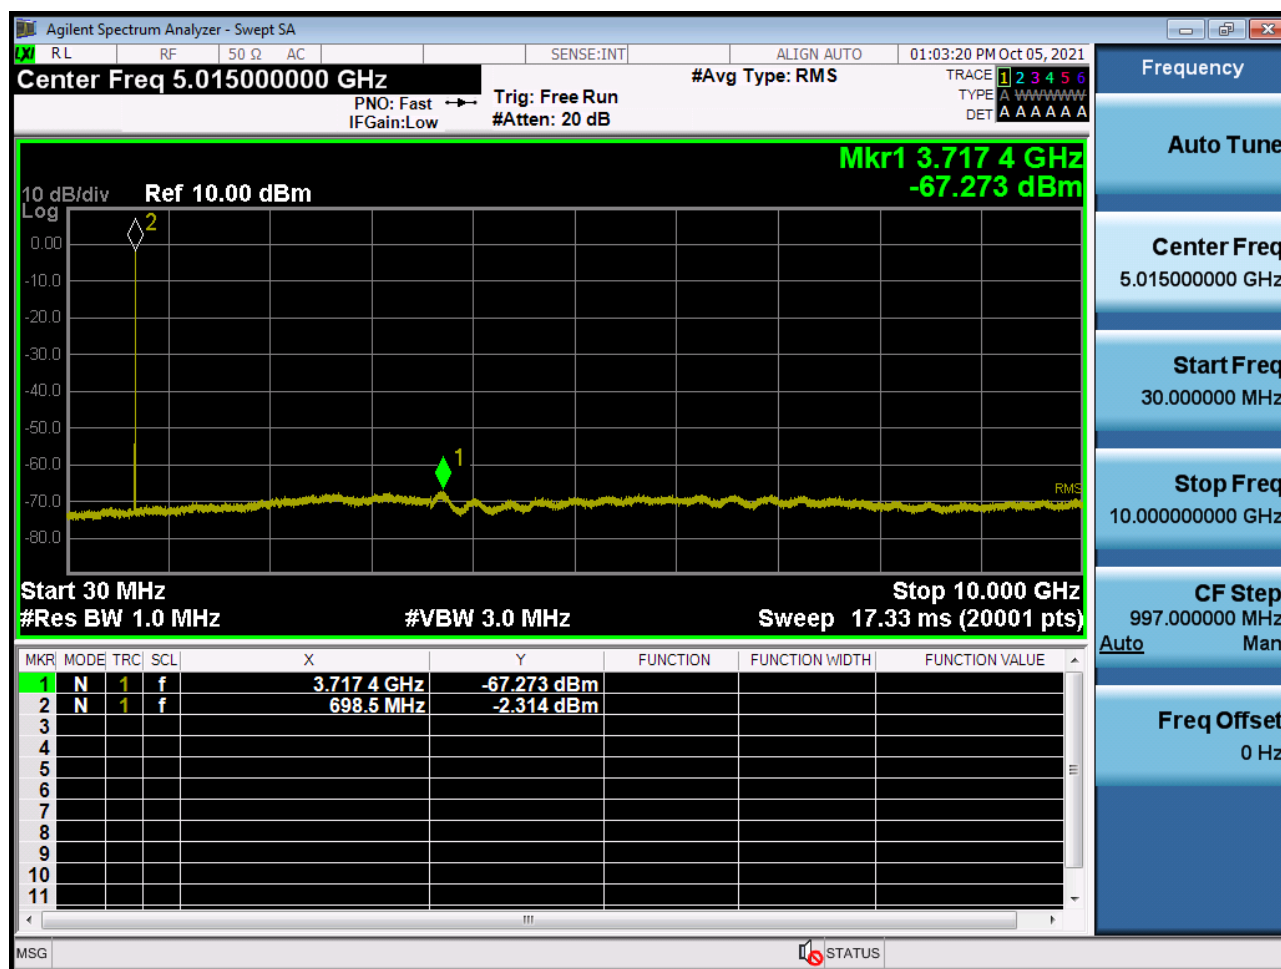


BAND 71. Conducted Spurious Plot _ (133172ch_10 MHz_QPSK_RB 1_0)

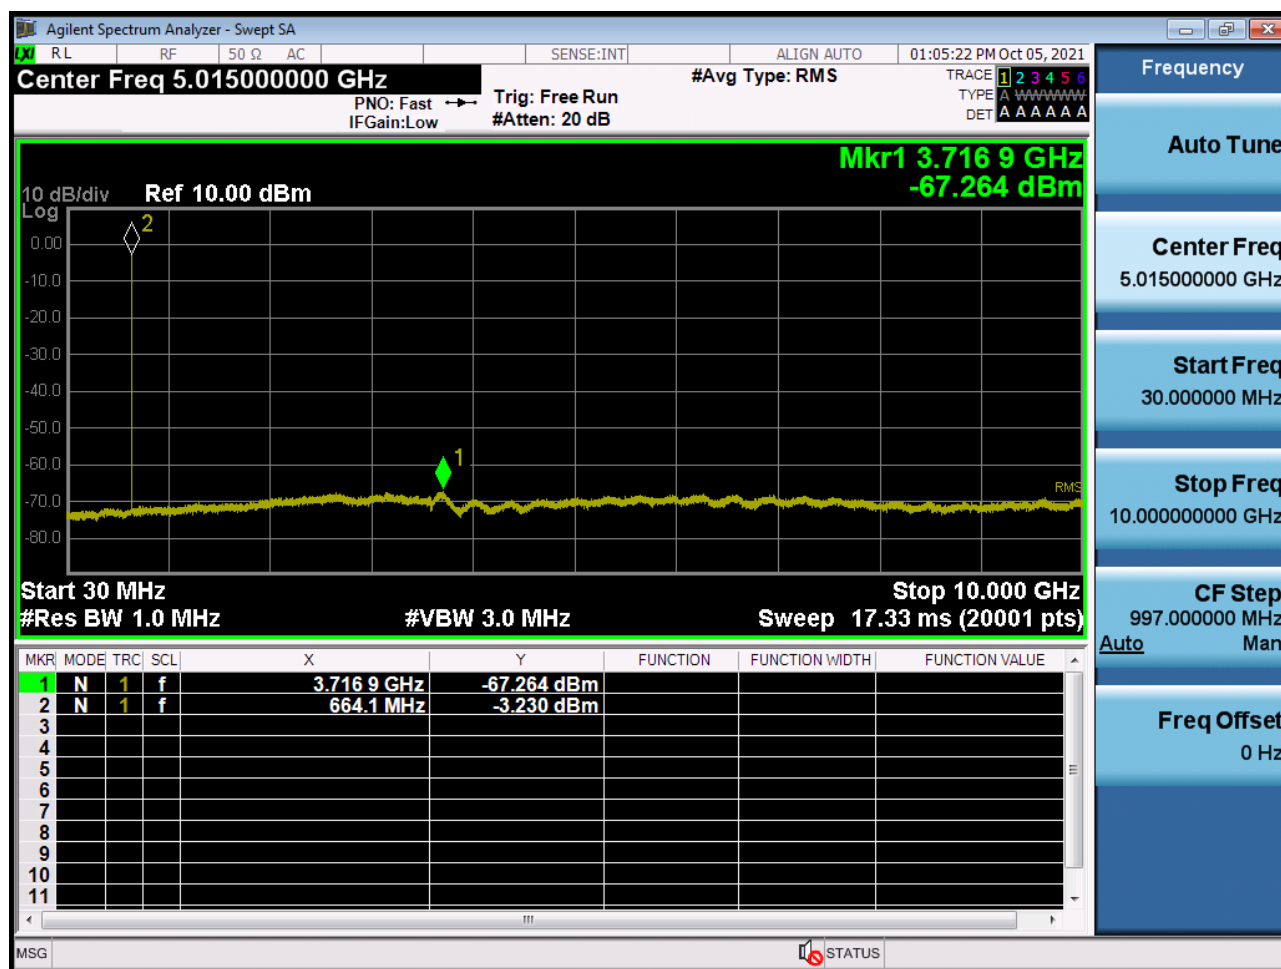


BAND 71. Conducted Spurious Plot _ (133297ch_10 MHz_QPSK_RB 1_0)

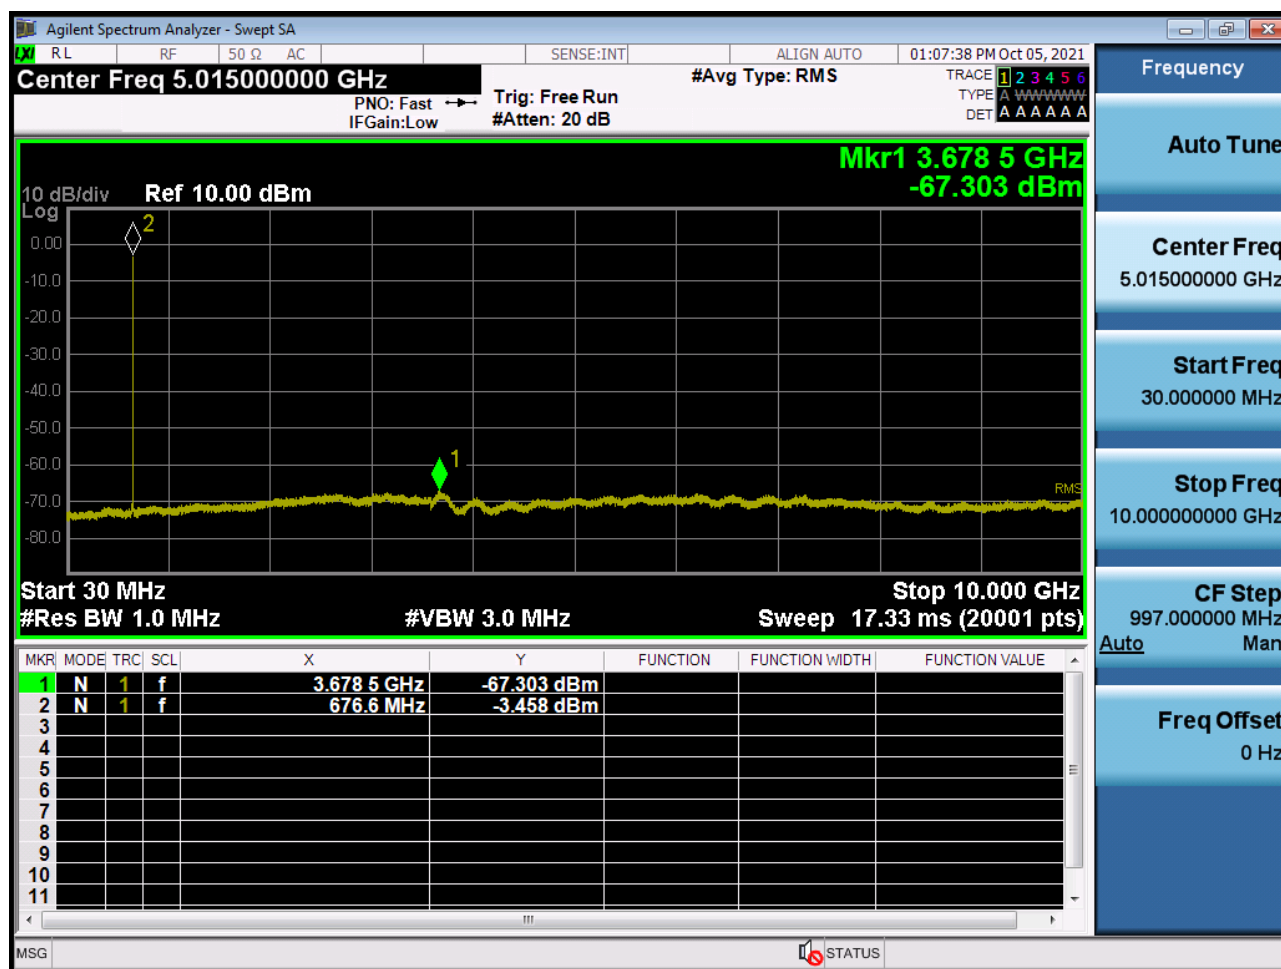


BAND 71. Conducted Spurious Plot _ (133422ch_10 MHz_QPSK_RB 1_0)

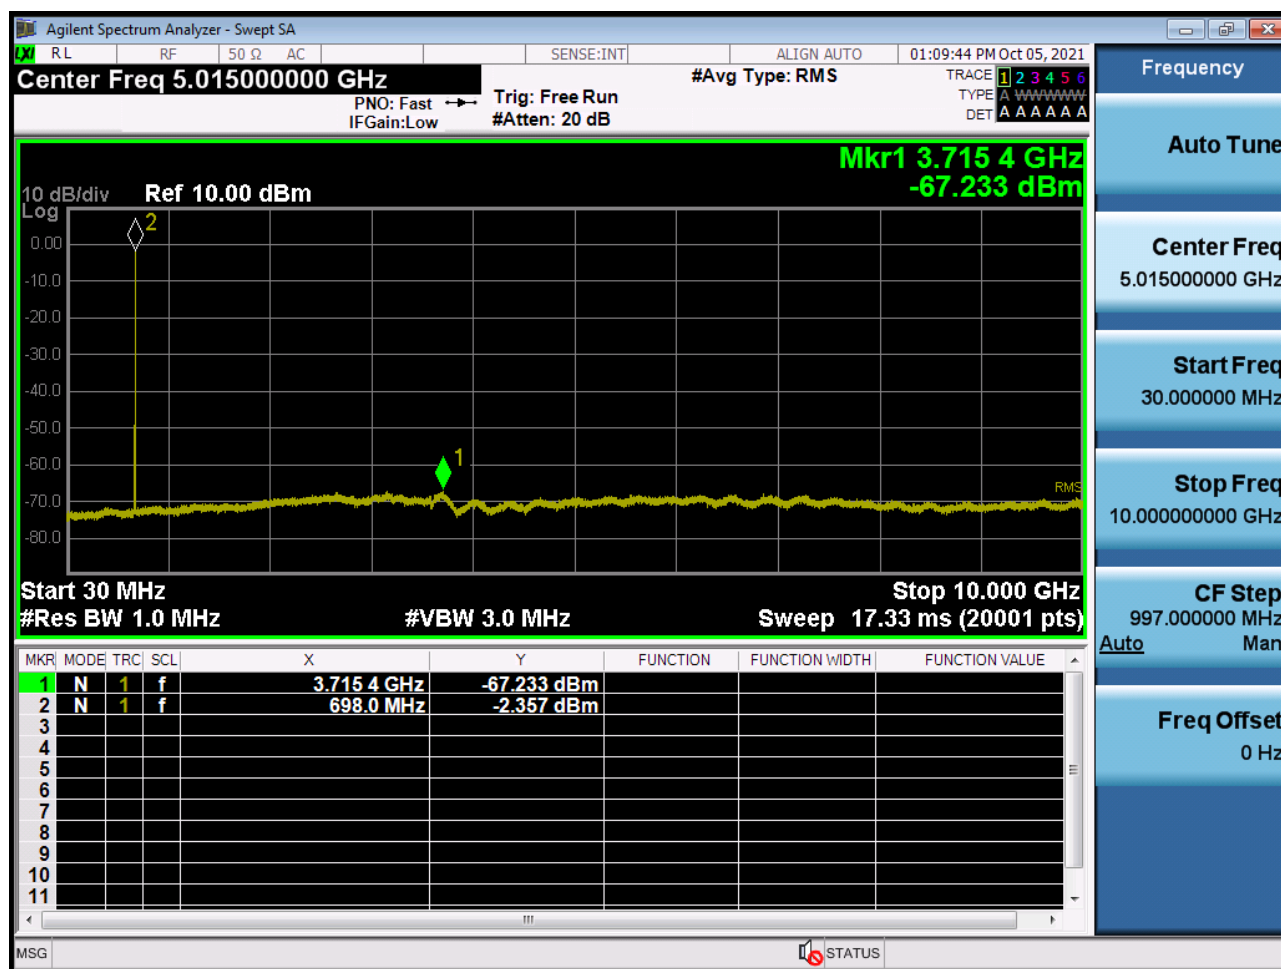


BAND 71. Conducted Spurious Plot _ (133197ch_15 MHz_QPSK_RB 1_0)

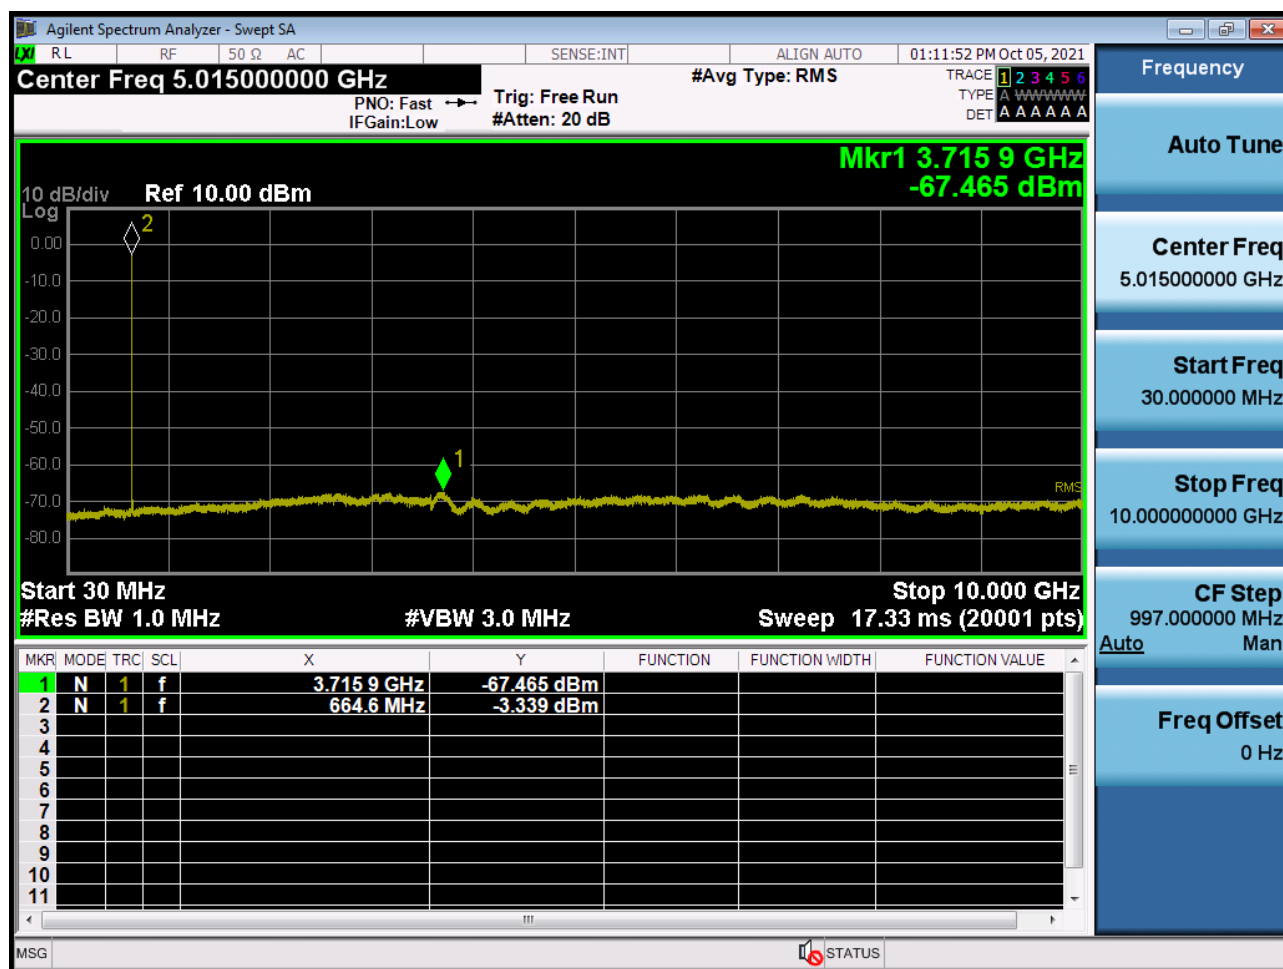


BAND 71. Conducted Spurious Plot _ (133297ch_15 MHz_QPSK_RB 1_0)

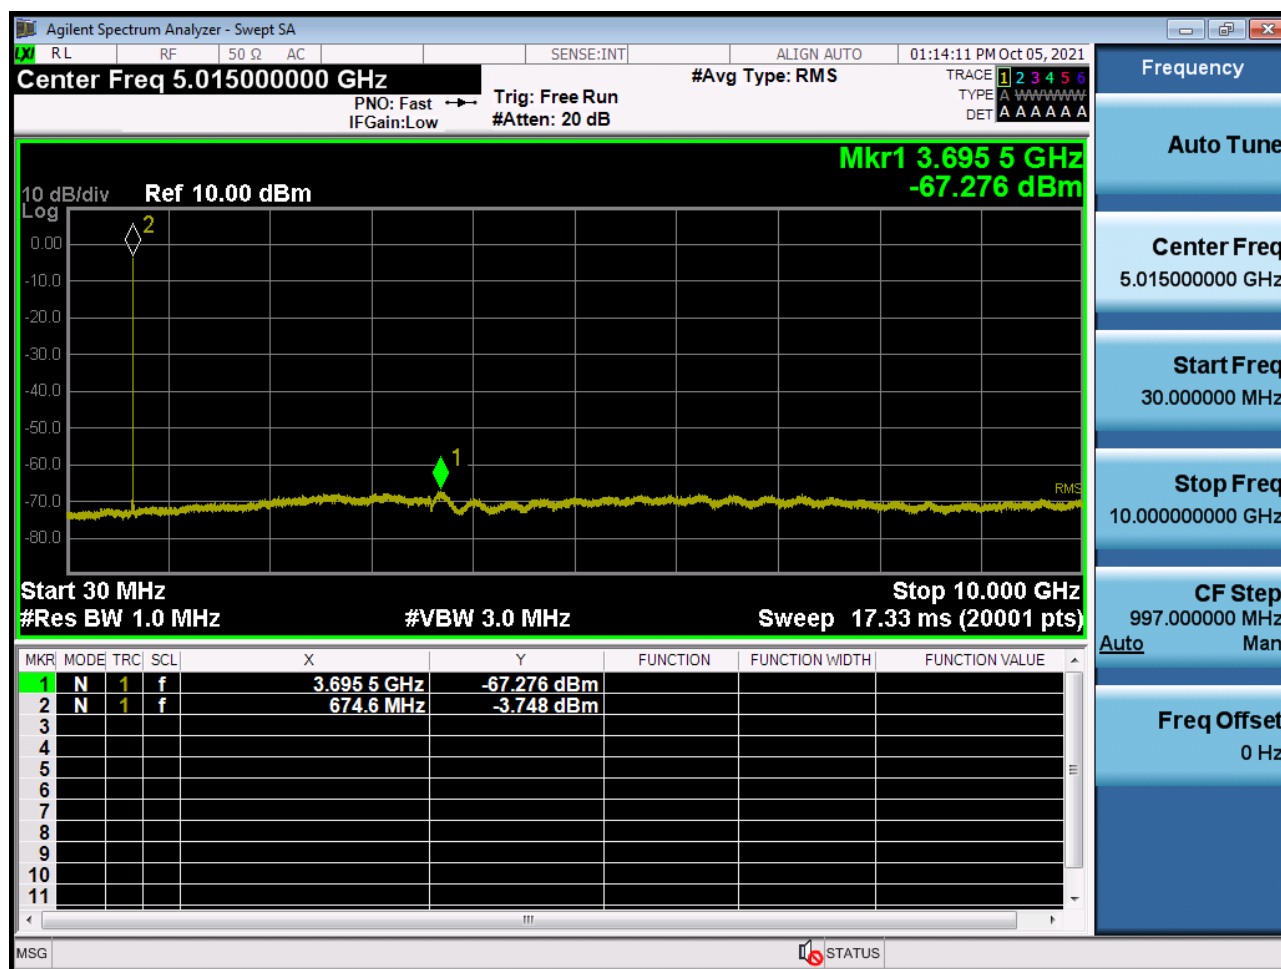


BAND 71. Conducted Spurious Plot _ (133397ch_15 MHz_QPSK_RB 1_0)

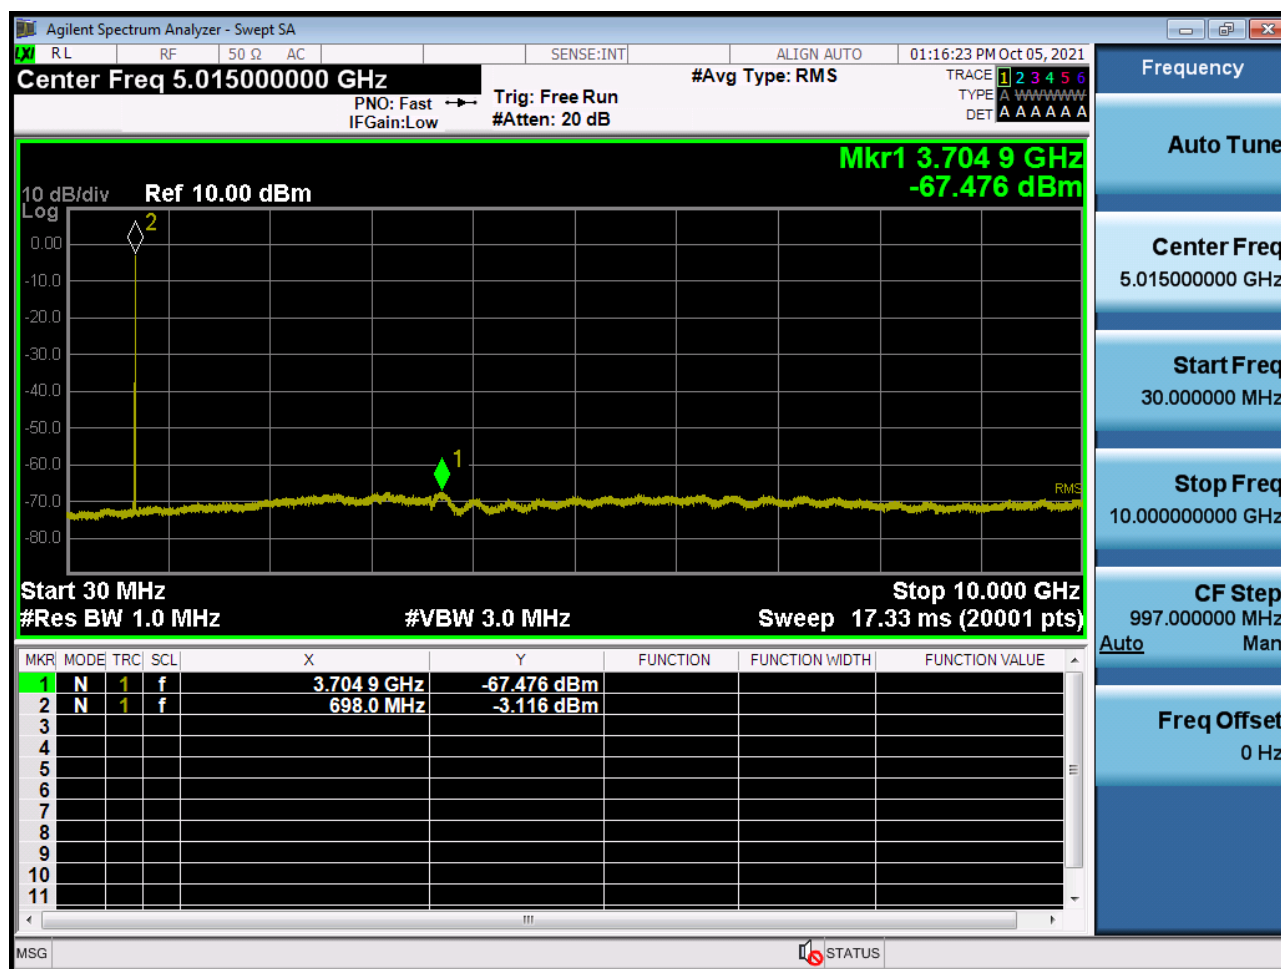


BAND 71. Conducted Spurious Plot _ (133222ch_20 MHz_QPSK_RB 1_0)

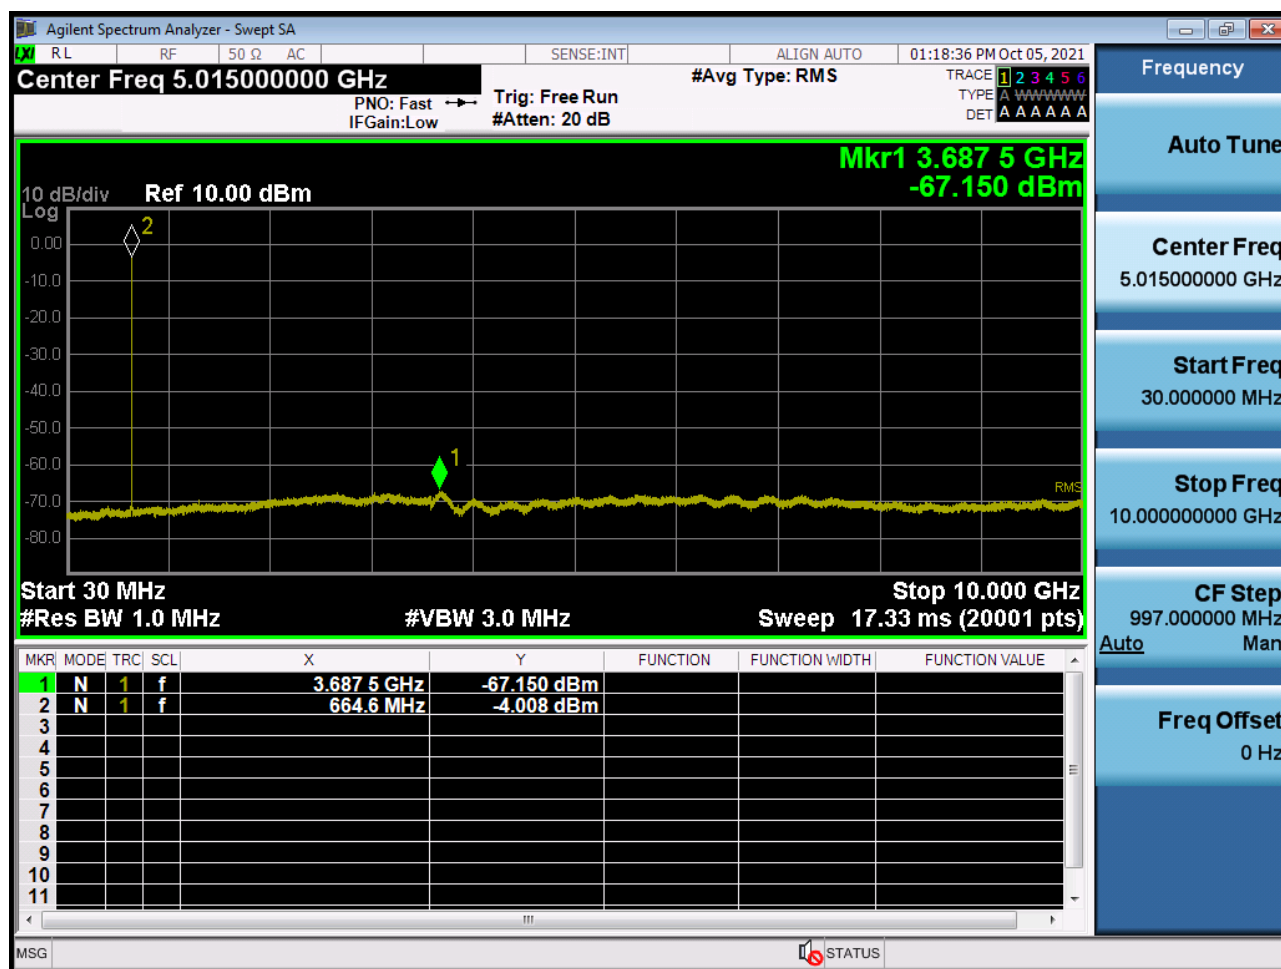

BAND 71. Conducted Spurious Plot _ (133297ch_20 MHz_QPSK_RB 1_0)

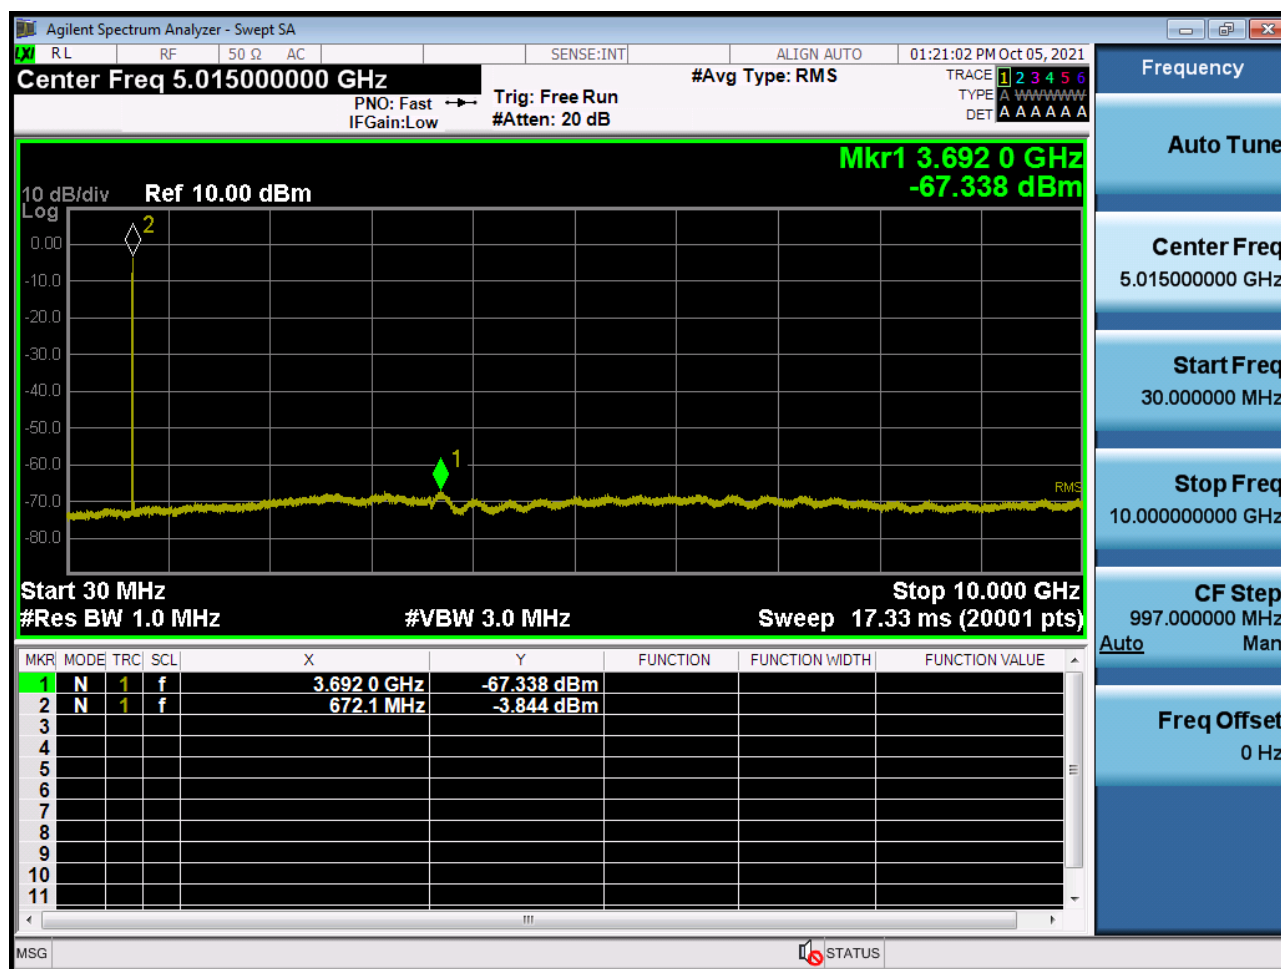

BAND 71. Conducted Spurious Plot _ (133372ch_20 MHz_QPSK_RB 1_0)

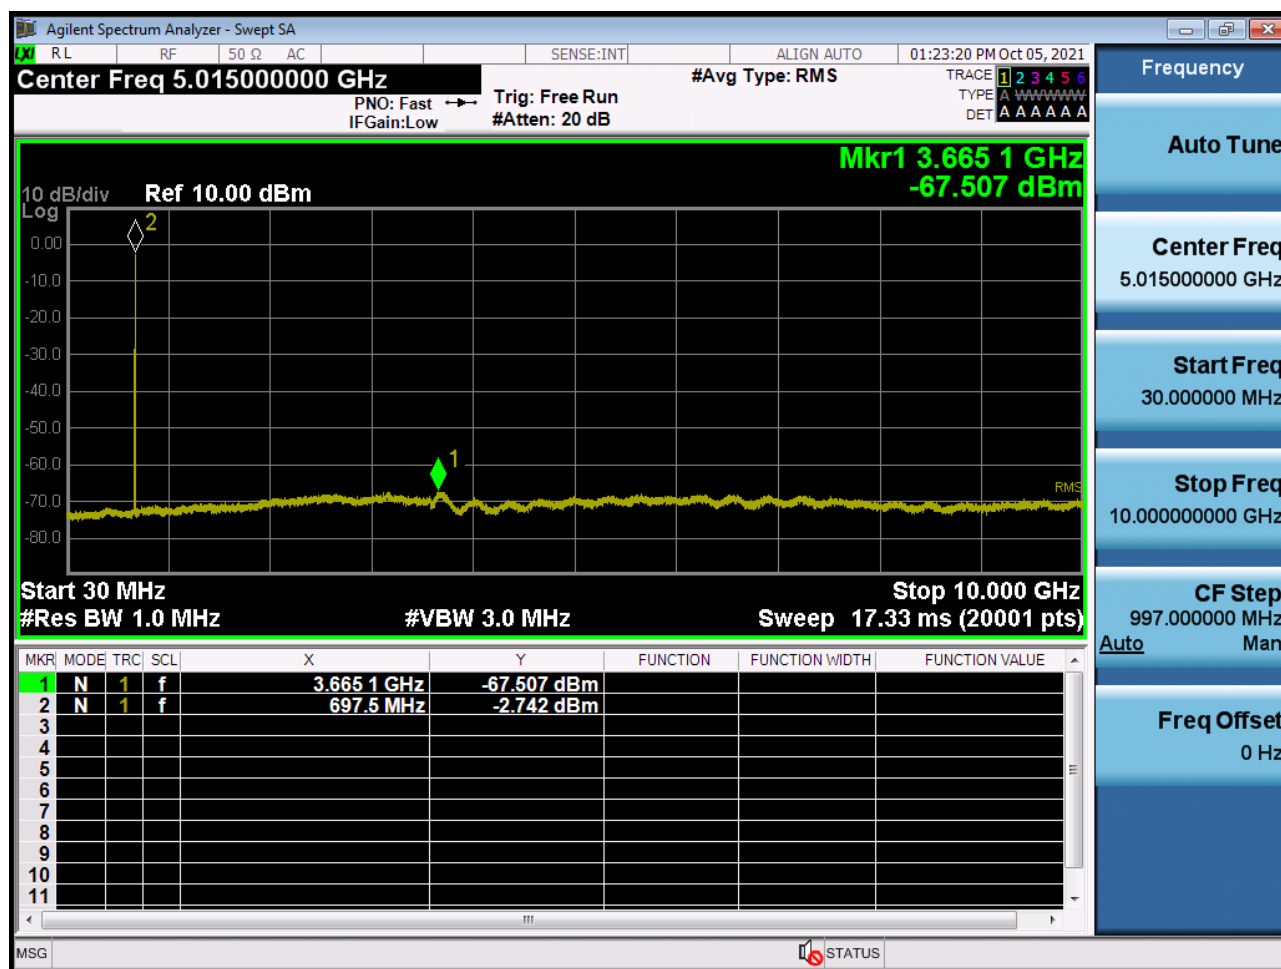

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2111-FC047-P