

Certification Test Report

FCC ID: AZ492FT7089
IC: 109U-92FT7089

FCC Rule Part: 15.247
ISED Canada Radio Standards Specification: RSS-247

ACS Report Number: 16-2041.W06.2C

Applicant: Motorola Solutions
Model(s): M37TSS9PW1AN

Test Begin Date: **August 11, 2016**
Test End Date: **September 2, 2016**

Report Issue Date: November 8, 2016



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:



Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.

Reviewed by:



Ryan McGann
Wireless Program Manager
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 58 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose	3
1.2	Applicant Information	3
1.3	Product Description	3
1.4	Test Methodology and Considerations	3
2	TEST FACILITIES	5
2.1	Location	5
2.2	Laboratory Accreditations/Recognitions/Certifications	5
2.3	Radiated & Conducted Emissions Test Site Description	6
2.3.1	Semi-Anechoic Chamber Test Site	6
2.3.2	Conducted Emissions Test Site Description	7
3	APPLICABLE STANDARD REFERENCES	8
4	LIST OF TEST EQUIPMENT	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....	11
7	SUMMARY OF TESTS	12
7.1	Antenna Requirement – FCC: Section 15.203.....	12
7.2	6 dB Bandwidth - FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(1); 99% Bandwidth ISED Canada: RSS-GEN 6.6.....	12
7.2.1	Measurement Procedure	12
7.2.2	Measurement Results.....	12
7.3	Fundamental Emission Output Power - FCC Section 15.247(b)(3); ISED Canada: RSS-247 5.4(4)	24
7.3.1	Measurement Procedure (Conducted Method).....	24
7.3.2	Measurement Results.....	24
7.4	Band-Edge and Spurious Emissions	30
7.4.1	Band-Edge Compliance of RF Conducted Emissions - FCC Section 15.247(d); ISED Canada: RSS-247 5.5	30
7.4.2	RF Conducted Spurious Emissions - FCC Section 15.247(d); ISED Canada: RSS-247 5.5	34
7.4.3	Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; ISED Canada: RSS-Gen 8.9, 8.10.....	44
7.5	Power Spectral Density - FCC Section 15.247(e); ISED Canada: RSS-247 5.2(2)	47
7.5.1	PSD Measurement Procedure (Conducted Method)	47
7.5.2	Measurement Results.....	47
7.6	Duty Cycle	53
7.6.1	Measurement Procedure	53
7.6.2	Measurement Results.....	53
7.7	Power Line Conducted Emissions – FCC: Section 15.207 ISED Canada: RSS-Gen 8.8.....	55
7.7.1	Measurement Procedure	55
7.7.2	Measurement Results.....	55
8	CONCLUSION.....	58

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-247.

1.2 Applicant Information

Motorola Solutions
8000 West Sunrise Blvd
Sunrise, FL 33322

1.3 Product Description

The Motorola Solutions, Inc, APX8500 model M37TSS9PW1AN is a two-way mobile radio, which supports multiple land mobile radio bands such as VHF, UHF and 7/800 MHz. Additionally, the equipment provides 2.4 GHz IEEE 802.11b/g/n Wi-Fi as well as a Bluetooth Classic and Bluetooth Low Energy (BLE) capabilities. The test report documents the evaluation of the Wi-Fi transceiver.

Technical Details

Mode of Operation:	WLAN IEEE 802.11b/g/n
Frequency Range:	802.11b/g/n 20 MHz: 2412 MHz - 2462 MHz
Number of Channels:	11
Channel Separation:	5 MHz
Modulations:	802.11b: DSSS 802.11b/n: OFDM
Antenna Type/Gain:	Monopole, 5.15 dBi
Input Power:	15 VDC Power Supply

Model Number: M37TSS9PW1AN

Test Sample Serial Number(s): AM3C573

Test Sample Condition: The equipment was provided in good condition without any physical damage.

1.4 Test Methodology and Considerations

The EUT was evaluated for radiated, power line and RF conducted measurements for all three modes of operation of the WLAN radio. The channels and data rates used for the evaluation are provided below. Where applicable, the worst case result is provided.

For the RF conducted measurements, the EUT was coupled to a spectrum analyzer to a QMA to SMA adapter and suitable attenuation.

The EUT was evaluated for radiated emissions up to the 10th harmonic of the fundamental frequency in the orientation of typical installation. A counterpoise of 1m diameter was provided for the evaluation.

The EUT was assessed for power line conducted emissions in the TX mode. The modulation leading to the worst case results is provided in this document.

The EUT was also investigated for unintentional emissions. The results are documented separately in a verification test report.

Table 1.4-1: IEEE 802.11b/g/n Radio Test Configuration

Mode of Operation	Frequency (MHz)	Channel	Test Software Power Setting	Data Rate Setting
802.11b	2412	1	18 dBm	1 Mbps
	2437	6		
	2462	11		
802.11g	2412	1	13 dBm	6 Mbps
	2437	6		
	2462	11		
802.11n 20 MHz	2412	1	13 dBm	19.5 Mbps
	2437	6		
	2462	11		

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
www.acstestlab.com

FCC Test Firm Registration #: 475089
Innovation, Science and Economic Development Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

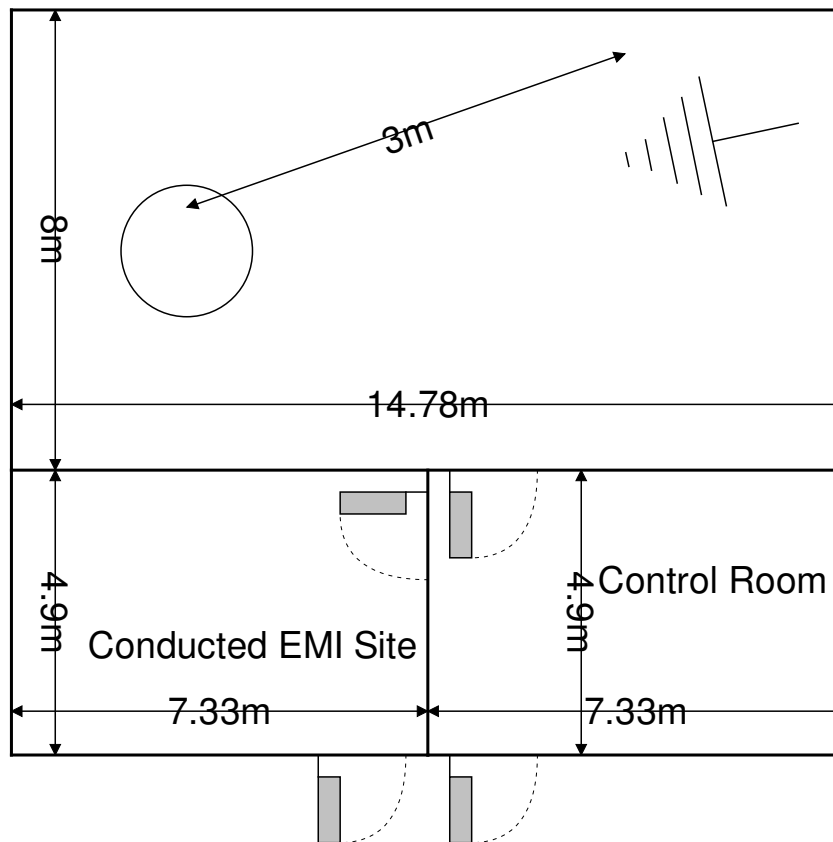


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m³. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

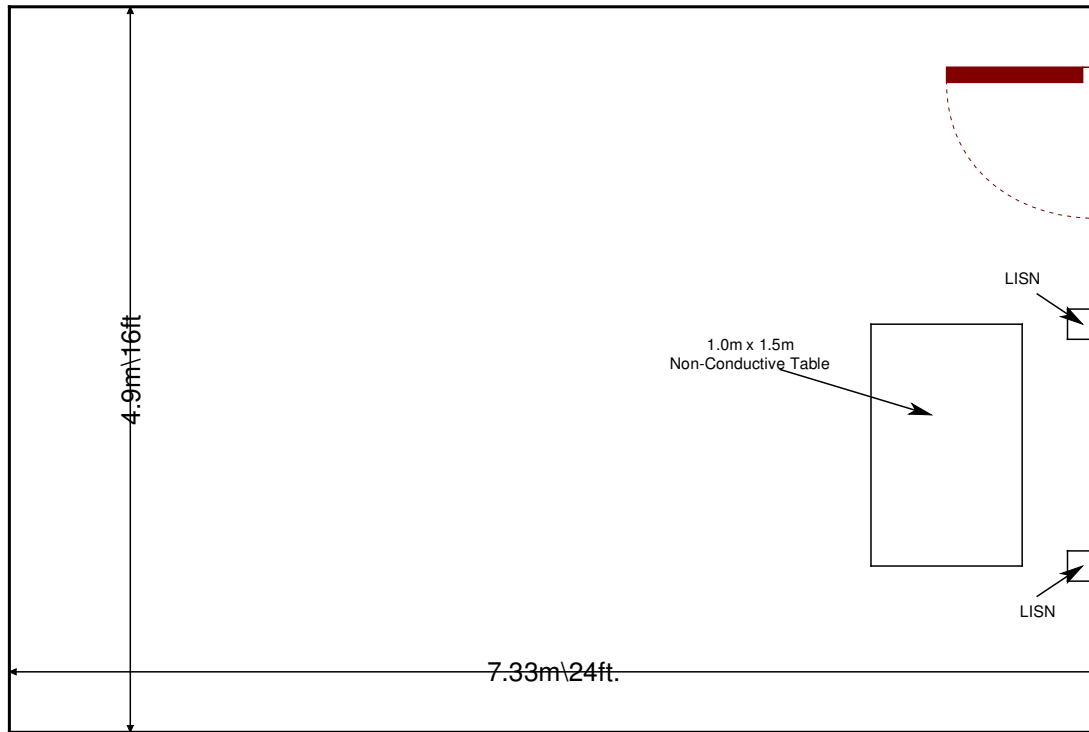


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v03r05 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 8, 2016.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
78	EMCO	6502	Antennas	9104-2608	5/11/2016	5/11/2018
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	7/21/2016	7/21/2018
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
653	Suhner	SF-102A	Cables	0944/2A	9/15/2015	9/15/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/14/2015	4/14/2017
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/18/2015	11/18/2016
2022	EMCO	LISN3825/2R	LISN	1095	9/14/2015	9/14/2017
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	11/11/2015	11/11/2016
2070	Mini Circuits	VHF-8400+	Filter	2070	11/17/2015	11/17/2016
2072	Mini Circuits	VHF-3100+	Filter	30737	11/17/2015	11/17/2016
2082	Teledyne Storm Products	90-010-048	Cables	2082	4/21/2016	4/21/2017
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	11/16/2015	11/16/2016
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/9/2015	12/9/2016
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2111	Aeroflex Inmet	40AH2W-20	Attenuator	2111	7/20/2016	7/20/2017
2112	Teledyne Storm Products	921-0101-036	Cables	12-06-698	11/13/2015	11/13/2016
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/1/2016	8/1/2017
3004	Teseq	CFL 9206A	Attenuators	34720	10/7/2015	10/7/2016

Note: NCR=No Calibration Required

5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description


Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola	M37TSS9PW1AN	AM3C573
2	Microphone	Motorola	HMN1090A	N/A
3	Speaker	Motorola	HSN4038A	N/A
4	LMR Antenna	Motorola	AN000131A01	562948
5	WiFi/BT/GPS Antenna	Motorola	AN000163A01	N/A
6	15 VDC Power Supply	Motorola	PS000280A01	EB58704875
7	Laptop	DELL	Latitude D531	CN-0XM006-48643-789-2125
8	Laptop AC Adapter	DELL	LA65NS2-01	CN-06TM1C-72438-358- 218F-A01
9	Mouse	DELL	M-UARDEL7	LZ9440C43W5

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	USB	1.39 m	No	EUT to Laptop
B	Coil Microphone	3.05 m	No	EUT to Microphone
C	Audio	2.82 m	No	EUT to Speaker
D	Coaxial	5.12 m	Yes	LMR Antenna to EUT
E	Coaxial	5.08 m	Yes	Wi-Fi/BT Antenna to EUT
F	Coaxial	5.06 m	Yes	GPS Antenna to EUT
G	Power	1.17 m	No	EUT to 15 VDC Power Supply
H	Power	2.28 m	No	15 VDC Power Supply to extension Cord
I	Extension Power Cord	2.7 m	No	Power Cord to AC Mains
J	Ignition Wire	3.09 m	No	Not Terminated
K	USB	1.8 m	No	Laptop to Mouse
L	Power	1.85 m	No	Laptop to AC Adapter
M	Power	0.90 m	No	Laptop AC Adapter to AC Mains

Note: Item I was not used for the power line conducted emissions evaluation.

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

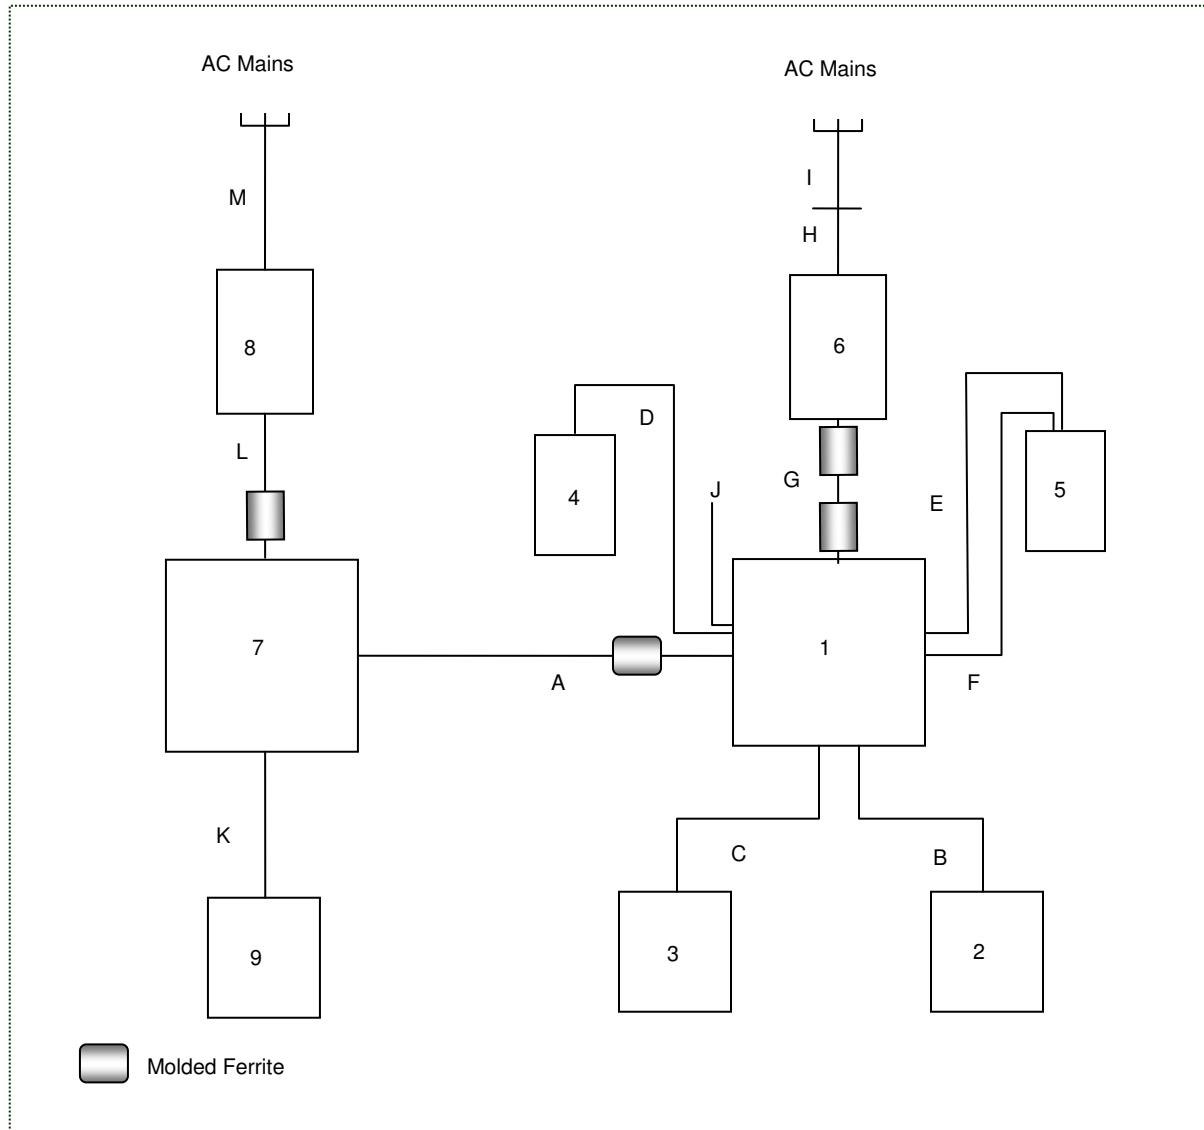

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT and the applicable 5.15 dBi monopole antenna use a QMA connector for the 2.4 GHz ISM radio. The antenna connector is unique thus meeting the requirements of FCC Section 15.203.

7.2 6 dB Bandwidth - FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(1); 99% Bandwidth ISED Canada: RSS-GEN 6.6

7.2.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r05 Section 8.1 Option 1. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the emissions and >> RBW.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using 99% bandwidth equipment function of the spectrum analyzer.


7.2.2 Measurement Results

Results are shown below.

802.11b


Table 7.2.2-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	10.0838	13.5625
2437	10.0950	13.5125
2462	10.1400	13.5188

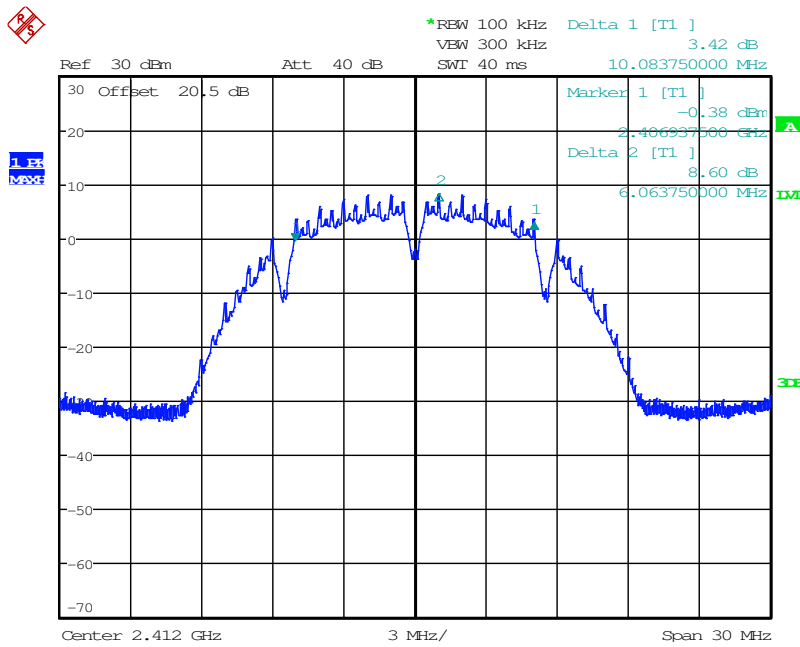


Date: 23.AUG.2016 14:42:31

Figure 7.2.2-1: 6dB BW - Low Channel

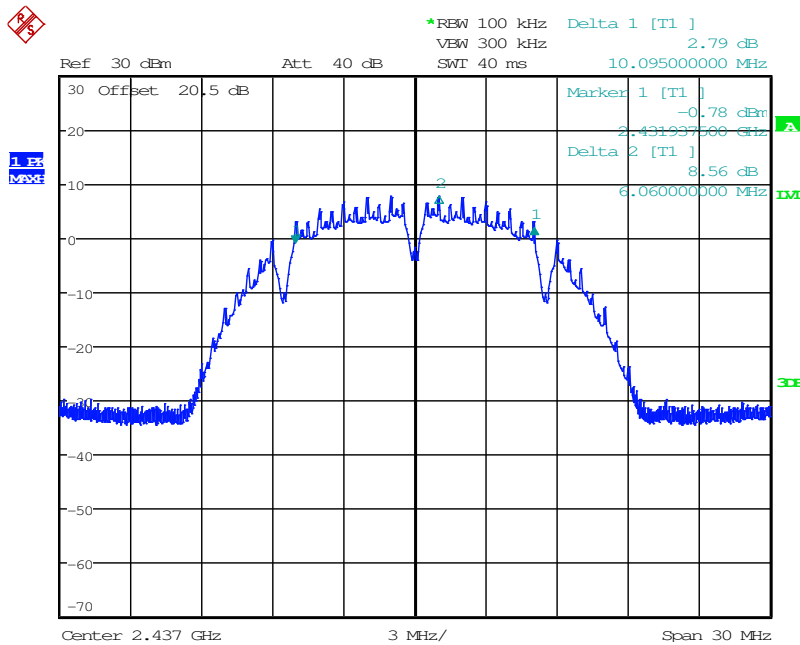


Date: 23.AUG.2016 14:56:35

Figure 7.2.2-2: 6dB BW - Middle Channel

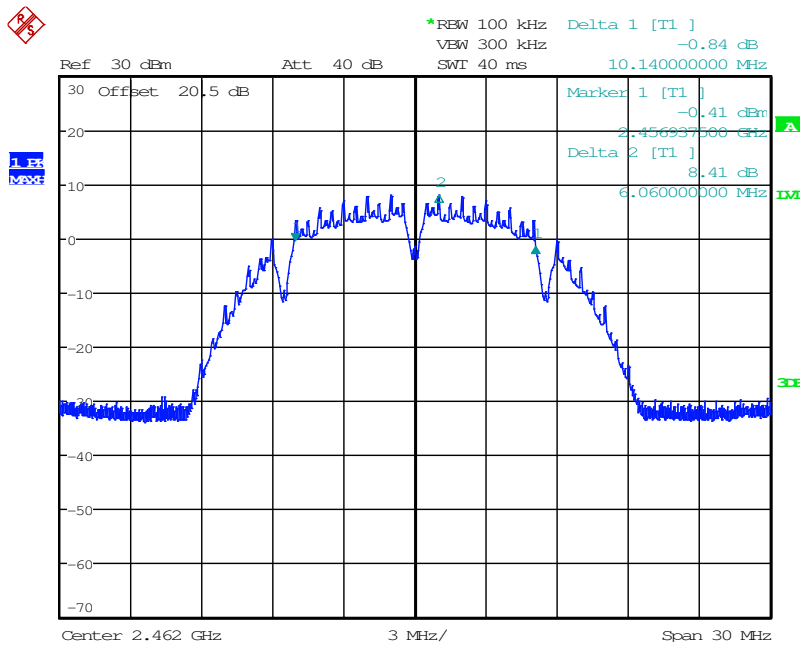


Date: 23.AUG.2016 15:12:23

Figure 7.2.2-3: 6dB BW - High Channel

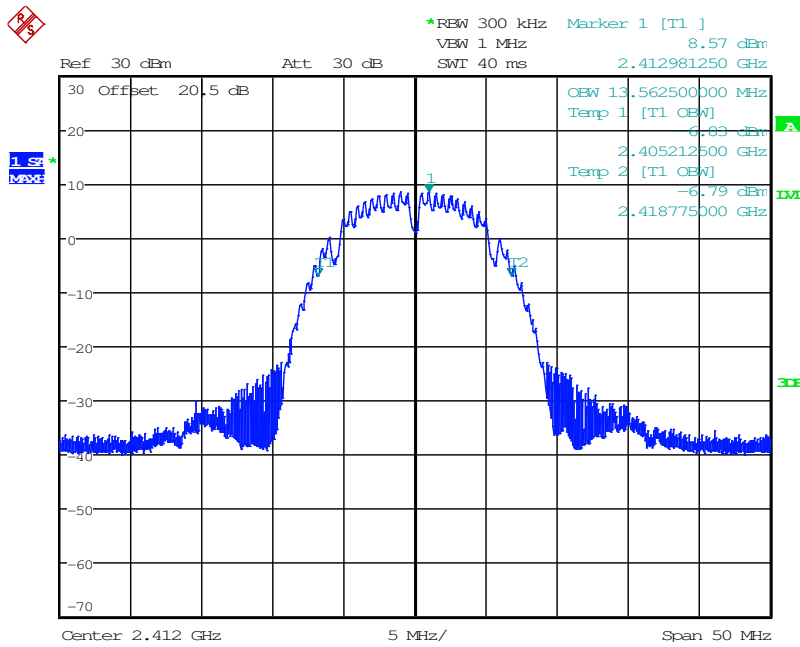


Date: 22.AUG.2016 16:13:25

Figure 7.2.2-4: 99% OBW - Low Channel

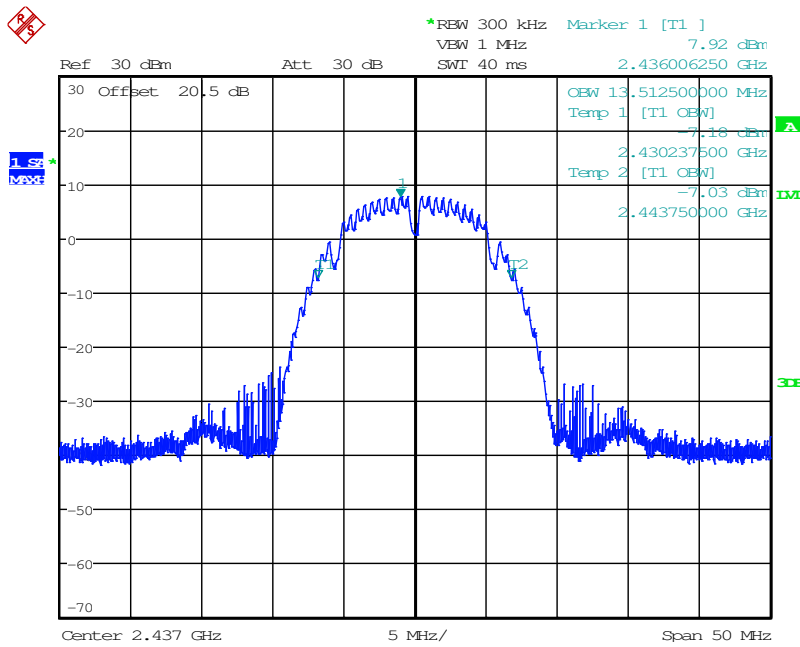

Date: 15.AUG.2016 21:40:43

Figure 7.2.2-5: 99% OBW - Middle Channel

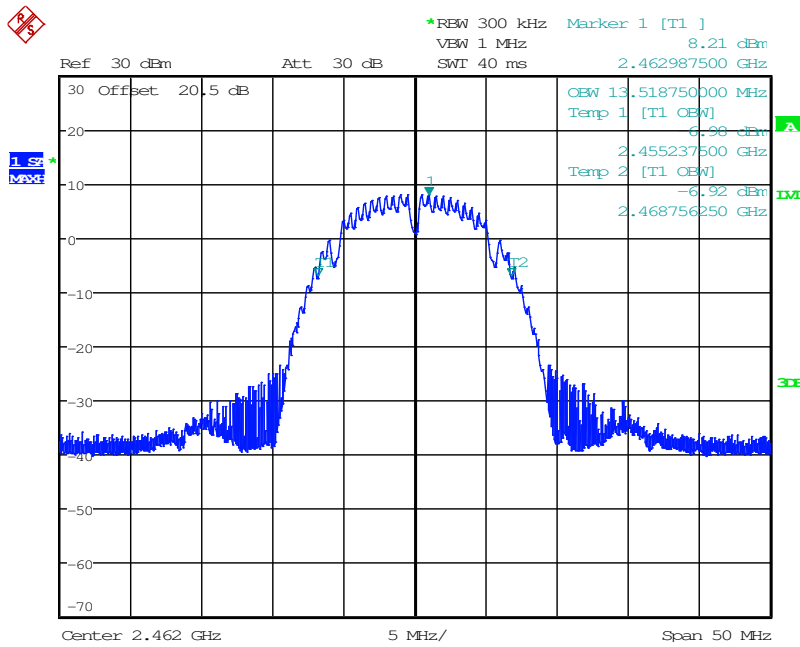


Date: 22.AUG.2016 16:20:28

Figure 7.2.2-6: 99% OBW - High Channel

802.11g


Table 7.2.2-2: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	16.3800	16.9313
2437	16.3800	16.9438
2462	16.3163	16.9438

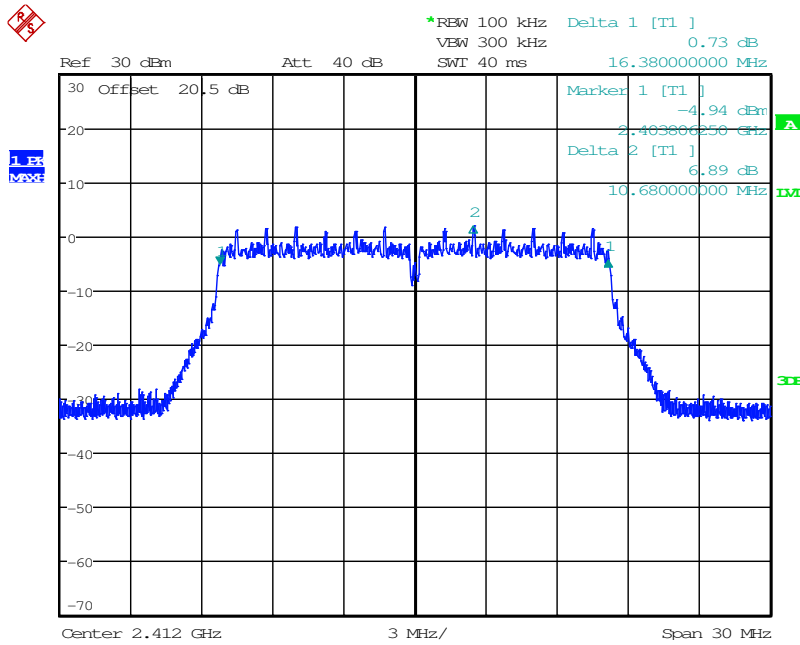


Date: 23.AUG.2016 15:59:27

Figure 7.2.2-7: 6dB BW - Low Channel

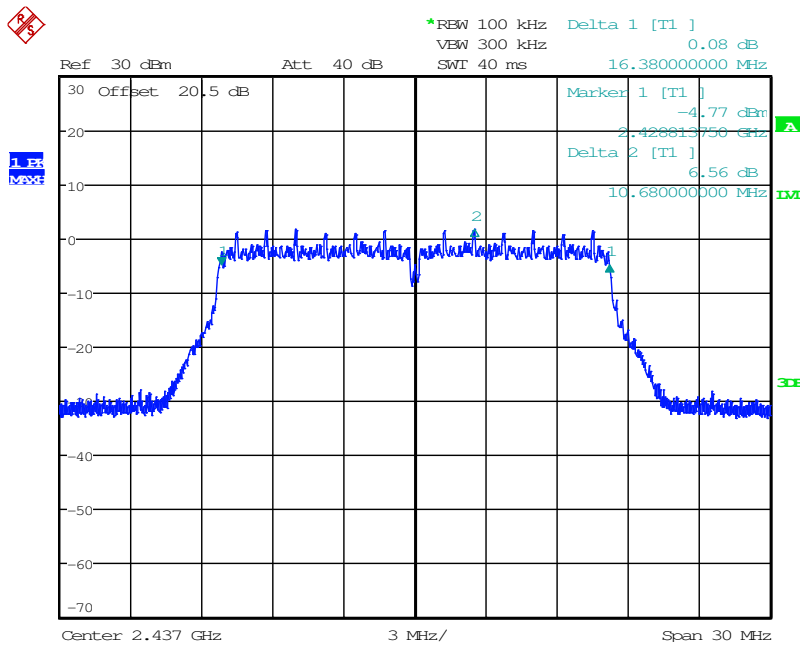


Date: 23.AUG.2016 15:48:11

Figure 7.2.2-8: 6dB BW - Middle Channel

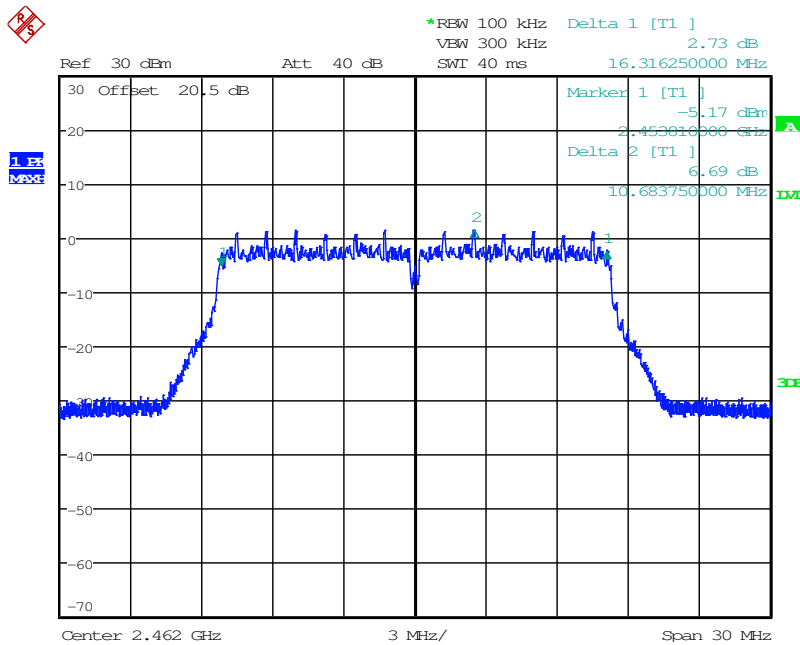


Date: 23.AUG.2016 16:13:06

Figure 7.2.2-9: 6dB BW - High Channel

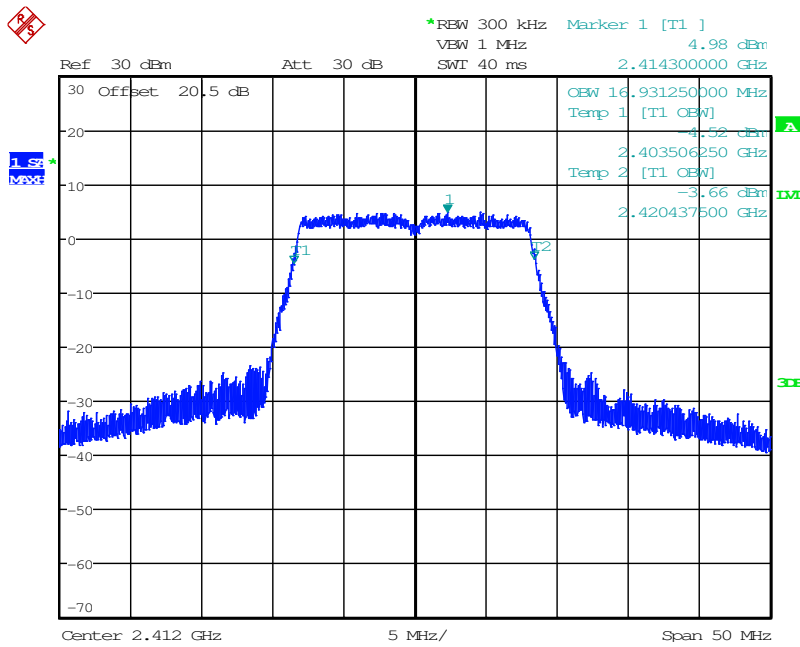


Date: 22.AUG.2016 16:25:27

Figure 7.2.2-10: 99% OBW - Low Channel

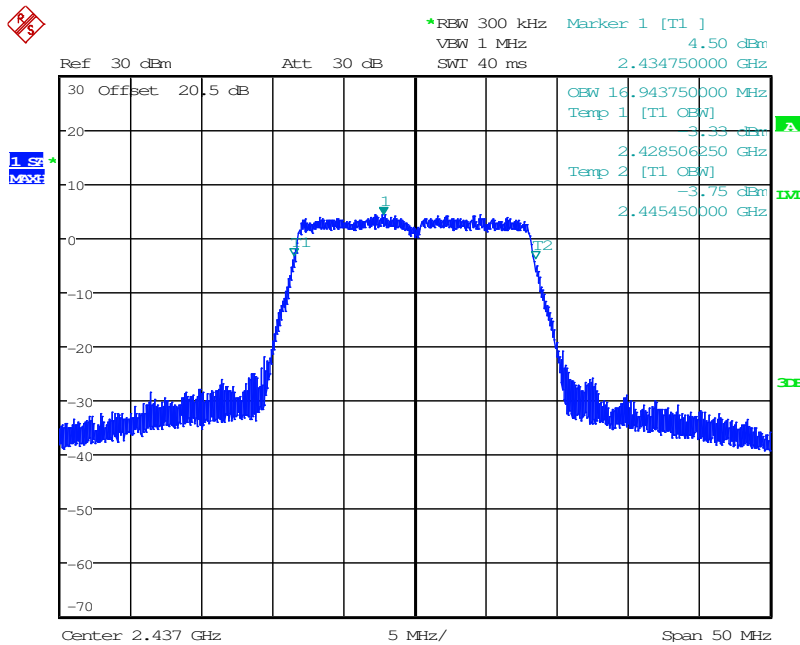

Date: 15.AUG.2016 21:17:46

Figure 7.2.2-11: 99% OBW - Middle Channel

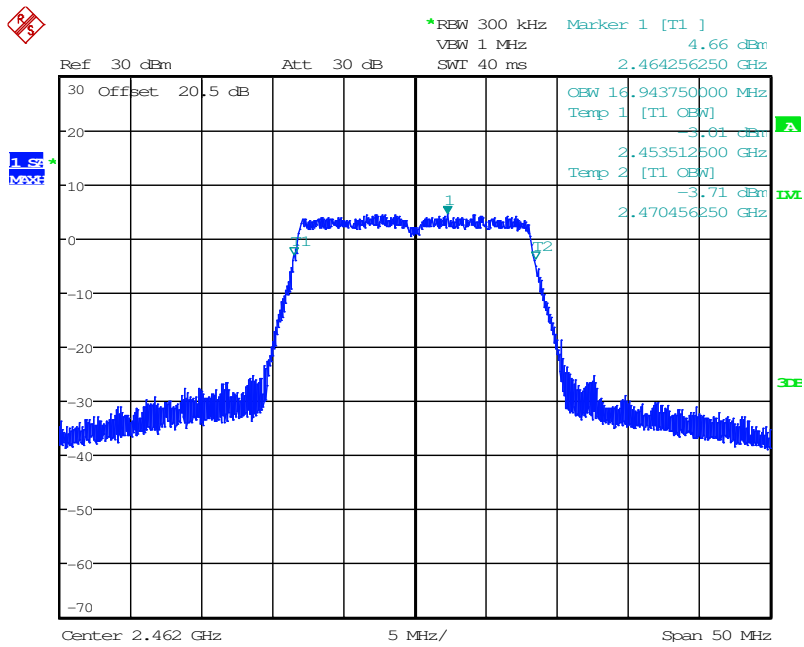


Date: 22.AUG.2016 16:32:16

Figure 7.2.2-12: 99% OBW - High Channel

802.11n 20 MHz


Table 7.2.2-3: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	17.7113	17.9750
2437	17.7000	17.9438
2462	17.7000	17.9625

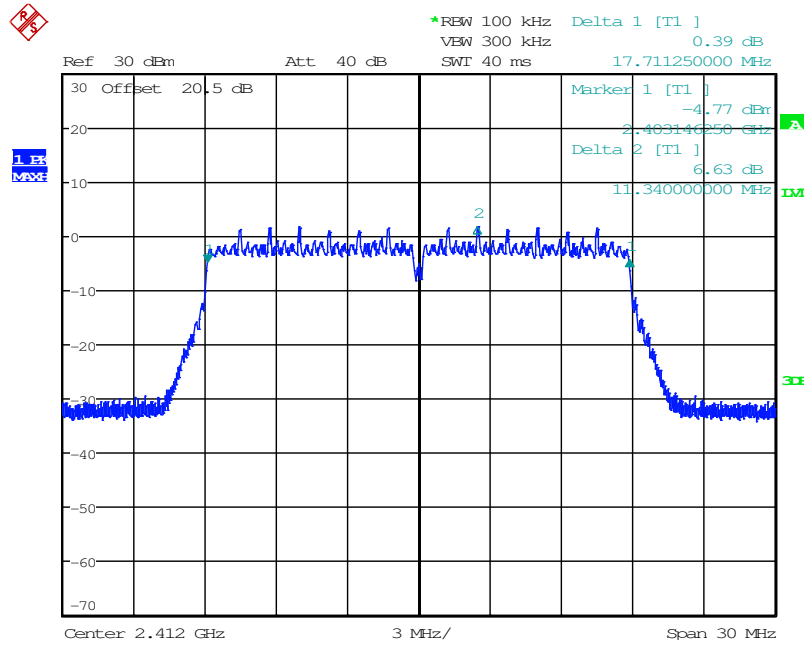


Date: 23.AUG.2016 16:49:25

Figure 7.2.2-13: 6dB BW - Low Channel

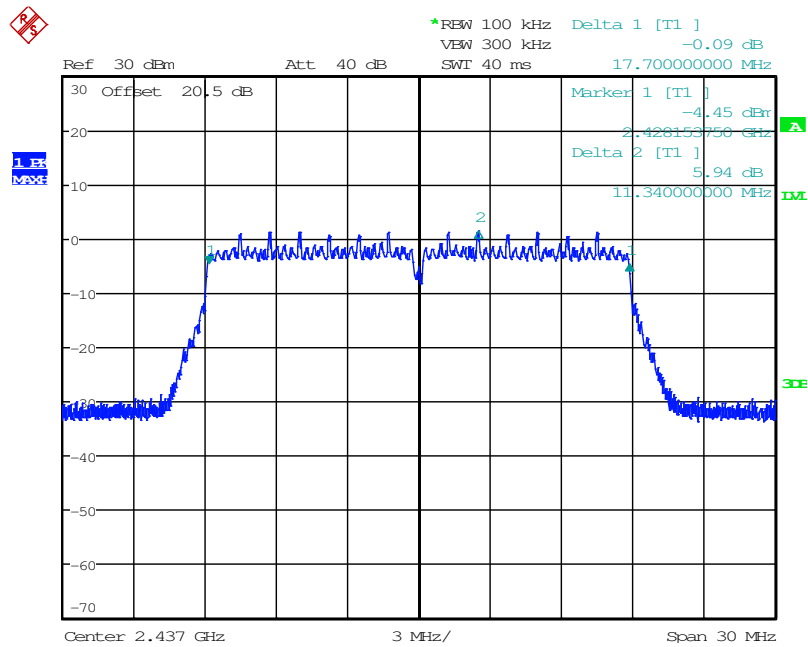


Date: 23.AUG.2016 17:31:04

Figure 7.2.2-14: 6dB BW - Middle Channel

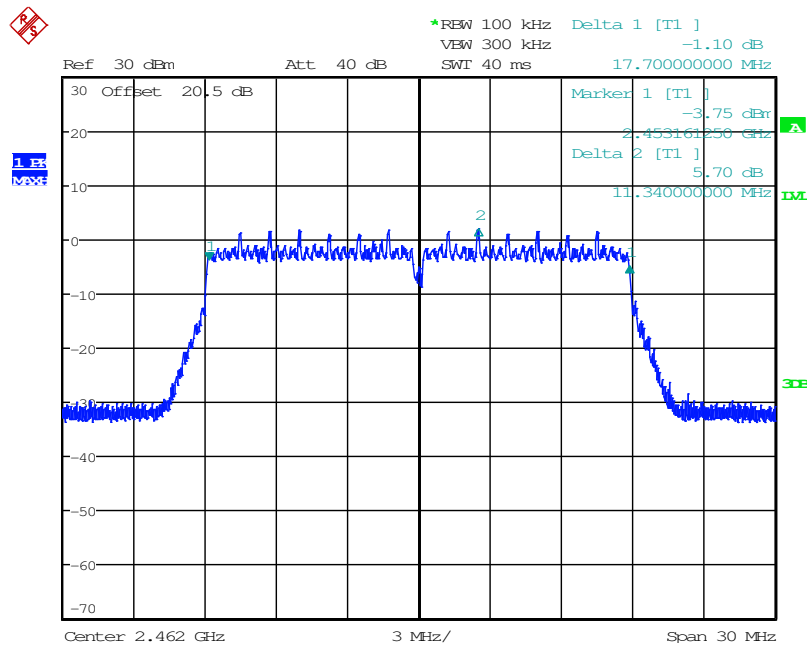


Date: 23.AUG.2016 17:48:54

Figure 7.2.2-15: 6dB BW - High Channel

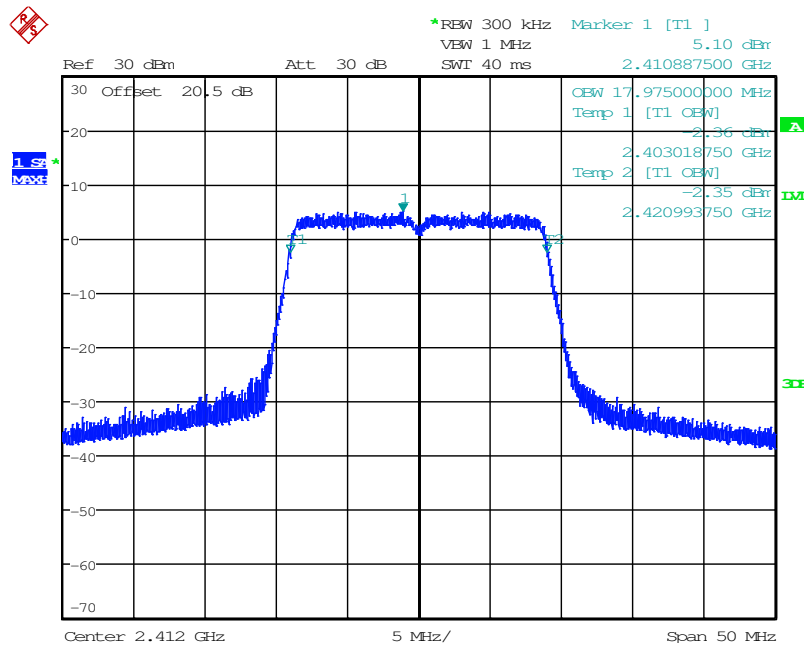


Date: 22.AUG.2016 16:43:20

Figure 7.2.2-16: 99% OBW - Low Channel

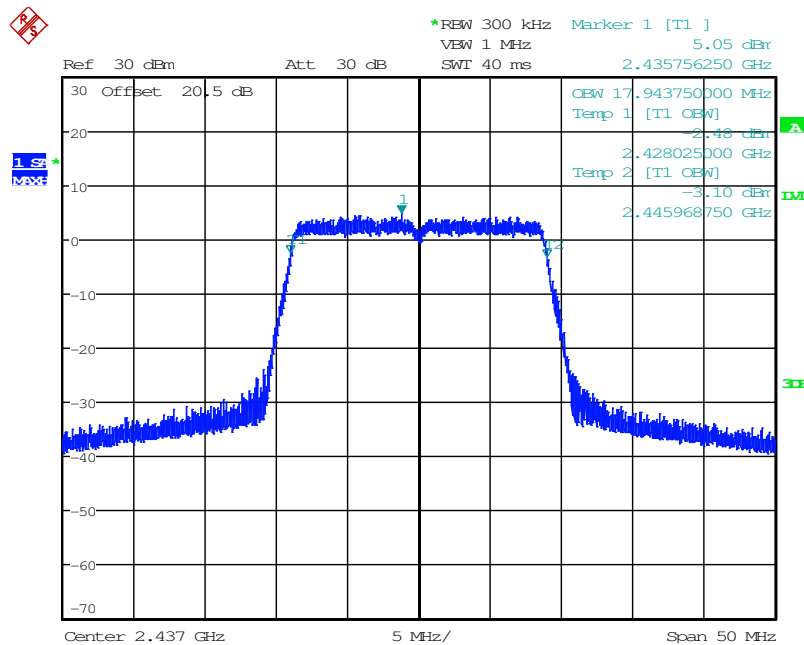

Date: 15.AUG.2016 20:43:53

Figure 7.2.2-17: 99% OBW - Middle Channel

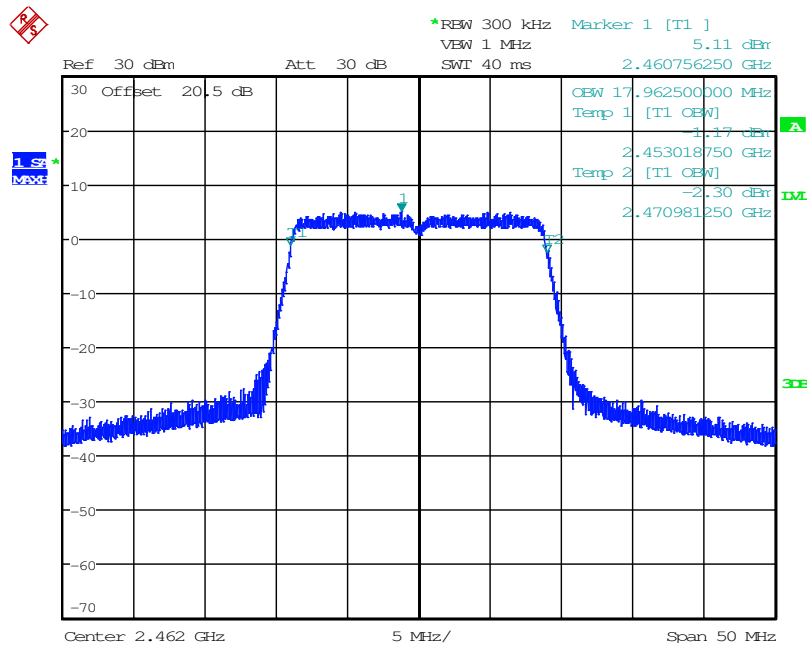

Date: 22.AUG.2016 16:54:34

Figure 7.2.2-18: 99% OBW - High Channel

7.3 Fundamental Emission Output Power - FCC Section 15.247(b)(3); ISED Canada: RSS-247 5.4(4)

7.3.1 Measurement Procedure (Conducted Method)

The fundamental emission output power was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r05 Sections 9.2.2.2 and 9.2.2.4 for 802.11b/g and 802.11n 20 MHz, respectively. Justification for the Duty Cycle correction factor used in provide is Section 7.6. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through suitable attenuation.


7.3.2 Measurement Results

Results are shown below.

802.11b


Table 7.3.2-1: RF Output Power

Frequency [MHz]	Level [dBm]
2412	17.01
2437	16.60
2462	16.66

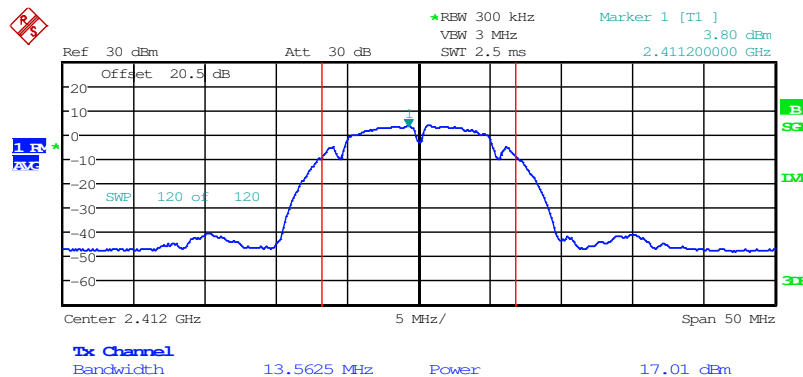


Date: 22.AUG.2016 16:15:33

Figure 7.3.2-1: RF Output Power - Low Channel

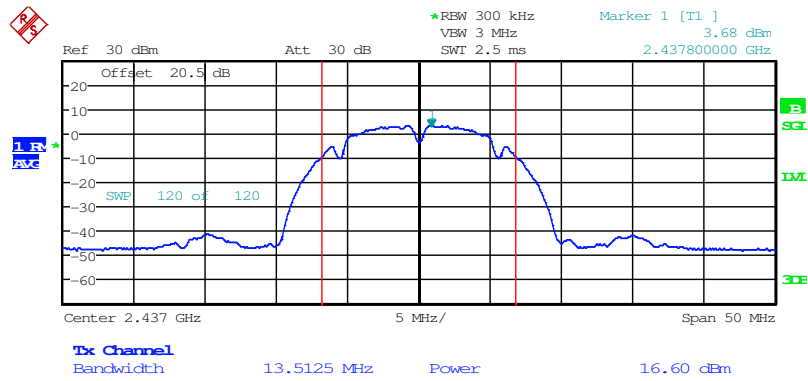

Date: 22.AUG.2016 11:47:42

Figure 7.3.2-2: RF Output Power - Middle Channel

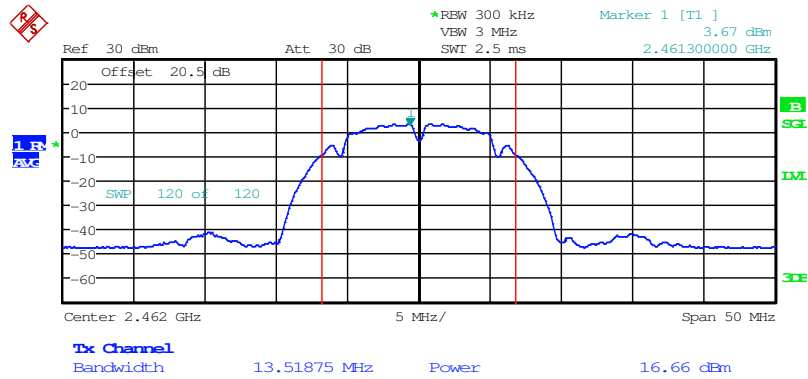


Date: 22.AUG.2016 16:21:49

Figure 7.3.2-3: RF Output Power - High Channel

802.11g

Table 7.3.2-2: RF Output Power

Frequency [MHz]	Level [dBm]
2412	13.25
2437	12.88
2462	13.00

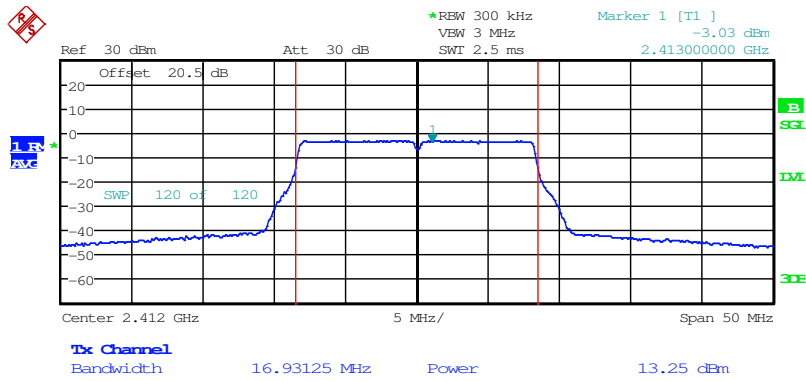


Date: 22.AUG.2016 16:27:46

Figure 7.3.2-4: RF Output Power - Low Channel

802.11n 20 MHz

Table 7.3.2-3: RF Output Power

Frequency [MHz]	Level [dBm]	Duty Cycle Correction Factor [dB]	Corrected Level [dBm]
2412	12.52	0.271	12.791
2437	12.62	0.271	12.891
2462	12.78	0.271	13.051

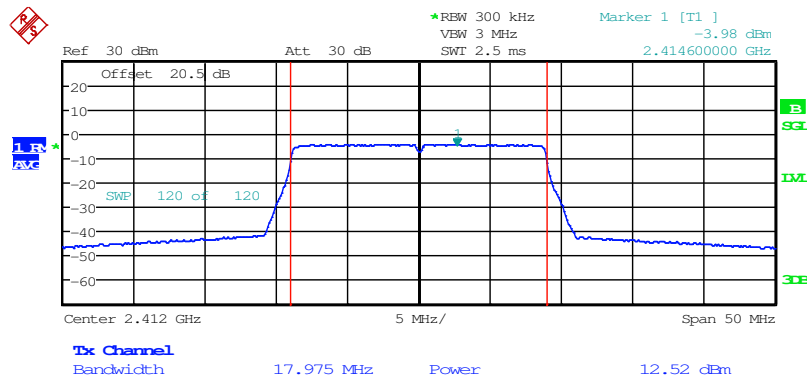

Date: 22.AUG.2016 16:46:59

Figure 7.3.2-7: RF Output Power - Low Channel

7.4 Band-Edge and Spurious Emissions

7.4.1 Band-Edge Compliance of RF Conducted Emissions - FCC Section 15.247(d); ISED Canada: RSS-247 5.5


7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer via suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.

7.4.1.2 Measurement Results


Results are shown below.

802.11b

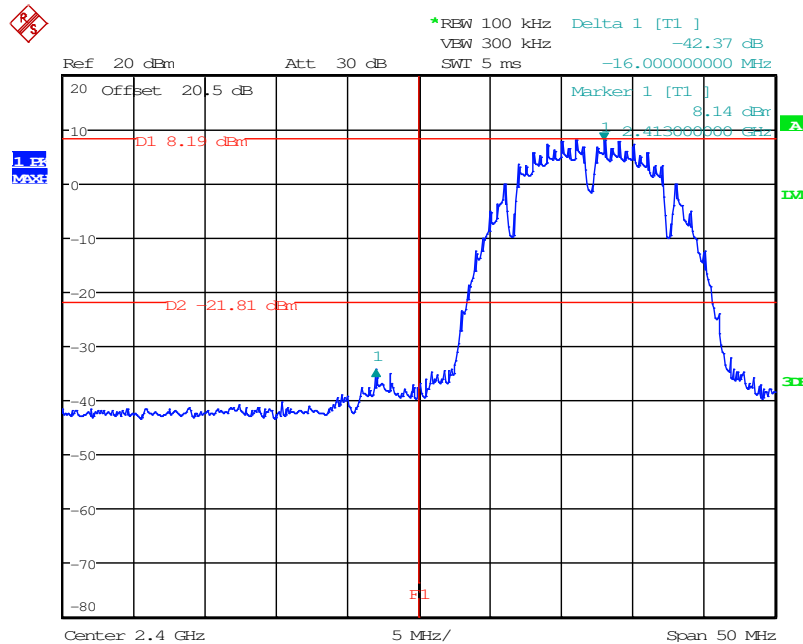

Date: 29.AUG.2016 20:38:55


Figure 7.4.1.2-1: Lower Band-edge

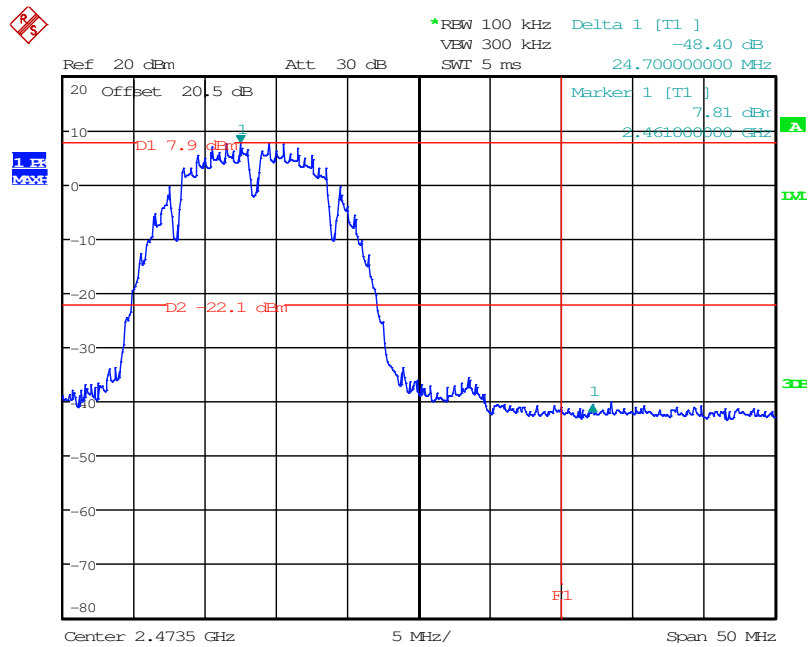

Date: 29.AUG.2016 21:02:23


Figure 7.4.1.2-2: Upper Band-edge

802.11g

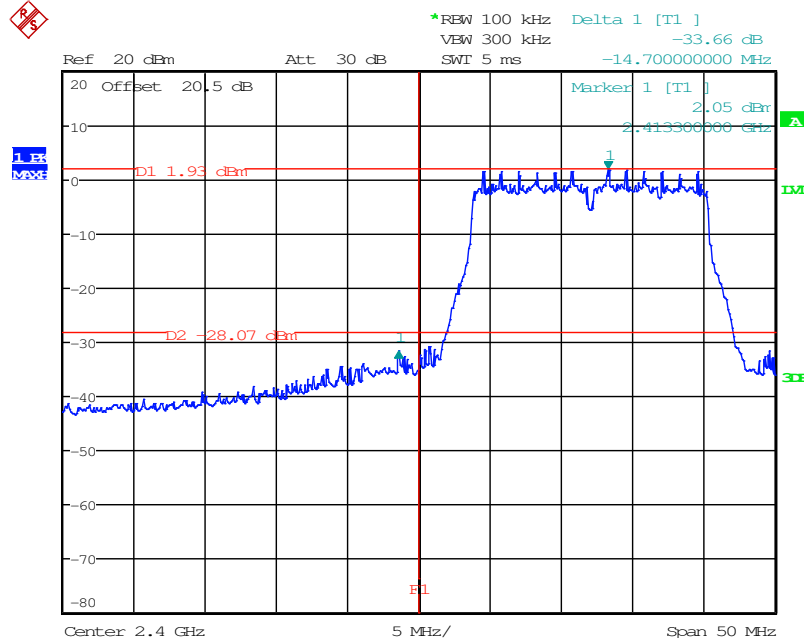

Date: 29.AUG.2016 20:43:11


Figure 7.4.1.2-3: Lower Band-edge

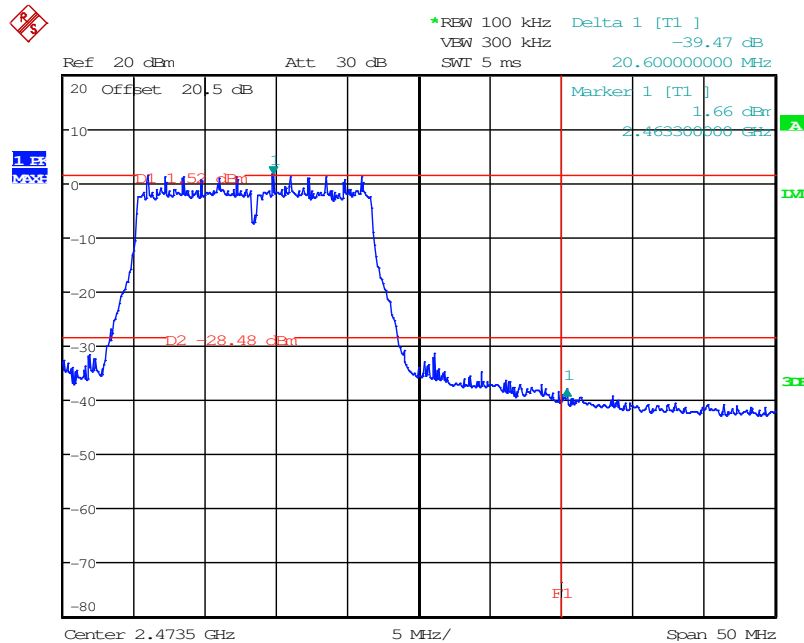

Date: 29.AUG.2016 20:59:28


Figure 7.4.1.2-4: Upper Band-edge

802.11n 20 MHz

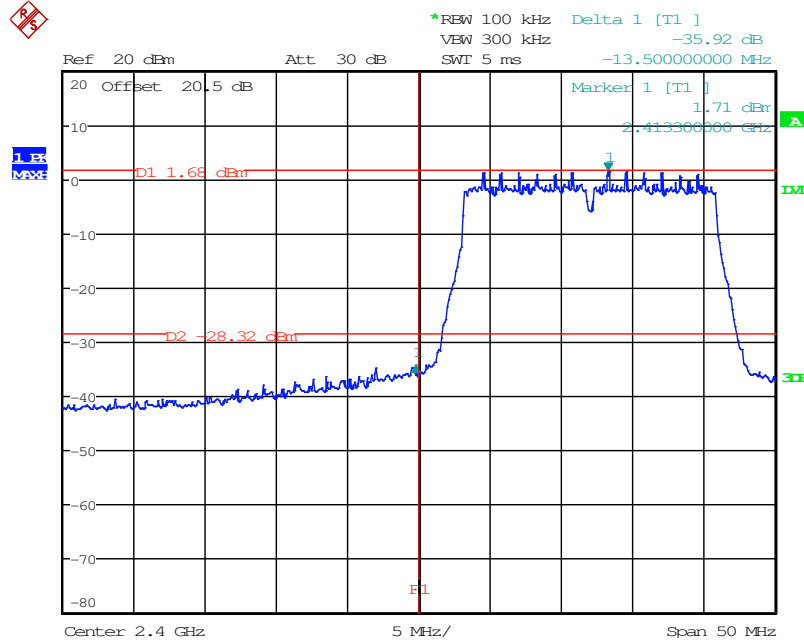

Date: 29.AUG.2016 20:50:45

Figure 7.4.1.2-5: Lower Band-edge

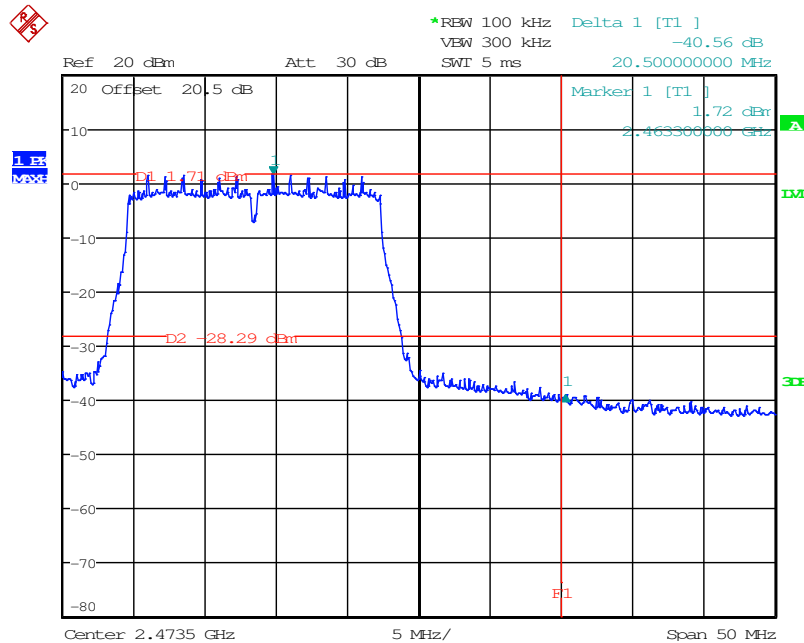

Date: 29.AUG.2016 20:55:04

Figure 7.4.1.2-6: Upper Band-edge

7.4.2 RF Conducted Spurious Emissions - FCC Section 15.247(d); ISED Canada: RSS-247 5.5


7.4.2.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r05 Section 11.3 Emission level measurement. The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized. The reference level was determined by measuring the Peak PSD level in any 100 kHz bandwidth within the DTS channel bandwidth.

7.4.2.2 Measurement Results


Results are shown below.

802.11b

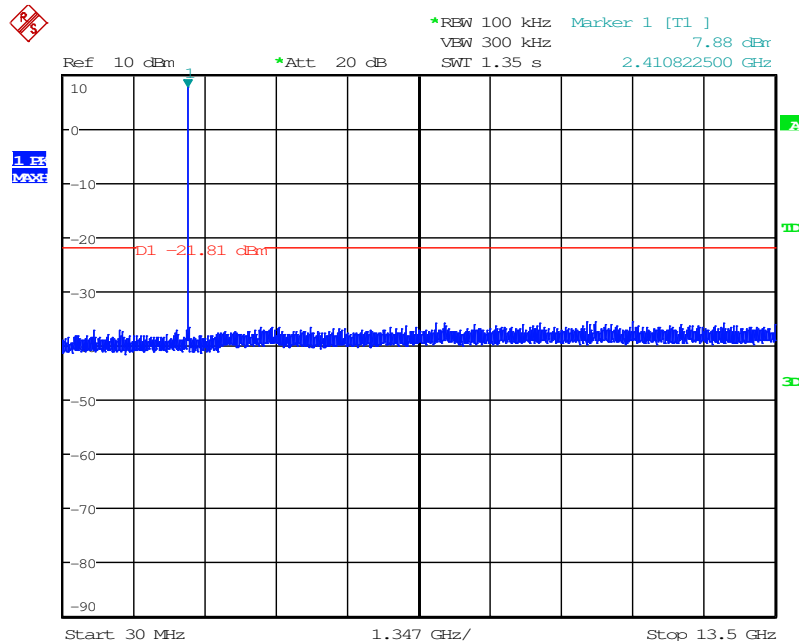


Date: 23.AUG.2016 19:54:29

Figure 7.4.2.2-1: 30 MHz – 13.5 GHz – Low Channel

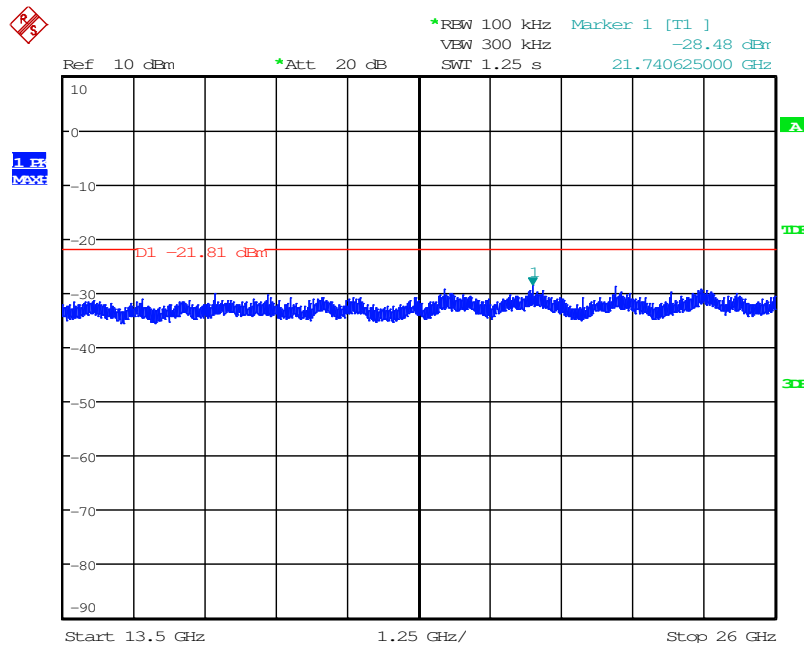


Date: 23.AUG.2016 19:59:06

Figure 7.4.2.2-2: 13.5 GHz –26 GHz – Low Channel

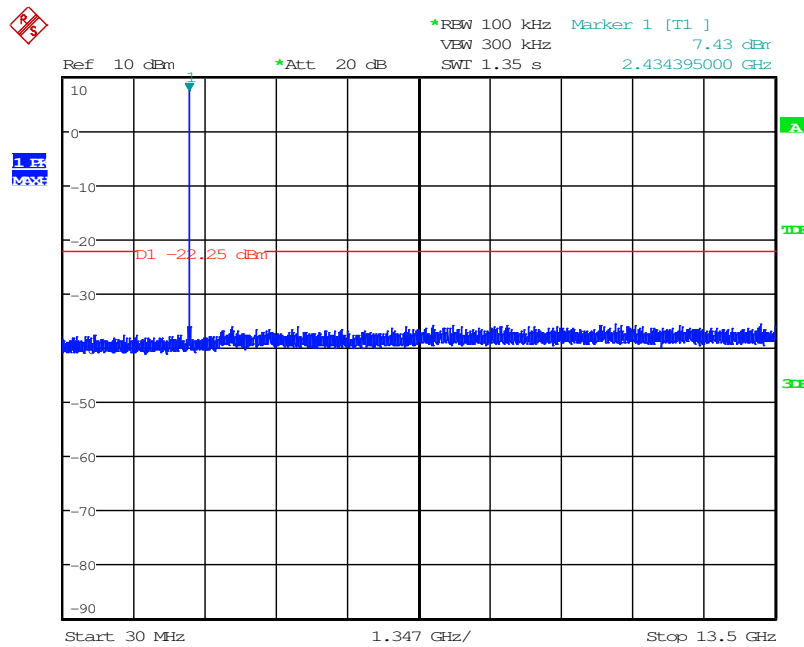


Date: 23.AUG.2016 19:45:57

Figure 7.4.2.2-3: 30 MHz – 13.5 GHz –Middle Channel

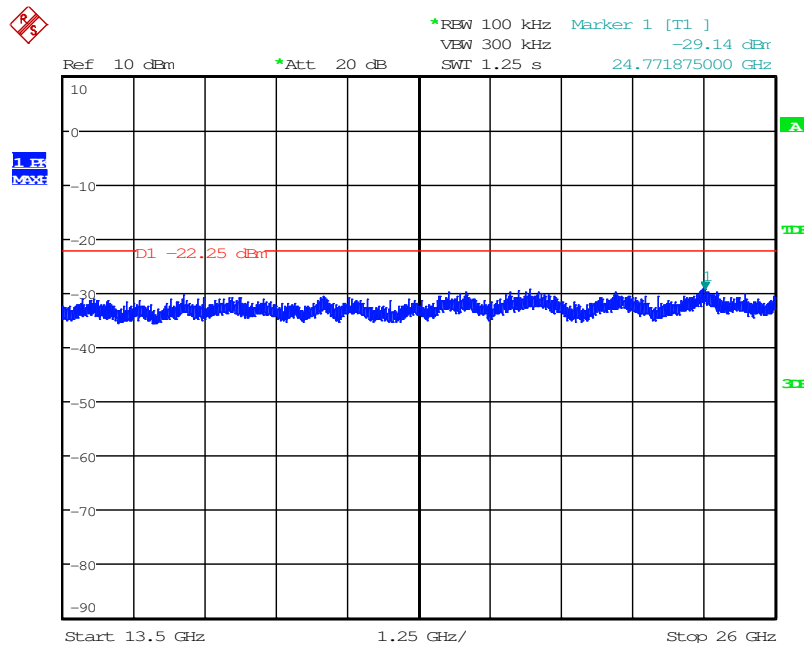


Date: 23.AUG.2016 19:34:16

Figure 7.4.2.2-4: 13.5 GHz –26 GHz – Middle Channel

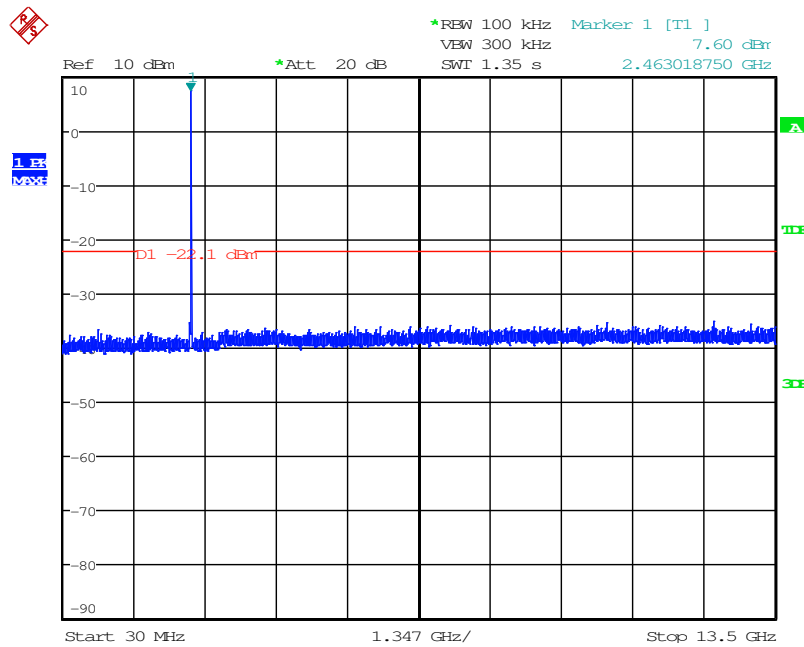

Date: 23.AUG.2016 19:24:22


Figure 7.4.2.2-5: 30 MHz – 13.5 GHz – High Channel

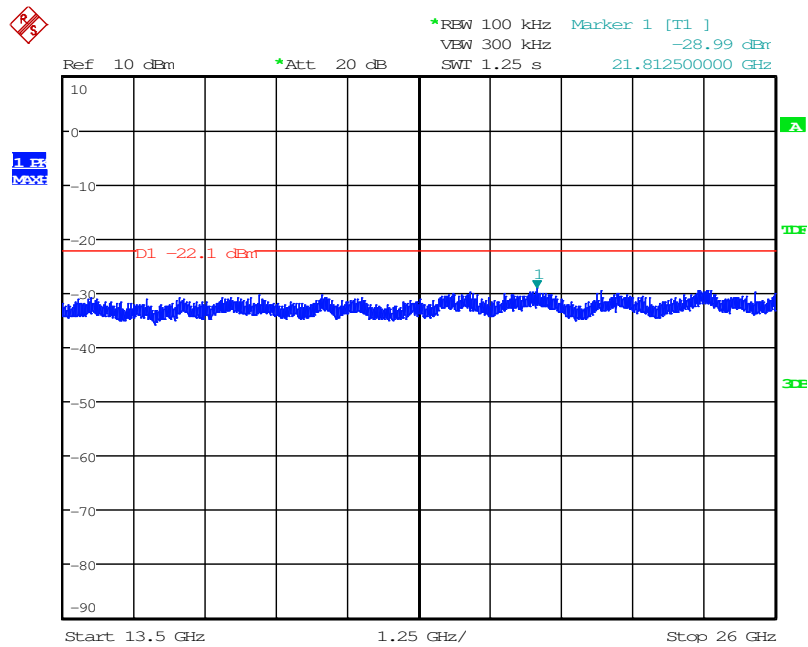

Date: 23.AUG.2016 19:30:19


Figure 7.4.2.2-6: 13.5 GHz –26 GHz –High Channel

802.11g

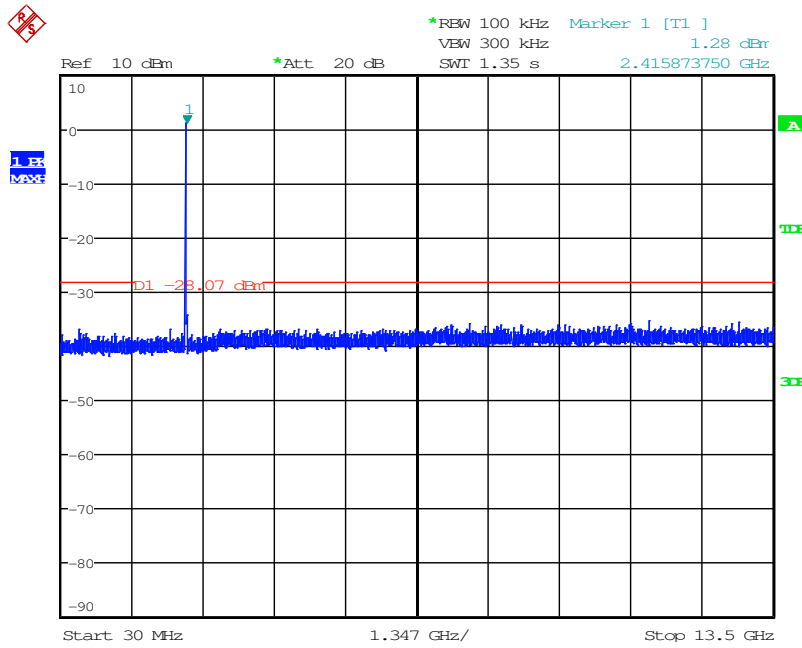


Date: 23.AUG.2016 19:15:39

Figure 7.4.2.2-7: 30 MHz – 13.5 GHz – Low Channel

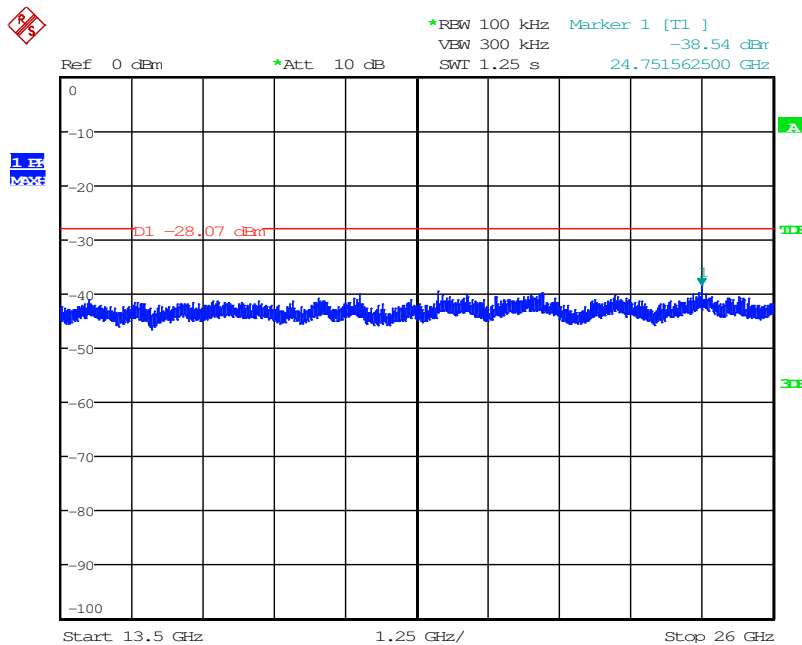


Date: 23.AUG.2016 19:12:00

Figure 7.4.2.2-8: 13.5 GHz –26 GHz – Low Channel

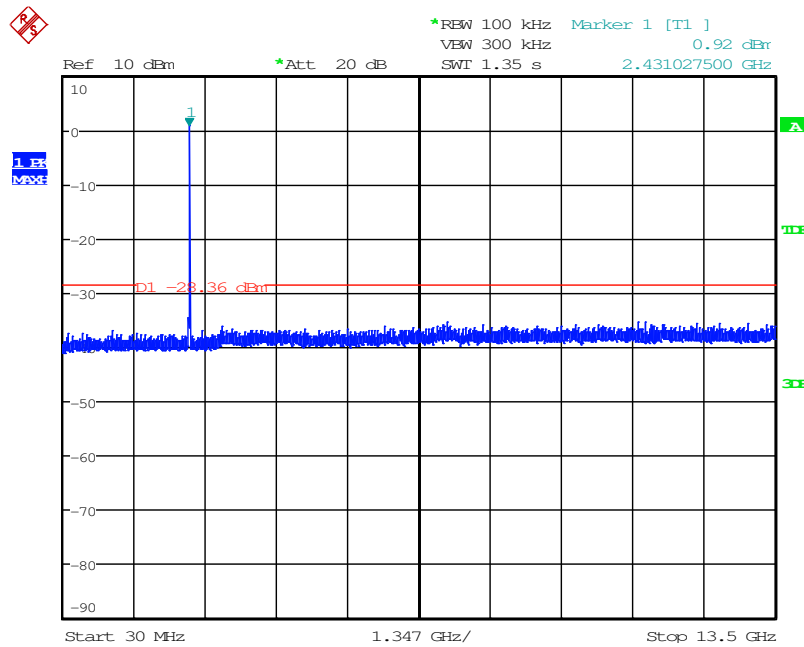


Date: 23.AUG.2016 19:04:52

Figure 7.4.2.2-9: 30 MHz – 13.5 GHz –Middle Channel

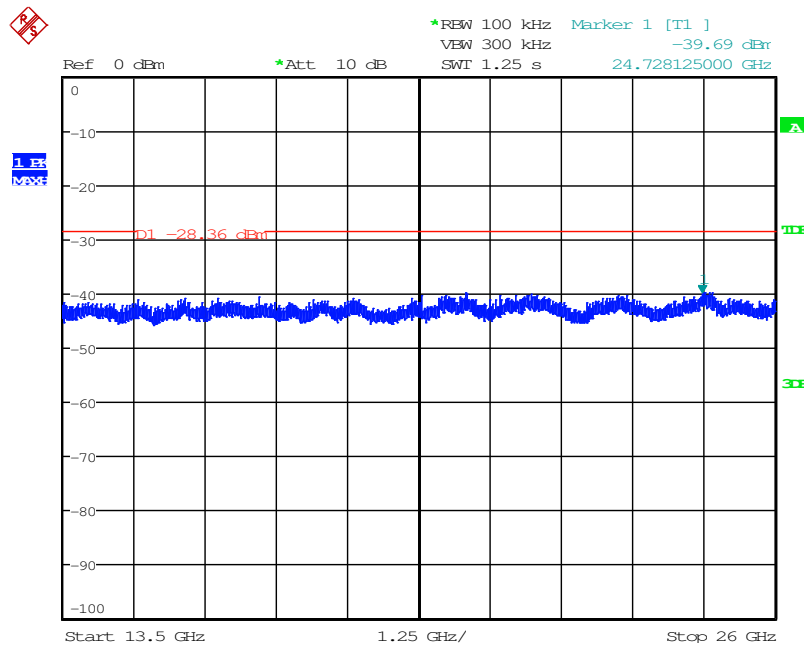


Date: 23.AUG.2016 19:08:47

Figure 7.4.2.2-10: 13.5 GHz –26 GHz – Middle Channel

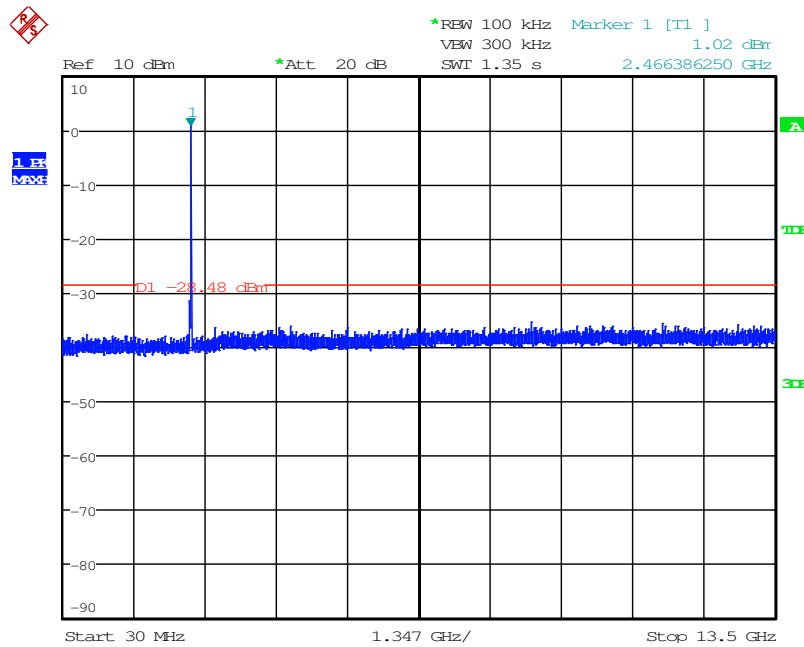

Date: 23.AUG.2016 18:55:53


Figure 7.4.2.2-11: 30 MHz – 13.5 GHz – High Channel

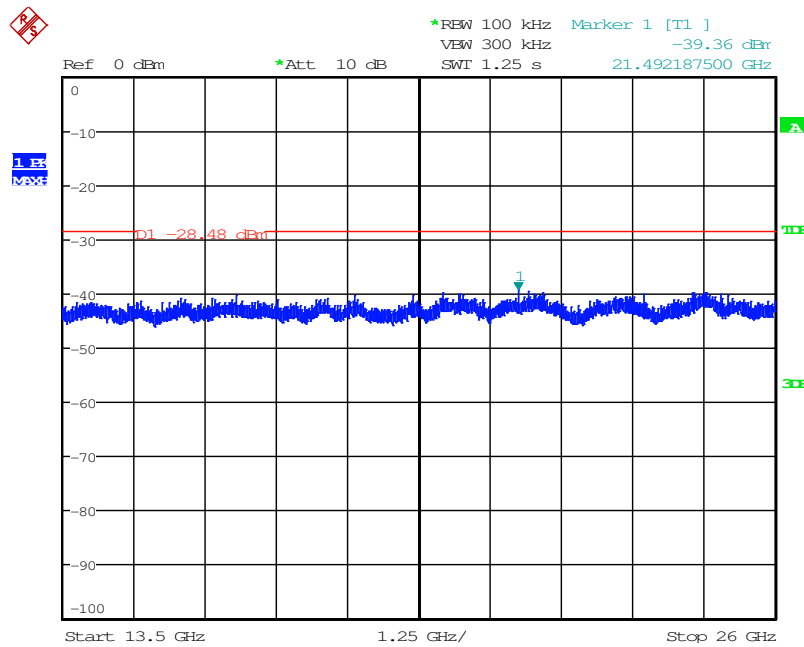

Date: 23.AUG.2016 18:51:43


Figure 7.4.2.2-12: 13.5 GHz –26 GHz –High Channel

802.11n 20MHz

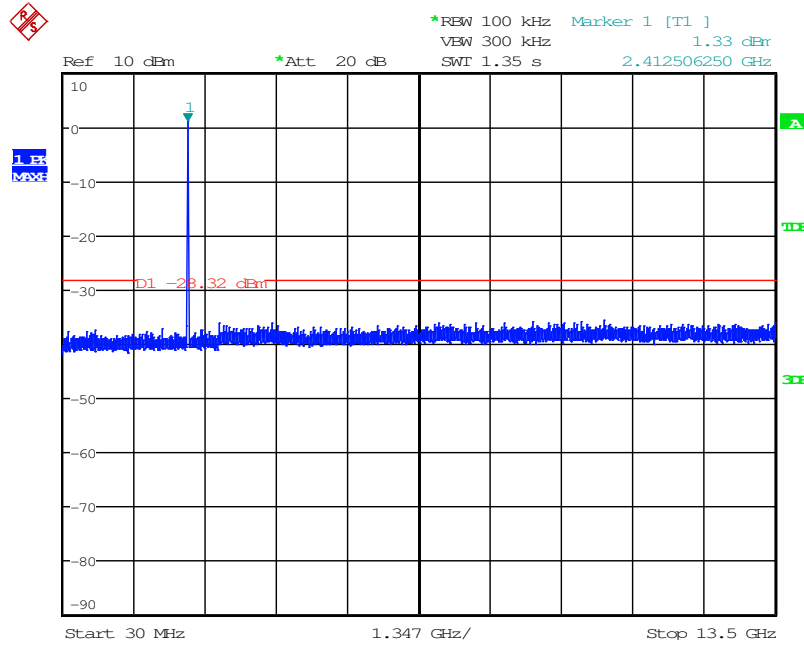


Date: 23.AUG.2016 18:44:41

Figure 7.4.2.2-13: 30 MHz – 13.5 GHz – Low Channel

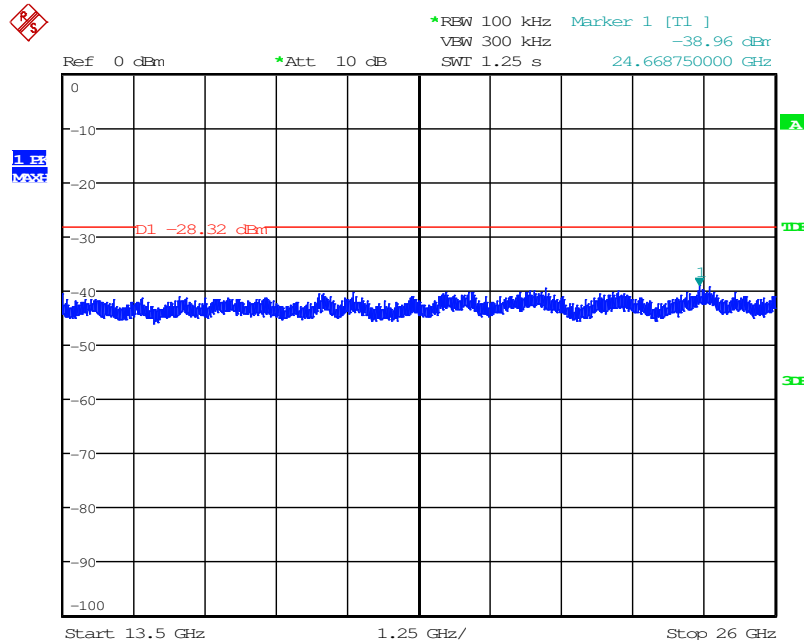


Date: 23.AUG.2016 18:48:26

Figure 7.4.2.2-14: 13.5 GHz –26 GHz – Low Channel

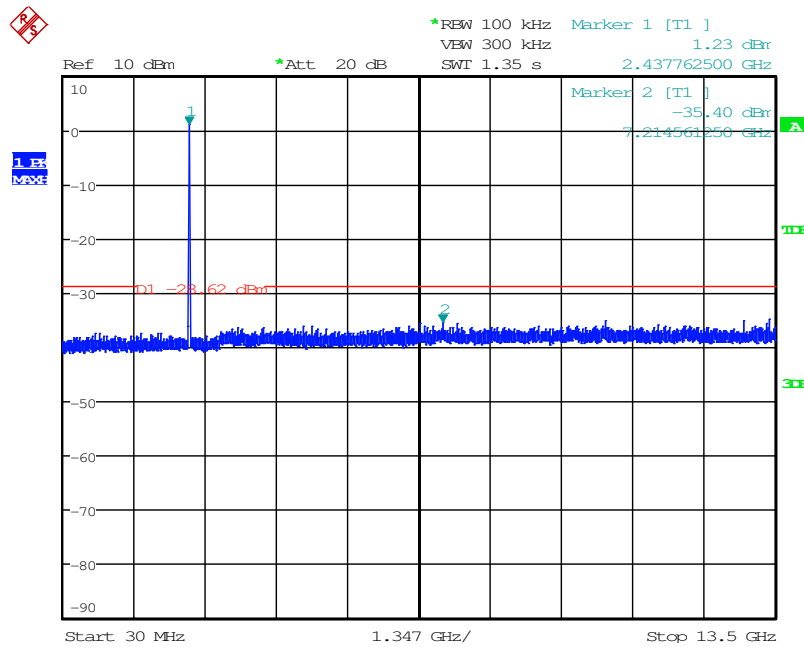


Date: 23.AUG.2016 18:40:18

Figure 7.4.2.2-15: 30 MHz – 13.5 GHz –Middle Channel

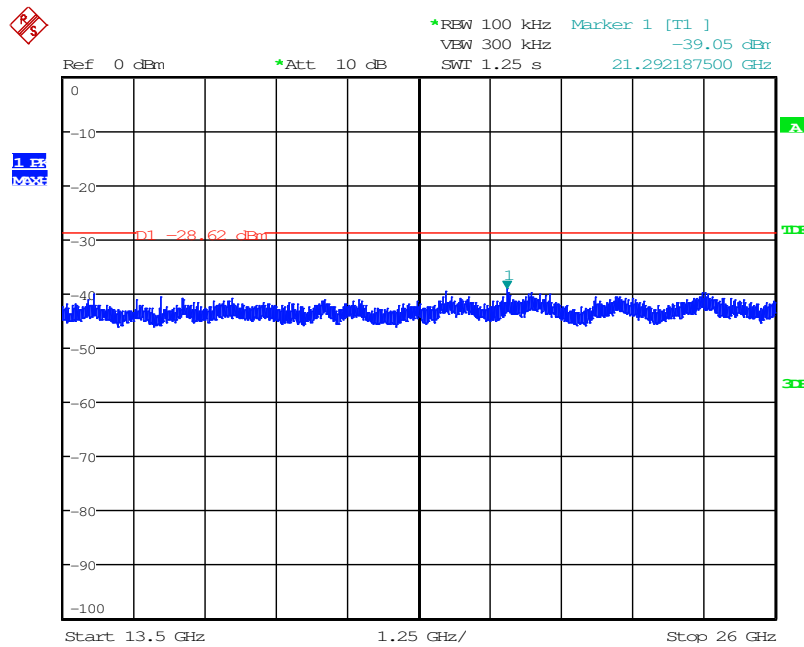


Date: 23.AUG.2016 18:32:01

Figure 7.4.2.2-16: 13.5 GHz –26 GHz – Middle Channel

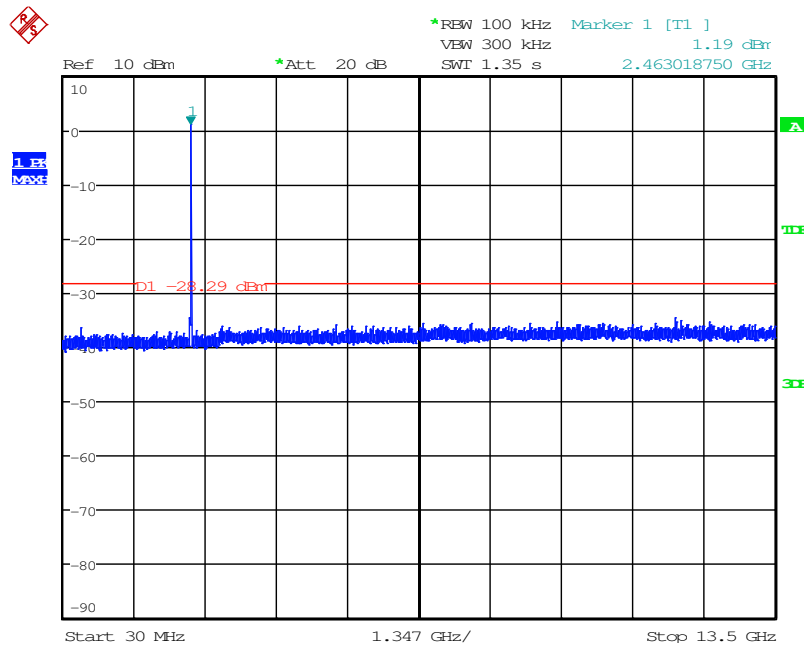

Date: 23.AUG.2016 18:26:00

Figure 7.4.2.2-17: 30 MHz – 13.5 GHz – High Channel

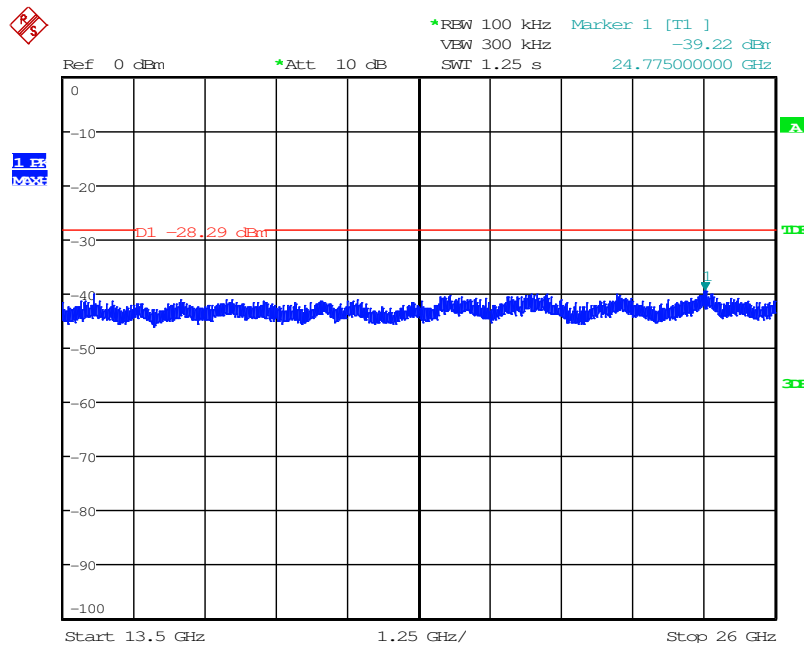

Date: 23.AUG.2016 18:29:21

Figure 7.4.2.2-18: 13.5 GHz –26 GHz –High Channel

7.4.3 Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; ISED Canada: RSS-Gen 8.9, 8.10

7.4.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by FCC section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz.

7.4.3.2 Measurement Results

Radiated band-edge and spurious emissions found in the restricted frequency bands of 9 kHz to 26 GHz are reported in the tables below.

Table 7.4.3.2-1: Radiated Spurious Emissions Tabulated Data - 802.11b

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2412 MHz										
2390	57.18	43.73	H	-5.35	51.83	38.38	74.0	54.0	22.2	15.6
2390	63.25	51.71	V	-5.35	57.90	46.36	74.0	54.0	16.1	7.6
4824	43.46	30.16	V	3.28	46.74	33.44	74.0	54.0	27.3	20.6
Middle Channel 2437 MHz										
4874	43.04	30.56	V	3.46	46.50	34.02	74.0	54.0	27.5	20.0
High Channel 2462 MHz										
2483.5	56.61	43.19	H	-4.89	51.72	38.30	74.0	54.0	22.3	15.7
2483.5	63.46	50.58	V	-4.89	58.57	45.69	74.0	54.0	15.4	8.3
4924	43.36	31.19	V	3.64	47.00	34.83	74.0	54.0	27.0	19.2

Note: All emissions above 4.93 GHz were attenuated below the limits and the noise floor of the measurement equipment

Table 7.4.3.2-2: Radiated Spurious Emissions Tabulated Data – 802.11g

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2412 MHz										
2390	62.00	45.02	H	-5.35	56.65	39.67	74.0	54.0	17.4	14.3
2390	74.3	55.31	V	-5.35	68.95	49.96	74.0	54.0	5.1	4.0
Middle Channel 2437 MHz										
Noise Floor										
High Channel 2462 MHz										
2483.5	60.99	44.95	H	-4.89	56.10	40.06	74.0	54.0	17.9	13.9
2483.5	75.57	56.38	V	-4.89	70.68	51.49	74.0	54.0	3.3	2.5

Note: All emissions above 2.84 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.4.3.2-3: Radiated Spurious Emissions Tabulated Data – 802.11n 20 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2412 MHz										
2390	59.79	44.65	H	-5.35	54.44	39.30	74.0	54.0	19.6	14.7
2390	73.00	55.87	V	-5.35	67.65	50.52	74.0	54.0	6.4	3.5
Middle Channel 2437 MHz										
Noise Floor										
High Channel 2462 MHz										
2483.5	61.23	46.11	H	-4.89	56.34	41.22	74.0	54.0	17.7	12.8
2483.5	73.8	57.38	V	-4.89	68.91	52.49	74.0	54.0	5.1	1.5

Note: All emissions above 2.84 GHz were attenuated below the limits and the noise floor of the measurement equipment.

7.4.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: PeakCorrected Level: $57.18 + (-5.35) = 51.83$ dB μ V/mMargin: 74 dB μ V/m – 51.83 dB μ V/m = 22.2 dB**Example Calculation: Average**Corrected Level: $43.73 + (-5.35) = 38.38$ dB μ V/mMargin: 54 dB μ V/m – 38.38 dB μ V/m = 15.6 dB

7.5 Power Spectral Density - FCC Section 15.247(e); ISED Canada: RSS-247 5.2(2)

7.5.1 PSD Measurement Procedure (Conducted Method)

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r05 Section 10.2 Method PKPSD (peak PSD). The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and external attenuation. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 1.5 times the 6 dB bandwidth and the sweep time was set to auto.


7.5.2 Measurement Results

Results are shown below.

802.11b


Table 7.5.2-1: Power Spectral Density

Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
2412	-6.34	8.0	14.34
2437	-7.15	8.0	15.15
2462	-6.45	8.0	14.45

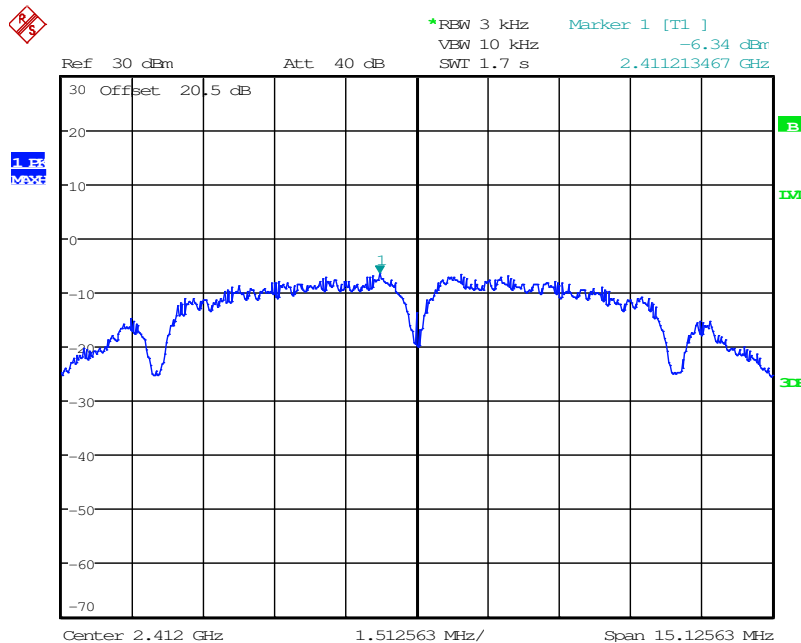


Date: 23.AUG.2016 14:51:29

Figure 7.5.2-1: Power Spectral Density - Low Channel

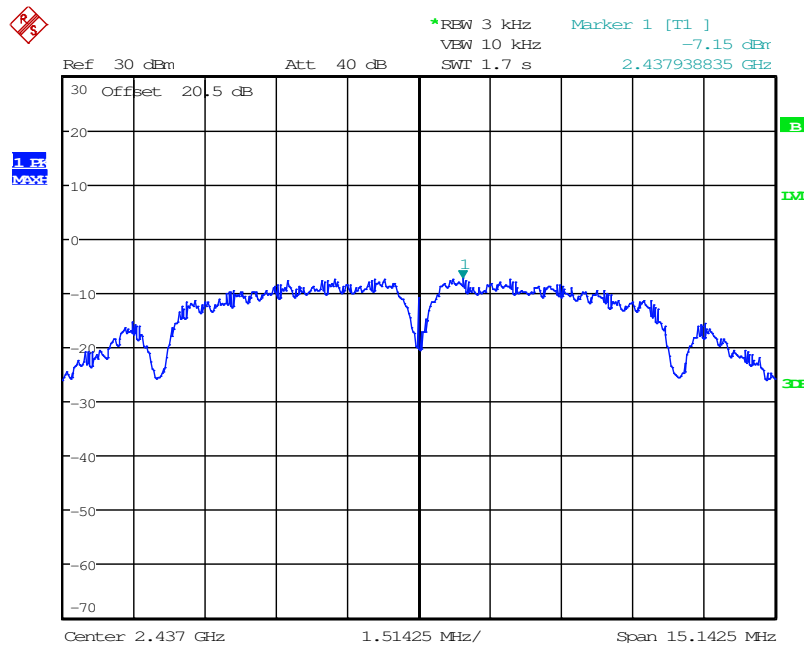

Date: 23.AUG.2016 14:59:20

Figure 7.5.2-2: Power Spectral Density - Middle Channel

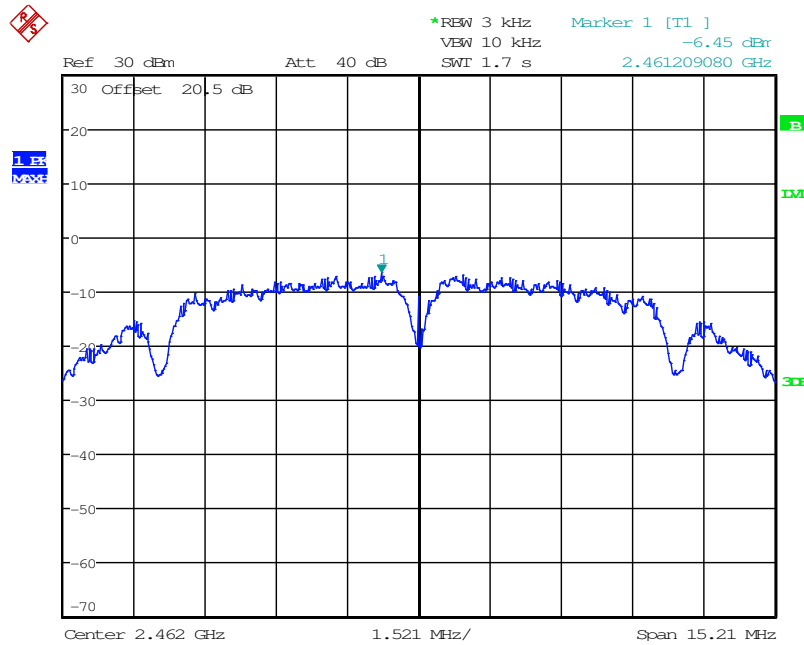


Date: 23.AUG.2016 15:23:58

Figure 7.5.2-3: Power Spectral Density – High Channel

802.11g


Table 7.5.2-2: Power Spectral Density

Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
2412	-10.07	8.0	18.07
2437	-10.05	8.0	18.05
2462	-10.70	8.0	18.70

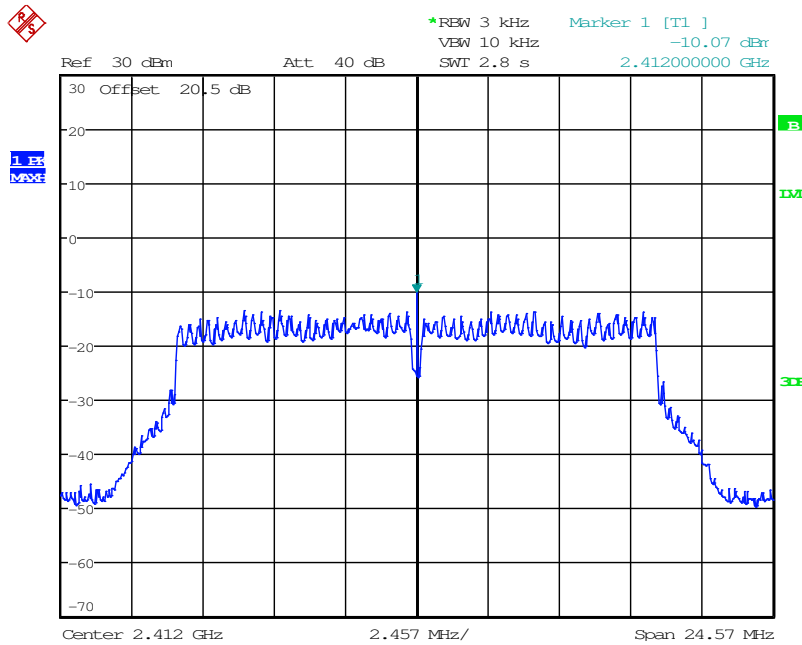


Date: 23.AUG.2016 16:03:52

Figure 7.5.2-4: Power Spectral Density - Low Channel

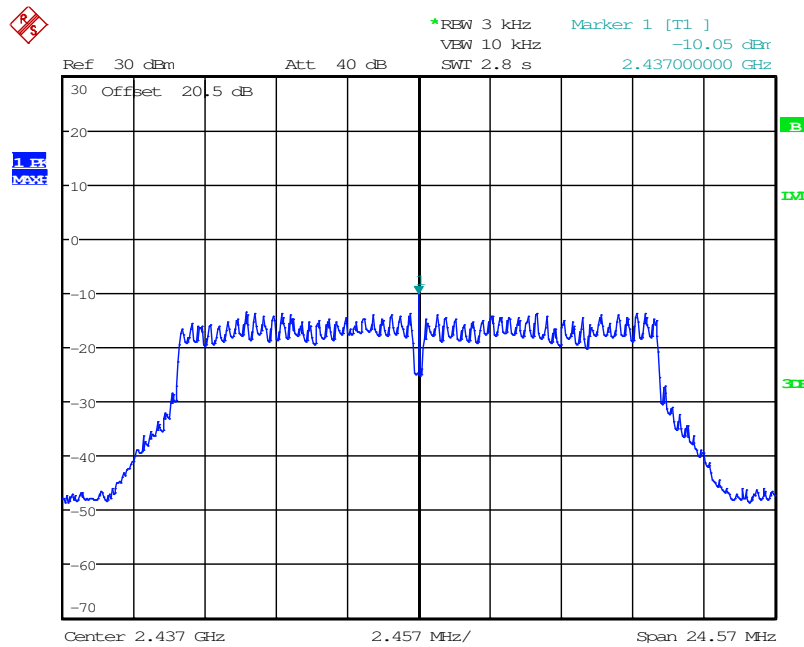

Date: 23.AUG.2016 15:52:00

Figure 7.5.2-5: Power Spectral Density - Middle Channel

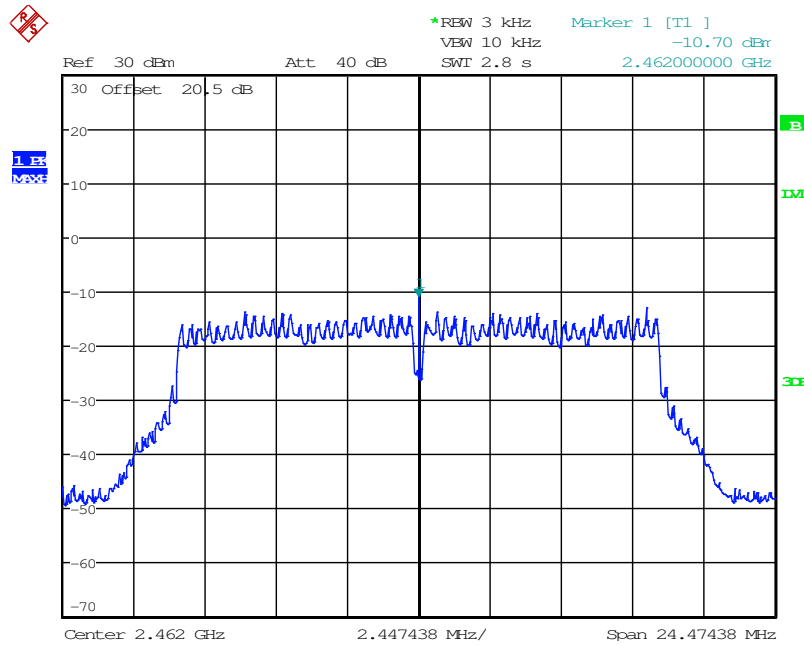


Date: 23.AUG.2016 16:15:42

Figure 7.5.2-6: Power Spectral Density – High Channel

802.11n 20MHz


Table 7.5.2-3: Power Spectral Density

Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
2412	-10.40	8.0	18.4
2437	-10.47	8.0	18.47
2462	-10.67	8.0	18.67

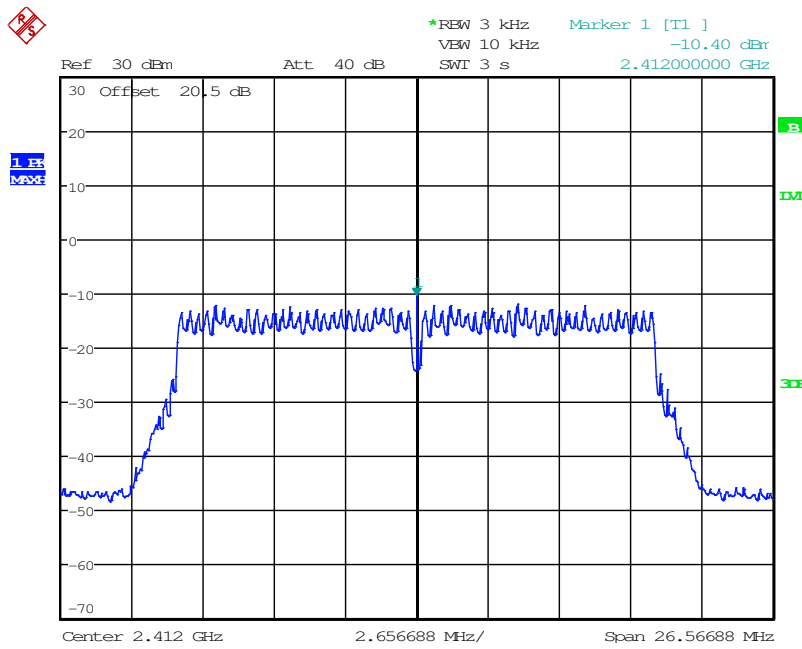


Date: 23.AUG.2016 17:19:11

Figure 7.5.2-7: Power Spectral Density - Low Channel

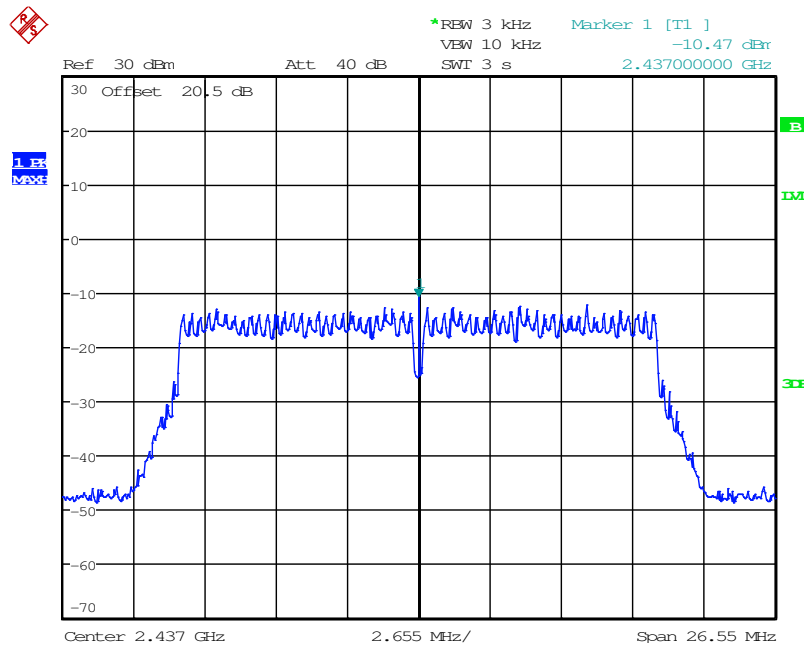

Date: 23.AUG.2016 17:36:59

Figure 7.5.2-8: Power Spectral Density - Middle Channel

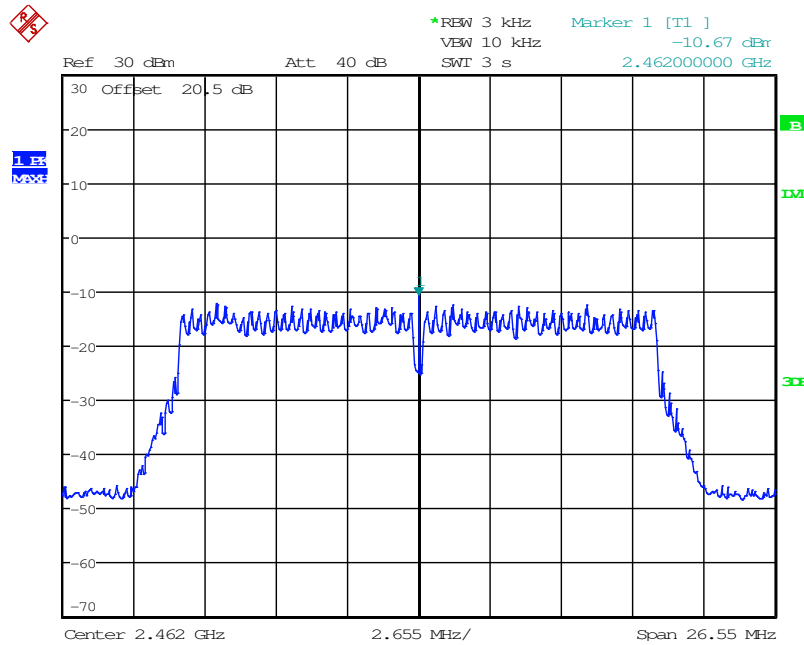

Date: 23.AUG.2016 17:59:30

Figure 7.5.2-9: Power Spectral Density – High Channel

7.6 Duty Cycle

7.6.1 Measurement Procedure

The duty cycle was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r05 Section 6.0 Duty Cycle, Transmission Duration and Maximum Power Control Level. The unit was connected directly to the input of the spectrum analyzer via suitable attenuation. The RBW and VBW were set to 10 MHz and the number of sweep points across duration T was set to exceed 100.

7.6.2 Measurement Results


The results for all the modes of operation are provided below.

Table 7.6.2-1 Duty Cycle Correction Factor

Mode	Time On [ms]	Period [ms]	Duty Cycle %	Correction Factor [dB]
802.11b	18.92	19.0025	99.57	N/A
802.11g	3.144	3.208	98.00	N/A
802.11n 20 MHz	0.995	1.059	93.96	0.271


Notes:

- The correction factor was calculated as $10 \cdot \log(1/(\text{Time on}/\text{Period}))$
- The duty cycle correction factor was used for configurations transmission with a duty cycle smaller than 98%.

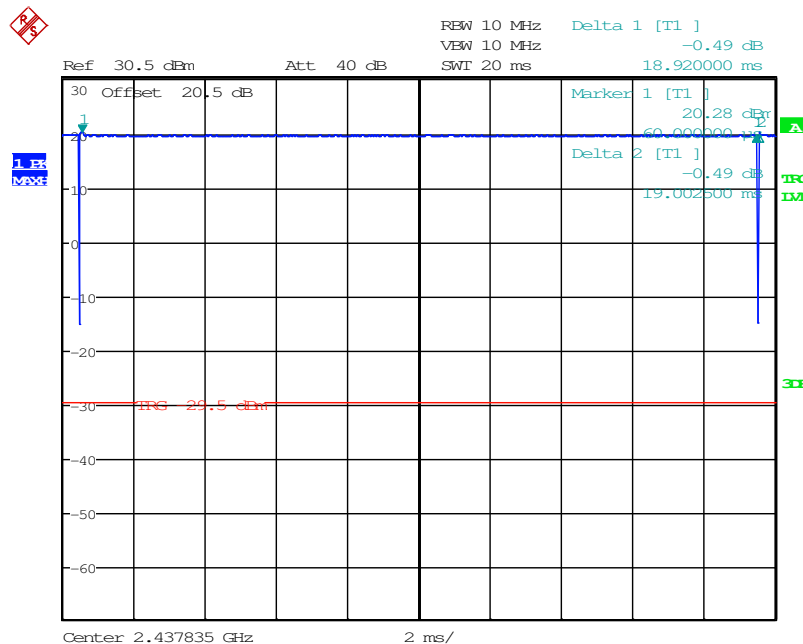


Date: 15.AUG.2016 18:07:49

Figure 7.6.2-1: Duty Cycle 802.11b

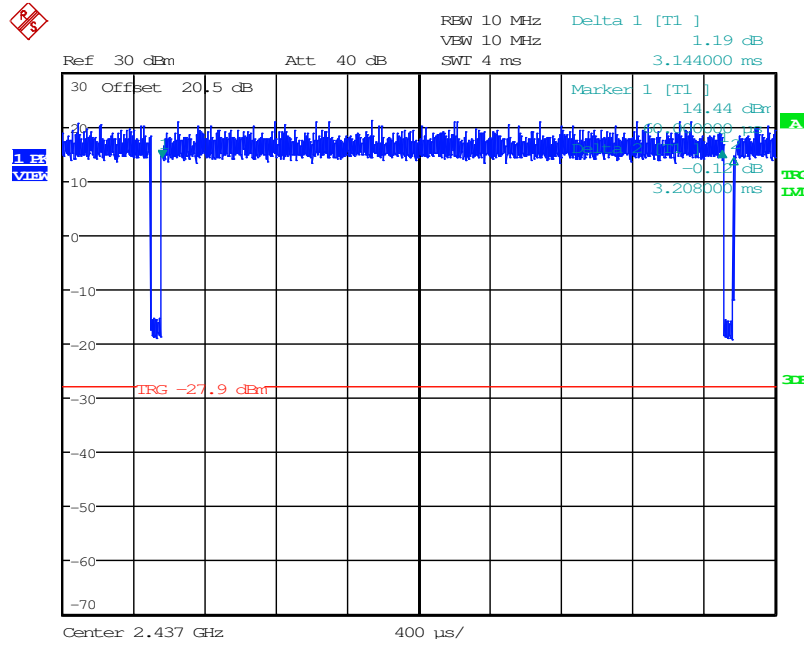

Date: 15.AUG.2016 18:35:39

Figure 7.6.2-2: Duty Cycle 802.11g

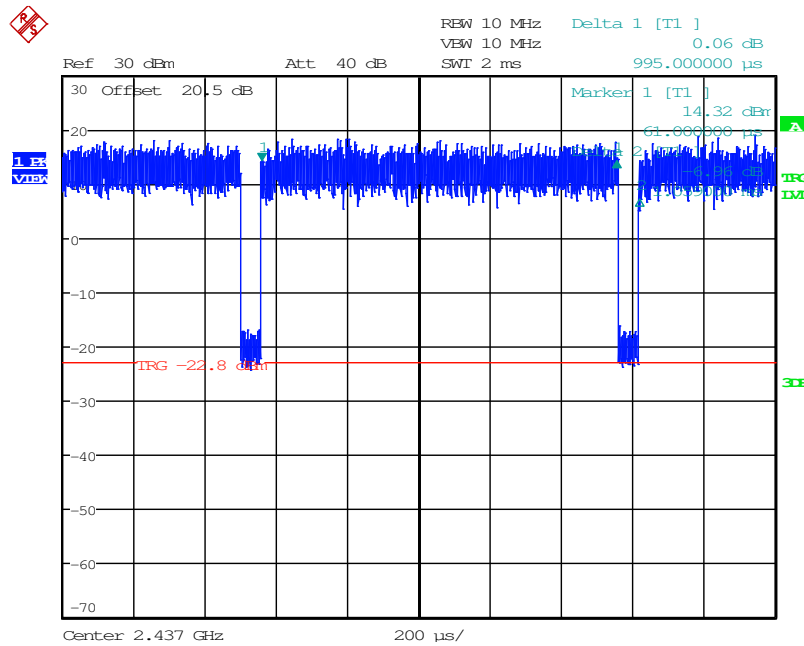

Date: 15.AUG.2016 19:49:06

Figure 7.8.2-3: Duty Cycle 802.11n 20 MHz

7.7 Power Line Conducted Emissions – FCC: Section 15.207 ISED Canada: RSS-Gen 8.8

7.7.1 Measurement Procedure

ANSI C63.10 section 6.2 was the guiding document for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer’s resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss
Margin = Applicable Limit - Corrected Reading

7.7.2 Measurement Results

Results are shown below.

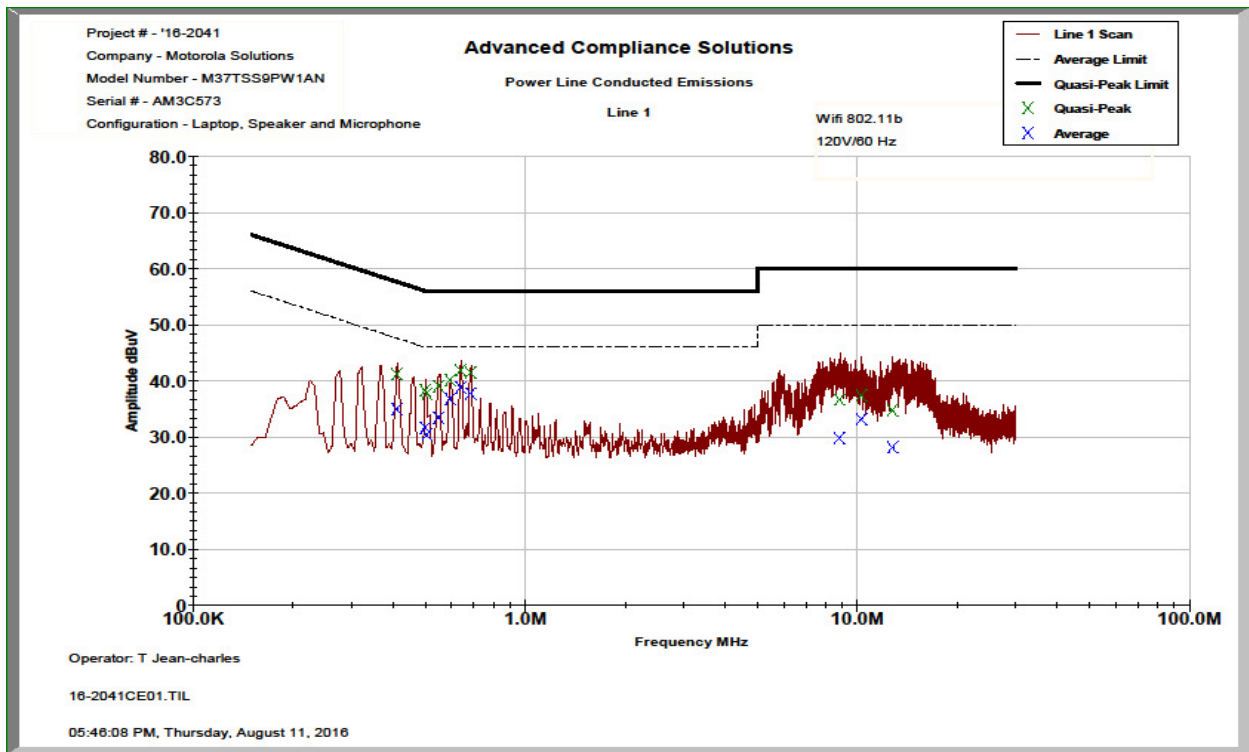


Figure 7.6.2-1: Conducted Emissions Results – Line 1

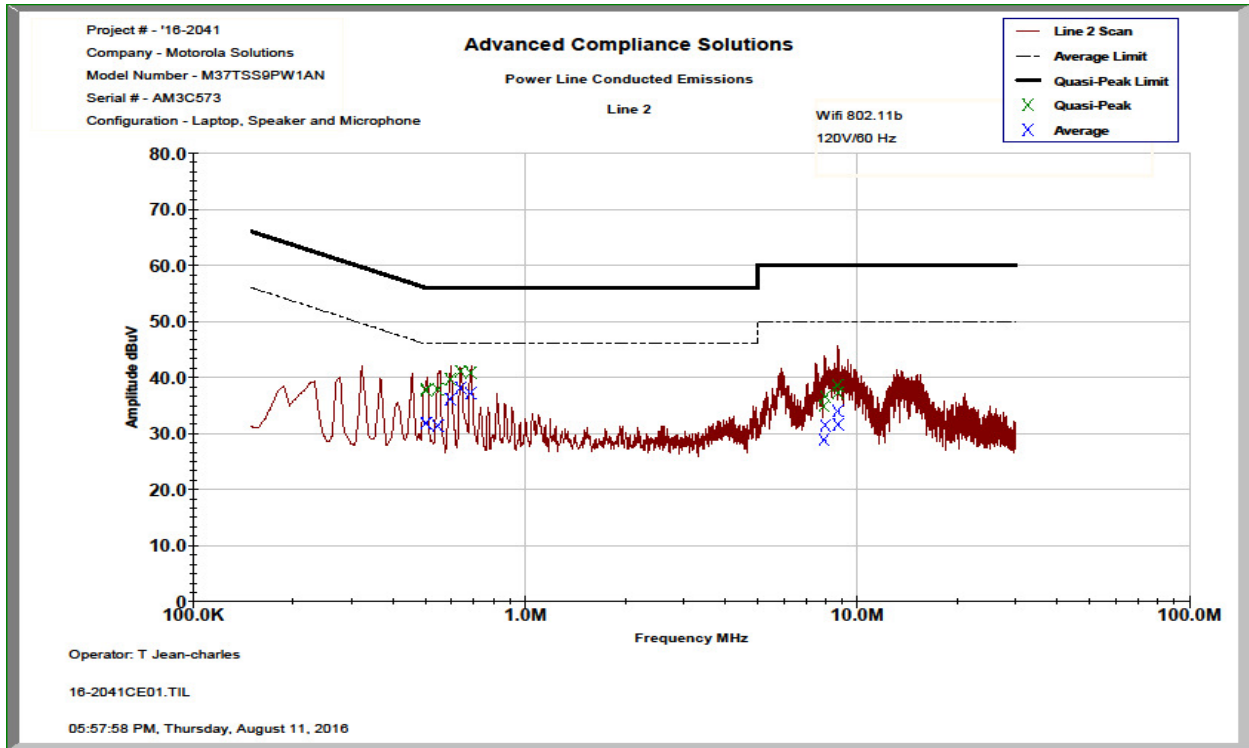


Figure 7.6.2-2: Conducted Emissions Results – Line 2

Table 7.6.2-1: Conducted EMI Results

Line 1 Line 2 Line 3
 Line 4
 To Ground Floating
 Telecom Port _____
 dBµV dBµA

Plot Number: 16-2041CE01
Power Supply Description: 15
VDC Power Supply

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
Line 1									
0.410988	30.995	24.805	10.21	41.21	35.02	57.63	47.63	16.4	12.6
0.50085	28.137	21.503	10.20	38.34	31.71	56.00	46.00	17.7	14.3
0.505688	27.612	20.227	10.20	37.82	30.43	56.00	46.00	18.2	15.6
0.549324	28.891	23.325	10.20	39.09	33.53	56.00	46.00	16.9	12.5
0.59495	29.965	26.609	10.20	40.17	36.81	56.00	46.00	15.8	9.2
0.639824	31.679	28.649	10.20	41.88	38.85	56.00	46.00	14.1	7.2
0.68525	31.286	27.565	10.20	41.48	37.76	56.00	46.00	14.5	8.2
8.84169	26.035	19.199	10.62	36.65	29.82	60.00	50.00	23.3	20.2
10.2824	26.701	22.541	10.69	37.39	33.23	60.00	50.00	22.6	16.8
12.7563	23.94	17.33	10.77	34.71	28.10	60.00	50.00	25.3	21.9
Line 2									
0.5013	27.628	21.641	10.21	37.83	31.85	56.00	46.00	18.2	14.2
0.5041	27.483	21.687	10.21	37.69	31.89	56.00	46.00	18.3	14.1
0.545474	27.703	21.197	10.21	37.91	31.41	56.00	46.00	18.1	14.6
0.59505	29.425	25.92	10.21	39.64	36.13	56.00	46.00	16.4	9.9
0.639112	30.937	27.941	10.21	41.15	38.15	56.00	46.00	14.9	7.9
0.6852	30.65	26.958	10.21	40.86	37.17	56.00	46.00	15.1	8.8
7.93874	24.246	18.236	10.62	34.87	28.86	60.00	50.00	25.1	21.1
8.01695	25.982	20.842	10.62	36.61	31.47	60.00	50.00	23.4	18.5
8.72511	27.916	23.345	10.65	38.57	33.99	60.00	50.00	21.4	16.0
8.77017	26.657	20.956	10.65	37.31	31.61	60.00	50.00	22.7	18.4

8 CONCLUSION

In the opinion of ACS, Inc., the model M37TSS9PW1AN manufactured by Motorola Solutions meets the requirements of FCC Part 15 subpart C and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-247 for the test procedures documented in the test report.

END REPORT