




Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Frequency	TX 2412MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

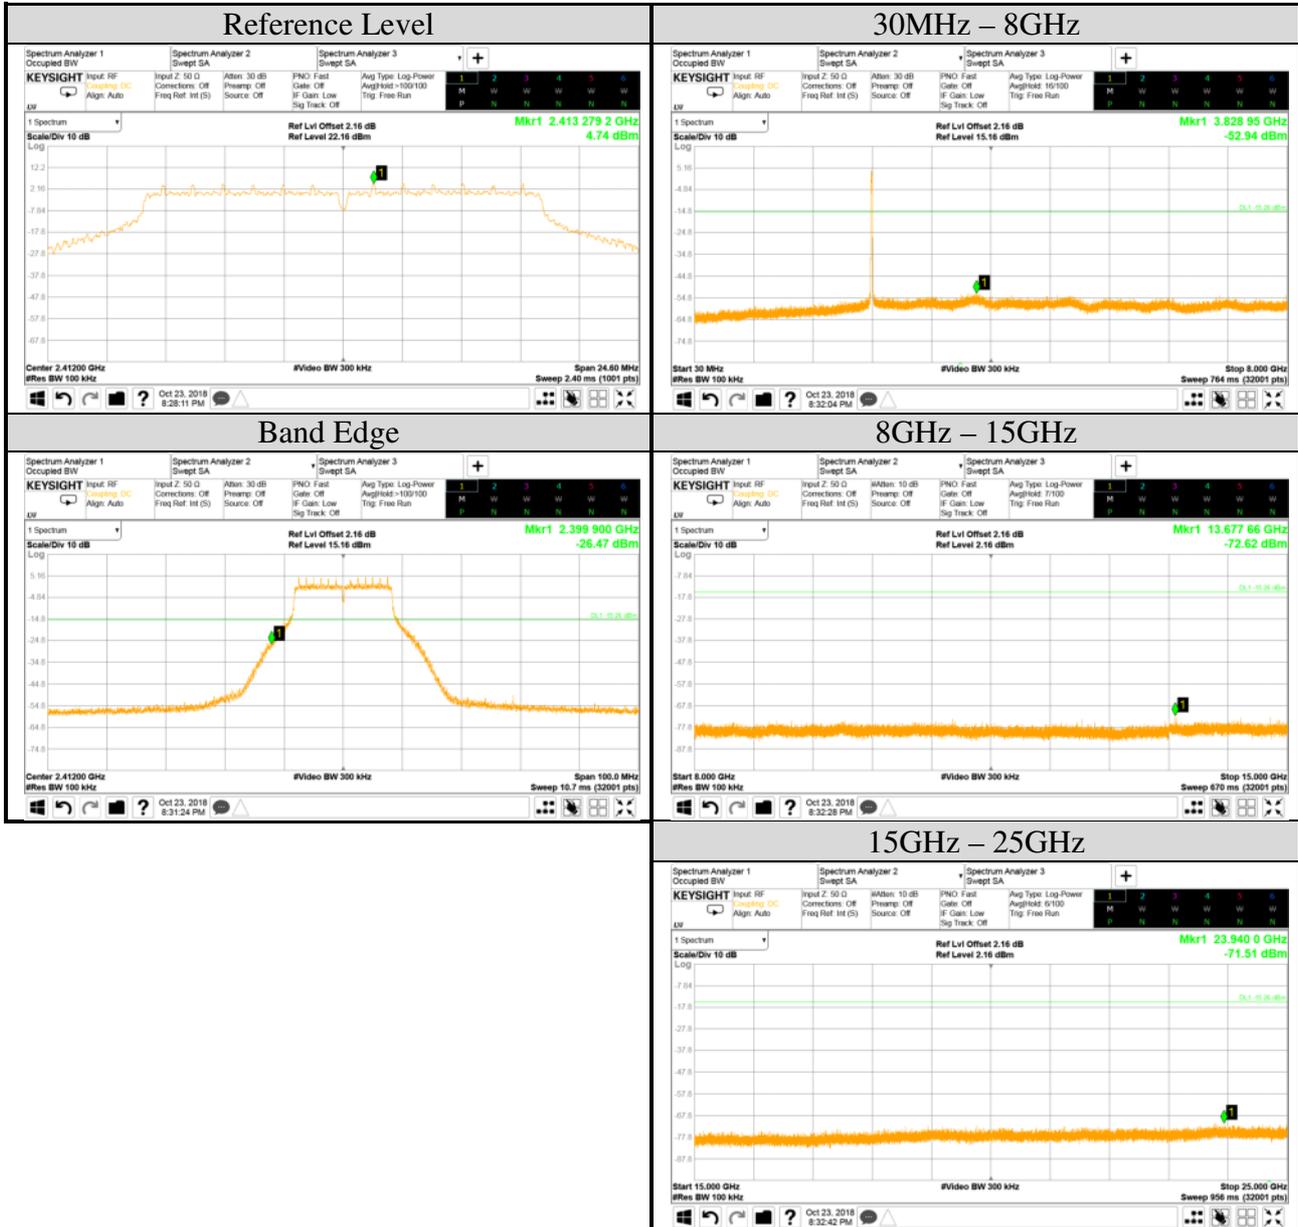

Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

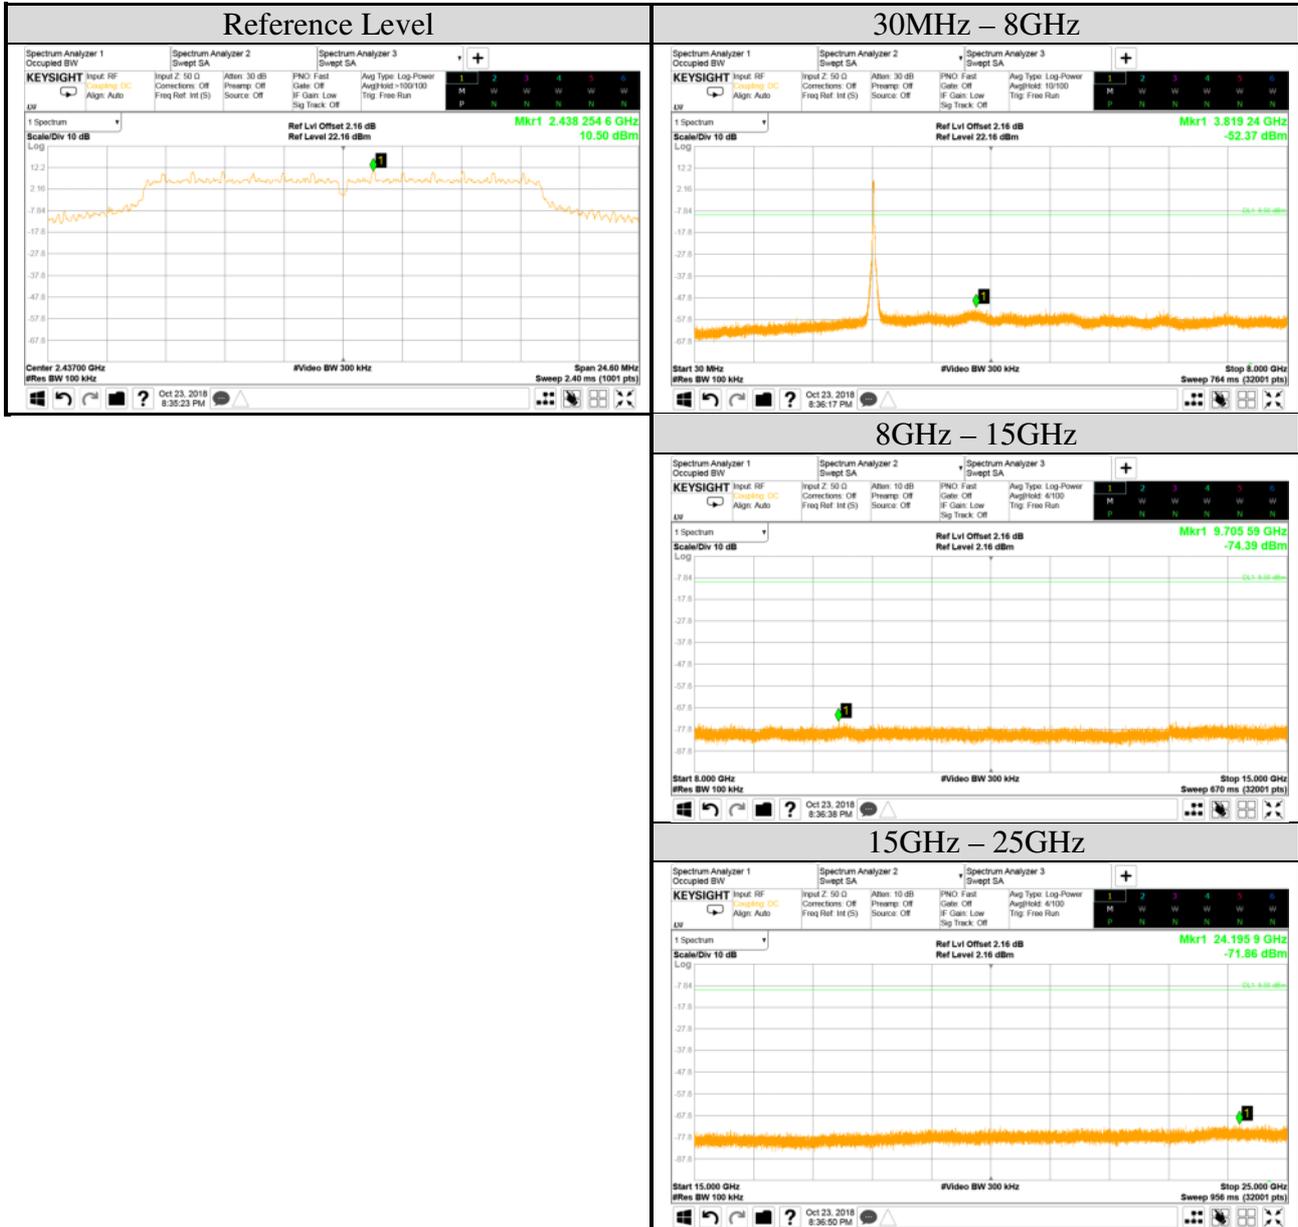


Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

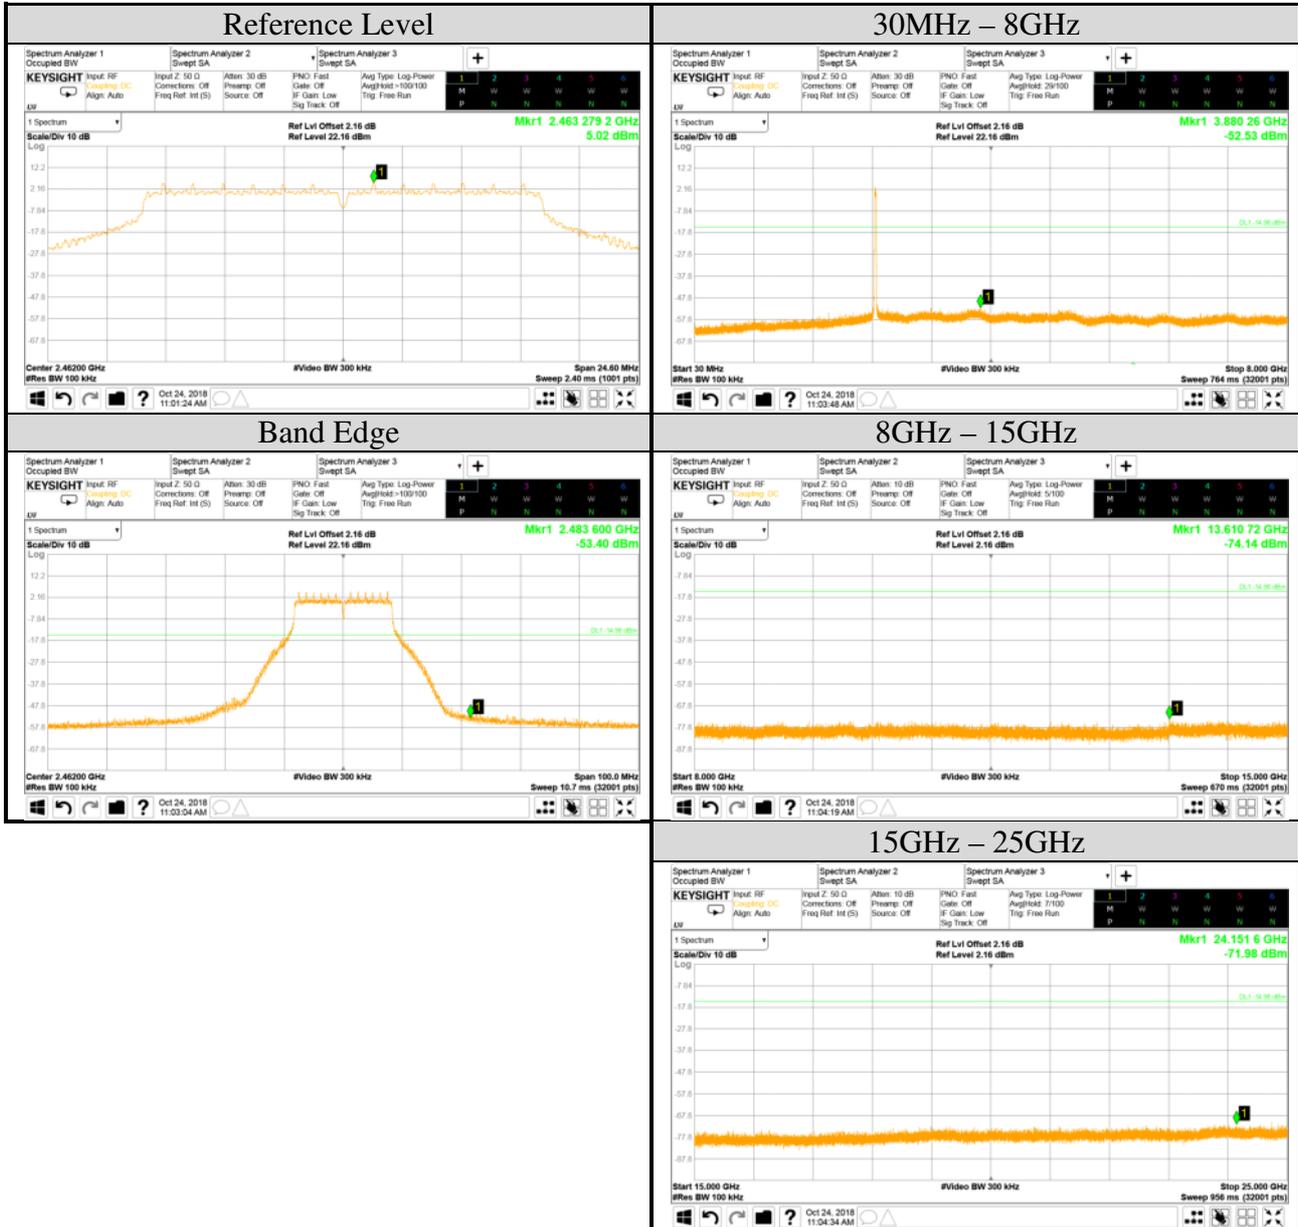


Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303





Test Date	2018/10/23~30	Temp./Hum.	22~23°C/52~55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11g	Frequency	TX 2472MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

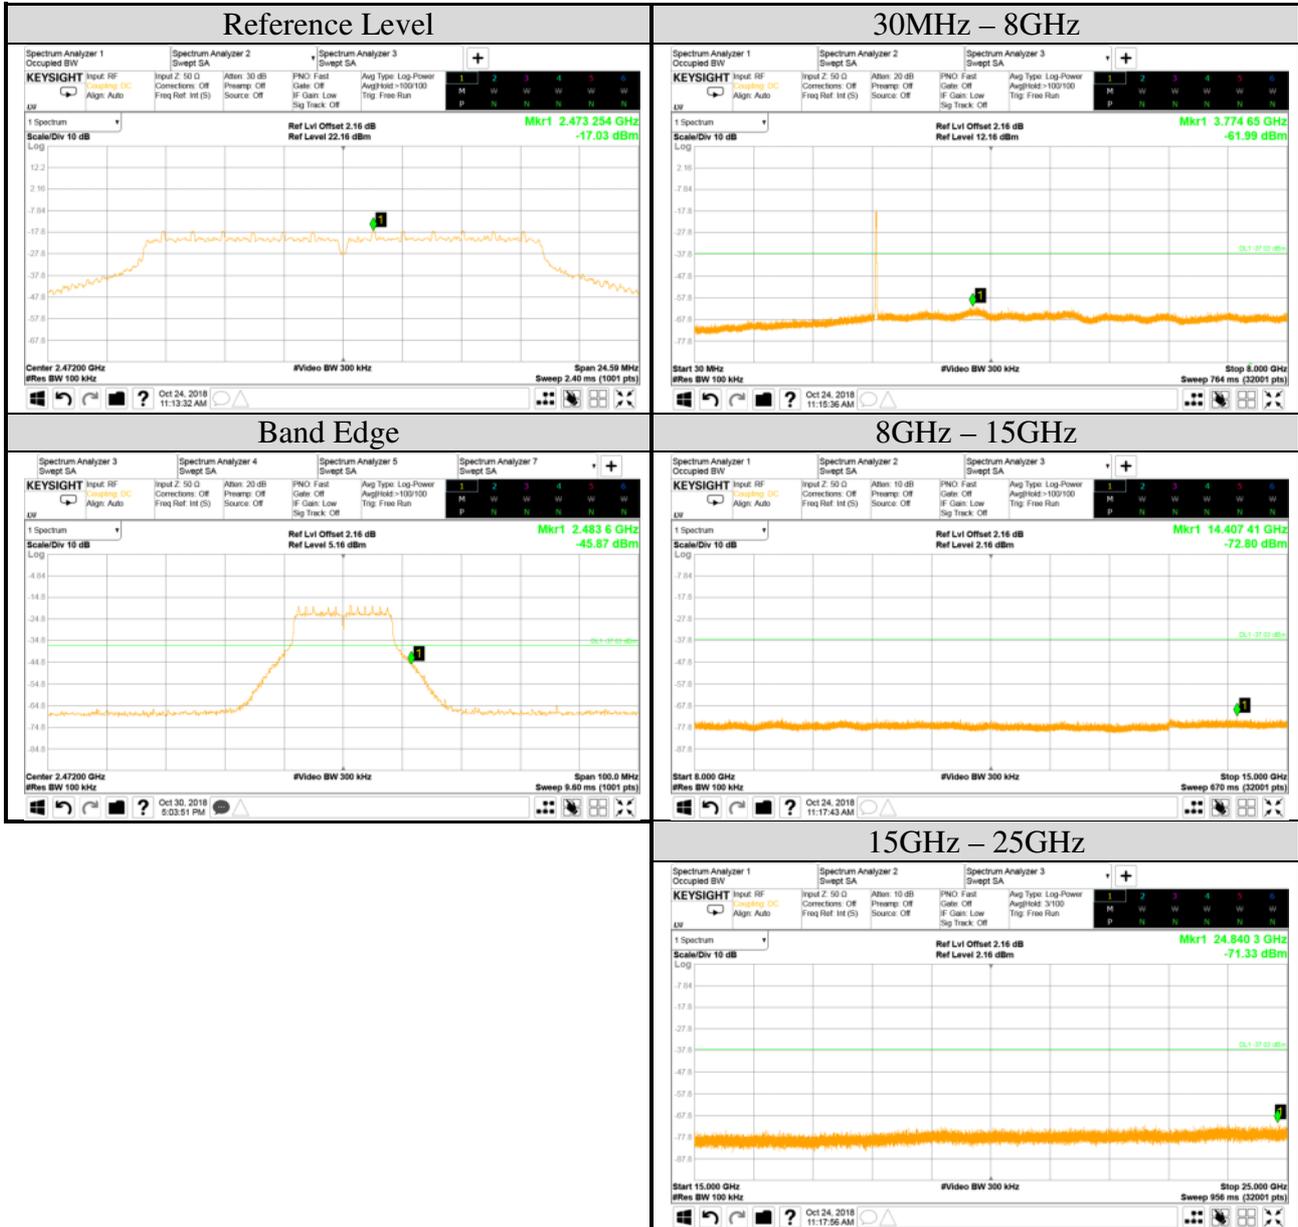


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Frequency	TX 2412MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

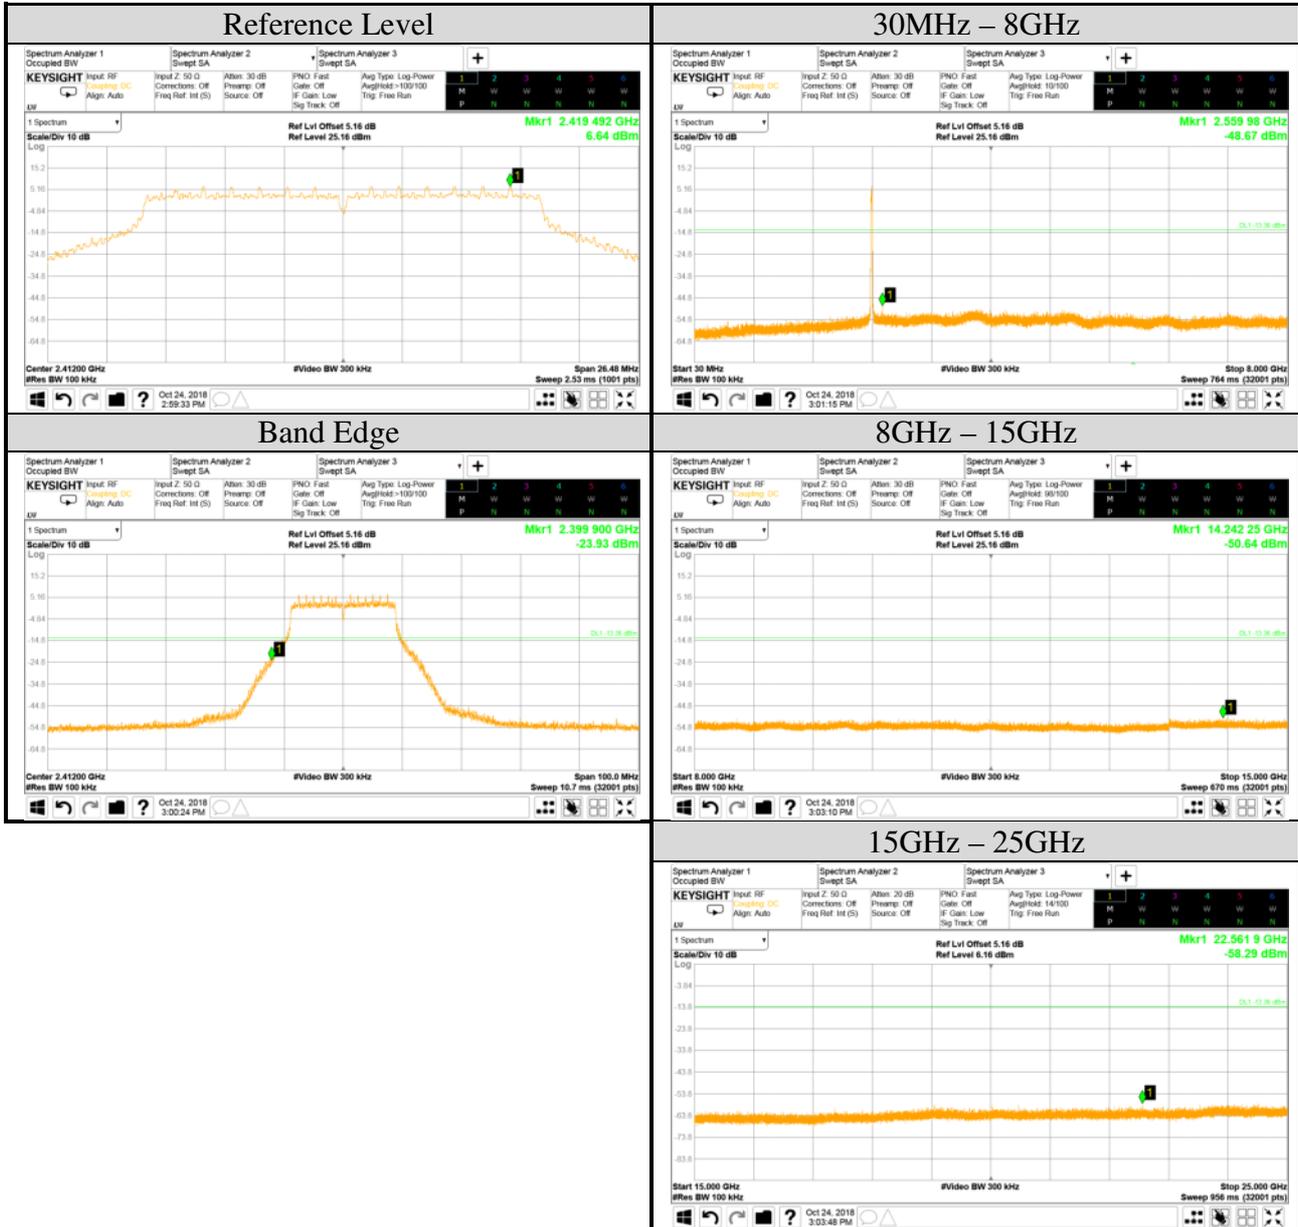


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

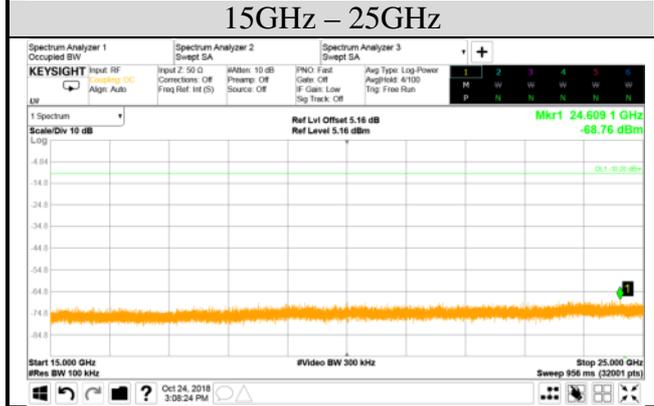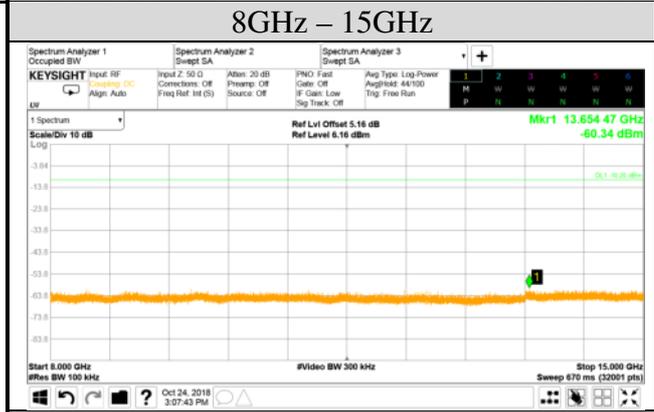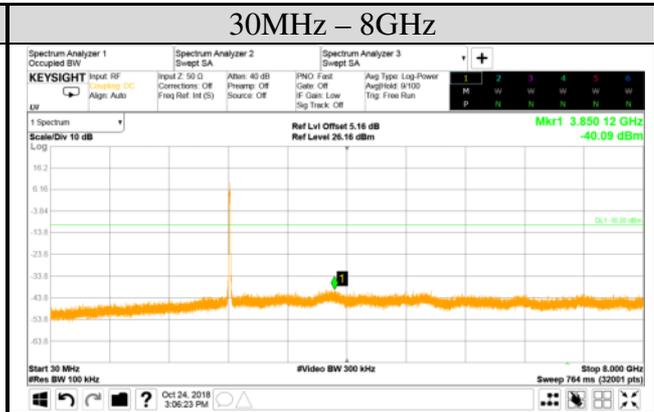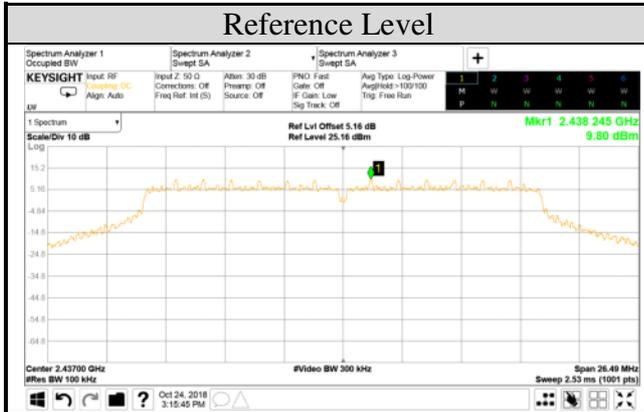


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

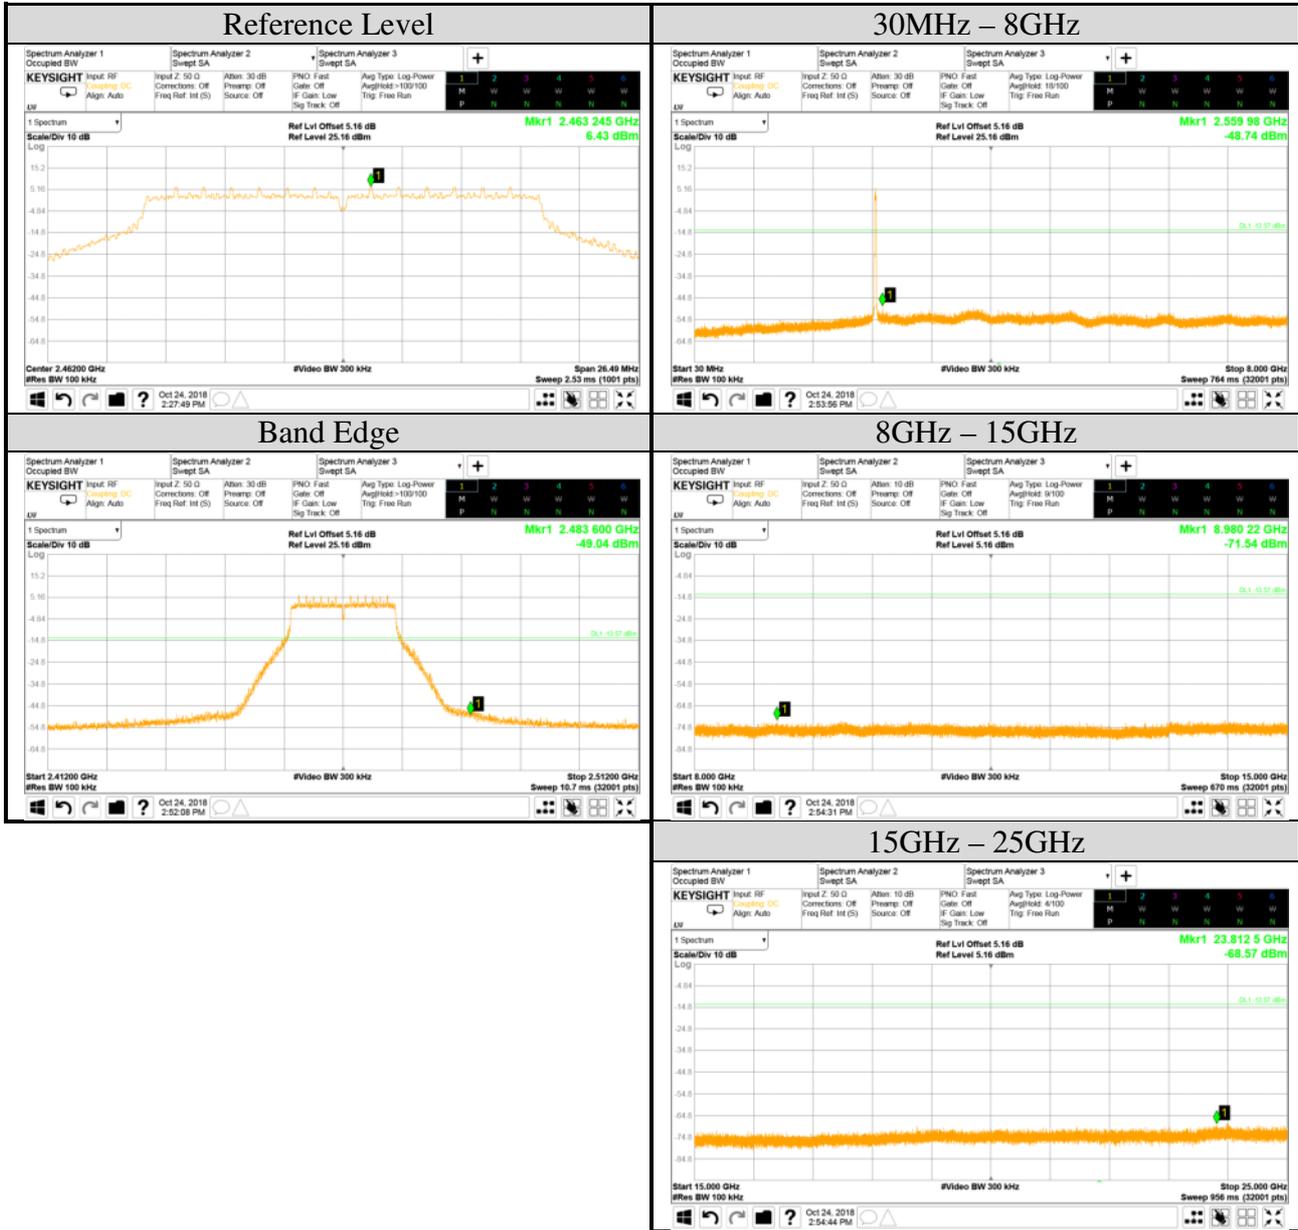




Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT20	Frequency	TX 2472MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

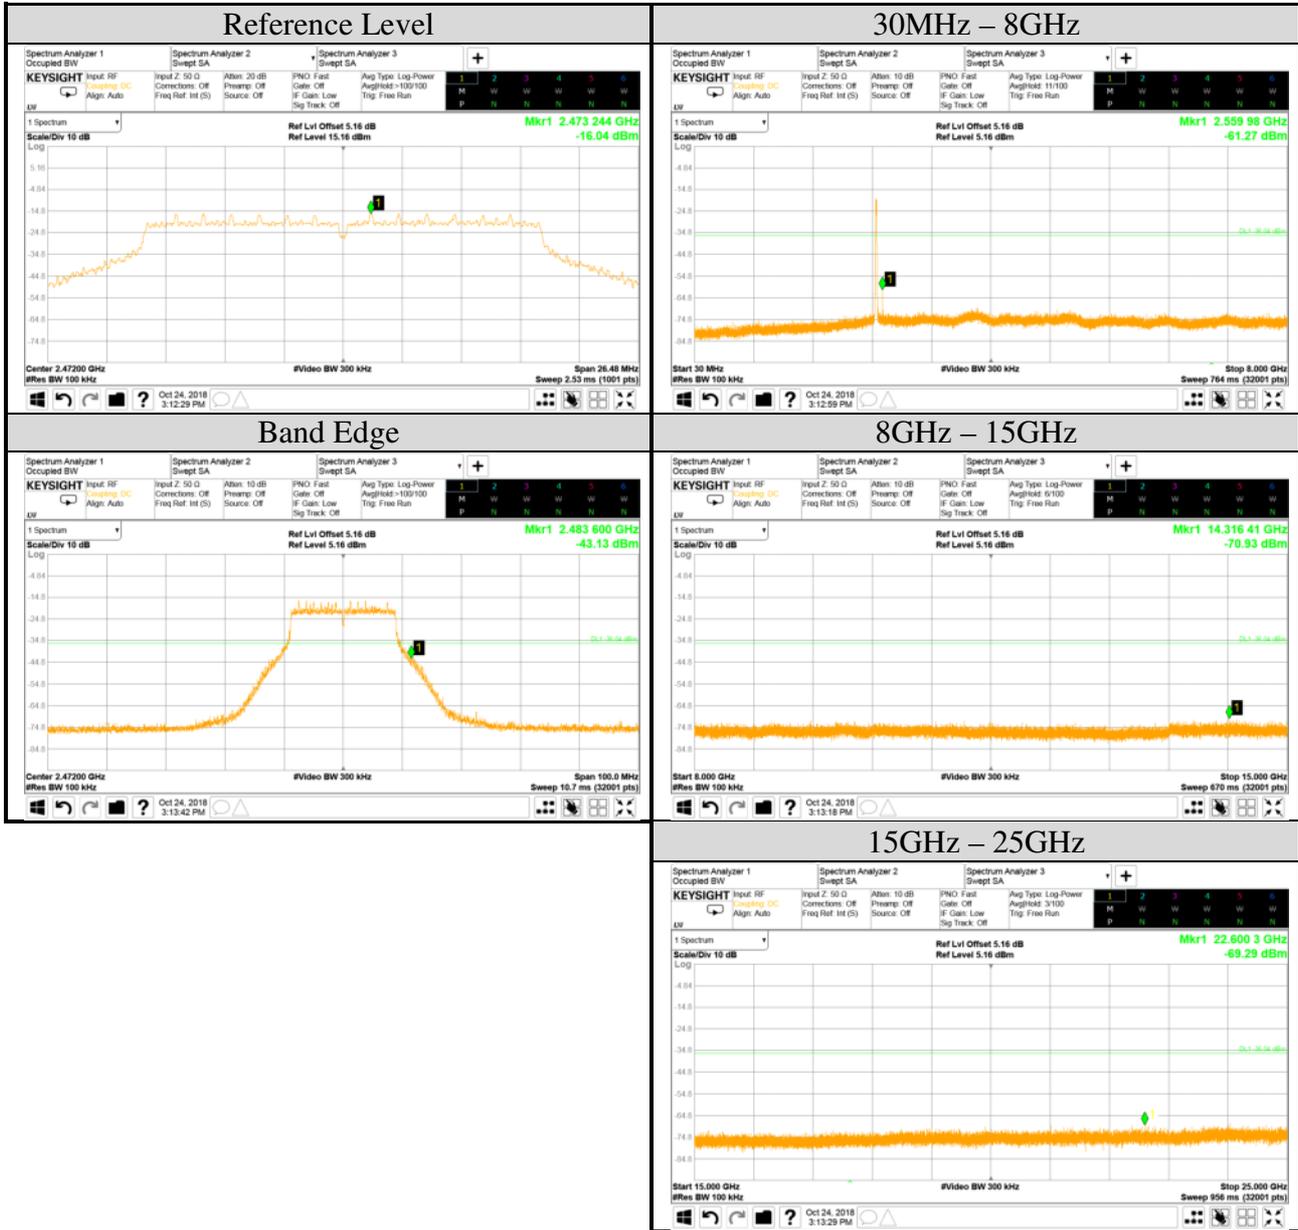


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Frequency	TX 2422MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

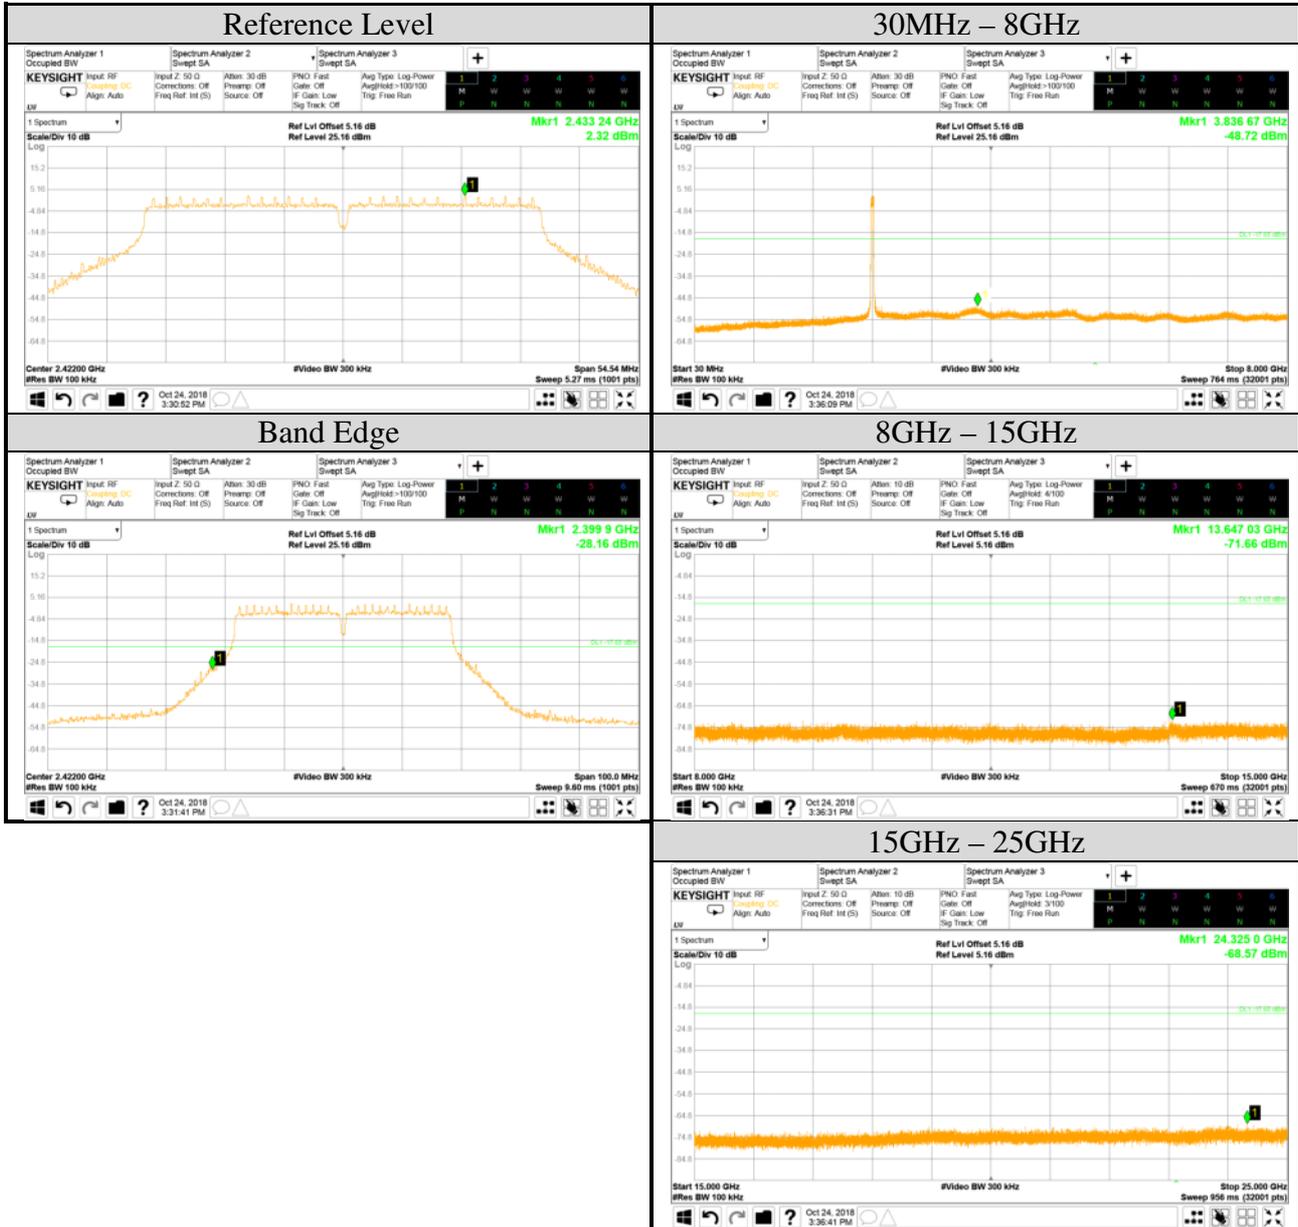


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

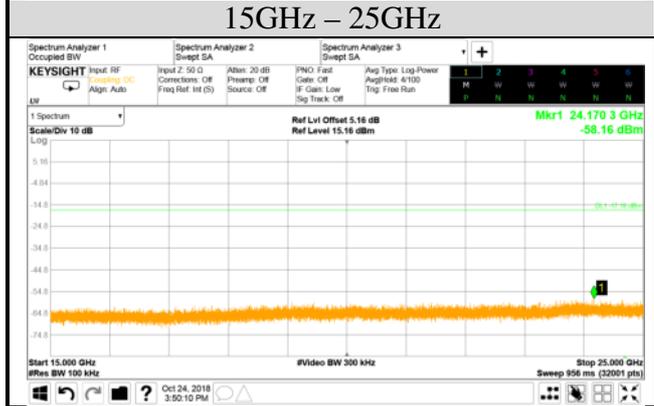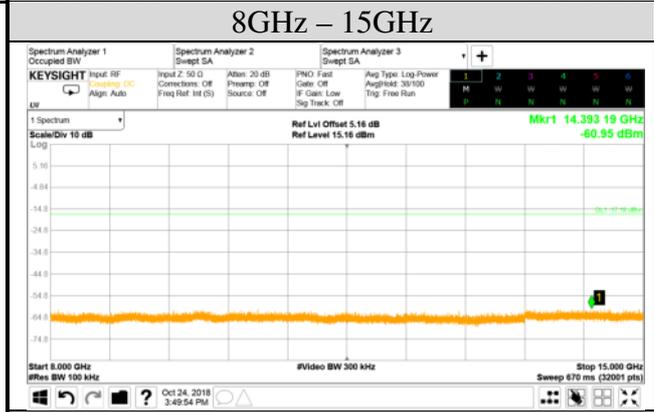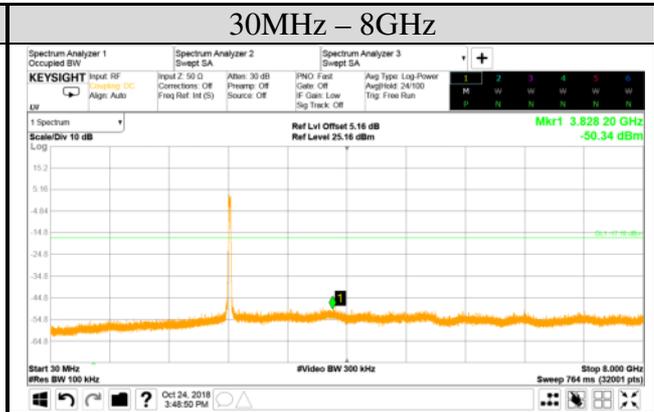


Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Frequency	TX 2452MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

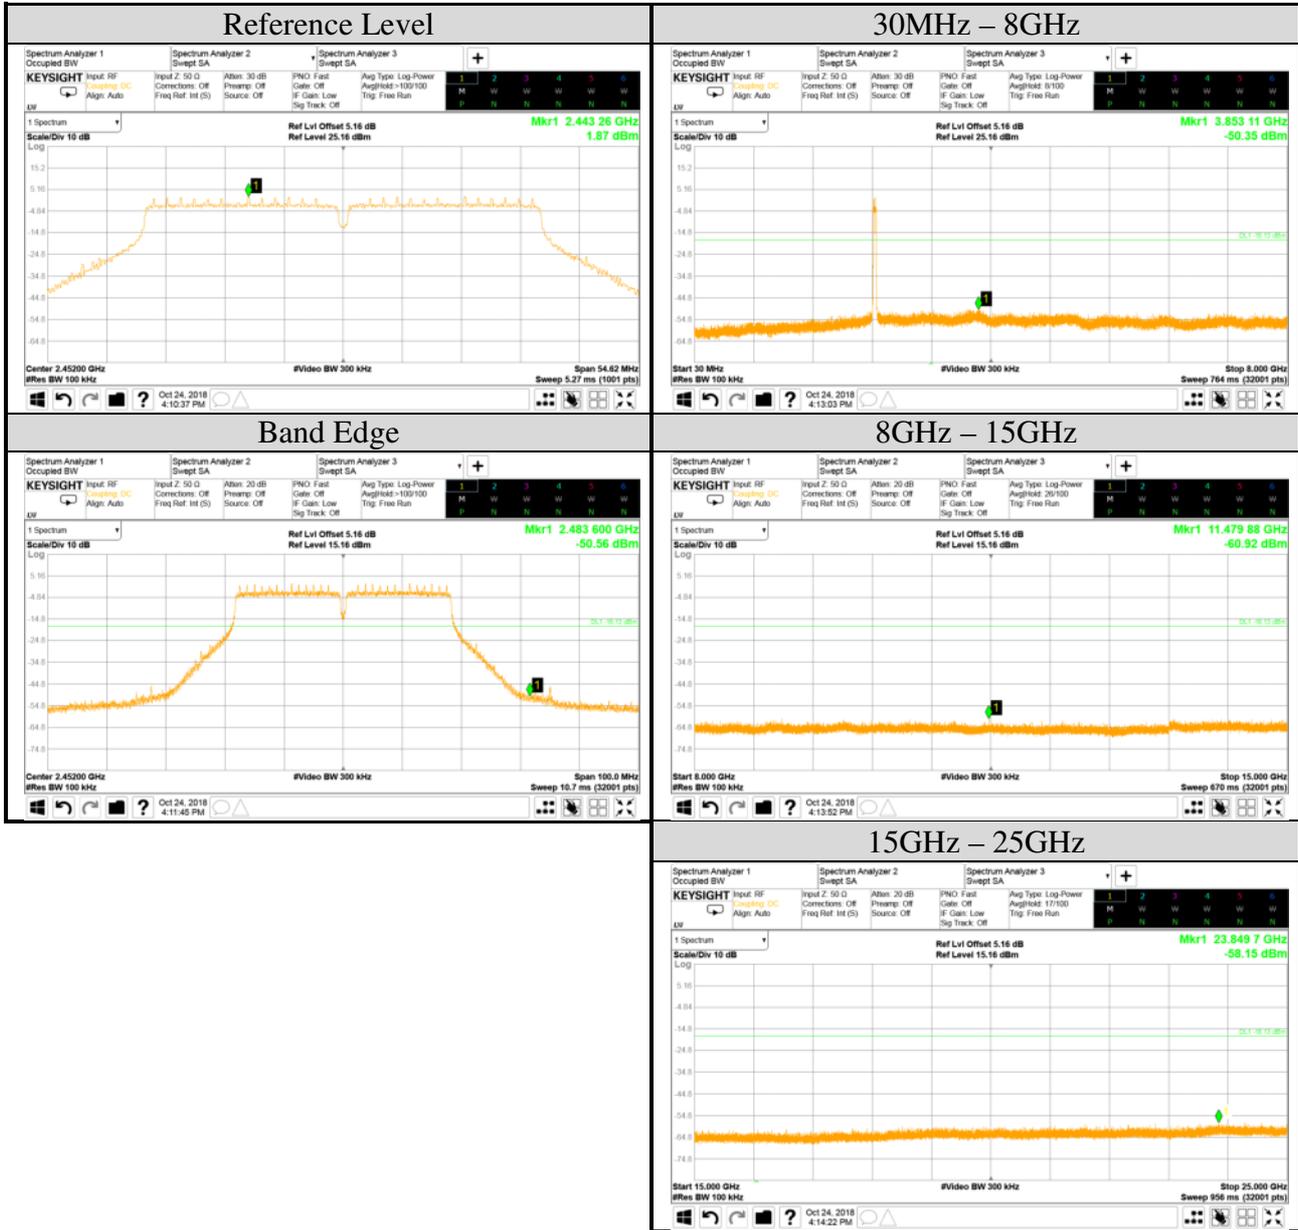




Test Date	2018/10/24	Temp./Hum.	24°C/52%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	802.11n-HT40	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		3

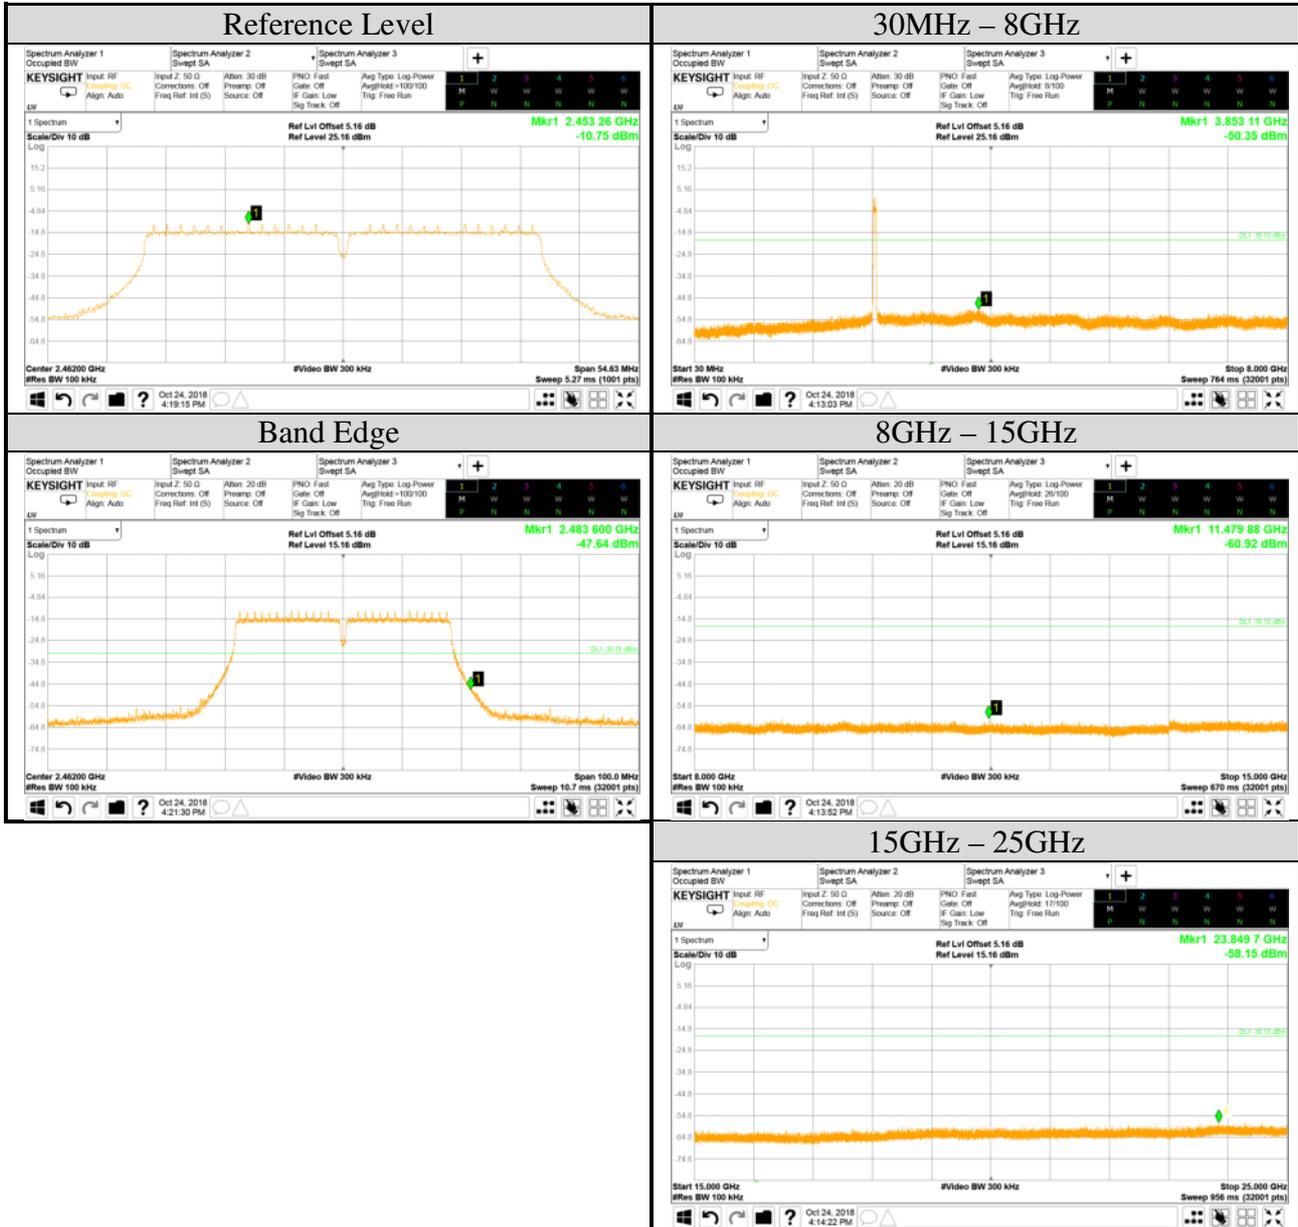


Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2402MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

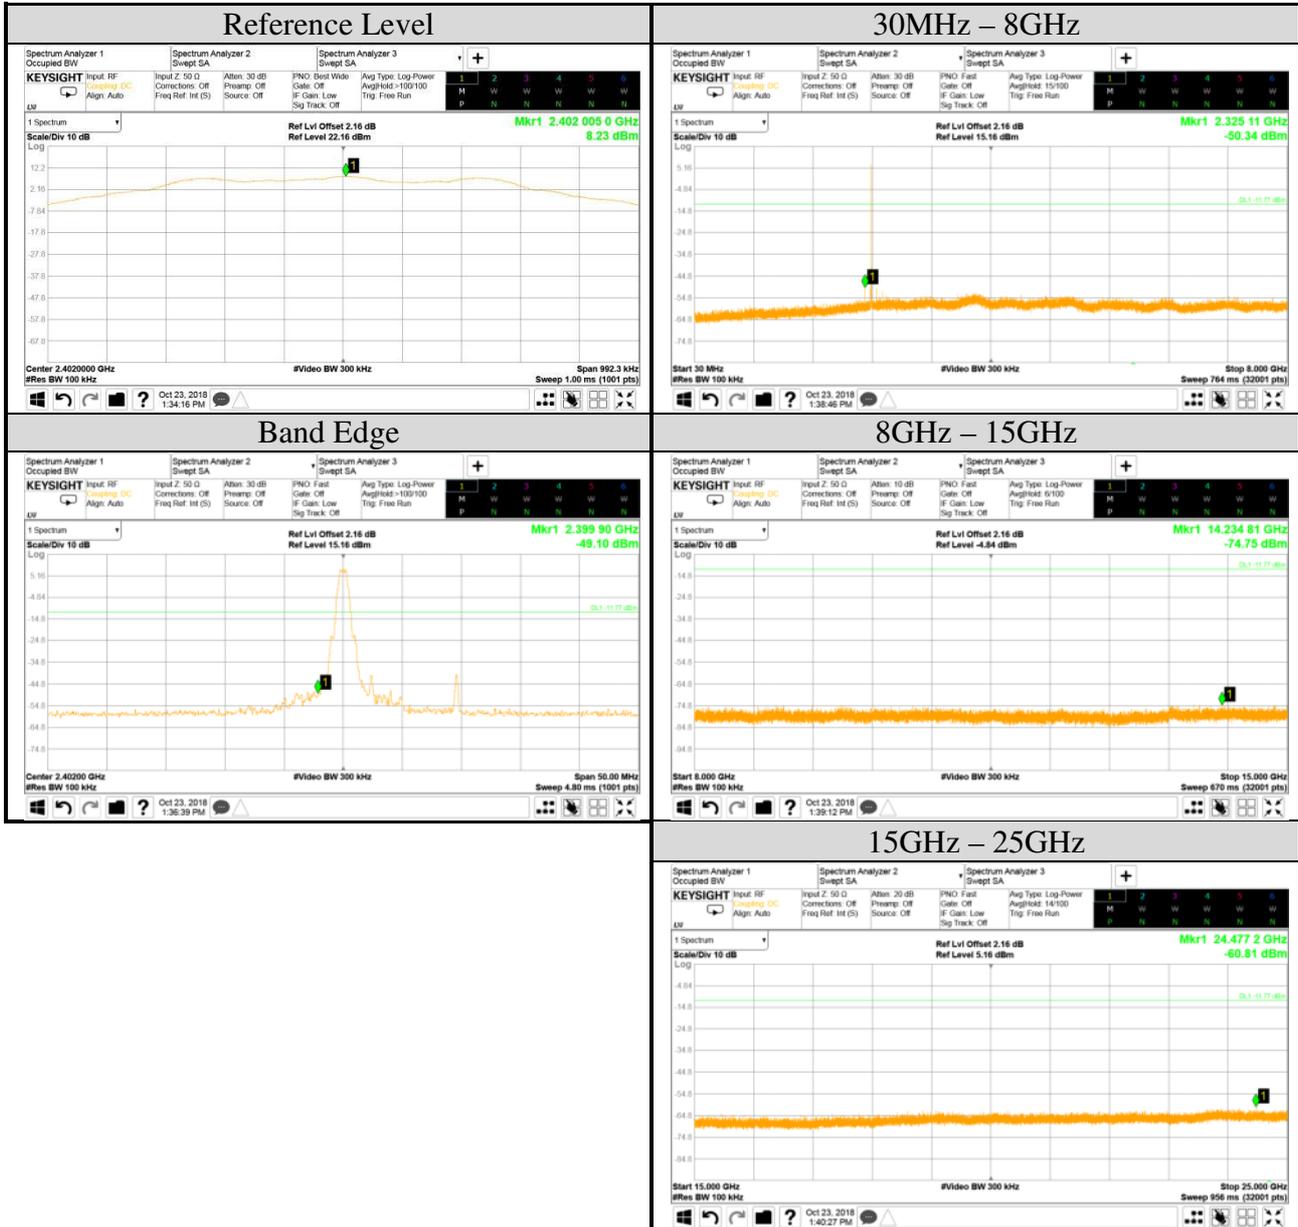

Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2440MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

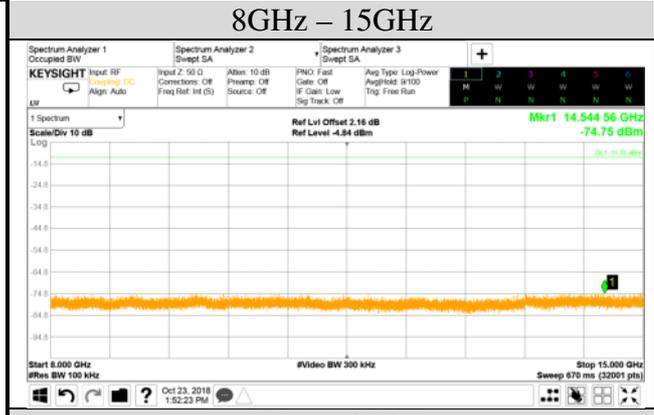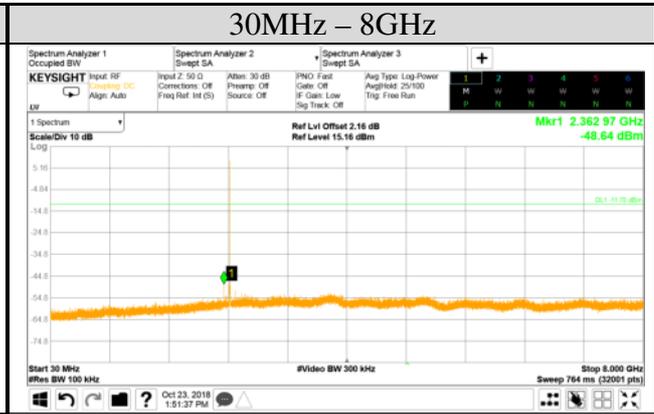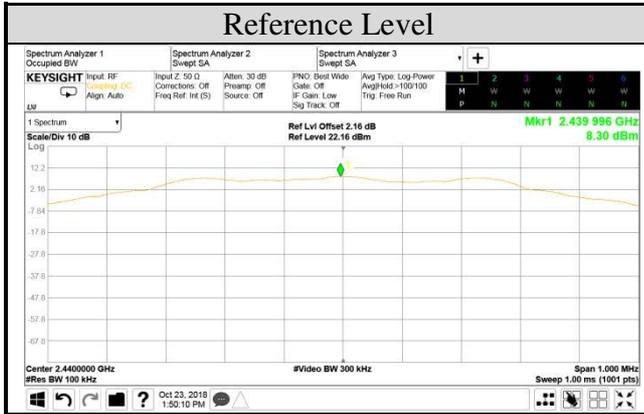

Test Date	2018/10/23	Temp./Hum.	23°C/55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2480MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			0

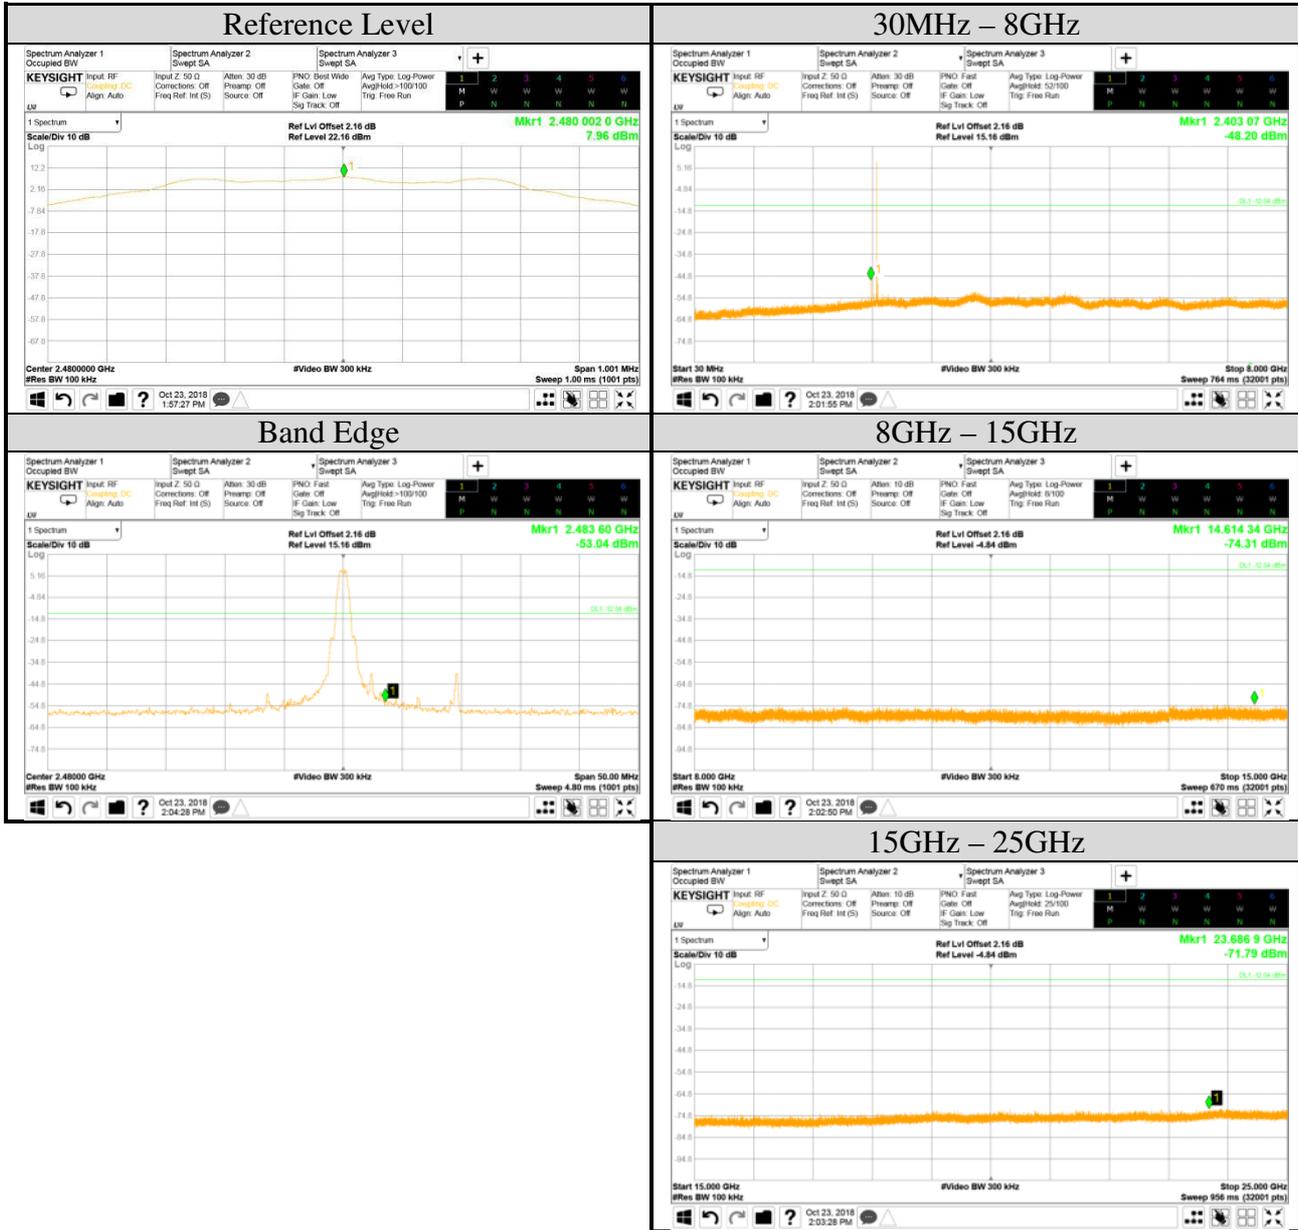

A.6 POWER SPECTRAL DENSITY


Test Date	2018/10/23~24	Temp./Hum.	23~24°C/52~55%
Cable Loss	2.16dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Simultaneous Factor10 log(n) (Note: “n” is antenna number)			802.11b/g, BLE: 0, 802.11n-HT20/40: 3

A.6.1 Power Spectral Density Result


Mode	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	2412	-4.73	< 8 dBm/3kHz
	2437	-1.33	
	2462	-3.26	
	2472	-8.63	
802.11g	2412	-8.60	
	2437	-5.01	
	2462	-9.64	
	2472	-31.74	
802.11n-HT20	2412	-7.59	
	2437	-5.28	
	2462	-7.29	
	2472	-31.05	
802.11n-HT40	2422	-13.33	
	2437	-10.99	
	2452	-11.50	
	2462	-25.64	
BLE	2402	-6.74	
	2440	-6.37	
	2480	-7.23	

Note: 1. All results have been included cable loss and Simultaneous Factor.

A.6.2 Measurement Plots

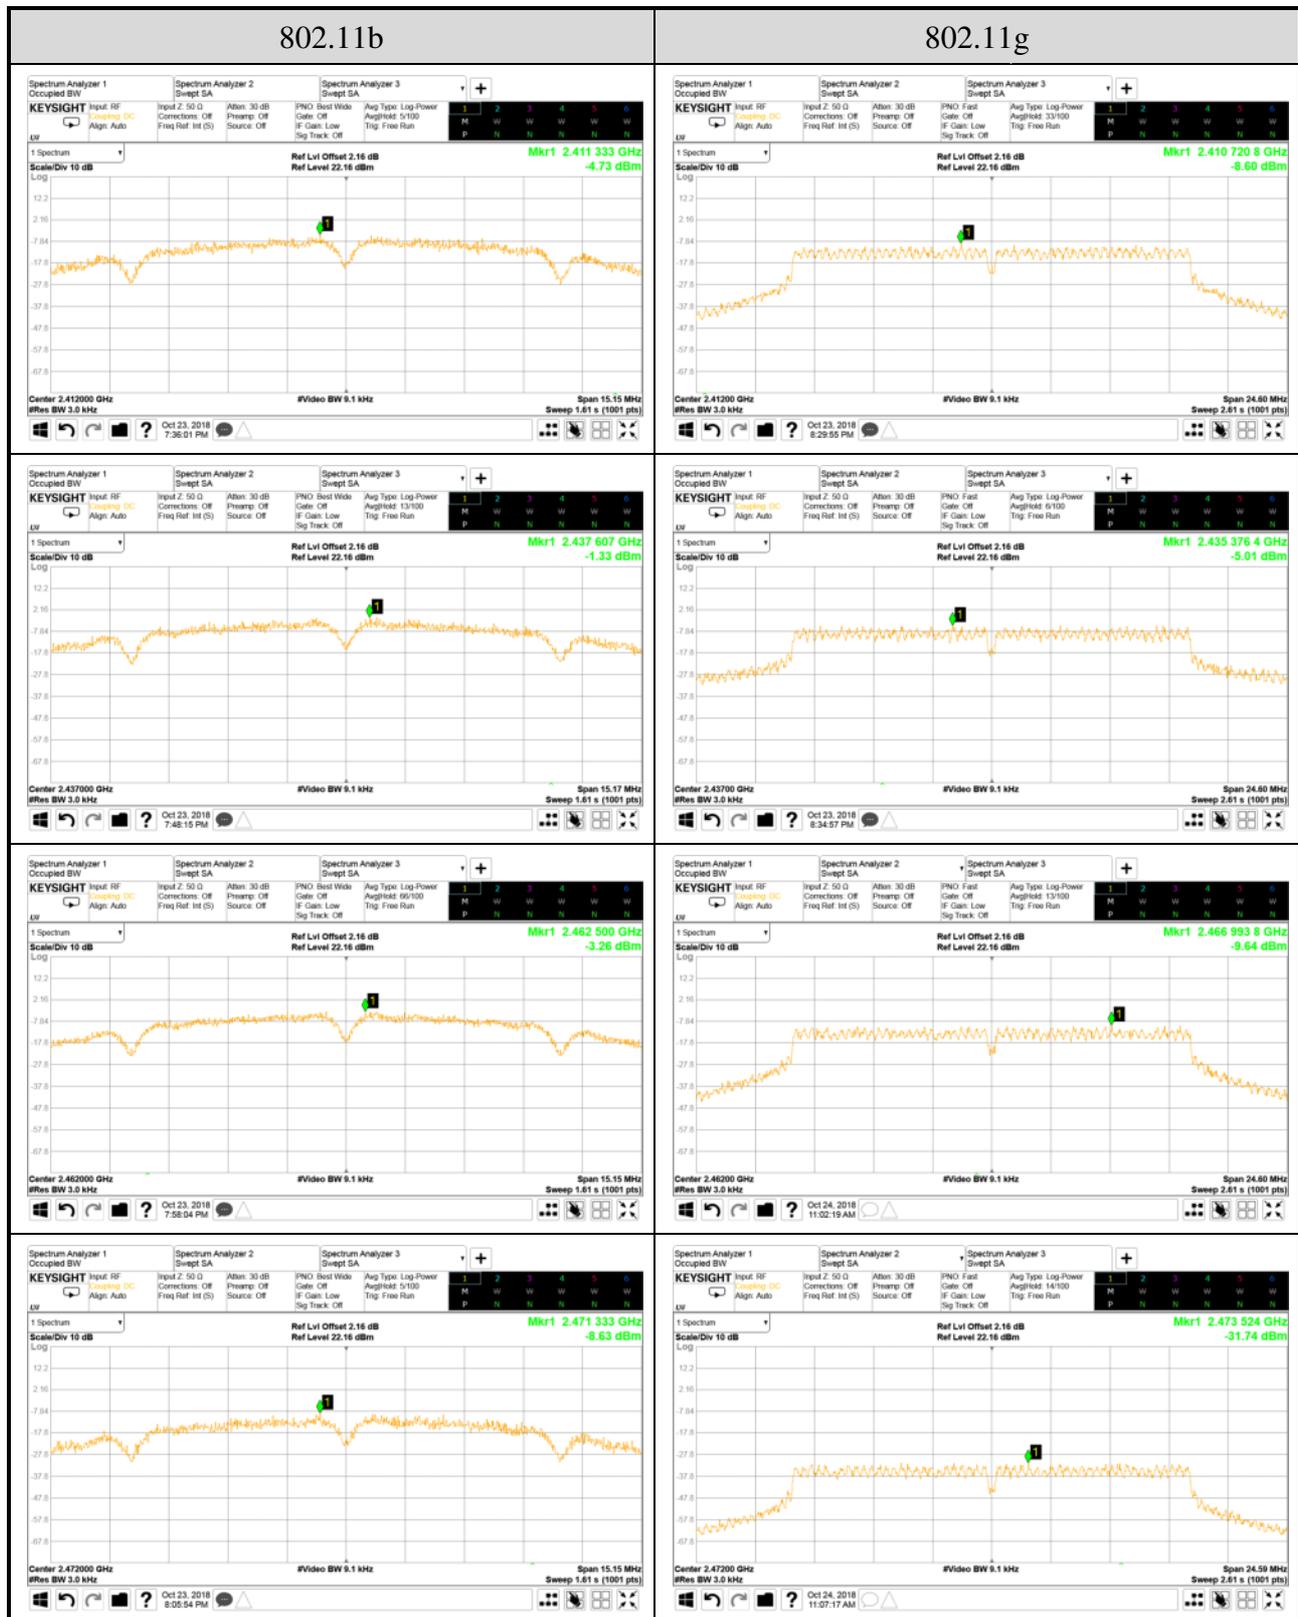


Note: All results have been included cable loss and Simultaneous Factor.

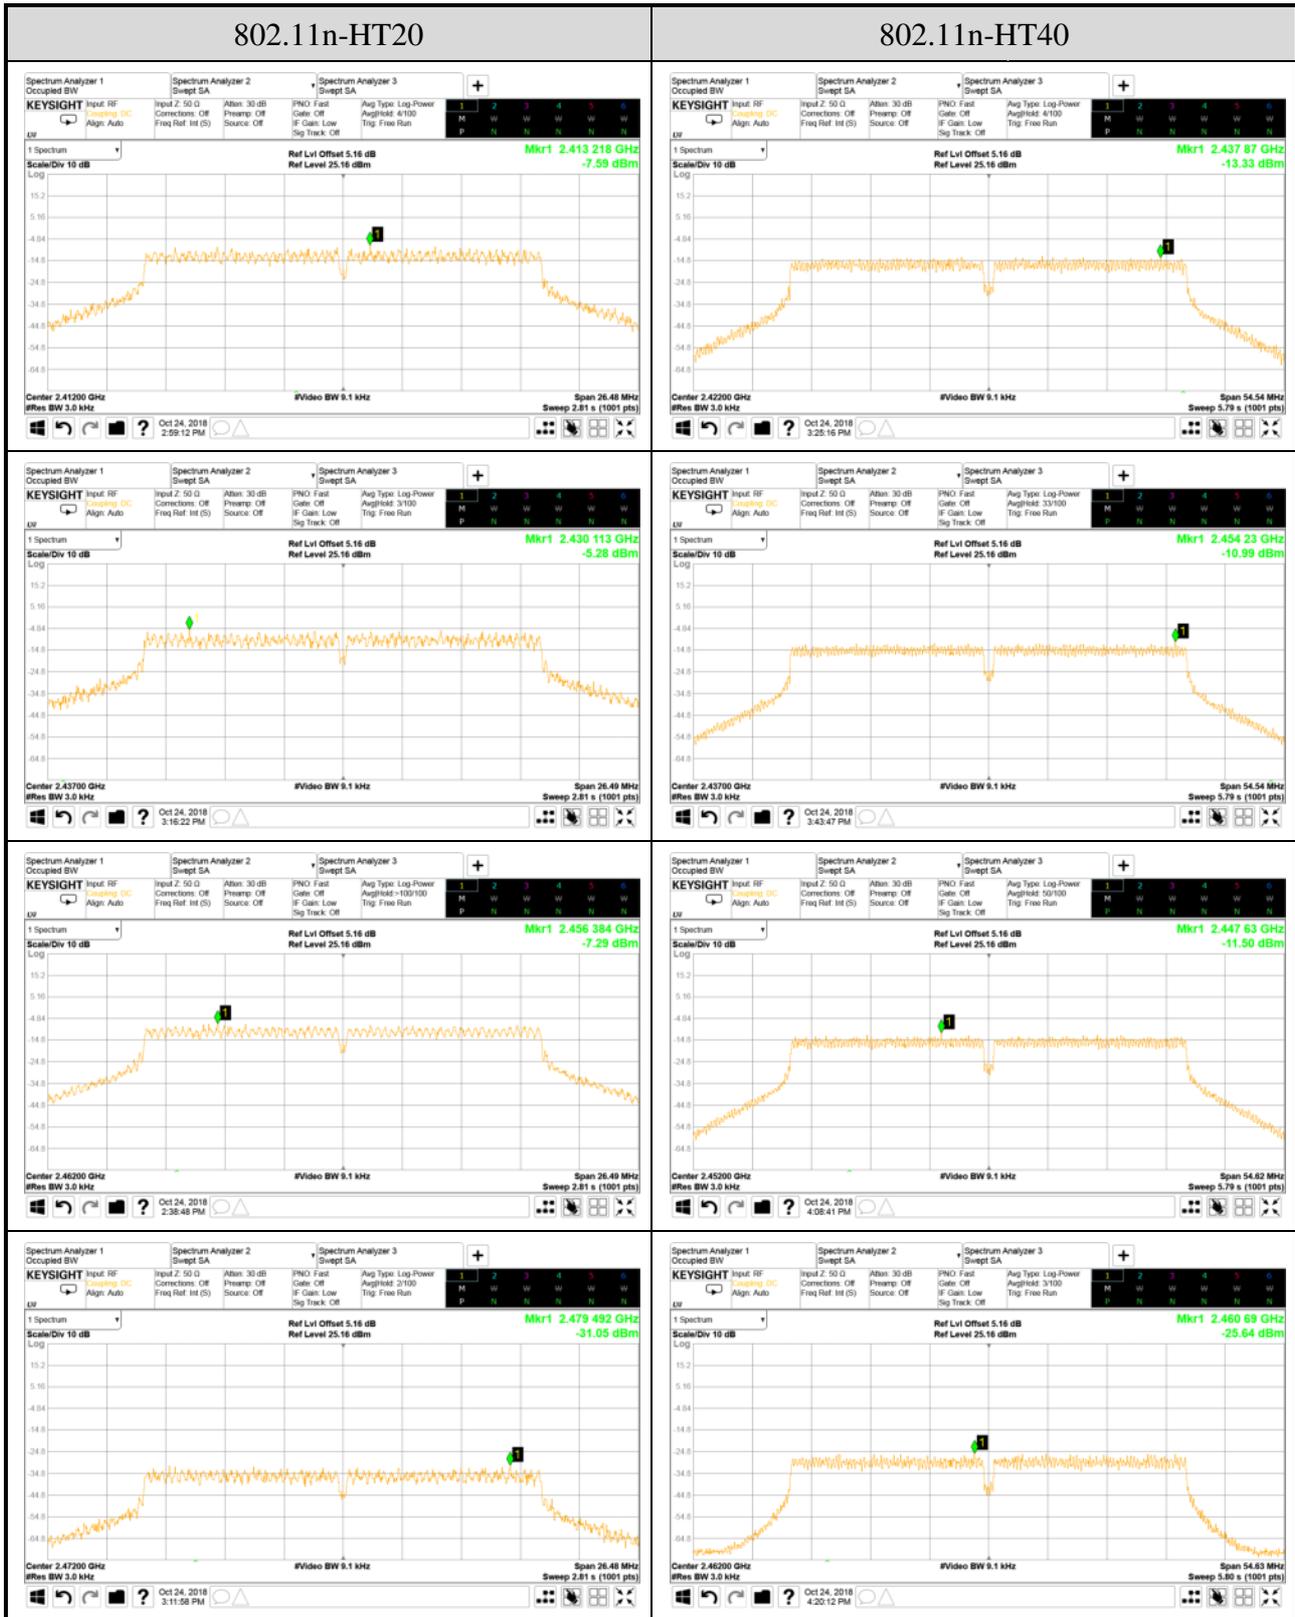

Note: All results have been included cable loss and Simultaneous Factor.

Audix Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

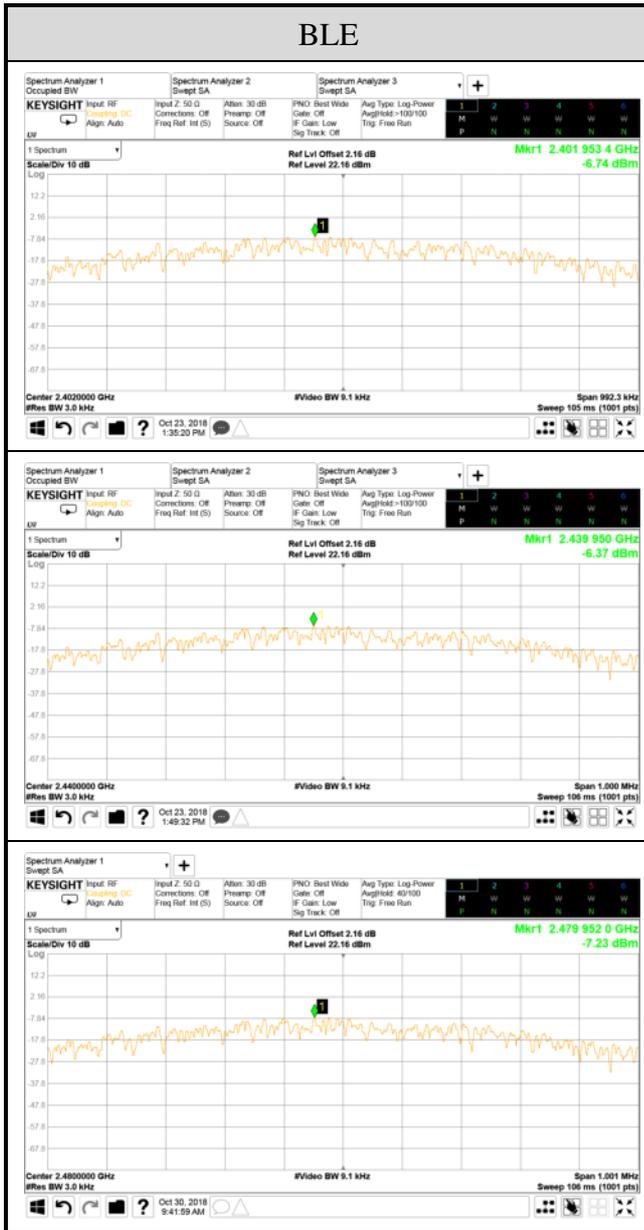

Note: All results have been included cable loss and Simultaneous Factor.