





BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

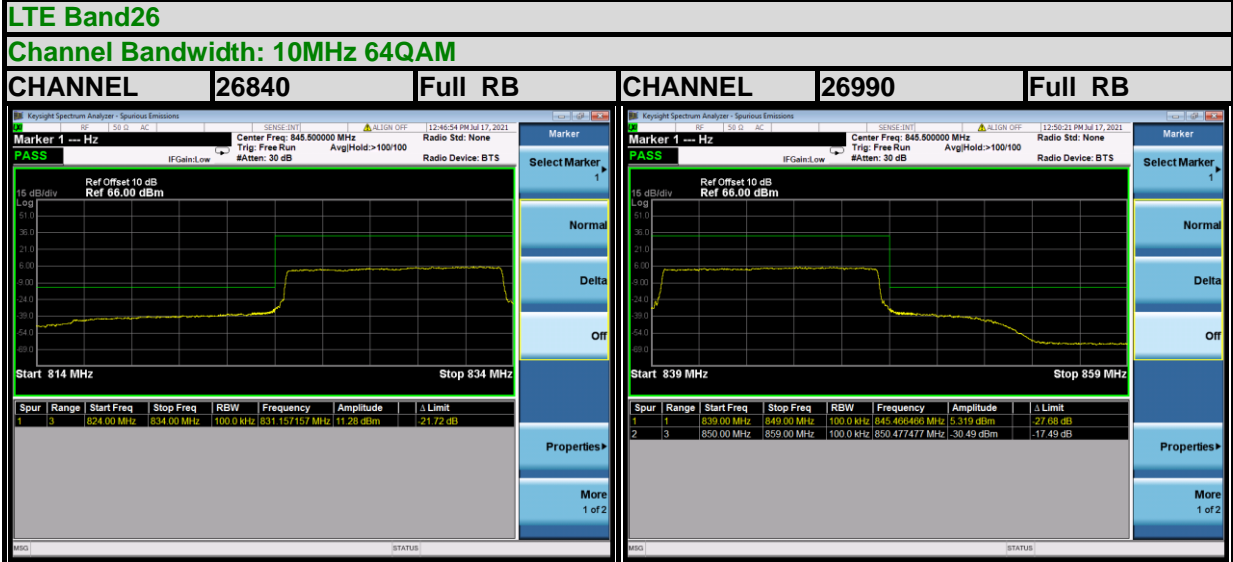

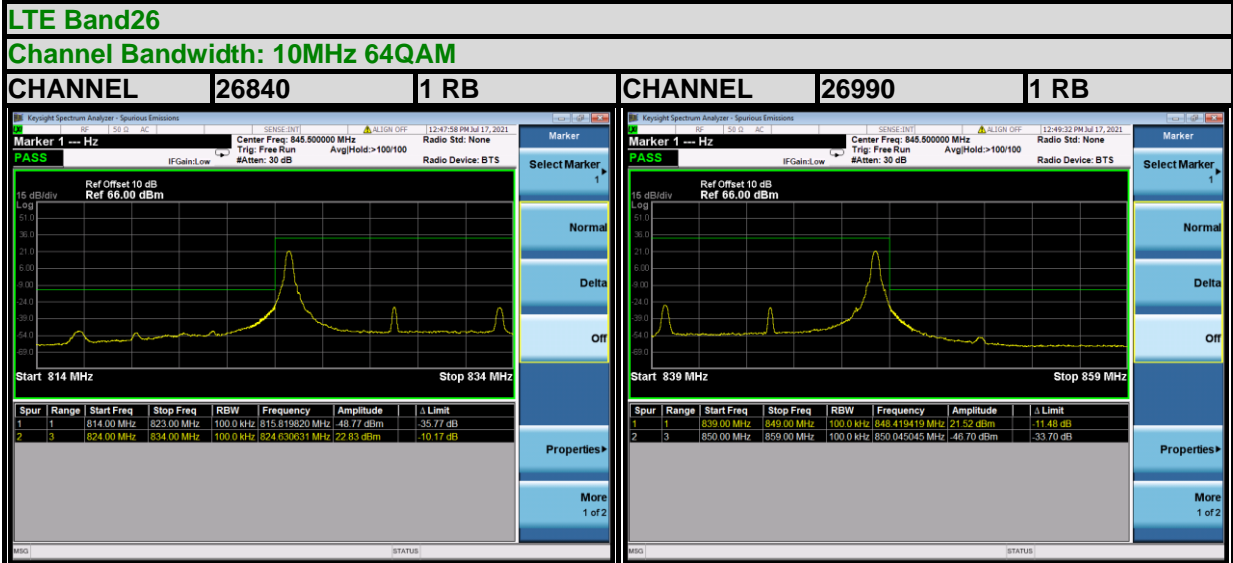

BUREAU
VERITAS

Test Report No.: W7L-P21080006RF15





BUREAU VERITAS

Test Report No.: W7L-P21080006RF15






BUREAU VERITAS

Test Report No.: W7L-P21080006RF15


LTE Band26

Channel Bandwidth: 15MHz 64QAM

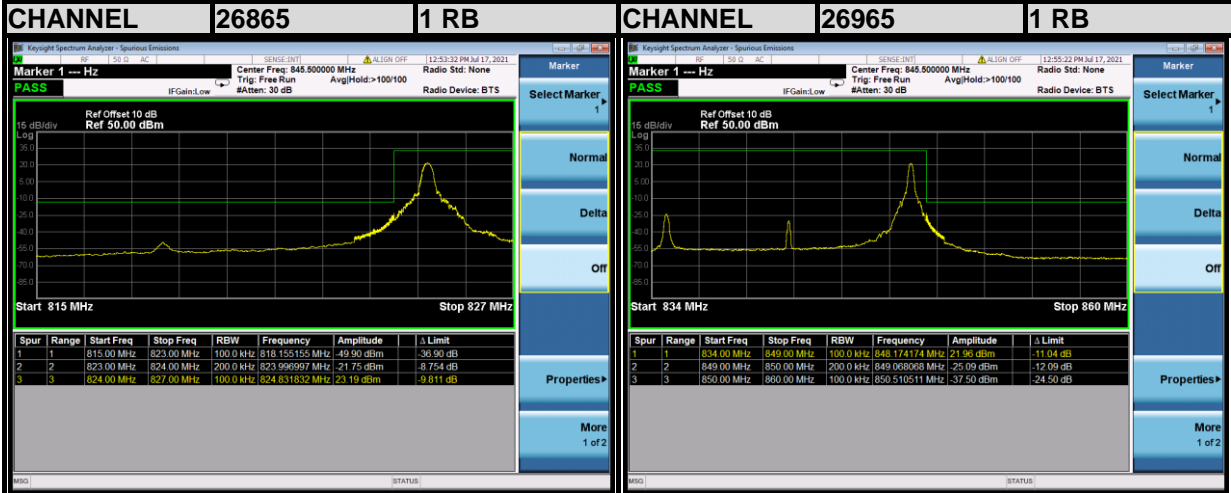

LTE Band26

Channel Bandwidth: 15MHz 64QAM

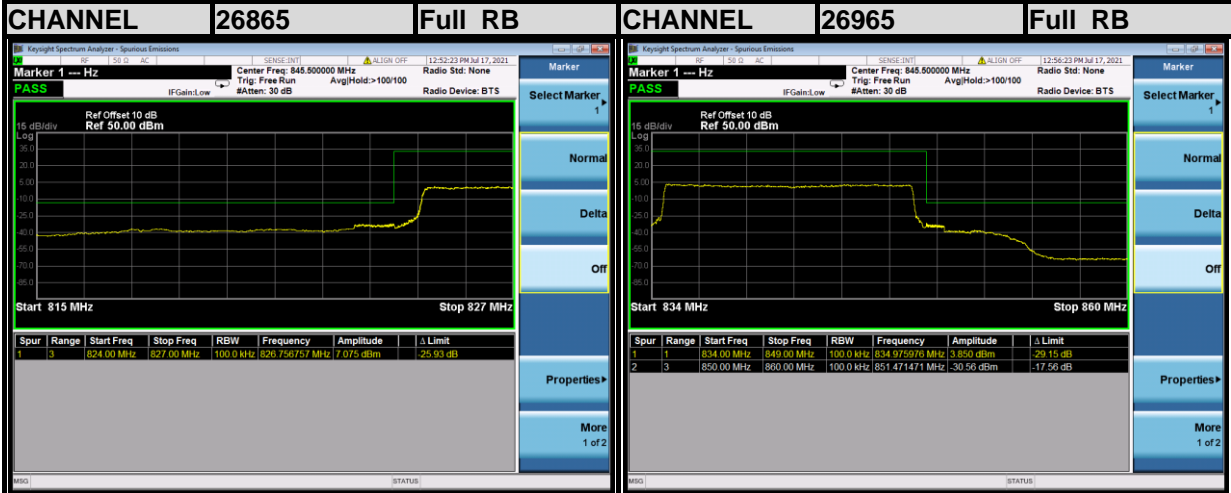

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

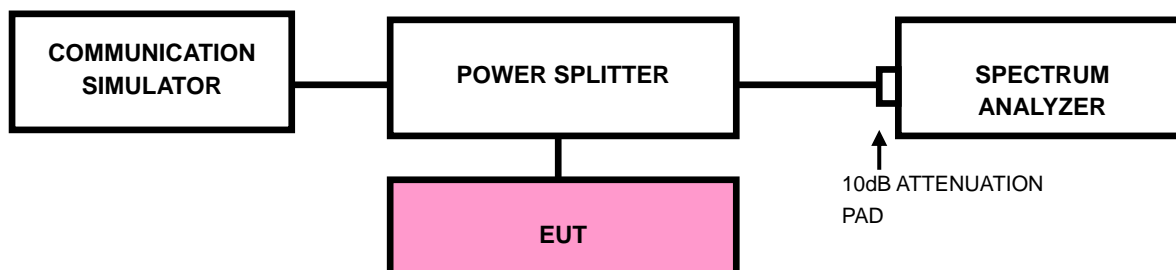




BUREAU VERITAS

Test Report No.: W7L-P21080006RF15


3.5.4 TEST RESULTS

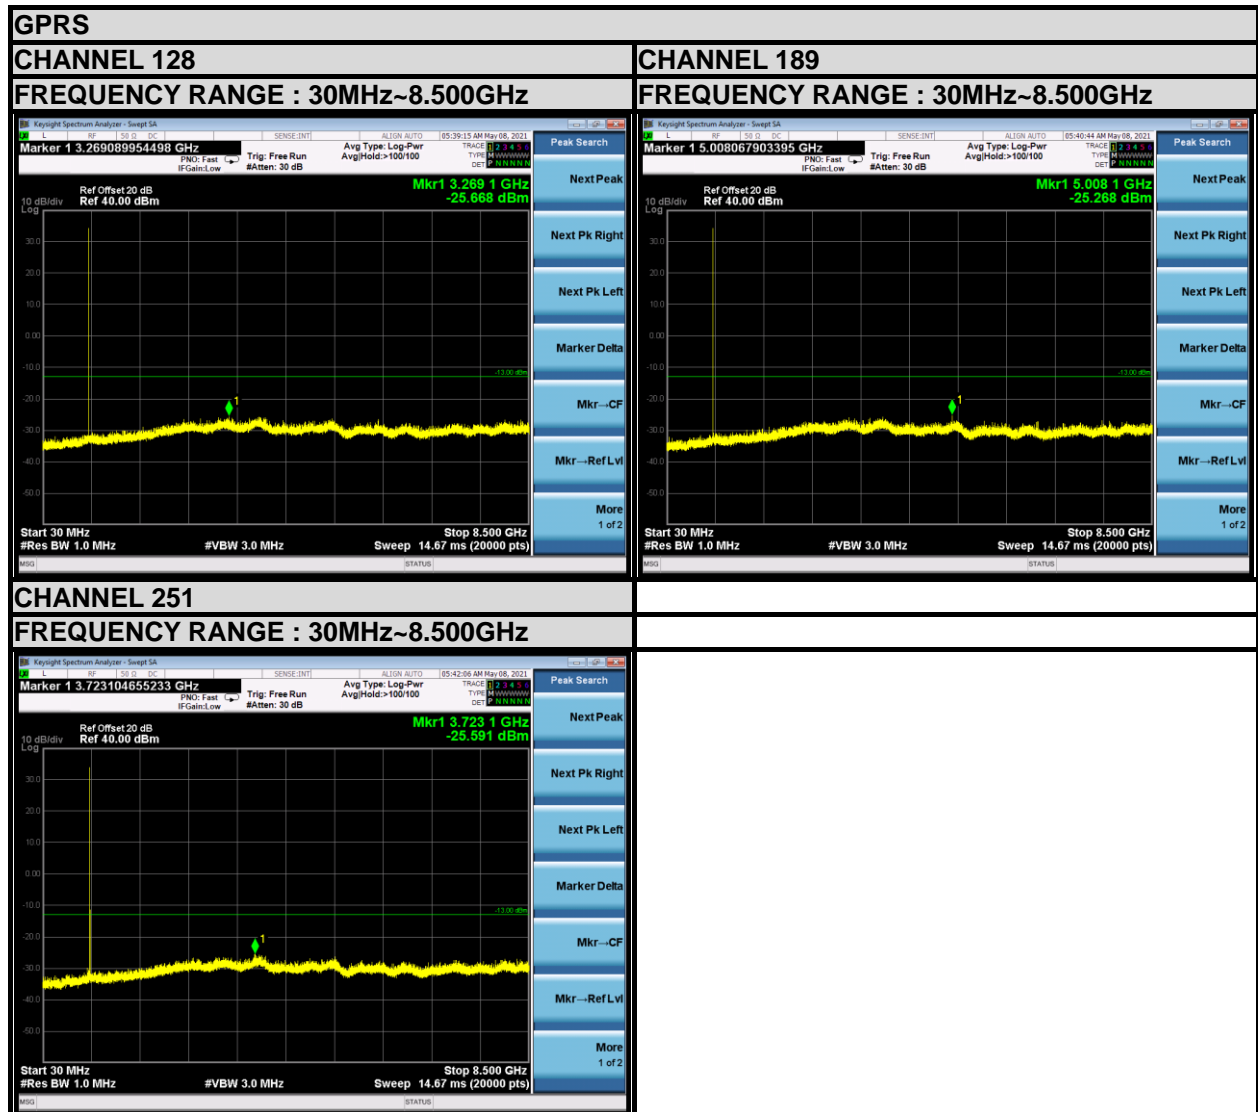



BUREAU VERITAS


Test Report No.: W7L-P21080006RF15

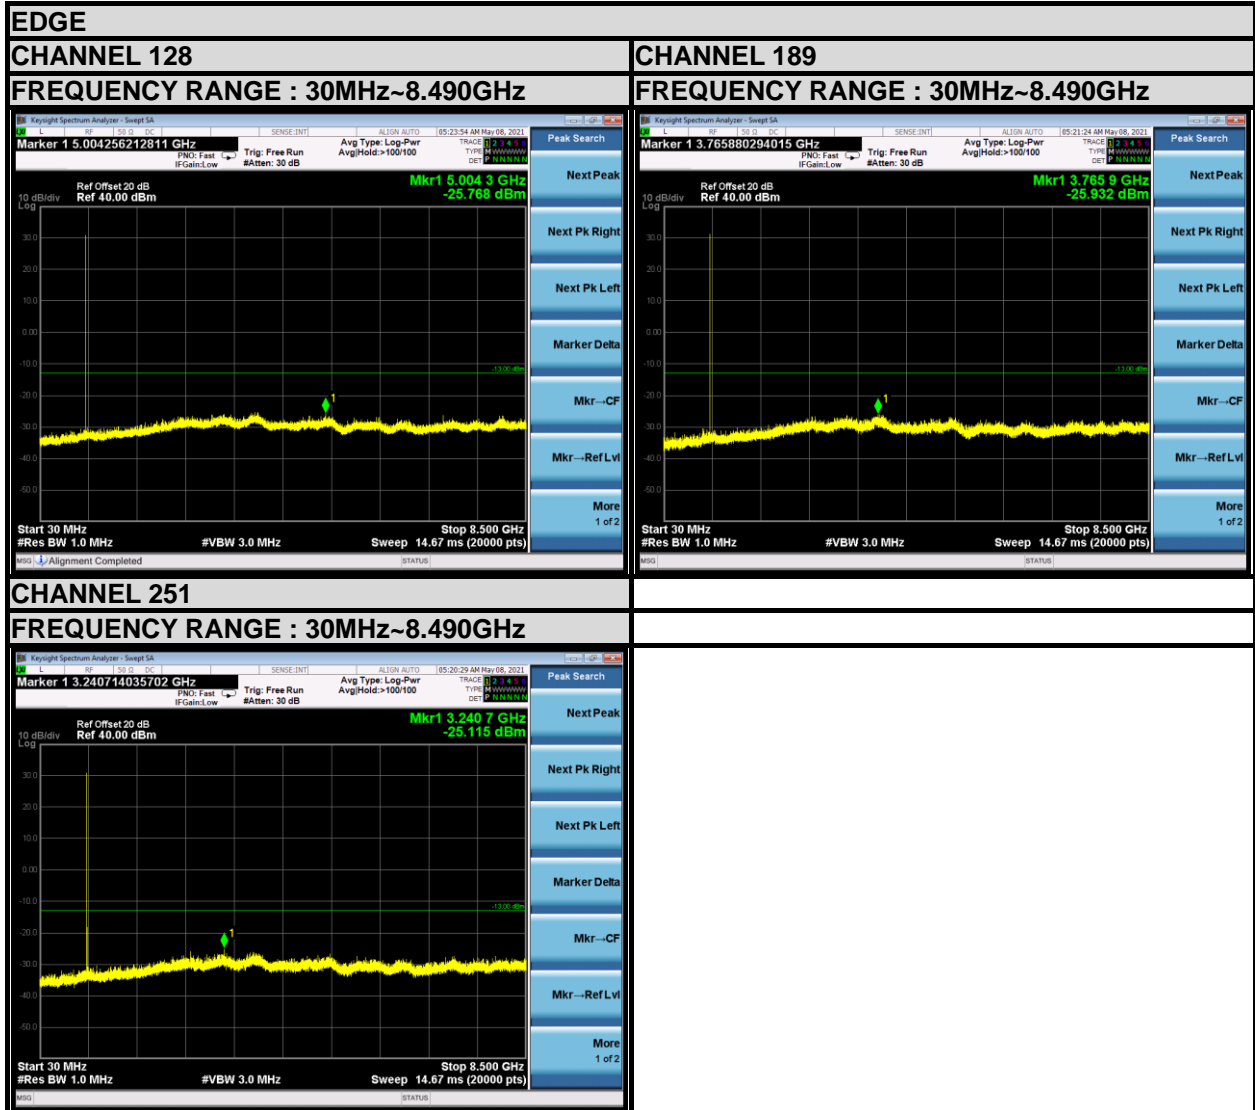



BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

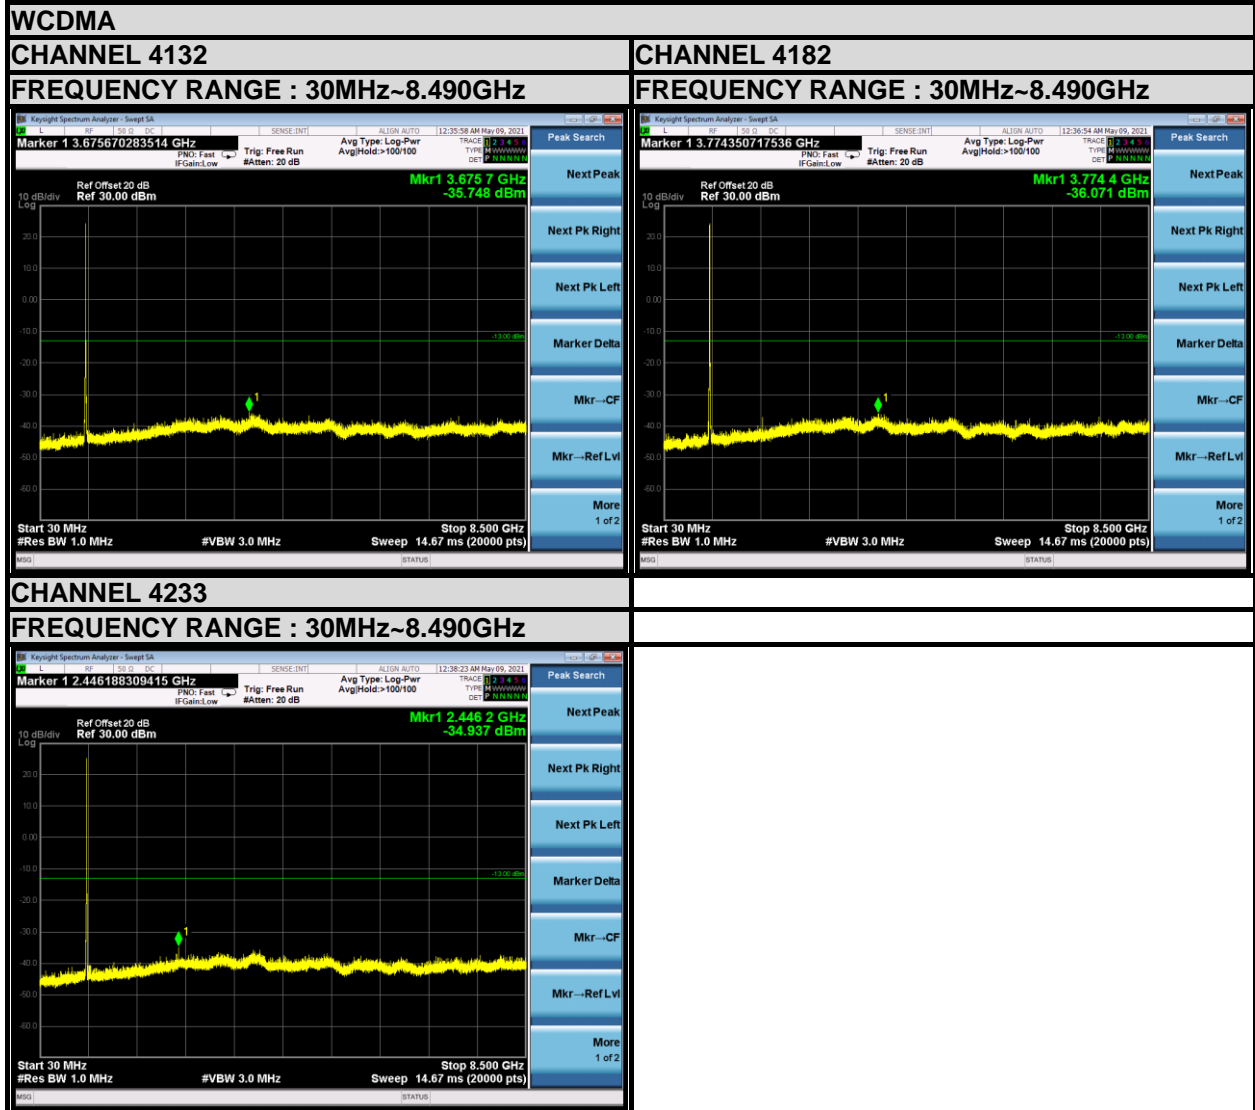



BUREAU VERITAS

Test Report No.: W7L-P21080006RF15





BUREAU VERITAS


Test Report No.: W7L-P21080006RF15





BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

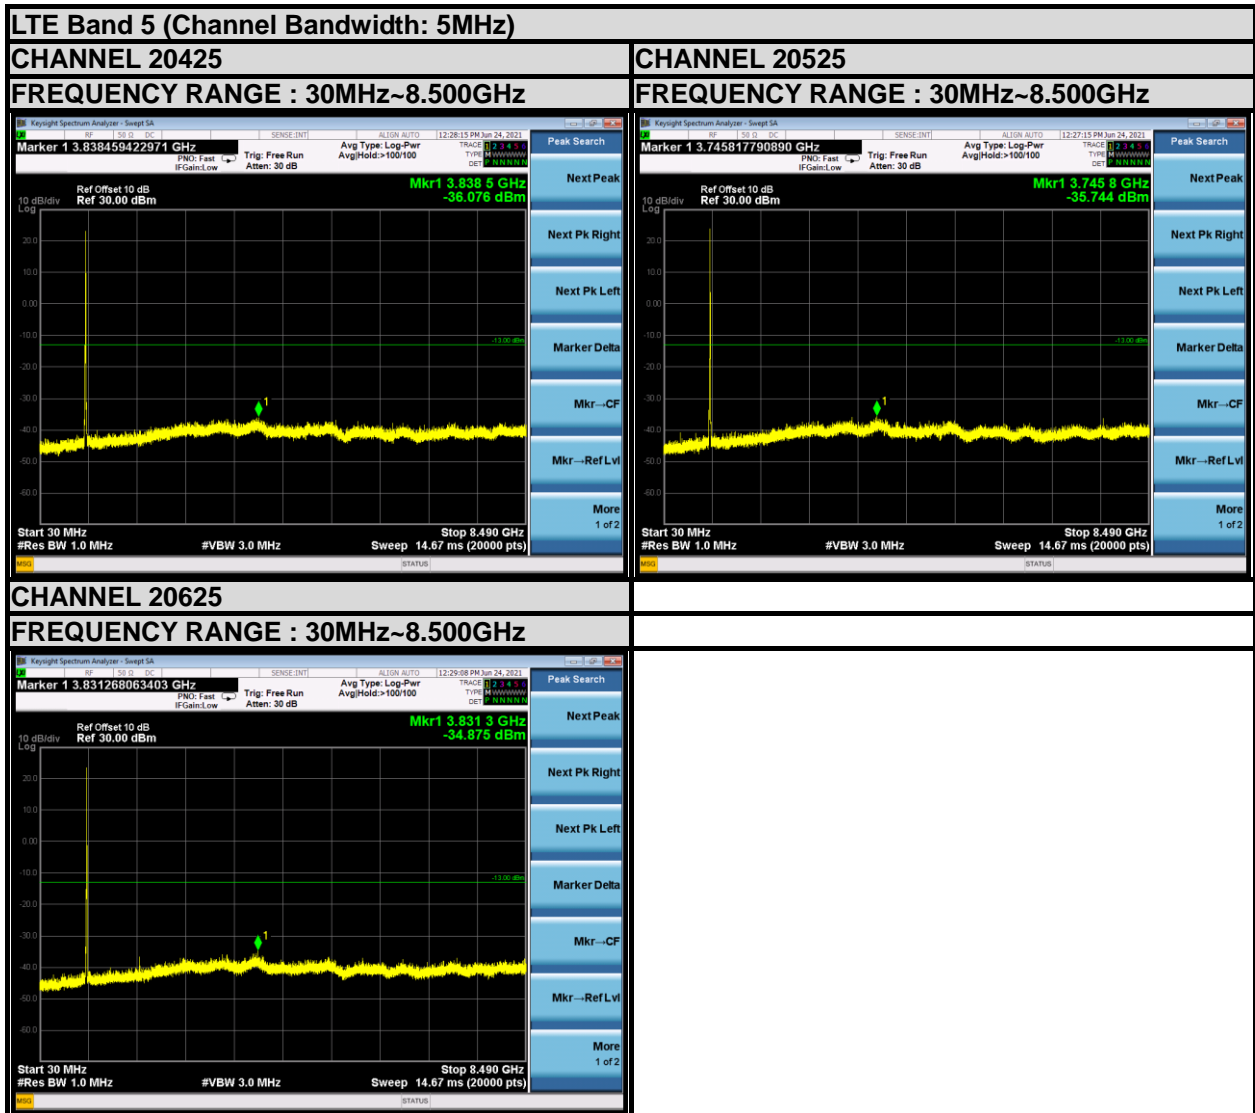



BUREAU VERITAS


Test Report No.: W7L-P21080006RF15





BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

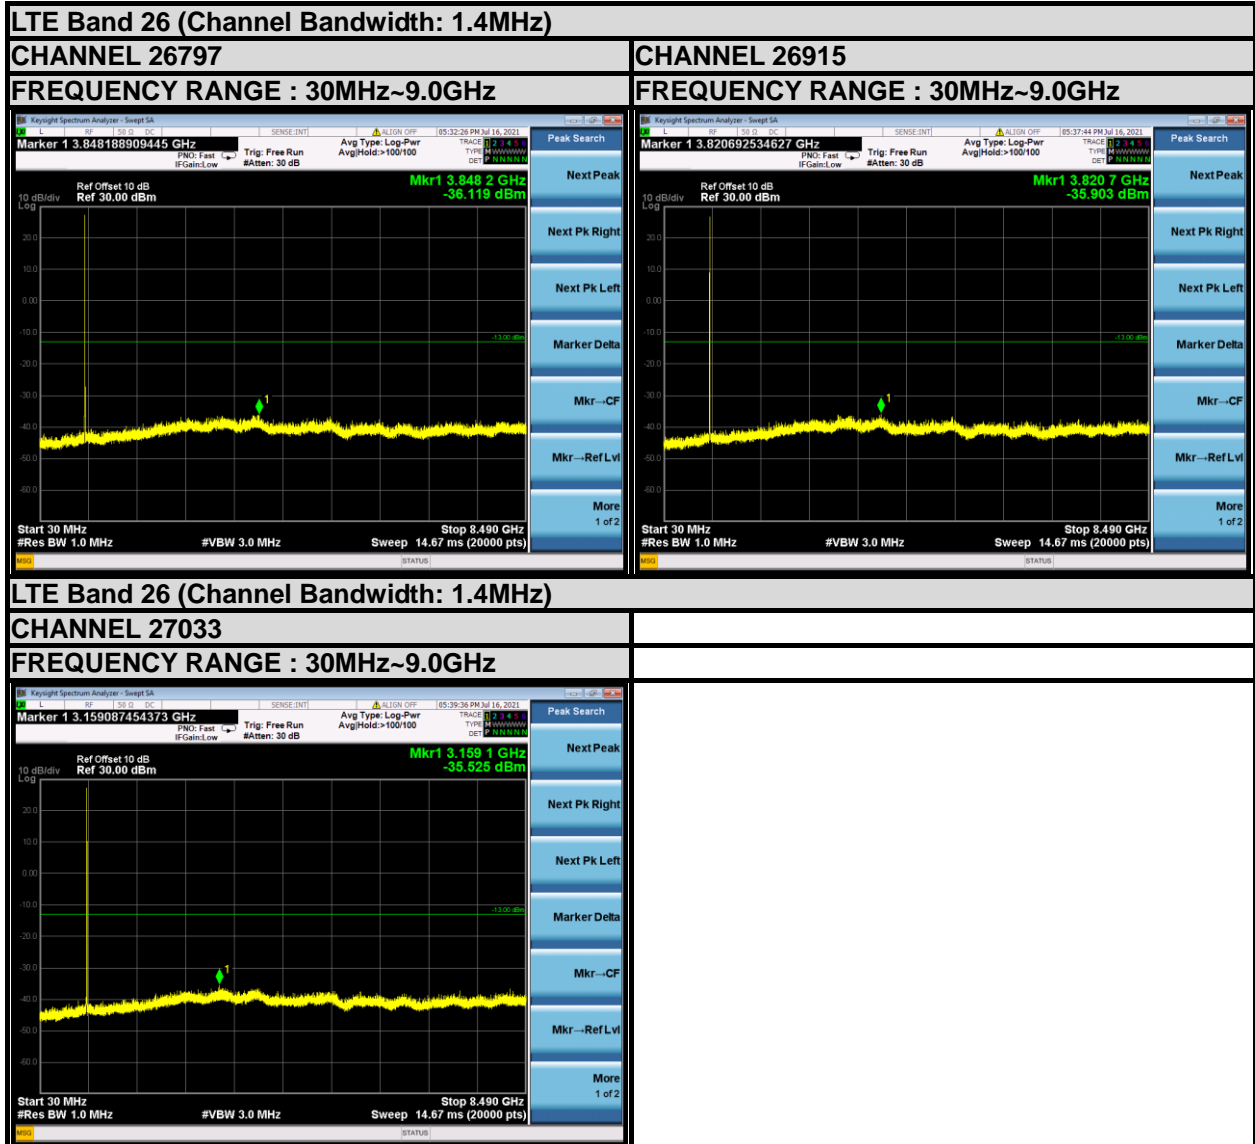



BUREAU VERITAS

Test Report No.: W7L-P21080006RF15





BUREAU VERITAS


Test Report No.: W7L-P21080006RF15





BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

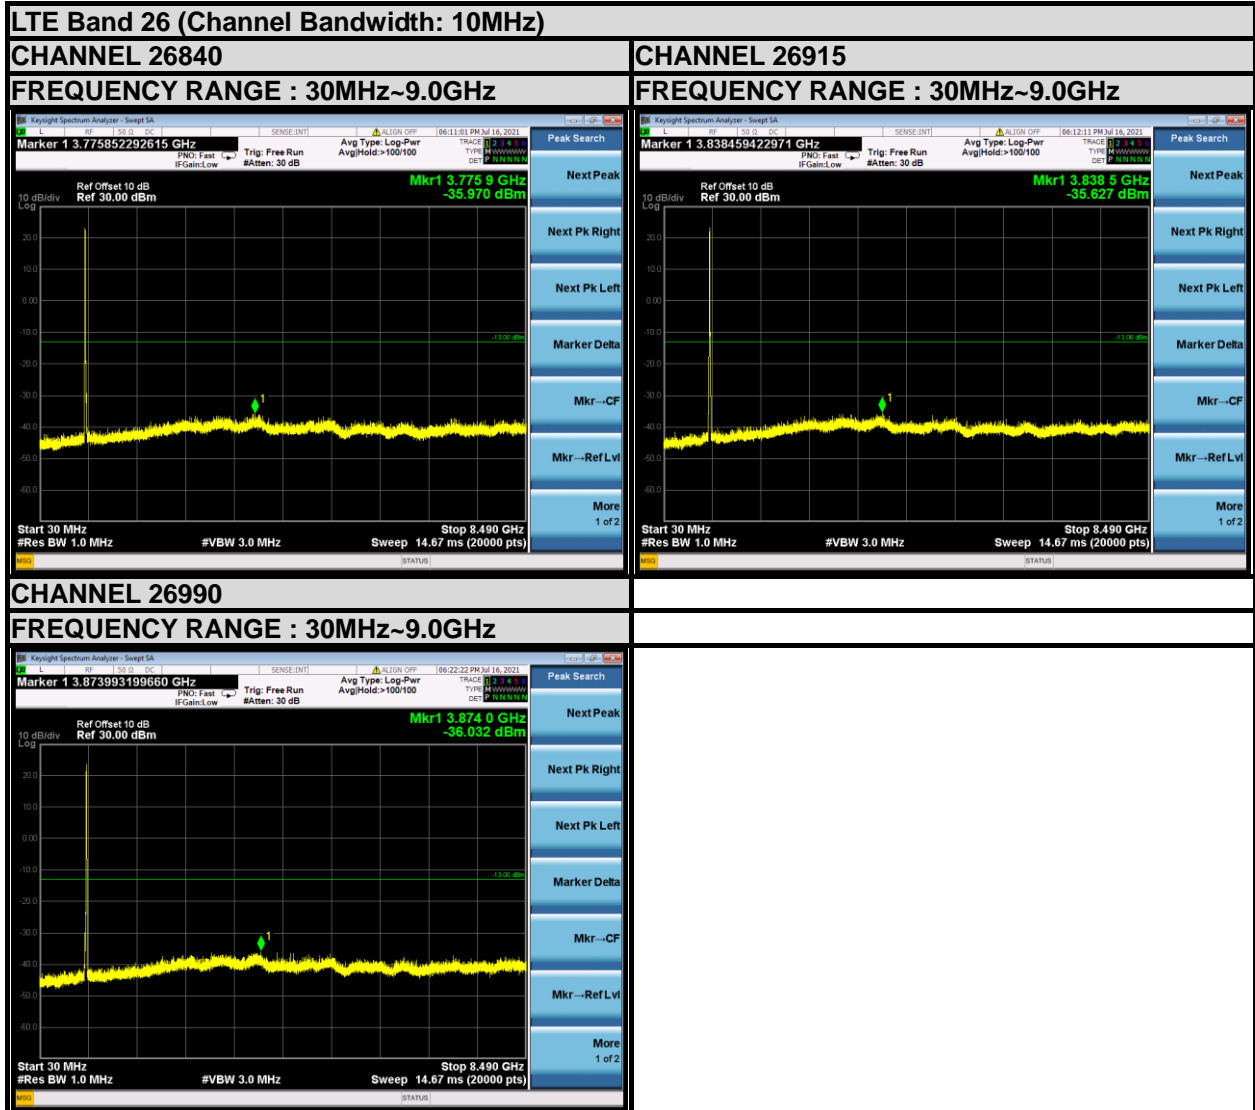



BUREAU VERITAS

Test Report No.: W7L-P21080006RF15

