



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10647
FCC ID : IHDT56WK1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 17, 2017 and testing was completed on Jul. 10, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Specification of Accessory	8
1.6	Modification of EUT	9
1.7	Testing Location	9
1.8	Applicable Standards	9
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1	Carrier Frequency Channel	10
2.2	Test Mode	11
2.3	Connection Diagram of Test System	13
2.4	Support Unit used in test configuration and system	15
2.5	EUT Operation Test Setup	15
2.6	Measurement Results Explanation Example	16
3	TEST RESULT	17
3.1	26dB & 99% Occupied Bandwidth Measurement	17
3.2	Maximum Conducted Output Power Measurement	19
3.3	Power Spectral Density Measurement	21
3.4	Unwanted Radiated Emission Measurement	24
3.5	AC Conducted Emission Measurement	30
3.6	Frequency Stability Measurement	34
3.7	Automatically Discontinue Transmission	35
3.8	Antenna Requirements	36
4	LIST OF MEASURING EQUIPMENTS	37
5	UNCERTAINTY OF EVALUATION	38
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED SPURIOUS EMISSION		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR761702-01E	Rev. 01	Initial issue of report	Jul. 31, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤ 11 dBm/MHz (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) 15.209(a)	Pass	Under limit 3.15 dB at 5470.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.66 dB at 0.608 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10647
FCC ID	IHDT56WK1
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN2.4GHz 802.11b/g/n HT20/HT40/ WLAN5GHz 802.11a/n HT20/HT40/ WLAN5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE/ Bluetooth v5.0 LE
IMEI Code	Conducted: 356484080019637 Radiation: 356484080025675 Conduction: 356484080025725
HW Version	DVT2
SW Version	NPW26.75
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 17.18 dBm / 0.0522 W 802.11n HT20 : 16.93 dBm / 0.0493 W 802.11n HT40 : 16.48 dBm / 0.0445 W 802.11ac VHT20 : 15.87 dBm / 0.0386 W 802.11ac VHT40 : 16.40 dBm / 0.0437 W 802.11ac VHT80 : 15.52 dBm / 0.0356 W <5260 MHz ~ 5320 MHz> 802.11a : 18.28 dBm / 0.0673 W 802.11n HT20 : 18.26 dBm / 0.0670 W 802.11n HT40 : 16.21 dBm / 0.0418 W 802.11ac VHT20 : 15.67 dBm / 0.0369 W 802.11ac VHT40 : 15.80 dBm / 0.0380 W 802.11ac VHT80 : 14.92 dBm / 0.0310 W <5500 MHz ~ 5700 MHz > 802.11a : 15.30 dBm / 0.0339 W 802.11n HT20 : 14.98 dBm / 0.0315 W 802.11n HT40 : 14.84 dBm / 0.0305 W 802.11ac VHT20 : 14.45 dBm / 0.0279 W 802.11ac VHT40 : 14.76 dBm / 0.0299 W 802.11ac VHT80 : 14.71 dBm / 0.0296 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.58 MHz 802.11n HT20 : 18.78 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 75.64 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.73 MHz 802.11n HT20 : 18.88 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 75.64 MHz <5500 MHz ~ 5700 MHz > 802.11a : 17.63 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz
Antenna Gain / Gain	<5150 MHz ~ 5250 MHz> Loop Antenna with gain -1.20 dBi <5250 MHz ~ 5350 MHz> Loop Antenna with gain -1.00 dBi <5470 MHz ~ 5725 MHz> Loop Antenna with gain -1.50 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



Note:

1. WLAN operation in 5600 MHz ~ 5650 MHz is notched.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11an HT20/ HT40 by referring to their maximum conducted power.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola (Salom)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 2 (US)	Brand Name	Motorola (Chenyang)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 3 (US)	Brand Name	Motorola (LiteOn)	Model Name	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
Battery	Brand Name	Motorola (Sunwoda)	Model Name	HX40
	Power Rating	3.8Vdc, 2810mAh	Type	Li-ion
Earphone	Brand Name	Motorola (Cosonic)	Model Name	SH38C16617
	Signal Line Type	1.10 meter, non-shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Foxlink)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	Sporton International (KunShan) INC.			
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1 (Charging from Adapter1) + Earphone



Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	-
M	Middle	42	58	106
H	High	-	-	-

2.3 Connection Diagram of Test System


< WLAN 5GHz 802.11a/n HT20 / 802.11ac VHT80 Tx Mode >

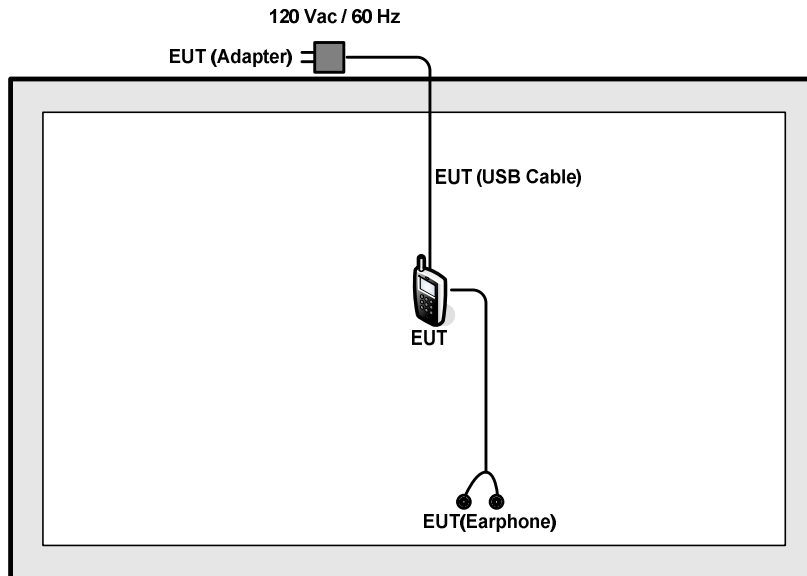

<WLAN 5GHz 802.11n HT40 Tx Mode>

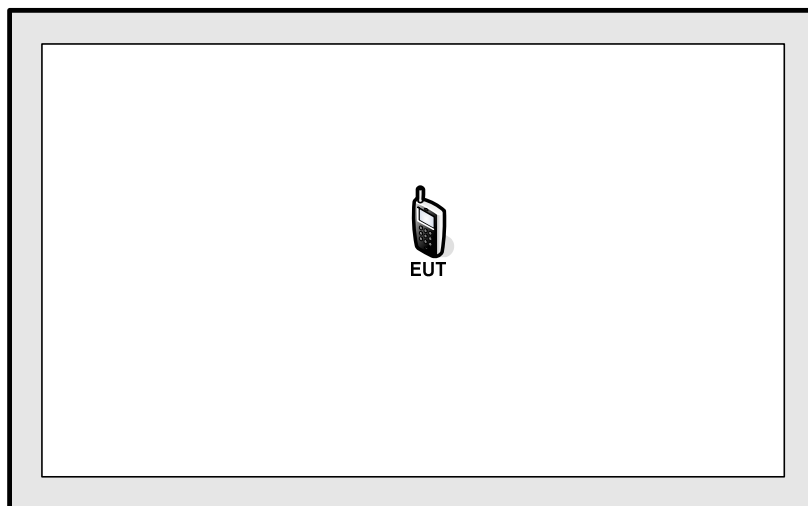

<AC Conducted Emission Mode>

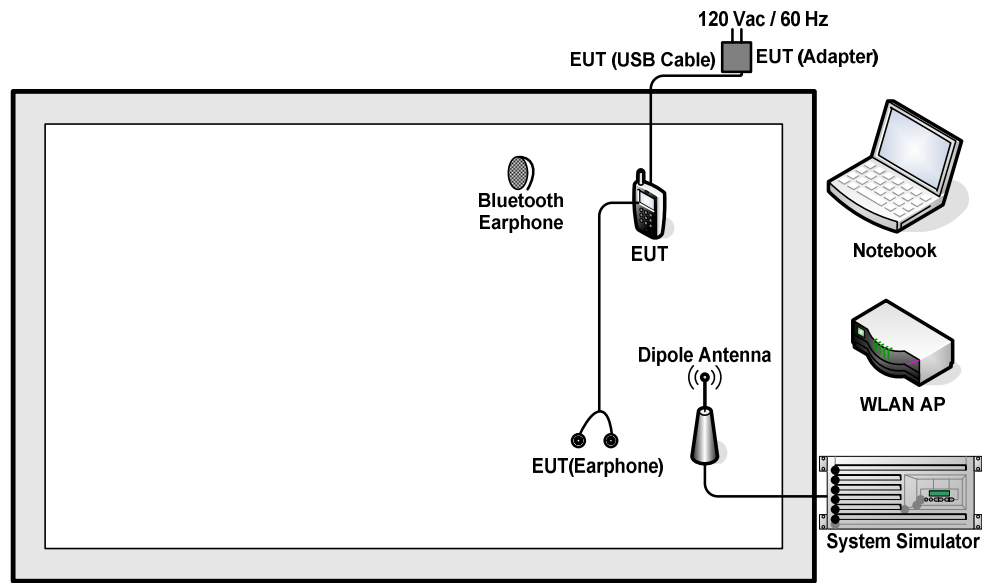

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.9 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.9 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

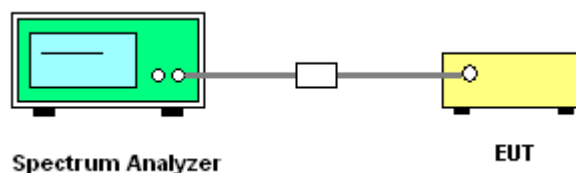

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

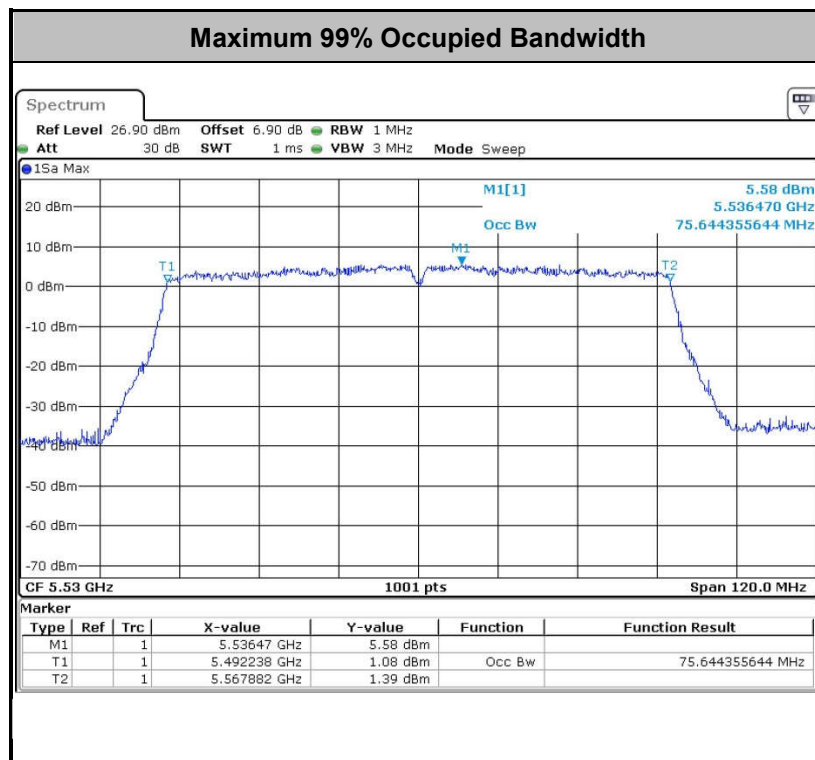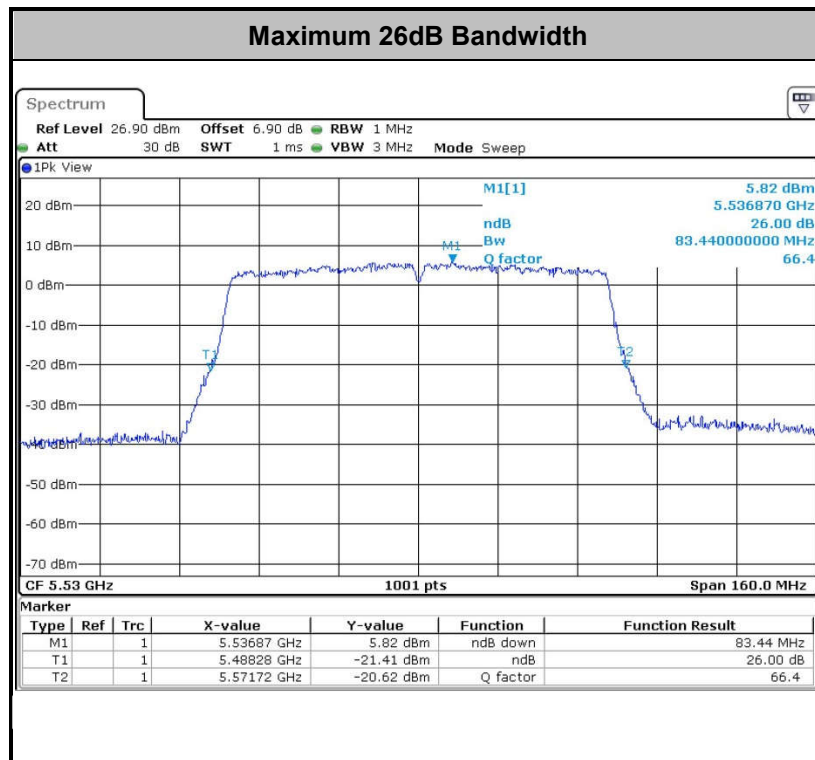

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

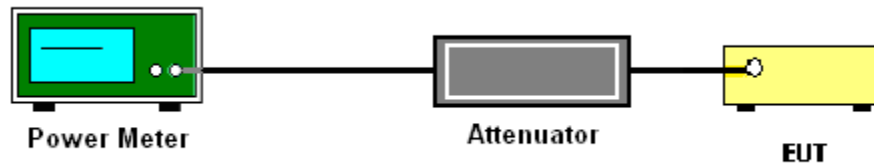

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

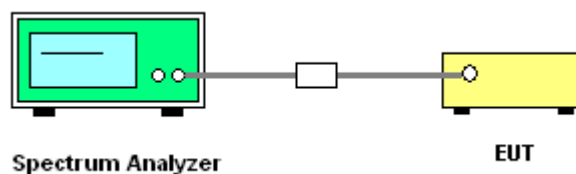



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

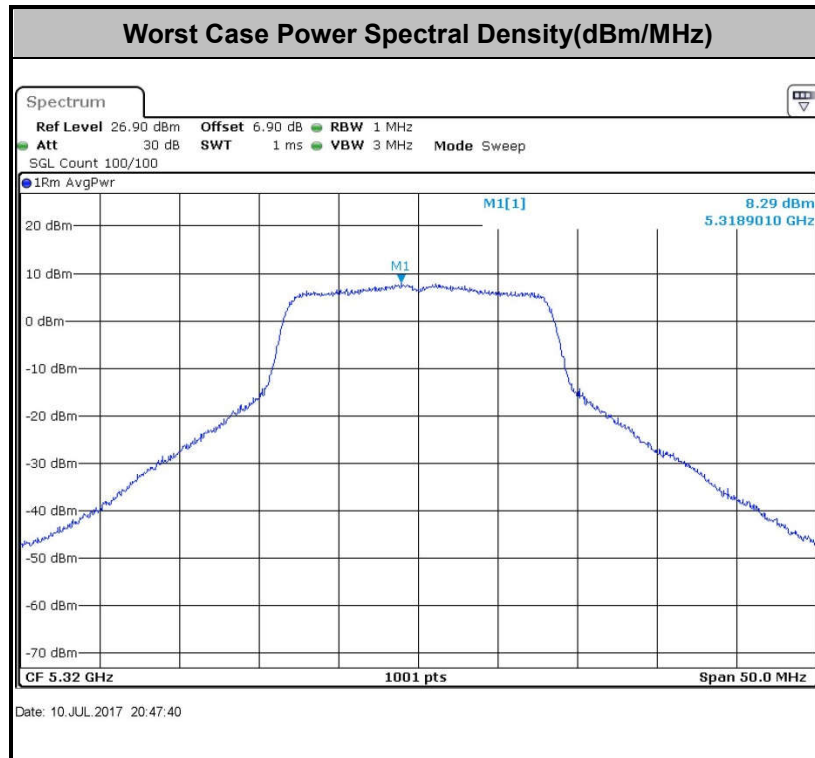

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725MHz band: all emissions outside of the 5470-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D01 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

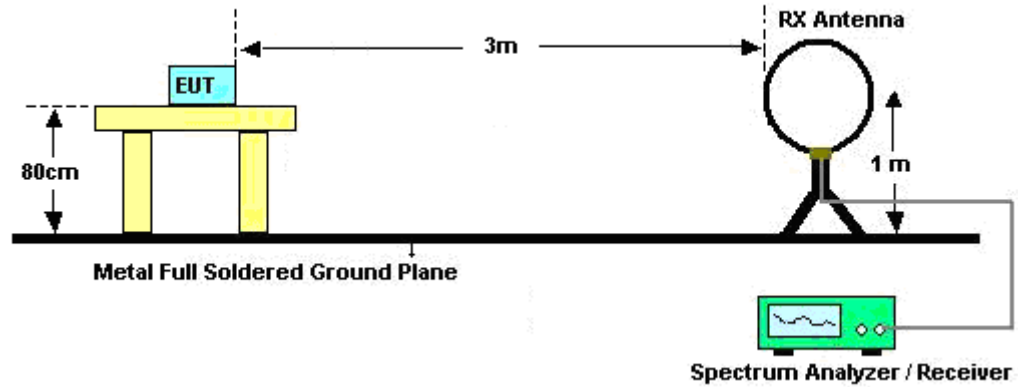

For radiated emissions from 30MHz to 1GHz

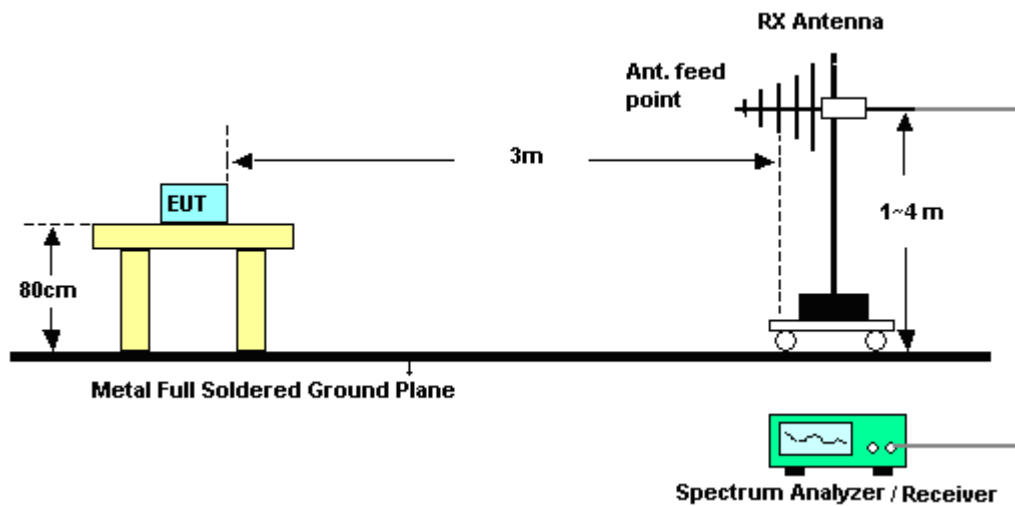

For radiated emissions above 1GHz

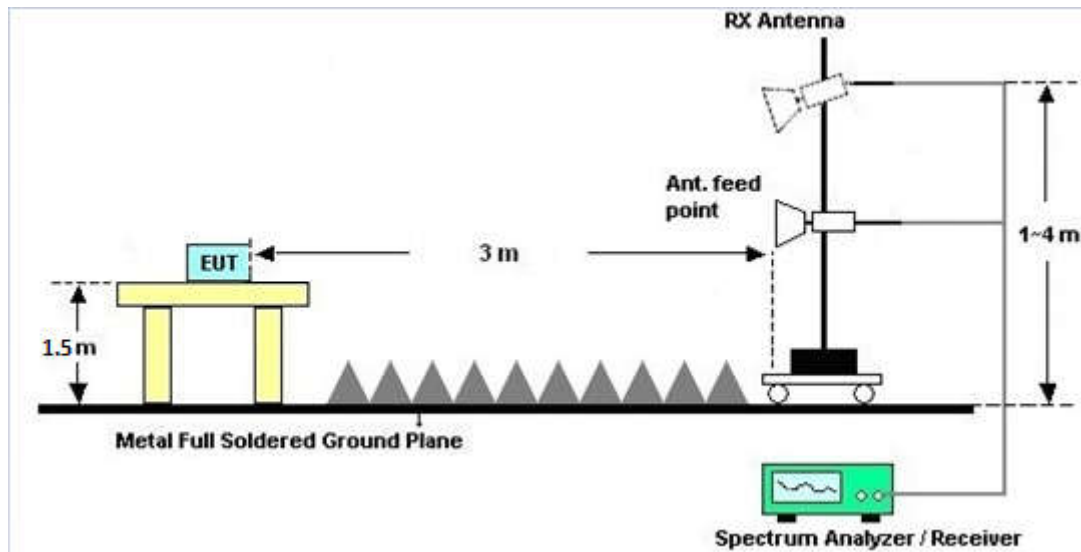

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

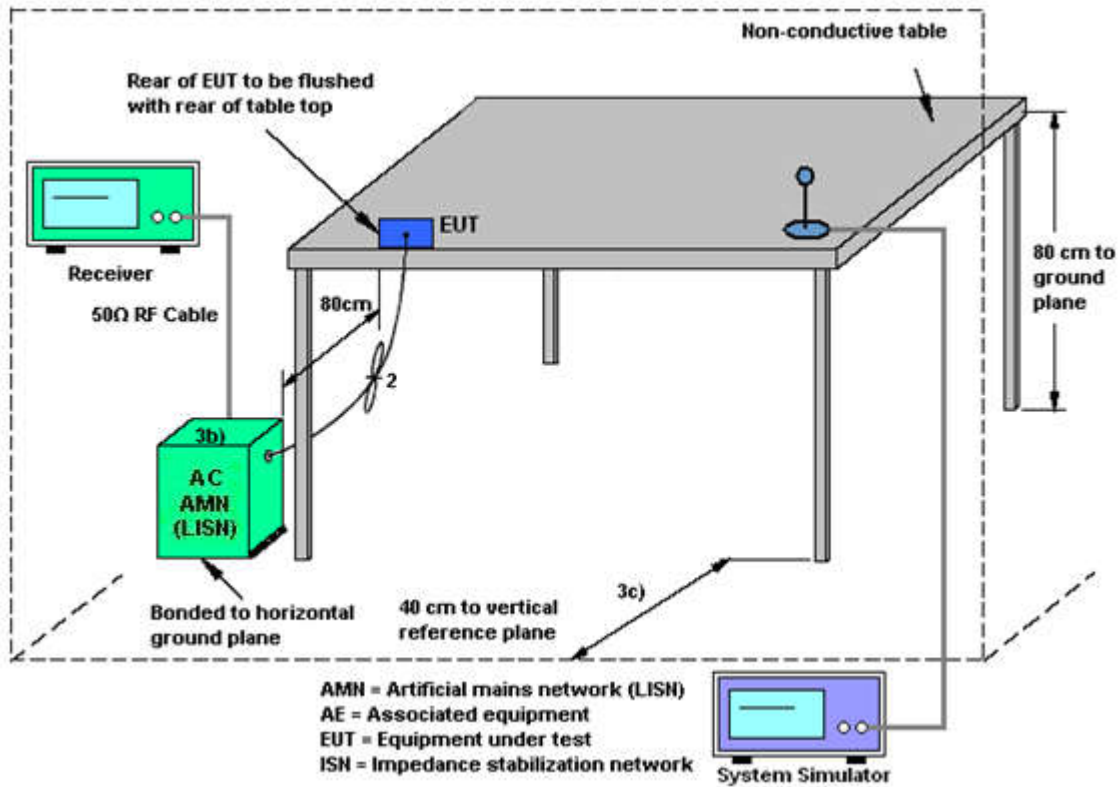



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligah Wang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1 (Charging from Adapter1) + Earphone		

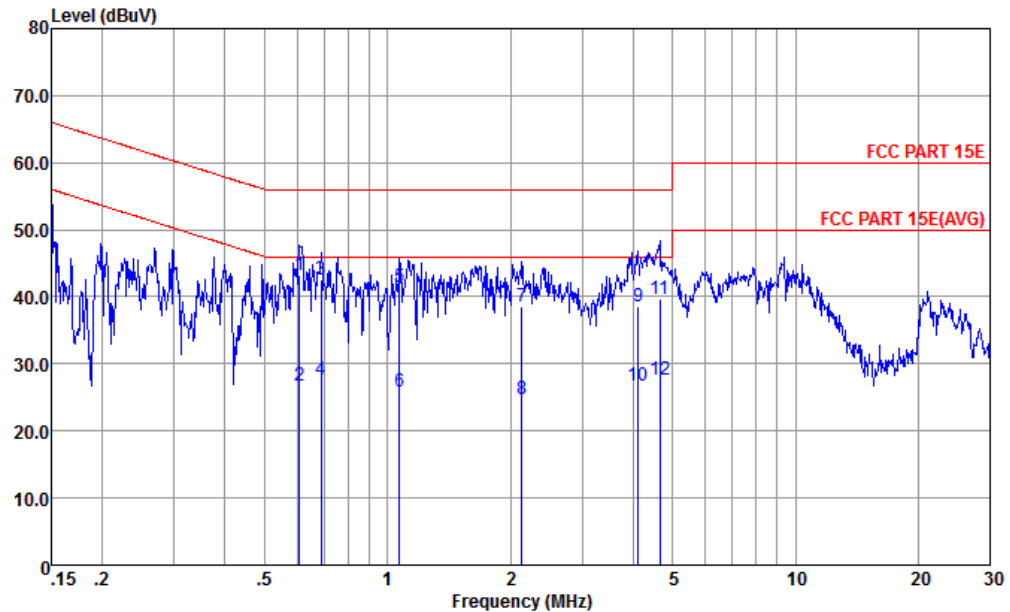


Site : CO01-KS
Condition : FCC PART 15E LISN-L-161017-060103 LINE
mode : Mode 1
: 356484080025725 #5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.608	43.34	-12.66	56.00	32.90	0.26	10.18	QP
2	0.608	26.74	-19.26	46.00	16.30	0.26	10.18	Average
3	0.686	42.63	-13.37	56.00	32.20	0.25	10.18	QP
4	0.686	27.73	-18.27	46.00	17.30	0.25	10.18	Average
5	1.071	41.55	-14.45	56.00	31.10	0.26	10.19	QP
6	1.071	25.75	-20.25	46.00	15.30	0.26	10.19	Average
7	2.133	38.60	-17.40	56.00	28.20	0.21	10.19	QP
8	2.133	24.70	-21.30	46.00	14.30	0.21	10.19	Average
9	4.114	38.65	-17.35	56.00	28.20	0.21	10.24	QP
10	4.114	26.65	-19.35	46.00	16.20	0.21	10.24	Average
11	4.647	39.65	-16.35	56.00	29.20	0.21	10.24	QP
12	4.647	27.65	-18.35	46.00	17.20	0.21	10.24	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1 (Charging from Adapter1) + Earphone		

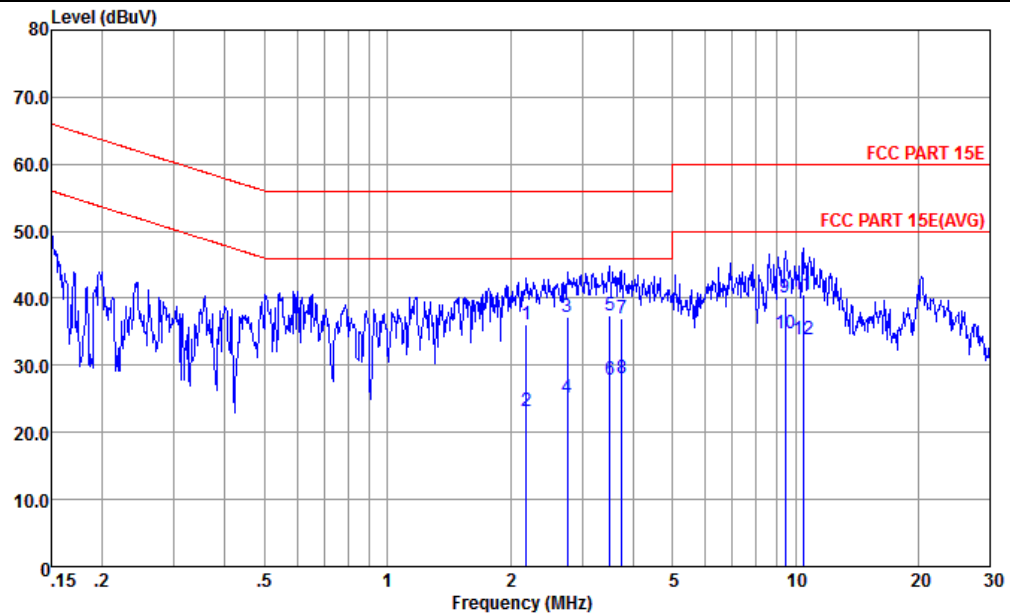

Site : CO01-KS
Condition : FCC PART 15E LISN-N-161017-060103 NEUTRAL

mode : Mode 1
: 356484080025725 #5

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.190	36.20	-19.80	56.00	25.60	0.41	10.19	QP
2	2.190	23.10	-22.90	46.00	12.50	0.41	10.19	Average
3	2.765	37.21	-18.79	56.00	26.60	0.40	10.21	QP
4	2.765	25.11	-20.89	46.00	14.50	0.40	10.21	Average
5	3.509	37.42	-18.58	56.00	26.80	0.39	10.23	QP
6	3.509	27.82	-18.18	46.00	17.20	0.39	10.23	Average
7	3.759	36.92	-19.08	56.00	26.29	0.39	10.24	QP
8	3.759	28.12	-17.88	46.00	17.49	0.39	10.24	Average
9	9.451	40.22	-19.78	60.00	29.60	0.29	10.33	QP
10 *	9.451	34.72	-15.28	50.00	24.10	0.29	10.33	Average
11	10.452	40.53	-19.47	60.00	29.90	0.28	10.35	QP
12	10.452	33.83	-16.17	50.00	23.20	0.28	10.35	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

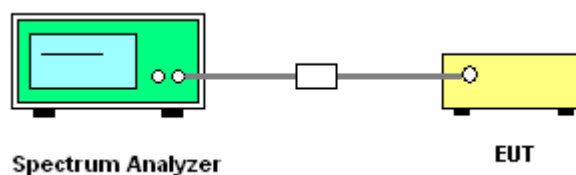

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jul. 10, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Jul. 10, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Jul. 10, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Jul. 10, 2017	Oct. 13, 2017	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 22, 2016	Jul. 09, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Jul. 09, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Jul. 09, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Jul. 09, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Jul. 09, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	Jul. 09, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Jul. 09, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	Jul. 09, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 18, 2017	Jul. 09, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Jul. 09, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 09, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 09, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 09, 2017	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Jul. 06, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jul. 06, 2017	Oct. 12, 2017	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.6dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.7dB
--	-------



Appendix A. Conducted Test Results

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/7/10	Relative Humidity:	51~55	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.53	24.48	-	22.44		
11a	6Mbps	1	44	5220	17.58	24.33	-	22.45		
11a	6Mbps	1	48	5240	17.58	24.48	-	22.45		
HT20	MCS0	1	36	5180	18.68	24.83	-	22.71		
HT20	MCS0	1	44	5220	18.78	25.23	-	22.74		
HT20	MCS0	1	48	5240	18.63	24.58	-	22.70		
HT40	MCS0	1	38	5190	36.46	41.45	-	23.01		
HT40	MCS0	1	46	5230	36.46	41.54	-	23.01		
VHT80	MCS0	1	42	5210	75.64	82.96	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.26	17.14	24.00	-1.20		Pass
11a	6Mbps	1	44	5220	0.26	17.18	24.00	-1.20		Pass
11a	6Mbps	1	48	5240	0.26	16.78	24.00	-1.20		Pass
HT20	MCS0	1	36	5180	0.30	16.93	24.00	-1.20		Pass
HT20	MCS0	1	44	5220	0.30	16.84	24.00	-1.20		Pass
HT20	MCS0	1	48	5240	0.30	16.66	24.00	-1.20		Pass
HT40	MCS0	1	38	5190	0.52	16.29	24.00	-1.20		Pass
HT40	MCS0	1	46	5230	0.52	16.48	24.00	-1.20		Pass
VHT20	MCS2	1	36	5180	0.81	15.87	24.00	-1.20		Pass
VHT20	MCS2	1	44	5220	0.81	15.83	24.00	-1.20		Pass
VHT20	MCS2	1	48	5240	0.81	15.77	24.00	-1.20		Pass
VHT40	MCS4	1	38	5190	2.09	16.33	24.00	-1.20		Pass
VHT40	MCS4	1	46	5230	2.09	16.40	24.00	-1.20		Pass
VHT80	MCS0	1	42	5210	1.09	15.52	24.00	-1.20		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.26	6.68	11.00	-1.20		Pass
11a	6Mbps	1	44	5220	0.26	7.28	11.00	-1.20		Pass
11a	6Mbps	1	48	5240	0.26	6.71	11.00	-1.20		Pass
HT20	MCS0	1	36	5180	0.30	6.55	11.00	-1.20		Pass
HT20	MCS0	1	44	5220	0.30	6.36	11.00	-1.20		Pass
HT20	MCS0	1	48	5240	0.30	6.05	11.00	-1.20		Pass
HT40	MCS0	1	38	5190	0.52	2.95	11.00	-1.20		Pass
HT40	MCS0	1	46	5230	0.52	2.93	11.00	-1.20		Pass
VHT80	MCS0	1	42	5210	1.09	-0.60	11.00	-1.20		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	17.63	24.33	23.46	29.46	23.98	
11a	6M bps	1	60	5300	17.58	24.63	23.45	29.45	23.98	
11a	6M bps	1	64	5320	17.73	25.08	23.49	29.49	23.98	
HT20	MCS 0	1	52	5260	18.68	25.57	23.71	29.71	23.98	
HT20	MCS 0	1	60	5300	18.88	25.23	23.76	29.76	23.98	
HT20	MCS 0	1	64	5320	18.88	25.67	23.76	29.76	23.98	
HT40	MCS 0	1	54	5270	36.46	41.45	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.46	41.63	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.64	83.28	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.26	17.92	23.98	-1.00	26.99	Pass
11a	6M bps	1	60	5300	0.26	17.84	23.98	-1.00	26.99	Pass
11a	6M bps	1	64	5320	0.26	18.28	23.98	-1.00	26.99	Pass
HT20	MCS 0	1	52	5260	0.30	17.87	23.98	-1.00	26.99	Pass
HT20	MCS 0	1	60	5300	0.30	17.56	23.98	-1.00	26.99	Pass
HT20	MCS 0	1	64	5320	0.30	18.26	23.98	-1.00	26.99	Pass
HT40	MCS 0	1	54	5270	0.52	15.93	23.98	-1.00	26.99	Pass
HT40	MCS 0	1	62	5310	0.52	16.21	23.98	-1.00	26.99	Pass
VHT20	MCS 4	1	52	5260	1.28	15.37	23.98	-1.00	26.99	Pass
VHT20	MCS 2	1	60	5300	1.28	15.36	23.98	-1.00	26.99	Pass
VHT20	MCS 2	1	64	5320	1.28	15.67	23.98	-1.00	26.99	Pass
VHT40	MCS 4	1	54	5270	2.09	15.52	23.98	-1.00	26.99	Pass
VHT40	MCS 4	1	62	5310	2.09	15.80	23.98	-1.00	26.99	Pass
VHT80	MCS 0	1	58	5290	1.09	14.92	23.98	-1.00	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.26	7.48	11.00	-1.00		Pass
11a	6M bps	1	60	5300	0.26	7.46	11.00	-1.00		Pass
11a	6M bps	1	64	5320	0.26	8.55	11.00	-1.00		Pass
HT20	MCS 0	1	52	5260	0.30	7.26	11.00	-1.00		Pass
HT20	MCS 0	1	60	5300	0.30	7.13	11.00	-1.00		Pass
HT20	MCS 0	1	64	5320	0.30	7.60	11.00	-1.00		Pass
HT40	MCS 0	1	54	5270	0.52	2.48	11.00	-1.00		Pass
HT40	MCS 0	1	62	5310	0.52	2.45	11.00	-1.00		Pass
VHT80	MCS 0	1	58	5290	1.09	-0.88	11.00	-1.00		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.53	24.28	23.44	29.44	23.98	
11a	6M bps	1	116	5580	17.63	24.28	23.46	29.46	23.98	
11a	6M bps	1	140	5700	17.53	23.98	23.44	29.44	23.98	
HT20	MCS 0	1	100	5500	18.68	24.53	23.71	29.71	23.98	
HT20	MCS 0	1	116	5580	18.73	24.83	23.73	29.73	23.98	
HT20	MCS 0	1	140	5700	18.73	25.48	23.73	29.73	23.98	
HT40	MCS 0	1	102	5510	36.56	41.72	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.56	41.81	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.46	41.72	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.64	83.44	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.26	14.58	23.98	-1.50	26.99	Pass
11a	6M bps	1	116	5580	0.26	14.59	23.98	-1.50	26.99	Pass
11a	6M bps	1	140	5700	0.26	15.30	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	100	5500	0.30	14.67	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	116	5580	0.30	14.77	23.98	-1.50	26.99	Pass
HT20	MCS 0	1	140	5700	0.30	14.98	23.98	-1.50	26.99	Pass
HT40	MCS 0	1	102	5510	0.52	14.30	23.98	-1.50	26.99	Pass
HT40	MCS 0	1	110	5550	0.52	14.14	23.98	-1.50	26.99	Pass
HT40	MCS 0	1	134	5670	0.52	14.84	23.98	-1.50	26.99	Pass
VHT20	MCS 0	1	100	5500	0.29	13.73	23.98	-1.50	26.99	Pass
VHT20	MCS 8	1	116	5580	0.29	13.90	23.98	-1.50	26.99	Pass
VHT20	MCS 0	1	140	5700	0.29	14.45	23.98	-1.50	26.99	Pass
VHT40	MCS 0	1	102	5510	0.53	14.14	23.98	-1.50	26.99	Pass
VHT40	MCS 3	1	110	5550	0.53	14.68	23.98	-1.50	26.99	Pass
VHT40	MCS 0	1	134	5670	0.53	14.76	23.98	-1.50	26.99	Pass
VHT80	MCS 0	1	106	5530	1.09	14.71	23.98	-1.50	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.26	4.26	11.00	-1.50		Pass
11a	6M bps	1	116	5580	0.26	4.45	11.00	-1.50		Pass
11a	6M bps	1	140	5700	0.26	5.02	11.00	-1.50		Pass
HT20	MCS 0	1	100	5500	0.30	3.74	11.00	-1.50		Pass
HT20	MCS 0	1	116	5580	0.30	4.10	11.00	-1.50		Pass
HT20	MCS 0	1	140	5700	0.30	4.67	11.00	-1.50		Pass
HT40	MCS 0	1	102	5510	0.52	0.30	11.00	-1.50		Pass
HT40	MCS 0	1	110	5550	0.52	0.80	11.00	-1.50		Pass
HT40	MCS 0	1	134	5670	0.52	0.97	11.00	-1.50		Pass
VHT80	MCS 0	1	106	5530	1.09	-2.69	11.00	-1.50		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	50	3.82	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	-30	3.82	
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	4.4	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	3.65	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	3.82	

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	64	5320	5319.975	-0.025	-4.70	50	3.82	
11a	6Mbps	1	64	5320	5320.050	0.050	9.40	-30	3.82	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	4.4	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	3.65	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	20	3.82	

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	100	5500	5499.975	-0.025	-4.55	50	3.82	
11a	6Mbps	1	100	5500	5500.025	0.025	4.55	-30	3.82	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	20	4.4	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	20	3.65	
11a	6Mbps	1	100	5500	5500.025	0.025	4.55	20	3.82	



Appendix B. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5148.48	59.1	-14.9	74	56.54	31.17	7.92	36.53	292	54	P	H
		5150	43.84	-10.16	54	41.28	31.17	7.92	36.53	292	54	A	H
	*	5178	110.01	-	-	107.45	31.14	7.94	36.52	292	54	P	H
	*	5178	102.68	-	-	100.12	31.14	7.94	36.52	292	54	A	H
		5143.36	54.99	-19.01	74	52.43	31.17	7.92	36.53	399	67	P	V
		5150	41.87	-12.13	54	39.31	31.17	7.92	36.53	399	67	A	V
	*	5182	107.3	-	-	104.74	31.14	7.94	36.52	399	67	P	V
	*	5182	99.88	-	-	97.32	31.14	7.94	36.52	399	67	A	V
802.11a CH 44 5220MHz		5141.76	50.06	-23.94	74	47.5	31.17	7.92	36.53	300	58	P	H
		5148.16	40.82	-13.18	54	38.26	31.17	7.92	36.53	300	58	A	H
	*	5222	110.02	-	-	107.42	31.11	7.99	36.5	300	58	P	H
	*	5222	102.59	-	-	99.99	31.11	7.99	36.5	300	58	A	H
		5384.34	45.95	-28.05	74	43	30.94	8.43	36.42	300	58	P	H
		5351.94	36.89	-17.11	54	34	30.98	8.34	36.43	300	58	A	H
		5106.24	48.24	-25.76	74	45.68	31.2	7.91	36.55	390	68	P	V
		5146.24	38.35	-15.65	54	35.79	31.17	7.92	36.53	390	68	A	V
	*	5218	106.45	-	-	103.85	31.11	7.99	36.5	390	68	P	V
	*	5218	99.45	-	-	96.85	31.11	7.99	36.5	390	68	A	V
		5350.5	45.07	-28.93	74	42.18	30.98	8.34	36.43	390	68	P	V
		5357.88	36.16	-17.84	54	33.27	30.98	8.34	36.43	390	68	A	V



802.11a CH 48 5240MHz	*	5240	109.34	-	-	106.7	31.09	8.04	36.49	306	67	P	H
	*	5240	101.97	-	-	99.33	31.09	8.04	36.49	306	67	A	H
		5351.76	46.23	-27.77	74	43.34	30.98	8.34	36.43	306	67	P	H
		5352.66	37.28	-16.72	54	34.39	30.98	8.34	36.43	306	67	A	H
	*	5242	106.03	-	-	103.36	31.07	8.08	36.48	389	66	P	V
	*	5242	98.89	-	-	96.22	31.07	8.08	36.48	389	66	A	V
		5369.76	45.28	-28.72	74	42.35	30.96	8.39	36.42	389	66	P	V
		5353.92	36.39	-17.61	54	33.5	30.98	8.34	36.43	389	66	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10360	39.99	-34.01	74	56.9	37.4	11.84	66.15	100	360	P	H
CH 36 5180MHz		10360	39.57	-34.43	74	56.48	37.4	11.84	66.15	100	360	P	V
802.11a		10440	41.1	-32.9	74	57.84	37.47	11.89	66.1	100	360	P	H
CH 44 5220MHz		10440	41.17	-32.83	74	57.91	37.47	11.89	66.1	100	360	P	V
802.11a		10480	40.58	-33.42	74	57.21	37.52	11.92	66.07	100	360	P	H
CH 48 5240MHz		10480	41.89	-32.11	74	58.52	37.52	11.92	66.07	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5148	55.15	-18.85	74	52.59	31.17	7.92	36.53	400	57	P	H
		5148	42.05	-11.95	54	39.49	31.17	7.92	36.53	400	57	A	H
	*	5178	106.78	-	-	104.22	31.14	7.94	36.52	400	57	P	H
	*	5178	99.79	-	-	97.23	31.14	7.94	36.52	400	57	A	H
		5138.08	52.76	-21.24	74	50.2	31.19	7.91	36.54	375	56	P	V
		5149.76	40.63	-13.37	54	38.07	31.17	7.92	36.53	375	56	A	V
	*	5178	104.95	-	-	102.39	31.14	7.94	36.52	375	56	P	V
	*	5178	98.14	-	-	95.58	31.14	7.94	36.52	375	56	A	V
802.11n HT20 CH 44 5220MHz		5146.24	48.66	-25.34	74	46.1	31.17	7.92	36.53	322	39	P	H
		5149.6	40.15	-13.85	54	37.59	31.17	7.92	36.53	322	39	A	H
	*	5218	107.16	-	-	104.56	31.11	7.99	36.5	322	39	P	H
	*	5218	100.02	-	-	97.42	31.11	7.99	36.5	322	39	A	H
		5367.96	45.33	-28.67	74	42.4	30.96	8.39	36.42	322	39	P	H
		5357.52	36.69	-17.31	54	33.8	30.98	8.34	36.43	322	39	A	H
		5112.32	47.82	-26.18	74	45.26	31.2	7.91	36.55	391	94	P	V
		5150	37.74	-16.26	54	35.18	31.17	7.92	36.53	391	94	A	V
	*	5222	103.73	-	-	101.13	31.11	7.99	36.5	391	94	P	V
	*	5222	96.22	-	-	93.62	31.11	7.99	36.5	391	94	A	V
		5388.48	44.71	-29.29	74	41.76	30.94	8.43	36.42	391	94	P	V
		5350.5	36.09	-17.91	54	33.2	30.98	8.34	36.43	391	94	A	V



802.11n HT20 CH 48 5240MHz	*	5238	106.55	-	-	103.91	31.09	8.04	36.49	323	50	P	H
	*	5238	99.65	-	-	97.01	31.09	8.04	36.49	323	50	A	H
		5356.98	45.98	-28.02	74	43.09	30.98	8.34	36.43	323	50	P	H
		5350.32	37.13	-16.87	54	34.24	30.98	8.34	36.43	323	50	A	H
	*	5242	102.75	-	-	100.08	31.07	8.08	36.48	370	36	P	V
	*	5242	95.17	-	-	92.5	31.07	8.08	36.48	370	36	A	V
		5379.12	45.1	-28.9	74	42.15	30.94	8.43	36.42	370	36	P	V
		5355.36	36.04	-17.96	54	33.15	30.98	8.34	36.43	370	36	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	40.1	-33.9	74	57.01	37.4	11.84	66.15	100	360	P	H
		10360	40.82	-33.18	74	57.73	37.4	11.84	66.15	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	40.39	-33.61	74	57.13	37.47	11.89	66.1	100	360	P	H
		10440	41.1	-32.9	74	57.84	37.47	11.89	66.1	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	41.05	-32.95	74	57.68	37.52	11.92	66.07	100	360	P	H
		10480	40.59	-33.41	74	57.22	37.52	11.92	66.07	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5149.92	58.3	-15.7	74	55.74	31.17	7.92	36.53	292	47	P	H
	!	5149.76	50.14	-3.86	54	47.58	31.17	7.92	36.53	292	47	A	H
	*	5192	104.62	-	-	102.06	31.12	7.95	36.51	292	47	P	H
	*	5192	96.93	-	-	94.37	31.12	7.95	36.51	292	47	A	H
		5374.26	46.13	-27.87	74	43.2	30.96	8.39	36.42	292	47	P	H
		5353.92	37.12	-16.88	54	34.23	30.98	8.34	36.43	292	47	A	H
		5149.92	54.42	-19.58	74	51.86	31.17	7.92	36.53	371	69	P	V
		5149.28	45.73	-8.27	54	43.17	31.17	7.92	36.53	371	69	A	V
	*	5192	100.14	-	-	97.58	31.12	7.95	36.51	371	69	P	V
	*	5192	93.85	-	-	91.29	31.12	7.95	36.51	371	69	A	V
		5350.86	46.12	-27.88	74	43.23	30.98	8.34	36.43	371	69	P	V
		5352.66	36.67	-17.33	54	33.78	30.98	8.34	36.43	371	69	A	V
802.11n HT40 CH 46 5230MHz		5149.12	49.33	-24.67	74	46.77	31.17	7.92	36.53	331	59	P	H
		5148	40.18	-13.82	54	37.62	31.17	7.92	36.53	331	59	A	H
	*	5226	102.33	-	-	99.69	31.09	8.04	36.49	331	59	P	H
	*	5226	95.37	-	-	92.73	31.09	8.04	36.49	331	59	A	H
		5391	45.69	-28.31	74	42.74	30.94	8.43	36.42	331	59	P	H
		5351.94	37.74	-16.26	54	34.85	30.98	8.34	36.43	331	59	A	H
		5135.68	47.66	-26.34	74	45.1	31.19	7.91	36.54	385	74	P	V
		5145.44	38.74	-15.26	54	36.18	31.17	7.92	36.53	385	74	A	V
	*	5232	100.37	-	-	97.73	31.09	8.04	36.49	385	74	P	V
	*	5232	92.75	-	-	90.11	31.09	8.04	36.49	385	74	A	V
		5357.16	45.28	-28.72	74	42.39	30.98	8.34	36.43	385	74	P	V
		5362.92	36.85	-17.15	54	33.92	30.96	8.39	36.42	385	74	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	39.72	-34.28	74	56.6	37.41	11.85	66.14	100	360	P	H
		10380	39.58	-34.42	74	56.46	37.41	11.85	66.14	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	41.54	-32.46	74	58.24	37.49	11.9	66.09	100	360	P	H
		10460	39.77	-34.23	74	56.47	37.49	11.9	66.09	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.76	58.63	-15.37	74	56.07	31.17	7.92	36.53	349	35	P	H
		5146.24	46.11	-7.89	54	43.55	31.17	7.92	36.53	349	35	A	H
	*	5204	98.82	-	-	96.26	31.12	7.95	36.51	349	35	P	H
	*	5204	91.33	-	-	88.77	31.12	7.95	36.51	349	35	A	H
		5374.8	45.59	-28.41	74	42.66	30.96	8.39	36.42	349	35	P	H
		5351.04	36.77	-17.23	54	33.88	30.98	8.34	36.43	349	35	A	H
		5146.56	56.9	-17.1	74	54.34	31.17	7.92	36.53	400	54	P	V
		5147.84	43.98	-10.02	54	41.42	31.17	7.92	36.53	400	54	A	V
	*	5192	96.04	-	-	93.48	31.12	7.95	36.51	400	54	P	V
	*	5192	88.86	-	-	86.3	31.12	7.95	36.51	400	54	A	V
		5355.18	45	-29	74	42.11	30.98	8.34	36.43	400	54	P	V
		5365.08	36.46	-17.54	54	33.53	30.96	8.39	36.42	400	54	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10420	40.55	-33.45	74	57.34	37.45	11.88	66.12	100	360	P	H
VHT80													
CH 42		10420	40.45	-33.55	74	57.24	37.45	11.88	66.12	100	360	P	V
5210MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 52 5260MHz		5109.92	47.43	-26.57	74	44.87	31.2	7.91	36.55	315	41	P	H
		5149.6	38.18	-15.82	54	35.62	31.17	7.92	36.53	315	41	A	H
	*	5258	109.61	-	-	106.94	31.07	8.08	36.48	315	41	P	H
	*	5258	102.14	-	-	99.47	31.07	8.08	36.48	315	41	A	H
		5104.64	46.44	-27.56	74	43.88	31.22	7.9	36.56	362	64	P	V
		5116.32	37.38	-16.62	54	34.82	31.2	7.91	36.55	362	64	A	V
	*	5258	104.88	-	-	102.21	31.07	8.08	36.48	362	64	P	V
	*	5258	98.14	-	-	95.47	31.07	8.08	36.48	362	64	A	V
802.11a CH 60 5300MHz		5114.08	46.69	-27.31	74	44.13	31.2	7.91	36.55	316	43	P	H
		5147.36	37.38	-16.62	54	34.82	31.17	7.92	36.53	316	43	A	H
	*	5302	108.27	-	-	105.5	31.02	8.21	36.46	316	43	P	H
	*	5302	100.85	-	-	98.08	31.02	8.21	36.46	316	43	A	H
		5351.9	51	-23	74	48.11	30.98	8.34	36.43	316	43	P	H
		5350.9	41.38	-12.62	54	38.49	30.98	8.34	36.43	316	43	A	H
		5128.48	46.37	-27.63	74	43.81	31.19	7.91	36.54	400	72	P	V
		5138.88	37.04	-16.96	54	34.48	31.19	7.91	36.54	400	72	A	V
	*	5302	106.32	-	-	103.55	31.02	8.21	36.46	400	72	P	V
	*	5302	98.84	-	-	96.07	31.02	8.21	36.46	400	72	A	V
		5361.7	47.6	-26.4	74	44.67	30.96	8.39	36.42	400	72	P	V
		5355.1	38.92	-15.08	54	36.03	30.98	8.34	36.43	400	72	A	V



802.11a CH 64 5320MHz	*	5318	108.06	-	-	105.24	31.01	8.26	36.45	312	42	P	H
	*	5318	100.82	-	-	98	31.01	8.26	36.45	312	42	A	H
		5353	50.5	-23.5	74	47.61	30.98	8.34	36.43	312	42	P	H
		5350.4	41.34	-12.66	54	38.45	30.98	8.34	36.43	312	42	A	H
	*	5322	105.78	-	-	102.96	31.01	8.26	36.45	395	74	P	V
	*	5322	98.8	-	-	95.98	31.01	8.26	36.45	395	74	A	V
		5351.3	48.06	-25.94	74	45.17	30.98	8.34	36.43	395	74	P	V
		5350.2	39.6	-14.4	54	36.71	30.98	8.34	36.43	395	74	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10520	40.6	-33.4	74	57.14	37.56	11.94	66.04	100	360	P	H
CH 52 5260MHz		10520	40.43	-33.57	74	56.97	37.56	11.94	66.04	100	360	P	V
802.11a		10600	41.65	-32.35	74	57.98	37.65	12	65.98	100	360	P	H
CH 60 5300MHz		10600	40.18	-33.82	74	56.51	37.65	12	65.98	100	360	P	V
802.11a		10640	39.54	-34.46	74	55.8	37.68	12.02	65.96	100	360	P	H
CH 64 5320MHz		10640	39.71	-34.29	74	55.97	37.68	12.02	65.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		5122.72	47.05	-26.95	74	44.49	31.19	7.91	36.54	312	44	P	H
		5146.88	37.98	-16.02	54	35.42	31.17	7.92	36.53	312	44	A	H
	*	5258	106.99	-	-	104.32	31.07	8.08	36.48	312	44	P	H
	*	5258	99.84	-	-	97.17	31.07	8.08	36.48	312	44	A	H
		5113.44	46.71	-27.29	74	44.15	31.2	7.91	36.55	400	64	P	V
		5147.52	37.38	-16.62	54	34.82	31.17	7.92	36.53	400	64	A	V
	*	5258	103.51	-	-	100.84	31.07	8.08	36.48	400	64	P	V
	*	5258	96.14	-	-	93.47	31.07	8.08	36.48	400	64	A	V
802.11n HT20 CH 60 5300MHz		5139.04	47	-27	74	44.44	31.19	7.91	36.54	304	51	P	H
		5147.2	37.29	-16.71	54	34.73	31.17	7.92	36.53	304	51	A	H
	*	5298	105.5	-	-	102.73	31.02	8.21	36.46	304	51	P	H
	*	5298	98.56	-	-	95.79	31.02	8.21	36.46	304	51	A	H
		5353.8	49.11	-24.89	74	46.22	30.98	8.34	36.43	304	51	P	H
		5351.8	40.12	-13.88	54	37.23	30.98	8.34	36.43	304	51	A	H
		5104.32	46.86	-27.14	74	44.3	31.22	7.9	36.56	400	62	P	V
		5104.48	36.97	-17.03	54	34.41	31.22	7.9	36.56	400	62	A	V
	*	5302	102.5	-	-	99.73	31.02	8.21	36.46	400	62	P	V
	*	5302	95.52	-	-	92.75	31.02	8.21	36.46	400	62	A	V
		5356.2	45.43	-28.57	74	42.54	30.98	8.34	36.43	400	62	P	V
		5350.4	37.17	-16.83	54	34.28	30.98	8.34	36.43	400	62	A	V



802.11n HT20 CH 64 5320MHz	*	5322	105.77	-	-	102.95	31.01	8.26	36.45	320	56	P	H
	*	5322	98.2	-	-	95.38	31.01	8.26	36.45	320	56	A	H
		5350.5	51.44	-22.56	74	48.55	30.98	8.34	36.43	320	56	P	H
		5362.1	41.75	-12.25	54	38.82	30.96	8.39	36.42	320	56	A	H
	*	5320	101.55	-	-	98.73	31.01	8.26	36.45	396	59	P	V
	*	5320	101.55	-	-	98.73	31.01	8.26	36.45	396	59	A	V
		5353.8	49.79	-24.21	74	46.9	30.98	8.34	36.43	396	59	P	V
		5358.3	38.78	-15.22	54	35.89	30.98	8.34	36.43	396	59	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	41.12	-32.88	74	57.66	37.56	11.94	66.04	100	360	P	H
		10520	40.17	-33.83	74	56.71	37.56	11.94	66.04	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	40.06	-33.94	74	56.39	37.65	12	65.98	100	360	P	H
		10600	41.91	-32.09	74	58.24	37.65	12	65.98	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	39.97	-34.03	74	56.23	37.68	12.02	65.96	100	360	P	H
		10640	40.45	-33.55	74	56.71	37.68	12.02	65.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		5123.2	46.51	-27.49	74	43.95	31.19	7.91	36.54	100	41	P	H
		5147.04	38.08	-15.92	54	35.52	31.17	7.92	36.53	100	41	A	H
	*	5276	101.28	-	-	98.54	31.04	8.17	36.47	100	41	P	H
	*	5276	94.63	-	-	91.89	31.04	8.17	36.47	100	41	A	H
		5354.7	47.06	-26.94	74	44.17	30.98	8.34	36.43	100	41	P	H
		5355.6	39.24	-14.76	54	36.35	30.98	8.34	36.43	100	41	A	H
		5140.8	46.93	-27.07	74	44.37	31.17	7.92	36.53	357	73	P	V
		5149.12	37.72	-16.28	54	35.16	31.17	7.92	36.53	357	73	A	V
	*	5268	98.15	-	-	95.44	31.06	8.12	36.47	357	73	P	V
	*	5268	91.63	-	-	88.92	31.06	8.12	36.47	357	73	A	V
		5356	45.71	-28.29	74	42.82	30.98	8.34	36.43	357	73	P	V
		5352.7	37.82	-16.18	54	34.93	30.98	8.34	36.43	357	73	A	V
802.11n HT40 CH 62 5310MHz		5101.92	48.14	-25.86	74	45.58	31.22	7.9	36.56	337	45	P	H
		5100.96	37.69	-16.31	54	35.13	31.22	7.9	36.56	337	45	A	H
	*	5304	101.39	-	-	98.62	31.02	8.21	36.46	337	45	P	H
	*	5304	94.34	-	-	91.57	31.02	8.21	36.46	337	45	A	H
		5350.4	57.46	-16.54	74	54.57	30.98	8.34	36.43	337	45	P	H
	!	5350.5	50.02	-3.98	54	47.13	30.98	8.34	36.43	337	45	A	H
		5140.64	46.14	-27.86	74	43.58	31.17	7.92	36.53	393	87	P	V
		5149.44	37.54	-16.46	54	34.98	31.17	7.92	36.53	393	87	A	V
	*	5306	98.71	-	-	95.94	31.02	8.21	36.46	393	87	P	V
	*	5306	91.51	-	-	88.74	31.02	8.21	36.46	393	87	A	V
		5350	52.99	-21.01	74	50.1	30.98	8.34	36.43	393	87	P	V
		5350.1	45.46	-8.54	54	42.57	30.98	8.34	36.43	393	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	39.57	-34.43	74	56.07	37.58	11.95	66.03	100	360	P	H
		10540	39.63	-34.37	74	56.13	37.58	11.95	66.03	100	360	P	V
802.11n HT40 CH 62 5310MHz		10620	40.78	-33.22	74	57.07	37.67	12.01	65.97	100	360	P	H
		10620	41.03	-32.97	74	57.32	37.67	12.01	65.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5139.36	47.23	-26.77	74	44.67	31.19	7.91	36.54	312	39	P	H
		5148.32	38.18	-15.82	54	35.62	31.17	7.92	36.53	312	39	A	H
	*	5270	98.37	-	-	95.66	31.06	8.12	36.47	312	39	P	H
	*	5270	91.03	-	-	88.32	31.06	8.12	36.47	312	39	A	H
		5350.1	62.4	-11.6	74	59.51	30.98	8.34	36.43	312	39	P	H
	!	5350	49.95	-4.05	54	47.06	30.98	8.34	36.43	312	39	A	H
		5112.64	46.8	-27.2	74	44.24	31.2	7.91	36.55	400	62	P	V
		5136.16	37.85	-16.15	54	35.29	31.19	7.91	36.54	400	62	A	V
	*	5284	95.67	-	-	92.93	31.04	8.17	36.47	400	62	P	V
	*	5284	88.28	-	-	85.54	31.04	8.17	36.47	400	62	A	V
		5352.3	57	-17	74	54.11	30.98	8.34	36.43	400	62	P	V
		5350.1	45.64	-8.36	54	42.75	30.98	8.34	36.43	400	62	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10580	39.32	-34.68	74	55.7	37.63	11.99	66	100	360	P	H
VHT80													
CH 58		10580	41.21	-32.79	74	57.59	37.63	11.99	66	100	360	P	V
5290MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5463.12	47.51	-26.49	74	44.67	30.86	8.35	36.37	293	44	P	H
		5468.4	38.5	-15.5	54	35.66	30.86	8.35	36.37	293	44	A	H
	*	5498	102.58	-	-	99.82	30.83	8.29	36.36	293	44	P	H
	*	5498	95.33	-	-	92.57	30.83	8.29	36.36	293	44	A	H
		5469.36	46.08	-27.92	74	43.24	30.86	8.35	36.37	386	80	P	V
		5468.88	37.3	-16.7	54	34.46	30.86	8.35	36.37	386	80	A	V
	*	5500	100.37	-	-	97.61	30.83	8.29	36.36	386	80	P	V
	*	5500	93.1	-	-	90.34	30.83	8.29	36.36	386	80	A	V
802.11a CH 116 5580MHz		5453.52	45.47	-28.53	74	42.59	30.88	8.38	36.38	373	39	P	H
		5468.88	36.44	-17.56	54	33.6	30.86	8.35	36.37	373	39	A	H
	*	5580	103.49	-	-	100.89	30.76	8.16	36.32	373	39	P	H
	*	5580	96.88	-	-	94.28	30.76	8.16	36.32	373	39	A	H
		5753.96	47.19	-26.81	74	43.54	31.56	8.37	36.28	373	39	P	H
		5747.16	37.57	-16.43	54	34.07	31.44	8.34	36.28	373	39	A	H
		5451.28	45.56	-28.44	74	42.68	30.88	8.38	36.38	377	85	P	V
		5469.04	36.27	-17.73	54	33.43	30.86	8.35	36.37	377	85	A	V
	*	5582	100.49	-	-	97.93	30.75	8.13	36.32	377	85	P	V
	*	5582	93.76	-	-	91.2	30.75	8.13	36.32	377	85	A	V
		5758.44	46.64	-27.36	74	42.99	31.56	8.37	36.28	377	85	P	V
		5731.64	36.85	-17.15	54	33.5	31.32	8.31	36.28	377	85	A	V



802.11a CH 140 5700MHz	*	5702	103.73	-	-	100.54	31.19	8.28	36.28	312	40	P	H
	*	5702	96.67	-	-	93.48	31.19	8.28	36.28	312	40	A	H
		5743.56	50.25	-23.75	74	46.75	31.44	8.34	36.28	312	40	P	H
		5725.08	40.86	-13.14	54	37.51	31.32	8.31	36.28	312	40	A	H
	*	5702	101.35	-	-	98.16	31.19	8.28	36.28	359	82	P	V
	*	5702	94.04	-	-	90.85	31.19	8.28	36.28	359	82	A	V
		5744.92	48.02	-25.98	74	44.52	31.44	8.34	36.28	359	82	P	V
		5725.08	38.79	-15.21	54	35.44	31.32	8.31	36.28	359	82	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11000	42.56	-31.44	74	57.95	38.06	12.25	65.7	100	360	P	H
CH 100		11000	41.18	-32.82	74	56.57	38.06	12.25	65.7	100	360	P	V
5500MHz													
802.11a		11160	41.23	-32.77	74	56.21	38.24	12.36	65.58	100	360	P	H
CH 116		11160	41.14	-32.86	74	56.12	38.24	12.36	65.58	100	360	P	V
5580MHz													
802.11a		11400	39.58	-34.42	74	53.98	38.49	12.52	65.41	100	360	P	H
CH 140		11400	39.81	-34.19	74	54.21	38.49	12.52	65.41	100	360	P	V
5700MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5468.08	54.67	-19.33	74	51.83	30.86	8.35	36.37	301	54	P	H
		5469.2	41.56	-12.44	54	38.72	30.86	8.35	36.37	301	54	A	H
	*	5502	104.73	-	-	101.97	30.83	8.29	36.36	301	54	P	H
	*	5502	97.48	-	-	94.72	30.83	8.29	36.36	301	54	A	H
		5459.92	46.29	-27.71	74	43.41	30.88	8.38	36.38	331	78	P	V
		5469.04	38.56	-15.44	54	35.72	30.86	8.35	36.37	331	78	A	V
	*	5502	100.17	-	-	97.41	30.83	8.29	36.36	331	78	P	V
	*	5502	100.17	-	-	97.41	30.83	8.29	36.36	331	78	A	V
802.11n HT20 CH 116 5580MHz		5421.68	44.93	-29.07	74	41.98	30.91	8.44	36.4	301	39	P	H
		5469.68	36.88	-17.12	54	34.04	30.86	8.35	36.37	301	39	A	H
	*	5582	105.93	-	-	103.37	30.75	8.13	36.32	301	39	P	H
	*	5582	98.46	-	-	95.9	30.75	8.13	36.32	301	39	A	H
		5755.96	47.59	-26.41	74	43.94	31.56	8.37	36.28	301	39	P	H
		5742.2	37.77	-16.23	54	34.27	31.44	8.34	36.28	301	39	A	H
		5454.48	45.36	-28.64	74	42.48	30.88	8.38	36.38	339	81	P	V
		5463.44	36.21	-17.79	54	33.37	30.86	8.35	36.37	339	81	A	V
	*	5582	99.6	-	-	97.04	30.75	8.13	36.32	339	81	P	V
	*	5582	92.75	-	-	90.19	30.75	8.13	36.32	339	81	A	V
		5727.24	46.57	-27.43	74	43.22	31.32	8.31	36.28	339	81	P	V
		5736.68	37.19	-16.81	54	33.69	31.44	8.34	36.28	339	81	A	V



802.11n HT20 CH 140 5700MHz	*	5700	107.13	-	-	104.1	31.07	8.25	36.29	298	42	P	H
	*	5700	99.28	-	-	96.25	31.07	8.25	36.29	298	42	A	H
		5725.16	58.13	-15.87	74	54.78	31.32	8.31	36.28	298	42	P	H
		5725	46.59	-7.41	54	43.24	31.32	8.31	36.28	298	42	A	H
	*	5702	100.57	-	-	97.38	31.19	8.28	36.28	395	83	P	V
	*	5702	93.45	-	-	90.26	31.19	8.28	36.28	395	83	A	V
		5754.44	48.63	-25.37	74	44.98	31.56	8.37	36.28	395	83	P	V
		5725.08	40.45	-13.55	54	37.1	31.32	8.31	36.28	395	83	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		11000	41.94	-32.06	74	57.33	38.06	12.25	65.7	100	360	P	H
		11000	42.94	-31.06	74	58.33	38.06	12.25	65.7	100	360	P	V
802.11n HT20 CH 116 5580MHz		11600	39.94	-34.06	74	54.43	38.35	12.65	65.49	100	360	P	H
		11600	39.76	-34.24	74	54.25	38.35	12.65	65.49	100	360	P	V
802.11n HT20 CH 140 5700MHz		11400	40.56	-33.44	74	54.96	38.49	12.52	65.41	100	360	P	H
		11400	39.78	-34.22	74	54.18	38.49	12.52	65.41	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5470	58.68	-15.32	74	55.84	30.86	8.35	36.37	300	53	P	H
	!	5470	50.85	-3.15	54	48.01	30.86	8.35	36.37	300	53	A	H
	*	5512	101	-	-	98.24	30.83	8.29	36.36	300	53	P	H
	*	5512	94.32	-	-	91.56	30.83	8.29	36.36	300	53	A	H
		5749.16	46.93	-27.07	74	43.43	31.44	8.34	36.28	300	53	P	H
		5736.76	38.49	-15.51	54	34.99	31.44	8.34	36.28	300	53	A	H
		5470	54.35	-19.65	74	51.51	30.86	8.35	36.37	359	66	P	V
		5469.84	44.37	-9.63	54	41.53	30.86	8.35	36.37	359	66	A	V
	*	5512	97.45	-	-	94.69	30.83	8.29	36.36	359	66	P	V
	*	5512	89.65	-	-	86.89	30.83	8.29	36.36	359	66	A	V
		5763.56	46.85	-27.15	74	43.2	31.56	8.37	36.28	359	66	P	V
		5745.64	37.74	-16.26	54	34.24	31.44	8.34	36.28	359	66	A	V
802.11n HT40 CH 110 5550MHz		5463.6	47.67	-26.33	74	44.83	30.86	8.35	36.37	337	34	P	H
		5466.96	38.45	-15.55	54	35.61	30.86	8.35	36.37	337	34	A	H
	*	5554	101.74	-	-	99.09	30.78	8.2	36.33	337	34	P	H
	*	5554	93.81	-	-	91.16	30.78	8.2	36.33	337	34	A	H
		5756.04	47.4	-26.6	74	43.75	31.56	8.37	36.28	337	34	P	H
		5753.08	37.83	-16.17	54	34.18	31.56	8.37	36.28	337	34	A	H
		5459.28	45.57	-28.43	74	42.69	30.88	8.38	36.38	376	94	P	V
		5450.16	37.22	-16.78	54	34.34	30.88	8.38	36.38	376	94	A	V
	*	5554	97.81	-	-	95.16	30.78	8.2	36.33	376	94	P	V
	*	5554	90.31	-	-	87.66	30.78	8.2	36.33	376	94	A	V
		5745.64	46.8	-27.2	74	43.3	31.44	8.34	36.28	376	94	P	V
		5732.28	37.53	-16.47	54	34.18	31.32	8.31	36.28	376	94	A	V



802.11n HT40 CH 134 5670MHz		5464.4	44.82	-29.18	74	41.98	30.86	8.35	36.37	336	48	P	H
		5465.84	36.66	-17.34	54	33.82	30.86	8.35	36.37	336	48	A	H
	*	5674	102.18	-	-	99.3	30.95	8.22	36.29	336	48	P	H
	*	5674	94.9	-	-	92.02	30.95	8.22	36.29	336	48	A	H
		5725.64	53.72	-20.28	74	50.37	31.32	8.31	36.28	336	48	P	H
		5725.4	42.3	-11.7	54	38.95	31.32	8.31	36.28	336	48	A	H
		5365.84	44.83	-29.17	74	41.9	30.96	8.39	36.42	395	0	P	V
		5460.72	36.52	-17.48	54	33.64	30.88	8.38	36.38	395	0	A	V
	*	5672	99.95	-	-	97.07	30.95	8.22	36.29	395	0	P	V
	*	5672	92.12	-	-	89.24	30.95	8.22	36.29	395	0	A	V
		5756.92	46.76	-27.24	74	43.11	31.56	8.37	36.28	395	0	P	V
		5735.08	38.26	-15.74	54	34.76	31.44	8.34	36.28	395	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	43.34	-30.66	74	58.69	38.08	12.26	65.69	100	360	P	H
		11020	42.04	-31.96	74	57.39	38.08	12.26	65.69	100	360	P	V
802.11n HT40 CH 110 5550MHz		11100	43.88	-30.12	74	59.02	38.17	12.32	65.63	100	360	P	H
		11100	42.25	-31.75	74	57.39	38.17	12.32	65.63	100	360	P	V
802.11n HT40 CH 134 5670MHz		11340	41.3	-32.7	74	55.87	38.42	12.47	65.46	100	360	P	H
		11340	41.96	-32.04	74	56.53	38.42	12.47	65.46	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5465.2	58.28	-15.72	74	55.44	30.86	8.35	36.37	290	53	P	H
	!	5469.52	50.58	-3.42	54	47.74	30.86	8.35	36.37	290	53	A	H
	*	5528	98.26	-	-	95.54	30.81	8.26	36.35	290	53	P	H
	*	5528	91.11	-	-	88.39	30.81	8.26	36.35	290	53	A	H
		5731.88	47.01	-26.99	74	43.66	31.32	8.31	36.28	290	53	P	H
		5759.88	39.13	-14.87	54	35.48	31.56	8.37	36.28	290	53	A	H
		5469.84	51.59	-22.41	74	48.75	30.86	8.35	36.37	330	91	P	V
		5470	45	-9	54	42.16	30.86	8.35	36.37	330	91	A	V
	*	5512	93.27	-	-	90.51	30.83	8.29	36.36	330	91	P	V
	*	5512	86.19	-	-	83.43	30.83	8.29	36.36	330	91	A	V
		5760.52	46.46	-27.54	74	42.81	31.56	8.37	36.28	330	91	P	V
		5759.8	37.99	-16.01	54	34.34	31.56	8.37	36.28	330	91	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11060	41.66	-32.34	74	56.89	38.13	12.3	65.66	100	360	P	H
VHT80													
CH 106		11060	41.6	-32.4	74	56.83	38.13	12.3	65.66	100	360	P	V
5530MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30	26.23	-13.77	40	30.67	27.2	0.65	32.29	160	57	P	H
		63.95	22.72	-17.28	40	40.78	13.24	0.95	32.25	-	-	P	H
		160.95	22.74	-20.76	43.5	36.04	17.45	1.53	32.28	-	-	P	H
		216.24	22.06	-23.94	46	36.31	16.23	1.73	32.21	-	-	P	H
		450.98	26.76	-19.24	46	30.6	25.46	2.64	31.94	-	-	P	H
		798.24	30.09	-15.91	46	30.21	27.88	3.58	31.58	-	-	P	H
	!	55.22	34.25	-5.75	40	50.66	14.9	0.89	32.2	150	45	P	V
	!	66.86	34.14	-5.86	40	51.93	13.46	0.98	32.23	-	-	P	V
		125.06	31.95	-11.55	43.5	44.49	18.39	1.35	32.28	-	-	P	V
		323.91	26.52	-19.48	46	36.26	20.13	2.21	32.08	-	-	P	V
		450.98	27.03	-18.97	46	30.87	25.46	2.64	31.94	-	-	P	V
		837.04	30.6	-15.4	46	29.75	28.72	3.68	31.55	-	-	P	V
Remark		1. No other spurious found.											
		2. All results are PASS against limit line.											



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	94.19	2.068	0.484	1kHz
802.11n HT20	93.25	1.922	0.520	1kHz
802.11n HT40	88.71	0.945	1.058	3kHz
802.11ac VHT80	77.72	0.465	2.150	3kHz

802.11a

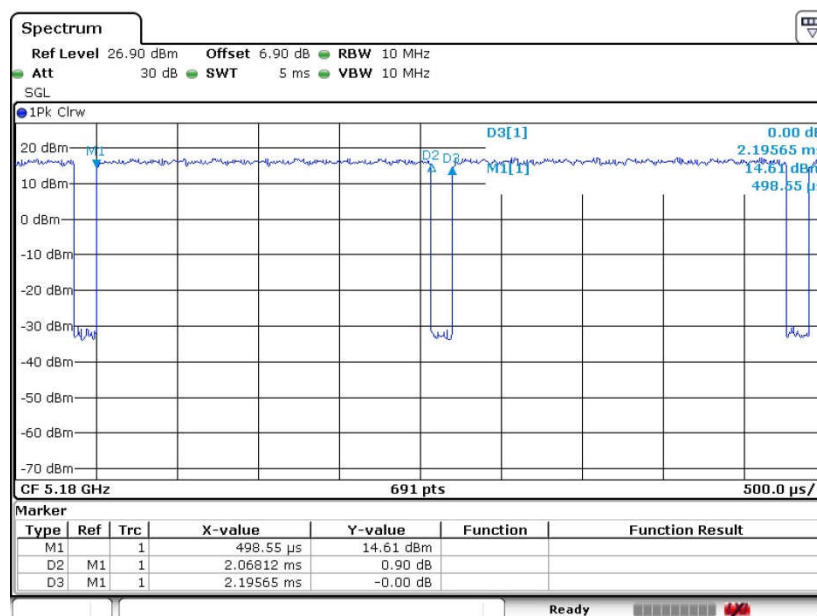




802.11n HT20

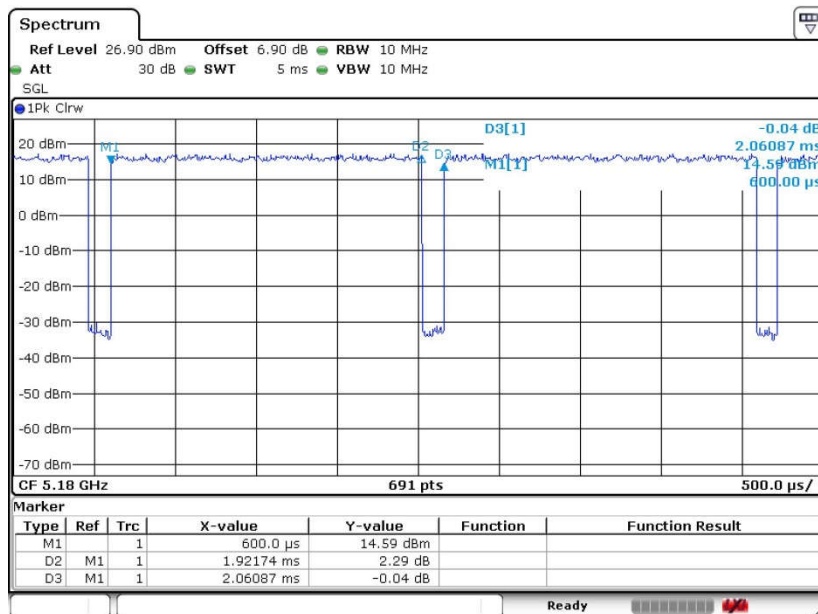

802.11n HT40

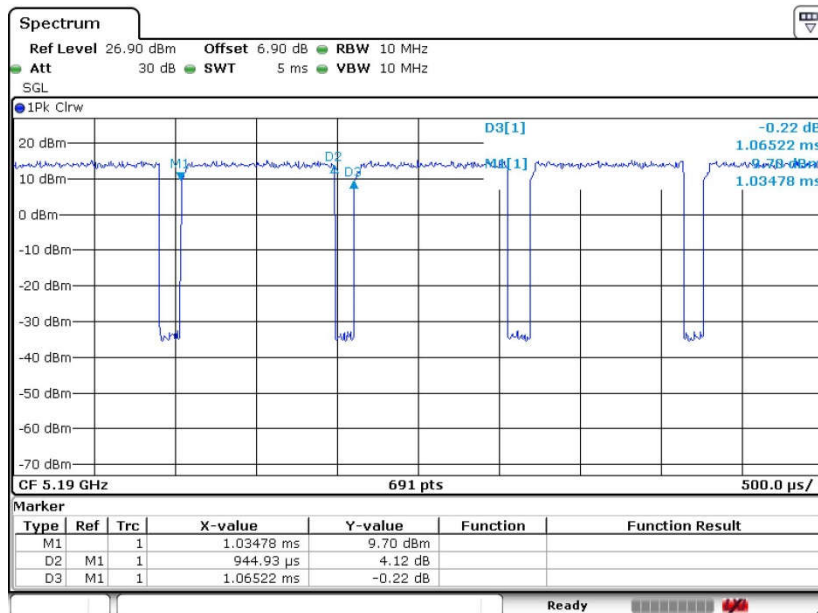



802.11ac VHT80

