



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihs District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR890LA1

Product Name	AC3200 Ultra Wi-Fi Router
Brand Name	D-Link
Model No.	DIR-890L
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Oct. 12, 2014
Final Test Date	Nov. 18, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	11
3.7. Table for Supporting Units	12
3.8. Table for Parameters of Test Software Setting	12
3.9. EUT Operation during Test	14
3.10. Duty Cycle.....	14
3.11. Test Configurations	15
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. Maximum Conducted Output Power Measurement.....	22
4.3. Power Spectral Density Measurement	26
4.4. 6dB Spectrum Bandwidth Measurement	44
4.5. Radiated Emissions Measurement	53
4.6. Emissions Measurement	81
4.7. Antenna Requirements	110
5. LIST OF MEASURING EQUIPMENTS	111
6. MEASUREMENT UNCERTAINTY.....	113
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N0736AA	Rev. 01	Initial issue of report	Nov. 24, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : AC3200 Ultra Wi-Fi Router
Brand Name : D-Link
Model No. : DIR-890L
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 12, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.07 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.00 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.01 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.34 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.01 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 17.44 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.16 MHz <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 17.78 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.48 MHz
Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 29.25 dBm ; 802.11ac MCS0/Nss1 (VHT40): 22.79 dBm <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 29.23 dBm ; 802.11ac MCS0/Nss1 (VHT40): 29.21 dBm ; 802.11ac MCS0/Nss1 (VHT80): 28.11 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 11.68 MHz ; 11g: 17.36 MHz ; 11a: 17.12 MHz
Maximum Conducted Output Power	11b: 29.67 dBm ; 11g: 29.71 dBm ; 11a: 29.78 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☒ With beamforming ☐ Without beamforming

Note: The product has beamforming function for 802.11n/ac 2.4GHz/5GHz.

Antenna and Band width

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac (2.4GHz)	V	V	X
IEEE 802.11ac (5GHz)	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23
802.11ac (VHT20) (For 2.4GHz)	3	MCS 0-9/Nss1-3
802.11ac (VHT40) (For 2.4GHz)	3	MCS 0-9/Nss1-3
802.11ac (VHT20) (For 5GHz)	3	MCS 0-9/Nss1-3
802.11ac (VHT40) (For 5GHz)	3	MCS 0-9/Nss1-3
802.11ac (VHT80) (For 5GHz)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 in 2.4GHz and support VHT20, VHT40, VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	APD	DA-60N12	Input:100-240V~1.5A 50/60Hz Output:12V-5A
Adapter 2	LEI	NU60-H120500-I1	Input:100-240V~50/60Hz 1.4A Output:12V-5.0A
Others			
Power cable*2, Non-Shielded, 1.8m			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	P/N	Antenna Type	Connector	Gain (dBi)		
						2.4GHz	5GHz	
							B1	B4
1	Hong Lin	DIR-890L	290-20166	PCB Antenna	I-PEX	1.5	3	2
2	Hong Lin	DIR-890L	290-20164	PCB Antenna	I-PEX	1.5	3	2
3	Hong Lin	DIR-890L	290-20147	PCB Antenna	I-PEX	1.5	3	2
4	Hong Lin	DIR-890L	290-20165	PCB Antenna	I-PEX	1.5	3	2

Note:

<For 2.4GHz Band>

For IEEE 802.11b/g/n/ac mode (3TX/3RX):

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

<For 5GHz Band 1>


For IEEE 802.11a/n/ac mode (3TX/3RX):

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

<For 5GHz Band 4>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

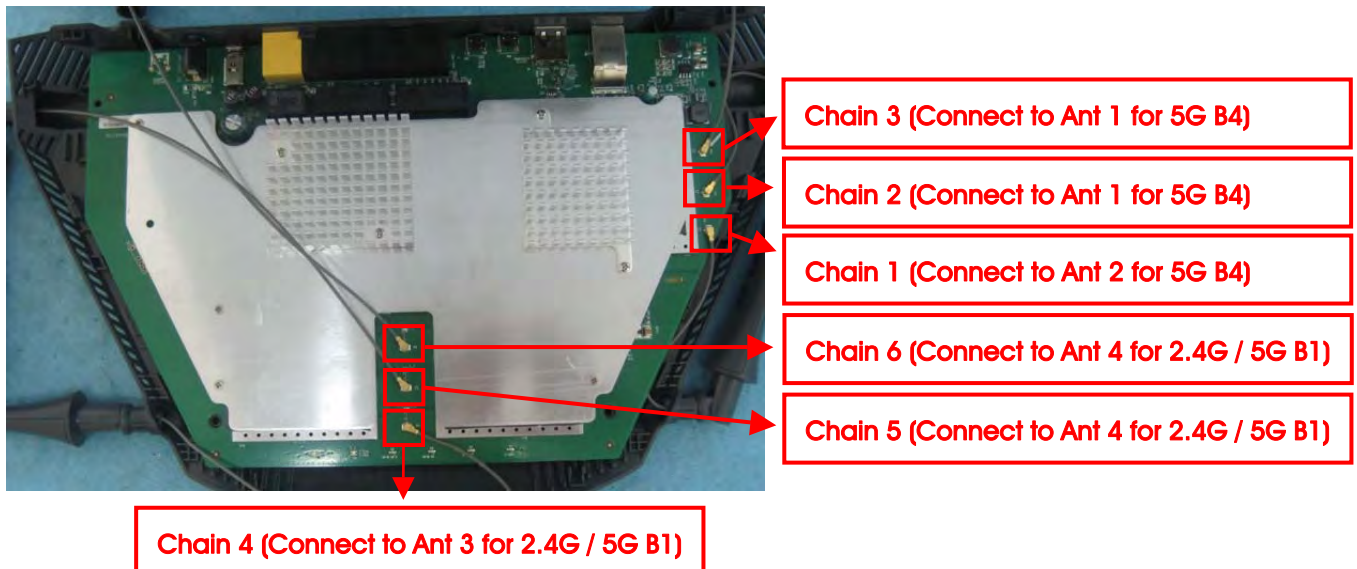

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	1/6/11	4+5+6
	11ac VHT40	MCS0/Nss1	3/6/9	4+5+6
	11b/CCK	1 Mbps	1/6/11	4+5+6
	11g/BPSK	6 Mbps	1/6/11	4+5+6
Power Spectral Density	11ac VHT20	MCS0/Nss1	1/6/11	4+5+6
	11ac VHT40	MCS0/Nss1	3/6/9	4+5+6
	11b/CCK	1 Mbps	1/6/11	4+5+6
	11g/BPSK	6 Mbps	1/6/11	4+5+6
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	1/6/11	4+5+6
	11ac VHT40	MCS0/Nss1	3/6/9	4+5+6
	11b/CCK	1 Mbps	1/6/11	4+5+6
	11g/BPSK	6 Mbps	1/6/11	4+5+6
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	1/6/11	4+5+6
	11ac VHT40	MCS0/Nss1	3/6/9	4+5+6
	11b/CCK	1 Mbps	1/6/11	4+5+6
	11g/BPSK	6 Mbps	1/6/11	4+5+6
Band Edge Emissions	11ac VHT20	MCS0/Nss1	1/6/11	4+5+6
	11ac VHT40	MCS0/Nss1	3/6/9	4+5+6
	11b/CCK	1 Mbps	1/6/11	4+5+6
	11g/BPSK	6 Mbps	1/6/11	4+5+6

For 5GHz Band:


Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Power Spectral Density	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Band Edge Emissions	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

The EUT has three radios, Radio 1 support WLAN 5GHz B1, Radio 2 support WLAN 2.4GHz and Radio 3 supports WLAN 5GHz B4 function.

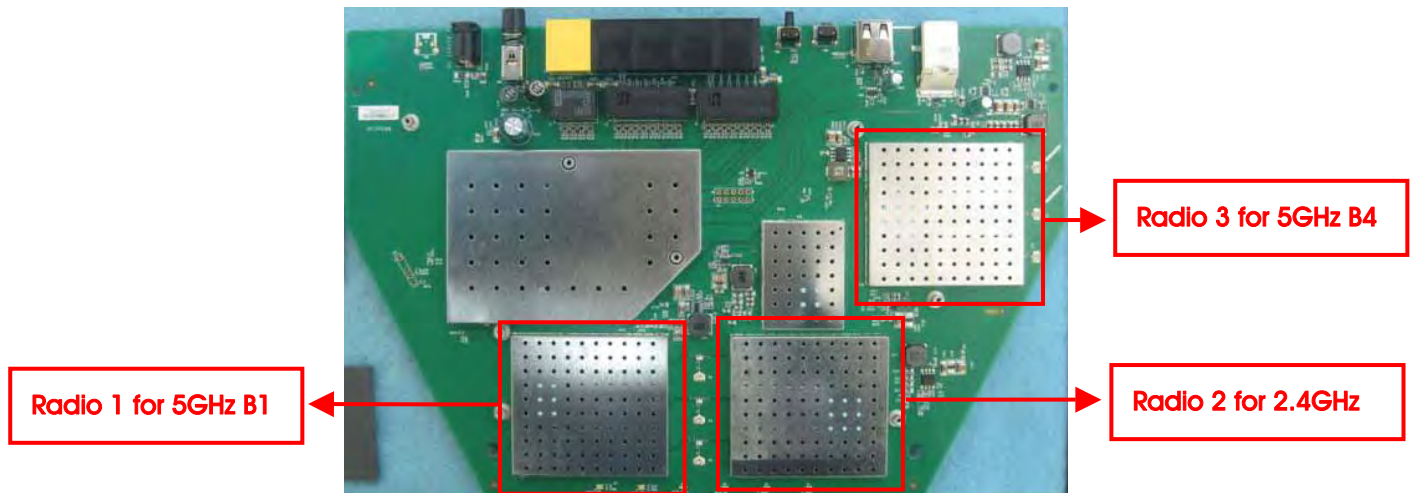

For Conducted Emission test:

Mode 1. CTX- EUT laying: 5GHz B1 (Radio 1) + Adapter 1

Mode 2. CTX- EUT laying: 2.4GHz (Radio 2) + Adapter 1

Mode 3. CTX- EUT laying: 5GHz B4 (Radio 3) + Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. CTX- EUT laying: 5GHz B1 (Radio 1) + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission below 1GHz test:

Mode 1. CTX- EUT laying: 5GHz B1 (Radio 1) + Adapter 1

Mode 2. CTX- EUT laying: 2.4GHz (Radio 2) + Adapter 1

Mode 3. CTX- EUT laying: 5GHz B4 (Radio 3) + Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. CTX-EUT Standing: 5GHz B1 (Radio 1) + Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 will follow this same test mode.

Mode 5. CTX- EUT laying: 5GHz B1 (Radio 1) + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission above 1GHz test:

The EUT for Radiated emission above 1GHz test was performed at laying and standing and the worst case was found from laying. So the measurement will follow this same test configuration.

Mode 1. CTX- EUT laying

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with WLAN 5GHz Band1 (radio1), 2.4GHz (radio2) and 5GHz Band 4 (radio3) function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit among WLAN 5GHz Band1 (radio1), 2.4GHz (radio2) and 5GHz Band 4 (radio3) function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB<For Non-Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM

For Test Site No: 03CH01-CB<For Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	M1340	E2K4965AGNM
WLAN ac Dongle	Netgear	A6200	PY31220200

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Power Parameters of IEEE 802.11b/g

Test Software Version	Mtool 2.0.2.1		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	97	100	95
IEEE 802.11g	89	102	83

Power Parameters of IEEE 802.11a

Test Software Version	Mtool 2.0.2.1		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	100	100	100

<For Beamforming Mode>

For 2.4GHz Band

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0/Nss1 VHT20	72	100	72

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0/Nss1 VHT40	60	71	58

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	98	98	98

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	98	98

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5775 MHz
MCS0/Nss1 VHT80	95

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode:


Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2.4G	802.11b	1.000	1.000	100.00	0.00	0.01
	802.11g	2.051	2.083	98.46	0.07	0.01
5G	802.11a	2.050	2.090	98.09	0.08	0.01

For beamforming mode:

Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2.4G	802.11ac MCS0/Nss1 VHT20	3.870	4.130	93.69	0.28	0.26
	802.11ac MCS0/Nss1 VHT40	3.667	4.391	83.50	0.78	0.27
5G	802.11ac MCS0/Nss1 VHT20	3.797	4.116	92.25	0.35	0.26
	802.11ac MCS0/Nss1 VHT40	3.650	4.225	86.39	0.64	0.27
	802.11ac MCS0/Nss1 VHT80	2.550	3.513	72.60	1.39	0.39

3.11. Test Configurations


3.11.1.AC Power Line Conduction Emissions Test Configuration

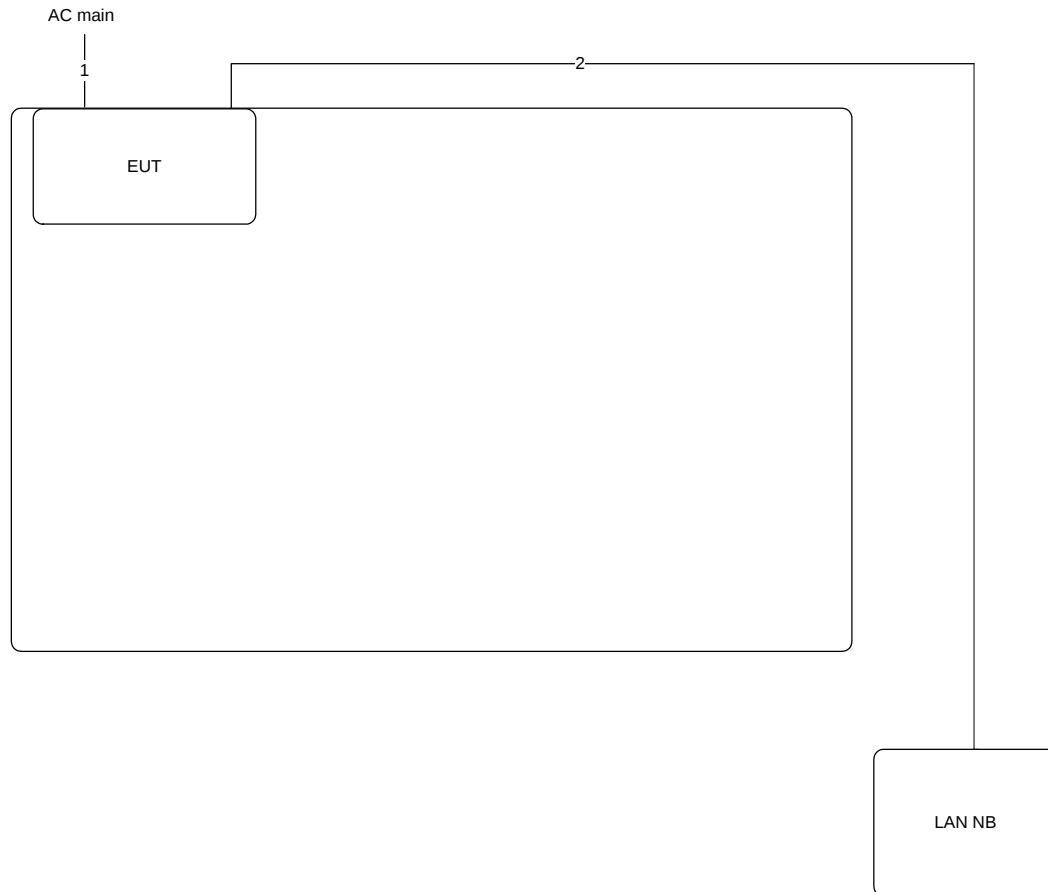

Item	Connection	Shielded	Length (m)
1	Power cable	No	3m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

<For Non-Beamforming Mode>

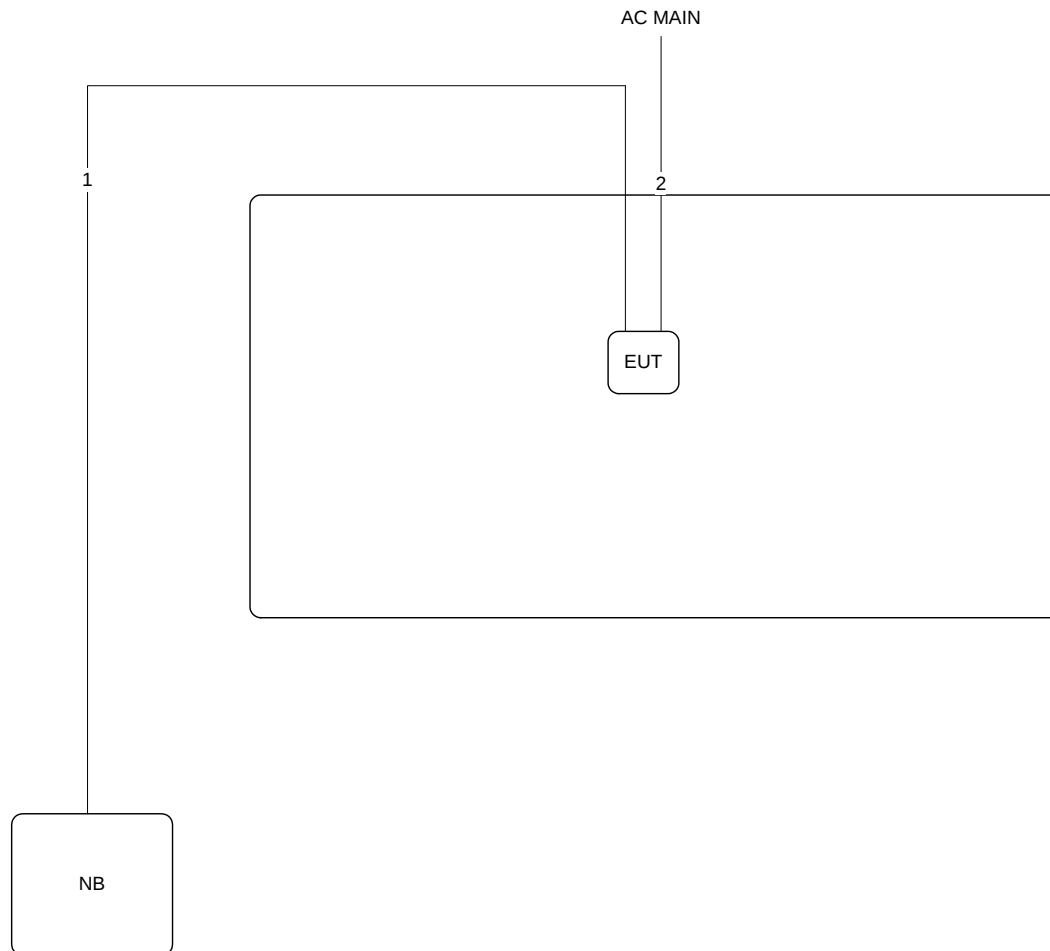

Item	Connection	Shielded	Length (m)
1	RJ-45 cable	No	10m
2	Power cable	No	3m

<For Beamforming Mode>

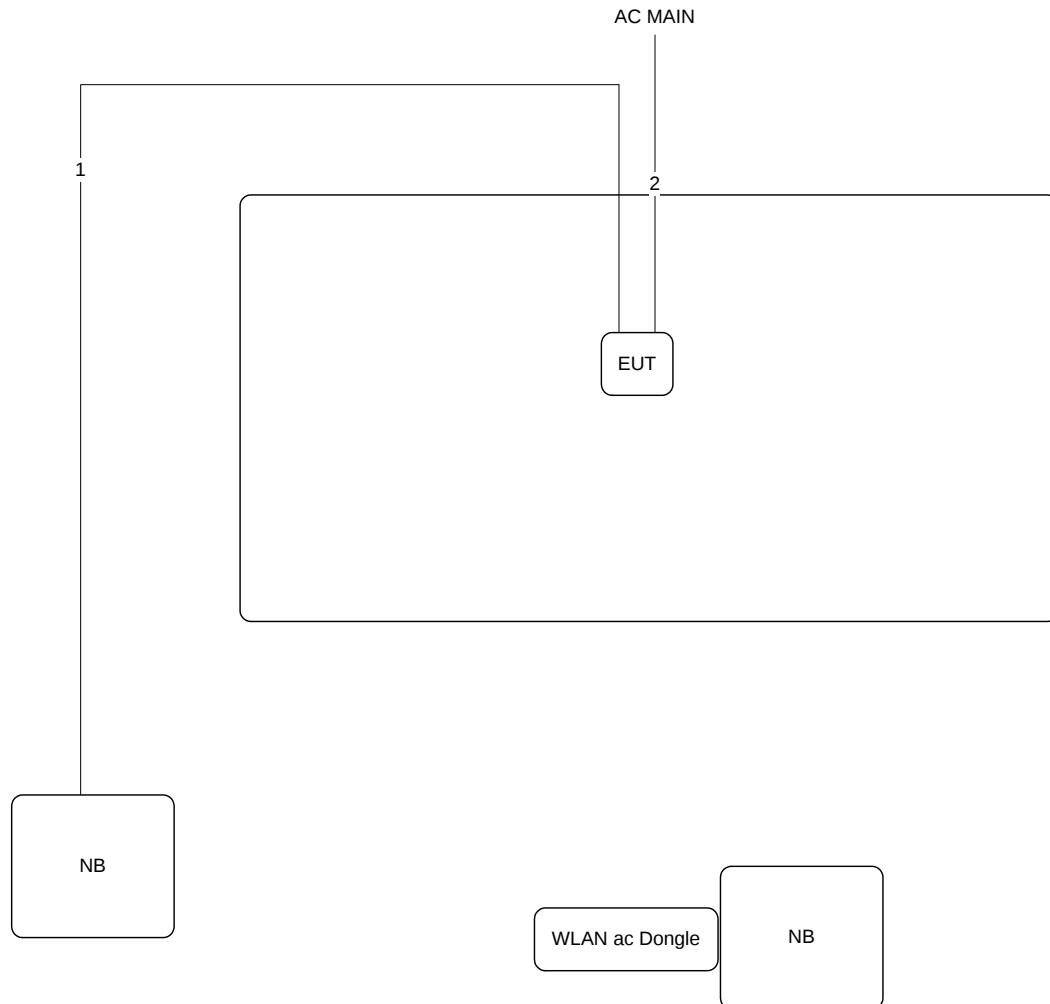

Item	Connection	Shielded	Length (m)
1	RJ-45 cable	No	10m
2	Power cable	No	3m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

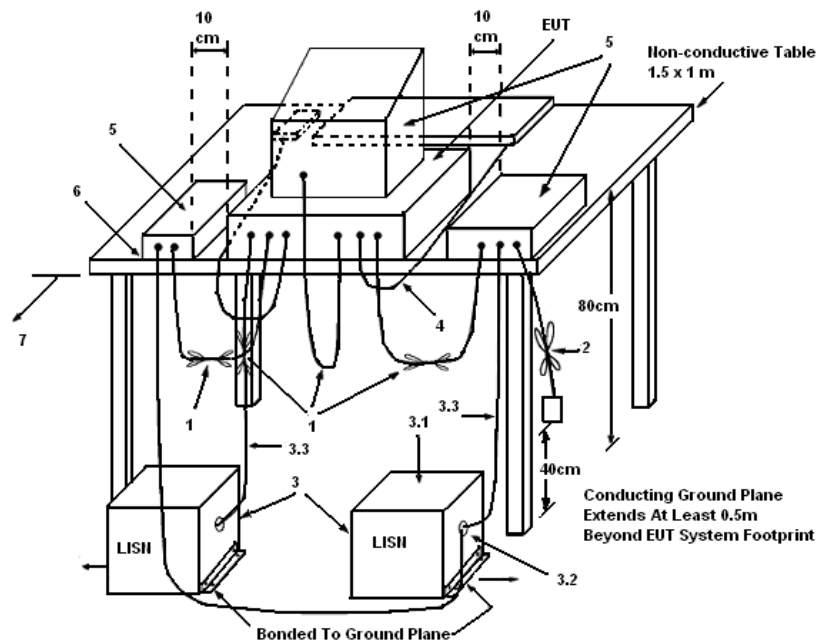

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Line
Configuration	CTX	Test Mode	Mode 1

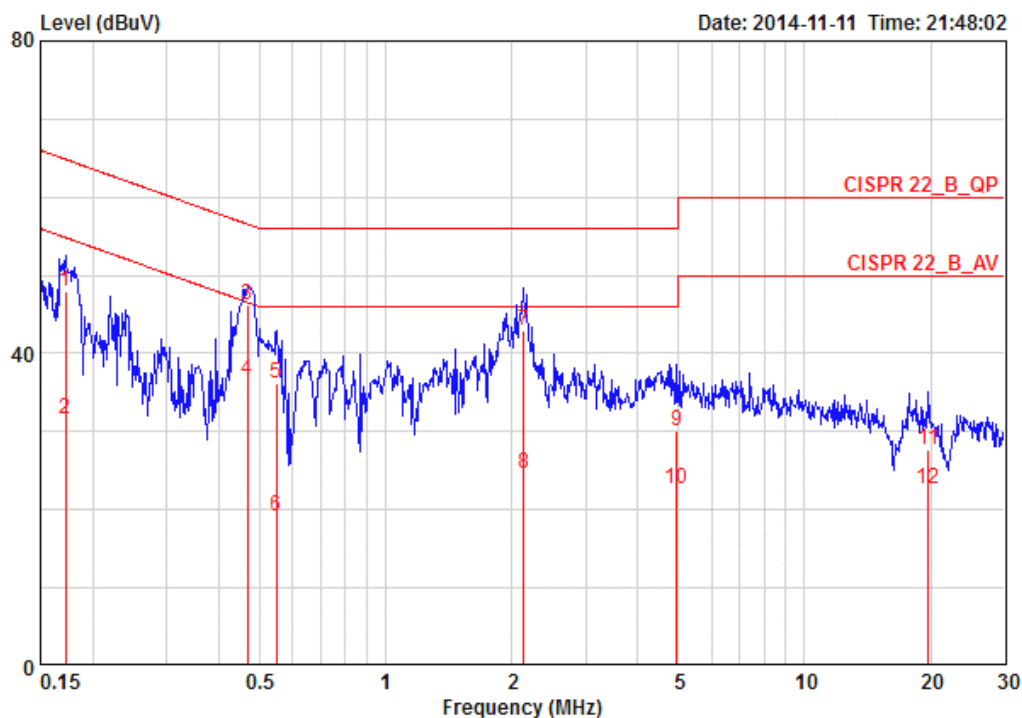

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.17215	48.06	-16.79	64.86	37.94	9.96	0.16	QP	LINE
2	0.17215	31.58	-23.27	54.86	21.46	9.96	0.16	AVERAGE	LINE
3	0.46861	46.12	-10.42	56.54	35.98	9.96	0.18	QP	LINE
4 @	0.46861	36.61	-9.93	46.54	26.47	9.96	0.18	AVERAGE	LINE
5	0.54934	36.14	-19.86	56.00	25.99	9.97	0.19	QP	LINE
6	0.54934	19.17	-26.83	46.00	9.02	9.97	0.19	AVERAGE	LINE
7	2.133	43.00	-13.00	56.00	32.71	10.03	0.25	QP	LINE
8	2.133	24.59	-21.41	46.00	14.30	10.03	0.25	AVERAGE	LINE
9	4.952	30.10	-25.90	56.00	19.68	10.10	0.32	QP	LINE
10	4.952	22.64	-23.36	46.00	12.22	10.10	0.32	AVERAGE	LINE
11	19.740	27.65	-32.35	60.00	16.73	10.42	0.51	QP	LINE
12	19.740	22.76	-27.24	50.00	11.84	10.42	0.51	AVERAGE	LINE

Temperature	25°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

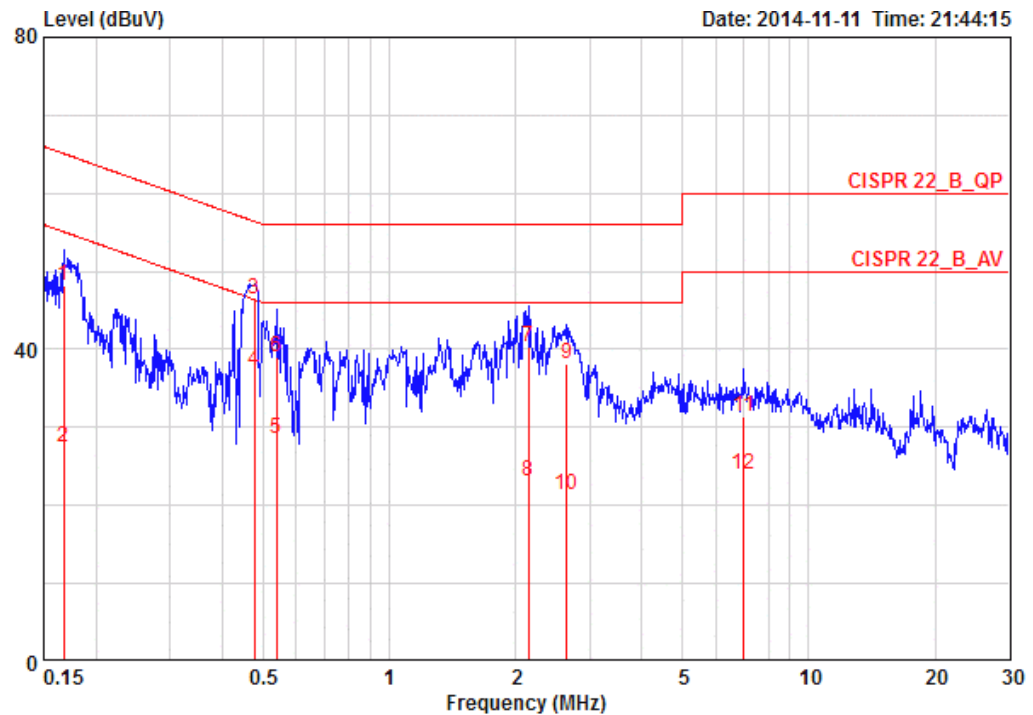

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.16765	48.26	-16.81	65.08	38.15	9.95	0.16	QP	NEUTRAL
2	0.16765	27.55	-27.52	55.08	17.44	9.95	0.16	AVERAGE	NEUTRAL
3 @	0.47612	46.49	-9.91	56.41	36.36	9.95	0.18	QP	NEUTRAL
4 @	0.47612	37.33	-9.07	46.41	27.20	9.95	0.18	AVERAGE	NEUTRAL
5	0.53782	28.49	-17.51	46.00	18.35	9.96	0.19	AVERAGE	NEUTRAL
6	0.53782	38.93	-17.07	56.00	28.79	9.96	0.19	QP	NEUTRAL
7	2.144	40.32	-15.68	56.00	30.05	10.01	0.25	QP	NEUTRAL
8	2.144	23.17	-22.83	46.00	12.90	10.01	0.25	AVERAGE	NEUTRAL
9	2.650	38.07	-17.93	56.00	27.77	10.03	0.27	QP	NEUTRAL
10	2.650	21.35	-24.65	46.00	11.05	10.03	0.27	AVERAGE	NEUTRAL
11	6.988	31.43	-28.57	60.00	20.94	10.14	0.35	QP	NEUTRAL
12	6.988	23.92	-26.08	50.00	13.43	10.14	0.35	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

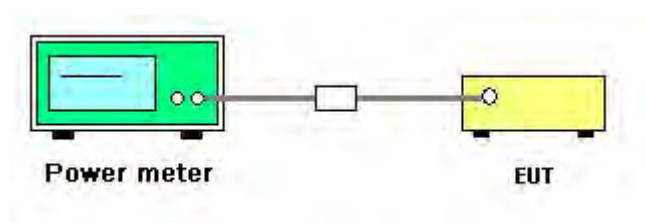

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11a/b/g
Test Date	Oct. 17, 2014		

<For Non-Beamforming Mode>

Configuration IEEE 802.11b / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	24.65	24.28	23.68	28.99	30.00	Complies
6	2437 MHz	25.31	24.91	24.42	29.67	30.00	Complies
11	2462 MHz	23.94	23.56	23.02	28.29	30.00	Complies

Configuration IEEE 802.11g / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	22.13	21.76	21.35	26.53	30.00	Complies
6	2437 MHz	25.32	24.98	24.47	29.71	30.00	Complies
11	2462 MHz	20.63	20.33	19.91	25.07	30.00	Complies

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	25.21	24.76	24.89	29.73	30.00	Complies
157	5785 MHz	25.37	24.71	24.93	29.78	30.00	Complies
165	5825 MHz	25.25	24.67	24.85	29.70	30.00	Complies

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac
Test Date	Oct. 17, 2014		

<For Beamforming Mode>

For 2.4GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	18.15	17.98	17.42	22.63	29.73	Complies
6	2437 MHz	24.93	24.45	24.01	29.25	29.73	Complies
11	2462 MHz	18.07	17.85	17.48	22.58	29.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, so limit = 30-(6.27-6)=29.73dBm

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
3	2422 MHz	15.81	15.62	15.17	20.31	29.73	Complies
6	2437 MHz	18.52	18.03	17.45	22.79	29.73	Complies
9	2452 MHz	15.43	14.91	14.58	19.76	29.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, so limit = 30-(6.27-6)=29.73dBm

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	24.76	24.22	24.39	29.23	29.23	Complies
157	5785 MHz	24.72	24.19	24.41	29.22	29.23	Complies
165	5825 MHz	24.75	24.17	24.35	29.20	29.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ss}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77\text{dBi} > 6\text{dBi}$, so limit=30-(6.77-6)=29.23dBm

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	24.67	24.26	24.34	29.20	29.23	Complies
159	5795 MHz	24.69	24.23	24.38	29.21	29.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ss}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77\text{dBi} > 6\text{dBi}$, so limit=30-(6.77-6)=29.23dBm

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	23.66	23.15	23.19	28.11	29.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ss}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77\text{dBi} > 6\text{dBi}$, so limit=30-(6.77-6)=29.23dBm

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

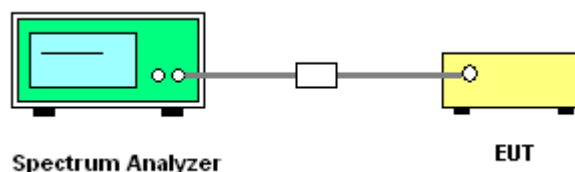

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11a/b/g

<For Non-Beamforming Mode>

Configuration IEEE 802.11b / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	2.64	1.50	1.21	6.60	7.73	Complies
6	2437 MHz	2.62	1.85	1.27	6.72	7.73	Complies
11	2462 MHz	1.87	-0.17	0.16	5.49	7.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_A} \left\{ \sum_{k=1}^{N_{EQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, so limit = 8 - (6.27 - 6) = 7.73dBm/3kHz

Configuration IEEE 802.11g / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	-3.80	-3.94	-3.81	0.92	7.73	Complies
6	2437 MHz	0.55	0.69	-0.41	5.07	7.73	Complies
11	2462 MHz	-6.05	-5.05	-5.43	-0.72	7.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_A} \left\{ \sum_{k=1}^{N_{EQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, So Limit = 8 - (6.27 - 6) = 7.73dBm/3kHz

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	0.22	-1.01	0.64	4.78	7.23	Complies
157	5785 MHz	0.30	-0.26	0.41	4.93	7.23	Complies
165	5825 MHz	0.74	-0.24	-0.69	4.75	7.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_A} \left\{ \sum_{k=1}^{N_{EQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77\text{dBi} > 6\text{dBi}$, So Limit = 8 - (6.77 - 6) = 7.23dBm/3kHz

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac

<For Beamforming Mode>

For 2.4GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
1	2412 MHz	-7.95	-7.08	-8.31	-2.98	7.73	Complies
6	2437 MHz	-0.39	-1.53	-1.64	3.62	7.73	Complies
11	2462 MHz	-0.07	-1.97	-2.77	3.32	7.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ss}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, so limit=8-(6.27-6)=7.73dBm/3kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 4	Chain 5	Chain 6	Total		
3	2422 MHz	-13.53	-10.94	-13.71	-7.76	7.73	Complies
6	2437 MHz	-9.91	-11.46	-10.96	-5.96	7.73	Complies
9	2452 MHz	-13.85	-13.64	-14.23	-9.13	7.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ss}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.27\text{dBi} > 6\text{dBi}$, so limit=8-(6.27-6)=7.73dBm/3kHz

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
149	5745 MHz	-1.33	-0.83	-1.80	3.47	7.23	Complies
157	5785 MHz	-0.99	0.26	-0.66	4.34	7.23	Complies
165	5825 MHz	-0.91	1.39	-1.17	4.70	7.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{SC}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, so limit = 8 - (6.77 - 6) = 7.23 dBm/3kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
151	5755 MHz	-4.43	-3.61	-4.10	0.74	7.23	Complies
159	5795 MHz	-2.45	-3.70	-3.74	1.52	7.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{SC}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, so limit = 8 - (6.77 - 6) = 7.23 dBm/3kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
155	5775 MHz	-7.58	-5.47	-7.56	-1.98	7.23	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{SC}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.77 \text{dBi} > 6 \text{dBi}$, so limit = 8 - (6.77 - 6) = 7.23 dBm/3kHz

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


<For Non-Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4

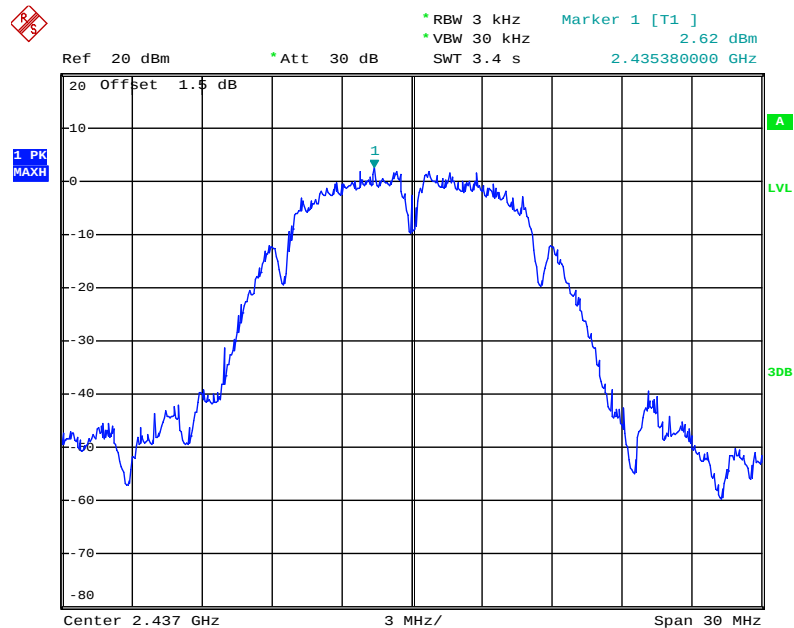


Date: 17.OCT.2014 16:55:03

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 5

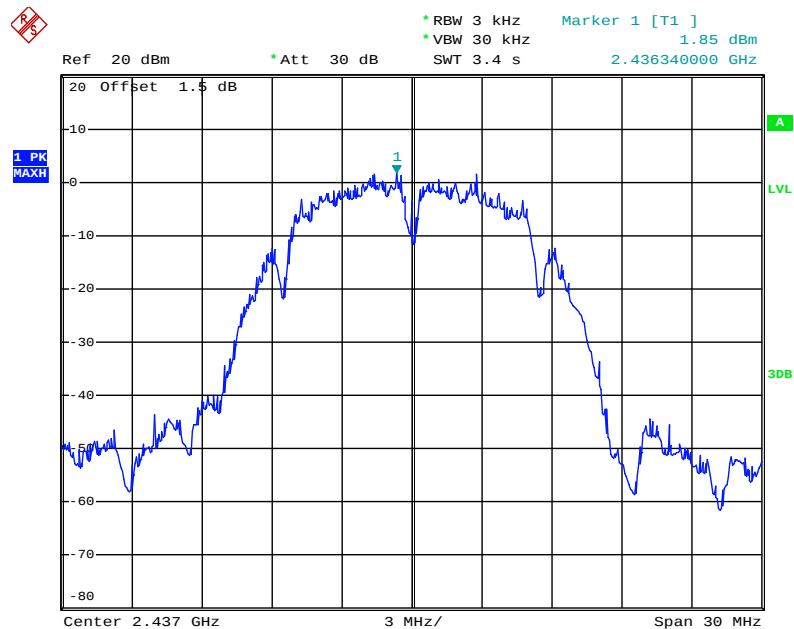


Date: 17.OCT.2014 16:54:23

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 6

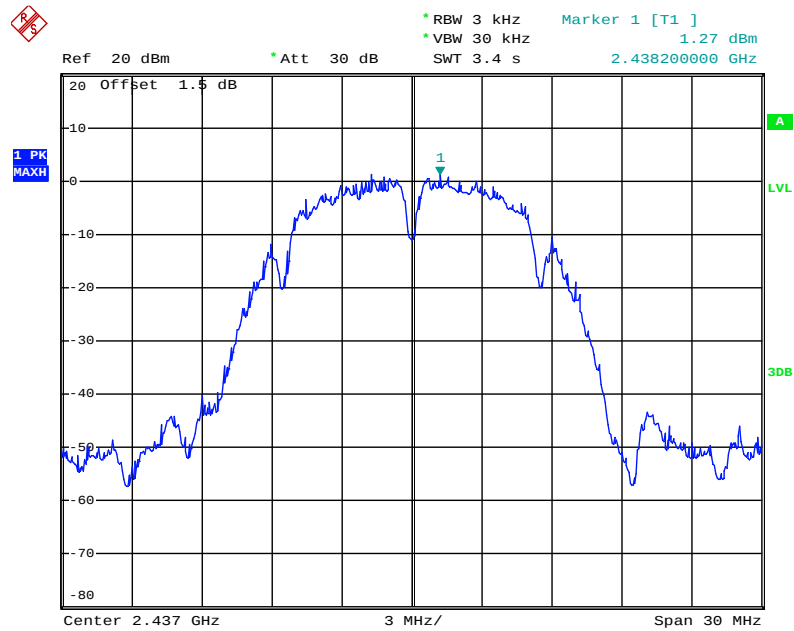


Date: 17.OCT.2014 16:53:27

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

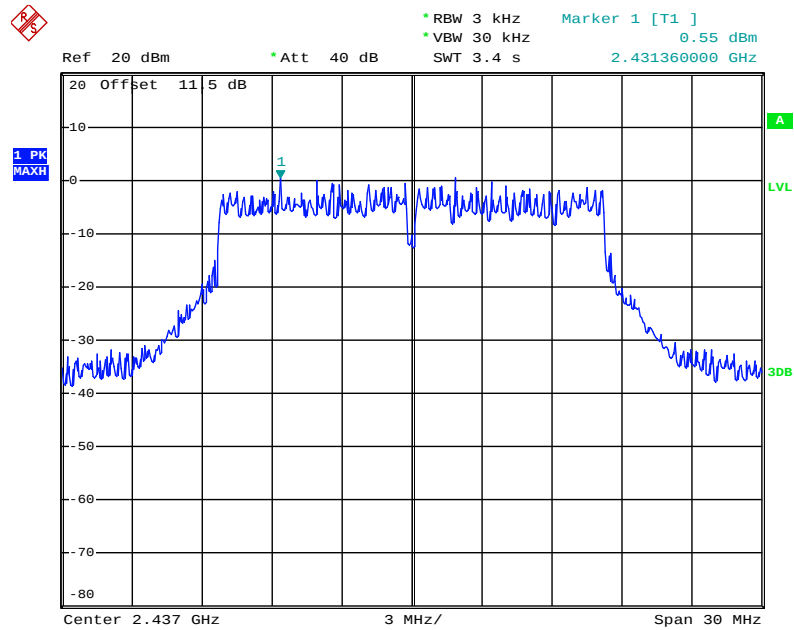


Date: 17.OCT.2014 17:03:45

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 5

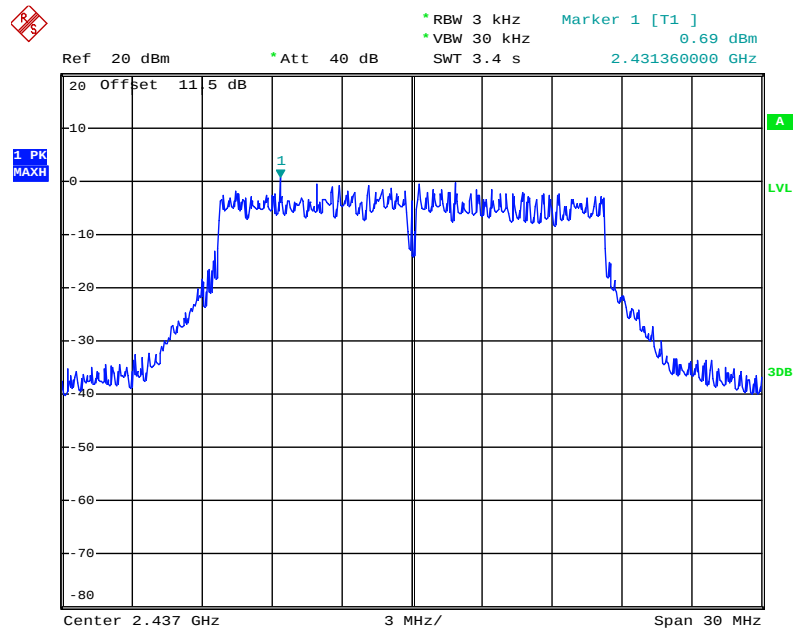


Date: 17.OCT.2014 17:04:37

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 6

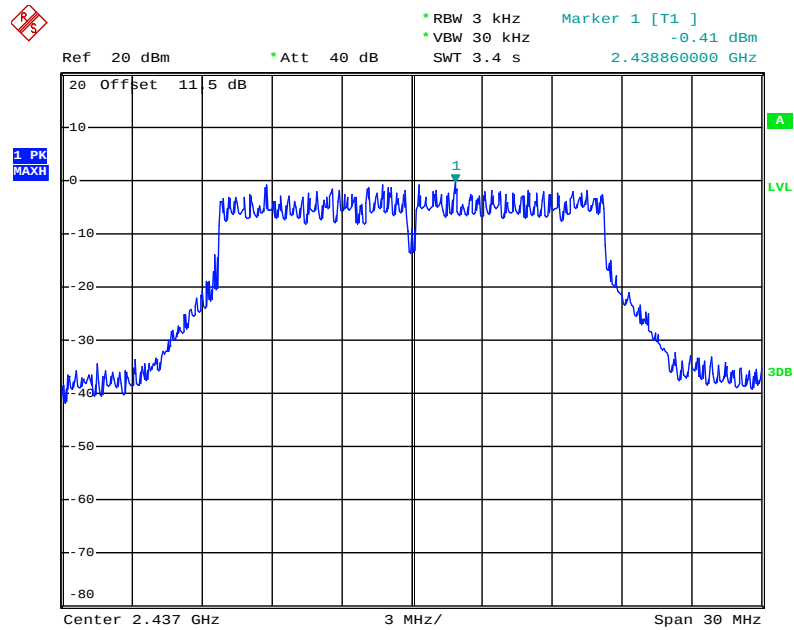


Date: 17.OCT.2014 17:05:36

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1

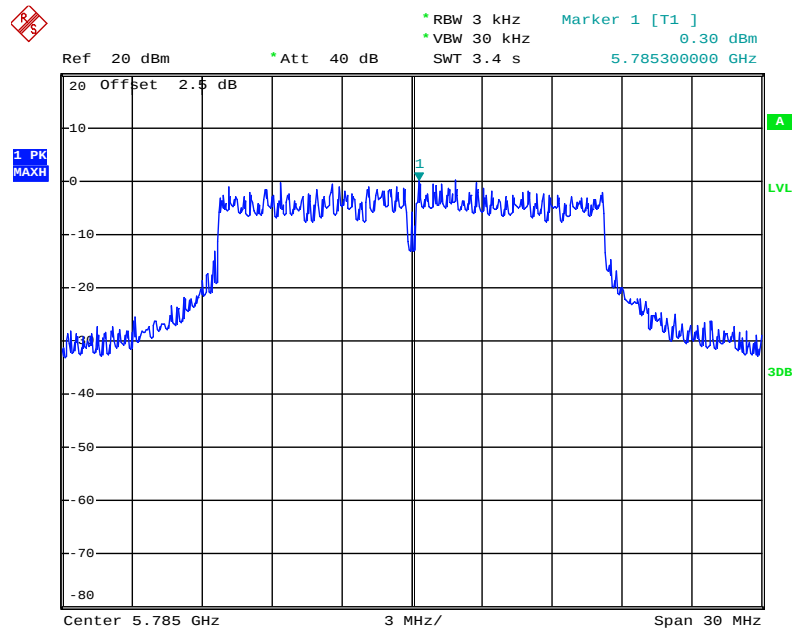


Date: 17.OCT.2014 16:26:12

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 2

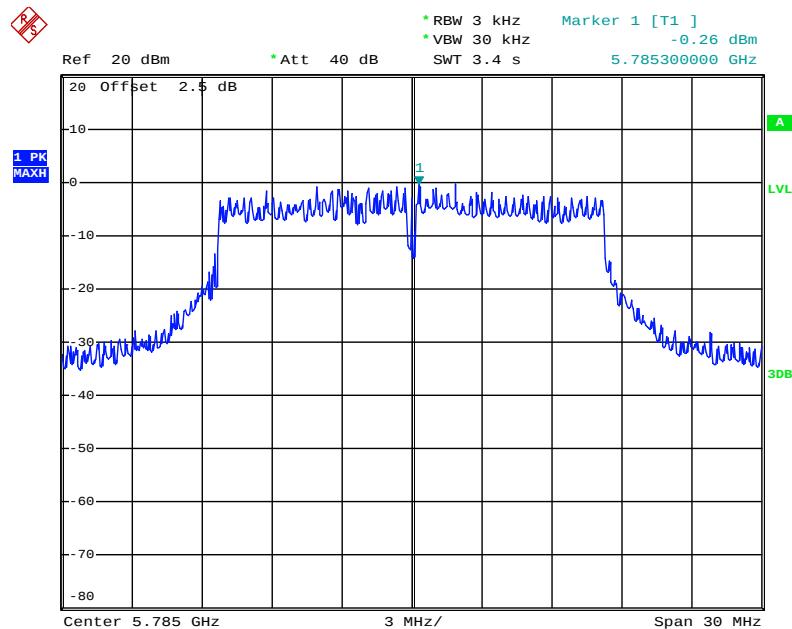

Date: 17.OCT.2014 16:27:30


Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 3

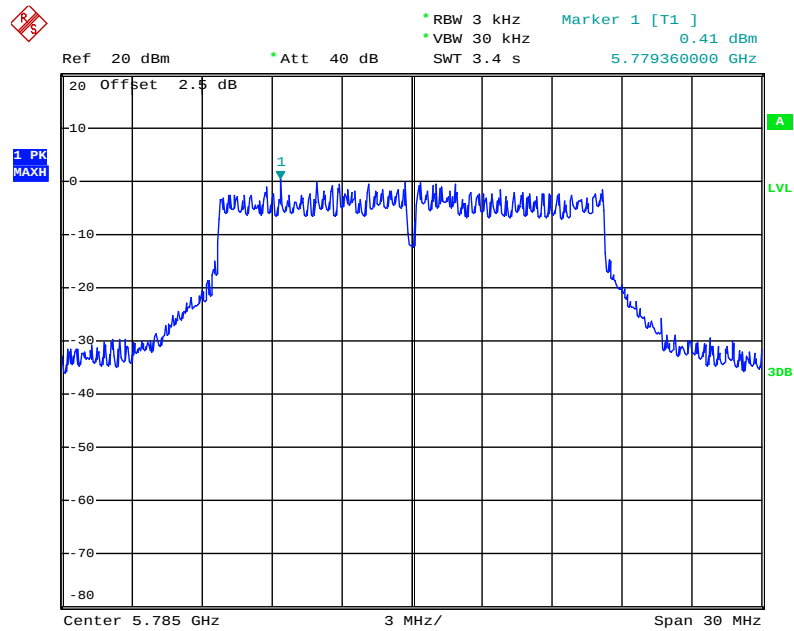

Date: 17.OCT.2014 16:28:55


<For Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

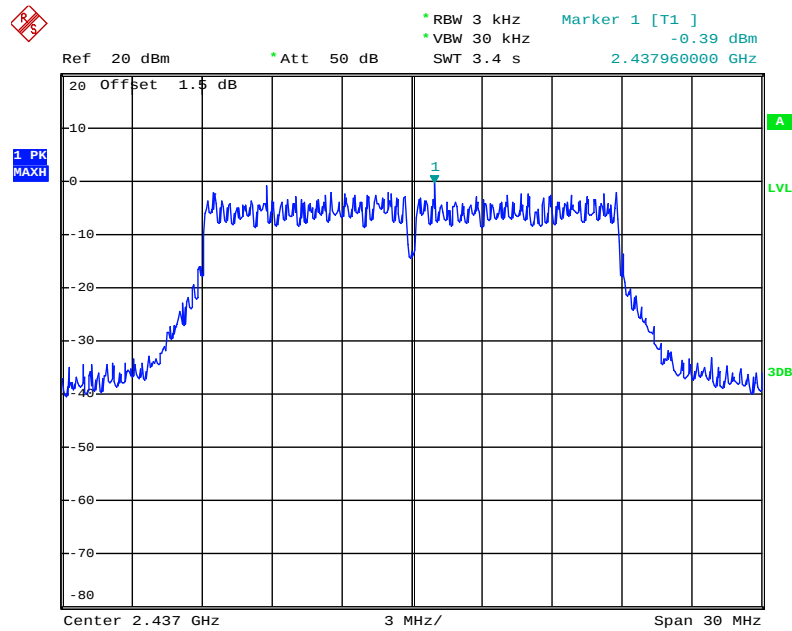


Date: 17.OCT.2014 17:20:16

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 5

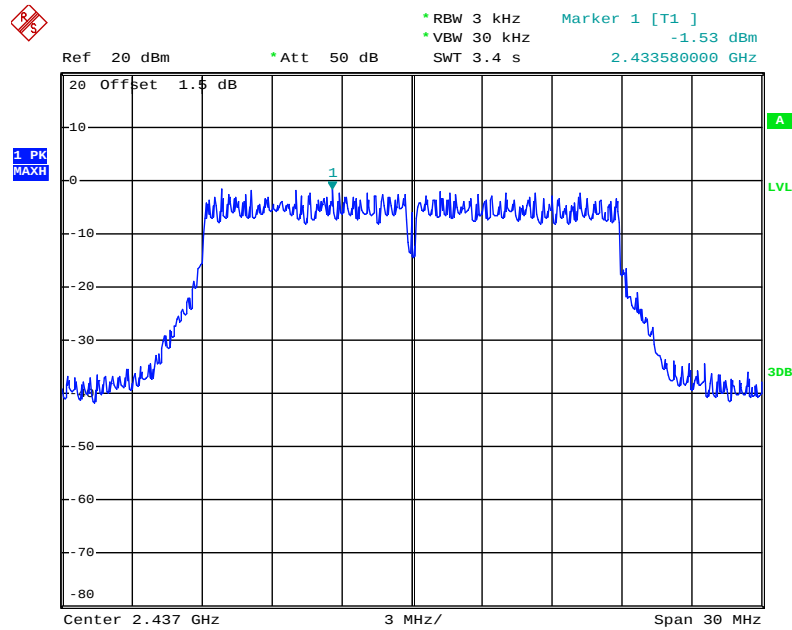


Date: 17.OCT.2014 17:19:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 6

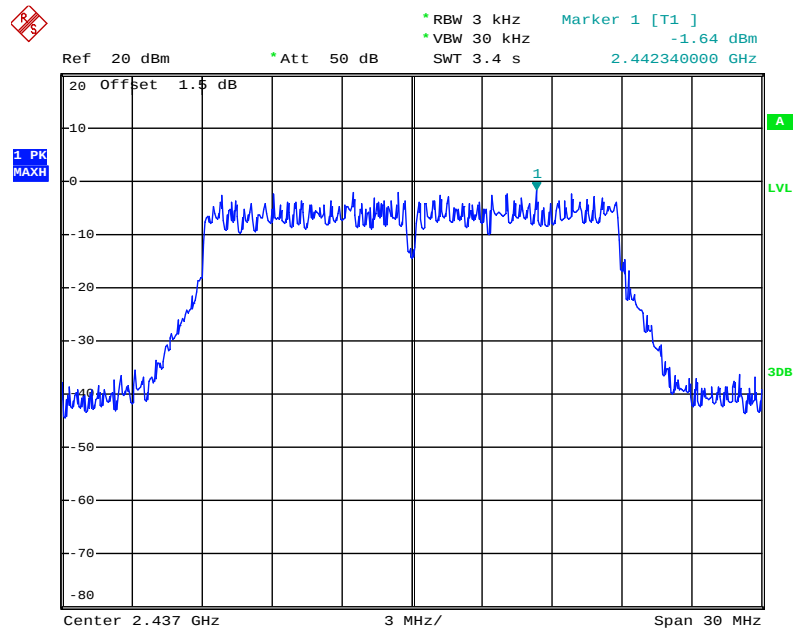


Date: 17.OCT.2014 17:18:11

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

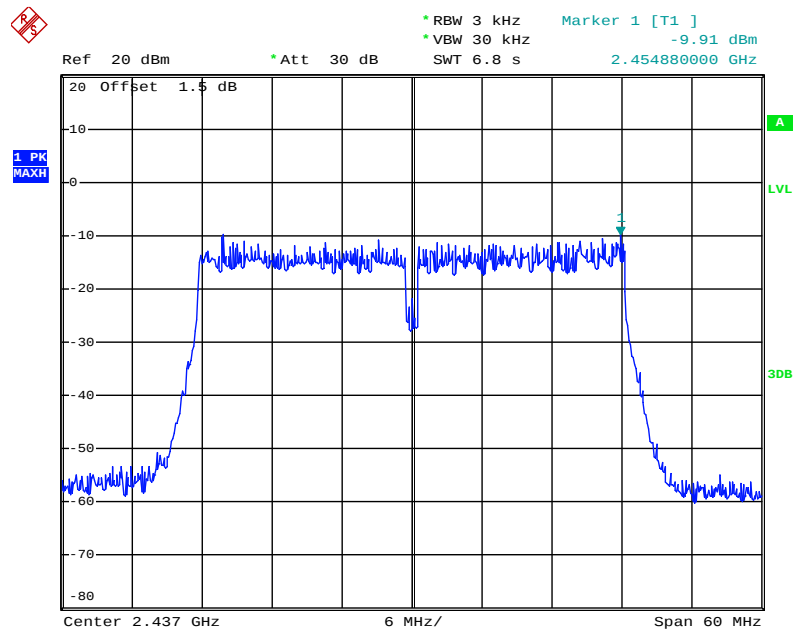


Date: 17.OCT.2014 17:28:33

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 5

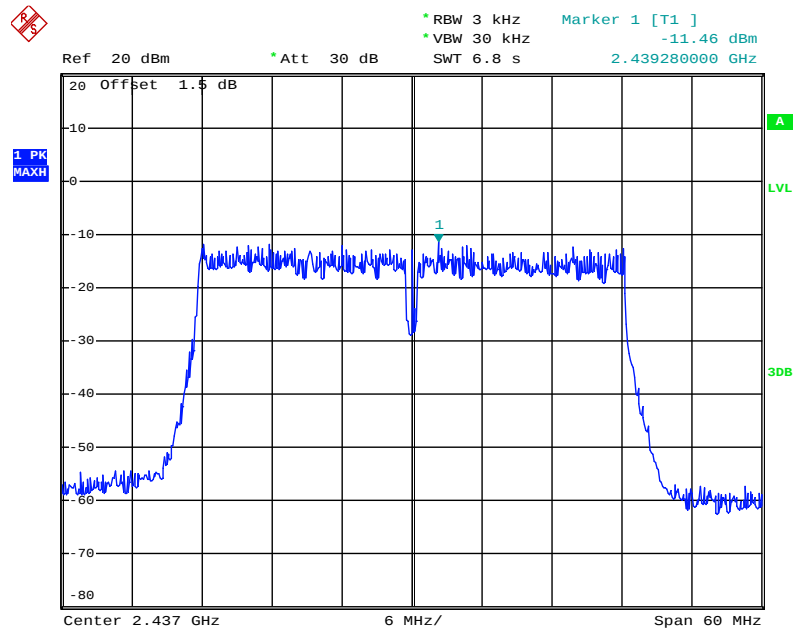


Date: 17.OCT.2014 17:29:36

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 6

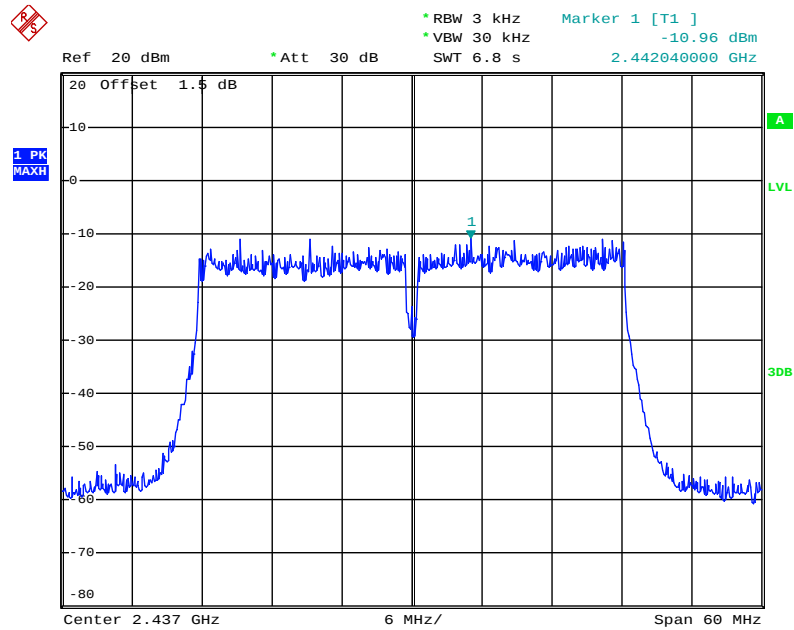


Date: 17.OCT.2014 17:30:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 1

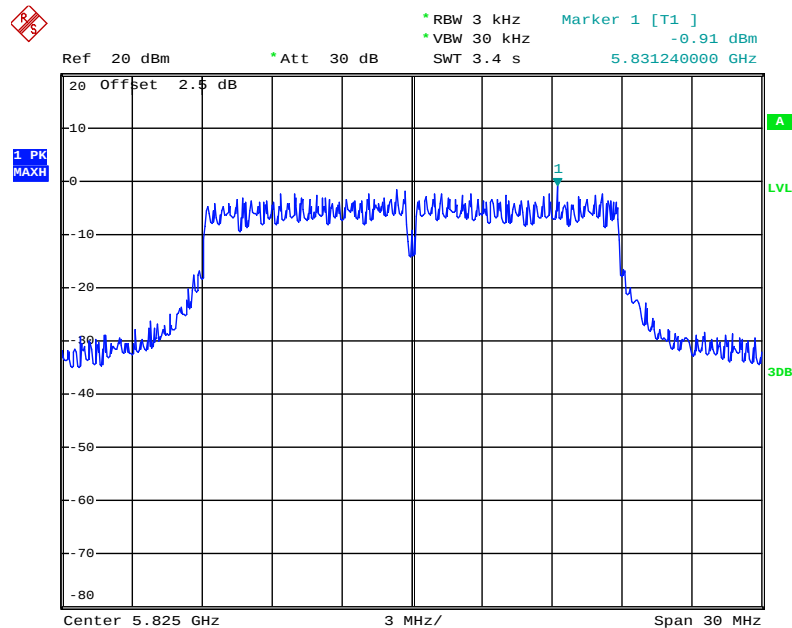


Date: 17.OCT.2014 16:17:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 2

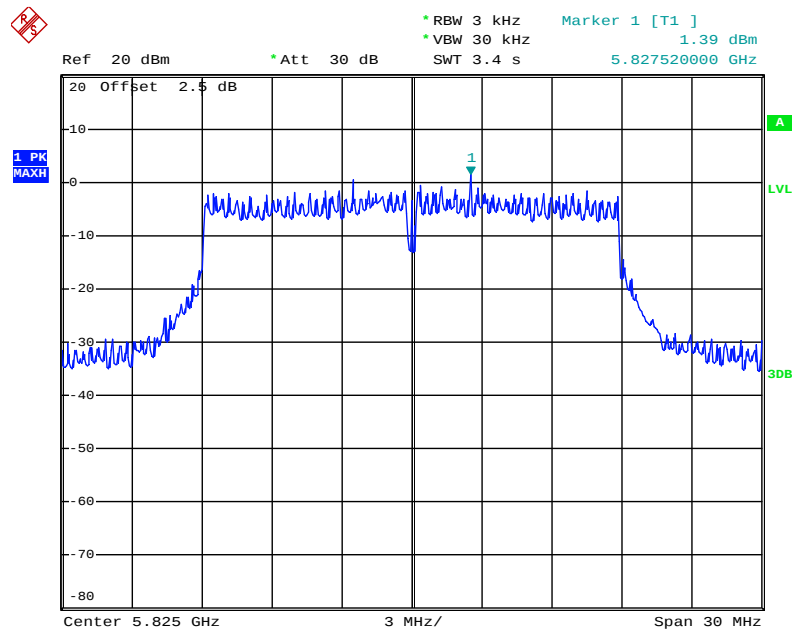


Date: 17.OCT.2014 16:19:02

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 3

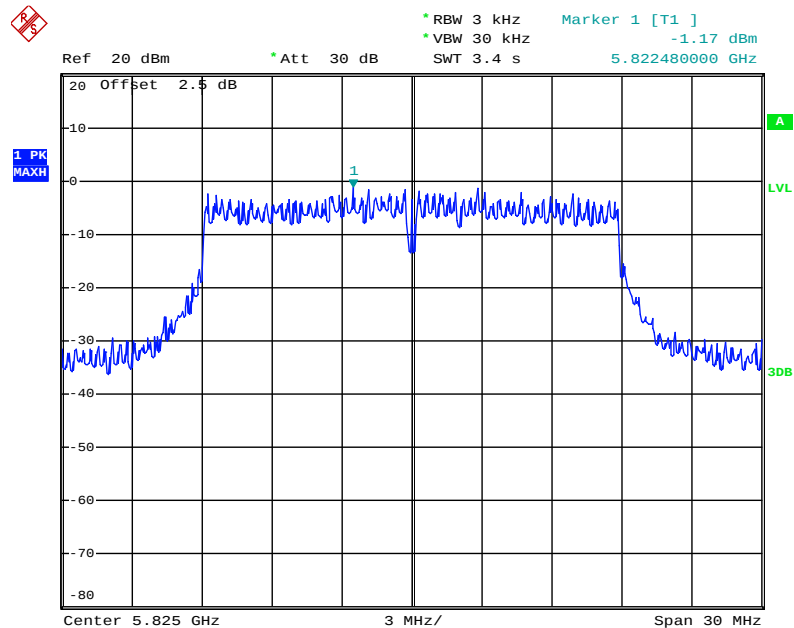


Date: 17.OCT.2014 16:18:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 1

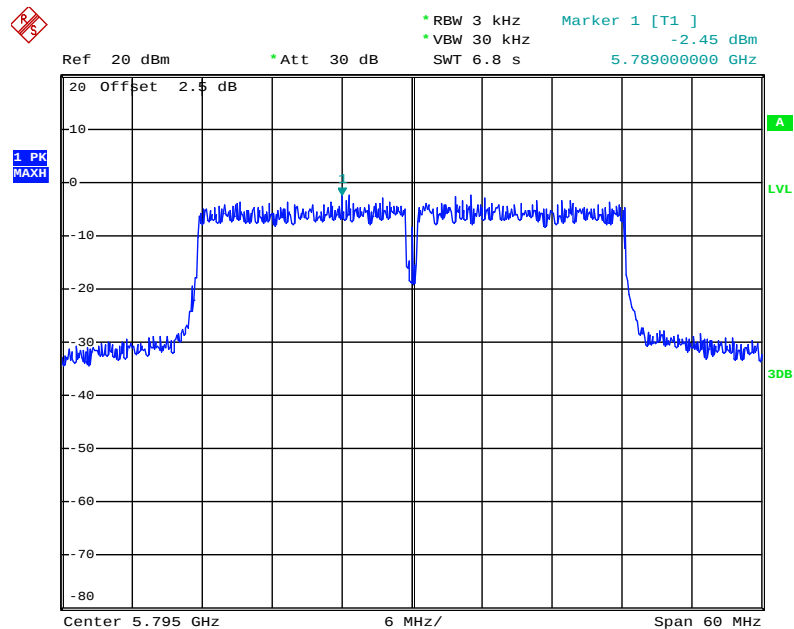


Date: 17.OCT.2014 16:09:27

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 2

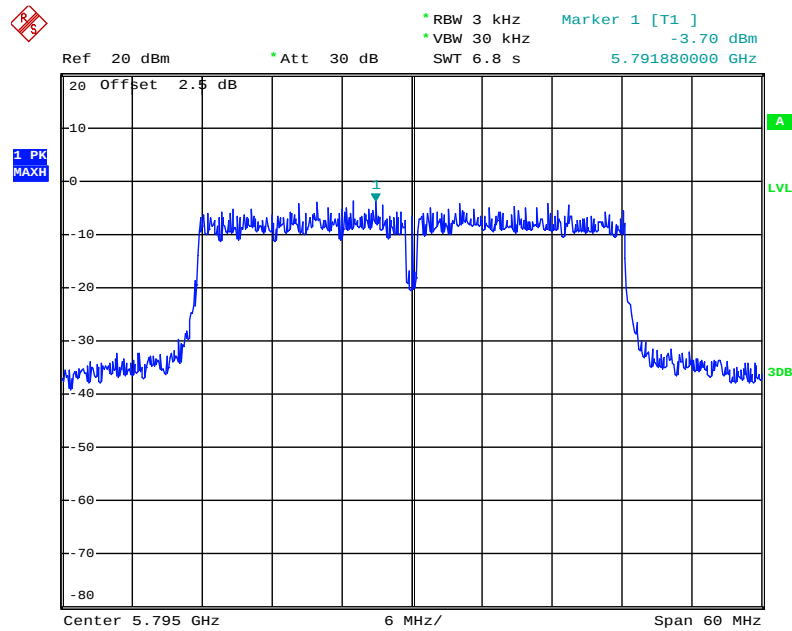


Date: 17.OCT.2014 15:57:43

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 3

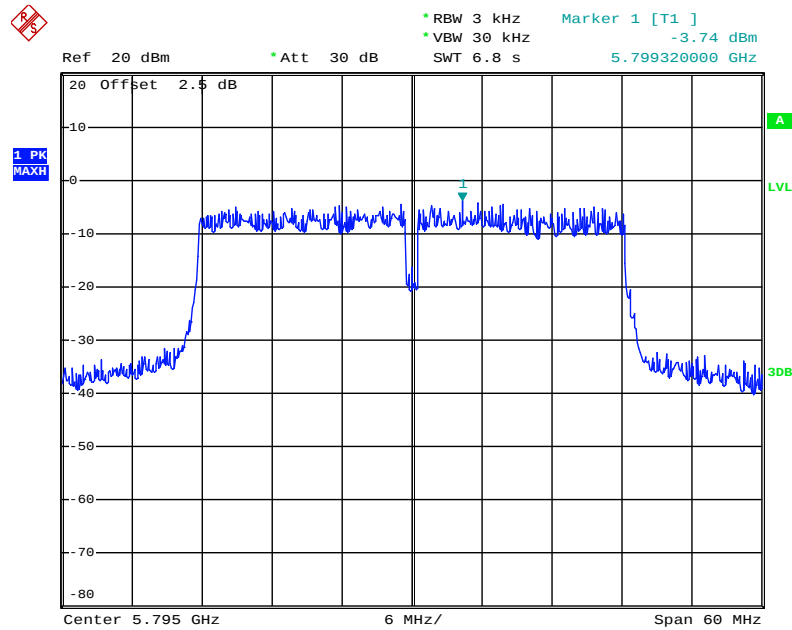


Date: 17.OCT.2014 15:56:56

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

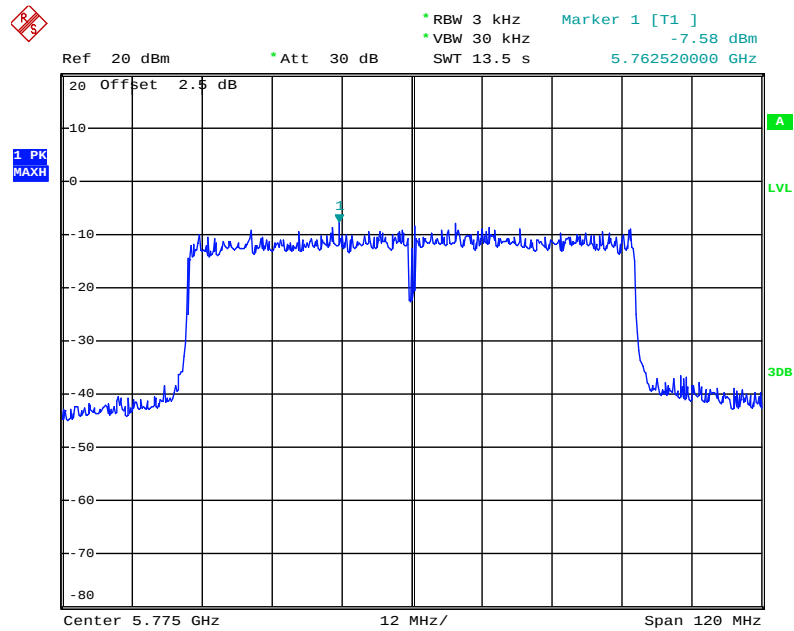


Date: 17.OCT.2014 15:50:26

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

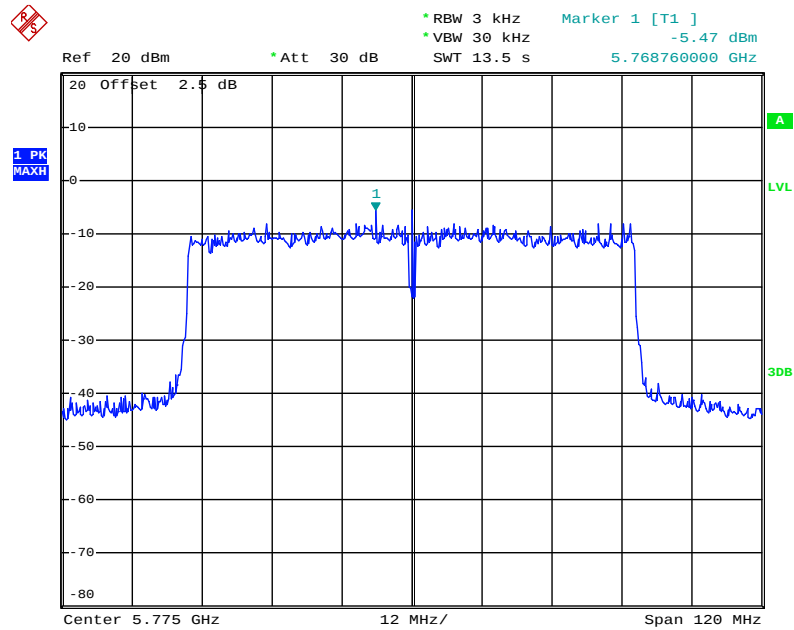

Date: 17.OCT.2014 15:47:46

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 3

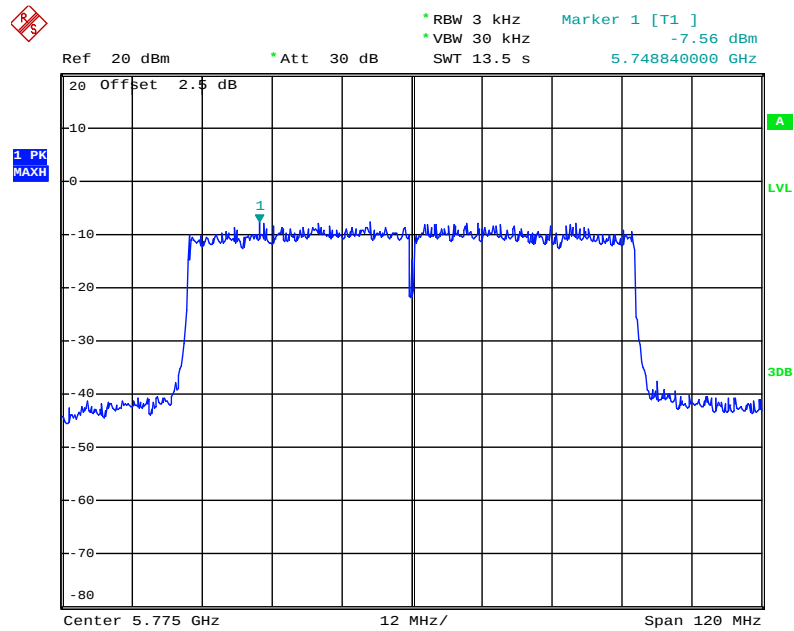

Date: 17.OCT.2014 15:49:19

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11a/b/g

<For Non-Beamforming Mode>

Configuration IEEE 802.11b / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.56	11.28	500	Complies
6	2437 MHz	9.04	11.68	500	Complies
11	2462 MHz	8.08	11.60	500	Complies

Configuration IEEE 802.11g / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.24	16.56	500	Complies
6	2437 MHz	16.32	16.64	500	Complies
11	2462 MHz	12.96	17.36	500	Complies

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	14.56	16.88	500	Complies
157	5785 MHz	11.76	16.88	500	Complies
165	5825 MHz	17.48	17.12	500	Complies

Temperature	25°C	Humidity	67%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac

<For Beamforming Mode>

For 2.4GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.04	17.36	500	Complies
6	2437 MHz	13.28	17.44	500	Complies
11	2462 MHz	12.96	17.36	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	31.68	35.68	500	Complies
6	2437 MHz	32.00	36.16	500	Complies
9	2452 MHz	33.28	35.84	500	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.40	17.84	500	Complies
157	5785 MHz	17.28	17.84	500	Complies
165	5825 MHz	14.48	17.84	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	33.60	36.48	500	Complies
159	5795 MHz	34.56	36.48	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	70.40	76.48	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


<For Non-Beamforming Mode>

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 4 + Chain 5 + Chain 6

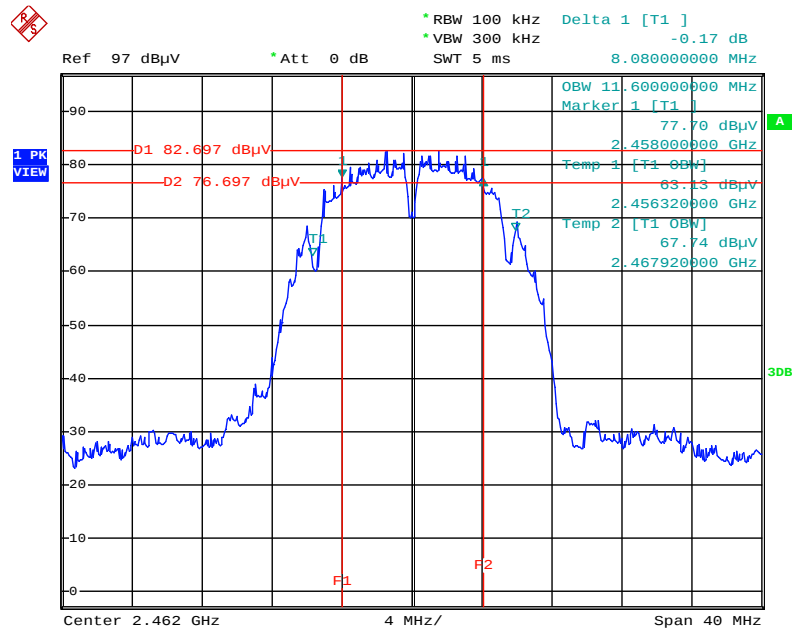


Date: 17.OCT.2014 19:09:50

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 4 + Chain 5 + Chain 6

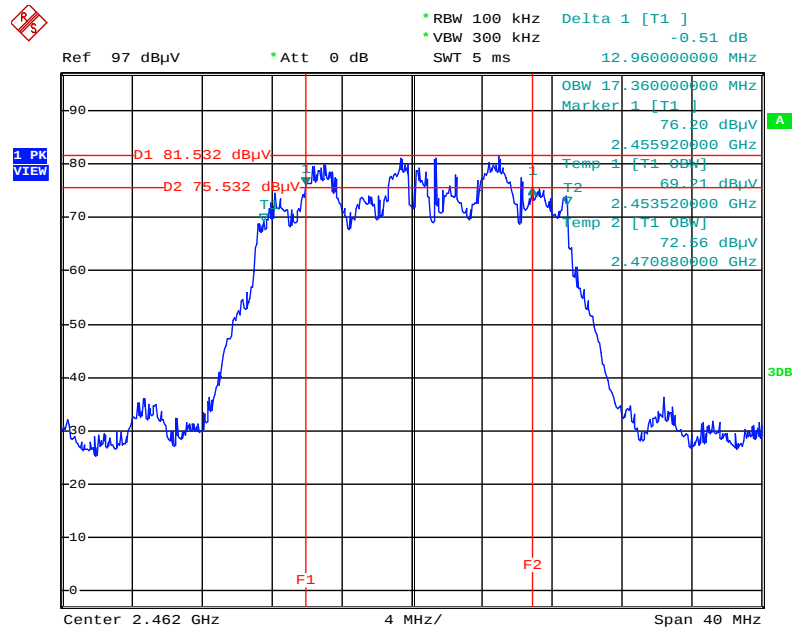

Date: 17.OCT.2014 17:43:13


6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1 + Chain 2 + Chain 3

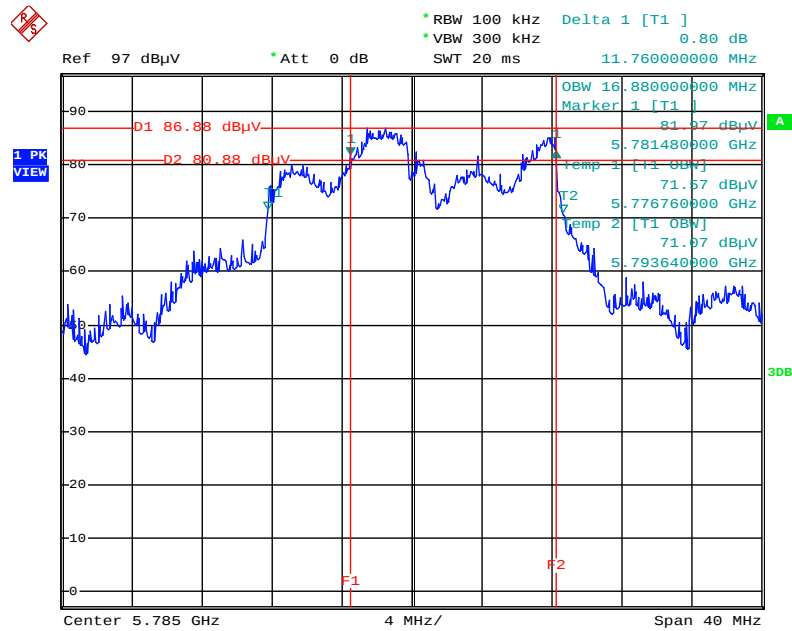

Date: 17.OCT.2014 15:32:54


<For Beamforming Mode>

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 4 + Chain 5
+ Chain 6

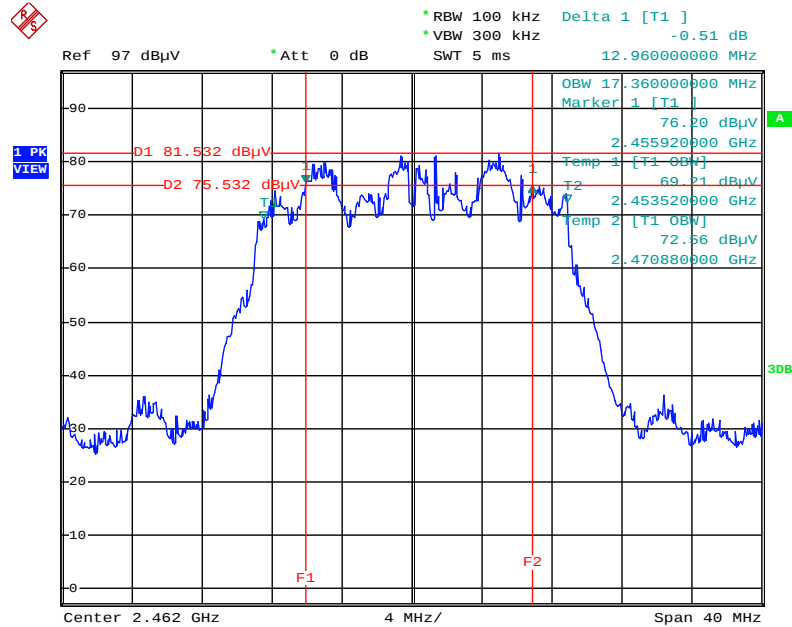


Date: 17.OCT.2014 17:41:56

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 4 + Chain 5
+ Chain 6

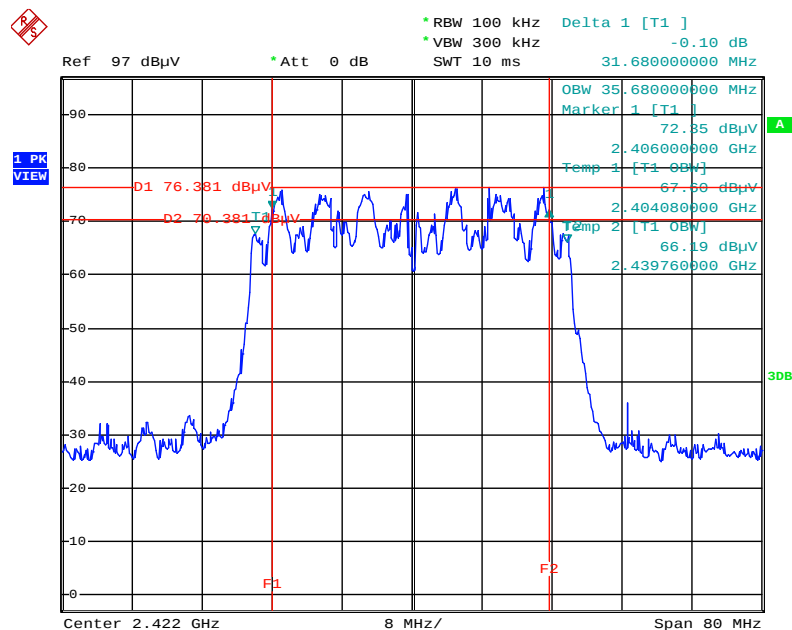


Date: 17.OCT.2014 17:38:25

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 1 + Chain 2 + Chain 3

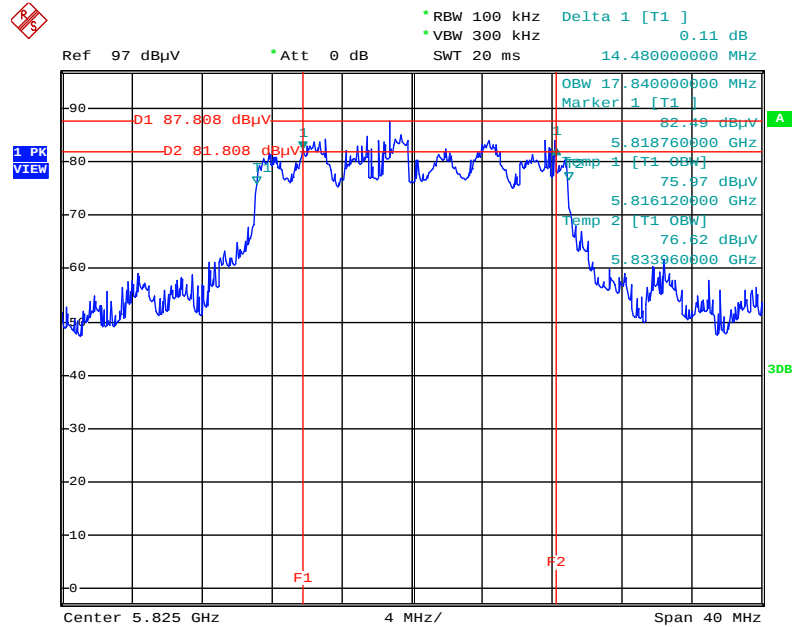


Date: 17.OCT.2014 15:36:51

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755MHz / Chain 1 + Chain 2 + Chain 3

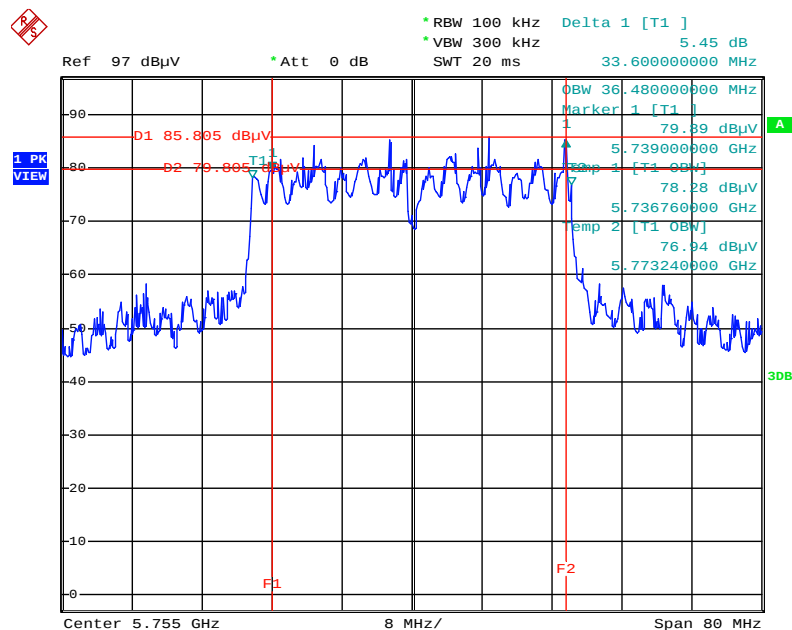

Date: 17.OCT.2014 15:40:38

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3

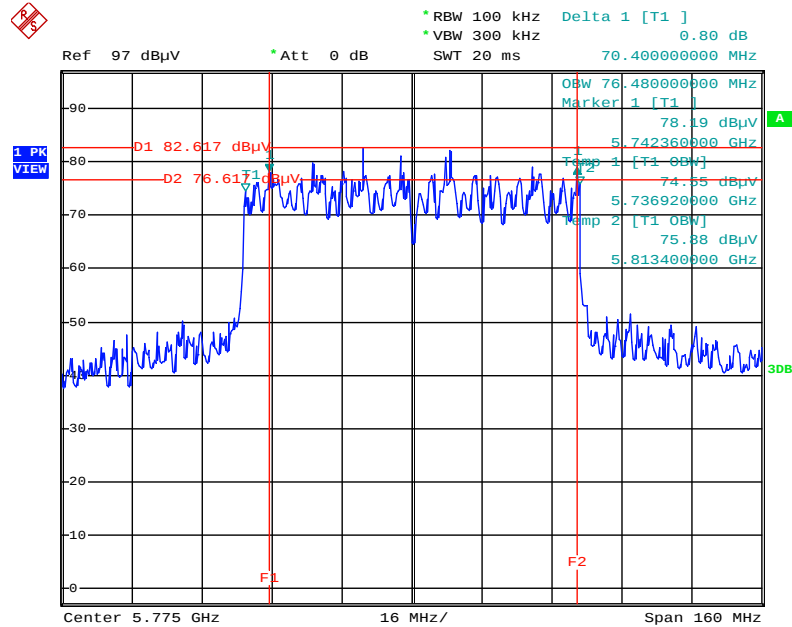

Date: 17.OCT.2014 15:43:12

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

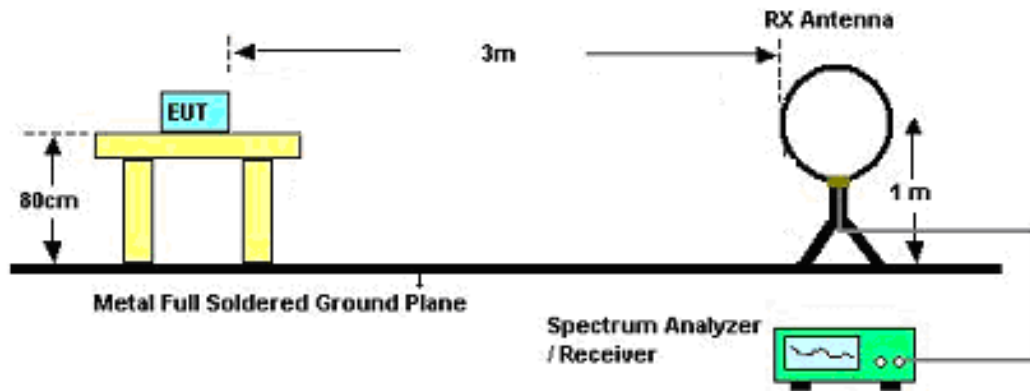

For Radiated Emissions: 30MHz~1GHz

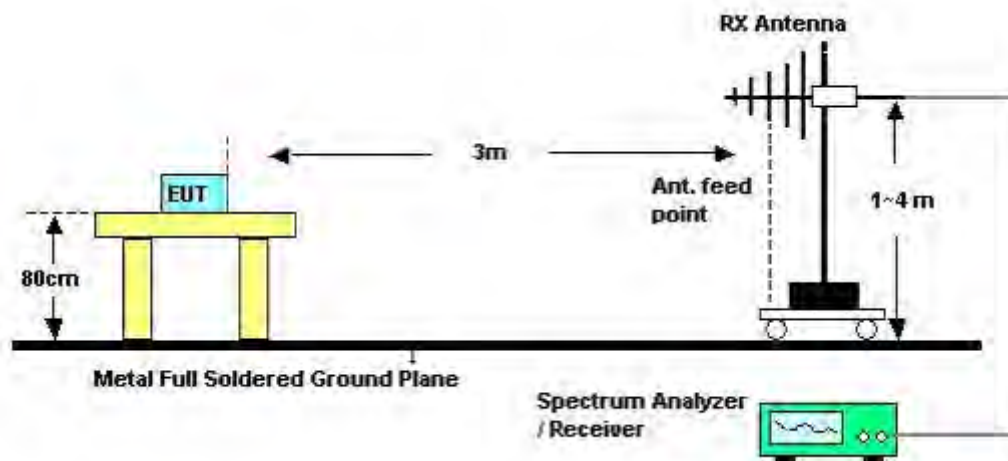

For Radiated Emissions: Above 1GHz

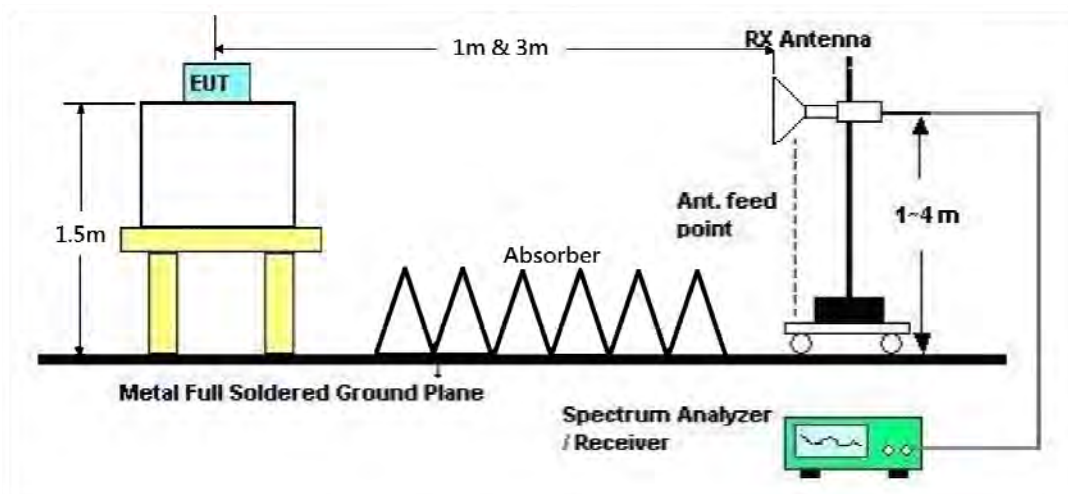

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	CTX
Test Date	Oct. 22, 2014	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	CTX
Test Mode	Mode 1		

Horizontal

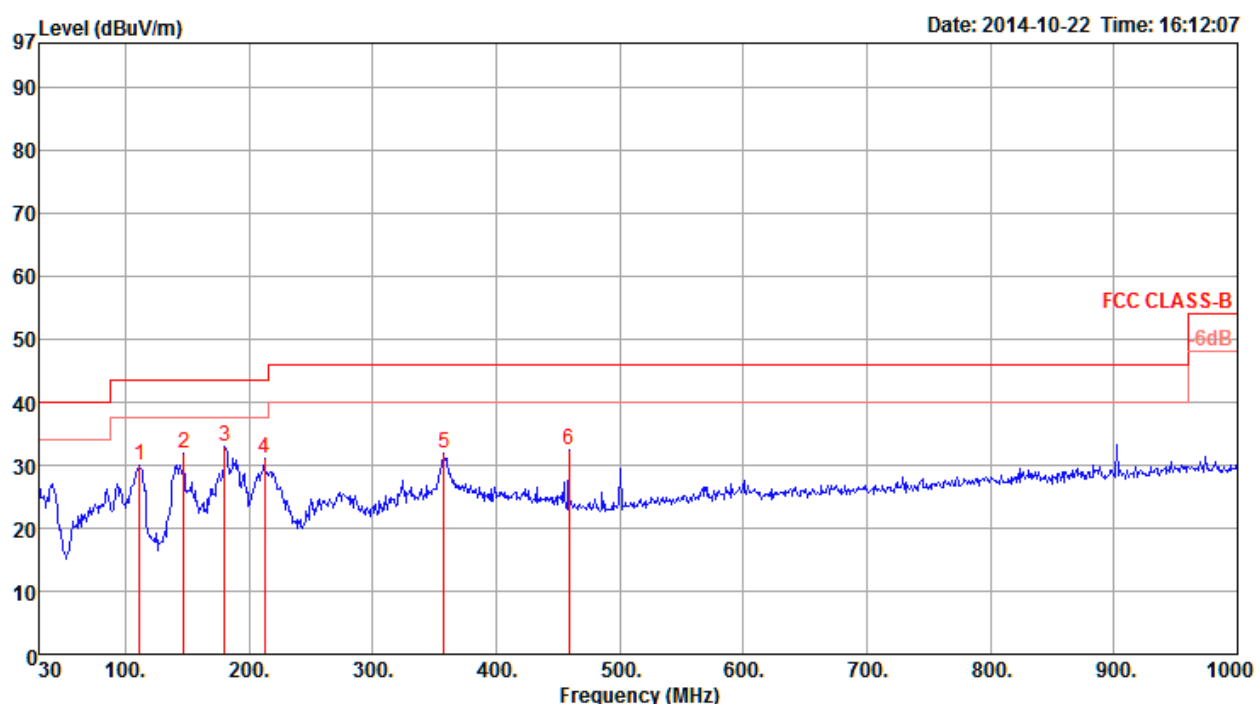

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	111.48	29.99	43.50	-13.51	44.22	0.89	12.60	27.72	Peak	0	100	HORIZONTAL
2	147.37	32.00	43.50	-11.50	47.06	1.07	11.39	27.52	Peak	0	100	HORIZONTAL
3	180.35	32.97	43.50	-10.53	49.04	1.22	10.10	27.39	Peak	0	100	HORIZONTAL
4	212.36	30.97	43.50	-12.53	46.25	1.30	10.58	27.16	Peak	0	100	HORIZONTAL
5	357.86	31.95	46.00	-14.05	41.60	1.74	15.74	27.13	Peak	0	100	HORIZONTAL
6	458.74	32.56	46.00	-13.44	41.18	2.00	17.22	27.84	Peak	0	100	HORIZONTAL

Vertical

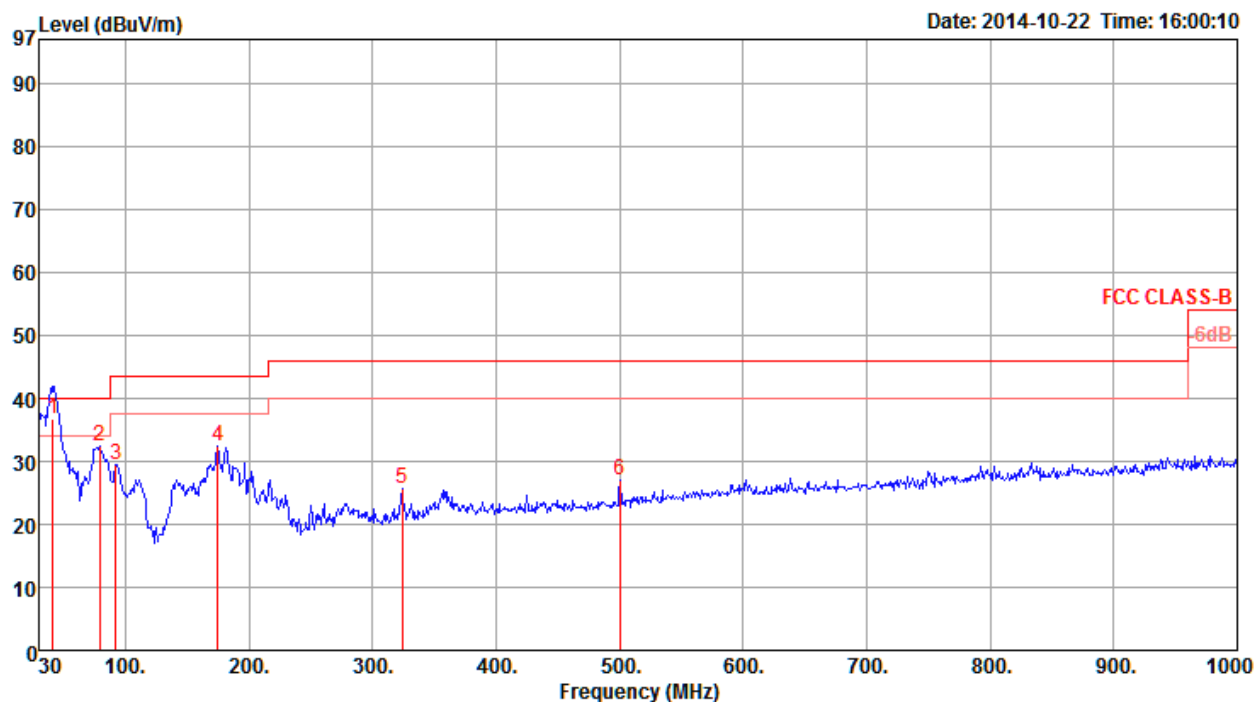

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	deg	cm	
1	41.64	36.66	40.00	-3.34	51.44	0.51	12.68	27.97	QP	270	100	VERTICAL
2	79.47	32.36	40.00	-7.64	51.97	0.76	7.53	27.90	Peak	0	400	VERTICAL
3	92.08	29.50	43.50	-14.00	46.77	0.79	9.80	27.86	Peak	0	400	VERTICAL
4	174.53	32.52	43.50	-10.98	48.49	1.17	10.26	27.40	Peak	0	400	VERTICAL
5	323.91	25.77	46.00	-20.23	36.32	1.66	14.72	26.93	Peak	0	400	VERTICAL
6	500.45	26.90	46.00	-19.10	34.93	2.10	17.80	27.93	Peak	0	400	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4823.97	44.96	74.00	-29.04	42.77	4.21	32.56	34.58	Peak	100	121	HORIZONTAL
2	4823.97	39.80	54.00	-14.20	37.61	4.21	32.56	34.58	Average	100	121	HORIZONTAL
3	7233.92	32.75	54.00	-21.25	25.24	5.33	36.99	34.81	Average	258	121	HORIZONTAL
4	7239.62	45.09	74.00	-28.91	37.59	5.33	36.99	34.82	Peak	258	121	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4823.88	46.25	74.00	-27.75	44.06	4.21	32.56	34.58	Peak	221	100	VERTICAL
2	4823.93	41.29	54.00	-12.71	39.10	4.21	32.56	34.58	Average	221	100	VERTICAL
3	7236.70	35.76	54.00	-18.24	28.26	5.33	36.99	34.82	Average	228	100	VERTICAL
4	7236.90	47.94	74.00	-26.06	40.44	5.33	36.99	34.82	Peak	228	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 6 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4873.85	48.67	74.00	-25.33	46.36	4.22	32.66	34.57	Peak	93	164	HORIZONTAL
2	4873.96	42.57	54.00	-11.43	40.26	4.22	32.66	34.57	Average	93	164	HORIZONTAL
3	7311.12	48.55	74.00	-25.45	40.96	5.34	37.07	34.82	Peak	217	100	HORIZONTAL
4	7311.98	35.98	54.00	-18.02	28.40	5.34	37.07	34.83	Average	217	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.95	51.05	74.00	-22.95	48.74	4.22	32.66	34.57	Peak	311	100	VERTICAL
2	4873.96	46.74	54.00	-7.26	44.43	4.22	32.66	34.57	Average	311	100	VERTICAL
3	7309.88	49.02	74.00	-24.98	41.43	5.34	37.07	34.82	Peak	33	100	VERTICAL
4	7312.80	36.29	54.00	-17.71	28.71	5.34	37.07	34.83	Average	33	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	4923.97	45.74	74.00	-28.26	43.30	4.23	32.76	34.55	Peak	95	100	HORIZONTAL
2	4923.97	39.72	54.00	-14.28	37.28	4.23	32.76	34.55	Average	95	100	HORIZONTAL
3	7387.57	33.59	54.00	-20.41	25.89	5.36	37.18	34.84	Average	260	100	HORIZONTAL
4	7388.12	46.30	74.00	-27.70	38.60	5.36	37.18	34.84	Peak	260	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4923.94	47.87	74.00	-26.13	45.43	4.23	32.76	34.55	Peak	318	100 VERTICAL
2	4923.94	43.48	54.00	-10.52	41.04	4.23	32.76	34.55	Average	318	100 VERTICAL
3	7387.03	34.39	54.00	-19.61	26.69	5.36	37.18	34.84	Average	40	100 VERTICAL
4	7387.70	46.30	74.00	-27.70	38.60	5.36	37.18	34.84	Peak	40	100 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4814.19	30.96	54.00	-23.04	28.82	4.20	32.52	34.58	Average	215	100	HORIZONTAL
2	4832.49	44.00	74.00	-30.00	41.81	4.21	32.56	34.58	Peak	215	100	HORIZONTAL
3	7226.87	49.00	74.00	-25.00	41.52	5.32	36.97	34.81	Peak	203	100	HORIZONTAL
4	7228.53	35.92	54.00	-18.08	28.44	5.32	36.97	34.81	Average	203	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4821.40	31.25	54.00	-22.75	29.06	4.21	32.56	34.58	Average	88	100	VERTICAL
2	4822.27	44.08	74.00	-29.92	41.89	4.21	32.56	34.58	Peak	88	100	VERTICAL
3	7236.48	35.77	54.00	-18.23	28.27	5.33	36.99	34.82	Average	149	100	VERTICAL
4	7243.50	49.01	74.00	-24.99	41.51	5.33	36.99	34.82	Peak	149	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 6 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	4868.55	44.57	74.00	-29.43	42.26	4.22	32.66	34.57	Peak	317	100	HORIZONTAL
2	4872.53	31.07	54.00	-22.93	28.76	4.22	32.66	34.57	Average	317	100	HORIZONTAL
3	7308.76	49.45	74.00	-24.55	41.86	5.34	37.07	34.82	Peak	311	100	HORIZONTAL
4	7310.20	36.00	54.00	-18.00	28.41	5.34	37.07	34.82	Average	311	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	4868.26	44.68	74.00	-29.32	42.37	4.22	32.66	34.57	Peak	36	162	VERTICAL
2	4873.78	33.10	54.00	-20.90	30.79	4.22	32.66	34.57	Average	32	162	VERTICAL
3	7309.43	49.06	74.00	-24.94	41.47	5.34	37.07	34.82	Peak	211	100	VERTICAL
4	7318.12	36.30	54.00	-17.70	28.69	5.35	37.09	34.83	Average	211	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm
1	4930.86	44.33	74.00	-29.67	41.89	4.23	32.76	34.55	Peak	353	100 HORIZONTAL
2	4931.37	31.26	54.00	-22.74	28.82	4.23	32.76	34.55	Average	353	100 HORIZONTAL
3	7378.08	36.36	54.00	-17.64	28.68	5.36	37.16	34.84	Average	327	100 HORIZONTAL
4	7387.03	49.05	74.00	-24.95	41.35	5.36	37.18	34.84	Peak	327	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm
1	4914.77	43.70	74.00	-30.30	41.30	4.22	32.73	34.55	Peak	357	100 VERTICAL
2	4930.96	31.51	54.00	-22.49	29.07	4.23	32.76	34.55	Average	357	100 VERTICAL
3	7377.09	49.62	74.00	-24.38	41.94	5.36	37.16	34.84	Peak	105	100 VERTICAL
4	7379.05	36.49	54.00	-17.51	28.81	5.36	37.16	34.84	Average	105	100 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	11494.92	52.65	74.00	-21.35	42.27	6.74	38.30	34.66	Peak	5	100 HORIZONTAL
2	11496.80	39.64	54.00	-14.36	29.26	6.74	38.30	34.66	Average	5	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	11489.04	44.10	54.00	-9.90	33.72	6.74	38.30	34.66	Average	298	100 VERTICAL
2	11489.54	58.39	74.00	-15.61	48.01	6.74	38.30	34.66	Peak	298	100 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11566.56	42.50	54.00	-11.50	32.08	6.77	38.33	34.68	Average	60	100 HORIZONTAL
2	11576.57	53.66	74.00	-20.34	43.25	6.77	38.33	34.69	Peak	60	100 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11569.28	46.10	54.00	-7.90	35.68	6.77	38.33	34.68	Average	298	100	VERTICAL
2	11569.42	59.38	74.00	-14.62	48.96	6.77	38.33	34.68	Peak	298	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	11647.71	56.61	74.00	-17.39	46.17	6.80	38.36	34.72	Peak	131	100	HORIZONTAL
2	11647.97	43.38	54.00	-10.62	32.94	6.80	38.36	34.72	Average	131	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	11649.13	47.90	54.00	-6.10	37.46	6.80	38.36	34.72	Average	297	100	VERTICAL
2	11654.08	60.75	74.00	-13.25	50.31	6.80	38.36	34.72	Peak	297	100	VERTICAL

<For Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4823.84	33.22	54.00	-20.78	29.16	5.87	33.39	35.20	Average	100	344 HORIZONTAL
2	4825.32	46.33	74.00	-27.67	42.27	5.87	33.39	35.20	Peak	100	344 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4821.53	33.16	54.00	-20.84	29.10	5.87	33.39	35.20	Average	100	272 VERTICAL
2	4823.49	46.88	74.00	-27.12	42.82	5.87	33.39	35.20	Peak	100	272 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.32	32.98	54.00	-21.02	28.78	5.92	33.48	35.20 Average	100	234	HORIZONTAL
2	4876.30	46.88	74.00	-27.12	42.68	5.92	33.48	35.20 Peak	100	234	HORIZONTAL
3	7311.54	37.90	54.00	-16.10	29.69	7.13	36.51	35.43 Average	100	289	HORIZONTAL
4	7314.03	51.28	74.00	-22.72	43.07	7.13	36.51	35.43 Peak	100	289	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4872.38	47.34	74.00	-26.66	43.14	5.92	33.48	35.20 Peak	100	211	VERTICAL
2	4873.70	34.16	54.00	-19.84	29.96	5.92	33.48	35.20 Average	100	211	VERTICAL
3	7306.72	37.80	54.00	-16.20	29.62	7.13	36.48	35.43 Average	100	311	VERTICAL
4	7314.52	51.58	74.00	-22.42	43.37	7.13	36.51	35.43 Peak	100	311	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4923.43	33.12	54.00	-20.88	28.77	5.97	33.58	35.20	Average	100	243 HORIZONTAL
2	4924.60	47.05	74.00	-26.95	42.70	5.97	33.58	35.20	Peak	100	243 HORIZONTAL
3	7385.44	51.68	74.00	-22.32	43.36	7.17	36.61	35.46	Peak	100	164 HORIZONTAL
4	7386.14	38.30	54.00	-15.70	29.98	7.17	36.61	35.46	Average	100	164 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4924.04	33.42	54.00	-20.58	29.07	5.97	33.58	35.20	Average	100	286 VERTICAL
2	4924.44	46.22	74.00	-27.78	41.87	5.97	33.58	35.20	Peak	100	286 VERTICAL
3	7385.41	51.95	74.00	-22.05	43.63	7.17	36.61	35.46	Peak	100	189 VERTICAL
4	7386.43	38.06	54.00	-15.94	29.74	7.17	36.61	35.46	Average	100	189 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4842.42	46.74	74.00	-27.26	42.64	5.88	33.42	35.20	Peak	100	289 HORIZONTAL
2	4842.63	33.39	54.00	-20.61	29.29	5.88	33.42	35.20	Average	100	289 HORIZONTAL
3	7264.48	37.96	54.00	-16.04	29.84	7.11	36.43	35.41	Average	100	189 HORIZONTAL
4	7267.94	51.06	74.00	-22.94	42.93	7.11	36.43	35.41	Peak	100	189 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4841.92	33.53	54.00	-20.47	29.43	5.88	33.42	35.20	Average	100	159 VERTICAL
2	4846.20	46.77	74.00	-27.23	42.67	5.88	33.42	35.20	Peak	100	159 VERTICAL
3	7264.74	38.05	54.00	-15.95	29.92	7.11	36.43	35.41	Average	100	186 VERTICAL
4	7266.41	50.84	74.00	-23.16	42.71	7.11	36.43	35.41	Peak	100	186 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4872.64	46.29	74.00	-27.71	42.09	5.92	33.48	35.20	Peak	100	312	HORIZONTAL
2	4873.71	33.07	54.00	-20.93	28.87	5.92	33.48	35.20	Average	100	312	HORIZONTAL
3	7311.33	51.56	74.00	-22.44	43.35	7.13	36.51	35.43	Peak	100	241	HORIZONTAL
4	7313.30	37.86	54.00	-16.14	29.65	7.13	36.51	35.43	Average	100	241	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4869.05	33.00	54.00	-21.00	28.83	5.92	33.45	35.20	Average	100	113	VERTICAL
2	4877.26	46.90	74.00	-27.10	42.70	5.92	33.48	35.20	Peak	100	113	VERTICAL
3	7310.87	51.16	74.00	-22.84	42.95	7.13	36.51	35.43	Peak	100	168	VERTICAL
4	7313.01	38.10	54.00	-15.90	29.89	7.13	36.51	35.43	Average	100	168	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4900.83	33.33	54.00	-20.67	29.09	5.93	33.51	35.20	Average	100	246 HORIZONTAL
2	4903.91	46.88	74.00	-27.12	42.62	5.95	33.51	35.20	Peak	100	246 HORIZONTAL
3	7351.53	51.60	74.00	-22.40	43.32	7.16	36.56	35.44	Peak	100	186 HORIZONTAL
4	7358.29	38.44	54.00	-15.56	30.17	7.16	36.56	35.45	Average	100	186 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4903.00	33.18	54.00	-20.82	28.92	5.95	33.51	35.20	Average	100	67 VERTICAL
2	4908.02	46.82	74.00	-27.18	42.53	5.95	33.54	35.20	Peak	100	67 VERTICAL
3	7354.58	51.78	74.00	-22.22	43.50	7.16	36.56	35.44	Peak	100	139 VERTICAL
4	7355.58	38.41	54.00	-15.59	30.13	7.16	36.56	35.44	Average	100	139 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11487.60	39.31	54.00	-14.69	28.93	6.74	38.30	34.66	Average	310	100	HORIZONTAL
2	11497.64	52.79	74.00	-21.21	42.40	6.75	38.30	34.66	Peak	310	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11487.60	54.87	74.00	-19.13	44.49	6.74	38.30	34.66	Peak	103	100	VERTICAL
2	11490.09	43.86	54.00	-10.14	33.48	6.74	38.30	34.66	Average	103	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	11570.00	52.62	74.00	-21.38	42.21	6.77	38.33	34.69	Peak	42	100	HORIZONTAL
2	11570.00	40.32	54.00	-13.68	29.91	6.77	38.33	34.69	Average	42	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	11574.80	43.44	54.00	-10.56	33.03	6.77	38.33	34.69	Average	228	100	VERTICAL
2	11576.80	54.15	74.00	-19.85	43.74	6.77	38.33	34.69	Peak	228	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11650.75	43.40	54.00	-10.60	32.96	6.80	38.36	34.72	Average	260	100	HORIZONTAL
2	11654.14	53.32	74.00	-20.68	42.88	6.80	38.36	34.72	Peak	260	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11649.83	44.48	54.00	-9.52	34.04	6.80	38.36	34.72	Average	310	100	VERTICAL
2	11653.24	56.87	74.00	-17.13	46.43	6.80	38.36	34.72	Peak	310	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	11510.03	52.95	74.00	-21.05	42.56	6.75	38.30	34.66	Peak	223	100 HORIZONTAL
2	11518.28	40.24	54.00	-13.76	29.83	6.76	38.31	34.66	Average	223	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	11504.64	55.51	74.00	-18.49	45.12	6.75	38.30	34.66	Peak	163	100 VERTICAL
2	11516.02	40.96	54.00	-13.04	30.55	6.76	38.31	34.66	Average	163	100 VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11584.62	53.44	74.00	-20.56	43.02	6.78	38.33	34.69	Peak	74	100	HORIZONTAL
2	11589.86	40.39	54.00	-13.61	29.97	6.78	38.33	34.69	Average	74	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11586.38	40.97	54.00	-13.03	30.55	6.78	38.33	34.69	Average	185	100	VERTICAL
2	11589.86	54.67	74.00	-19.33	44.25	6.78	38.33	34.69	Peak	185	100	VERTICAL

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11547.89	53.32	74.00	-20.68	42.93	6.76	38.31	34.68	Peak	106	100	HORIZONTAL
2	11551.27	40.24	54.00	-13.76	29.83	6.77	38.32	34.68	Average	106	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	11545.08	53.74	74.00	-20.26	43.35	6.76	38.31	34.68	Peak	217	100	VERTICAL
2	11558.25	40.65	54.00	-13.35	30.24	6.77	38.32	34.68	Average	217	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2378.62	65.93	74.00	-8.07	35.09	2.90	27.94	0.00	Peak	60	153 VERTICAL
2	2390.00	53.64	54.00	-0.36	22.81	2.91	27.92	0.00	Average	60	153 VERTICAL
3	2410.24	117.75			86.93	2.92	27.90	0.00	Average	60	153 VERTICAL
4	2411.04	121.72			90.90	2.92	27.90	0.00	Peak	60	153 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2380.06	65.67	74.00	-8.33	34.83	2.90	27.94	0.00	Peak	60	141 VERTICAL
2	2390.00	48.46	54.00	-5.54	17.63	2.91	27.92	0.00	Average	60	141 VERTICAL
3	2437.96	124.49			93.69	2.94	27.86	0.00	Peak	60	141 VERTICAL
4	2438.60	120.73			89.93	2.94	27.86	0.00	Average	60	141 VERTICAL
5	2479.97	53.67	54.00	-0.33	22.89	2.96	27.82	0.00	Average	60	141 VERTICAL
6	2491.83	66.12	74.00	-7.88	35.35	2.97	27.80	0.00	Peak	60	141 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2462.96	122.70			91.91	2.95	27.84	0.00	Peak	302	153 VERTICAL
2	2463.76	118.82			88.03	2.95	27.84	0.00	Average	302	153 VERTICAL
3	2483.50	53.53	54.00	-0.47	22.75	2.96	27.82	0.00	Average	302	153 VERTICAL
4	2483.82	71.13	74.00	-2.87	40.35	2.96	27.82	0.00	Peak	302	153 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 4 + Chain 5 + Chain 6
Test Date	Oct. 13, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	2384.23	71.75	74.00	-2.25	40.91	2.90	27.94	0.00	Peak	249	175 VERTICAL
2	2384.23	53.70	54.00	-0.30	22.86	2.90	27.94	0.00	Average	249	175 VERTICAL
3	2413.92	110.59			79.77	2.92	27.90	0.00	Average	249	175 VERTICAL
4	2414.24	121.32			90.50	2.92	27.90	0.00	Peak	249	175 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	2388.40	67.55	74.00	-6.45	36.72	2.91	27.92	0.00	Peak	248	184 VERTICAL
2	2389.36	51.42	54.00	-2.58	20.59	2.91	27.92	0.00	Average	248	184 VERTICAL
3	2438.60	124.92			94.12	2.94	27.86	0.00	Peak	248	184 VERTICAL
4	2438.60	114.36			83.56	2.94	27.86	0.00	Average	248	184 VERTICAL
5	2487.35	69.81	74.00	-4.19	39.03	2.96	27.82	0.00	Peak	248	184 VERTICAL
6	2509.14	53.03	54.00	-0.97	22.20	2.98	27.85	0.00	Average	248	184 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm
1	2462.96	119.23			88.44	2.95	27.84	0.00	Peak	242	193 VERTICAL
2	2463.28	109.17			78.38	2.95	27.84	0.00	Average	242	193 VERTICAL
3	2483.50	53.72	54.00	-0.28	22.94	2.96	27.82	0.00	Average	242	193 VERTICAL
4	2483.66	73.16	74.00	-0.84	42.38	2.96	27.82	0.00	Peak	242	193 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Beamforming Mode>

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 4 + Chain 5 + Chain 6
Test date	Oct. 12, 2014		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2390.00	53.69	54.00	-0.31	21.55	4.09	28.05	0.00	Average	132	59 VERTICAL
2	2390.00	68.21	74.00	-5.79	36.07	4.09	28.05	0.00	Peak	132	59 VERTICAL
3	2410.84	108.40			76.20	4.11	28.09	0.00	Average	132	59 VERTICAL
4	2413.74	118.85			86.65	4.11	28.09	0.00	Peak	132	59 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2387.68	71.74	74.00	-2.26	39.60	4.09	28.05	0.00	Peak	180	54 VERTICAL
2	2390.00	51.23	54.00	-2.77	19.09	4.09	28.05	0.00	Average	180	54 VERTICAL
3	2434.68	125.67			93.37	4.12	28.18	0.00	Peak	180	54 VERTICAL
4	2436.13	115.40			83.10	4.12	28.18	0.00	Average	180	54 VERTICAL
5	2483.50	53.47	54.00	-0.53	21.05	4.16	28.26	0.00	Average	180	54 VERTICAL
6	2483.50	66.63	74.00	-7.37	34.21	4.16	28.26	0.00	Peak	180	54 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2469.67	117.62			85.22	4.14	28.26	0.00	Peak	201	297 VERTICAL
2	2469.96	107.42			75.02	4.14	28.26	0.00	Average	201	297 VERTICAL
3	2483.50	53.55	54.00	-0.45	21.13	4.16	28.26	0.00	Average	201	297 VERTICAL
4	2483.93	73.99	74.00	-0.01	41.57	4.16	28.26	0.00	Peak	201	297 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	67%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 4 + Chain 5 + Chain 6
Test date	Oct. 12, 2014		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2390.00	53.96	54.00	-0.04	21.82	4.09	28.05	0.00	Average	128	73	VERTICAL
2	2390.00	68.38	74.00	-5.62	36.24	4.09	28.05	0.00	Peak	128	73	VERTICAL
3	2419.11	114.04			81.80	4.11	28.13	0.00	Peak	128	73	VERTICAL
4	2419.97	103.38			71.13	4.12	28.13	0.00	Average	128	73	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2389.71	69.74	74.00	-4.26	37.60	4.09	28.05	0.00	Peak	121	58	VERTICAL
2	2390.00	53.48	54.00	-0.52	21.34	4.09	28.05	0.00	Average	121	58	VERTICAL
3	2452.92	116.69			84.34	4.13	28.22	0.00	Peak	121	58	VERTICAL
4	2453.50	106.33			73.97	4.14	28.22	0.00	Average	121	58	VERTICAL
5	2483.50	53.45	54.00	-0.55	21.03	4.16	28.26	0.00	Average	121	58	VERTICAL
6	2483.50	67.82	74.00	-6.18	35.40	4.16	28.26	0.00	Peak	121	58	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	2454.60	102.47			70.11	4.14	28.22	0.00	Average	148	294	VERTICAL
2	2455.18	113.27			80.91	4.14	28.22	0.00	Peak	148	294	VERTICAL
3	2483.50	53.24	54.00	-0.76	20.82	4.16	28.26	0.00	Average	148	294	VERTICAL
4	2487.55	67.20	74.00	-6.80	34.73	4.17	28.30	0.00	Peak	148	294	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Non-Beamforming Mode>

Plot on Configuration IEEE 802.11b / Reference Level

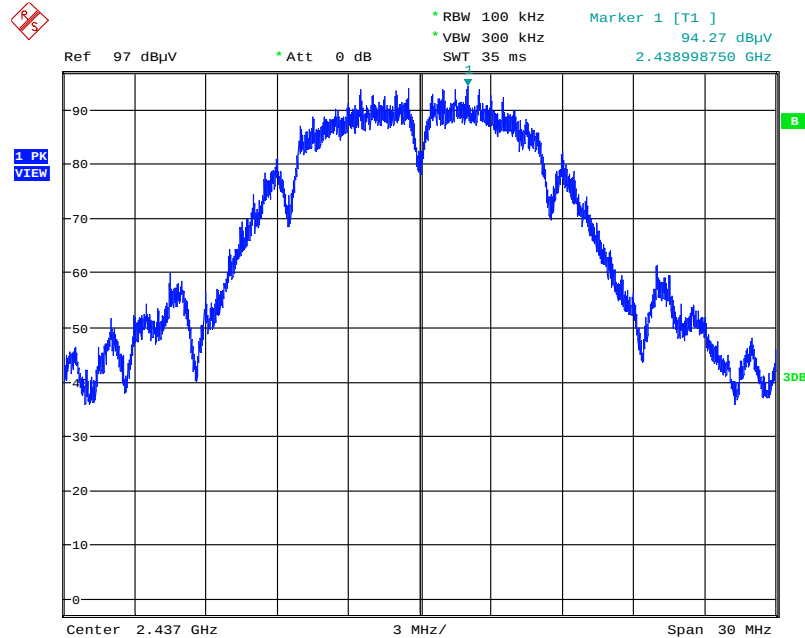


Date: 13.OCT.2014 17:45:09

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

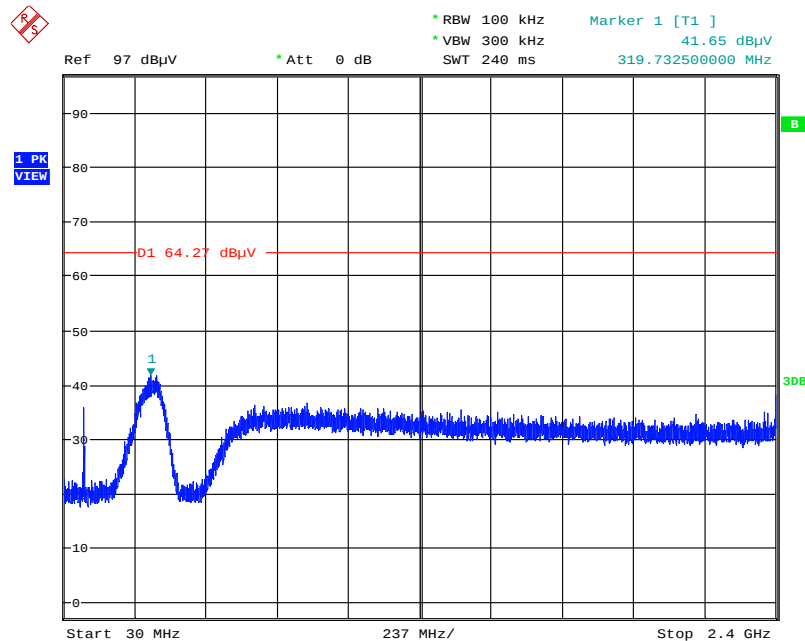


Date: 13.OCT.2014 17:47:05

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

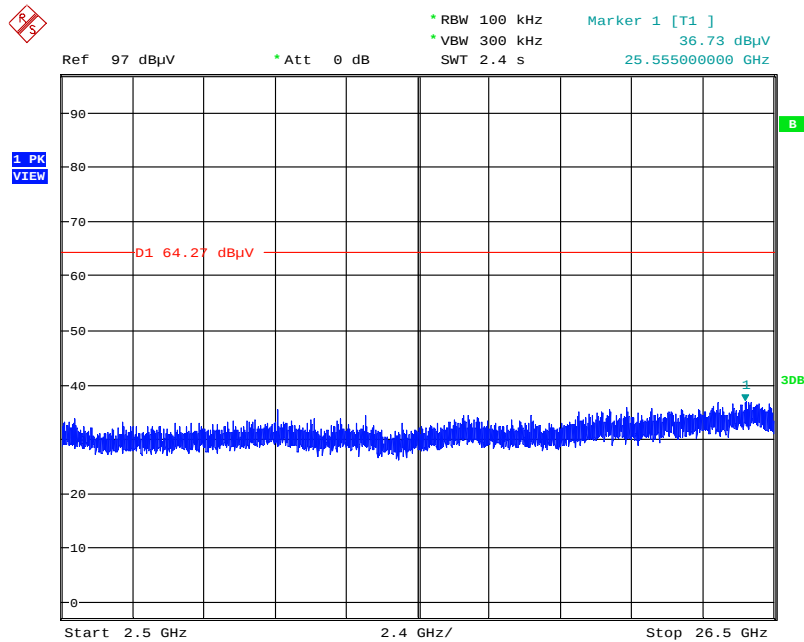


Date: 13.OCT.2014 17:48:09

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

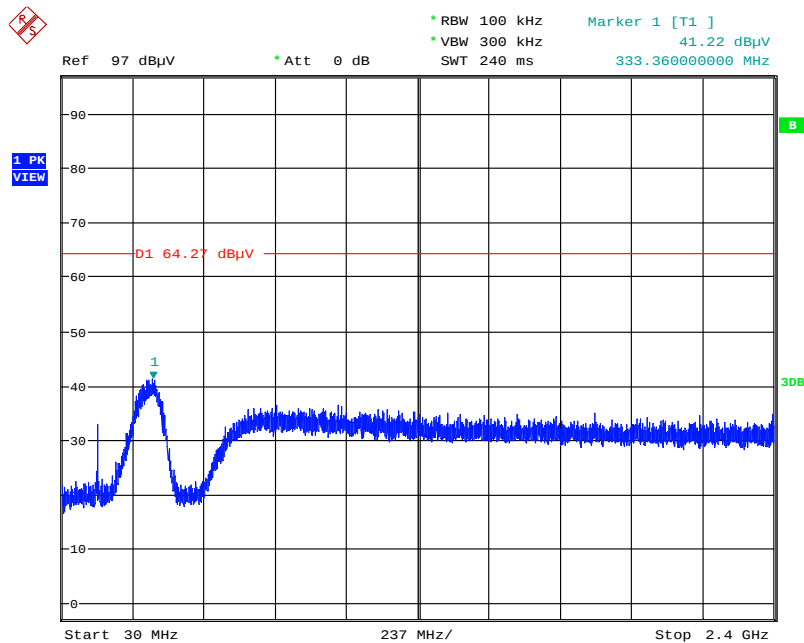


Date: 13.OCT.2014 17:49:14

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

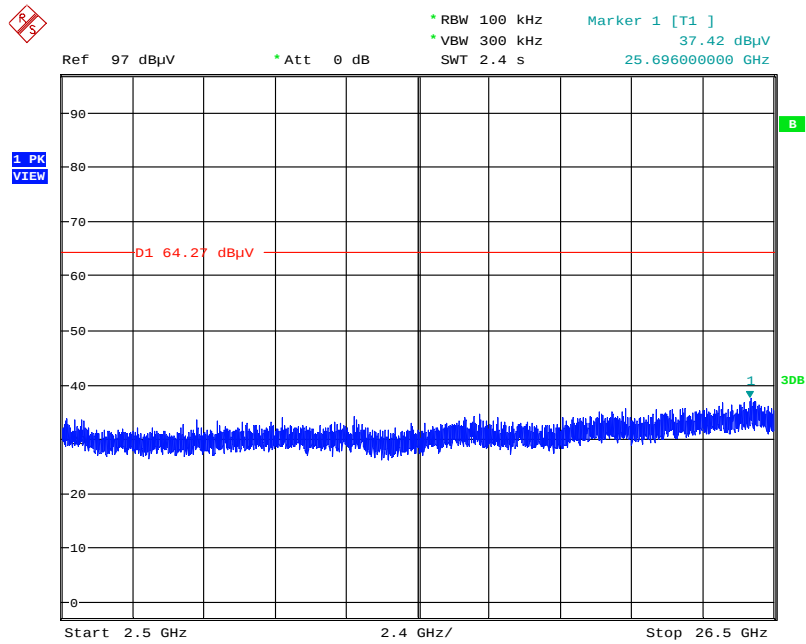


Date: 13.OCT.2014 17:48:39

Plot on Configuration IEEE 802.11g / Reference Level

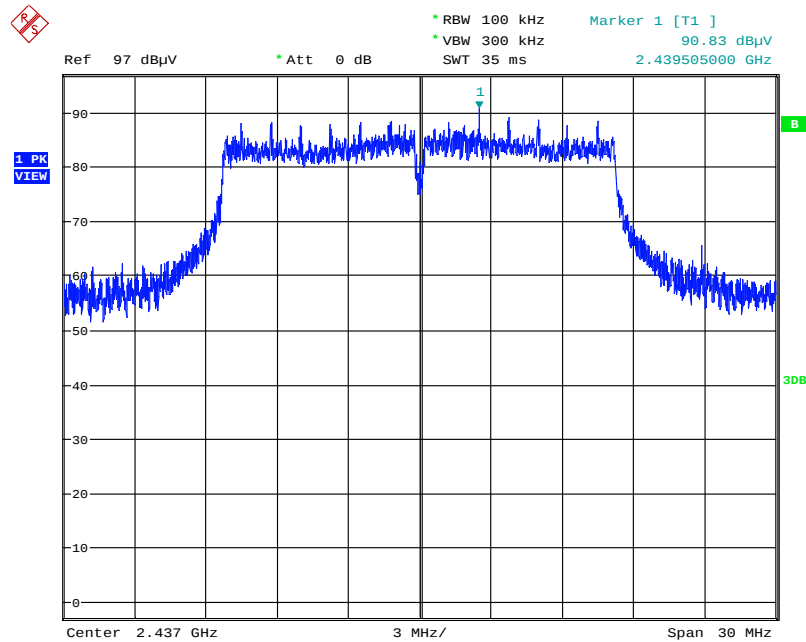


Date: 13.OCT.2014 17:50:19

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

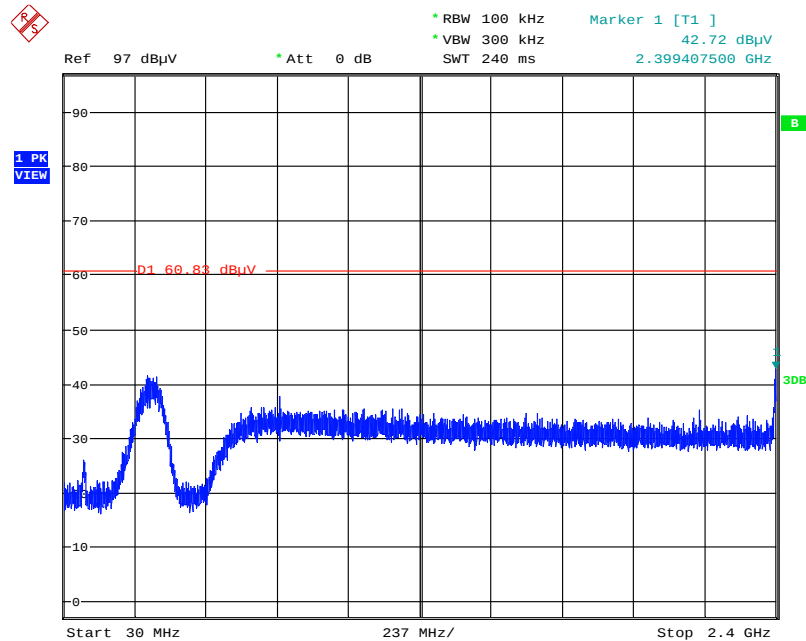


Date: 13.OCT.2014 17:51:16

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

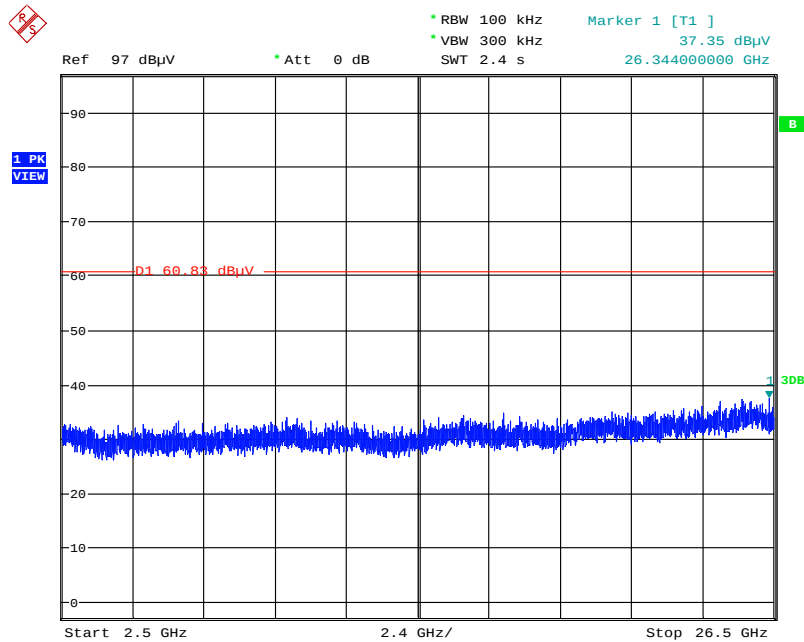


Date: 13.OCT.2014 17:51:35

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

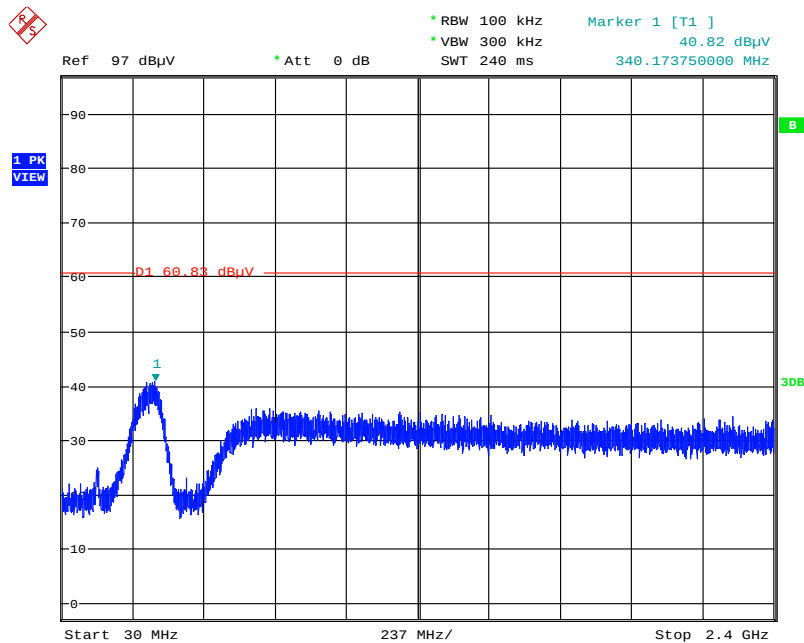


Date: 13.OCT.2014 17:52:15

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

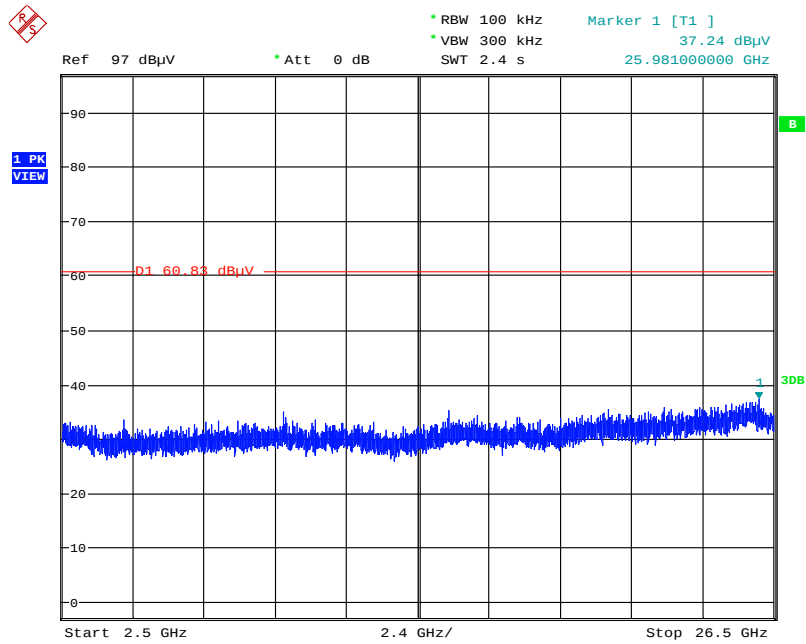


Date: 13.OCT.2014 17:51:57

Plot on Configuration IEEE 802.11a / Reference Level

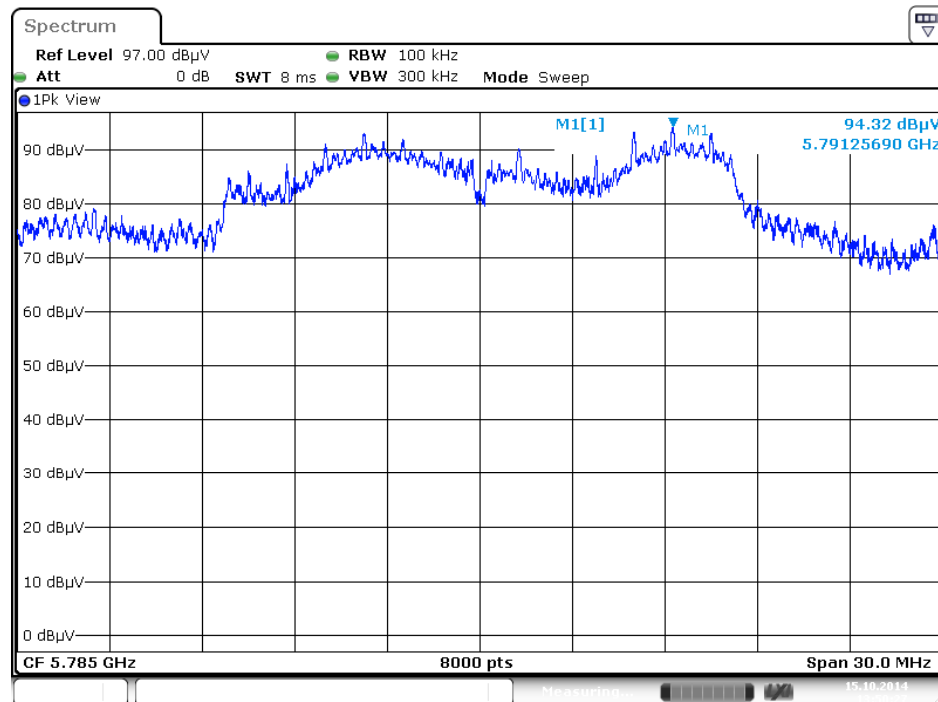


Date: 15.0 CT.2014 13:50:27

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

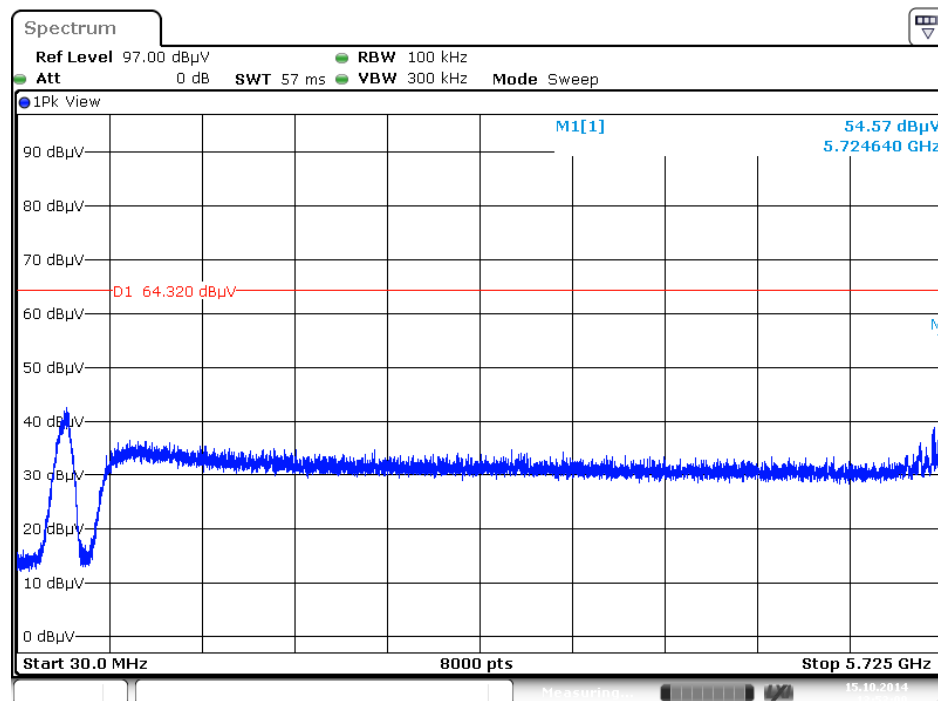


Date: 15.0 CT.2014 13:53:00

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

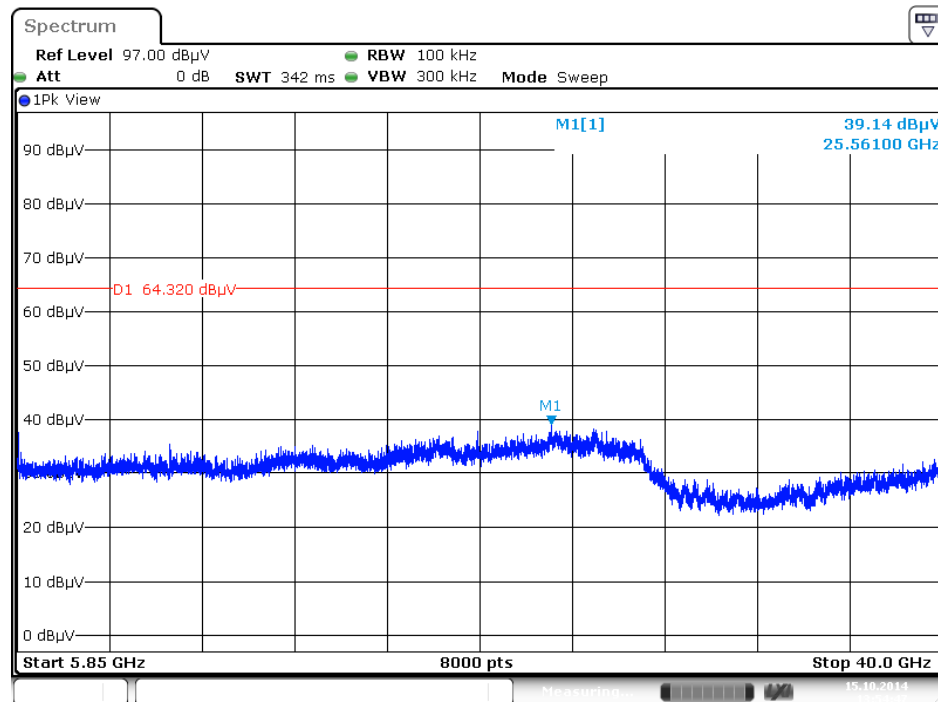


Date: 15.0 CT.2014 13:54:47

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

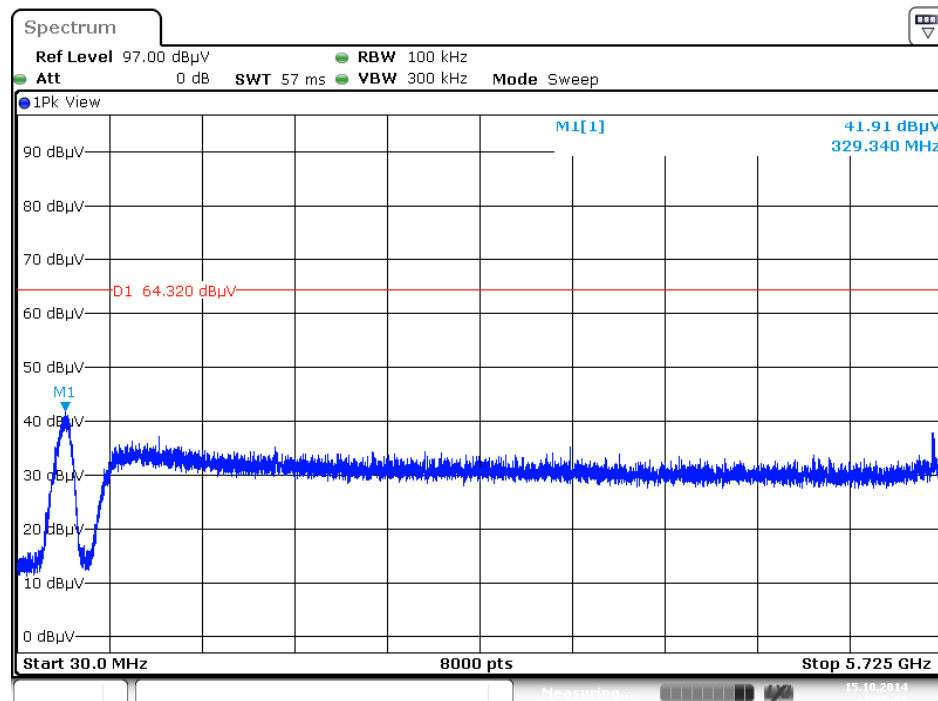

Date: 15.0 CT.2014 13:55:59


Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

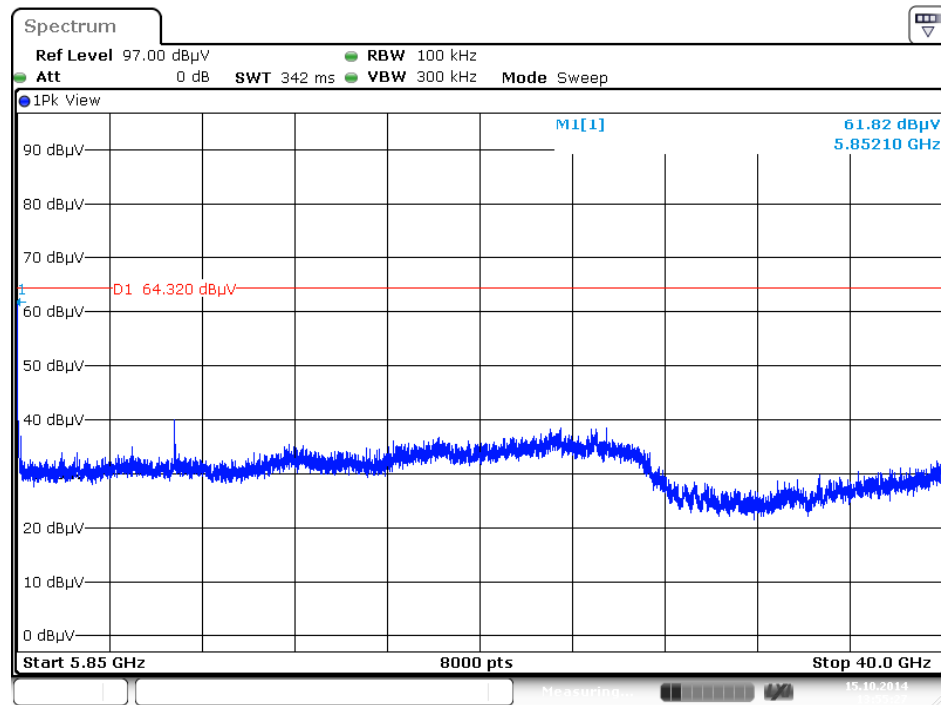

Date: 15.0 CT.2014 13:55:27


<For Beamforming Mode>

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

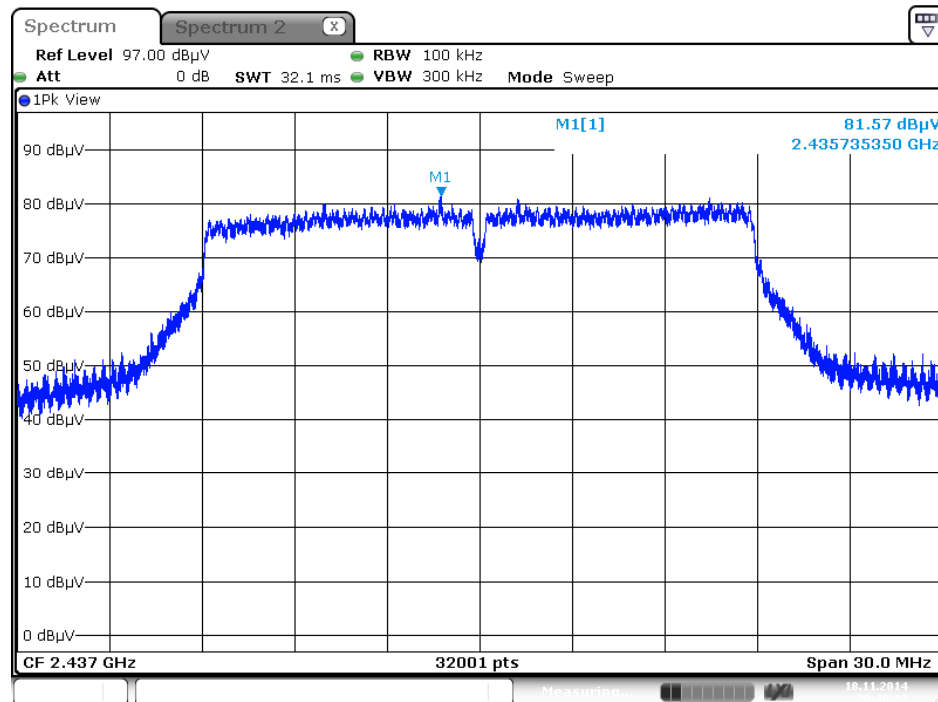


Date: 18 NOV 2014 20:46:22

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

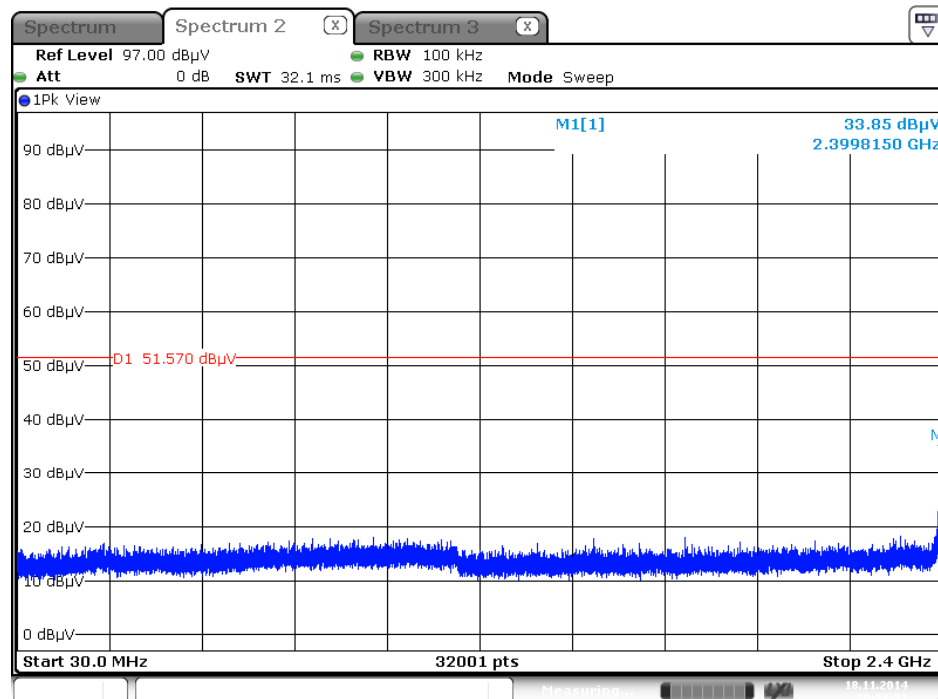


Date: 18 NOV 2014 20:53:52

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

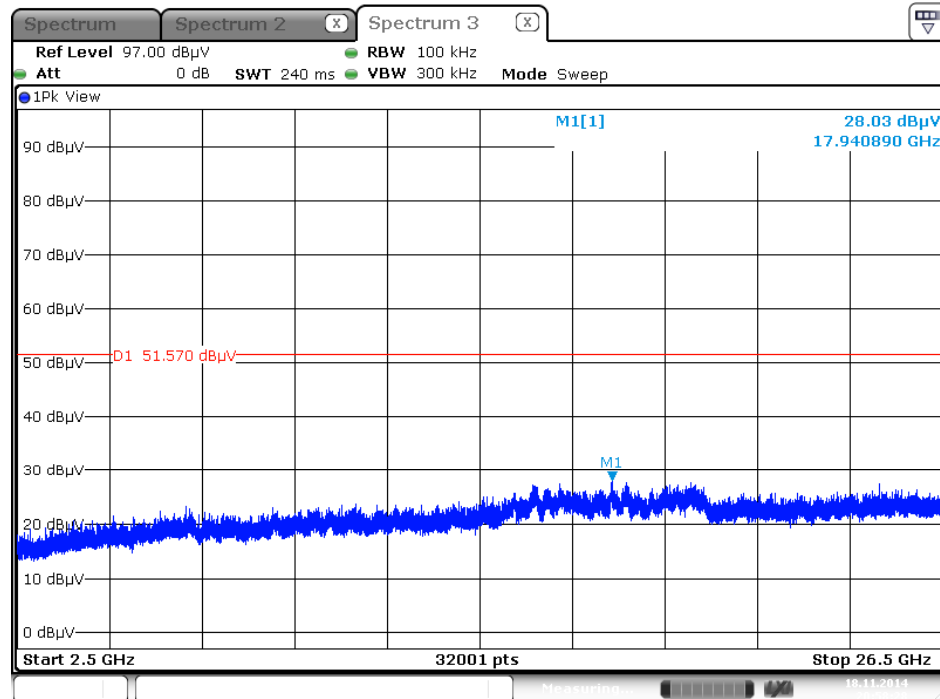


Date: 18 NOV 2014 20:58:28

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

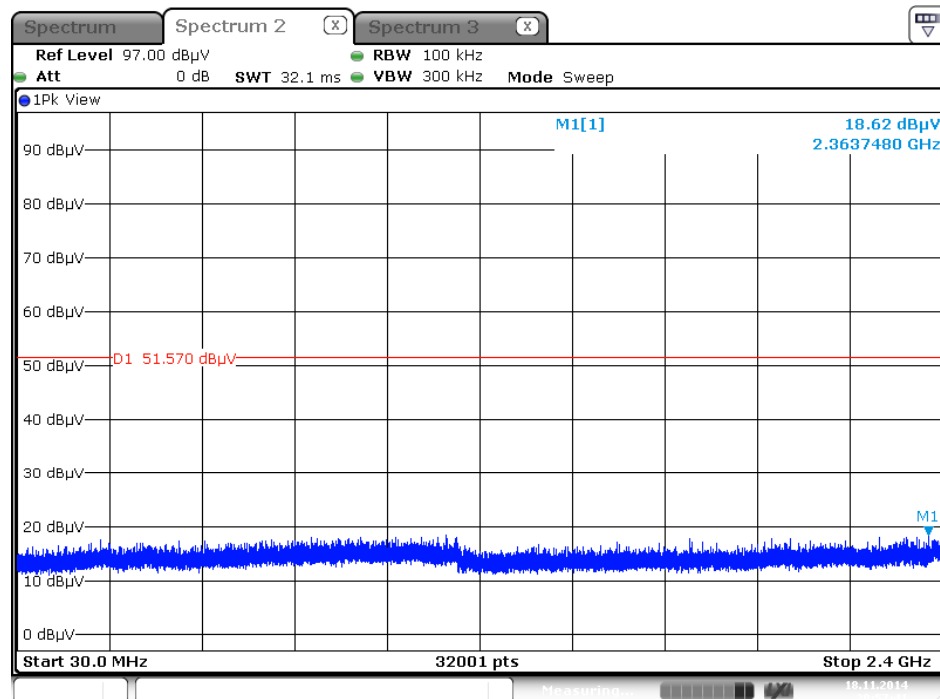


Date: 18 NOV 2014 20:57:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

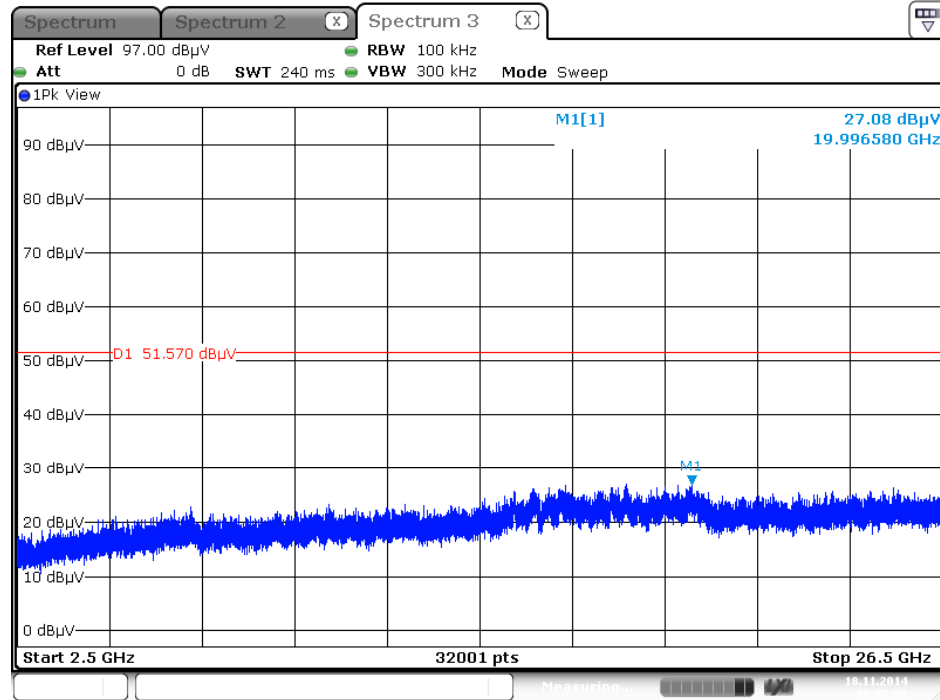


Date: 18.11.2014 20:58:51


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

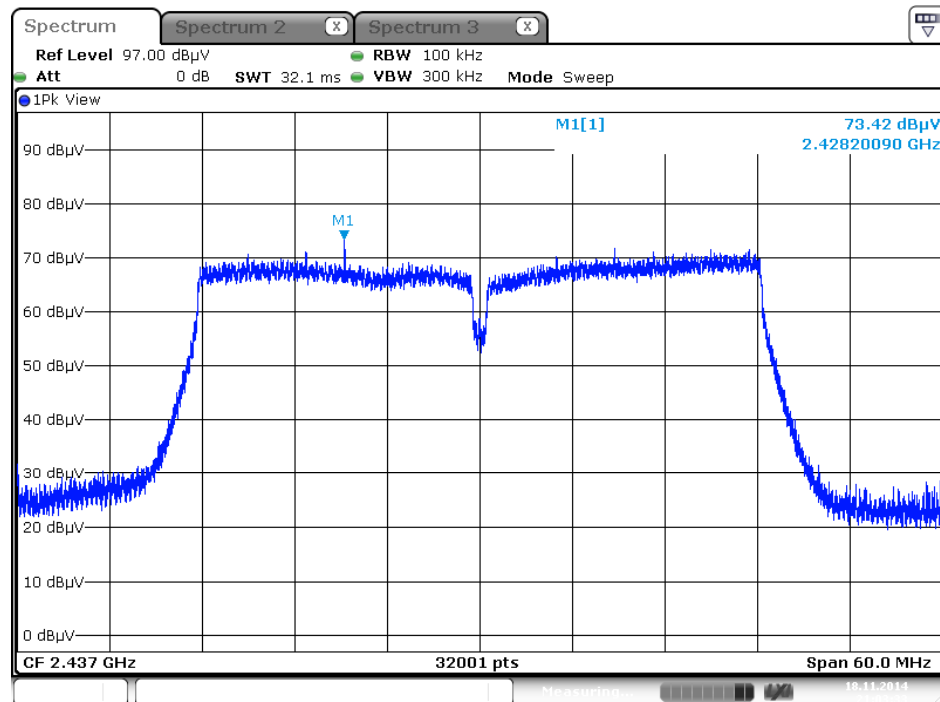

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

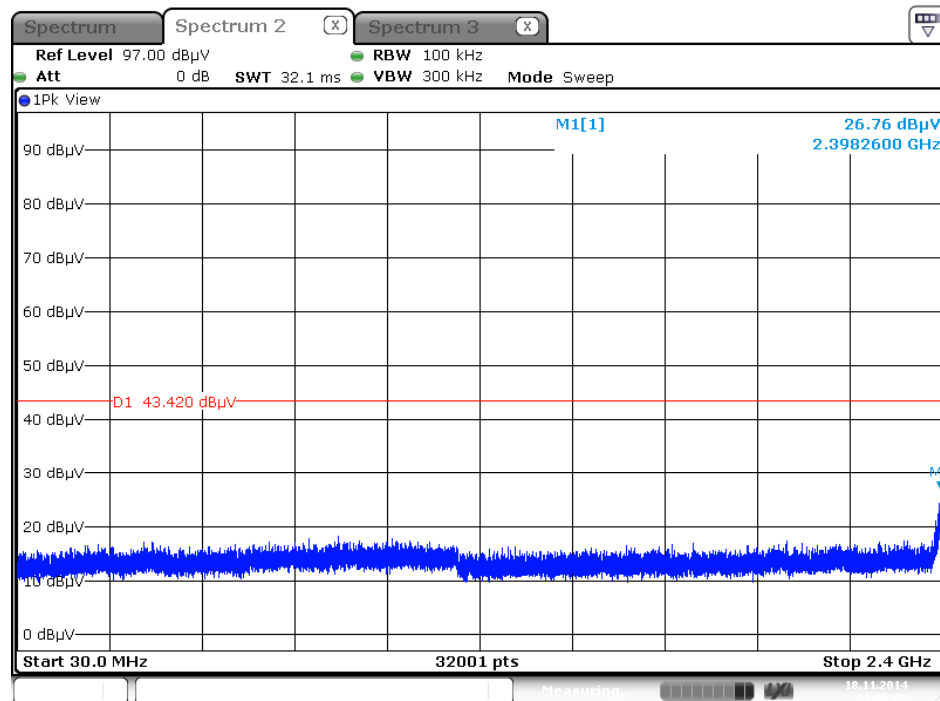


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

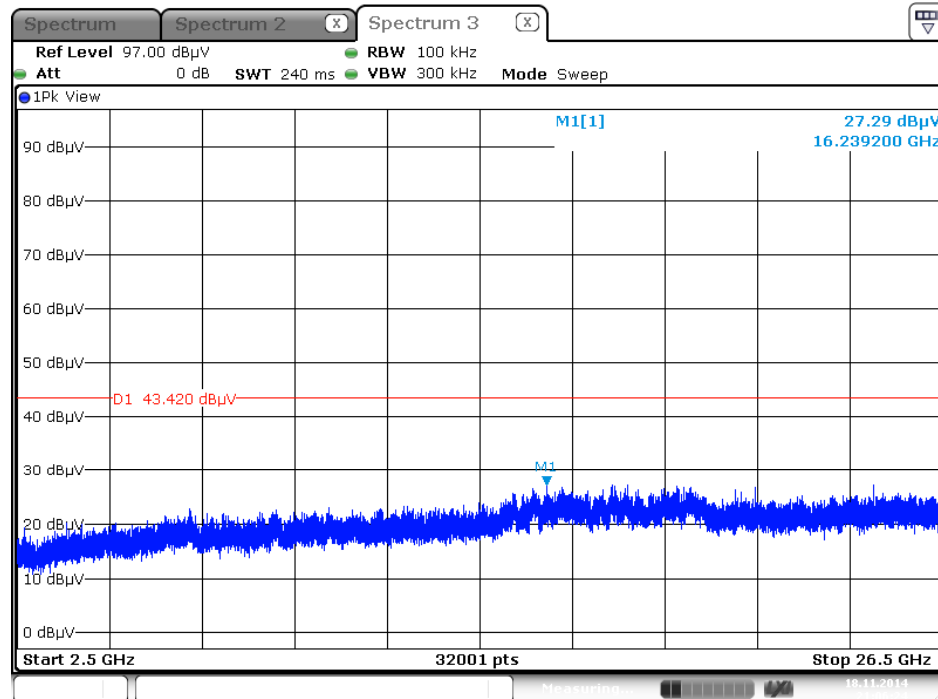


Date: 18 NOV 2014 21:06:25

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

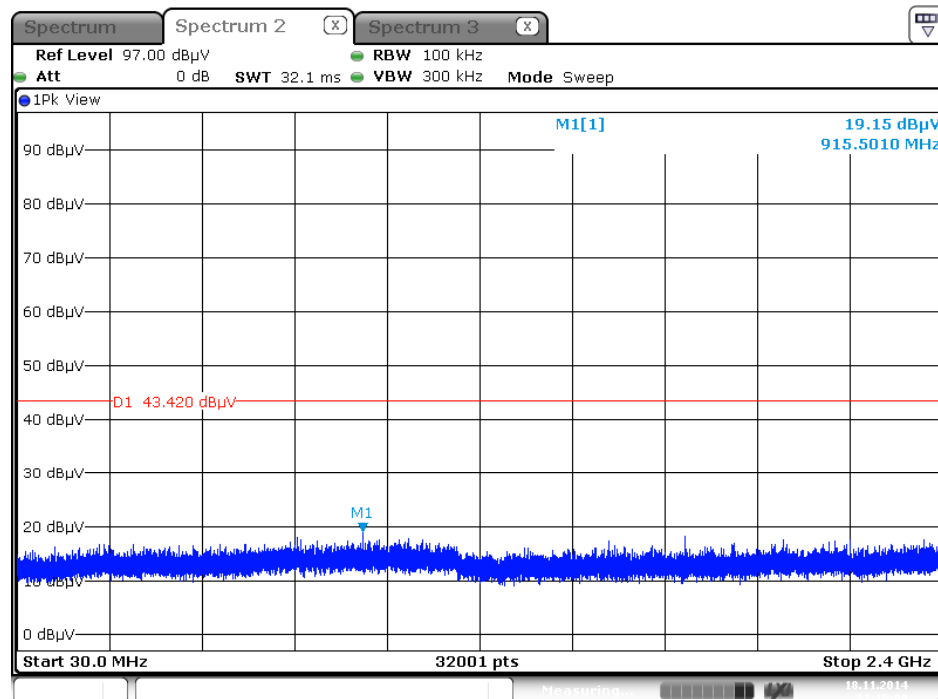


Date: 18 NOV 2014 21:15:08

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

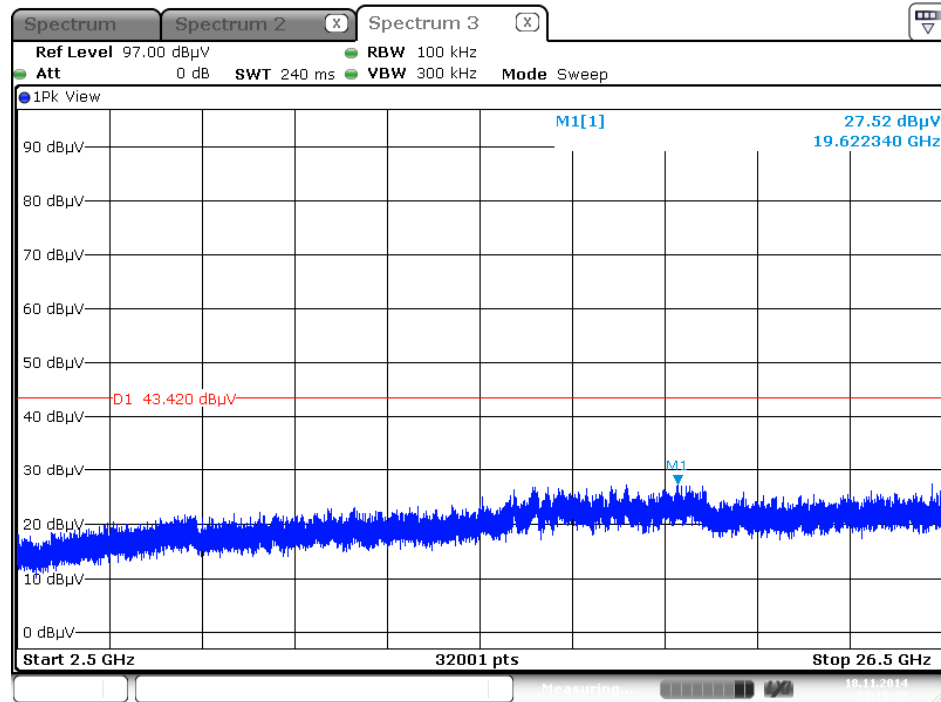


Date: 18.10.2014 21:15:32

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

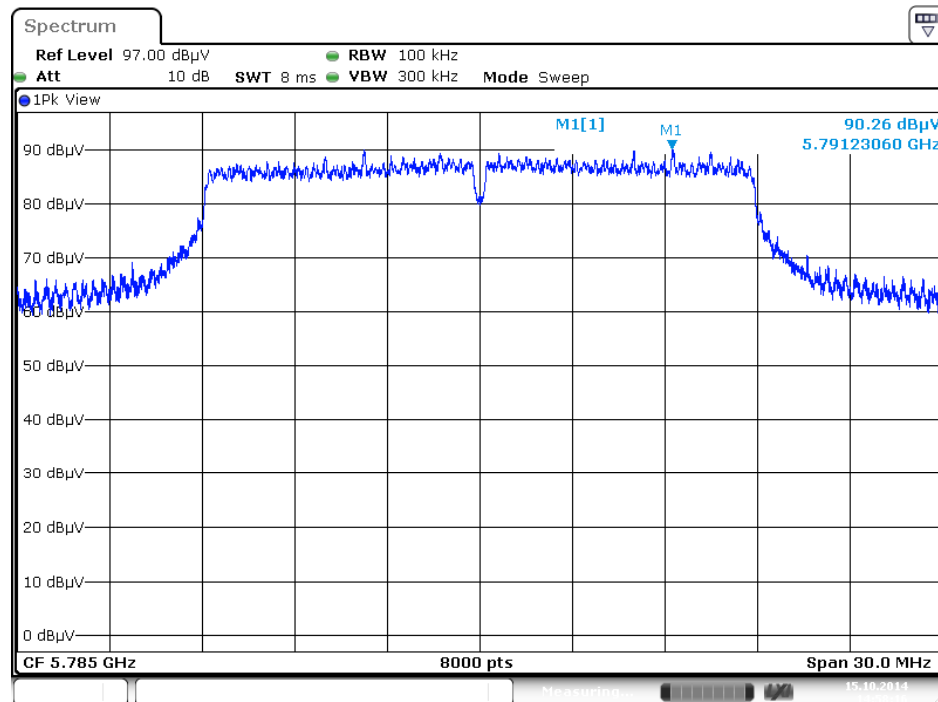


Date: 15.0 CT.2014 14:58:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

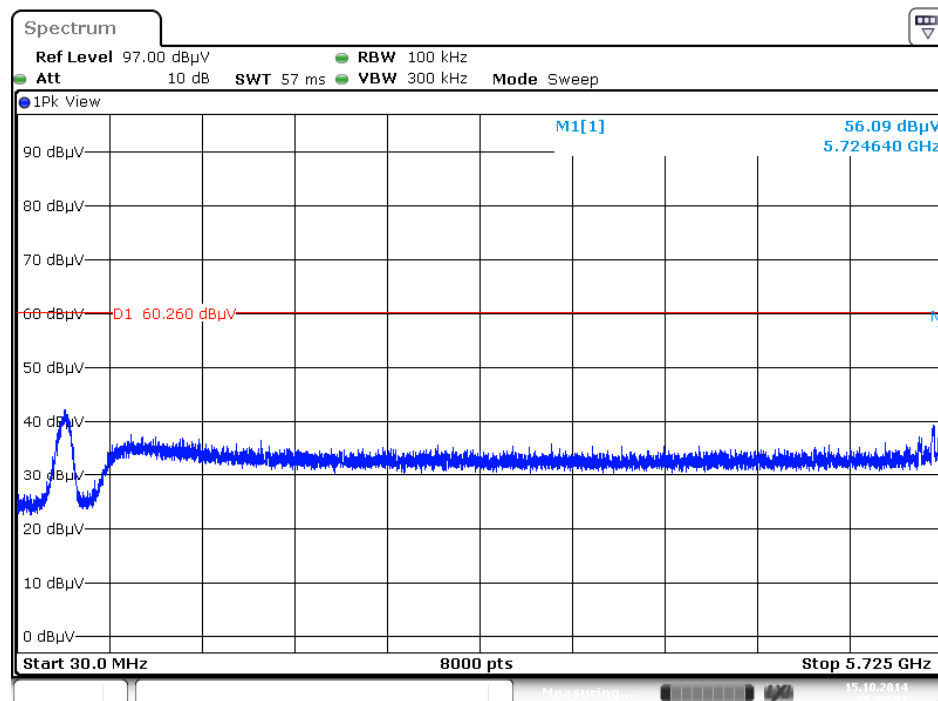


Date: 15.0 CT.2014 15:08:51

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

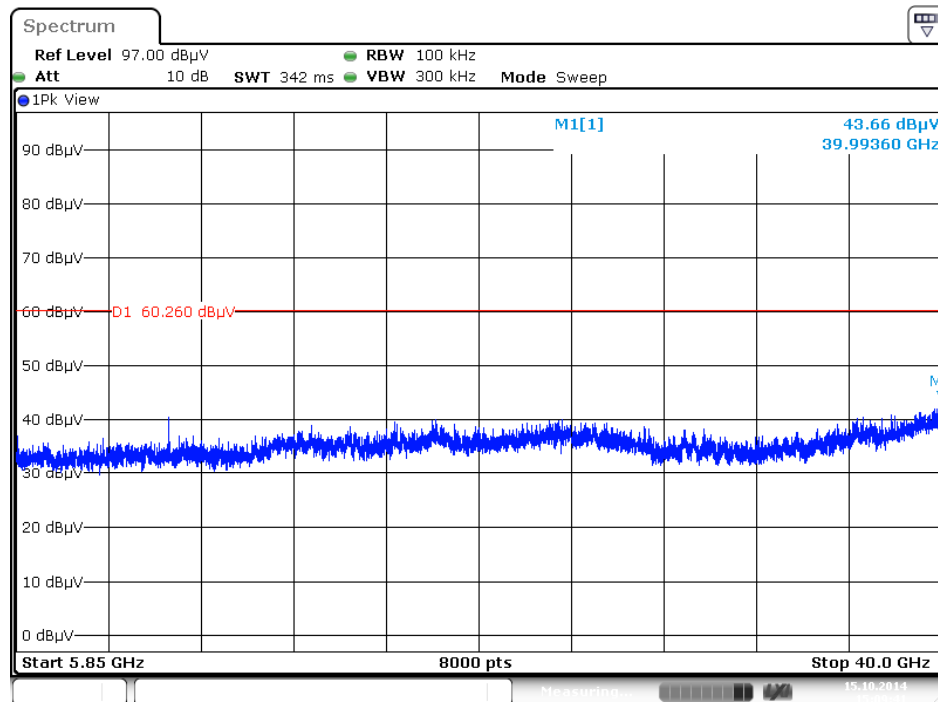


Date: 15.OCT.2014 15:09:41

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

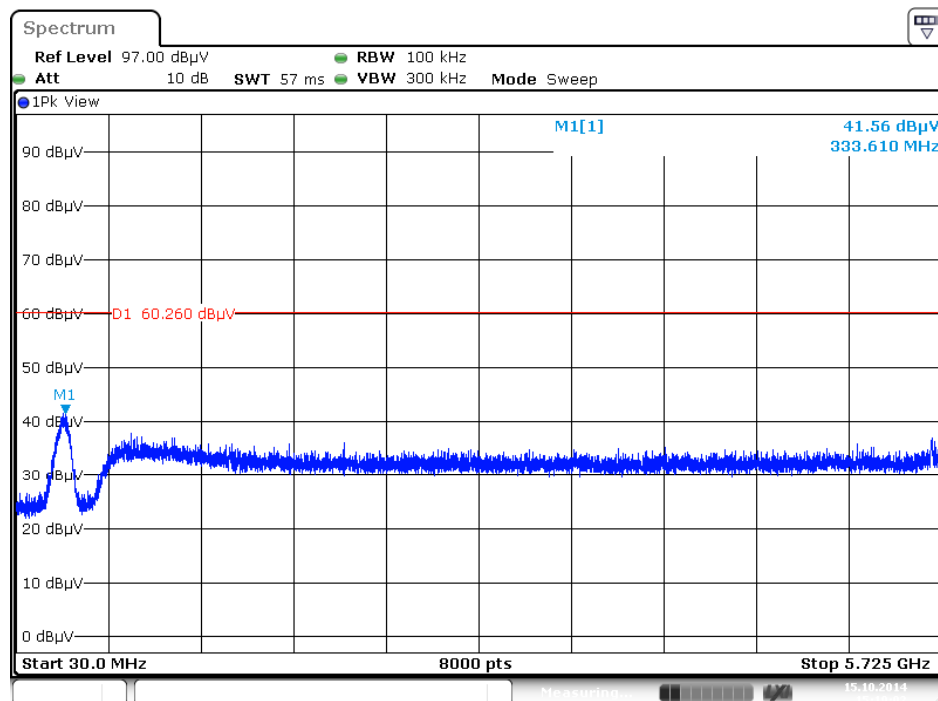


Date: 15.OCT.2014 15:19:02

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

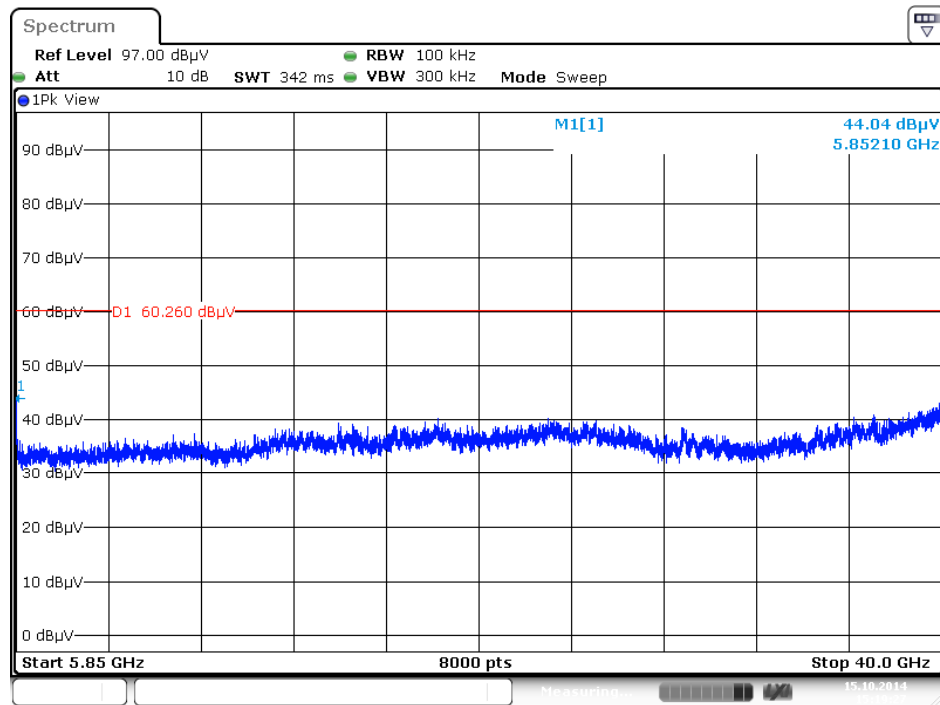


Date: 15.10.2014 15:19:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

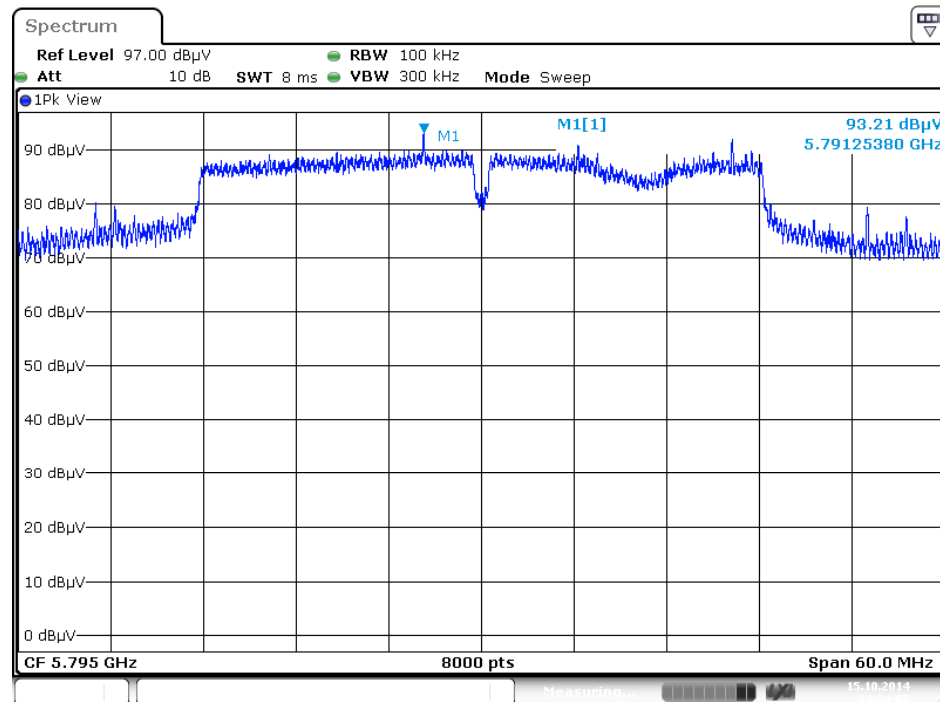


Date: 15.0 CT. 2014 14:24:97

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

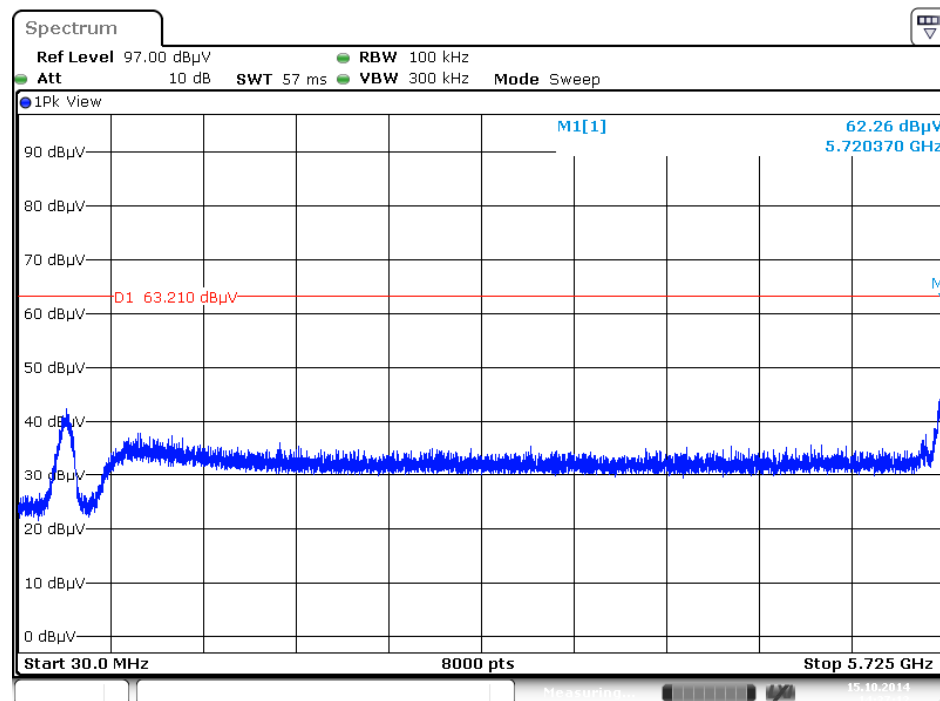


Date: 15.0 CT. 2014 14:37:12

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

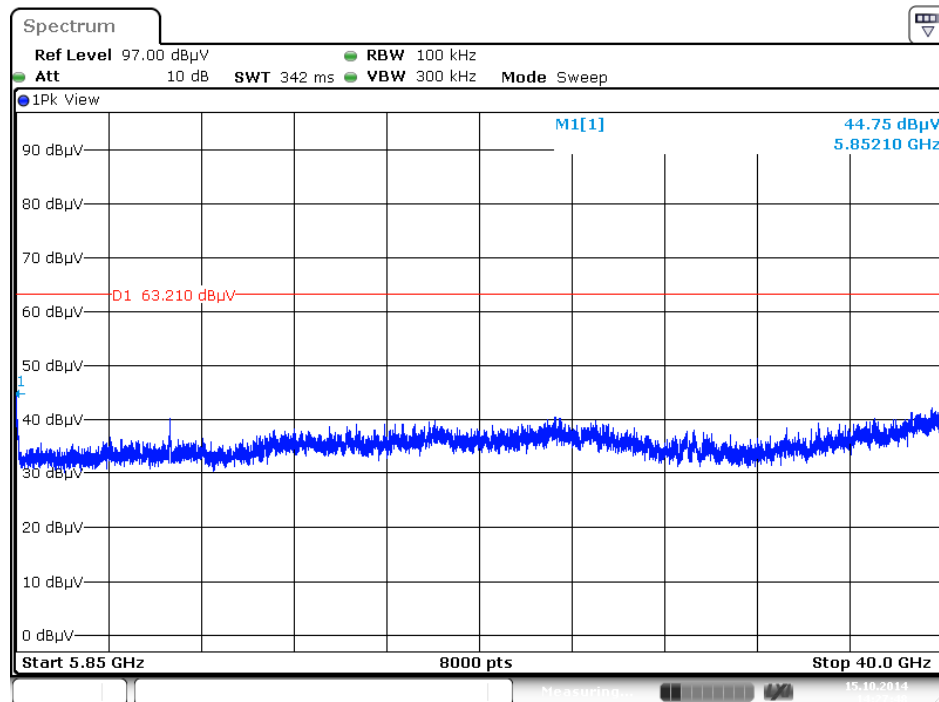


Date: 15.0 CT 2014 14:27:48

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

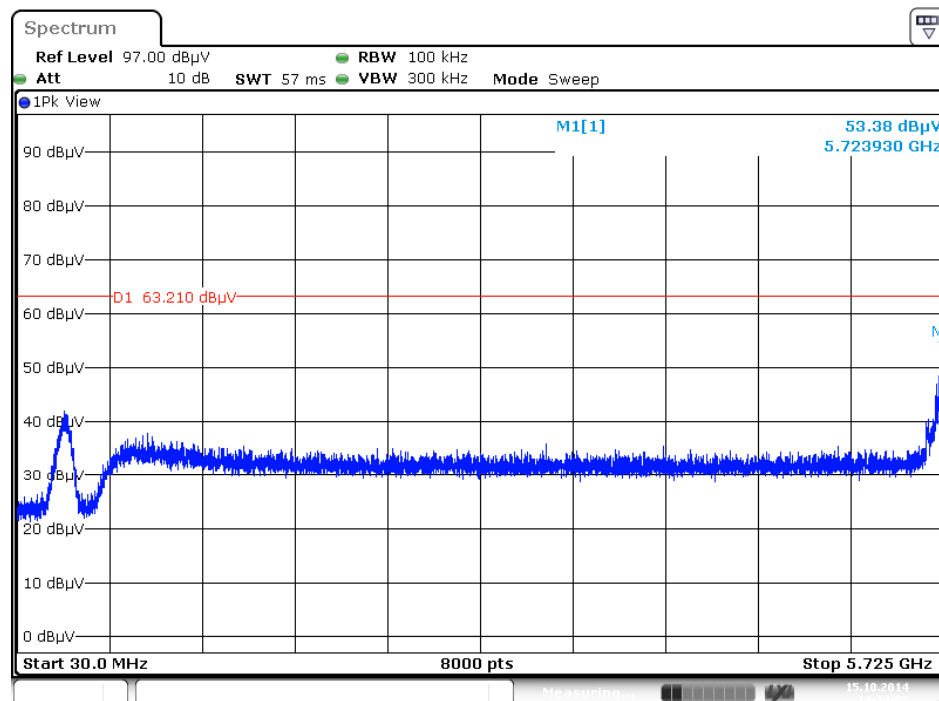


Date: 15.0 CT 2014 14:24:52

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

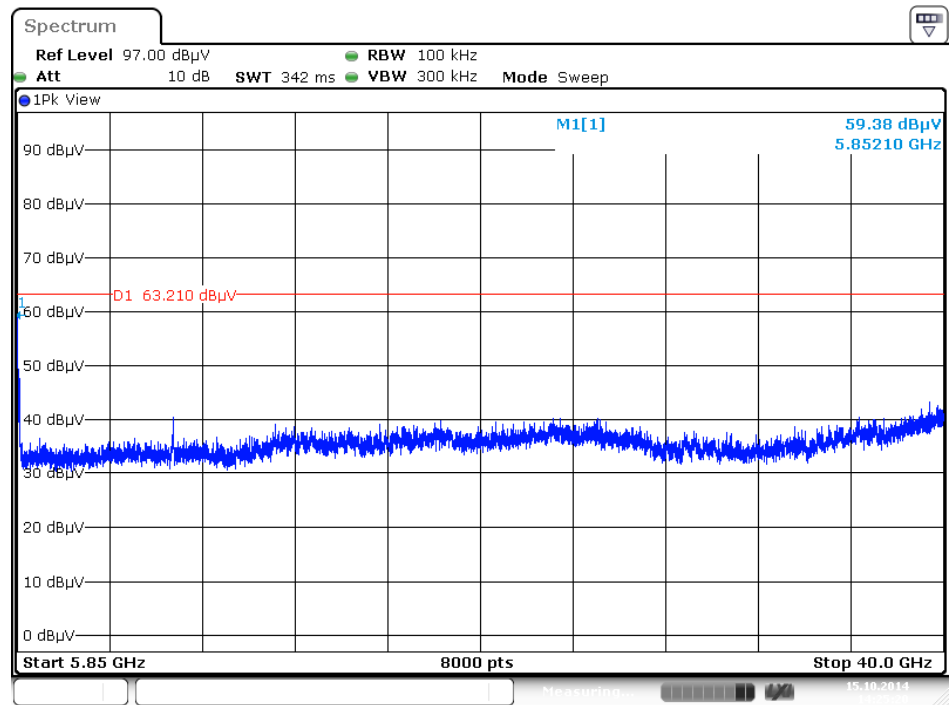


Date: 15.0 CT 2014 14:25:20

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

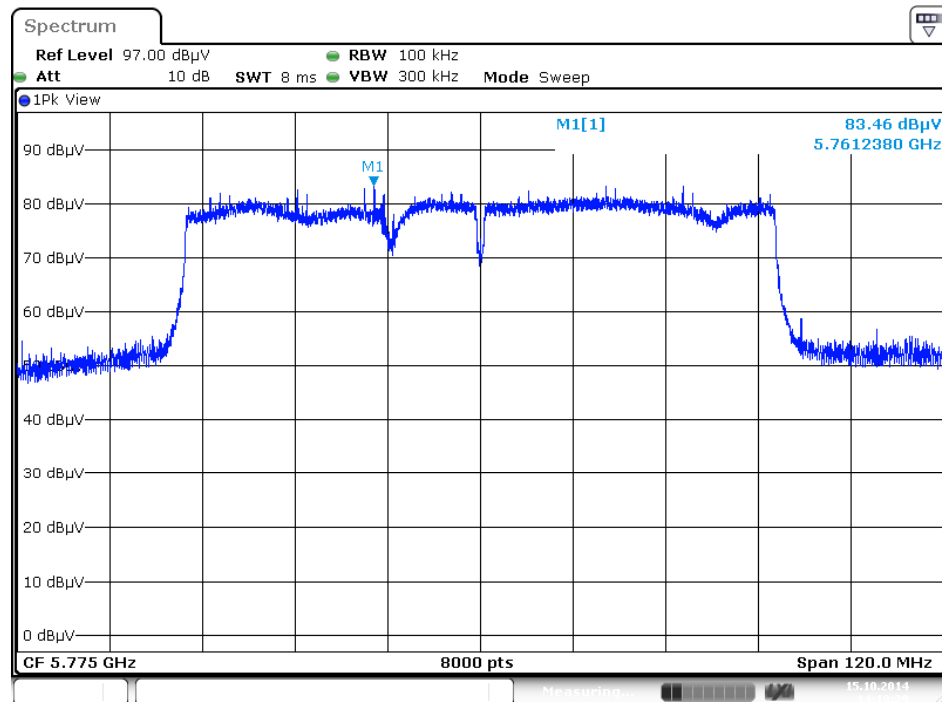


Date: 15.0 CT 2014 14:19:29

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

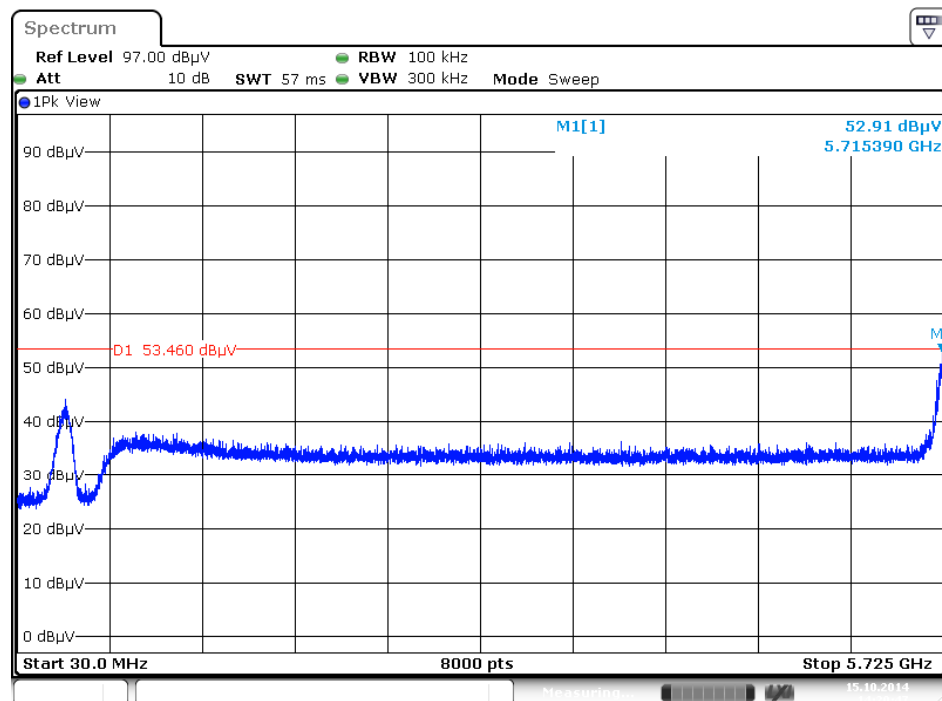

Date: 15.0 CT 2014 14:20:47

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

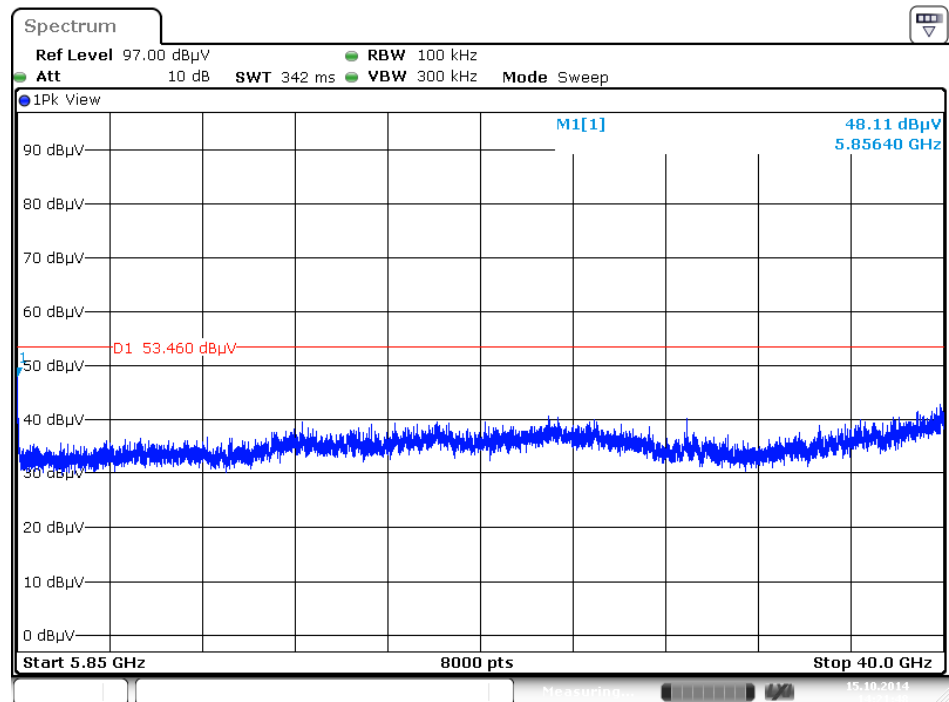

Date: 15.0 CT 2014 14:21:49

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Apr. 22, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Callibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%