



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS II PERMISSIVE CHANGE

Test report file number : E02DR-040

Applicant : Eastern Technology, Inc.
Address : 380-5 Chongchon-Dong, Pupyong-Gu, Incheon-City, 403-032, Korea

Manufacturer : Eastern Technology, Inc.
Address : 380-5 Chongchon-Dong, Pupyong-Gu, Incheon-City, 403-032, Korea

Type of Equipment : 18.1" TFT LCD Monitor with TV

FCC ID. : PDKET-1801TA

Model / Type No. : ET-1801TA

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : December 05, 2002

Date of issue : December 20, 2002


SUMMARY

The equipment complies with the regulation; **PART 15 SUBPART B, Class B Computing Device Peripherals.**

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:


G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by:


Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	11
7. LIST OF TEST EQUIPMENT.....	13

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : Eastern Technology, Inc.
ADDRESS : 380-5 Chongchon-Dong, Pupyong-Gu, Inchon-City, 403-032, Korea
CONTACT PERSON : H. K. PARK / Manager
TELEPHONE NO : +82-32-500-3177
FCC ID : PDKET-1801TA
MODEL NO/NAME : ET-1801TA
SERIAL NUMBER : N/A
DATE : December 20, 2002

DEVICE TYPE	Peripheral Device for Class B Computing Device -UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	18.1" TFT LCD Monitor with TV
THIS REPORT CONCERNS	CLASS II PERMISSIVE CHANGE
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART (S)	FCC PART 15 SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

**2. GENERAL INFORMATION****2.1 Product Description**

The Eastern Technology, Inc., Model ET-1801TA (referred to as the EUT in this report) is a 18.1" TFT LCD Monitor with TV, which consist of the TV tuner, Component Video and Audio Input terminals, Video and Audio Input terminals, S-Video terminal, Headphone jack and Surround Out terminal as well as basic PC monitor. The Verification report for the TV Tuner shall be issued with other test report numbers. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic – Non coated
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	12.0 MHz, 14.318 MHz, 18.432 MHz, 20.25 MHz
RESOLUTION	1280 x 1024, 75Hz
POWER REQUIREMENT	Input: 100-240VAC, 50/60Hz, 1.5A / Output: 12VDC, 5.0A, 60W
USED AC/DC ADAPTER	LSE9901B1260 manufactured by Li Shin International Enterprise Corp.
NUMBER OF LAYERS	Main Board: 4 Layers, Control Board: 1 Layer Inverter Board: 2 Layers, Tuner Board: 1 Layer
TV TUNER Type NO. / MFR	N15C001Z / WooSung PRE IND. Co., Ltd.
LCD PANEL Type NO. / MFR	LM181E06 / LG Philips Ltd.
EXTERNAL CONNECTORS	PC Video Input, Tuner connector, Audio input, Video Input, DC Inlet, S-Video, PC Audio Input, Head Phone Port, Speaker Out

Model Differences:

	Model	Model Differences
Basic Model	ET-1801TA	-
Added Model	ET-1801TK	Model Name in Korea
	ET-1801TJ	Model Name in Japan

2.2 Related Submittal(s) / Grant(s)

-. Class II Permissive Chang

- 1) The LCD Panel Model No, LM181ES was manufactured by LG Philips Ltd was changed to Model No, LM181E06 was manufactured by LG Philips Ltd
- 2) Inverter Model No: HK-1700LB was manufactured by HanKook Tech Co., Ltd was changed to Model No, DS-1800WC was manufactured by DS-Plus Inc.



2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	Description	FCC ID	Connected to
ET-1801TA	Eastern Technology, Inc.	18.1" TFT LCD Monitor with TV (EUT)	PDKET-1801TA	PC
GX240	Dell Computer Corp.	PERSONAL COMPUTER	DoC	N/A
GHV-S9990	GOLDSTAR	VCR	N/A	EUT
5530KP	BTC Korea	KEYBOARD	DoC	PC
P801	KYE Systems Corp.	MOUSE	FSUGMZFT	PC
2225C	HP	PRINTER	DSI6XU2225	PC
020-0470	CARDINAL	MODEM	GDE0196	PC
N/A	N/A	REMOCON	N/A	N/A
SMS-015N	Sungil Precision	SPEAKER	N/A	EUT
LSE9901B1260	Li Shin International	AC/DC ADAPTER	N/A	EUT

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Woosung PRE IND. Co., Ltd.	1801T_MAIN	N/A
LCD Module	LG PHILIPS LTD.	LM181E06	N/A
Tuner Board	Woosung PRE IND. Co., Ltd.	N15C001Z	N/A
Inverter Board	DS-Plus Inc	DS-1008WC	N/A
Control Board	Oh-Sung Electronics Co., Ltd.	1801T_CONTROL	N/A

3.2 EUT exercise Software

The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. Once loaded, this program sequentially exercises each system component in turn. The sequence used is: (1) series of “H” characters are printed on the monitor until the screen is completely full, (2) copy series of “H” characters to mass storage device (if one is used), (3) print series of “H” characters to printer. The complete cycle is repeated continuously.

The EUT has multiple same RCA audio/video input ports, so all RCA audio/video cables were connected to the EUT.

The one of multiple audio/video cables were connected to the peripheral device, but the other cables were not terminated.

The investigated resolution mode of the EUT was 1280 X 1024, 75Hz.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
18.1" TFT LCD Monitor with TV (EUT)	N	Y	1.8(P), 1.2(D)
PERSONAL COMPUTER	N	Y	1.8(P), 1.2(D)
VCR	N	N	1.8(P), 1.0(D)
KEYBOARD	N/A	Y	1.2(D)
MOUSE	N/A	Y	1.2(D)
PRINTER	N	Y	1.8(P), 1.2(D)
MODEM	N	Y	1.8(P), 1.2(D)
SPEAKER	N/A	N	1.5(D)
AC/DC ADAPTER	N	N/A	1.5(P)

* The marked “(D)” means the Data Cable and “(P)” means the Power Cable.



3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
18.1" TFT LCD Monitor with TV (EUT)	Y	BOTH END	Y	BOTH END
PERSONAL COMPUTER	N	N/A	-	-
VCR	N	N/A	Y	BOTH END
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END
SPEAKER	N	N/A	Y	EUT END
AC/DC ADAPTER	Y	EUT END	Y	EUT END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was connected to AC/DC adapter and the adapter was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

**4. PRELIMINARY TEST****4.1 AC Power line Conducted Emission Test**

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	
Resolution: 800 x 600	
Resolution: 1024 x 768	
Resolution: 1280 x 1024	X
Video Operation Mode	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	
Resolution: 800 x 600	
Resolution: 1024 x 768	
Resolution: 1280 x 1024	X
Video Operation Mode	

**5. FINAL RESULT OF MEASUREMENT**

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission TestHumidity Level : 40 %Temperature : 17°CLimits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107Type of Test : CLASS BResult : PASSED BY – 3.74 dB at 0.175 MHz

EUT : 18.1" TFT LCD Monitor with TV

Date : December 11, 2002

Operating Condition : Continuously displayed “H” characters on the screen of EUT, Resolution : 1280 X 1024, 75Hz

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission Level	Detector Mode	Limits		Emission level	Limits	
0.175	H	60.98	P	64.72	-3.74	45.63	54.72	-9.09
0.235	H	51.45	P	62.27	-10.82	38.99	52.27	-13.28
2.320	N	44.05	P	56.00	-11.95	39.71	46.00	-6.29
3.150	N	47.48	P	56.00	-8.52	41.38	46.00	-4.62
3.215	H	46.17	P	56.00	-9.83	33.30	46.00	-12.70
3.645	N	49.77	P	56.00	-6.23	41.78	46.00	-4.22
3.855	H	48.80	P	56.00	-7.20	33.21	46.00	-12.79
4.250	N	51.04	P	56.00	-4.96	39.21	46.00	-6.79

Line Conducted Emission Tabulated Data


Tested by: Hyun-Suck, Lee / Test Engineer

This report shall not be reproduced except in full without our written approval.

FCC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500 FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Si, Kyungki-Do, 464-860, Korea. (TEL: +82-31-765-8289 FAX: +82-31-766-2904)

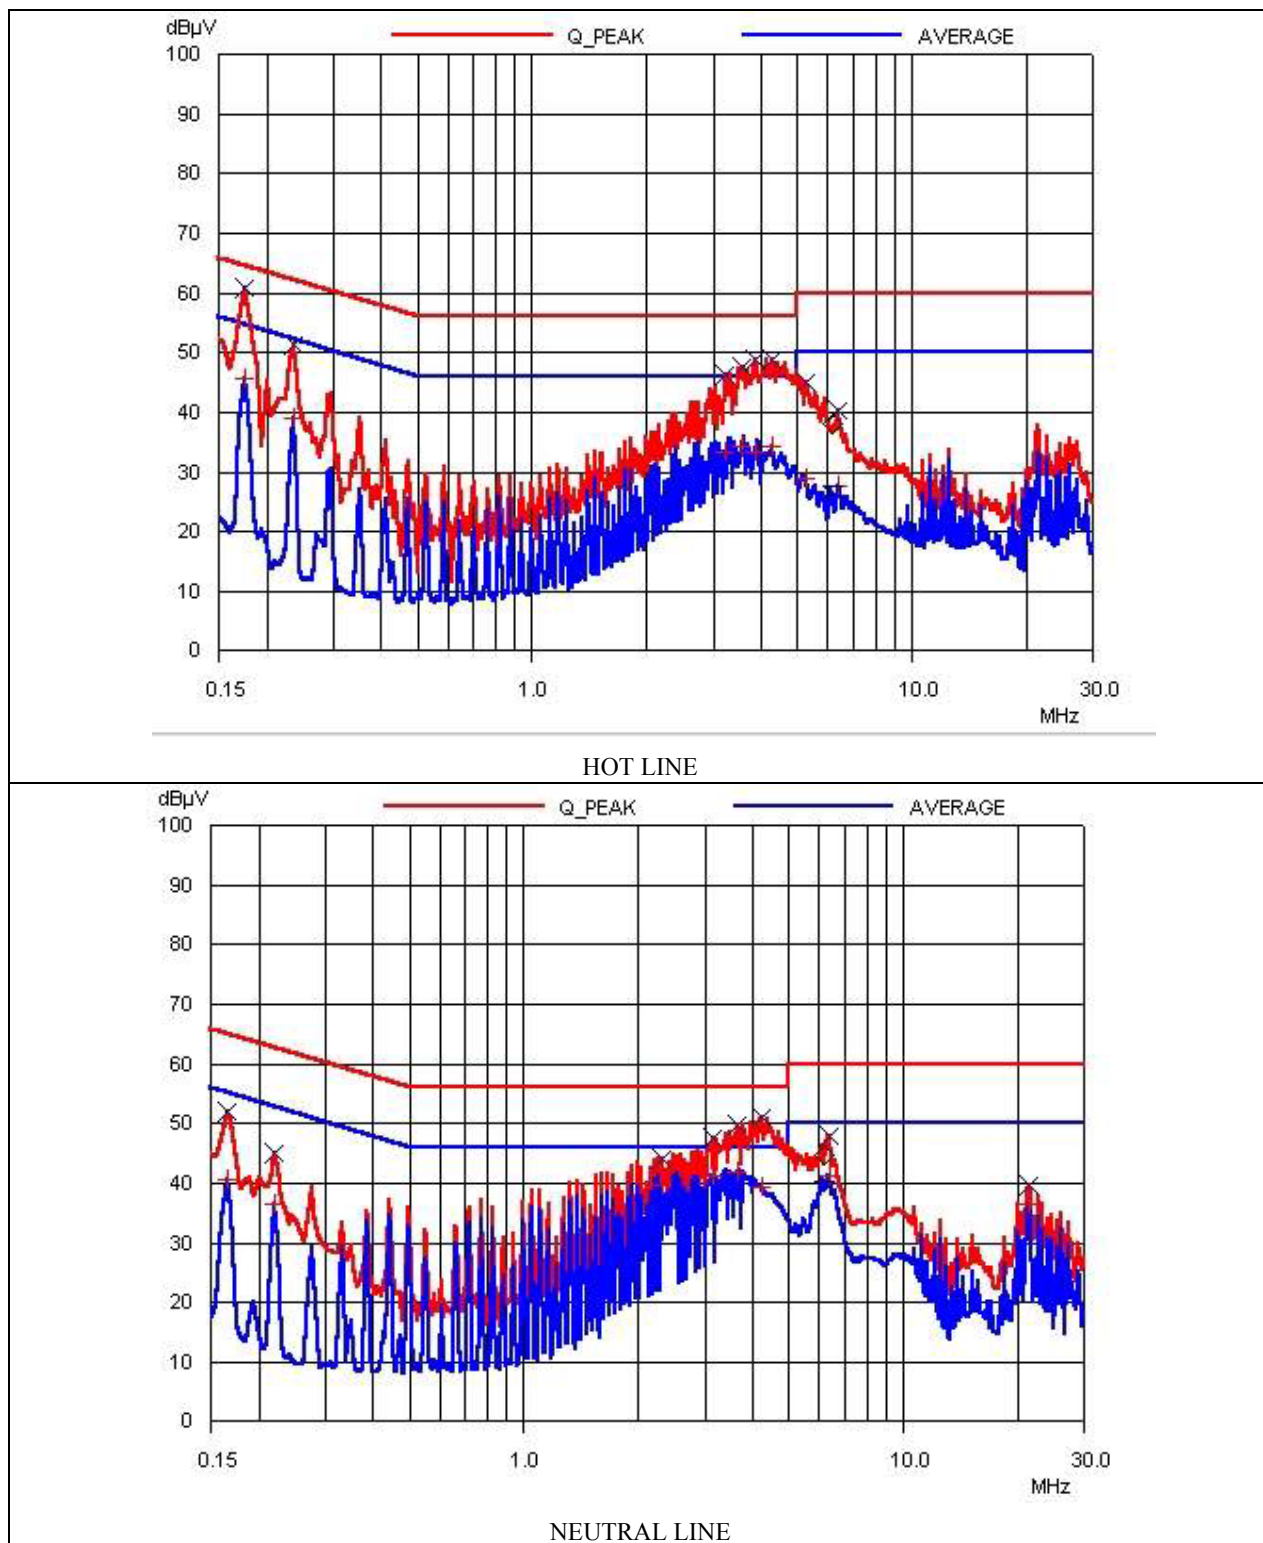

**5.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 40 % Temperature : 13°C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109
 Type of Test : CLASS B
 Result : PASSED BY -3.11 dB at 647.60 MHz

EUT : 18.1" TFT LCD Monitor with TV Date: December 12, 2002
 Operating Condition : Continuously displayed "H" characters on the screen of EUT, Resolution : 1280 X 1024,
 75Hz Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
72.30	23.80	V	7.36	1.00	32.16	40.00	-7.84
85.10	25.10	V	7.53	1.10	33.73	40.00	-6.27
108.17	19.90	V	12.76	1.19	33.85	43.50	-9.65
134.66	19.90	V	12.77	1.29	33.96	43.50	-9.54
194.51	16.80	H	16.68	1.54	35.02	43.50	-8.48
533.00	17.70	V	17.70	2.74	38.14	46.00	-7.86
552.80	17.20	V	18.11	2.78	38.09	46.00	-7.91
594.20	19.30	H	18.67	2.89	40.89	46.00	-5.14
625.60	19.30	H	19.23	3.00	41.53	46.00	-4.47
647.60	19.90	H	19.92	3.07	42.89	46.00	-3.11
987.20	11.50	H	24.21	4.19	39.90	54.00	-14.10

Radiated Emission Tabulated Data

Tested by: **Hyun-Suck, Lee / Test Engineer**



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/02	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APR/02	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/02	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/02	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	JUN/02	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/02	12MONTH	■
10.	RF Amplifier	HP	8447F	3113A04554	JUN/02	N/A	
11.	Spectrum Analyzer	HP	8591A	3131A02312	APR/02	12MONTH	
12.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
14.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
15.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
16.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■