



FCC

RF Test Report

Product Name: Smart Phone

Model Number: H1511

Report No: SYBH(Z-RF)011072015-2001

FCC ID: QISH1511

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Sample: 2015-07-20
Start Date of Test: 2015-07-20
End Date of Test: 2015-09-08

Test Result: Pass

Approved by Senior Engineer:	2015-09-10	Liu Chunlin	
	Date	Name	Signature

Prepared by:	2015-09-10	maowenli	
	Date	Name	Signature



Modification Record

No.	Last Report No.	Modification Description
1		First report.

CONTENT

1	General Information	6
1.1	Applied Standard	6
1.2	Test Location	6
1.3	Test Environment Condition	6
2	Test Summary	7
2.1	Cellular Band (824-849 MHz paired with 869-894 MHz)	7
2.2	PCS Band (1850-1910 MHz paired with 1930-1990 MHz)	8
2.3	AWS Band (1710-1755 MHz paired with 2110-2155 MHz)	9
2.4	BRS&EBS Band7 (2500-2570 MHz paired with 2620-2690 MHz)	10
2.5	BRS&EBS Band41 (2496-2690 MHz paired with 2496-2690 MHz)	11
2.6	Band12 (699-716MHz paired with 729-746 MHz)	12
2.7	Band13 (777-787MHz paired with 746-756 MHz)	13
2.8	Band17 (704-716MHz paired with 734-746 MHz)	14
2.9	Band26 lower (814-824 MHz paired with 859-869MHz)	15
2.10	Band25 (1850-1915 MHz paired with 1930-1995MHz)	16
2.11	WCS Band (2305-2315 MHz paired with 2350-2360 MHz)	17
2.12	Band 10 (816-824 MHz paired with 861-869 MHz)	18
3	Description of the Equipment under Test (EUT)	19
3.1	General Description	19
3.2	EUT Identity	19
3.3	Technical Specification	21
4	General Test Conditions / Configurations	26
4.1	Test Modes	26
4.2	Test Environment	26
4.3	Test Frequency	27
4.4	Description of tests	39
4.5	Test Setups	42
4.6	Test Conditions	44
5	Main Test Instruments	46
6	Measurement Uncertainty	47

1 General Information

1.1 Applied Standard

Applied Rules:

- 47 CFR FCC Part 02: 2014
- 47 CFR FCC Part 22: 2014
- 47 CFR FCC Part 24: 2014
- 47 CFR FCC Part 27: 2014
- 47 CFR FCC Part 90: 2014

Test Method: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

1.2 Test Location

Test Location : Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Test Environment Condition

Ambient Temperature: 19.5 to 25 °C
Ambient Relative Humidity: 40 to 55 %
Atmospheric Pressure: Not applicable

2 Test Summary

2.1 Cellular Band (824-849 MHz paired with 869-894 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W. IC: EIRP ≤ 11.5 W.	Appendix A	Pass
Peak-Average Ratio	---	IC: Limit≤13 dB	Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. IC: ≤ -13 dBm/100 kHz (for EBW ≤ 4 MHz) or ≤ -13 dBm/1 MHz (for EBW > 4 MHz), from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz. IC: ≤ -13 dBm/100 kHz (for EBW ≤ 4 MHz) or ≤ -13 dBm/1 MHz (for EBW > 4 MHz).	Appendix G	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

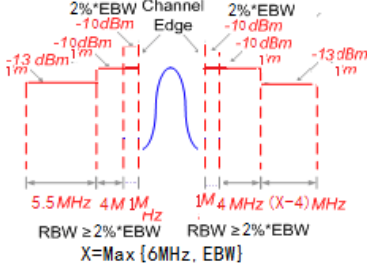
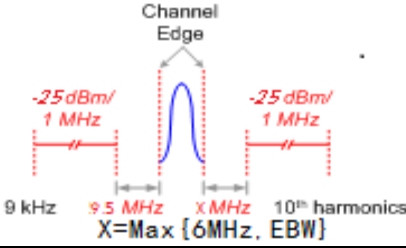
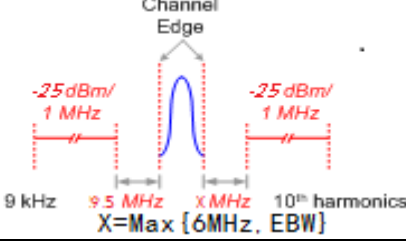
2.2 PCS Band (1850-1910 MHz paired with 1930-1990 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Appendix A	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC: Limit ≤ 13 dB	Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Appendix G	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block. IC: $\leq \pm 2.5$ ppm.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

2.3 AWS Band (1710-1755 MHz paired with 2110-2155 MHz)




Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	$EIRP \leq 1\text{ W}$	Appendix A	Pass
Peak-Average Ratio	§2.1046, §27.50(d)	FCC: Limit $\leq 13\text{ dB}$	Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\% \cdot \text{EBW}$, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$, from 9 kHz to 10^{th} harmonics but outside authorized operating frequency ranges.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$.	Appendix G	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

2.4 BRS&EBS Band7 (2500-2570 MHz paired with 2620-2690 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Appendix A	Pass
Peak-Average Ratio	---	---	Appendix B	N/T
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §27.53(m)	FCC: 	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)		Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)		Appendix G	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass

NOTE 1: For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.

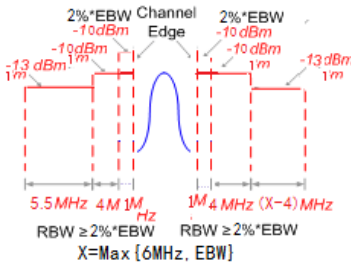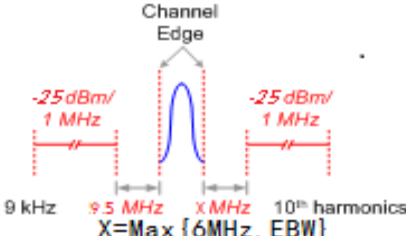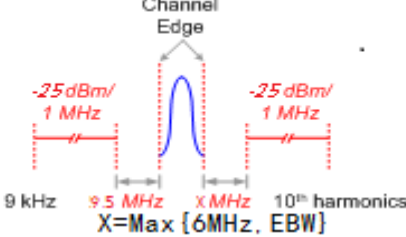2.5 BRS&EBS Band41 (2496-2690 MHz paired with 2496-2690 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Appendix A	Pass
Peak-Average Ratio	---	---	Appendix B	N/T
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §27.53(m)	FCC: 	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)		Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)		Appendix G	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass

NOTE 1: For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.

2.6 Band12 (699-716MHz paired with 729-746 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	FCC Rule No.	FCC: ERP $\leq$ 3 W. 698-716MHz (block A-, B-, C-) :Average EIRP Power $\leq$ 50 W. PAPR $\leq$ 13 dB@0.1%.	Appendix A	Pass
Peak-Average Ratio	§2.1046, §27.50(c)	---	Appendix B	Pass
Modulation Characteristics	---	Digital modulation	Appendix C	Pass
Bandwidth	§2.1047	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1049,	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: $\leq$ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1051, §27.53(g)	FCC: $\leq$ -13 dBm/100 kHz.	Appendix G	Pass
Frequency Stability	§2.1053, §27.53(g)	$\leq \pm 2.5$ ppm.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

2.7 Band13 (777-787MHz paired with 746-756 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (NOTE 1)
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)	FCC: $ERP \leq 3 \text{ W}$.	Appendix A	Pass
Peak-Average Ratio	---	---	Appendix B	N/T
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §27.53(c)	$\leq -13 \text{ dBm}/1\% \cdot \text{EBW}$, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c)	FCC: $\leq -13 \text{ dBm}/100 \text{ kHz}$, from 9 kHz to 10^{th} harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P) \text{ dB}$ in a 6.25 kHz band segment, for mobile and portable stations.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c)	FCC: $\leq -13 \text{ dBm}/100 \text{ kHz}$.	Appendix G	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass
NOTE 1: For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.				

2.8 Band17 (704-716MHz paired with 734-746 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	FCC Rule No.	FCC: ERP $\leq$ 3 W. 698-716MHz (block A-, B-, C-) :Average EIRP Power $\leq$ 50 W. PAPR $\leq$ 13 dB@0.1%.	Appendix A	Pass
Peak-Average Ratio	§2.1046, §27.50(c)	---	Appendix B	Pass
Modulation Characteristics	---	Digital modulation	Appendix C	Pass
Bandwidth	§2.1047	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1049,	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: $\leq$ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1051, §27.53(g)	FCC: $\leq$ -13 dBm/100 kHz.	Appendix G	Pass
Frequency Stability	§2.1053, §27.53(g)	$\leq \pm 2.5$ ppm.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				


2.9 Band26 lower (814-824 MHz paired with 859-869MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635	< 100 W.	Appendix A	PASS
Peak-Average Ratio	---	---	Appendix B	N/T
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	PASS
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	PASS
Band Edges Compliance	§2.1051, §90.691	$< 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	Appendix E	PASS
Spurious Emission at Antenna Terminals	§2.1051, §90.691	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	Appendix F	PASS
Field Strength of Spurious Radiation	§2.1053, §90.691	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	Appendix G	PASS
Frequency Stability	§2.1055, §90.213	< ±2.5ppm.	Appendix H	PASS
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

2.10 Band25 (1850-1915 MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	$EIRP \leq 2\text{ W}$	Appendix A	PASS
Peak-Average Ratio	§2.1046, §24.232	FCC: Limit $\leq 13\text{ dB}$	Appendix B	PASS
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	PASS
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	PASS
Band Edges Compliance	§2.1051, §24.238	$\leq -13\text{ dBm}/1\% \cdot \text{EBW}$, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	PASS
Spurious Emission at Antenna Terminals	§2.1051, §24.238	$\leq -13\text{ dBm}/1\text{ MHz}$, from 9 kHz to 10^{th} harmonics but outside authorized operating frequency ranges.	Appendix F	PASS
Field Strength of Spurious Radiation	§2.1053, §24.238	$\leq -13\text{ dBm}/1\text{ MHz}$.	Appendix G	PASS
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block. IC: $\leq \pm 2.5\text{ ppm}$.	Appendix H	PASS
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

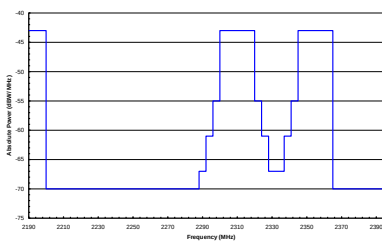2.11 WCS Band (2305-2315 MHz paired with 2350-2360 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(a), §27.53(a)	EIRP PD $\leq$ 20 W/5 MHz (for 2305-2320MHz, 2345-2360MHz).	Appendix A	Pass
Peak-Average Ratio	§2.1046,	Limit $\leq$ 13 dB	Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass
Bandwidth	§2.1049, §27.53(a)	OBW: No limit. EBW: No limit.	Appendix D	Pass
Band Edges Compliance	§2.1051, §27.53(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)	Figure 1: Unwanted Emissions for Mobile, Portable, and Low Power Fixed Subscriber Equipment 	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(a)	≤ -13 dBm/1 MHz.	Appendix G	Pass
Frequency Stability	§2.1055, §27.54	within the range of the operating frequency blocks	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

2.12 Band 10 (816-824 MHz paired with 861-869 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (NOTE 2)
Transmit Output Power Data	§2.1046, §90.205 §90.635	ERP ≤ 100W	Appendix A	Pass
Peak-Average Ratio	---	---	Appendix B	N/T
Modulation Characteristics	§2.1047	Not applicable	Appendix C	Pass
Bandwidth	§2.1049, §90.209	Upper /lower frequency limits :0.5% of the mean power	Appendix D	Pass
Band Edges Compliance	§2.1051, §90.210	≤ -13 dBm	Appendix E	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.210 §90.669	≤ -13 dBm	Appendix F	Pass
Field Strength of Spurious Radiation	§2.1053, §90.210	-13 dBm	Appendix G	Pass
Frequency Stability	§2.1055, §90.213	≤ ±2.5ppm.	Appendix H	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

3 Description of the Equipment under Test (EUT)

3.1 General Description

H1511 is subscriber equipment in the LTE/WCDMA/CDMA/GSM system. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The HSPA+/UMTS frequency band is Band I and Band II and Band IV and Band V. The CDMA/1XEV-DO band is BC1 and BC0 and BC10. The LTE frequency band is B2 and B3 and B4 and B5 and B7 and B12 and B13 and B17 and B25 and B26 and B29 and B30 and B41. But only GSM850 and GSM1900MHz and WCDMA Band II and Band IV and Band V and CDMA BC1 and BC0 and BC10 and LTE B2 and LTE B4 and LTE B5 and LTE B7 and LTE B12 and LTE B13 and LTE B17 and LTE B25 and LTE B26 and B30 and LTE B41 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE and CDMA2000 1x and 1XEV-DO protocol processing, voice, video MMS service, GPS, AGPS NFC and WIFI etc. Externally it provides micro SD card interface (it can also used as micro SD card interface), earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main board of Mobile Phone : HL1NINAMH	HL1NINAMH	User release M MDA

3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-050300U00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300E00	Huawei Technologies	Input Voltage: ~100-240V 50/60Hz 0.5A

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
		Co., Ltd.	Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300B00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300A00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300J00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300R00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Adapter	HW-050300I00	Huawei Technologies Co., Ltd.	Input Voltage: ~100-240V 50/60Hz 0.5A Output Voltage: 5V  3A Rated Power: 5W
Battery	HB416683ECW	Huawei Technologies Co., Ltd.	Rated capacity: 3450mAh Nominal Voltage:  +3.8V Charging Voltage:  +4.35V

3.3 Technical Specification

Characteristics	Description	
Radio System Type	☒ CDMA ☒ GSM ☒ UMTS ☒ LTE	
Supported Frequency Range	CDMA BC0	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	CDMA BC1	Transmission (TX): 1850 to 1910 MHz
		Receiving (RX): 1930 to 1990 MHz
	CDMA BC10	Transmission (TX): 816 to 824 MHz
		Receiving (RX): 861 to 869 MHz
	GSM850/ WCDMA850	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	GSM1900/ WCDMA1900	Transmission (TX): 1850 to 1910 MHz
		Receiving (RX): 1930 to 1990 MHz
	WCDMA1700	Transmission (TX): 1710 to 1755 MHz
		Receiving (RX): 2110 to 2155 MHz
	LTE BAND2	Transmission (TX): 1850 to 1910 MHz
		Receiving (RX): 1930 to 1990 MHz
	LTE BAND4	Transmission (TX): 1710 to 1755 MHz
		Receiving (RX): 2110 to 2155 MHz
	LTE BAND5	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	LTE BAND7	Transmission (TX): 2500 to 2570 MHz
		Receiving (RX): 2620 to 2690 MHz
	LTE BAND12	Transmission (TX): 699 to 716 MHz
		Receiving (RX): 729 to 746 MHz
	LTE BAND13	Transmission (TX): 777 to 787 MHz
		Receiving (RX): 746 to 756 MHz
	LTE BAND17	Transmission (TX): 704 to 716 MHz
		Receiving (RX): 734 to 746 MHz
	LTE BAND25	Transmission (TX): 1850 to 1915MHz
		Receiving (RX): 1930 to 1995 MHz
	LTE band26(814 to 824 MHz)	Transmission (TX): 814 to 824MHz
		Receiving (RX): 859 to 869MHz
	LTE band26(824 to 849 MHz)	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	LTE Band 30(2305 to 2315 MHz)	Transmission (TX): 2305 to 2315 MHz
		Receiving (RX): 2350 to 2360 MHz
	LTE BAND41	Transmission (TX): 2496 to 2690 MHz

Characteristics	Description	
		Receiving (RX): 2496 to 2690 MHz
TX and RX Antenna Ports	TX & RX port:	1
	TX-only port:	0
	RX-only port:	1
Target TX Output Power	CDMA BC0: 24dBm CDMA BC1: 23.4dBm CDMA BC10: 24dBm GSM850: 32.5dBm GSM1900 30dBm UMTS850 23.5dBm UMTS1900: 22dBm UMTS1700: 22dBm LTE BAND2: 21.8dBm LTE BAND4: 22dBm LTE BAND5: 22.5 dBm LTE BAND7: 22.5dBm LTE BAND12: 22.5dBm LTE BAND13: 22.5dBm LTE BAND17: 22.5 dBm LTE BAND25: 21.7dBm LTE band 26(814 to 824 MHz): 22.5 dBm LTE band 26(824 to 849 MHz): 22.5 dBm LTE Band 30(2305 to 2315 MHz):21.7 dBm LTE BAND41: 21.7dBm	
Supported Channel Bandwidth	CDMA system:	☒ 1.25 MHz
	GSM system:	☒ 200 kHz
	UMTS system:	☒ 5 MHz
	LTE band 2	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz, ☒ 20 MHz
	LTE band 4	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz, ☒ 20 MHz
	LTE band 5	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz
	LTE band 7	☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz, ☒ 20 MHz
	LTE band 12	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz
	LTE band 13	☒ 5 MHz, ☒ 10 MHz
	LTE band 17	☒ 5 MHz, ☒ 10 MHz
	LTE band 25	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz, ☒ 20 MHz
	LTE band 26(814 to 824MHz)	☒ 1.4 MHz ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz
	LTE band 26(824 to 849MHz)	☒ 1.4 MHz, ☒ 3 MHz, ☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz,

Characteristics	Description	
	LTE Band 30(2305 to 2315 MHz)	☒ 5 MHz, ☒ 10 MHz
	LTE band 41	☒ 5 MHz, ☒ 10 MHz, ☒ 15 MHz, ☒ 20 MHz
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	CDMA BC 0	1M30F6W
	CDMA BC 1	1M30F6W
	CDMA BC 10	1M29F6W
	GSM850:	244KGXW, 247KG7W
	GSM1900:	248KGXW, 245KG7W
	UMTS850:	4M15F9W
	UMTS1900:	4M14F9W
	UMTS1700:	4M14F9W
	LTE BAND2:	1M09G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)
	LTE BAND4:	1M09G7D (1.4 MHz QPSK modulation), 1M09 W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M50W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)
	LTE BAND5:	1M09G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M701G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M50W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation),

Characteristics	Description	
		9M00W7D (10 MHz 16QAM modulation)
	LTE BAND7:	4M50G7D (5 MHz QPSK modulation), 4M50W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)
	LTE BAND12:	1M09G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M50DW7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation)
	LTE BAND13:	4M50G7D (5 MHz QPSK modulation), 4M50W7D (5 MHz 16QAM modulation) 8M98G7D (10 MHz QPSK modulation), 8M97W7D (10 MHz 16QAM modulation)
	LTE BAND17:	4M50G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M98G7D (10 MHz QPSK modulation), 8M97W7D (10 MHz 16QAM modulation)
	LTE BAND25	1M09G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)
	LTE band 26(814 to 824 MHz)	1M09G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation)

Characteristics	Description	
		9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation)
	LTE band 26(824 to 849 MHz)	1M09G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M70G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M50G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation)
	LTE Band 30(2305 to 2315 MHz)	4M50G7D (5 MHz QPSK modulation), 4M50W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation)
	LTE BAND41	4M49G7D (5 MHz QPSK modulation), 4M49W7D (5 MHz 16QAM modulation) 9M00G7D (10 MHz QPSK modulation), 9M00W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

4 General Test Conditions / Configurations

4.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode	Test Modes Description
CDMA/TM1	CDMA2000 1x mode QPSK modulation
CDMA/TM3	CDMA2000 1x mode HPSK modulation
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EDGE, 8PSK modulation
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

4.2 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.8V
	VH	4.35V

NOTE: VL= lower extreme test voltage
VN= nominal voltage
VH= upper extreme test voltage
TN= normal temperature

4.3 Test Frequency

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
CDMA BC0	TX	Channel 1013	Channel 384	Channel 777
		824.7MHz	836.52MHz	848.31MHz
	RX	Channel 1013	Channel 384	Channel 777
		869.7MHz	881.52MHz	893.31MHz
CDMA BC1	TX	Channel 25	Channel 600	Channel 1175
		1851.25MHz	1880.0MHz	1908.75MHz
	RX	Channel 25	Channel 600	Channel 1175
		1931.25MHz	1960.0MHz	1988.75MHz
CDMA BC10	TX	Channel 476	Channel 580	Channel 684
		817.9MHz	820.5MHz	823.1MHz
	RX	Channel 476	Channel 580	Channel 684
		862.9MHz	865.5MHz	868.1MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6MHz	848.8MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2MHz	881.6MHz	893.8MHz
WCDMA850	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4MHz	846.6MHz
	RX	Channel 4357	Channel 4407	Channel 4458

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
		871.4MHz	881.4MHz	891.6MHz
Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0MHz	1909.8MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz
WCDMA1900	TX	Channel 9262	Channel9400	Channel9538
		1852.4MHz	1880.0MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA1700	TX	Channel1312	Channel1413	Channel1513
		1712.4MHz	1732.6MHz	1752.6MHz
	RX	Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX(1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX(3M)	Channel 18615	Channel 18900	Channel 19185

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX(5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX(10M)	Channel 18650	Channel 18900	Channel 19150
		1855 MHz	1880 MHz	1905 MHz
	TX(15M)	Channel 18675	Channel 18900	Channel 19125
		1857.5 MHz	1880 MHz	1902.5 MHz
	TX(20M)	Channel 18700	Channel 18900	Channel 19100
		1860 MHz	1880 MHz	1900 MHz
	RX(1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX(3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX(5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX(10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz
	RX(15M)	Channel 675	Channel 900	Channel 1125
		1937.5 MHz	1960 MHz	1982.5 MHz
	RX(20M)	Channel 700	Channel 900	Channel 1100
		1940 MHz	1960 MHz	1980 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX(1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX(3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX(5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX(10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX(15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX(20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX(1.4M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5MHz	2152.5 MHz
	RX(3M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5MHz	2150 MHz
	RX(5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5MHz	2152.5 MHz
	RX(10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5MHz	2150 MHz
	RX(15M)	Channel 2025	Channel 2175	Channel 2325
		2117.5 MHz	2132.5MHz	2147.5 MHz
	RX(20M)	Channel 2050	Channel 2175	Channel 2300
		2120 MHz	2132.5MHz	2145 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 5	TX(1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	TX(3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	TX(5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	TX(10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX(1.4M)	Channel 2407	Channel 2525	Channel 2643
		869.7 MHz	881.5 MHz	893.3 MHz
	RX (3M)	Channel 2415	Channel 2525	Channel 2635
		870.5 MHz	881.5 MHz	892.5 MHz
	RX(5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX (5M)	Channel 20775	Channel 21100	Channel 21425
		2502.5 MHz	2535 MHz	2567.5 MHz
	TX (10M)	Channel 20800	Channel 21100	Channel 21400
		2505 MHz	2535 MHz	2565 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	TX (15M)	Channel 20825	Channel 21100	Channel 21375
		2507.5 MHz	2535 MHz	2562.5 MHz
	TX (20M)	Channel 20850	Channel 21100	Channel 21350
		2510 MHz	2535 MHz	2560 MHz
	RX (5M)	Channel 2775	Channel 3100	Channel 3425
		2622.5 MHz	2655 MHz	2687.5 MHz
	RX (10M)	Channel 2800	Channel 3100	Channel 3400
		2625 MHz	2655 MHz	2685 MHz
	RX (15M)	Channel 2825	Channel 3100	Channel 3375
		2627.5 MHz	2655 MHz	2682.5 MHz
	RX (20M)	Channel 2850	Channel 3100	Channel 3350
		2630 MHz	2655 MHz	2680 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX(1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	TX(3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	TX(5M)	Channel 23035	Channel 23095	Channel 23155
		701.5 MHz	707.5 MHz	713.5 MHz
	TX(10M)	Channel 23060	Channel 23095	Channel 23130
		704 MHz	707.5 MHz	711 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	RX(1.4M)	Channel 5017	Channel 5095	Channel 5173
		729.7 MHz	737.5 MHz	745.3 MHz
	RX (3M)	Channel 5025	Channel 5095	Channel 5165
		730.5 MHz	737.5 MHz	744.5 MHz
	RX(5M)	Channel 5035	Channel 5095	Channel 5155
		731.5 MHz	737.5 MHz	743.5 MHz
	RX (10M)	Channel 5060	Channel 5095	Channel 5130
		734 MHz	737.5 MHz	741 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 13	TX(5M)	Channel 23205	Channel 23230	Channel 23255
		779.5 MHz	782 MHz	784.5 MHz
	TX(10M)	Channel 23230	Channel 23230	Channel 23230
		782 MHz	782 MHz	782 MHz
	RX(5M)	Channel 5205	Channel 5230	Channel 5255
		748.35 MHz	751 MHz	753.5 MHz
	RX (10M)	Channel 5230	Channel 5230	Channel 5230
		751 MHz	751 MHz	751 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 17	TX (5M)	Channel 23755	Channel 23790	Channel 23825
		706.5 MHz	710 MHz	713.5 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	TX (10M)	Channel 23780	Channel 23790	Channel 23800
		709 MHz	710 MHz	711 MHz
	RX (5M)	Channel 5755	Channel 5790	Channel 5825
		736.5 MHz	740 MHz	743.5 MHz
	RX (10M)	Channel 5780	Channel 5790	Channel 5800

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 25	TX (1.4M)	Channel 26047	Channel 26365	Channel 26683
		1850.7	1882.5	1914.3
	TX (3M)	Channel 26055	Channel 26365	Channel 26675
		1851.5	1882.5	1913.5
	TX (5M)	Channel 26065	Channel 26365	Channel 26665
		1852.5	1882.5	1912.5
	TX (10M)	Channel 26090	Channel 26365	Channel 26640
		1855	1882.5	1910
	TX (15M)	Channel 26115	Channel 26365	Channel 26615
		1857.5	1882.5	1907.5
	TX (20M)	Channel 26140	Channel 26365	Channel 26590
		1860	1882.5	1905
	RX (1.4M)	Channel 8047	Channel 8365	Channel 8683
		1930.7	1962.5	1994.3
	RX (3M)	Channel 8055	Channel 8365	Channel 8675
		1931.5	1962.5	1993.5

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	RX (5M)	Channel 8065	Channel 8365	Channel 8665
		1932.5	1962.5	1992.5
	RX (10M)	Channel 8090	Channel 8365	Channel 8640
		1935	1962.5	1990
	RX (15M)	Channel 8115	Channel 8365	Channel 8615
		1937.5	1962.5	1987.5
	RX (20M)	Channel 8140	Channel 8365	Channel 8590
		1940	1962.5	1985

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
LTE Band 26 (814 to 824 MHz)	TX (1.4M)	Channel 26697	Channel 26740	Channel 26783
		814.7 MHz	819 MHz	823.3 MHz
	TX (3M)	Channel 26705	Channel 26740	Channel 26775
		815.5 MHz	819 MHz	822.5 MHz
	TX (5M)	Channel 26715	Channel 26740	Channel 26765
		816.5 MHz	819 MHz	821.5 MHz
	TX (10M)	Channel 26740	Channel 26740	Channel 26740
		819 MHz	819 MHz	819 MHz
	RX (1.4M)	Channel 8697	Channel 8740	Channel 8783
		859.7 MHz	864 MHz	868.3 MHz
	RX (3M)	Channel 8705	Channel 8740	Channel 8765
		860.5 MHz	864 MHz	867.5 MHz
	RX (5M)	Channel 8715	Channel 8740	Channel 8765

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
	RX (10M)	861.5 MHz	864 MHz	866.5 MHz
		Channel 8740	Channel 8740	Channel 8740
		864 MHz	864 MHz	864 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
LTE Band 26 (824 to 849 MHz)	TX (1.4M)	Channel 26797	Channel 26915	Channel 27033
		824.7 MHz	836.5 MHz	848.3 MHz
	TX (3M)	Channel 26805	Channel 26915	Channel 27025
		825.5 MHz	836.5 MHz	847.5 MHz
	TX (5M)	Channel 26815	Channel 26915	Channel 27015
		826.5 MHz	836.5 MHz	846.5 MHz
	TX (10M)	Channel 26840	Channel 26915	Channel 26990
		829 MHz	836.5 MHz	844 MHz
	TX (15M)	Channel 26865	Channel 26915	Channel 26965
		831.5 MHz	836.5 MHz	841.5 MHz
	RX (1.4M)	Channel 8697	Channel 8915	Channel 9033
		859.7 MHz	881.5 MHz	893.3 MHz
	RX (3M)	Channel 8805	Channel 8915	Channel 9025
		860.5 MHz	881.5 MHz	892.5 MHz
	RX (5M)	Channel 8815	Channel 8915	Channel 9015
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 8840	Channel 8915	Channel 8990
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
	RX (15M)	Channel 8865	Channel 8915	Channel 8965
		876.5 MHz	881.5 MHz	886.5 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 30(2305-2315MHz)	TX (5M)	Channel 27685	Channel 27710	Channel 27735
		2307.5 MHz	2310 MHz	2312.5 MHz
	TX (10M)	Channel 27710	Channel 27710	Channel 27710
		2310 MHz	2310 MHz	2310MHz
	RX (5M)	Channel 9795	Channel 9820	Channel 9845
		2352.5 MHz	2355 MHz	2357.5 MHz
	RX (10M)	Channel 9820	Channel 9820	Channel 9820
		2355 MHz	2355 MHz	2355 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 41	TX(5M)	Channel 39675	Channel 40620	Channel 41565
		2498.5 MHz	2593 MHz	2687.5 MHz
	TX(10M)	Channel 39700	Channel 40620	Channel 41540
		2504 MHz	2593 MHz	2685 MHz
	TX(15M)	Channel 39725	Channel 40620	Channel 41515
		2503.5 MHz	2593 MHz	2682.5 MHz
	TX(20M)	Channel 39750	Channel 40620	Channel 41490
		2506 MHz	2593 MHz	2680 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	RX(5M)	Channel 39675	Channel 40620	Channel 41565
		2498.5 MHz	2593 MHz	2687.5 MHz
	RX(10M)	Channel 39700	Channel 40620	Channel 41540
		2504 MHz	2593 MHz	2685 MHz
	RX(15M)	Channel 39725	Channel 40620	Channel 41515
		2503.5 MHz	2593 MHz	2682.5 MHz
	RX(20M)	Channel 39750	Channel 40620	Channel 41490
		2506 MHz	2593 MHz	2680 MHz

4.4 Description of tests

4.4.1 Radiated Power and Radiated Spurious Emissions

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

Note: Reference test setup 3

4.4.2 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Note: Reference test setup 1.

4.4.3 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Note: Reference test setup 1.

4.4.4 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Note: Reference test setup 1.

4.4.5 Frequency Stability / Temperature Variation

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

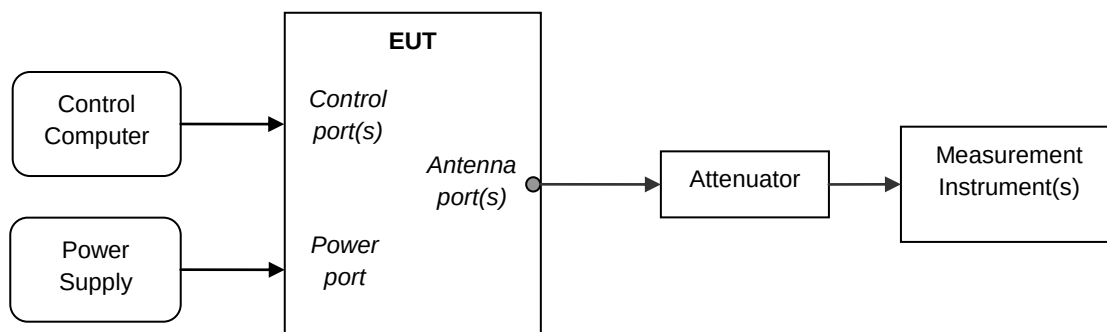
Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.


Note: Reference test setup 2.

4.5 Test Setups

4.5.1 Test Setup 1



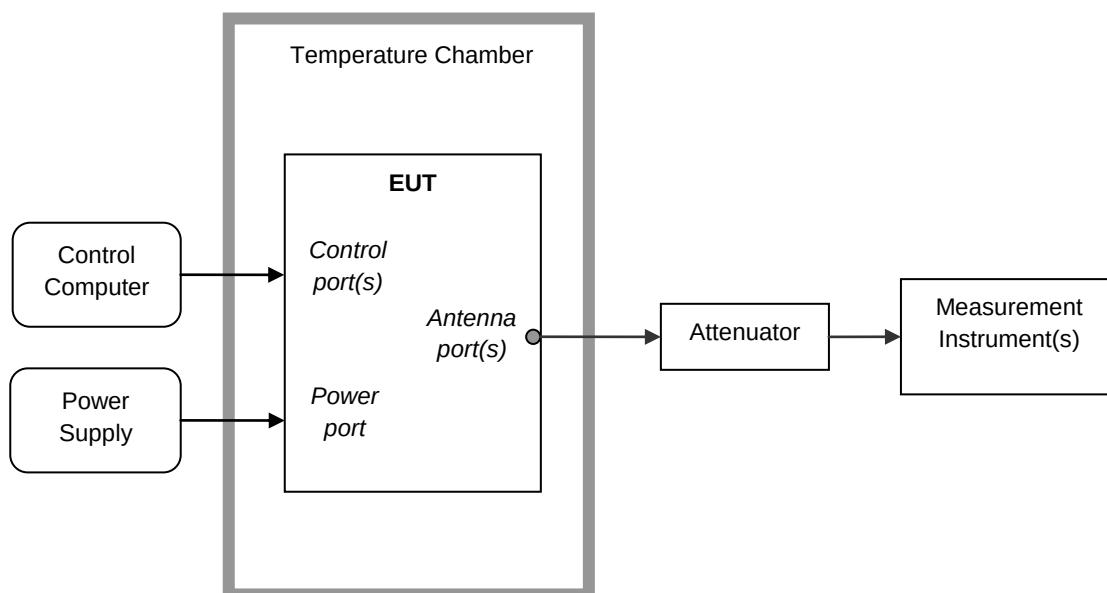
4.5.2 Test Setup 2




4.5.3 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

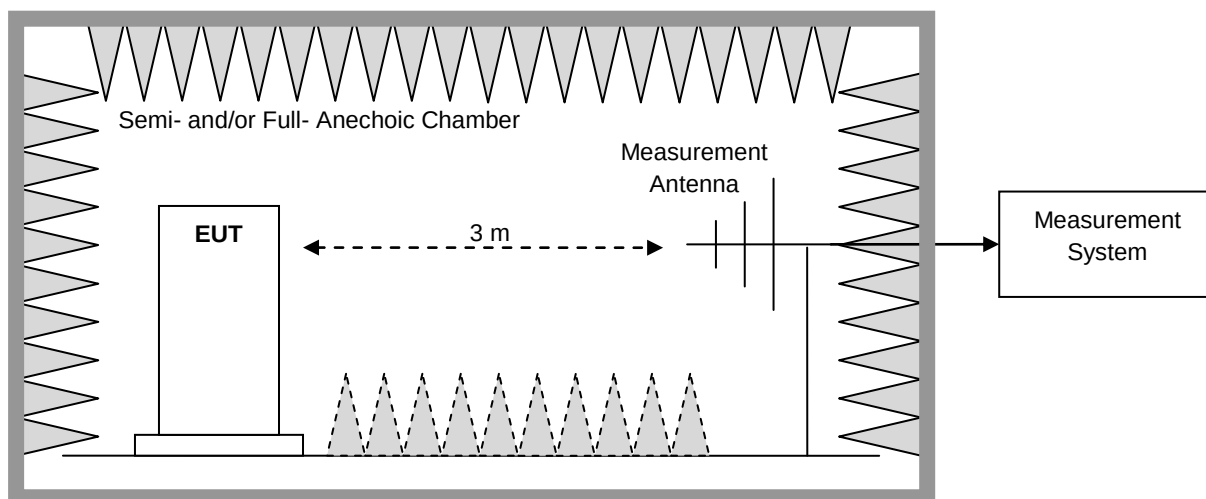4.5.3.1 Step 1: Pre-test



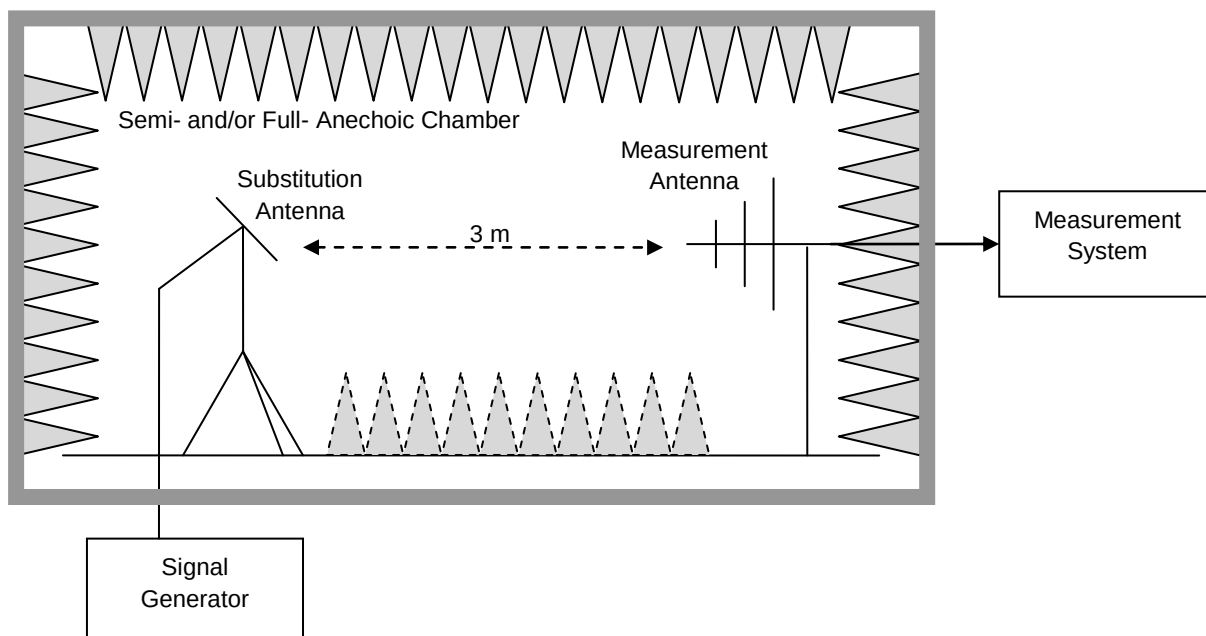4.5.3.2 Step 2: Substitution method to verify the maximum ERP



4.6 Test Conditions

Test Case		Test Conditions	
Transmit Output Power Data	Average Power, Total	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/ TM2,UMTS/TM1,LTE/TM1,LTE/TM2
	Average Power, Spectral Density (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM 1,LTE/TM2
Peak-to-Average Ratio (if required)		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM 1,LTE/TM2
Modulation Characteristics		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	M (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM 1,LTE/TM2
Bandwidth	Occupied Bandwidth	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM 1,LTE/TM2
	Emission Bandwidth (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM 1,LTE/TM2
Band Edges Compliance		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels	L, H

Test Case	Test Conditions	
	(TX)	(L= low channel, M= middle channel, H= high channel)
	Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Spurious Emission at Antenna Terminals	Test Env.	Ambient Climate & Rated Voltage
	Test Setup	Test Seup 1
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Field Strength of Spurious Radiation	Test Env.	Ambient Climate & Rated Voltage
	Test Setup	Test Seup 3
	Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1/TM2/TM3,LTE/TM1,LTE/TM2 NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Frequency Stability	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Seup 2
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	CDMA/TM1,CDMA/TM3,GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2

5 Main Test Instruments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	A120714713	2014-08-07	2016-08-06
Wireless Communication Test set	Agilent	N4010A	MY49081592	2014-11-04	2015-11-03
Universal Radio Communication Tester	R&S	CMU200	123299	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9020A	MY52090652	2015-07-08	2016-07-07
Universal Radio Communication Tester	R & S	CMW500	126854	2015-02-13	2016-02-12
Spectrum Analyzer	Agilent	E4440A	MY48250119	2015-07-08	2016-07-07
Signal Analyzer	R&S	FSQ31	200021	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9030A	MY49431698	2014-11-04	2015-11-03
Temperature Chamber	WEISS	WKL64	56246002940010	2015-02-13	2016-02-12
Signal generator	Agilent	E8257D	MY49281095	2014-11-04	2015-11-03
Vector Signal Generator	R&S	SMU200A	104162	2014-11-04	2015-11-03
Power Detecting & Sampling Unit	R&S	OSP-B157	100881	2014-09-08	2015-10-07
Signal Generator	Agilent	E4438C	MY47271904	2014-10-28	2015-10-27
Test receiver	R&S	ESU26	100387	2015-6-24	2016-06-23
Test receiver	R&S	ESCI	101163	2015-6-24	2016-06-23
Spectrum analyzer	R&S	FSU3	200474	2015-06-15	2016-06-14
Spectrum analyzer	R&S	FSU43	100144	2015-06-15	2016-06-14
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2015-4-30	2017-4-29
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2015-4-30	2017-4-29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-490	2015-4-30	2017-4-29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-520	2015-4-30	2017-4-29
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2015-4-30	2017-4-29
double ridged horn antenna (0.8G-18GHz)	R&S	HF907	100305	2015-4-30	2017-4-29
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	5140299	2015-7-15	2017-7-14
Artificial Main Network	R&S	ENV4200	100134	2015-6-24	2016-6-23
Line Impedance Stabilization Network	R&S	ENV216	100382	2015-6-24	2016-6-23

6 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmit Output Power Data	Power [dBm]	U = 0.39 dB
Bandwidth	Magnitude [%]	U = 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = 2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = 2.0 dB
Field Strength of Spurious Radiation	ERP [dBm]	For 3 m Chamber: U = 4.6 dB (30 MHz to 1GHz) U = 3.0 dB (above 1 GHz) For 10 m Chamber: U = 4.6 dB (30 MHz to 1GHz) U = 3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = 0.21 ppm

END