

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Dual Band Combo Module

ISSUED TO
Edan Instruments, Inc

#15 Jinhui Road, Jinsha Community, Kengzi Sub-District, Pingshan District, 518122 Shenzhen P.R.China

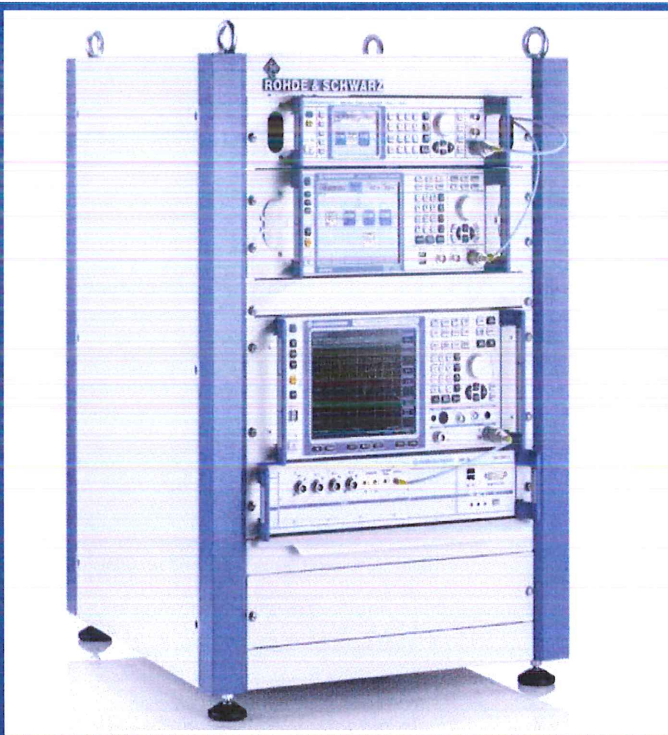

Tested by: Ye Hongji

Ye Hongji

Date Jun. 18, 2020

Approved by: Liao Jianming

Liao Jianming
(Technical Director)

Date Jun. 18, 2020

Report No.: BL-SZ2050669-601

EUT Name: Dual Band Combo Module

Model Name: RS9113

Brand Name: EDAN

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: SMQ9113EDAN

Test Conclusion: Pass

Test Date: Apr. 09, 2020 ~ May 28, 2020

Date of Issue: Jun. 18, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jun. 12, 2020</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 18, 2020</u>	<u>Increase the Radiated Emission 30MHz-1GHz frequency range of data and test photos</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Technical Information	8
2.6	Additional Instructions	10
3	SUMMARY OF TEST RESULTS	11
3.1	Test Standards	11
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	16

4.5	Measurement Results Explanation Example.....	17
4.5.1	For conducted test items:	17
4.5.2	For radiated band edges and spurious emission test:.....	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Output Power	19
5.2.1	Test Limit.....	19
5.2.2	Test Setup	19
5.2.3	Test Procedure	19
5.2.4	Test Result	20
5.3	6dB Bandwidth	21
5.3.1	Limit.....	21
5.3.2	Test Setup	21
5.3.3	Test Procedure	21
5.3.4	Test Result	21
5.4	Conducted Spurious Emission	22
5.4.1	Limit.....	22
5.4.2	Test Setup	22
5.4.3	Test Procedure	22
5.4.4	Test Result	23
5.5	Band Edge (Authorized-band band-edge).....	24
5.5.1	Limit.....	24
5.5.2	Test Setup	24
5.5.3	Test Procedure	24
5.5.4	Test Result	25
5.6	Conducted Emission	26
5.6.1	Limit.....	26
5.6.2	Test Setup	26
5.6.3	Test Procedure	26

5.6.4	Test Result	26
5.7	Radiated Spurious Emission	27
5.7.1	Limit.....	27
5.7.2	Test Setup	27
5.7.3	Test Procedure	27
5.7.4	Test Result	30
5.8	Band Edge (Restricted-band band-edge).....	31
5.8.1	Limit.....	31
5.8.2	Test Setup	31
5.8.3	Test Procedure	31
5.8.4	Test Result	31
5.9	Power Spectral density (PSD).....	32
5.9.1	Limit.....	32
5.9.2	Test Setup	32
5.9.3	Test Procedure	32
5.9.4	Test Result	32
ANNEX A	TEST RESULT	33
A.1	Output Power	33
A.2	Bandwidth.....	33
A.3	Conducted Spurious Emissions	33
A.4	Band Edge (Authorized-band band-edge).....	33
A.5	Conducted Emissions.....	33
A.6	Radiated Emission	34
A.7	Band Edge (Restricted-band band-edge).....	72
A.8	Power Spectral Density (PSD)	82
ANNEX B	TEST SETUP PHOTOS	83
ANNEX C	EUT EXTERNAL PHOTOS	83
ANNEX D	EUT INTERNAL PHOTOS	83

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Edan Instruments, Inc
Address	#15 Jinhui Road, Jinsha Community, Kengzi Sub-District, Pingshan District, 518122 Shenzhen P.R.China

2.2 Manufacturer Information

Manufacturer	Edan Instruments, Inc
Address	#15 Jinhui Road, Jinsha Community, Kengzi Sub-District, Pingshan District, 518122 Shenzhen P.R.China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Dual Band Combo Module
Model Name Under Test	RS9113
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	WIFI 802.11a, 802.11b, 802.11g, 802.11n Band 1/2/3/4 SRD
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11.
Modulation Type	DSSS, OFDM
Product Type	☐ Mobile ☐ Portable ☒ Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20) was tested in this report.

Antenna Manufacturer	Model	Antenna Type	Antenna Gain
Edan	iM20/elite V5/elite V6	PIFA	2 dBi
	iM50/iM60/iM70/iM80/X10/X12	PIFA	2 dBi
	iT20	PIFA	2 dBi
	elite V8	PIFA	2 dBi
Note: EUT has the 4 kind of alternate antennas, per antenna is tested.			

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Output Power	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
6dB Bandwidth	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Conducted Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Conducted Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Radiated Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Band Edge	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Power spectral density (PSD)	11b/11g/11n20	1/6/6.5 Mbps	1/6/11

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	cmd		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Dell	N/A
Mode	Channel	Soft Set	
802.11 b	1	17	
	6	17	
	11	17	
802.11 g	1	9	
	6	17	
	11	7	
802.11 n20	1	7	
	6	17	
	11	6	

Run software:

```

root@weihuabiao-E5420: /home/weihuabiao/桌面/RS9113.NBZ.NL.GENR.LNX.1.6.1/source
host/release# ./transmit rpine0 0
Tx Stopped
root@weihuabiao-E5420:/home/weihuabiao/桌面/RS9113.NBZ.NL.GENR.LNX.1.6.1/source
host/release# ./transmit rpine0 10 MCS0 750 1 165 0 1 0 0 0 255
TX PWR is 10

--Tx TEST CONFIGURATION--
Tx POWER      : 10
Tx RATE       : MCS0
PACKET LENGTH : 750
Tx MODE       : CONTINUOUS
CHANNEL NUM   : 165
RATE_FLAGS    : 1
CHAN_WIDTH    : 0
AGGR_ENABLE   : 0
NO OF PACKETS : 0
DELAY         : 0
CTRY_REGION   : 255
Tx Started
root@weihuabiao-E5420:/home/weihuabiao/桌面/RS9113.NBZ.NL.GENR.LNX.1.6.1/source/
host/release#
root@weihuabiao-E5420:/home/weihuabiao/桌面/RS9113.NBZ.NL.GENR.LNX.1.6.1/source/
host/release#

```

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	N/A	Pass ^{Note 1}
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A ^{Note 2}

Note¹: Please refer to section 5.1.

Note²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note³: Because EUT has four antenna suppliers, so radiation tests were conducted separately, and the data is distinguished by the antenna model.

Note⁴: The only difference between the EUT (test samples in this report) and testing sample of report BL-SZ19B0657-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020 are:

1. Add four antennas.

And others hardware circuit and software were all the same. Therefore, only the items Radiated Spurious Emission and Band Edge(Restricted-band band-edge) were tested in this report, other test data originate from the report BL-SZ19B0657-601, which was issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2019.10.29	2020.10.28
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.15	2020.06.14
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.18	2020.06.17
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.15	2020.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2019.06.24	2020.06.23
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2020.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2019.07.22	2021.07.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.08.23	2020.08.22
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

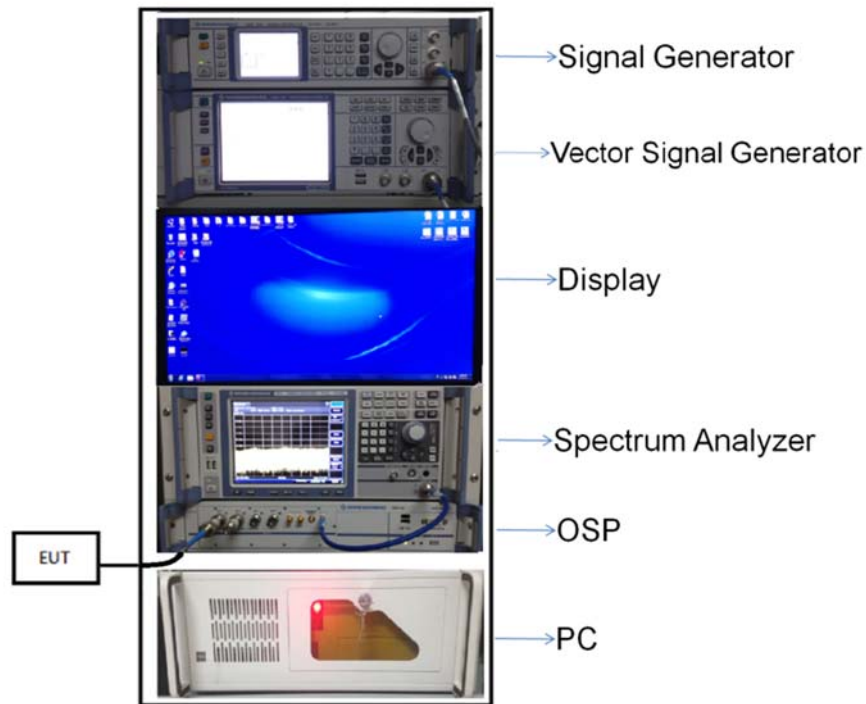


(Diagram 1)

4.4.2 For AC Power Supply Port Test

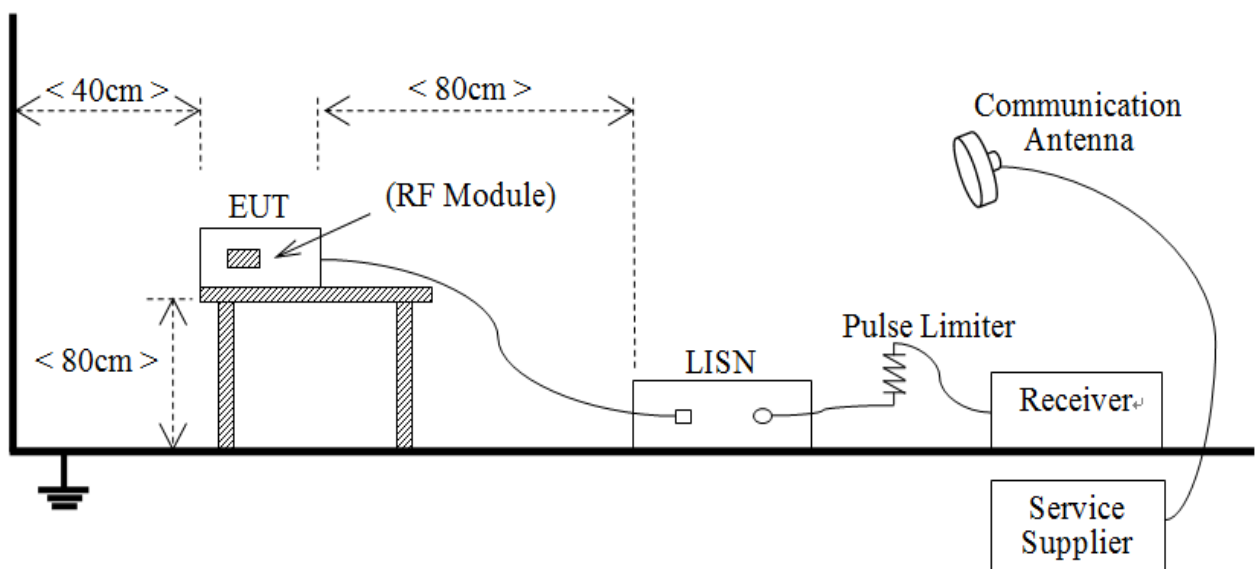


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

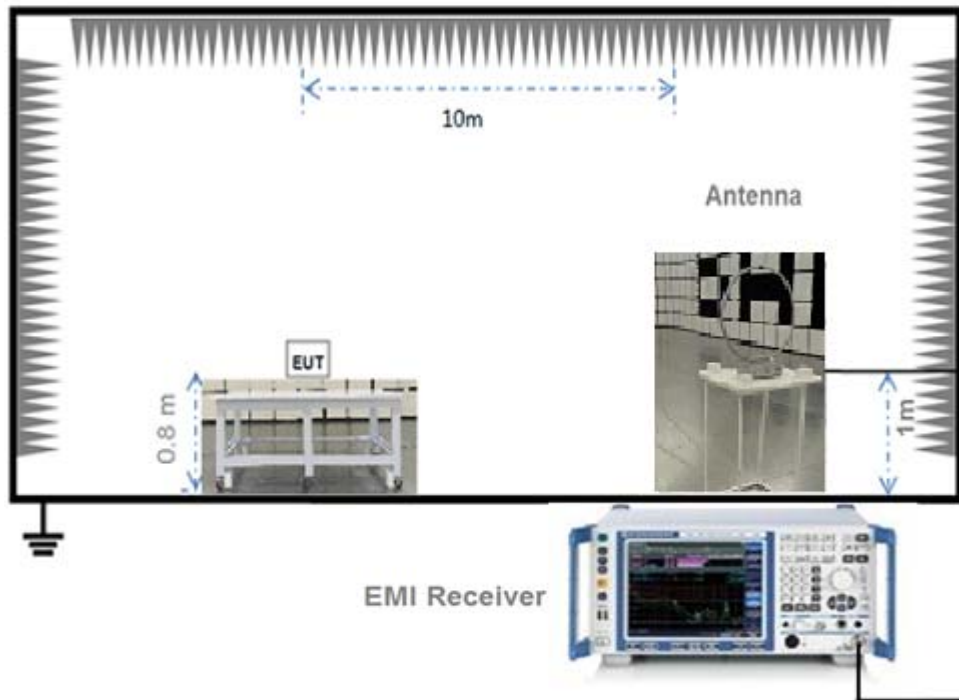


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

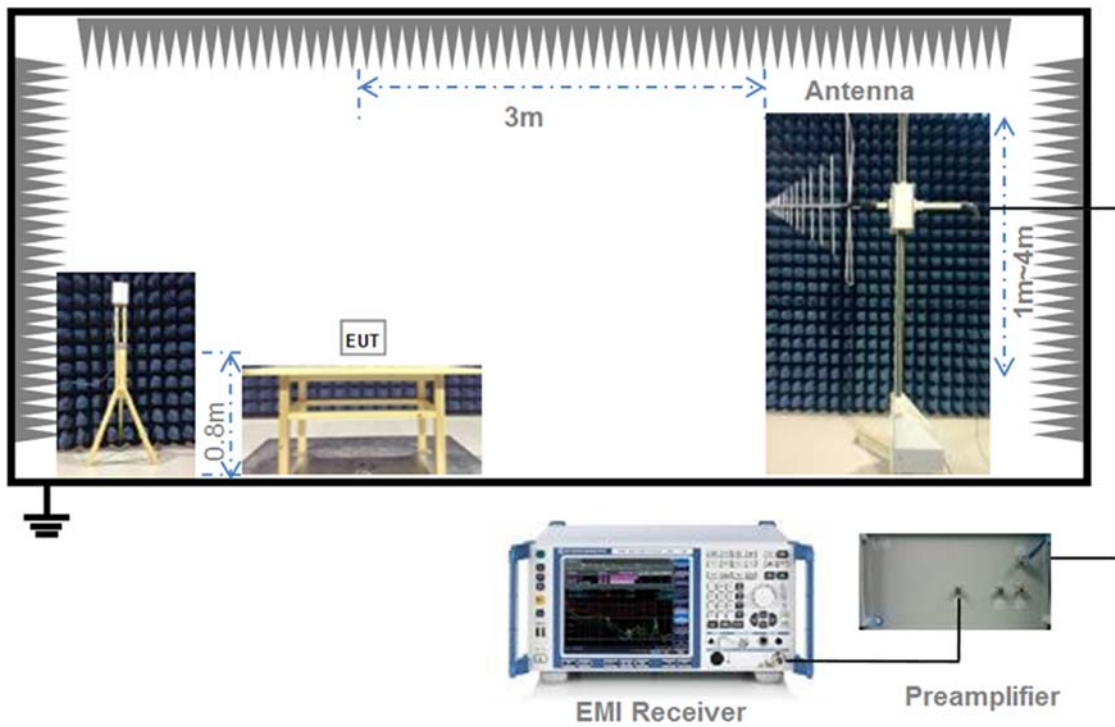

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

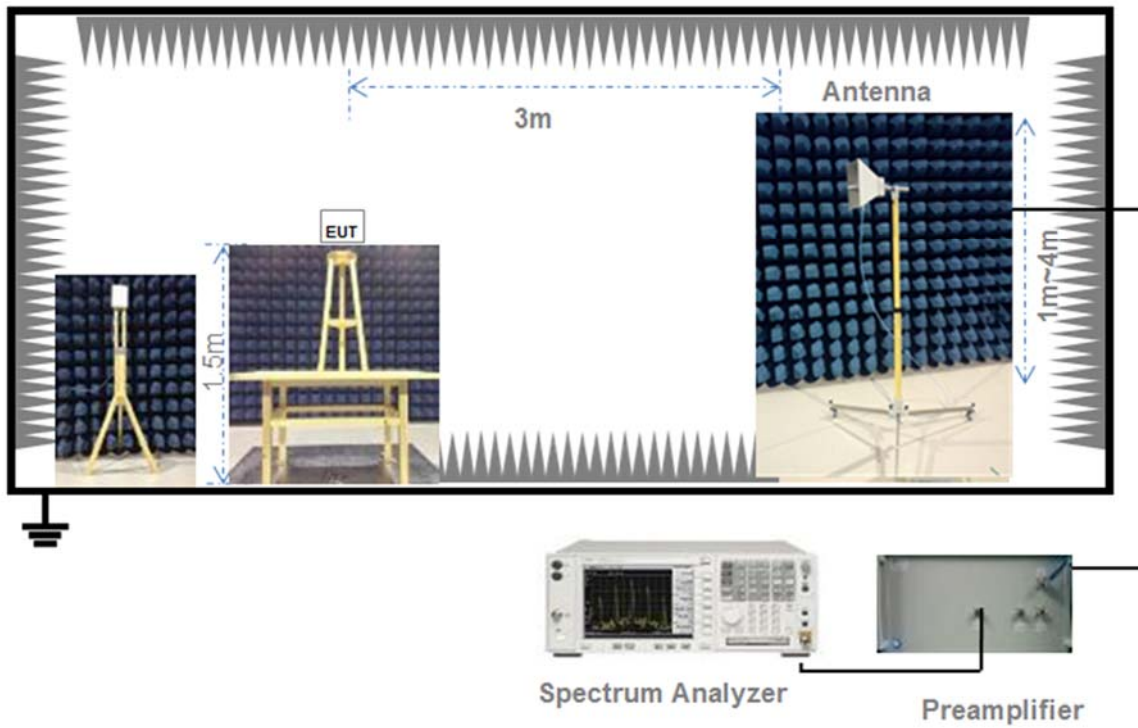

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.36dB Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Note: The Output Power please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.1 Output Power**.

A.2 Bandwidth

Note: The Bandwidth please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.2 Bandwidth**.

A.3 Conducted Spurious Emissions

Note: The Conducted Spurious Emissions please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.3 Conducted Spurious Emissions**

A.4 Band Edge (Authorized-band band-edge)

Note: The Band Edge (Authorized-band band-edge) please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.4 Band Edge (Authorized-band band-edge)**.

A.5 Conducted Emissions

Note: The Conducted Emissions please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.5 Conducted Emissions**.

A.6 Radiated Emission

Test Data and Plots

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


Test Data and Plots

30 MHz to 1 GHz, ANT H

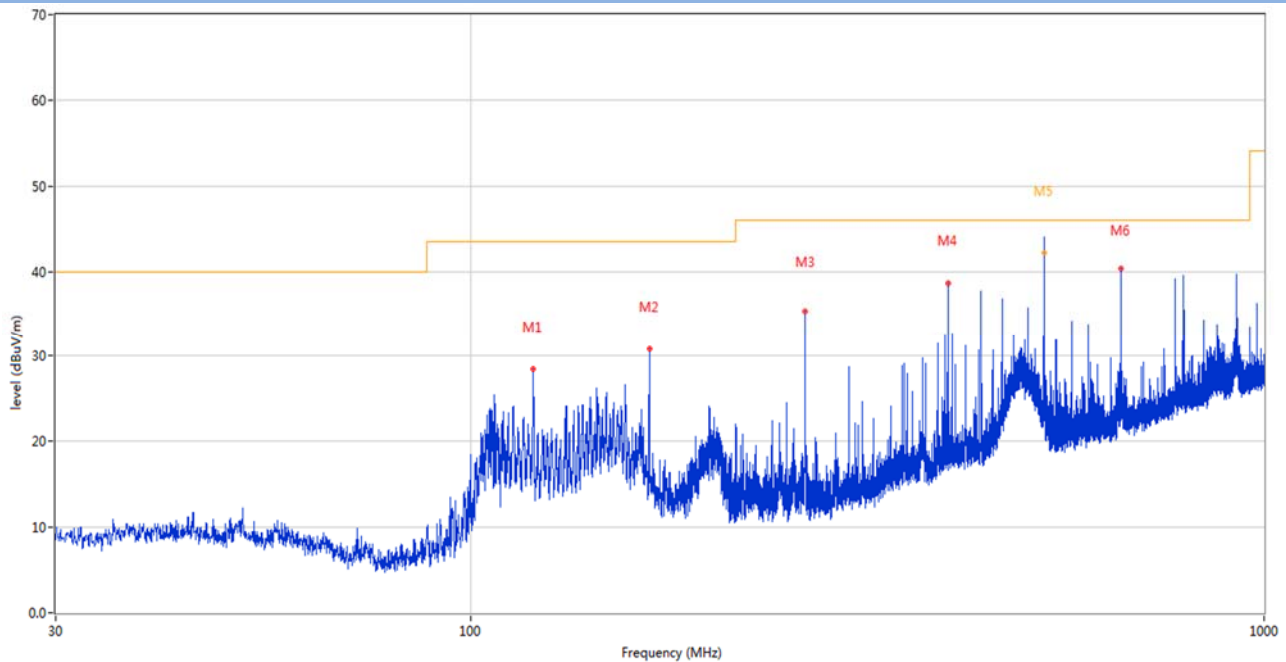

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	119.967	28.48	-27.10	43.5	-15.02	Peak	319.00	200	Horizontal	Pass
2	167.982	30.83	-25.43	43.5	-12.67	Peak	256.00	200	Horizontal	Pass
3	264.013	35.31	-25.74	46.0	-10.69	Peak	116.00	100	Horizontal	Pass
4	400.006	38.66	-21.60	46.0	-7.34	Peak	313.00	100	Horizontal	Pass
5	527.993	46.87	-18.22	46.0	0.87	Peak	360.00	200	Horizontal	N/A
5*	527.993	42.44	-18.22	46.0	-3.56	QP	360.00	200	Horizontal	Pass
6	660.015	40.35	-15.15	46.0	-5.65	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

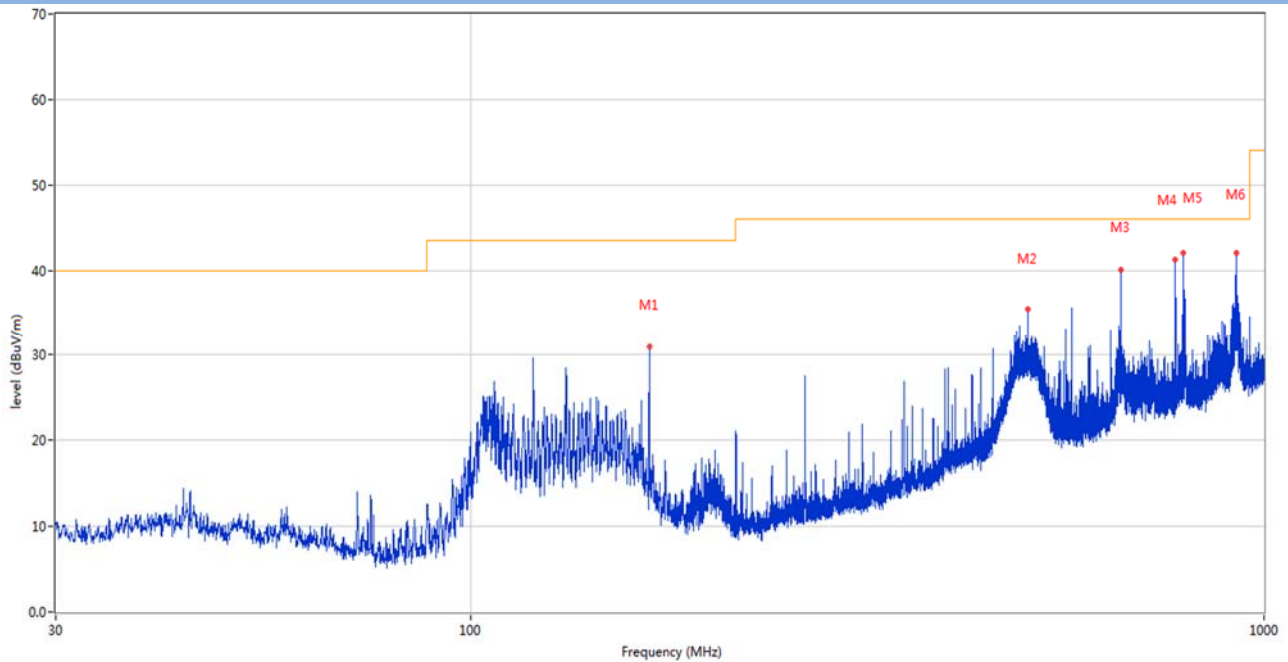

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	167.982	30.92	-25.43	43.5	-12.58	Peak	84.00	100	Vertical	Pass
2	503.990	35.40	-18.72	46.0	-10.60	Peak	329.00	100	Vertical	Pass
3	660.063	40.13	-15.15	46.0	-5.87	Peak	192.00	100	Vertical	Pass
4	773.117	41.20	-13.00	46.0	-4.80	Peak	1.00	200	Vertical	Pass
5	791.984	42.26	-12.94	46.0	-3.74	Peak	0.00	200	Vertical	Pass
6	924.001	42.25	-10.70	46.0	-3.75	Peak	0.00	200	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

iM20/elite V5/elite V6

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.000	40.87	-17.53	74.0	-33.13	Peak	118.00	150	Horizontal	Pass
1**	1608.000	30.79	-17.53	54.0	-23.21	AV	118.00	150	Horizontal	Pass
2	2329.000	45.07	-12.79	74.0	-28.93	Peak	133.00	150	Horizontal	Pass
2**	2329.000	35.86	-12.79	54.0	-18.14	AV	133.00	150	Horizontal	Pass
3	2409.500	97.06	-12.05	74.0	23.06	Peak	140.00	150	Horizontal	N/A
3**	2409.500	94.25	-12.05	54.0	40.25	AV	140.00	150	Horizontal	N/A
4	3216.000	46.71	-7.33	74.0	-27.29	Peak	75.00	150	Horizontal	Pass
4**	3216.000	29.98	-7.33	54.0	-24.02	AV	75.00	150	Horizontal	Pass
5	4825.000	48.10	-3.51	74.0	-25.90	Peak	269.00	150	Horizontal	Pass
5**	4825.000	44.54	-3.51	54.0	-9.46	AV	269.00	150	Horizontal	Pass
6	15512.813	56.74	2.34	74.0	-17.26	Peak	233.00	150	Horizontal	Pass
6**	15512.813	40.41	2.34	54.0	-13.59	AV	233.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1677.000	44.12	-17.39	74.0	-29.88	Peak	300.00	150	Vertical	Pass
1**	1677.000	32.78	-17.39	54.0	-21.22	AV	300.00	150	Vertical	Pass
2	2409.500	85.98	-12.05	74.0	11.98	Peak	291.00	150	Vertical	N/A
2**	2409.500	83.16	-12.05	54.0	29.16	AV	291.00	150	Vertical	N/A
3	4467.000	48.91	-3.41	74.0	-25.09	Peak	160.00	150	Vertical	Pass
3**	4467.000	32.97	-3.41	54.0	-21.03	AV	160.00	150	Vertical	Pass
4	6605.000	53.34	0.50	74.0	-20.66	Peak	15.00	150	Vertical	Pass
4**	6605.000	37.42	0.50	54.0	-16.58	AV	15.00	150	Vertical	Pass
5	10381.000	51.85	0.80	74.0	-22.15	Peak	13.00	150	Vertical	Pass
5**	10381.000	34.66	0.80	54.0	-19.34	AV	13.00	150	Vertical	Pass
6	17459.249	58.10	3.88	74.0	-15.90	Peak	280.00	150	Vertical	Pass
6**	17459.249	42.58	3.88	54.0	-11.42	AV	280.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1625.000	42.93	-17.62	74.0	-31.07	Peak	256.00	150	Horizontal	Pass
1**	1625.000	39.24	-17.62	54.0	-14.76	AV	256.00	150	Horizontal	Pass
2	2434.000	99.63	-12.71	74.0	25.63	Peak	138.00	150	Horizontal	N/A
2**	2434.000	96.30	-12.71	54.0	42.30	AV	138.00	150	Horizontal	N/A
3	3249.000	48.08	-8.62	74.0	-25.92	Peak	82.00	150	Horizontal	Pass
3**	3249.000	28.79	-8.62	54.0	-25.21	AV	82.00	150	Horizontal	Pass
4	4875.000	49.25	-3.22	74.0	-24.75	Peak	290.00	150	Horizontal	Pass
4**	4875.000	50.38	-3.22	54.0	-3.62	AV	290.00	150	Horizontal	Pass
5	6663.000	54.59	0.04	74.0	-19.41	Peak	107.00	150	Horizontal	Pass
5**	6663.000	37.54	0.04	54.0	-16.46	AV	107.00	150	Horizontal	Pass
6	17413.313	58.93	4.67	74.0	-15.07	Peak	216.00	150	Horizontal	Pass
6**	17413.313	42.95	4.67	54.0	-11.05	AV	216.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.500	41.10	-17.54	74.0	-32.90	Peak	282.00	150	Vertical	Pass
1**	1608.500	31.20	-17.54	54.0	-22.80	AV	282.00	150	Vertical	Pass
2	2434.500	89.55	-12.72	74.0	15.55	Peak	301.00	150	Vertical	N/A
2**	2434.500	87.26	-12.72	54.0	33.26	AV	301.00	150	Vertical	N/A
3	3268.000	45.54	-8.30	74.0	-28.46	Peak	8.00	150	Vertical	Pass
3**	3268.000	29.59	-8.30	54.0	-24.41	AV	8.00	150	Vertical	Pass
4	4874.000	49.60	-3.30	74.0	-24.40	Peak	54.00	150	Vertical	Pass
4**	4874.000	33.69	-3.30	54.0	-20.31	AV	54.00	150	Vertical	Pass
5	6858.000	53.59	-0.10	74.0	-20.41	Peak	54.00	150	Vertical	Pass
5**	6858.000	36.90	-0.10	54.0	-17.10	AV	54.00	150	Vertical	Pass
6	17450.062	59.19	3.90	74.0	-14.81	Peak	73.00	150	Vertical	Pass
6**	17450.062	42.84	3.90	54.0	-11.16	AV	73.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1641.500	40.53	-17.40	74.0	-33.47	Peak	118.00	150	Horizontal	Pass
1**	1641.500	34.86	-17.40	54.0	-19.14	AV	118.00	150	Horizontal	Pass
2	2464.500	95.85	-12.78	74.0	21.85	Peak	138.00	150	Horizontal	N/A
2**	2464.500	93.46	-12.78	54.0	39.46	AV	138.00	150	Horizontal	N/A
3	3282.000	46.00	-8.22	74.0	-28.00	Peak	79.00	150	Horizontal	Pass
3**	3282.000	28.98	-8.22	54.0	-25.02	AV	79.00	150	Horizontal	Pass
4	4925.000	47.32	-2.62	74.0	-26.68	Peak	307.00	150	Horizontal	Pass
4**	4925.000	47.08	-2.62	54.0	-6.92	AV	307.00	150	Horizontal	Pass
5	6204.000	53.09	-2.07	74.0	-20.91	Peak	97.00	150	Horizontal	Pass
5**	6204.000	36.08	-2.07	54.0	-17.92	AV	97.00	150	Horizontal	Pass
6	17412.000	58.70	4.62	74.0	-15.30	Peak	0.00	150	Horizontal	Pass
6**	17412.000	42.88	4.62	54.0	-11.12	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	41.30	-17.52	74.0	-32.70	Peak	255.00	150	Vertical	Pass
1**	1499.500	29.97	-17.52	54.0	-24.03	AV	255.00	150	Vertical	Pass
2	2459.500	84.77	-12.91	74.0	10.77	Peak	304.00	150	Vertical	N/A
2**	2459.500	82.29	-12.91	54.0	28.29	AV	304.00	150	Vertical	N/A
3	3171.000	46.16	-7.95	74.0	-27.84	Peak	98.00	150	Vertical	Pass
3**	3171.000	29.71	-7.95	54.0	-24.29	AV	98.00	150	Vertical	Pass
4	4961.000	50.11	-2.92	74.0	-23.89	Peak	295.00	150	Vertical	Pass
4**	4961.000	34.34	-2.92	54.0	-19.66	AV	295.00	150	Vertical	Pass
5	9295.688	50.77	-0.89	74.0	-23.23	Peak	235.00	150	Vertical	Pass
5**	9295.688	33.60	-0.89	54.0	-20.40	AV	235.00	150	Vertical	Pass
6	17867.438	59.68	4.17	74.0	-14.32	Peak	87.00	150	Vertical	Pass
6**	17867.438	43.05	4.17	54.0	-10.95	AV	87.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.500	38.18	-17.41	74.0	-35.82	Peak	257.00	150	Horizontal	Pass
1**	1493.500	25.09	-17.41	54.0	-28.91	AV	257.00	150	Horizontal	Pass
2	2410.000	94.14	-12.02	74.0	20.14	Peak	137.00	150	Horizontal	N/A
2**	2410.000	87.58	-12.02	54.0	33.58	AV	137.00	150	Horizontal	N/A
3	3216.000	46.58	-7.33	74.0	-27.42	Peak	177.00	150	Horizontal	Pass
3**	3216.000	29.79	-7.33	54.0	-24.21	AV	177.00	150	Horizontal	Pass
4	6277.000	53.03	0.32	74.0	-20.97	Peak	89.00	150	Horizontal	Pass
4**	6277.000	37.01	0.32	54.0	-16.99	AV	89.00	150	Horizontal	Pass
5	10192.687	51.48	0.69	74.0	-22.52	Peak	187.00	150	Horizontal	Pass
5**	10192.687	34.75	0.69	54.0	-19.25	AV	187.00	150	Horizontal	Pass
6	17435.625	59.16	4.34	74.0	-14.84	Peak	169.00	150	Horizontal	Pass
6**	17435.625	43.10	4.34	54.0	-10.90	AV	169.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	41.14	-17.52	74.0	-32.86	Peak	247.00	150	Vertical	Pass
1**	1499.500	30.60	-17.52	54.0	-23.40	AV	247.00	150	Vertical	Pass
2	2407.500	83.95	-12.18	74.0	9.95	Peak	298.00	150	Vertical	N/A
2**	2407.500	75.57	-12.18	54.0	21.57	AV	298.00	150	Vertical	N/A
3	3958.000	47.71	-4.76	74.0	-26.29	Peak	111.00	150	Vertical	Pass
3**	3958.000	31.27	-4.76	54.0	-22.73	AV	111.00	150	Vertical	Pass
4	6001.000	50.31	-0.86	74.0	-23.69	Peak	177.00	150	Vertical	Pass
4**	6001.000	39.47	-0.86	54.0	-14.53	AV	177.00	150	Vertical	Pass
5	9669.437	51.32	0.34	74.0	-22.68	Peak	321.00	150	Vertical	Pass
5**	9669.437	33.80	0.34	54.0	-20.20	AV	321.00	150	Vertical	Pass
6	17419.874	58.57	4.83	74.0	-15.43	Peak	123.00	150	Vertical	Pass
6**	17419.874	43.12	4.83	54.0	-10.88	AV	123.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.500	42.21	-17.62	74.0	-31.79	Peak	203.00	150	Horizontal	Pass
1**	1599.500	29.80	-17.62	54.0	-24.20	AV	203.00	150	Horizontal	Pass
2	2434.500	102.24	-12.72	74.0	28.24	Peak	139.00	150	Horizontal	N/A
2**	2434.500	94.66	-12.72	54.0	40.66	AV	139.00	150	Horizontal	N/A
3	3249.000	50.47	-8.62	74.0	-23.53	Peak	116.00	150	Horizontal	Pass
3**	3249.000	28.57	-8.62	54.0	-25.43	AV	116.00	150	Horizontal	Pass
4	4872.000	51.56	-3.37	74.0	-22.44	Peak	268.00	150	Horizontal	Pass
4**	4872.000	40.70	-3.37	54.0	-13.30	AV	268.00	150	Horizontal	Pass
5	10368.062	51.40	0.75	74.0	-22.60	Peak	47.00	150	Horizontal	Pass
5**	10368.062	34.86	0.75	54.0	-19.14	AV	47.00	150	Horizontal	Pass
6	17452.687	58.83	3.90	74.0	-15.17	Peak	12.00	150	Horizontal	Pass
6**	17452.687	42.57	3.90	54.0	-11.43	AV	12.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	41.24	-17.52	74.0	-32.76	Peak	245.00	150	Vertical	Pass
1**	1499.000	29.30	-17.52	54.0	-24.70	AV	245.00	150	Vertical	Pass
2	1998.500	43.69	-15.52	74.0	-30.31	Peak	274.00	150	Vertical	Pass
2**	1998.500	30.93	-15.52	54.0	-23.07	AV	274.00	150	Vertical	Pass
3	2435.500	92.64	-12.72	74.0	18.64	Peak	308.00	150	Vertical	N/A
3**	2435.500	85.20	-12.72	54.0	31.20	AV	308.00	150	Vertical	N/A
4	4585.000	50.14	-3.37	74.0	-23.86	Peak	0.00	150	Vertical	Pass
4**	4585.000	33.51	-3.37	54.0	-20.49	AV	0.00	150	Vertical	Pass
5	9580.313	51.84	-0.17	74.0	-22.16	Peak	303.00	150	Vertical	Pass
5**	9580.313	34.00	-0.17	54.0	-20.00	AV	303.00	150	Vertical	Pass
6	17467.126	59.05	3.81	74.0	-14.95	Peak	95.00	150	Vertical	Pass
6**	17467.126	42.94	3.81	54.0	-11.06	AV	95.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	38.38	-17.38	74.0	-35.62	Peak	249.00	150	Horizontal	Pass
1**	1494.000	26.02	-17.38	54.0	-27.98	AV	249.00	150	Horizontal	Pass
2	2464.000	91.40	-12.76	74.0	17.40	Peak	139.00	150	Horizontal	N/A
2**	2464.000	84.97	-12.76	54.0	30.97	AV	139.00	150	Horizontal	N/A
3	3283.000	45.64	-8.20	74.0	-28.36	Peak	87.00	150	Horizontal	Pass
3**	3283.000	31.91	-8.20	54.0	-22.09	AV	87.00	150	Horizontal	Pass
4	6283.000	52.99	0.35	74.0	-21.01	Peak	254.00	150	Horizontal	Pass
4**	6283.000	38.41	0.35	54.0	-15.59	AV	254.00	150	Horizontal	Pass
5	8943.500	50.70	-0.29	74.0	-23.30	Peak	46.00	150	Horizontal	Pass
5**	8943.500	32.96	-0.29	54.0	-21.04	AV	46.00	150	Horizontal	Pass
6	17418.562	60.28	4.81	74.0	-13.72	Peak	322.00	150	Horizontal	Pass
6**	17418.562	43.49	4.81	54.0	-10.51	AV	322.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.75	-17.52	74.0	-34.25	Peak	263.00	150	Vertical	Pass
1**	1499.500	29.97	-17.52	54.0	-24.03	AV	263.00	150	Vertical	Pass
2	2457.000	79.64	-12.84	74.0	5.64	Peak	303.00	150	Vertical	N/A
2**	2457.000	71.47	-12.84	54.0	17.47	AV	303.00	150	Vertical	N/A
3	4096.000	48.11	-5.52	74.0	-25.89	Peak	323.00	150	Vertical	Pass
3**	4096.000	31.59	-5.52	54.0	-22.41	AV	323.00	150	Vertical	Pass
4	6272.000	53.31	0.17	74.0	-20.69	Peak	105.00	150	Vertical	Pass
4**	6272.000	37.34	0.17	54.0	-16.66	AV	105.00	150	Vertical	Pass
5	10419.812	51.81	0.65	74.0	-22.19	Peak	360.00	150	Vertical	Pass
5**	10419.812	34.81	0.65	54.0	-19.19	AV	360.00	150	Vertical	Pass
6	17475.000	59.06	3.60	74.0	-14.94	Peak	278.00	150	Vertical	Pass
6**	17475.000	42.66	3.60	54.0	-11.34	AV	278.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1932.000	41.17	-15.90	74.0	-32.83	Peak	348.00	150	Horizontal	Pass
1**	1932.000	26.14	-15.90	54.0	-27.86	AV	348.00	150	Horizontal	Pass
2	2410.000	93.68	-12.02	74.0	19.68	Peak	139.00	150	Horizontal	N/A
2**	2410.000	85.32	-12.02	54.0	31.32	AV	139.00	150	Horizontal	N/A
3	3216.000	46.34	-7.33	74.0	-27.66	Peak	85.00	150	Horizontal	Pass
3**	3216.000	30.48	-7.33	54.0	-23.52	AV	85.00	150	Horizontal	Pass
4	5536.000	51.44	-1.84	74.0	-22.56	Peak	163.00	150	Horizontal	Pass
4**	5536.000	35.93	-1.84	54.0	-18.07	AV	163.00	150	Horizontal	Pass
5	8773.875	50.22	-0.94	74.0	-23.78	Peak	6.00	150	Horizontal	Pass
5**	8773.875	33.55	-0.94	54.0	-20.45	AV	6.00	150	Horizontal	Pass
6	17426.438	59.15	4.66	74.0	-14.85	Peak	275.00	150	Horizontal	Pass
6**	17426.438	43.39	4.66	54.0	-10.61	AV	275.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1996.500	43.70	-15.51	74.0	-30.30	Peak	272.00	150	Vertical	Pass
1**	1996.500	26.88	-15.51	54.0	-27.12	AV	272.00	150	Vertical	Pass
2	2408.500	83.03	-12.12	74.0	9.03	Peak	283.00	150	Vertical	N/A
2**	2408.500	73.53	-12.12	54.0	19.53	AV	283.00	150	Vertical	N/A
3	3562.000	46.02	-6.54	74.0	-27.98	Peak	219.00	150	Vertical	Pass
3**	3562.000	30.46	-6.54	54.0	-23.54	AV	219.00	150	Vertical	Pass
4	6633.000	53.38	0.13	74.0	-20.62	Peak	0.00	150	Vertical	Pass
4**	6633.000	36.99	0.13	54.0	-17.01	AV	0.00	150	Vertical	Pass
5	8771.000	50.72	-0.93	74.0	-23.28	Peak	153.00	150	Vertical	Pass
5**	8771.000	33.83	-0.93	54.0	-20.17	AV	153.00	150	Vertical	Pass
6	17410.687	59.81	4.58	74.0	-14.19	Peak	0.00	150	Vertical	Pass
6**	17410.687	43.30	4.58	54.0	-10.70	AV	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1624.500	43.82	-17.64	74.0	-30.18	Peak	257.00	150	Horizontal	Pass
1**	1624.500	32.06	-17.64	54.0	-21.94	AV	257.00	150	Horizontal	Pass
2	2435.500	103.71	-12.72	74.0	29.71	Peak	141.00	150	Horizontal	N/A
2**	2435.500	94.99	-12.72	54.0	40.99	AV	141.00	150	Horizontal	N/A
3	3249.000	50.31	-8.62	74.0	-23.69	Peak	80.00	150	Horizontal	Pass
3**	3249.000	28.85	-8.62	54.0	-25.15	AV	80.00	150	Horizontal	Pass
4	4878.000	51.97	-3.35	74.0	-22.03	Peak	289.00	150	Horizontal	Pass
4**	4878.000	39.17	-3.35	54.0	-14.83	AV	289.00	150	Horizontal	Pass
5	8486.375	50.39	-0.97	74.0	-23.61	Peak	360.00	150	Horizontal	Pass
5**	8486.375	33.27	-0.97	54.0	-20.73	AV	360.00	150	Horizontal	Pass
6	17423.813	59.79	4.74	74.0	-14.21	Peak	80.00	150	Horizontal	Pass
6**	17423.813	43.63	4.74	54.0	-10.37	AV	80.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.000	42.52	-15.62	74.0	-31.48	Peak	268.00	150	Vertical	Pass
1**	1992.000	30.98	-15.62	54.0	-23.02	AV	268.00	150	Vertical	Pass
2	2433.000	92.54	-12.71	74.0	18.54	Peak	303.00	150	Vertical	N/A
2**	2433.000	84.42	-12.71	54.0	30.42	AV	303.00	150	Vertical	N/A
3	3536.000	46.81	-6.73	74.0	-27.19	Peak	30.00	150	Vertical	Pass
3**	3536.000	29.82	-6.73	54.0	-24.18	AV	30.00	150	Vertical	Pass
4	6001.000	51.27	-0.86	74.0	-22.73	Peak	270.00	150	Vertical	Pass
4**	6001.000	39.21	-0.86	54.0	-14.79	AV	270.00	150	Vertical	Pass
5	8311.000	49.56	-1.46	74.0	-24.44	Peak	310.00	150	Vertical	Pass
5**	8311.000	32.93	-1.46	54.0	-21.07	AV	310.00	150	Vertical	Pass
6	17388.374	59.16	4.03	74.0	-14.84	Peak	231.00	150	Vertical	Pass
6**	17388.374	42.73	4.03	54.0	-11.27	AV	231.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.500	37.74	-17.41	74.0	-36.26	Peak	298.00	150	Horizontal	Pass
1**	1493.500	24.69	-17.41	54.0	-29.31	AV	298.00	150	Horizontal	Pass
2	2462.500	90.95	-12.79	74.0	16.95	Peak	139.00	150	Horizontal	N/A
2**	2462.500	81.72	-12.79	54.0	27.72	AV	139.00	150	Horizontal	N/A
3	3282.000	45.57	-8.22	74.0	-28.43	Peak	85.00	150	Horizontal	Pass
3**	3282.000	28.77	-8.22	54.0	-25.23	AV	85.00	150	Horizontal	Pass
4	6682.000	54.33	0.06	74.0	-19.67	Peak	196.00	150	Horizontal	Pass
4**	6682.000	37.95	0.06	54.0	-16.05	AV	196.00	150	Horizontal	Pass
5	8811.250	50.00	-0.51	74.0	-24.00	Peak	329.00	150	Horizontal	Pass
5**	8811.250	33.01	-0.51	54.0	-20.99	AV	329.00	150	Horizontal	Pass
6	17463.187	58.68	3.85	74.0	-15.32	Peak	0.00	150	Horizontal	Pass
6**	17463.187	42.92	3.85	54.0	-11.08	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	41.48	-17.52	74.0	-32.52	Peak	256.00	150	Vertical	Pass
1**	1499.000	29.29	-17.52	54.0	-24.71	AV	256.00	150	Vertical	Pass
2	2465.000	79.22	-12.79	74.0	5.22	Peak	309.00	150	Vertical	N/A
2**	2465.000	71.64	-12.79	54.0	17.64	AV	309.00	150	Vertical	N/A
3	3549.000	46.67	-7.03	74.0	-27.33	Peak	0.00	150	Vertical	Pass
3**	3549.000	30.56	-7.03	54.0	-23.44	AV	0.00	150	Vertical	Pass
4	6275.000	53.17	0.30	74.0	-20.83	Peak	198.00	150	Vertical	Pass
4**	6275.000	37.30	0.30	54.0	-16.70	AV	198.00	150	Vertical	Pass
5	8404.438	49.52	-1.21	74.0	-24.48	Peak	163.00	150	Vertical	Pass
5**	8404.438	32.18	-1.21	54.0	-21.82	AV	163.00	150	Vertical	Pass
6	17093.063	57.65	2.48	74.0	-16.35	Peak	140.00	150	Vertical	Pass
6**	17093.063	40.67	2.48	54.0	-13.33	AV	140.00	150	Vertical	Pass

iM50/iM60/iM70/iM80/X10/X12

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.000	37.18	-17.53	74.0	-36.82	Peak	7.00	150	Horizontal	Pass
1**	1608.000	26.00	-17.53	54.0	-28.00	AV	7.00	150	Horizontal	Pass
2	2330.500	45.18	-12.84	74.0	-28.82	Peak	134.00	150	Horizontal	Pass
2**	2330.500	34.87	-12.84	54.0	-19.13	AV	134.00	150	Horizontal	Pass
3	2409.500	102.85	-12.05	74.0	28.85	Peak	129.00	150	Horizontal	N/A
3**	2409.500	150.41	-12.05	54.0	46.41	AV	129.00	150	Horizontal	N/A
4	3216.000	46.47	-7.33	74.0	-27.53	Peak	218.00	150	Horizontal	Pass
4**	3216.000	29.56	-7.33	54.0	-24.44	AV	218.00	150	Horizontal	Pass
5	4825.000	46.97	-3.51	74.0	-27.03	Peak	189.00	150	Horizontal	Pass
5**	4825.000	40.90	-3.51	54.0	-13.10	AV	189.00	150	Horizontal	Pass
6	12041.312	53.17	1.22	74.0	-20.83	Peak	243.00	150	Horizontal	Pass
6**	12041.312	36.19	1.22	54.0	-17.81	AV	243.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.000	39.70	-17.45	74.0	-34.30	Peak	54.00	150	Vertical	Pass
1**	1333.000	26.75	-17.45	54.0	-27.25	AV	54.00	150	Vertical	Pass
2	1998.000	42.14	-15.55	74.0	-31.86	Peak	274.00	150	Vertical	Pass
2**	1998.000	28.59	-15.55	54.0	-25.41	AV	274.00	150	Vertical	Pass
3	2409.500	89.95	-12.05	74.0	15.95	Peak	101.00	150	Vertical	N/A
3**	2409.500	87.22	-12.05	54.0	33.22	AV	101.00	150	Vertical	N/A
4	3217.000	43.25	-7.12	74.0	-30.75	Peak	177.00	150	Vertical	Pass
4**	3217.000	32.36	-7.12	54.0	-21.64	AV	177.00	150	Vertical	Pass
5	5682.000	52.24	-1.96	74.0	-21.76	Peak	317.00	150	Vertical	Pass
5**	5682.000	35.51	-1.96	54.0	-18.49	AV	317.00	150	Vertical	Pass
6	17367.376	58.85	3.35	74.0	-15.15	Peak	317.00	150	Vertical	Pass
6**	17367.376	41.91	3.35	54.0	-12.09	AV	317.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1624.500	41.13	-17.64	74.0	-32.87	Peak	243.00	150	Horizontal	Pass
1**	1624.500	28.27	-17.64	54.0	-25.73	AV	243.00	150	Horizontal	Pass
2	2434.000	103.70	-12.71	74.0	29.70	Peak	140.00	150	Horizontal	N/A
2**	2434.000	150.31	-12.71	54.0	46.31	AV	140.00	150	Horizontal	N/A
3	3249.000	47.69	-8.62	74.0	-26.31	Peak	212.00	150	Horizontal	Pass
3**	3249.000	28.41	-8.62	54.0	-25.59	AV	212.00	150	Horizontal	Pass
4	4875.000	49.07	-3.22	74.0	-24.93	Peak	178.00	150	Horizontal	Pass
4**	4875.000	47.80	-3.22	54.0	-6.20	AV	178.00	150	Horizontal	Pass
5	10882.688	52.83	0.35	74.0	-21.17	Peak	358.00	150	Horizontal	Pass
5**	10882.688	35.53	0.35	54.0	-18.47	AV	358.00	150	Horizontal	Pass
6	17446.126	58.36	3.94	74.0	-15.64	Peak	0.00	150	Horizontal	Pass
6**	17446.126	42.58	3.94	54.0	-11.42	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	39.13	-17.38	74.0	-34.87	Peak	43.00	150	Vertical	Pass
1**	1494.000	27.34	-17.38	54.0	-26.66	AV	43.00	150	Vertical	Pass
2	1968.500	42.30	-15.79	74.0	-31.70	Peak	10.00	150	Vertical	Pass
2**	1968.500	23.75	-15.79	54.0	-30.25	AV	10.00	150	Vertical	Pass
3	2434.000	93.72	-12.71	74.0	19.72	Peak	51.00	150	Vertical	N/A
3**	2434.000	90.26	-12.71	54.0	36.26	AV	51.00	150	Vertical	N/A
4	4875.000	47.97	-3.22	74.0	-26.03	Peak	236.00	150	Vertical	Pass
4**	4875.000	40.32	-3.22	54.0	-13.68	AV	236.00	150	Vertical	Pass
5	8300.938	49.43	-1.43	74.0	-24.57	Peak	99.00	150	Vertical	Pass
5**	8300.938	33.00	-1.43	54.0	-21.00	AV	99.00	150	Vertical	Pass
6	17435.625	59.01	4.34	74.0	-14.99	Peak	239.00	150	Vertical	Pass
6**	17435.625	43.09	4.34	54.0	-10.91	AV	239.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1641.500	40.34	-17.40	74.0	-33.66	Peak	26.00	150	Horizontal	Pass
1**	1641.500	32.92	-17.40	54.0	-21.08	AV	26.00	150	Horizontal	Pass
2	2382.000	46.01	-12.55	74.0	-27.99	Peak	133.00	150	Horizontal	Pass
2**	2382.000	37.30	-12.55	54.0	-16.70	AV	133.00	150	Horizontal	Pass
3	2464.500	150.62	-12.78	74.0	26.62	Peak	147.00	150	Horizontal	N/A
3**	2464.500	98.05	-12.78	54.0	44.05	AV	147.00	150	Horizontal	N/A
4	3260.000	45.49	-8.54	74.0	-28.51	Peak	155.00	150	Horizontal	Pass
4**	3260.000	28.41	-8.54	54.0	-25.59	AV	155.00	150	Horizontal	Pass
5	4924.000	51.44	-2.48	74.0	-22.56	Peak	177.00	150	Horizontal	Pass
5**	4924.000	33.80	-2.48	54.0	-20.20	AV	177.00	150	Horizontal	Pass
6	15620.437	56.66	2.62	74.0	-17.34	Peak	125.00	150	Horizontal	Pass
6**	15620.437	41.06	2.62	54.0	-12.94	AV	125.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.000	39.30	-17.35	74.0	-34.70	Peak	34.00	150	Vertical	Pass
1**	1441.000	28.37	-17.35	54.0	-25.63	AV	34.00	150	Vertical	Pass
2	2193.000	44.32	-13.28	74.0	-29.68	Peak	309.00	150	Vertical	Pass
2**	2193.000	32.50	-13.28	54.0	-21.50	AV	309.00	150	Vertical	Pass
3	2459.500	88.33	-12.91	74.0	14.33	Peak	93.00	150	Vertical	N/A
3**	2459.500	85.63	-12.91	54.0	31.63	AV	93.00	150	Vertical	N/A
4	4696.000	49.56	-3.56	74.0	-24.44	Peak	317.00	150	Vertical	Pass
4**	4696.000	33.39	-3.56	54.0	-20.61	AV	317.00	150	Vertical	Pass
5	8500.750	50.14	-0.92	74.0	-23.86	Peak	41.00	150	Vertical	Pass
5**	8500.750	33.96	-0.92	54.0	-20.04	AV	41.00	150	Vertical	Pass
6	17434.313	58.92	4.39	74.0	-15.08	Peak	323.00	150	Vertical	Pass
6**	17434.313	43.06	4.39	54.0	-10.94	AV	323.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.500	38.76	-17.38	74.0	-35.24	Peak	355.00	150	Horizontal	Pass
1**	1494.500	27.17	-17.38	54.0	-26.83	AV	355.00	150	Horizontal	Pass
2	2408.000	150.44	-12.15	74.0	26.44	Peak	119.00	150	Horizontal	N/A
2**	2408.000	93.08	-12.15	54.0	39.08	AV	119.00	150	Horizontal	N/A
3	3216.000	47.38	-7.33	74.0	-26.62	Peak	288.00	150	Horizontal	Pass
3**	3216.000	29.71	-7.33	54.0	-24.29	AV	288.00	150	Horizontal	Pass
4	6281.000	54.17	0.50	74.0	-19.83	Peak	56.00	150	Horizontal	Pass
4**	6281.000	37.50	0.50	54.0	-16.50	AV	56.00	150	Horizontal	Pass
5	8850.062	49.80	-0.43	74.0	-24.20	Peak	9.00	150	Horizontal	Pass
5**	8850.062	33.61	-0.43	54.0	-20.39	AV	9.00	150	Horizontal	Pass
6	15751.687	57.77	1.85	74.0	-16.23	Peak	25.00	150	Horizontal	Pass
6**	15751.687	40.12	1.85	54.0	-13.88	AV	25.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.35	-17.52	74.0	-34.65	Peak	288.00	150	Vertical	Pass
1**	1499.500	27.65	-17.52	54.0	-26.35	AV	288.00	150	Vertical	Pass
2	2000.000	42.31	-15.46	74.0	-31.69	Peak	260.00	150	Vertical	Pass
2**	2000.000	28.81	-15.46	54.0	-25.19	AV	260.00	150	Vertical	Pass
3	2413.000	88.95	-12.21	74.0	14.95	Peak	36.00	150	Vertical	N/A
3**	2413.000	80.66	-12.21	54.0	26.66	AV	36.00	150	Vertical	N/A
4	3232.000	46.00	-7.66	74.0	-28.00	Peak	340.00	150	Vertical	Pass
4**	3232.000	29.58	-7.66	54.0	-24.42	AV	340.00	150	Vertical	Pass
5	6745.000	53.63	-0.08	74.0	-20.37	Peak	175.00	150	Vertical	Pass
5**	6745.000	38.02	-0.08	54.0	-15.98	AV	175.00	150	Vertical	Pass
6	15455.062	57.20	2.31	74.0	-16.80	Peak	51.00	150	Vertical	Pass
6**	15455.062	39.85	2.31	54.0	-14.15	AV	51.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.500	49.13	-17.47	74.0	-24.87	Peak	360.00	150	Horizontal	Pass
1**	1332.500	31.98	-17.47	54.0	-22.02	AV	360.00	150	Horizontal	Pass
2	2081.000	46.96	-14.35	74.0	-27.04	Peak	329.00	150	Horizontal	Pass
2**	2081.000	29.52	-14.35	54.0	-24.48	AV	329.00	150	Horizontal	Pass
3	2438.500	105.62	-12.69	74.0	31.62	Peak	138.00	150	Horizontal	N/A
3**	2438.500	98.27	-12.69	54.0	44.27	AV	138.00	150	Horizontal	N/A
4	3250.000	48.88	-8.69	74.0	-25.12	Peak	220.00	150	Horizontal	Pass
4**	3250.000	43.27	-8.69	54.0	-10.73	AV	220.00	150	Horizontal	Pass
5	4874.000	50.31	-3.30	74.0	-23.69	Peak	194.00	150	Horizontal	Pass
5**	4874.000	37.69	-3.30	54.0	-16.31	AV	194.00	150	Horizontal	Pass
6	15755.625	57.57	1.77	74.0	-16.43	Peak	74.00	150	Horizontal	Pass
6**	15755.625	40.34	1.77	54.0	-13.66	AV	74.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.78	-17.52	74.0	-34.22	Peak	110.00	150	Vertical	Pass
1**	1499.500	28.49	-17.52	54.0	-25.51	AV	110.00	150	Vertical	Pass
2	1994.000	43.66	-15.58	74.0	-30.34	Peak	263.00	150	Vertical	Pass
2**	1994.000	28.84	-15.58	54.0	-25.16	AV	263.00	150	Vertical	Pass
3	2438.000	97.74	-12.66	74.0	23.74	Peak	44.00	150	Vertical	N/A
3**	2438.000	89.68	-12.66	54.0	35.68	AV	44.00	150	Vertical	N/A
4	3228.000	46.15	-7.22	74.0	-27.85	Peak	129.00	150	Vertical	Pass
4**	3228.000	29.31	-7.22	54.0	-24.69	AV	129.00	150	Vertical	Pass
5	6681.000	54.73	0.02	74.0	-19.27	Peak	277.00	150	Vertical	Pass
5**	6681.000	38.59	0.02	54.0	-15.41	AV	277.00	150	Vertical	Pass
6	15272.625	56.90	1.38	74.0	-17.10	Peak	265.00	150	Vertical	Pass
6**	15272.625	39.59	1.38	54.0	-14.41	AV	265.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.500	38.48	-17.41	74.0	-35.52	Peak	355.00	150	Horizontal	Pass
1**	1493.500	24.77	-17.41	54.0	-29.23	AV	355.00	150	Horizontal	Pass
2	2459.000	96.43	-12.91	74.0	22.43	Peak	137.00	150	Horizontal	N/A
2**	2459.000	88.68	-12.91	54.0	34.68	AV	137.00	150	Horizontal	N/A
3	3221.000	46.14	-7.01	74.0	-27.86	Peak	203.00	150	Horizontal	Pass
3**	3221.000	29.46	-7.01	54.0	-24.54	AV	203.00	150	Horizontal	Pass
4	6286.000	53.01	0.38	74.0	-20.99	Peak	121.00	150	Horizontal	Pass
4**	6286.000	37.51	0.38	54.0	-16.49	AV	121.00	150	Horizontal	Pass
5	8625.812	50.32	-1.51	74.0	-23.68	Peak	133.00	150	Horizontal	Pass
5**	8625.812	33.92	-1.51	54.0	-20.08	AV	133.00	150	Horizontal	Pass
6	17454.000	58.65	3.90	74.0	-15.35	Peak	303.00	150	Horizontal	Pass
6**	17454.000	42.68	3.90	54.0	-11.32	AV	303.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	41.04	-17.52	74.0	-32.96	Peak	108.00	150	Vertical	Pass
1**	1499.500	29.00	-17.52	54.0	-25.00	AV	108.00	150	Vertical	Pass
2	1999.500	43.34	-15.48	74.0	-30.66	Peak	276.00	150	Vertical	Pass
2**	1999.500	29.21	-15.48	54.0	-24.79	AV	276.00	150	Vertical	Pass
3	2460.000	85.53	-12.91	74.0	11.53	Peak	65.00	150	Vertical	N/A
3**	2460.000	78.22	-12.91	54.0	24.22	AV	65.00	150	Vertical	N/A
4	5141.000	51.60	-2.29	74.0	-22.40	Peak	257.00	150	Vertical	Pass
4**	5141.000	35.67	-2.29	54.0	-18.33	AV	257.00	150	Vertical	Pass
5	8924.812	51.20	0.08	74.0	-22.80	Peak	-1.00	150	Vertical	Pass
5**	8924.812	33.24	0.08	54.0	-20.76	AV	-1.00	150	Vertical	Pass
6	17363.438	58.35	3.18	74.0	-15.65	Peak	142.00	150	Vertical	Pass
6**	17363.438	41.58	3.18	54.0	-12.42	AV	142.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.500	37.93	-17.42	74.0	-36.07	Peak	342.00	150	Horizontal	Pass
1**	1495.500	28.56	-17.42	54.0	-25.44	AV	342.00	150	Horizontal	Pass
2	2409.500	96.76	-12.05	74.0	22.76	Peak	127.00	150	Horizontal	N/A
2**	2409.500	93.83	-12.05	54.0	39.83	AV	127.00	150	Horizontal	N/A
3	3358.000	46.12	-7.87	74.0	-27.88	Peak	225.00	150	Horizontal	Pass
3**	3358.000	28.67	-7.87	54.0	-25.33	AV	225.00	150	Horizontal	Pass
4	6274.000	52.94	0.28	74.0	-21.06	Peak	160.00	150	Horizontal	Pass
4**	6274.000	37.07	0.28	54.0	-16.93	AV	160.00	150	Horizontal	Pass
5	8582.688	50.60	-1.55	74.0	-23.40	Peak	-1.00	150	Horizontal	Pass
5**	8582.688	33.52	-1.55	54.0	-20.48	AV	-1.00	150	Horizontal	Pass
6	17425.125	59.31	4.70	74.0	-14.69	Peak	361.00	150	Horizontal	Pass
6**	17425.125	43.36	4.70	54.0	-10.64	AV	361.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	39.42	-17.38	74.0	-34.58	Peak	276.00	150	Vertical	Pass
1**	1494.000	28.42	-17.38	54.0	-25.58	AV	276.00	150	Vertical	Pass
2	1992.500	42.19	-15.61	74.0	-31.81	Peak	245.00	150	Vertical	Pass
2**	1992.500	28.20	-15.61	54.0	-25.80	AV	245.00	150	Vertical	Pass
3	2409.500	85.65	-12.05	74.0	11.65	Peak	41.00	150	Vertical	N/A
3**	2409.500	82.73	-12.05	54.0	28.73	AV	41.00	150	Vertical	N/A
4	5135.000	50.69	-2.18	74.0	-23.31	Peak	320.00	150	Vertical	Pass
4**	5135.000	35.16	-2.18	54.0	-18.84	AV	320.00	150	Vertical	Pass
5	9147.625	50.35	-0.95	74.0	-23.65	Peak	216.00	150	Vertical	Pass
5**	9147.625	33.38	-0.95	54.0	-20.62	AV	216.00	150	Vertical	Pass
6	17418.562	58.85	4.81	74.0	-15.15	Peak	157.00	150	Vertical	Pass
6**	17418.562	43.12	4.81	54.0	-10.88	AV	157.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1624.500	40.29	-17.64	74.0	-33.71	Peak	238.00	150	Horizontal	Pass
1**	1624.500	28.52	-17.64	54.0	-25.48	AV	238.00	150	Horizontal	Pass
2	2434.000	103.29	-12.71	74.0	29.29	Peak	129.00	150	Horizontal	N/A
2**	2434.000	150.16	-12.71	54.0	46.16	AV	129.00	150	Horizontal	N/A
3	3249.000	47.55	-8.62	74.0	-26.45	Peak	229.00	150	Horizontal	Pass
3**	3249.000	28.59	-8.62	54.0	-25.41	AV	229.00	150	Horizontal	Pass
4	4875.000	48.28	-3.22	74.0	-25.72	Peak	150.00	150	Horizontal	Pass
4**	4875.000	47.34	-3.22	54.0	-6.66	AV	150.00	150	Horizontal	Pass
5	10247.312	51.37	1.13	74.0	-22.63	Peak	333.00	150	Horizontal	Pass
5**	10247.312	34.88	1.13	54.0	-19.12	AV	333.00	150	Horizontal	Pass
6	17427.751	59.15	4.62	74.0	-14.85	Peak	329.00	150	Horizontal	Pass
6**	17427.751	43.88	4.62	54.0	-10.12	AV	329.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.000	41.89	-17.39	74.0	-32.11	Peak	283.00	150	Vertical	Pass
1**	1331.000	30.03	-17.39	54.0	-23.97	AV	283.00	150	Vertical	Pass
2	1995.500	42.90	-15.49	74.0	-31.10	Peak	260.00	150	Vertical	Pass
2**	1995.500	29.38	-15.49	54.0	-24.62	AV	260.00	150	Vertical	Pass
3	2434.000	96.27	-12.71	74.0	22.27	Peak	38.00	150	Vertical	N/A
3**	2434.000	92.99	-12.71	54.0	38.99	AV	38.00	150	Vertical	N/A
4	3249.000	45.64	-8.62	74.0	-28.36	Peak	41.00	150	Vertical	Pass
4**	3249.000	28.74	-8.62	54.0	-25.26	AV	41.00	150	Vertical	Pass
5	4875.000	47.52	-3.22	74.0	-26.48	Peak	172.00	150	Vertical	Pass
5**	4875.000	40.24	-3.22	54.0	-13.76	AV	172.00	150	Vertical	Pass
6	17446.126	58.99	3.94	74.0	-15.01	Peak	0.00	150	Vertical	Pass
6**	17446.126	43.19	3.94	54.0	-10.81	AV	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.500	39.55	-17.42	74.0	-34.45	Peak	340.00	150	Horizontal	Pass
1**	1495.500	27.11	-17.42	54.0	-26.89	AV	340.00	150	Horizontal	Pass
2	2464.500	93.38	-12.78	74.0	19.38	Peak	140.00	150	Horizontal	N/A
2**	2464.500	90.83	-12.78	54.0	36.83	AV	140.00	150	Horizontal	N/A
3	3414.000	45.97	-7.35	74.0	-28.03	Peak	31.00	150	Horizontal	Pass
3**	3414.000	29.27	-7.35	54.0	-24.73	AV	31.00	150	Horizontal	Pass
4	6689.000	54.14	0.06	74.0	-19.86	Peak	54.00	150	Horizontal	Pass
4**	6689.000	38.02	0.06	54.0	-15.98	AV	54.00	150	Horizontal	Pass
5	10268.875	51.79	1.06	74.0	-22.21	Peak	88.00	150	Horizontal	Pass
5**	10268.875	34.67	1.06	54.0	-19.33	AV	88.00	150	Horizontal	Pass
6	17183.625	58.11	3.20	74.0	-15.89	Peak	13.00	150	Horizontal	Pass
6**	17183.625	41.79	3.20	54.0	-12.21	AV	13.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.500	39.97	-17.47	74.0	-34.03	Peak	35.00	150	Vertical	Pass
1**	1332.500	27.85	-17.47	54.0	-26.15	AV	35.00	150	Vertical	Pass
2	1996.500	43.44	-15.51	74.0	-30.56	Peak	268.00	150	Vertical	Pass
2**	1996.500	29.10	-15.51	54.0	-24.90	AV	268.00	150	Vertical	Pass
3	2459.000	82.97	-12.91	74.0	8.97	Peak	58.00	150	Vertical	N/A
3**	2459.000	79.72	-12.91	54.0	25.72	AV	58.00	150	Vertical	N/A
4	3636.000	48.52	-6.57	74.0	-25.48	Peak	8.00	150	Vertical	Pass
4**	3636.000	31.13	-6.57	54.0	-22.87	AV	8.00	150	Vertical	Pass
5	6610.000	53.51	0.61	74.0	-20.49	Peak	256.00	150	Vertical	Pass
5**	6610.000	37.62	0.61	54.0	-16.38	AV	256.00	150	Vertical	Pass
6	17434.313	58.35	4.39	74.0	-15.65	Peak	81.00	150	Vertical	Pass
6**	17434.313	43.67	4.39	54.0	-10.33	AV	81.00	150	Vertical	Pass

iT20

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.000	37.82	-17.53	74.0	-36.18	Peak	4.00	150	Horizontal	Pass
1**	1608.000	29.65	-17.53	54.0	-24.35	AV	4.00	150	Horizontal	Pass
2	2409.000	95.14	-12.09	74.0	21.14	Peak	26.00	150	Horizontal	N/A
2**	2409.000	91.79	-12.09	54.0	37.79	AV	26.00	150	Horizontal	N/A
3	3217.000	47.19	-7.12	74.0	-26.81	Peak	154.00	150	Horizontal	Pass
3**	3217.000	44.03	-7.12	54.0	-9.97	AV	154.00	150	Horizontal	Pass
4	6606.000	54.60	0.51	74.0	-19.40	Peak	251.00	150	Horizontal	Pass
4**	6606.000	44.01	0.51	54.0	-9.99	AV	251.00	150	Horizontal	Pass
5	10851.063	52.45	0.85	74.0	-21.55	Peak	181.00	150	Horizontal	Pass
5**	10851.063	41.63	0.85	54.0	-12.37	AV	181.00	150	Horizontal	Pass
6	17415.938	59.77	4.75	74.0	-14.23	Peak	158.00	150	Horizontal	Pass
6**	17415.938	49.84	4.75	54.0	-4.16	AV	158.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1956.500	44.74	-15.83	74.0	-29.26	Peak	278.00	150	Vertical	Pass
1**	1956.500	34.66	-15.83	54.0	-19.34	AV	278.00	150	Vertical	Pass
2	2409.000	81.57	-12.09	74.0	7.57	Peak	357.00	150	Vertical	N/A
2**	2409.000	78.23	-12.09	54.0	24.23	AV	357.00	150	Vertical	N/A
3	3941.000	48.40	-5.27	74.0	-25.60	Peak	207.00	150	Vertical	Pass
3**	3941.000	37.11	-5.27	54.0	-16.89	AV	207.00	150	Vertical	Pass
4	6606.000	53.87	0.51	74.0	-20.13	Peak	341.00	150	Vertical	Pass
4**	6606.000	43.88	0.51	54.0	-10.12	AV	341.00	150	Vertical	Pass
5	12609.125	53.78	2.18	74.0	-20.22	Peak	360.00	150	Vertical	Pass
5**	12609.125	42.99	2.18	54.0	-11.01	AV	360.00	150	Vertical	Pass
6	17415.938	60.71	4.75	74.0	-13.29	Peak	267.00	150	Vertical	Pass
6**	17415.938	49.93	4.75	54.0	-4.07	AV	267.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1751.500	39.34	-17.02	74.0	-34.66	Peak	49.00	150	Horizontal	Pass
1**	1751.500	23.93	-17.02	54.0	-30.07	AV	49.00	150	Horizontal	Pass
2	2434.000	97.67	-12.71	74.0	23.67	Peak	307.00	150	Horizontal	N/A
2**	2434.000	94.34	-12.71	54.0	40.34	AV	307.00	150	Horizontal	N/A
3	3250.000	51.87	-8.69	74.0	-22.13	Peak	0.00	150	Horizontal	Pass
3**	3250.000	47.99	-8.69	54.0	-6.01	AV	0.00	150	Horizontal	Pass
4	4875.000	47.47	-3.22	74.0	-26.53	Peak	178.00	150	Horizontal	Pass
4**	4875.000	46.37	-3.22	54.0	-7.63	AV	178.00	150	Horizontal	Pass
5	9018.250	50.22	-0.19	74.0	-23.78	Peak	26.00	150	Horizontal	Pass
5**	9018.250	33.59	-0.19	54.0	-20.41	AV	26.00	150	Horizontal	Pass
6	17465.813	58.58	3.83	74.0	-15.42	Peak	241.00	150	Horizontal	Pass
6**	17465.813	43.66	3.83	54.0	-10.34	AV	241.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	40.60	-17.52	74.0	-33.40	Peak	232.00	150	Vertical	Pass
1**	1499.000	28.82	-17.52	54.0	-25.18	AV	232.00	150	Vertical	Pass
2	2434.000	89.51	-12.71	74.0	15.51	Peak	303.00	150	Vertical	N/A
2**	2434.000	86.37	-12.71	54.0	32.37	AV	303.00	150	Vertical	N/A
3	4874.000	49.66	-3.30	74.0	-24.34	Peak	265.00	150	Vertical	Pass
3**	4874.000	33.71	-3.30	54.0	-20.29	AV	265.00	150	Vertical	Pass
4	6282.000	53.43	0.46	74.0	-20.57	Peak	24.00	150	Vertical	Pass
4**	6282.000	36.92	0.46	54.0	-17.08	AV	24.00	150	Vertical	Pass
5	9317.250	49.86	-0.74	74.0	-24.14	Peak	198.00	150	Vertical	Pass
5**	9317.250	33.87	-0.74	54.0	-20.13	AV	198.00	150	Vertical	Pass
6	17438.251	59.77	4.21	74.0	-14.23	Peak	121.00	150	Vertical	Pass
6**	17438.251	43.02	4.21	54.0	-10.98	AV	121.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.000	38.59	-17.44	74.0	-35.41	Peak	247.00	150	Horizontal	Pass
1**	1496.000	26.17	-17.44	54.0	-27.83	AV	247.00	150	Horizontal	Pass
2	2464.500	96.11	-12.78	74.0	22.11	Peak	301.00	150	Horizontal	N/A
2**	2464.500	93.44	-12.78	54.0	39.44	AV	301.00	150	Horizontal	N/A
3	3282.000	50.03	-8.22	74.0	-23.97	Peak	0.00	150	Horizontal	Pass
3**	3282.000	29.15	-8.22	54.0	-24.85	AV	0.00	150	Horizontal	Pass
4	4924.000	50.64	-2.48	74.0	-23.36	Peak	265.00	150	Horizontal	Pass
4**	4924.000	35.30	-2.48	54.0	-18.70	AV	265.00	150	Horizontal	Pass
5	10876.937	52.16	0.39	74.0	-21.84	Peak	310.00	150	Horizontal	Pass
5**	10876.937	36.02	0.39	54.0	-17.98	AV	310.00	150	Horizontal	Pass
6	17373.938	58.61	3.61	74.0	-15.39	Peak	0.00	150	Horizontal	Pass
6**	17373.938	42.11	3.61	54.0	-11.89	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	40.52	-17.52	74.0	-33.48	Peak	252.00	150	Vertical	Pass
1**	1499.000	29.36	-17.52	54.0	-24.64	AV	252.00	150	Vertical	Pass
2	2464.500	87.59	-12.78	74.0	13.59	Peak	302.00	150	Vertical	N/A
2**	2464.500	84.96	-12.78	54.0	30.96	AV	302.00	150	Vertical	N/A
3	3703.000	47.38	-5.84	74.0	-26.62	Peak	33.00	150	Vertical	Pass
3**	3703.000	30.60	-5.84	54.0	-23.40	AV	33.00	150	Vertical	Pass
4	6678.000	53.50	0.09	74.0	-20.50	Peak	80.00	150	Vertical	Pass
4**	6678.000	37.88	0.09	54.0	-16.12	AV	80.00	150	Vertical	Pass
5	10835.250	51.82	0.99	74.0	-22.18	Peak	108.00	150	Vertical	Pass
5**	10835.250	34.98	0.99	54.0	-19.02	AV	108.00	150	Vertical	Pass
6	17433.000	58.99	4.44	74.0	-15.01	Peak	163.00	150	Vertical	Pass
6**	17433.000	43.54	4.44	54.0	-10.46	AV	163.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1536.000	37.82	-17.56	74.0	-36.18	Peak	223.00	150	Horizontal	Pass
1**	1536.000	23.85	-17.56	54.0	-30.15	AV	223.00	150	Horizontal	Pass
2	2411.000	91.19	-12.10	74.0	17.19	Peak	314.00	150	Horizontal	N/A
2**	2411.000	84.04	-12.10	54.0	30.04	AV	314.00	150	Horizontal	N/A
3	3216.000	49.14	-7.33	74.0	-24.86	Peak	0.00	150	Horizontal	Pass
3**	3216.000	30.57	-7.33	54.0	-23.43	AV	0.00	150	Horizontal	Pass
4	5661.000	52.46	-2.14	74.0	-21.54	Peak	2.00	150	Horizontal	Pass
4**	5661.000	35.09	-2.14	54.0	-18.91	AV	2.00	150	Horizontal	Pass
5	9340.250	50.43	-1.20	74.0	-23.57	Peak	187.00	150	Horizontal	Pass
5**	9340.250	33.09	-1.20	54.0	-20.91	AV	187.00	150	Horizontal	Pass
6	17429.062	58.63	4.58	74.0	-15.37	Peak	218.00	150	Horizontal	Pass
6**	17429.062	43.27	4.58	54.0	-10.73	AV	218.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1857.500	42.41	-16.35	74.0	-31.59	Peak	0.00	150	Vertical	Pass
1**	1857.500	29.99	-16.35	54.0	-24.01	AV	0.00	150	Vertical	Pass
2	2415.000	82.59	-12.26	74.0	8.59	Peak	304.00	150	Vertical	N/A
2**	2415.000	75.10	-12.26	54.0	21.10	AV	304.00	150	Vertical	N/A
3	4033.000	47.59	-4.73	74.0	-26.41	Peak	214.00	150	Vertical	Pass
3**	4033.000	31.70	-4.73	54.0	-22.30	AV	214.00	150	Vertical	Pass
4	6284.000	53.15	0.29	74.0	-20.85	Peak	309.00	150	Vertical	Pass
4**	6284.000	37.02	0.29	54.0	-16.98	AV	309.00	150	Vertical	Pass
5	9311.500	50.24	-0.74	74.0	-23.76	Peak	159.00	150	Vertical	Pass
5**	9311.500	33.50	-0.74	54.0	-20.50	AV	159.00	150	Vertical	Pass
6	17425.125	58.15	4.70	74.0	-15.85	Peak	214.00	150	Vertical	Pass
6**	17425.125	43.97	4.70	54.0	-10.03	AV	214.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1624.500	39.25	-17.64	74.0	-34.75	Peak	285.00	150	Horizontal	Pass
1**	1624.500	25.46	-17.64	54.0	-28.54	AV	285.00	150	Horizontal	Pass
2	2435.000	99.55	-12.72	74.0	25.55	Peak	315.00	150	Horizontal	N/A
2**	2435.000	92.79	-12.72	54.0	38.79	AV	315.00	150	Horizontal	N/A
3	3250.000	53.57	-8.69	74.0	-20.43	Peak	11.00	150	Horizontal	Pass
3**	3250.000	50.70	-8.69	54.0	-3.30	AV	11.00	150	Horizontal	Pass
4	4811.000	50.47	-2.92	74.0	-23.53	Peak	247.00	150	Horizontal	Pass
4**	4811.000	34.51	-2.92	54.0	-19.49	AV	247.00	150	Horizontal	Pass
5	8599.937	50.96	-1.73	74.0	-23.04	Peak	210.00	150	Horizontal	Pass
5**	8599.937	33.37	-1.73	54.0	-20.63	AV	210.00	150	Horizontal	Pass
6	17741.437	58.76	3.04	74.0	-15.24	Peak	332.00	150	Horizontal	Pass
6**	17741.437	41.65	3.04	54.0	-12.35	AV	332.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1726.000	41.85	-17.24	74.0	-32.15	Peak	351.00	150	Vertical	Pass
1**	1726.000	31.15	-17.24	54.0	-22.85	AV	351.00	150	Vertical	Pass
2	2434.500	91.82	-12.72	74.0	17.82	Peak	312.00	150	Vertical	N/A
2**	2434.500	84.59	-12.72	54.0	30.59	AV	312.00	150	Vertical	N/A
3	3249.000	45.57	-8.62	74.0	-28.43	Peak	286.00	150	Vertical	Pass
3**	3249.000	28.95	-8.62	54.0	-25.05	AV	286.00	150	Vertical	Pass
4	5084.000	51.25	-2.41	74.0	-22.75	Peak	225.00	150	Vertical	Pass
4**	5084.000	34.53	-2.41	54.0	-19.47	AV	225.00	150	Vertical	Pass
5	9824.687	50.73	0.40	74.0	-23.27	Peak	29.00	150	Vertical	Pass
5**	9824.687	34.63	0.40	54.0	-19.37	AV	29.00	150	Vertical	Pass
6	17408.063	58.76	4.51	74.0	-15.24	Peak	94.00	150	Vertical	Pass
6**	17408.063	43.50	4.51	54.0	-10.50	AV	94.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1761.500	39.35	-17.17	74.0	-34.65	Peak	273.00	150	Horizontal	Pass
1**	1761.500	24.35	-17.17	54.0	-29.65	AV	273.00	150	Horizontal	Pass
2	2464.000	91.10	-12.76	74.0	17.10	Peak	314.00	150	Horizontal	N/A
2**	2464.000	84.68	-12.76	54.0	30.68	AV	314.00	150	Horizontal	N/A
3	3283.000	48.46	-8.20	74.0	-25.54	Peak	360.00	150	Horizontal	Pass
3**	3283.000	38.09	-8.20	54.0	-15.91	AV	360.00	150	Horizontal	Pass
4	6296.000	53.06	0.10	74.0	-20.94	Peak	0.00	150	Horizontal	Pass
4**	6296.000	37.36	0.10	54.0	-16.64	AV	0.00	150	Horizontal	Pass
5	10421.250	52.10	0.64	74.0	-21.90	Peak	198.00	150	Horizontal	Pass
5**	10421.250	35.22	0.64	54.0	-18.78	AV	198.00	150	Horizontal	Pass
6	17414.625	60.22	4.72	74.0	-13.78	Peak	149.00	150	Horizontal	Pass
6**	17414.625	43.45	4.72	54.0	-10.55	AV	149.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.88	-17.52	74.0	-33.12	Peak	242.00	150	Vertical	Pass
1**	1499.500	30.53	-17.52	54.0	-23.47	AV	242.00	150	Vertical	Pass
2	2459.500	83.15	-12.91	74.0	9.15	Peak	306.00	150	Vertical	N/A
2**	2459.500	75.75	-12.91	54.0	21.75	AV	306.00	150	Vertical	N/A
3	3614.000	46.03	-7.15	74.0	-27.97	Peak	317.00	150	Vertical	Pass
3**	3614.000	30.31	-7.15	54.0	-23.69	AV	317.00	150	Vertical	Pass
4	6672.000	53.13	-0.18	74.0	-20.87	Peak	231.00	150	Vertical	Pass
4**	6672.000	38.14	-0.18	54.0	-15.86	AV	231.00	150	Vertical	Pass
5	10508.937	51.81	-0.31	74.0	-22.19	Peak	136.00	150	Vertical	Pass
5**	10508.937	34.97	-0.31	54.0	-19.03	AV	136.00	150	Vertical	Pass
6	17426.438	59.30	4.66	74.0	-14.70	Peak	237.00	150	Vertical	Pass
6**	17426.438	43.59	4.66	54.0	-10.41	AV	237.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1823.500	39.27	-16.74	74.0	-34.73	Peak	103.00	150	Horizontal	Pass
1**	1823.500	26.94	-16.74	54.0	-27.06	AV	103.00	150	Horizontal	Pass
2	2417.000	89.63	-12.30	74.0	15.63	Peak	295.00	150	Horizontal	N/A
2**	2417.000	81.30	-12.30	54.0	27.30	AV	295.00	150	Horizontal	N/A
3	3217.000	46.27	-7.12	74.0	-27.73	Peak	359.00	150	Horizontal	Pass
3**	3217.000	42.95	-7.12	54.0	-11.05	AV	359.00	150	Horizontal	Pass
4	5142.000	48.15	-2.38	74.0	-25.85	Peak	360.00	150	Horizontal	Pass
4**	5142.000	37.57	-2.38	54.0	-16.43	AV	360.00	150	Horizontal	Pass
5	10369.500	51.32	0.76	74.0	-22.68	Peak	41.00	150	Horizontal	Pass
5**	10369.500	35.28	0.76	54.0	-18.72	AV	41.00	150	Horizontal	Pass
6	17375.250	58.07	3.67	74.0	-15.93	Peak	207.00	150	Horizontal	Pass
6**	17375.250	42.33	3.67	54.0	-11.67	AV	207.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.08	-17.52	74.0	-33.92	Peak	283.00	150	Vertical	Pass
1**	1499.500	29.78	-17.52	54.0	-24.22	AV	283.00	150	Vertical	Pass
2	2179.500	44.09	-13.58	74.0	-29.91	Peak	276.00	150	Vertical	Pass
2**	2179.500	34.49	-13.58	54.0	-19.51	AV	276.00	150	Vertical	Pass
3	2416.500	80.45	-12.29	74.0	6.45	Peak	299.00	150	Vertical	N/A
3**	2416.500	72.82	-12.29	54.0	18.82	AV	299.00	150	Vertical	N/A
4	3663.000	47.05	-6.55	74.0	-26.95	Peak	251.00	150	Vertical	Pass
4**	3663.000	32.53	-6.55	54.0	-21.47	AV	251.00	150	Vertical	Pass
5	6298.000	53.33	-0.00	74.0	-20.67	Peak	213.00	150	Vertical	Pass
5**	6298.000	37.18	-0.00	54.0	-16.82	AV	213.00	150	Vertical	Pass
6	17412.000	59.87	4.62	74.0	-14.13	Peak	277.00	150	Vertical	Pass
6**	17412.000	43.54	4.62	54.0	-10.46	AV	277.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.500	40.28	-16.37	74.0	-33.72	Peak	240.00	150	Horizontal	Pass
1**	1859.500	25.04	-16.37	54.0	-28.96	AV	240.00	150	Horizontal	Pass
2	2435.500	150.71	-12.72	74.0	26.71	Peak	299.00	150	Horizontal	N/A
2**	2435.500	92.64	-12.72	54.0	38.64	AV	299.00	150	Horizontal	N/A
3	3250.000	53.94	-8.69	74.0	-20.06	Peak	1.00	150	Horizontal	Pass
3**	3250.000	50.58	-8.69	54.0	-3.42	AV	1.00	150	Horizontal	Pass
4	4872.000	48.41	-3.37	74.0	-25.59	Peak	286.00	150	Horizontal	Pass
4**	4872.000	38.29	-3.37	54.0	-15.71	AV	286.00	150	Horizontal	Pass
5	9921.000	51.57	-0.66	74.0	-22.43	Peak	357.00	150	Horizontal	Pass
5**	9921.000	34.43	-0.66	54.0	-19.57	AV	357.00	150	Horizontal	Pass
6	16222.875	57.55	2.19	74.0	-16.45	Peak	173.00	150	Horizontal	Pass
6**	16222.875	40.24	2.19	54.0	-13.76	AV	173.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.59	-17.52	74.0	-33.41	Peak	255.00	150	Vertical	Pass
1**	1499.500	29.97	-17.52	54.0	-24.03	AV	255.00	150	Vertical	Pass
2	2441.500	91.93	-12.69	74.0	17.93	Peak	309.00	150	Vertical	N/A
2**	2441.500	83.46	-12.69	54.0	29.46	AV	309.00	150	Vertical	N/A
3	3250.000	45.87	-8.69	74.0	-28.13	Peak	158.00	150	Vertical	Pass
3**	3250.000	35.81	-8.69	54.0	-18.19	AV	158.00	150	Vertical	Pass
4	5365.000	51.38	-2.08	74.0	-22.62	Peak	3.00	150	Vertical	Pass
4**	5365.000	34.82	-2.08	54.0	-19.18	AV	3.00	150	Vertical	Pass
5	8779.625	50.08	-1.02	74.0	-23.92	Peak	94.00	150	Vertical	Pass
5**	8779.625	33.26	-1.02	54.0	-20.74	AV	94.00	150	Vertical	Pass
6	17419.874	59.29	4.83	74.0	-14.71	Peak	236.00	150	Vertical	Pass
6**	17419.874	43.31	4.83	54.0	-10.69	AV	236.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1765.000	39.21	-16.99	74.0	-34.79	Peak	0.00	150	Horizontal	Pass
1**	1765.000	27.73	-16.99	54.0	-26.27	AV	0.00	150	Horizontal	Pass
2	2464.000	91.79	-12.76	74.0	17.79	Peak	297.00	150	Horizontal	N/A
2**	2464.000	83.77	-12.76	54.0	29.77	AV	297.00	150	Horizontal	N/A
3	3283.000	47.81	-8.20	74.0	-26.19	Peak	0.00	150	Horizontal	Pass
3**	3283.000	36.59	-8.20	54.0	-17.41	AV	0.00	150	Horizontal	Pass
4	5703.000	52.00	-1.82	74.0	-22.00	Peak	295.00	150	Horizontal	Pass
4**	5703.000	35.63	-1.82	54.0	-18.37	AV	295.00	150	Horizontal	Pass
5	9452.375	50.94	-0.30	74.0	-23.06	Peak	205.00	150	Horizontal	Pass
5**	9452.375	33.72	-0.30	54.0	-20.28	AV	205.00	150	Horizontal	Pass
6	15671.625	57.47	1.91	74.0	-16.53	Peak	330.00	150	Horizontal	Pass
6**	15671.625	40.32	1.91	54.0	-13.68	AV	330.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.81	-17.52	74.0	-33.19	Peak	234.00	150	Vertical	Pass
1**	1499.500	29.63	-17.52	54.0	-24.37	AV	234.00	150	Vertical	Pass
2	2463.000	83.46	-12.74	74.0	9.46	Peak	299.00	150	Vertical	N/A
2**	2463.000	74.66	-12.74	54.0	20.66	AV	299.00	150	Vertical	N/A
3	3561.000	46.58	-6.59	74.0	-27.42	Peak	304.00	150	Vertical	Pass
3**	3561.000	30.04	-6.59	54.0	-23.96	AV	304.00	150	Vertical	Pass
4	4793.000	50.92	-2.23	74.0	-23.08	Peak	356.00	150	Vertical	Pass
4**	4793.000	33.92	-2.23	54.0	-20.08	AV	356.00	150	Vertical	Pass
5	9859.188	51.00	-0.34	74.0	-23.00	Peak	93.00	150	Vertical	Pass
5**	9859.188	33.70	-0.34	54.0	-20.30	AV	93.00	150	Vertical	Pass
6	16205.813	57.04	2.56	74.0	-16.96	Peak	339.00	150	Vertical	Pass
6**	16205.813	40.83	2.56	54.0	-13.17	AV	339.00	150	Vertical	Pass

elite V8

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	40.43	-17.38	74.0	-33.57	Peak	296.00	150	Horizontal	Pass
1**	1494.000	27.55	-17.38	54.0	-26.45	AV	296.00	150	Horizontal	Pass
2	2409.500	99.97	-12.05	74.0	25.97	Peak	216.00	150	Horizontal	N/A
2**	2409.500	97.04	-12.05	54.0	43.04	AV	216.00	150	Horizontal	N/A
3	3217.000	45.32	-7.12	74.0	-28.68	Peak	250.00	150	Horizontal	Pass
3**	3217.000	45.41	-7.12	54.0	-8.59	AV	250.00	150	Horizontal	Pass
4	4825.000	47.28	-3.51	74.0	-26.72	Peak	65.00	150	Horizontal	Pass
4**	4825.000	44.35	-3.51	54.0	-9.65	AV	65.00	150	Horizontal	Pass
5	11729.375	52.52	1.32	74.0	-21.48	Peak	97.00	150	Horizontal	Pass
5**	11729.375	35.98	1.32	54.0	-18.02	AV	97.00	150	Horizontal	Pass
6	17475.000	58.31	3.60	74.0	-15.69	Peak	65.00	150	Horizontal	Pass
6**	17475.000	42.88	3.60	54.0	-11.12	AV	65.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	41.53	-17.38	74.0	-32.47	Peak	249.00	150	Vertical	Pass
1**	1494.000	29.04	-17.38	54.0	-24.96	AV	249.00	150	Vertical	Pass
2	2414.500	90.10	-12.25	74.0	16.10	Peak	292.00	150	Vertical	N/A
2**	2414.500	87.52	-12.25	54.0	33.52	AV	292.00	150	Vertical	N/A
3	4825.000	48.42	-3.51	74.0	-25.58	Peak	74.00	150	Vertical	Pass
3**	4825.000	41.15	-3.51	54.0	-12.85	AV	74.00	150	Vertical	Pass
4	6597.000	54.13	-0.16	74.0	-19.87	Peak	85.00	150	Vertical	Pass
4**	6597.000	37.44	-0.16	54.0	-16.56	AV	85.00	150	Vertical	Pass
5	10865.438	52.73	0.50	74.0	-21.27	Peak	268.00	150	Vertical	Pass
5**	10865.438	35.00	0.50	54.0	-19.00	AV	268.00	150	Vertical	Pass
6	17434.313	58.28	4.39	74.0	-15.72	Peak	3.00	150	Vertical	Pass
6**	17434.313	43.60	4.39	54.0	-10.40	AV	3.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.60	-17.52	74.0	-33.40	Peak	281.00	150	Horizontal	Pass
1**	1499.500	29.33	-17.52	54.0	-24.67	AV	281.00	150	Horizontal	Pass
2	2434.000	102.64	-12.71	74.0	28.64	Peak	216.00	150	Horizontal	N/A
2**	2434.000	99.51	-12.71	54.0	45.51	AV	216.00	150	Horizontal	N/A
3	3250.000	52.21	-8.69	74.0	-21.79	Peak	286.00	150	Horizontal	Pass
3**	3250.000	49.13	-8.69	54.0	-4.87	AV	286.00	150	Horizontal	Pass
4	4875.000	48.90	-3.22	74.0	-25.10	Peak	260.00	150	Horizontal	Pass
4**	4875.000	49.00	-3.22	54.0	-5.00	AV	260.00	150	Horizontal	Pass
5	11509.188	52.30	-0.30	74.0	-21.70	Peak	267.00	150	Horizontal	Pass
5**	11509.188	34.85	-0.30	54.0	-19.15	AV	267.00	150	Horizontal	Pass
6	17431.687	58.70	4.49	74.0	-15.30	Peak	360.00	150	Horizontal	Pass
6**	17431.687	43.44	4.49	54.0	-10.56	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	41.60	-17.38	74.0	-32.40	Peak	247.00	150	Vertical	Pass
1**	1494.000	29.13	-17.38	54.0	-24.87	AV	247.00	150	Vertical	Pass
2	2434.000	94.80	-12.71	74.0	20.80	Peak	291.00	150	Vertical	N/A
2**	2434.000	91.46	-12.71	54.0	37.46	AV	291.00	150	Vertical	N/A
3	3249.000	46.77	-8.62	74.0	-27.23	Peak	297.00	150	Vertical	Pass
3**	3249.000	28.72	-8.62	54.0	-25.28	AV	297.00	150	Vertical	Pass
4	4875.000	48.24	-3.22	74.0	-25.76	Peak	31.00	150	Vertical	Pass
4**	4875.000	44.87	-3.22	54.0	-9.13	AV	31.00	150	Vertical	Pass
5	9205.125	50.16	-0.89	74.0	-23.84	Peak	167.00	150	Vertical	Pass
5**	9205.125	33.72	-0.89	54.0	-20.28	AV	167.00	150	Vertical	Pass
6	17454.000	57.88	3.90	74.0	-16.12	Peak	147.00	150	Vertical	Pass
6**	17454.000	42.52	3.90	54.0	-11.48	AV	147.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.77	-17.52	74.0	-34.23	Peak	282.00	150	Horizontal	Pass
1**	1499.500	28.22	-17.52	54.0	-25.78	AV	282.00	150	Horizontal	Pass
2	2464.500	150.75	-12.78	74.0	26.75	Peak	196.00	150	Horizontal	N/A
2**	2464.500	98.12	-12.78	54.0	44.12	AV	196.00	150	Horizontal	N/A
3	3284.000	42.52	-8.20	74.0	-31.48	Peak	302.00	150	Horizontal	Pass
3**	3284.000	44.44	-8.20	54.0	-9.56	AV	302.00	150	Horizontal	Pass
4	4925.000	47.31	-2.62	74.0	-26.69	Peak	359.00	150	Horizontal	Pass
4**	4925.000	45.76	-2.62	54.0	-8.24	AV	359.00	150	Horizontal	Pass
5	12544.437	53.42	1.44	74.0	-20.58	Peak	360.00	150	Horizontal	Pass
5**	12544.437	35.72	1.44	54.0	-18.28	AV	360.00	150	Horizontal	Pass
6	17377.876	59.35	3.80	74.0	-14.65	Peak	360.00	150	Horizontal	Pass
6**	17377.876	42.40	3.80	54.0	-11.60	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	40.41	-17.38	74.0	-33.59	Peak	282.00	150	Vertical	Pass
1**	1494.000	29.98	-17.38	54.0	-24.02	AV	282.00	150	Vertical	Pass
2	2464.500	92.56	-12.78	74.0	18.56	Peak	290.00	150	Vertical	N/A
2**	2464.500	89.91	-12.78	54.0	35.91	AV	290.00	150	Vertical	N/A
3	4925.000	49.16	-2.62	74.0	-24.84	Peak	259.00	150	Vertical	Pass
3**	4925.000	39.96	-2.62	54.0	-14.04	AV	259.00	150	Vertical	Pass
4	6650.000	55.12	-0.26	74.0	-18.88	Peak	290.00	150	Vertical	Pass
4**	6650.000	37.17	-0.26	54.0	-16.83	AV	290.00	150	Vertical	Pass
5	10800.750	52.22	0.31	74.0	-21.78	Peak	160.00	150	Vertical	Pass
5**	10800.750	34.56	0.31	54.0	-19.44	AV	160.00	150	Vertical	Pass
6	17388.374	58.64	4.03	74.0	-15.36	Peak	234.00	150	Vertical	Pass
6**	17388.374	42.75	4.03	54.0	-11.25	AV	234.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.80	-17.52	74.0	-34.20	Peak	284.00	150	Horizontal	Pass
1**	1499.500	28.03	-17.52	54.0	-25.97	AV	284.00	150	Horizontal	Pass
2	2410.000	98.04	-12.02	74.0	24.04	Peak	209.00	150	Horizontal	N/A
2**	2410.000	90.86	-12.02	54.0	36.86	AV	209.00	150	Horizontal	N/A
3	3217.000	44.27	-7.12	74.0	-29.73	Peak	280.00	150	Horizontal	Pass
3**	3217.000	45.01	-7.12	54.0	-8.99	AV	280.00	150	Horizontal	Pass
4	6274.000	53.24	0.28	74.0	-20.76	Peak	185.00	150	Horizontal	Pass
4**	6274.000	37.11	0.28	54.0	-16.89	AV	185.00	150	Horizontal	Pass
5	11633.063	53.01	0.07	74.0	-20.99	Peak	357.00	150	Horizontal	Pass
5**	11633.063	34.83	0.07	54.0	-19.17	AV	357.00	150	Horizontal	Pass
6	17475.000	59.25	3.60	74.0	-14.75	Peak	336.00	150	Horizontal	Pass
6**	17475.000	42.56	3.60	54.0	-11.44	AV	336.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1620.000	41.33	-17.64	74.0	-32.67	Peak	262.00	150	Vertical	Pass
1**	1620.000	32.65	-17.64	54.0	-21.35	AV	262.00	150	Vertical	Pass
2	1764.000	43.66	-16.91	74.0	-30.34	Peak	262.00	150	Vertical	Pass
2**	1764.000	30.96	-16.91	54.0	-23.04	AV	262.00	150	Vertical	Pass
3	2413.500	87.26	-12.23	74.0	13.26	Peak	289.00	150	Vertical	N/A
3**	2413.500	80.98	-12.23	54.0	26.98	AV	289.00	150	Vertical	N/A
4	5123.000	50.42	-2.19	74.0	-23.58	Peak	287.00	150	Vertical	Pass
4**	5123.000	34.96	-2.19	54.0	-19.04	AV	287.00	150	Vertical	Pass
5	6605.000	53.32	0.50	74.0	-20.68	Peak	338.00	150	Vertical	Pass
5**	6605.000	37.45	0.50	54.0	-16.55	AV	338.00	150	Vertical	Pass
6	17436.938	59.47	4.27	74.0	-14.53	Peak	156.00	150	Vertical	Pass
6**	17436.938	43.62	4.27	54.0	-10.38	AV	156.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.01	-17.52	74.0	-34.99	Peak	285.00	150	Horizontal	Pass
1**	1499.500	28.15	-17.52	54.0	-25.85	AV	285.00	150	Horizontal	Pass
2	2438.000	104.64	-12.66	74.0	30.64	Peak	303.00	150	Horizontal	N/A
2**	2438.000	96.82	-12.66	54.0	42.82	AV	303.00	150	Horizontal	N/A
3	3250.000	55.55	-8.69	74.0	-18.45	Peak	297.00	150	Horizontal	Pass
3**	3250.000	52.44	-8.69	54.0	-1.56	AV	297.00	150	Horizontal	Pass
4	4875.000	50.97	-3.22	74.0	-23.03	Peak	204.00	150	Horizontal	Pass
4**	4875.000	39.41	-3.22	54.0	-14.59	AV	204.00	150	Horizontal	Pass
5	12708.312	52.85	1.24	74.0	-21.15	Peak	331.00	150	Horizontal	Pass
5**	12708.312	36.59	1.24	54.0	-17.41	AV	331.00	150	Horizontal	Pass
6	17408.063	58.77	4.51	74.0	-15.23	Peak	0.00	150	Horizontal	Pass
6**	17408.063	42.78	4.51	54.0	-11.22	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	40.14	-17.52	74.0	-33.86	Peak	256.00	150	Vertical	Pass
1**	1499.000	30.16	-17.52	54.0	-23.84	AV	256.00	150	Vertical	Pass
2	2438.500	96.89	-12.69	74.0	22.89	Peak	295.00	150	Vertical	N/A
2**	2438.500	90.03	-12.69	54.0	36.03	AV	295.00	150	Vertical	N/A
3	3249.000	45.83	-8.62	74.0	-28.17	Peak	280.00	150	Vertical	Pass
3**	3249.000	28.89	-8.62	54.0	-25.11	AV	280.00	150	Vertical	Pass
4	4874.000	50.54	-3.30	74.0	-23.46	Peak	295.00	150	Vertical	Pass
4**	4874.000	36.24	-3.30	54.0	-17.76	AV	295.00	150	Vertical	Pass
5	11973.750	53.17	1.02	74.0	-20.83	Peak	88.00	150	Vertical	Pass
5**	11973.750	35.59	1.02	54.0	-18.41	AV	88.00	150	Vertical	Pass
6	17419.874	57.98	4.83	74.0	-16.02	Peak	314.00	150	Vertical	Pass
6**	17419.874	43.04	4.83	54.0	-10.96	AV	314.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	40.25	-17.52	74.0	-33.75	Peak	284.00	150	Horizontal	Pass
1**	1499.500	28.74	-17.52	54.0	-25.26	AV	284.00	150	Horizontal	Pass
2	2459.500	97.05	-12.91	74.0	23.05	Peak	195.00	150	Horizontal	N/A
2**	2459.500	89.03	-12.91	54.0	35.03	AV	195.00	150	Horizontal	N/A
3	3284.000	44.88	-8.20	74.0	-29.12	Peak	273.00	150	Horizontal	Pass
3**	3284.000	42.43	-8.20	54.0	-11.57	AV	273.00	150	Horizontal	Pass
4	6423.000	53.27	-0.87	74.0	-20.73	Peak	238.00	150	Horizontal	Pass
4**	6423.000	36.79	-0.87	54.0	-17.21	AV	238.00	150	Horizontal	Pass
5	9781.562	51.04	-0.04	74.0	-22.96	Peak	360.00	150	Horizontal	Pass
5**	9781.562	34.17	-0.04	54.0	-19.83	AV	360.00	150	Horizontal	Pass
6	15785.813	57.77	2.39	74.0	-16.23	Peak	147.00	150	Horizontal	Pass
6**	15785.813	40.46	2.39	54.0	-13.54	AV	147.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	40.91	-17.38	74.0	-33.09	Peak	249.00	150	Vertical	Pass
1**	1494.000	29.16	-17.38	54.0	-24.84	AV	249.00	150	Vertical	Pass
2	1934.000	45.39	-15.88	74.0	-28.61	Peak	307.00	150	Vertical	Pass
2**	1934.000	34.26	-15.88	54.0	-19.74	AV	307.00	150	Vertical	Pass
3	2459.500	87.51	-12.91	74.0	13.51	Peak	291.00	150	Vertical	N/A
3**	2459.500	80.61	-12.91	54.0	26.61	AV	291.00	150	Vertical	N/A
4	5961.000	52.36	-1.32	74.0	-21.64	Peak	191.00	150	Vertical	Pass
4**	5961.000	35.52	-1.32	54.0	-18.48	AV	191.00	150	Vertical	Pass
5	11937.812	52.65	1.80	74.0	-21.35	Peak	189.00	150	Vertical	Pass
5**	11937.812	35.94	1.80	54.0	-18.06	AV	189.00	150	Vertical	Pass
6	17469.749	59.03	3.78	74.0	-14.97	Peak	256.00	150	Vertical	Pass
6**	17469.749	42.91	3.78	54.0	-11.09	AV	256.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.500	39.72	-17.52	74.0	-34.28	Peak	291.00	150	Horizontal	Pass
1**	1499.500	28.98	-17.52	54.0	-25.02	AV	291.00	150	Horizontal	Pass
2	2413.500	96.75	-12.23	74.0	22.75	Peak	216.00	150	Horizontal	N/A
2**	2413.500	88.58	-12.23	54.0	34.58	AV	216.00	150	Horizontal	N/A
3	3217.000	44.54	-7.12	74.0	-29.46	Peak	192.00	150	Horizontal	Pass
3**	3217.000	43.21	-7.12	54.0	-10.79	AV	192.00	150	Horizontal	Pass
4	6075.000	52.45	-1.89	74.0	-21.55	Peak	46.00	150	Horizontal	Pass
4**	6075.000	36.15	-1.89	54.0	-17.85	AV	46.00	150	Horizontal	Pass
5	8916.187	50.14	-0.00	74.0	-23.86	Peak	208.00	150	Horizontal	Pass
5**	8916.187	33.56	-0.00	54.0	-20.44	AV	208.00	150	Horizontal	Pass
6	17503.875	58.34	2.97	74.0	-15.66	Peak	355.00	150	Horizontal	Pass
6**	17503.875	42.40	2.97	54.0	-11.60	AV	355.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.500	40.91	-17.41	74.0	-33.09	Peak	242.00	150	Vertical	Pass
1**	1493.500	25.00	-17.41	54.0	-29.00	AV	242.00	150	Vertical	Pass
2	2112.500	45.02	-13.91	74.0	-28.98	Peak	312.00	150	Vertical	Pass
2**	2112.500	34.32	-13.91	54.0	-19.68	AV	312.00	150	Vertical	Pass
3	2413.000	87.13	-12.21	74.0	13.13	Peak	292.00	150	Vertical	N/A
3**	2413.000	78.40	-12.21	54.0	24.40	AV	292.00	150	Vertical	N/A
4	4210.000	47.93	-4.95	74.0	-26.07	Peak	222.00	150	Vertical	Pass
4**	4210.000	32.15	-4.95	54.0	-21.85	AV	222.00	150	Vertical	Pass
5	6604.000	53.17	0.48	74.0	-20.83	Peak	49.00	150	Vertical	Pass
5**	6604.000	38.00	0.48	54.0	-16.00	AV	49.00	150	Vertical	Pass
6	17427.751	60.14	4.62	74.0	-13.86	Peak	292.00	150	Vertical	Pass
6**	17427.751	43.26	4.62	54.0	-10.74	AV	292.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	40.05	-17.52	74.0	-33.95	Peak	289.00	150	Horizontal	Pass
1**	1499.000	27.44	-17.52	54.0	-26.56	AV	289.00	150	Horizontal	Pass
2	2435.500	105.99	-12.72	74.0	31.99	Peak	303.00	150	Horizontal	N/A
2**	2435.500	97.28	-12.72	54.0	43.28	AV	303.00	150	Horizontal	N/A
3	3250.000	54.45	-8.69	74.0	-19.55	Peak	290.00	150	Horizontal	Pass
3**	3250.000	52.61	-8.69	54.0	-1.39	AV	290.00	150	Horizontal	Pass
4	4877.000	50.96	-3.40	74.0	-23.04	Peak	205.00	150	Horizontal	Pass
4**	4877.000	39.82	-3.40	54.0	-14.18	AV	205.00	150	Horizontal	Pass
5	10266.000	51.58	1.13	74.0	-22.42	Peak	82.00	150	Horizontal	Pass
5**	10266.000	34.86	1.13	54.0	-19.14	AV	82.00	150	Horizontal	Pass
6	17515.688	59.19	3.12	74.0	-14.81	Peak	256.00	150	Horizontal	Pass
6**	17515.688	42.55	3.12	54.0	-11.45	AV	256.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1649.500	41.03	-17.44	74.0	-32.97	Peak	225.00	150	Vertical	Pass
1**	1649.500	30.39	-17.44	54.0	-23.61	AV	225.00	150	Vertical	Pass
2	1997.500	41.30	-15.55	74.0	-32.70	Peak	187.00	150	Vertical	Pass
2**	1997.500	27.56	-15.55	54.0	-26.44	AV	187.00	150	Vertical	Pass
3	2434.500	96.92	-12.72	74.0	22.92	Peak	297.00	150	Vertical	N/A
3**	2434.500	89.84	-12.72	54.0	35.84	AV	297.00	150	Vertical	N/A
4	3249.000	46.77	-8.62	74.0	-27.23	Peak	287.00	150	Vertical	Pass
4**	3249.000	28.72	-8.62	54.0	-25.28	AV	287.00	150	Vertical	Pass
5	6268.000	53.60	-0.12	74.0	-20.40	Peak	251.00	150	Vertical	Pass
5**	6268.000	36.64	-0.12	54.0	-17.36	AV	251.00	150	Vertical	Pass
6	17471.062	59.32	3.74	74.0	-14.68	Peak	181.00	150	Vertical	Pass
6**	17471.062	42.91	3.74	54.0	-11.09	AV	181.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1029.500	36.71	-18.14	74.0	-37.29	Peak	334.00	150	Horizontal	Pass
1**	1029.500	26.59	-18.14	54.0	-27.41	AV	334.00	150	Horizontal	Pass
2	1493.500	38.98	-17.41	74.0	-35.02	Peak	290.00	150	Horizontal	Pass
2**	1493.500	26.61	-17.41	54.0	-27.39	AV	290.00	150	Horizontal	Pass
3	2465.000	96.50	-12.79	74.0	22.50	Peak	217.00	150	Horizontal	N/A
3**	2465.000	88.71	-12.79	54.0	34.71	AV	217.00	150	Horizontal	N/A
4	3284.000	43.58	-8.20	74.0	-30.42	Peak	274.00	150	Horizontal	Pass
4**	3284.000	41.20	-8.20	54.0	-12.80	AV	274.00	150	Horizontal	Pass
5	6291.000	53.27	0.21	74.0	-20.73	Peak	134.00	150	Horizontal	Pass
5**	6291.000	36.85	0.21	54.0	-17.15	AV	134.00	150	Horizontal	Pass
6	17523.562	59.01	3.28	74.0	-14.99	Peak	353.00	150	Horizontal	Pass
6**	17523.562	41.87	3.28	54.0	-12.13	AV	353.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.000	40.19	-17.38	74.0	-33.81	Peak	247.00	150	Vertical	Pass
1**	1494.000	29.31	-17.38	54.0	-24.69	AV	247.00	150	Vertical	Pass
2	1792.000	41.43	-16.67	74.0	-32.57	Peak	304.00	150	Vertical	Pass
2**	1792.000	24.56	-16.67	54.0	-29.44	AV	304.00	150	Vertical	Pass
3	2463.500	87.99	-12.75	74.0	13.99	Peak	296.00	150	Vertical	N/A
3**	2463.500	80.42	-12.75	54.0	26.42	AV	296.00	150	Vertical	N/A
4	3639.000	46.80	-6.42	74.0	-27.20	Peak	152.00	150	Vertical	Pass
4**	3639.000	31.31	-6.42	54.0	-22.69	AV	152.00	150	Vertical	Pass
5	6011.000	51.97	-0.84	74.0	-22.03	Peak	281.00	150	Vertical	Pass
5**	6011.000	36.85	-0.84	54.0	-17.15	AV	281.00	150	Vertical	Pass
6	17444.813	59.09	3.96	74.0	-14.91	Peak	273.00	150	Vertical	Pass
6**	17444.813	43.27	3.96	54.0	-10.73	AV	273.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Test Data

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

iM20/elite V5/elite V6

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	53.979	32.61	74	20.021	PEAK	Pass
		2390	44.952	32.61	54	9.048	AVERAGE	Pass
	HIGH	2483.5	54.773	32.54	74	19.227	PEAK	Pass
		2483.5	45.237	32.54	54	8.763	AVERAGE	Pass
802.11g	Low	2390	66.972	32.61	74	7.028	PEAK	Pass
		2390	48.683	32.61	54	5.317	AVERAGE	Pass
	HIGH	2483.5	61.930	32.54	74	12.070	PEAK	Pass
		2483.5	46.311	32.54	54	7.689	AVERAGE	Pass
802.11n20	Low	2390	64.038	32.61	74	9.962	PEAK	Pass
		2390	47.751	32.61	54	6.249	AVERAGE	Pass
	HIGH	2483.5	64.616	32.54	74	9.384	PEAK	Pass
		2483.5	47.120	32.54	54	6.880	AVERAGE	Pass

iM50/iM60/iM70/iM80/X10/X12

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	56.071	32.61	74	17.929	PEAK	Pass
		2390	46.849	32.61	54	7.151	AVERAGE	Pass
	HIGH	2483.5	55.855	32.54	74	18.145	PEAK	Pass
		2483.5	46.993	32.54	54	7.007	AVERAGE	Pass
802.11g	Low	2390	70.584	32.61	74	3.416	PEAK	Pass
		2390	50.984	32.61	54	3.016	AVERAGE	Pass
	HIGH	2483.5	66.177	32.54	74	7.823	PEAK	Pass
		2483.5	48.352	32.54	54	5.648	AVERAGE	Pass
802.11n20	Low	2390	53.683	32.61	74	20.317	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	53.648	32.54	74	20.352	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass

iT20

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	54.445	32.61	74	19.555	PEAK	Pass
		2390	44.509	32.61	54	9.491	AVERAGE	Pass
	HIGH	2483.5	55.547	32.54	74	18.453	PEAK	Pass
		2483.5	46.223	32.54	54	7.777	AVERAGE	Pass
802.11g	Low	2390	62.644	32.61	74	11.356	PEAK	Pass
		2390	46.121	32.61	54	7.879	AVERAGE	Pass
	HIGH	2483.5	65.324	32.54	74	8.676	PEAK	Pass
		2483.5	47.487	32.54	54	6.513	AVERAGE	Pass
802.11n20	Low	2390	62.276	32.61	74	11.724	PEAK	Pass
		2390	45.188	32.61	54	8.812	AVERAGE	Pass
	HIGH	2483.5	65.794	32.54	74	8.206	PEAK	Pass
		2483.5	47.239	32.54	54	6.761	AVERAGE	Pass

elite V8


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	54.859	32.61	74	19.141	PEAK	Pass
		2390	44.046	32.61	54	9.954	AVERAGE	Pass
	HIGH	2483.5	55.727	32.54	74	18.273	PEAK	Pass
		2483.5	47.408	32.54	54	6.592	AVERAGE	Pass
802.11g	Low	2390	67.060	32.61	74	6.940	PEAK	Pass
		2390	50.157	32.61	54	3.843	AVERAGE	Pass
	HIGH	2483.5	63.810	32.54	74	10.190	PEAK	Pass
		2483.5	49.512	32.54	54	4.488	AVERAGE	Pass
802.11n20	Low	2390	66.759	32.61	74	7.241	PEAK	Pass
		2390	47.405	32.61	54	6.595	AVERAGE	Pass
	HIGH	2483.5	70.155	32.54	74	3.845	PEAK	Pass
		2483.5	50.773	32.54	54	3.227	AVERAGE	Pass

Test plots


iM20/elite V5/elite V6

802.11b Mode:

LOW CHANNEL, PEAK

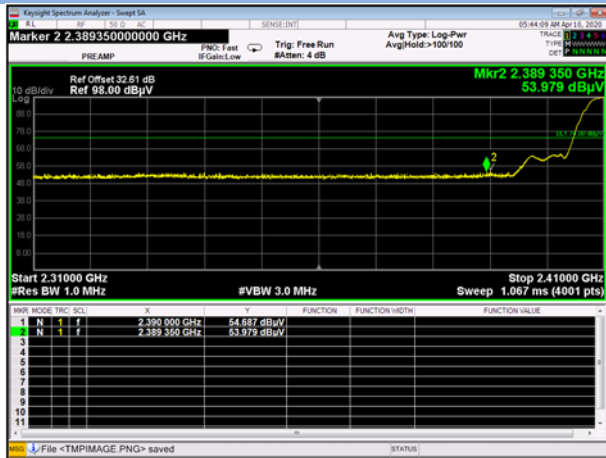


LOW CHANNEL, AV

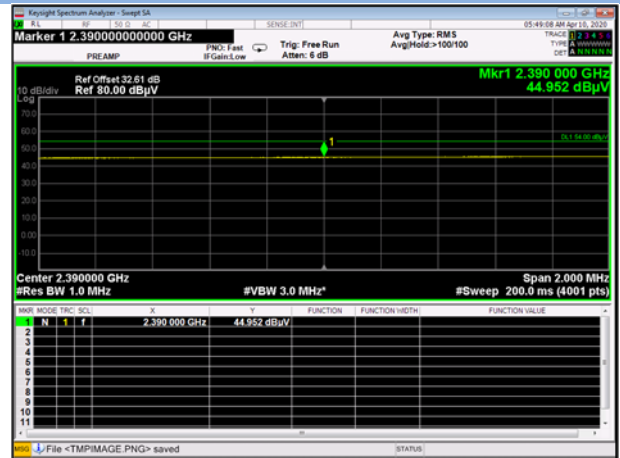

HIGH CHANNEL, PEAK




HIGH CHANNEL, AV

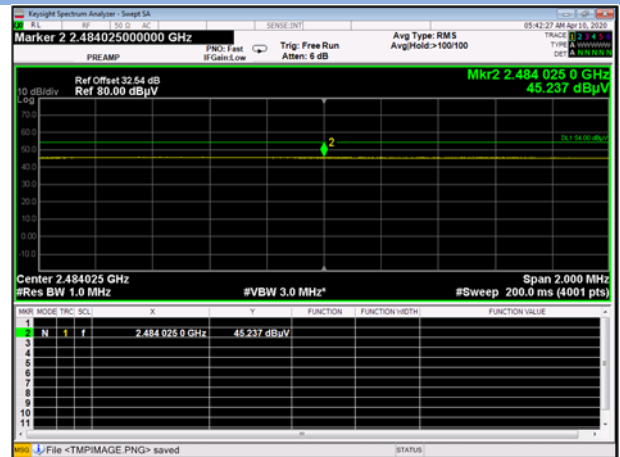


802.11g Mode:


LOW CHANNEL, PEAK

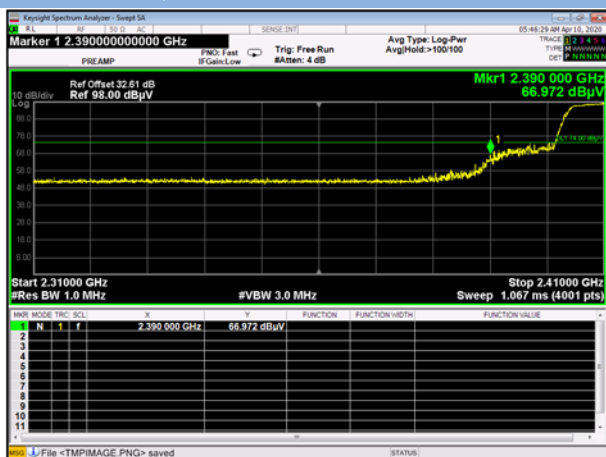


LOW CHANNEL, AV

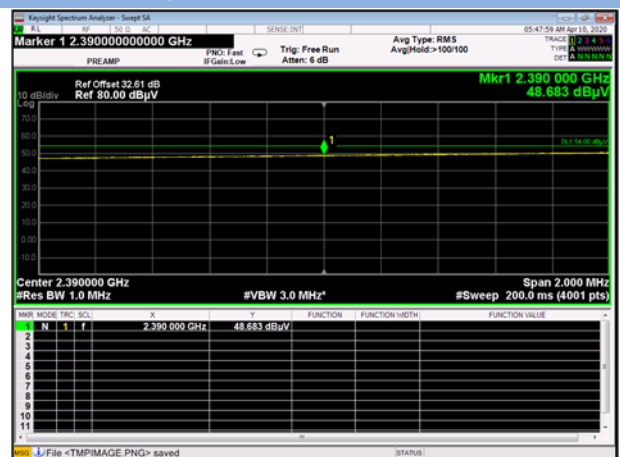

HIGH CHANNEL, PEAK

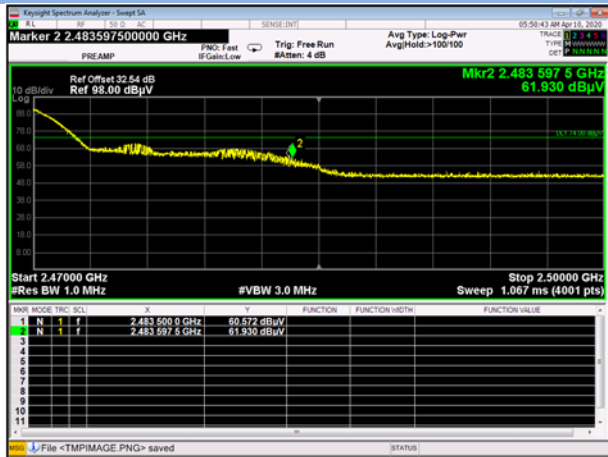


HIGH CHANNEL, AV

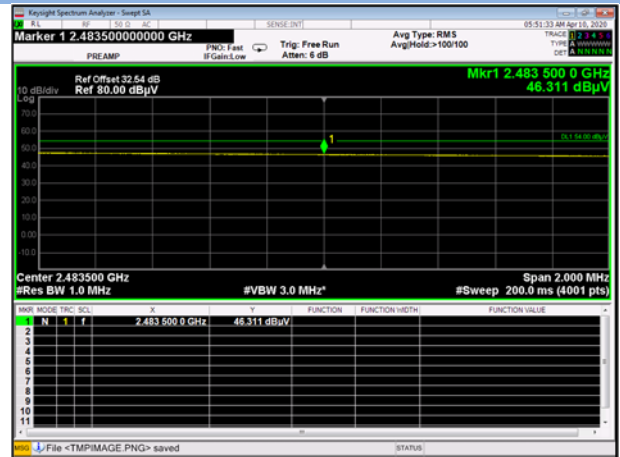


802.11n-20 MHz Mode:


LOW CHANNEL, PEAK

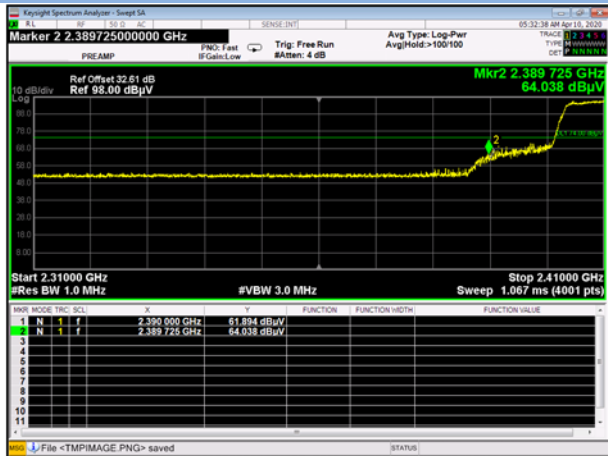


LOW CHANNEL, AV

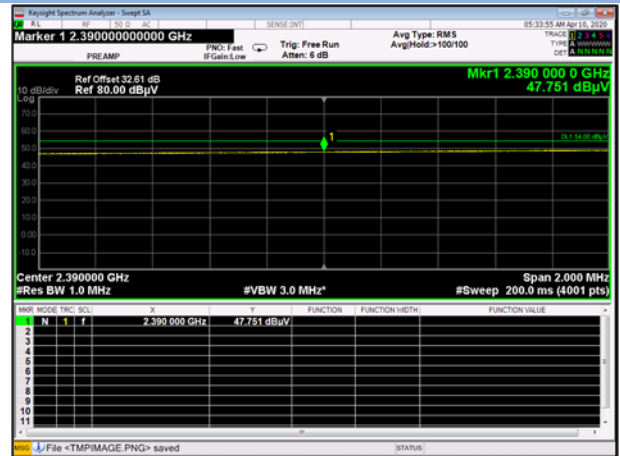

HIGH CHANNEL, PEAK

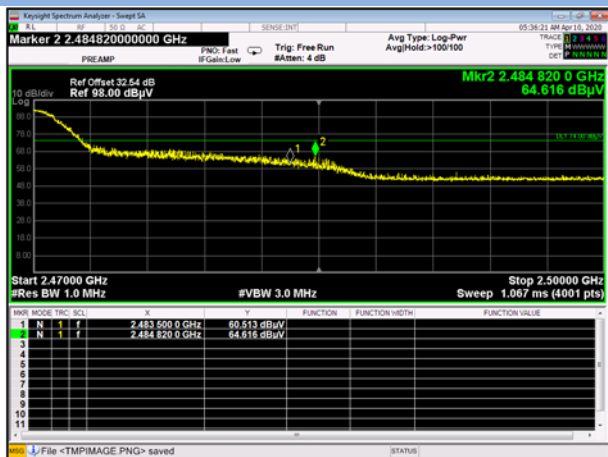

HIGH CHANNEL, AV

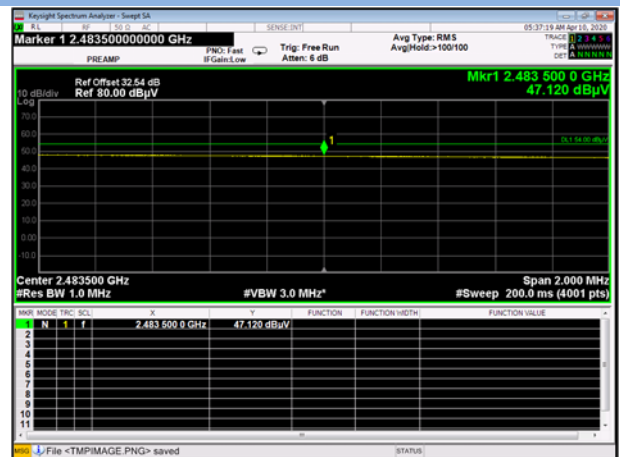


iM50/iM60/iM70/iM80/X10/X12

802.11b Mode:

LOW CHANNEL, PEAK




LOW CHANNEL, AV

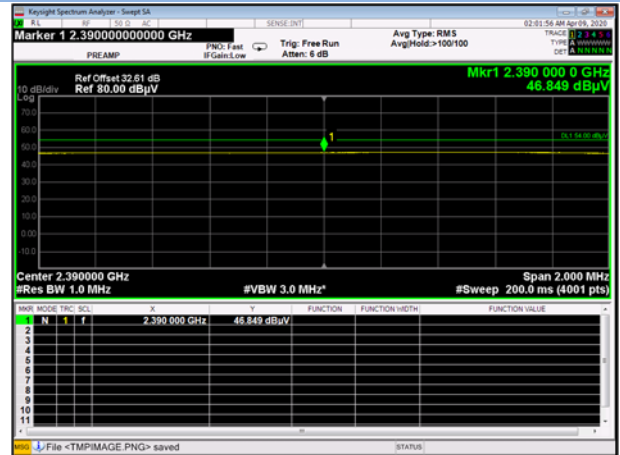

HIGH CHANNEL, PEAK



HIGH CHANNEL, AV

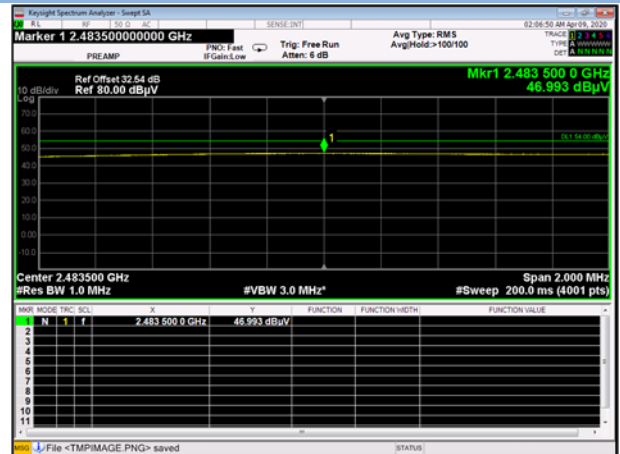


802.11g Mode:


LOW CHANNEL, PEAK




LOW CHANNEL, AV

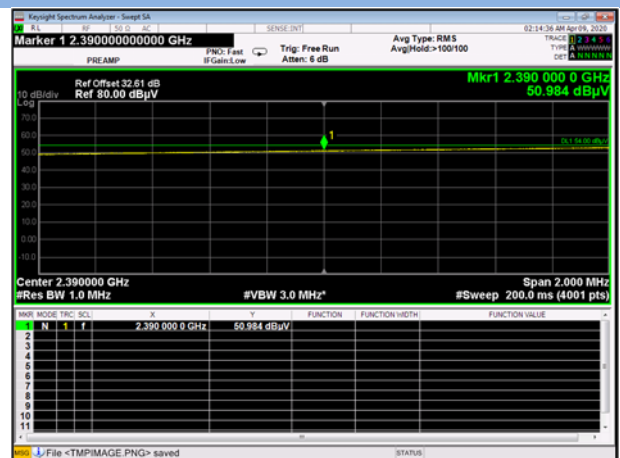

HIGH CHANNEL, PEAK

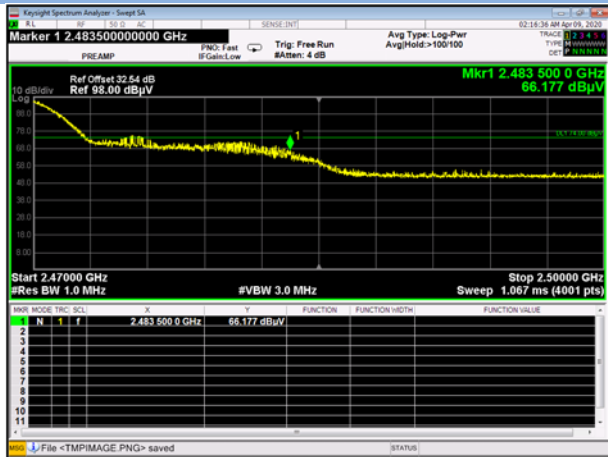


HIGH CHANNEL, AV

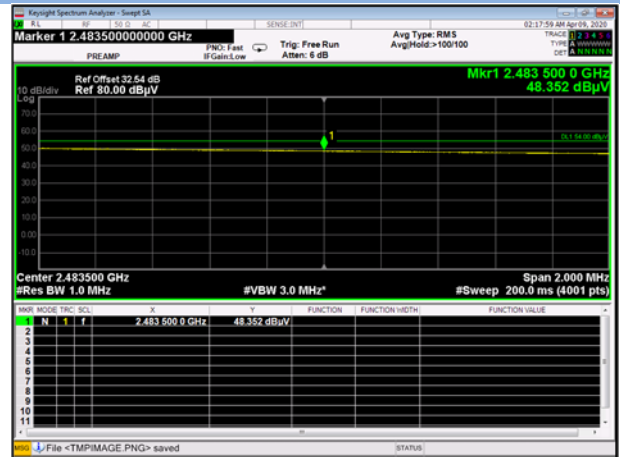


802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

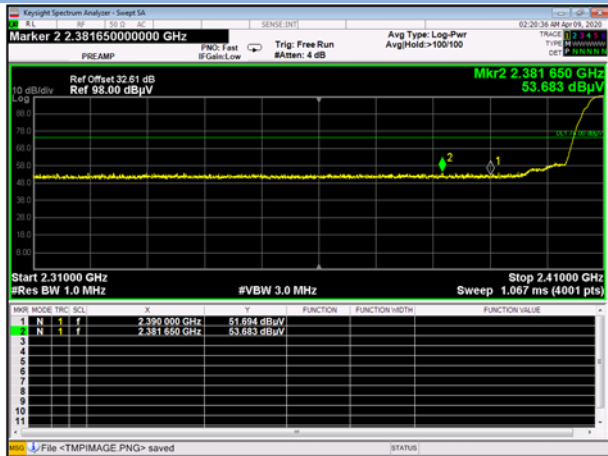


HIGH CHANNEL, PEAK

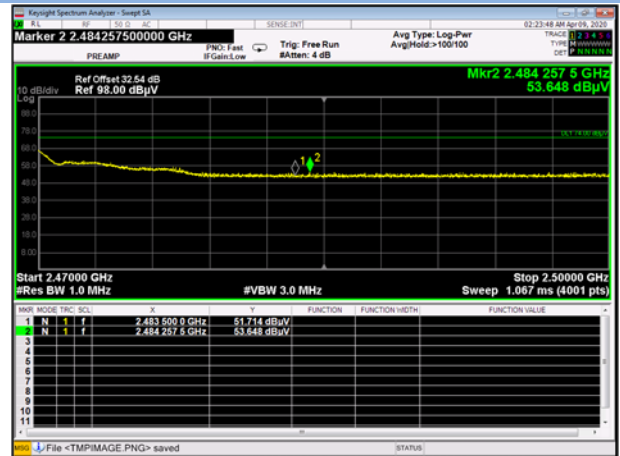


iT20

802.11b Mode:

LOW CHANNEL, PEAK

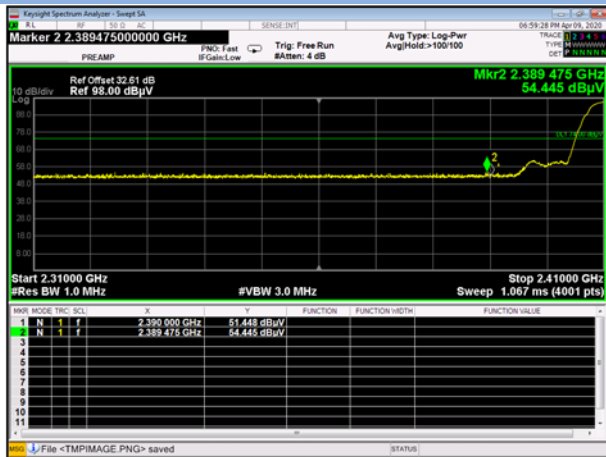


LOW CHANNEL, AV

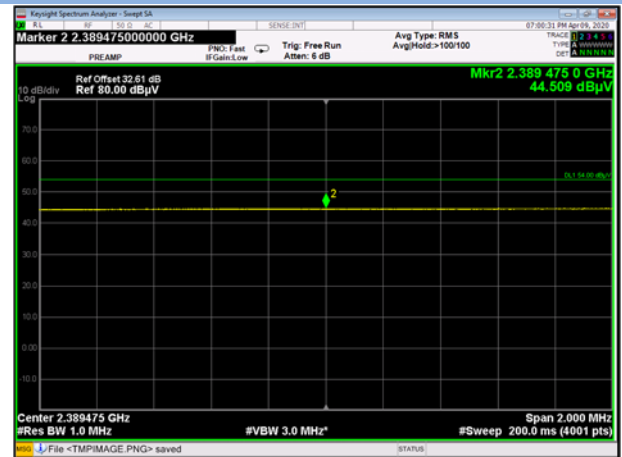

HIGH CHANNEL, PEAK




HIGH CHANNEL, AV

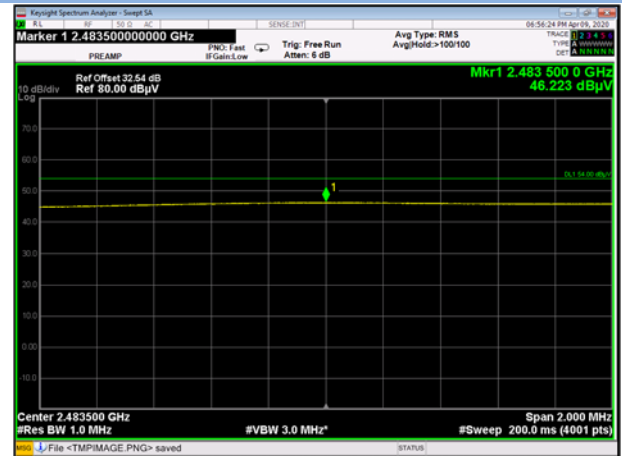


802.11g Mode:

LOW CHANNEL, PEAK

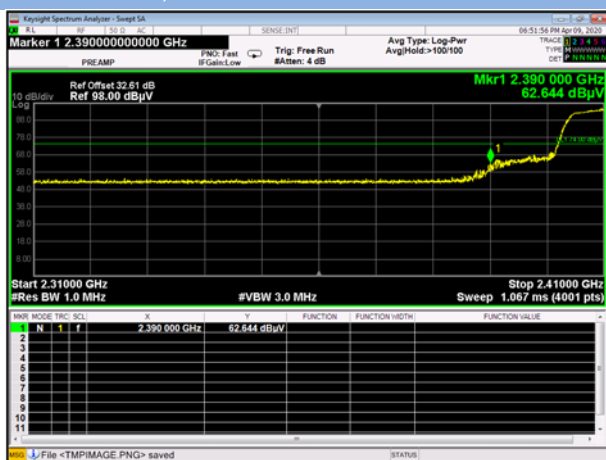


LOW CHANNEL, AV

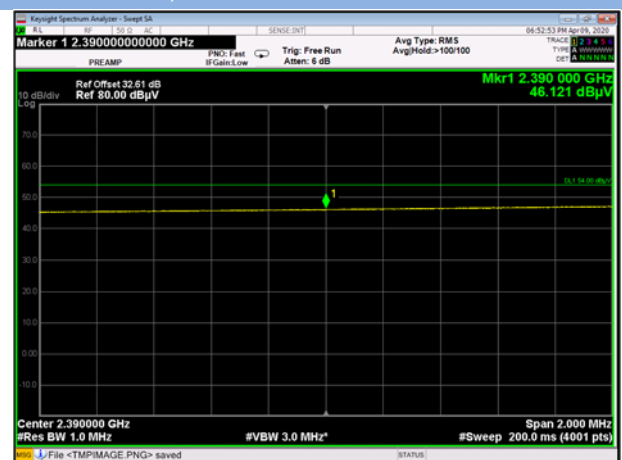

HIGH CHANNEL, PEAK




HIGH CHANNEL, AV

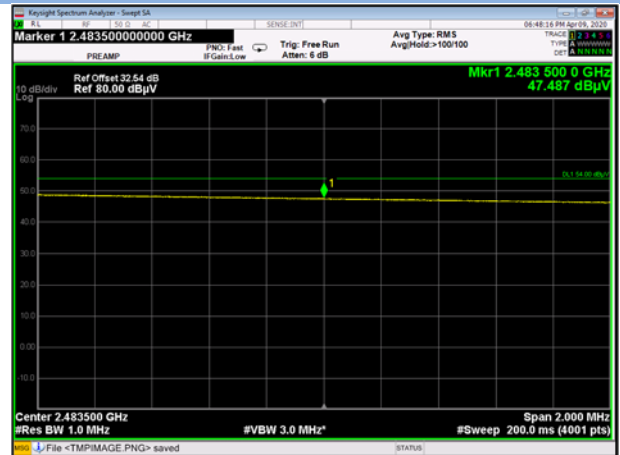


802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

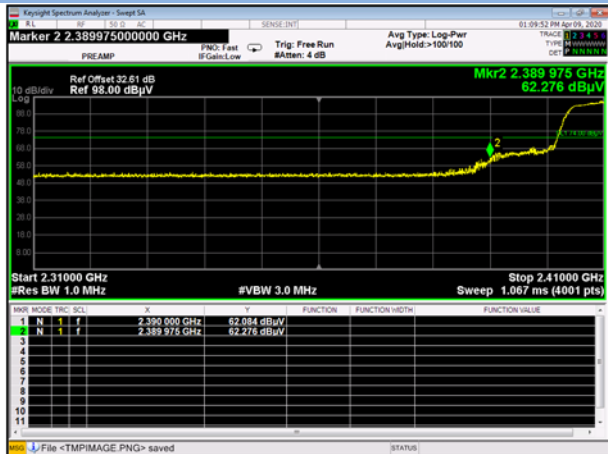


LOW CHANNEL, AV

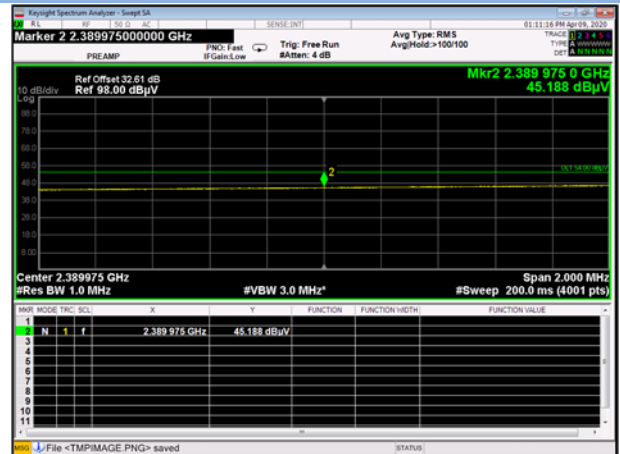

HIGH CHANNEL, PEAK




HIGH CHANNEL, AV

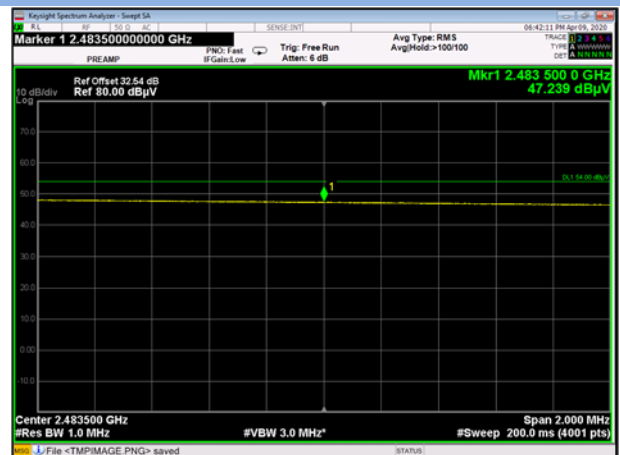


elite V8

802.11b Mode:

LOW CHANNEL, PEAK

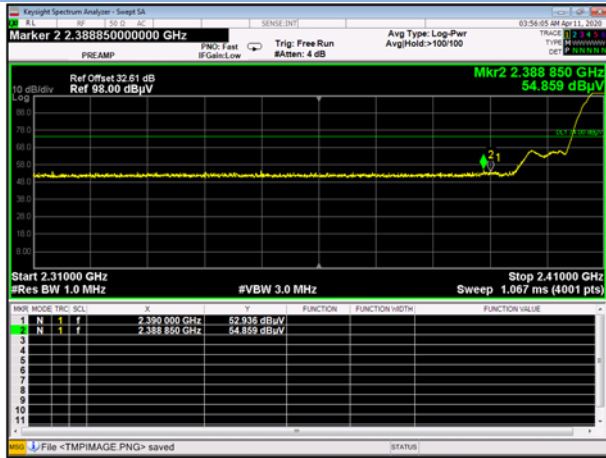


LOW CHANNEL, AV

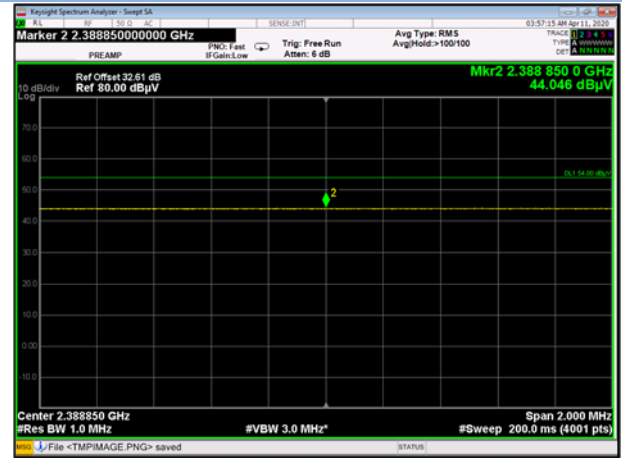

HIGH CHANNEL, PEAK



HIGH CHANNEL, AV

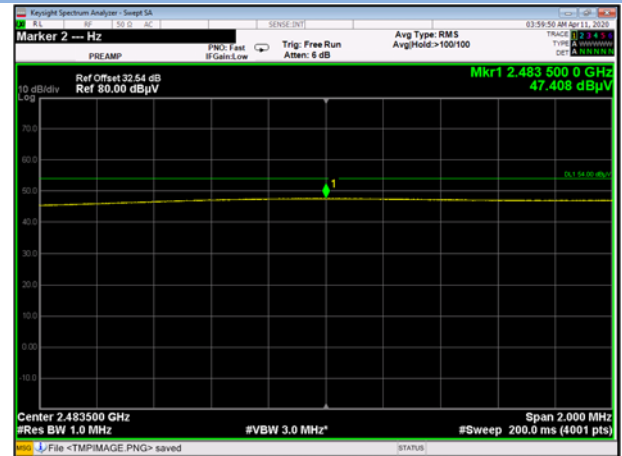


802.11g Mode:


LOW CHANNEL, PEAK



LOW CHANNEL, AV

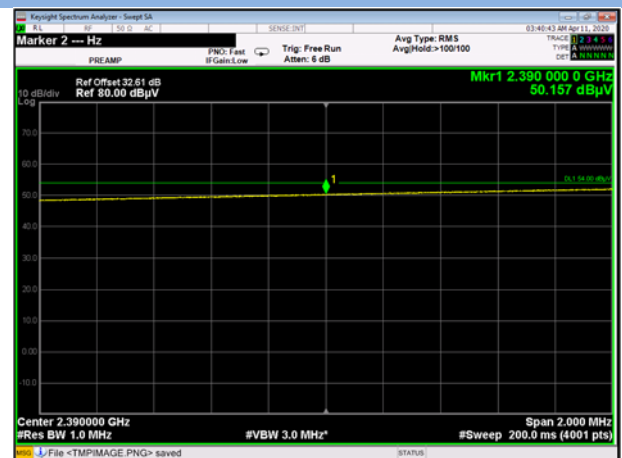

HIGH CHANNEL, PEAK

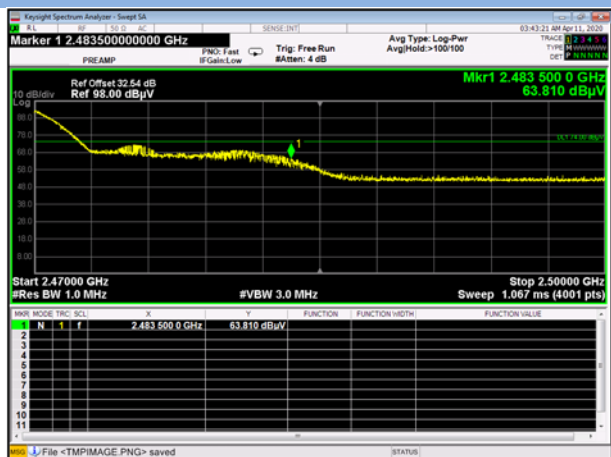


HIGH CHANNEL, AV




802.11n-20 MHz Mode:


LOW CHANNEL, PEAK

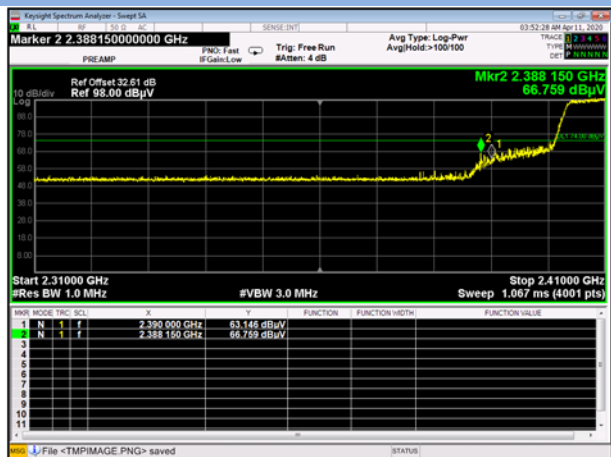

LOW CHANNEL, AV

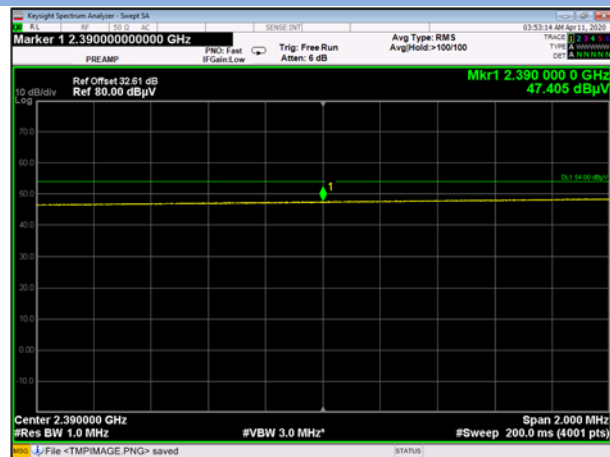

HIGH CHANNEL, PEAK

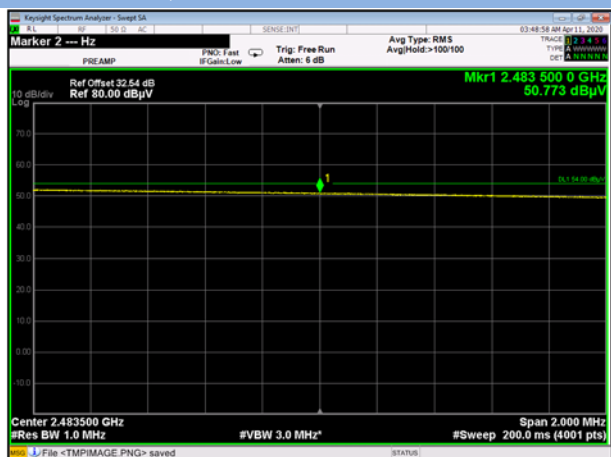

HIGH CHANNEL, AV



A.8 Power Spectral Density (PSD)

Note: The Power Spectral Density (PSD) please refer to the Report No. BL-SZ19B0657-601, which issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 31, 2020, **Section A.8 Power Spectral Density (PSD)**.

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2050669-AR.pdf”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2050669-AW.pdf”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2050669-AI.pdf”.

--END OF REPORT--