



FCC RF Test Report

APPLICANT : Ubiquiti Networks, Inc.
EQUIPMENT : Mesh Points
BRAND NAME : ULABS
MODEL NAME : AFi-P-LP
 AFi-P
FCC ID : SWX-AFP
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Mar. 03, 2016 and testing was completed on Jun. 01, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	10
2.2 Pre-Scanned RF Power	11
2.3 Test Mode	12
2.4 Connection Diagram of Test System	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example	14
3 TEST RESULT	15
3.1 26dB & 99% Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	22
3.5 AC Conducted Emission Measurement	26
3.6 Frequency Stability Measurement	30
3.7 Automatically Discontinue Transmission	31
3.8 Antenna Requirements	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR630314D	Rev. 01	Initial issue of report	Jun. 08, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC $\leq 30, 24$ dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC $\leq 17, 11$ dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band)&15.209(a)	Pass	Under limit 0.18 dB at 5149.850 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 20.10 dB at 0.774 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Ubiquiti Networks, Inc.

12F, No. 105, Song Ren Rd., SinYi District, Taipei 110, Taiwan

1.2 Manufacturer

Ubiquiti Networks, Inc.

12F, No. 105, Song Ren Rd., SinYi District, Taipei 110, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mesh Points
Brand Name	ULABS
Model Name	AFi-P-LP AFi-P
FCC ID	SWX-AFP
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 Bluetooth v4.0 EDR/LE
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	5180 MHz ~ 5240 MHz		
Maximum Output Power	MIMO <Ant. Port 1 + 2> 802.11a : 26.55 dBm / 0.4519 W 802.11n HT20 : 26.78 dBm / 0.4764 W 802.11n HT40 : 28.06 dBm / 0.6397 W		
99% Occupied Bandwidth	802.11a : 25.65 MHz 802.11n HT20 : 28.95 MHz 802.11n HT40 : 69.50 MHz		
Antenna Type	Main Antenna : PIFA Antenna with gain 5.00 dBi Aux. Antenna : PIFA Antenna with gain 5.00 dBi		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)		
Antenna Function Description		Chain Port 1	Chain Port 2
	802.11 a/n SISO	V	V
	802.11 n MIMO	V	V

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240

Note: The above Frequency and Channel in boldface were 802.11n HT40.

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

MIMO <Ant. 1+2>

5GHz 802.11a mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Average Power (dBm)	26.55	26.50	26.50	26.50	26.32	26.37	26.38	26.41

5GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	26.78	26.71	26.70	26.65	26.71	26.70	26.69	26.73

5GHz 802.11n HT40 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	28.06	27.97	27.96	27.94	27.95	27.96	27.94	27.90

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

MIMO Antenna


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Adapter
-----------------------	-------------------------------------


Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

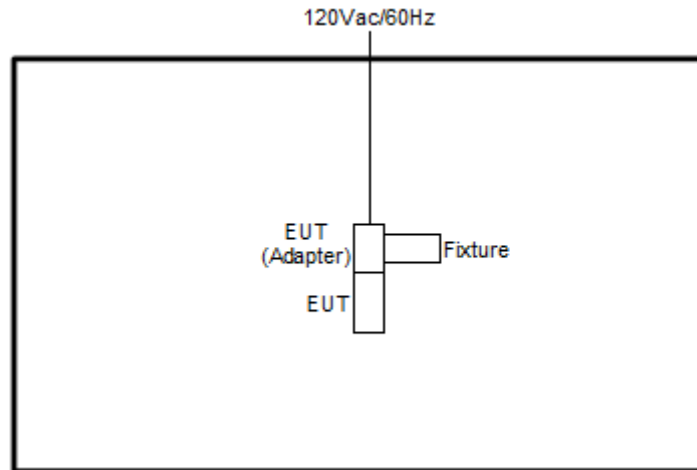

<AC Conducted Emission Mode>

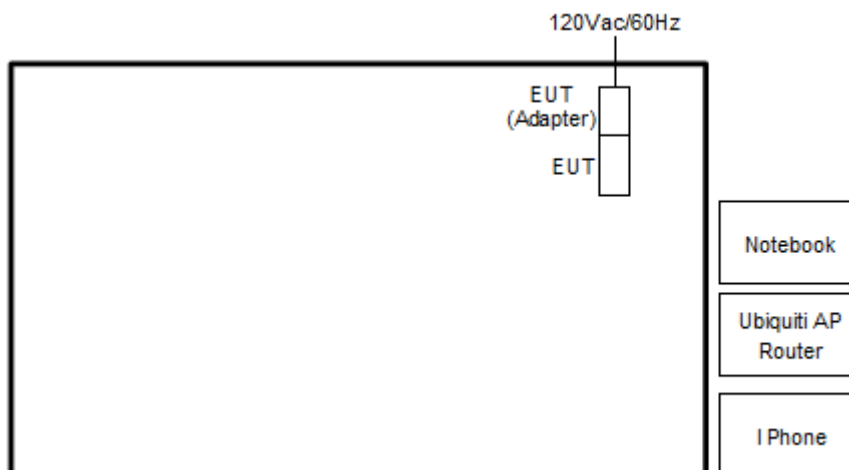

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Ubiquiti AP Router	Ubiquiti	AFi-R	N/A	N/A	N/A
2.	Fixture	N/A	N/A	N/A	N/A	N/A
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPhone	Apple	iPhone 6s	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, “artgui.exe” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

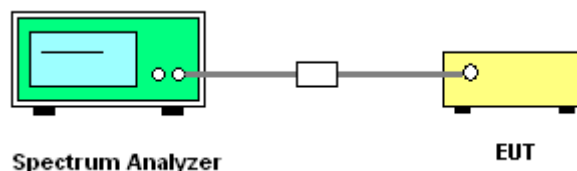

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

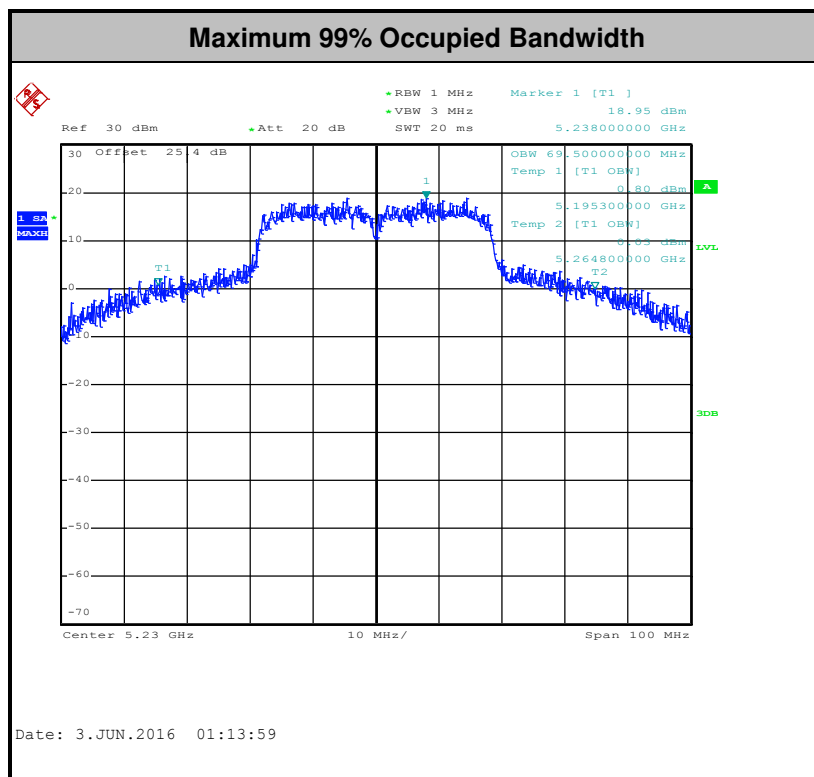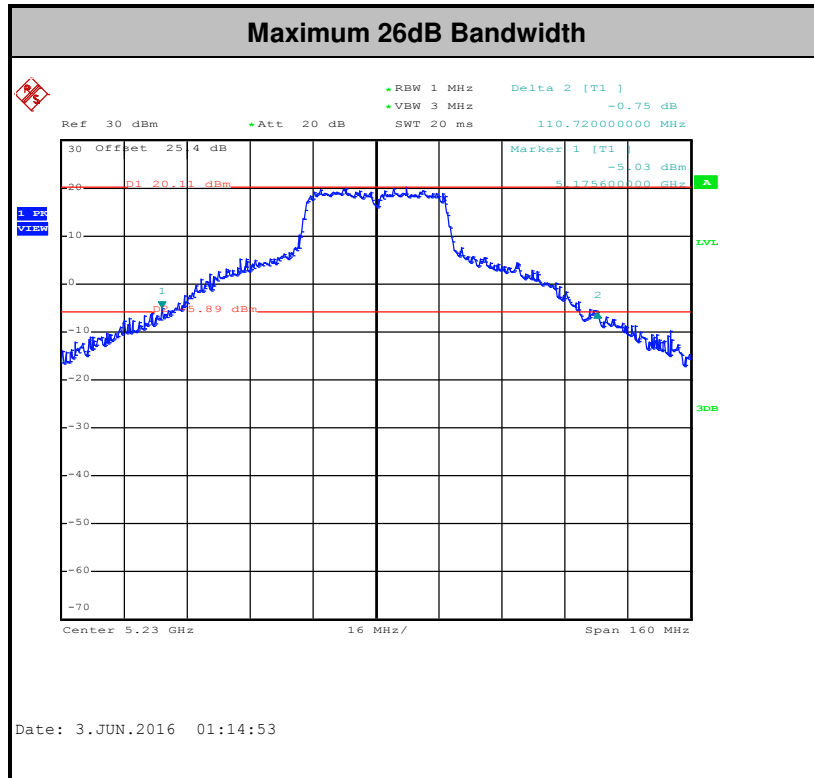



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

For normal channel:

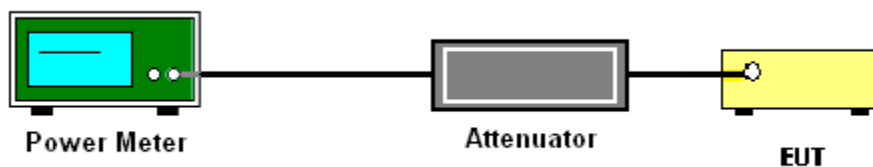

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


3.3.4 Test Setup

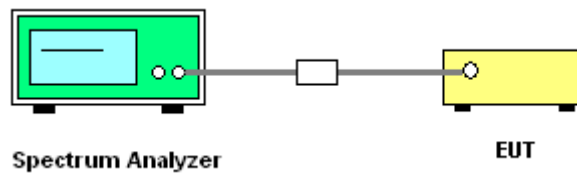



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

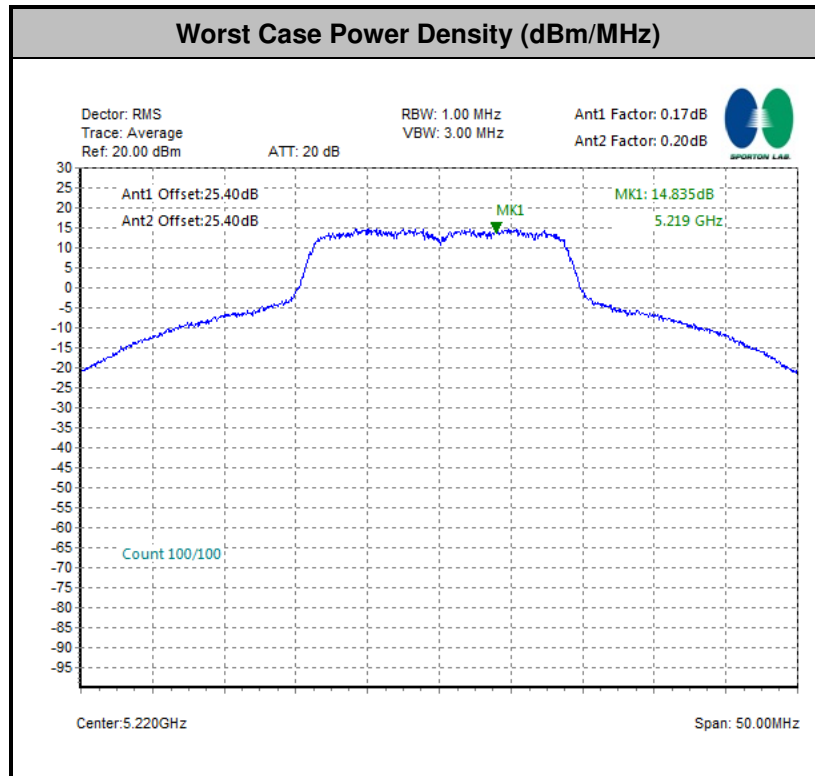

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 D02 v01r02 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

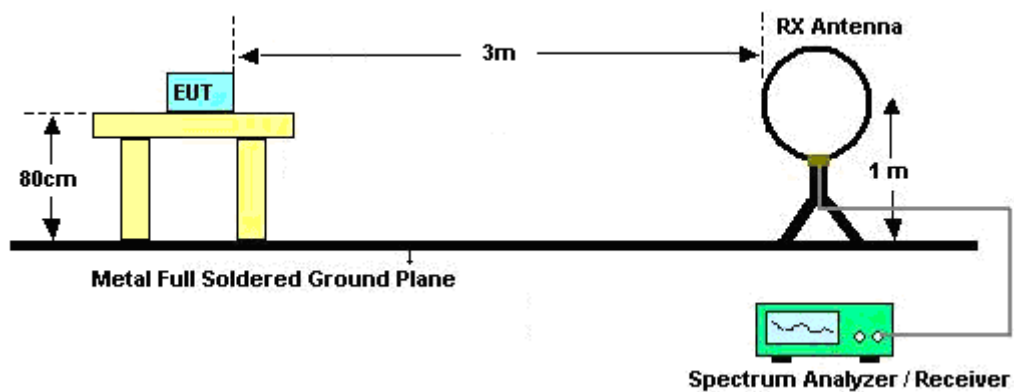

For radiated emissions from 30MHz to 1GHz

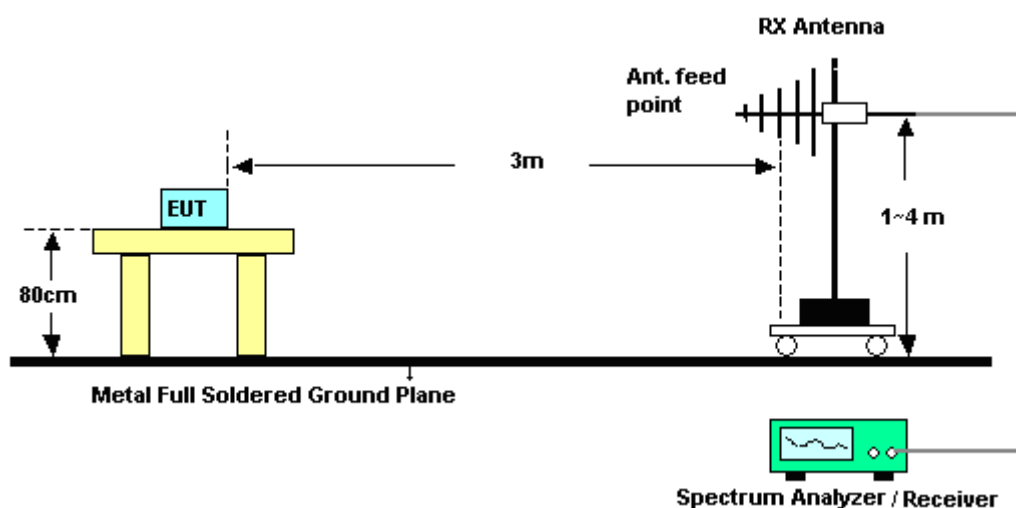

For radiated emissions above 1GHz

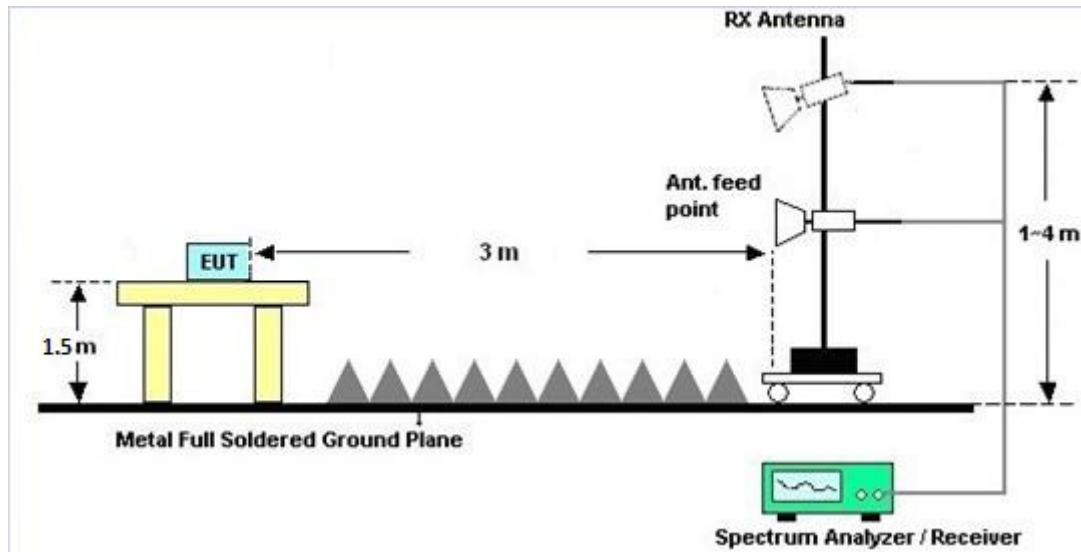

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

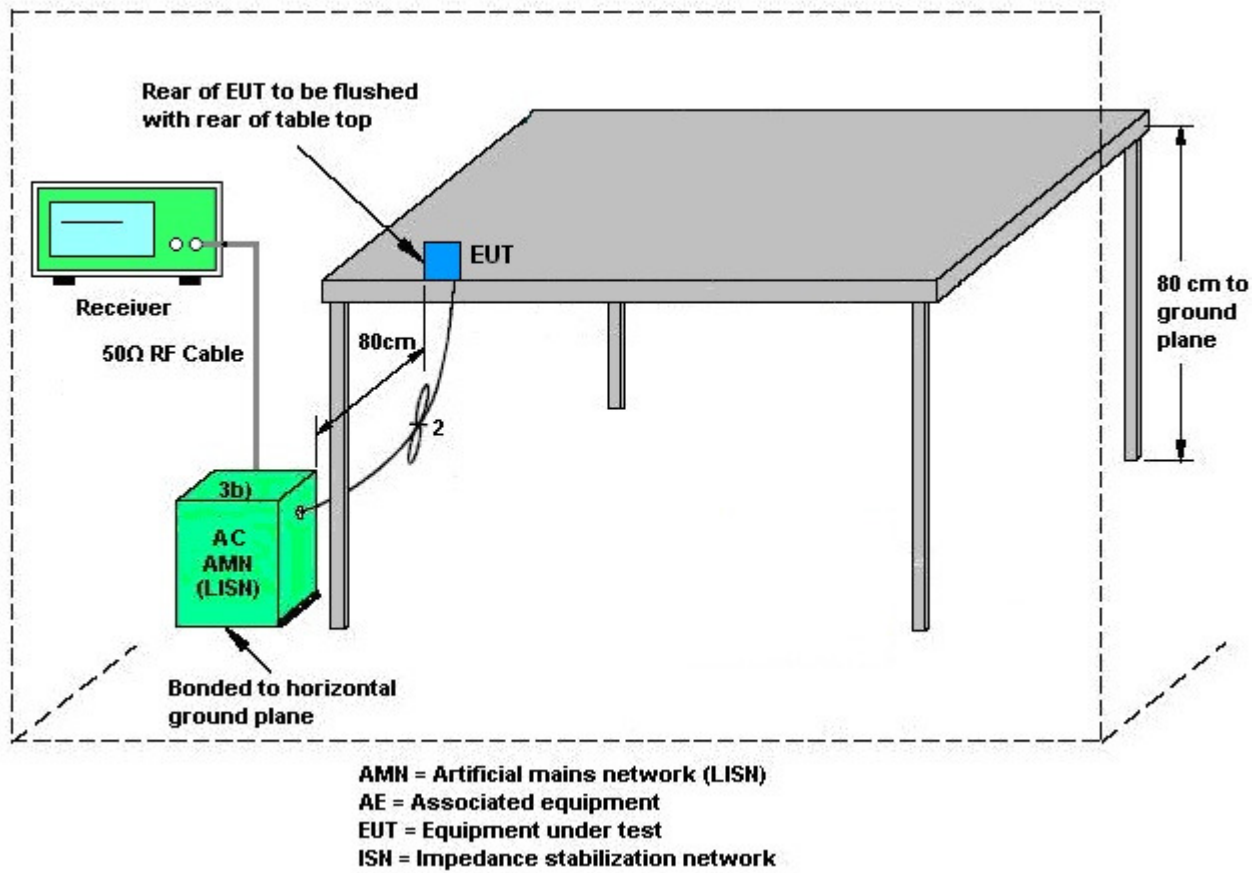

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23℃
Test Engineer :	Kai-Chun Chu	Relative Humidity :	59~60%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + Adapter		

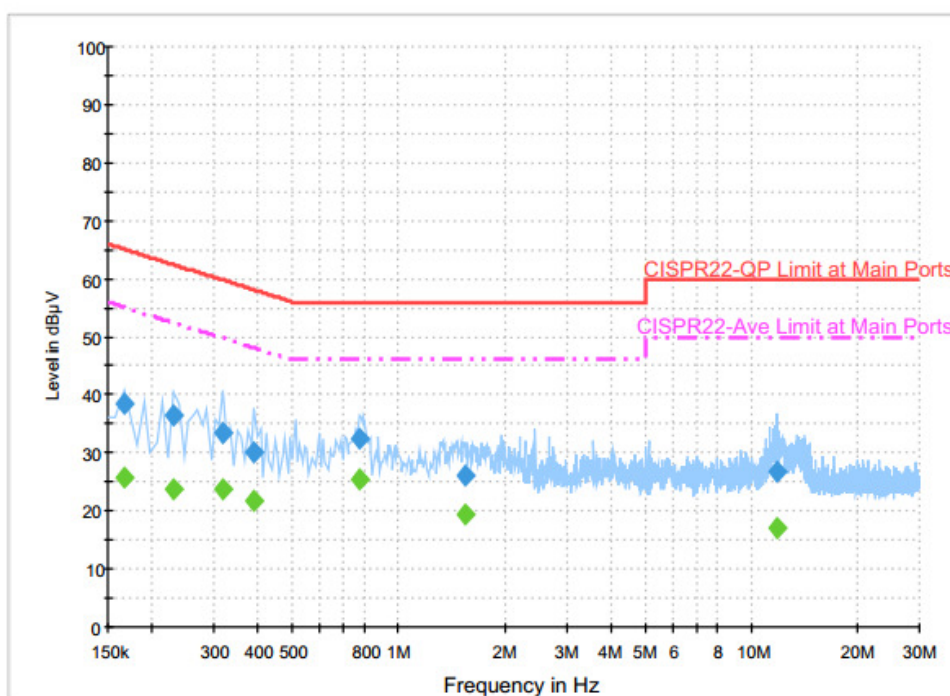


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	38.3	Off	L1	19.6	26.9	65.2
0.230000	36.5	Off	L1	19.6	25.9	62.4
0.318000	33.6	Off	L1	19.6	26.2	59.8
0.390000	30.0	Off	L1	19.6	28.1	58.1
0.774000	32.5	Off	L1	19.6	23.5	56.0
1.542000	26.0	Off	L1	19.6	30.0	56.0
11.814000	26.6	Off	L1	19.7	33.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	25.8	Off	L1	19.6	29.4	55.2
0.230000	23.8	Off	L1	19.6	28.6	52.4
0.318000	23.6	Off	L1	19.6	26.2	49.8
0.390000	21.6	Off	L1	19.6	26.5	48.1
0.774000	25.5	Off	L1	19.6	20.5	46.0
1.542000	19.4	Off	L1	19.6	26.6	46.0
11.814000	17.1	Off	L1	19.7	32.9	50.0

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	59~60%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + Adapter		

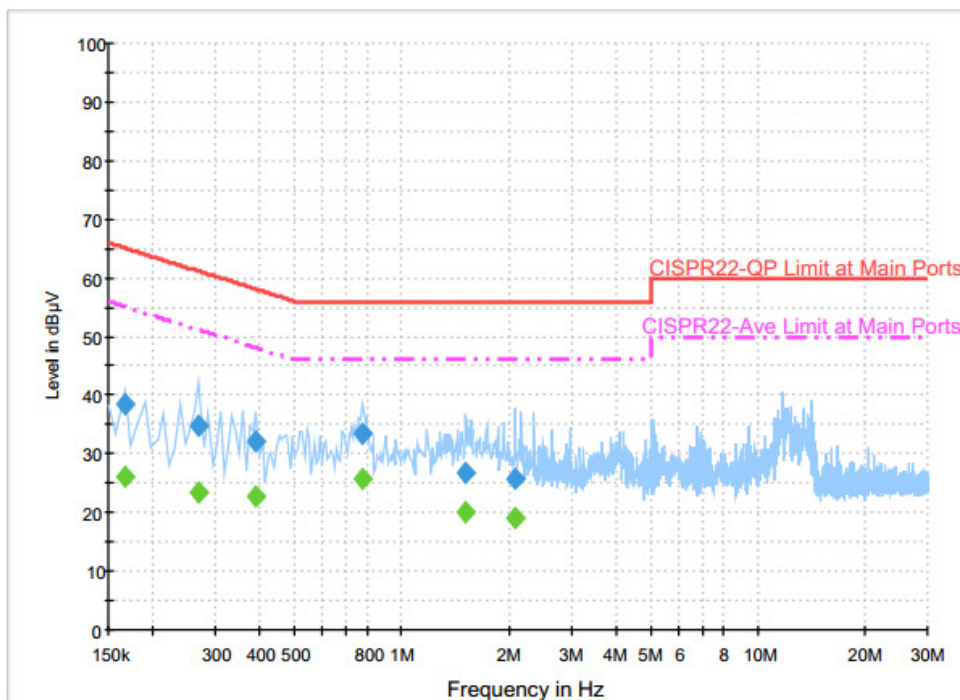
Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	38.4	Off	N	19.6	26.8	65.2
0.270000	34.8	Off	N	19.6	26.3	61.1
0.390000	32.1	Off	N	19.6	26.0	58.1
0.774000	33.4	Off	N	19.6	22.6	56.0
1.510000	26.7	Off	N	19.6	29.3	56.0
2.086000	25.8	Off	N	19.5	30.2	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	26.1	Off	N	19.6	29.1	55.2
0.270000	23.5	Off	N	19.6	27.6	51.1
0.390000	22.8	Off	N	19.6	25.3	48.1
0.774000	25.9	Off	N	19.6	20.1	46.0
1.510000	20.2	Off	N	19.6	25.8	46.0
2.086000	19.0	Off	N	19.5	27.0	46.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

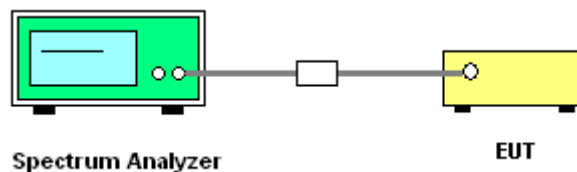

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 1	Ant 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	5.00	5.00	3.00	6.01	0.00	0.01

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 12, 2015	Mar. 07, 2016 ~ Jun. 03, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 12, 2015	Mar. 07, 2016 ~ Jun. 03, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Mar. 07, 2016 ~ Jun. 03, 2016	Nov. 22, 2016	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 08, 2015	Mar. 07, 2016 ~ Jun. 03, 2016	Sep. 07, 2016	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 22, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Apr. 22, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Apr. 22, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	May 27, 2016 ~ Jun. 01, 2016	Sep. 01, 2016	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	May 27, 2016 ~ Jun. 01, 2016	Nov. 19, 2016	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	May 27, 2016 ~ Jun. 01, 2016	Nov. 16, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 08, 2015	May 27, 2016 ~ Jun. 01, 2016	Oct. 07, 2016	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 19, 2015	May 27, 2016 ~ Jun. 01, 2016	Nov. 18, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jul. 01, 2015	May 27, 2016 ~ Jun. 01, 2016	Jun. 30, 2016	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2015	May 27, 2016 ~ Jun. 01, 2016	Sep. 23, 2016	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 27, 2016 ~ Jun. 01, 2016	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 27, 2016 ~ Jun. 01, 2016	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	May 27, 2016 ~ Jun. 01, 2016	Nov. 01, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	May 27, 2016 ~ Jun. 01, 2016	Jun. 01, 2016	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90
---	------



Appendix A. Conducted Test Results

Test Engineer:	Bill Kuo	Temperature:	21~25	°C
Test Date:	2016/03/07 ~ 2016/06/03	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	25.65	25.35	44.64	44.96	-		23.01		
11a	6Mbps	2	44	5220	21.90	25.10	44.48	44.80	-		23.01		
11a	6Mbps	2	48	5240	24.15	24.90	44.89	46.24	-		23.01		
HT20	MCS0	2	36	5180	28.10	27.35	47.84	47.84	-		23.01		
HT20	MCS0	2	44	5220	26.60	28.95	48.53	48.16	-		23.01		
HT20	MCS0	2	48	5240	25.65	26.55	49.66	47.84	-		23.01		
HT40	MCS0	2	38	5190	37.70	37.90	86.08	77.28	-		23.01		
HT40	MCS0	2	46	5230	68.10	69.50	105.60	110.72	-		23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	0.19	0.16	23.71	23.36	26.55	30.00		5.00			Pass
11a	6Mbps	2	44	5220	0.19	0.16	23.30	23.19	26.25	30.00		5.00			Pass
11a	6Mbps	2	48	5240	0.19	0.16	23.35	23.09	26.23	30.00		5.00			Pass
HT20	MCS0	2	36	5180	0.17	0.20	23.82	23.72	26.78	30.00		5.00			Pass
HT20	MCS0	2	44	5220	0.17	0.20	23.46	23.56	26.52	30.00		5.00			Pass
HT20	MCS0	2	48	5240	0.17	0.20	23.56	23.39	26.49	30.00		5.00			Pass
HT40	MCS0	2	38	5190	0.20	0.20	20.69	20.85	23.78	30.00		5.00			Pass
HT40	MCS0	2	46	5230	0.20	0.20	25.15	24.95	28.06	30.00		5.00			Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	0.19	0.16			14.71	14.99	8.01			Pass	
11a	6Mbps	2	44	5220	0.19	0.16			14.72	14.99	8.01			Pass	
11a	6Mbps	2	48	5240	0.19	0.16			14.66	14.99	8.01			Pass	
HT20	MCS0	2	36	5180	0.17	0.20			14.64	14.99	8.01			Pass	
HT20	MCS0	2	44	5220	0.17	0.20			14.84	14.99	8.01			Pass	
HT20	MCS0	2	48	5240	0.17	0.20			14.71	14.99	8.01			Pass	
HT40	MCS0	2	38	5190	0.20	0.20			8.82	14.99	8.01			Pass	
HT40	MCS0	2	46	5230	0.20	0.20			13.01	14.99	8.01			Pass	

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	108	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	132	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	120	
11a	6Mbps	1	36	5180	5180.100	0.100	19.31	-30	120	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	50	120	



Appendix B. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Bill Chang, and Ken Wu	Temperature :	18~22°C
		Relative Humidity :	50~53%

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5146.55	63.72	-10.28	74	55.38	31.58	10.23	33.47	388	349	P	H
		5147.75	53.45	-0.55	54	45.11	31.58	10.23	33.47	388	349	A	H
	*	5180	117.47	-	-	109.09	31.62	10.23	33.47	388	349	P	H
	*	5180	107.54	-	-	99.16	31.62	10.23	33.47	388	349	A	H
		5434.04	55.52	-18.48	74	46.24	31.92	10.84	33.48	388	349	P	H
		5455.93	49.25	-4.75	54	39.95	31.94	10.84	33.48	388	349	A	H
		5146.55	55.8	-18.2	74	47.46	31.58	10.23	33.47	400	341	P	V
		5150	51.04	-2.96	54	42.7	31.58	10.23	33.47	400	341	A	V
	*	5180	113.17	-	-	104.79	31.62	10.23	33.47	400	341	P	V
	*	5180	103.17	-	-	94.79	31.62	10.23	33.47	400	341	A	V
		5425.68	51.98	-22.02	74	42.72	31.9	10.84	33.48	400	341	P	V
		5375.96	43.48	-10.52	54	34.37	31.84	10.75	33.48	400	341	A	V
802.11a CH 44 5220MHz		5108	52.56	-21.44	74	44.27	31.54	10.22	33.47	400	340	P	H
		5149.85	46.12	-7.88	54	37.78	31.58	10.23	33.47	400	340	A	H
	*	5220	120.88	-	-	112.45	31.66	10.24	33.47	400	340	P	H
	*	5220	110.22	-	-	101.79	31.66	10.24	33.47	400	340	A	H
		5374.42	54.55	-19.45	74	45.44	31.84	10.75	33.48	400	340	P	H
		5456.04	47.74	-6.26	54	38.44	31.94	10.84	33.48	400	340	A	H
		5114.6	50.15	-23.85	74	41.86	31.54	10.22	33.47	400	336	P	V
		5103.95	43.3	-10.7	54	35.03	31.52	10.22	33.47	400	336	A	V
	*	5219	115.72	-	-	107.29	31.66	10.24	33.47	400	336	P	V
	*	5219	105.1	-	-	96.67	31.66	10.24	33.47	400	336	A	V
		5362.32	51.36	-22.64	74	42.25	31.84	10.75	33.48	400	336	P	V
		5364.3	42.7	-11.3	54	33.59	31.84	10.75	33.48	400	336	A	V



802.11a CH 48 5240MHz		5129	52.88	-21.12	74	44.57	31.56	10.22	33.47	400	345	P	H
		5124.95	45.69	-8.31	54	37.38	31.56	10.22	33.47	400	345	A	H
	*	5240	120.37	-	-	111.79	31.68	10.37	33.47	400	345	P	H
	*	5240	110.17	-	-	101.59	31.68	10.37	33.47	400	345	A	H
		5391.14	53.61	-20.39	74	44.36	31.86	10.87	33.48	400	345	P	H
		5456.04	47.96	-6.04	54	38.66	31.94	10.84	33.48	400	345	A	H
		5115.8	50.93	-23.07	74	42.64	31.54	10.22	33.47	400	342	P	V
		5103.8	43.24	-10.76	54	34.97	31.52	10.22	33.47	400	342	A	V
	*	5239	116.47	-	-	107.89	31.68	10.37	33.47	400	342	P	V
	*	5239	106.06	-	-	97.48	31.68	10.37	33.47	400	342	A	V
		5391.69	51.39	-22.61	74	42.14	31.86	10.87	33.48	400	342	P	V
		5456.04	42.91	-11.09	54	33.61	31.94	10.84	33.48	400	342	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	55.7	-12.6	68.3	68.55	39.79	14.86	67.5	100	0	P	H
		15540	46.14	-27.86	74	55.04	38.6	17.89	65.39	100	0	P	H
													H
													H
		10360	59.1	-9.2	68.3	71.95	39.79	14.86	67.5	100	0	P	V
		15540	48.49	-25.51	74	57.39	38.6	17.89	65.39	100	0	P	V
													V
													V
802.11a CH 44 5220MHz		10440	57.97	-10.33	68.3	70.67	39.89	14.91	67.5	100	0	P	H
		15660	50.69	-23.31	74	59.89	38.23	17.94	65.37	100	0	P	H
													H
													H
		10440	60.27	-8.03	68.3	72.97	39.89	14.91	67.5	100	0	P	V
		15660	52.39	-21.61	74	61.59	38.23	17.94	65.37	316	154	P	V
		15660	44.43	-9.57	54	53.63	38.23	17.94	65.37	316	154	A	V
													V
802.11a CH 48 5240MHz		10480	60.48	-7.82	68.3	73.07	39.97	14.94	67.5	100	0	P	H
		15720	55.84	-18.16	74	65.2	38.03	17.97	65.36	374	133	P	H
		15720	43.12	-10.88	54	52.48	38.03	17.97	65.36	374	133	A	H
													H
		10480	61.16	-7.14	68.3	73.75	39.97	14.94	67.5	100	0	P	V
		15720	54.93	-19.07	74	64.29	38.03	17.97	65.36	370	155	P	V
		15720	44.43	-9.57	54	53.79	38.03	17.97	65.36	370	155	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5149.1	62.43	-11.57	74	54.09	31.58	10.23	33.47	390	339	P	H
		5149.85	53.82	-0.18	54	45.48	31.58	10.23	33.47	390	339	A	H
	*	5180	117.52	-	-	109.14	31.62	10.23	33.47	390	339	P	H
	*	5180	107.09	-	-	98.71	31.62	10.23	33.47	390	339	A	H
		5425.24	55.69	-18.31	74	46.43	31.9	10.84	33.48	390	339	P	H
		5455.93	48.56	-5.44	54	39.26	31.94	10.84	33.48	390	339	A	H
		5147.6	57.48	-16.52	74	49.14	31.58	10.23	33.47	400	340	P	V
		5149.55	47.95	-6.05	54	39.61	31.58	10.23	33.47	400	340	A	V
	*	5180	112.4	-	-	104.02	31.62	10.23	33.47	400	340	P	V
	*	5180	102.37	-	-	93.99	31.62	10.23	33.47	400	340	A	V
		5397.41	52.02	-21.98	74	42.75	31.88	10.87	33.48	400	340	P	V
		5455.93	43.04	-10.96	54	33.74	31.94	10.84	33.48	400	340	A	V
802.11n HT20 CH 44 5220MHz		5123.45	53.8	-20.2	74	45.49	31.56	10.22	33.47	400	344	P	H
		5150	46.42	-7.58	54	38.08	31.58	10.23	33.47	400	344	A	H
	*	5220	121.12	-	-	112.69	31.66	10.24	33.47	400	344	P	H
	*	5220	110.52	-	-	102.09	31.66	10.24	33.47	400	344	A	H
		5371.34	54.84	-19.16	74	45.73	31.84	10.75	33.48	400	344	P	H
		5455.82	48.02	-5.98	54	38.72	31.94	10.84	33.48	400	344	A	H
		5084.3	50.15	-23.85	74	41.91	31.5	10.21	33.47	400	337	P	V
		5103.95	42.96	-11.04	54	34.69	31.52	10.22	33.47	400	337	A	V
	*	5220	115.82	-	-	107.39	31.66	10.24	33.47	400	337	P	V
	*	5220	105.02	-	-	96.59	31.66	10.24	33.47	400	337	A	V
		5376.29	50.54	-23.46	74	41.43	31.84	10.75	33.48	400	337	P	V
		5378.38	42.51	-11.49	54	33.38	31.86	10.75	33.48	400	337	A	V



802.11n HT20 CH 48 5240MHz		5122.7	52.97	-21.03	74	44.66	31.56	10.22	33.47	400	339	P	H
		5124.95	45.7	-8.3	54	37.39	31.56	10.22	33.47	400	339	A	H
	*	5240	120.46	-	-	111.88	31.68	10.37	33.47	400	339	P	H
	*	5240	109.97	-	-	101.39	31.68	10.37	33.47	400	339	A	H
		5387.29	54.19	-19.81	74	44.94	31.86	10.87	33.48	400	339	P	H
		5455.93	47.69	-6.31	54	38.39	31.94	10.84	33.48	400	339	A	H
		5091.05	50.29	-23.71	74	42.03	31.52	10.21	33.47	400	337	P	V
		5103.95	43.13	-10.87	54	34.86	31.52	10.22	33.47	400	337	A	V
	*	5240	115.68	-	-	107.1	31.68	10.37	33.47	400	337	P	V
	*	5240	104.14	-	-	95.56	31.68	10.37	33.47	400	337	A	V
		5398.4	51.86	-22.14	74	42.59	31.88	10.87	33.48	400	337	P	V
		5382.89	42.64	-11.36	54	33.39	31.86	10.87	33.48	400	337	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	55.17	-13.13	68.3	68.02	39.79	14.86	67.5	100	0	P	H
		15540	45.33	-28.67	74	54.23	38.6	17.89	65.39	100	0	P	H
													H
													H
		10360	55.8	-12.5	68.3	68.65	39.79	14.86	67.5	100	0	P	V
		15540	45.35	-28.65	74	54.25	38.6	17.89	65.39	100	0	P	V
													V
													V
802.11n HT20 CH 44 5220MHz		10440	58.61	-9.69	68.3	71.31	39.89	14.91	67.5	100	0	P	H
		15660	50.84	-23.16	74	60.04	38.23	17.94	65.37	100	0	P	H
													H
													H
		10440	59.41	-8.89	68.3	72.11	39.89	14.91	67.5	100	0	P	V
		15660	56.23	-17.77	74	65.43	38.23	17.94	65.37	251	212	P	V
		15660	44.25	-9.75	54	53.45	38.23	17.94	65.37	251	212	A	V
													V
802.11n HT20 CH 48 5240MHz		10480	59.13	-9.17	68.3	71.72	39.97	14.94	67.5	100	0	P	H
		15720	50.12	-23.88	74	59.48	38.03	17.97	65.36	100	0	P	H
													H
													H
		10480	57.36	-10.94	68.3	69.95	39.97	14.94	67.5	100	0	P	V
		15720	57.3	-16.7	74	66.66	38.03	17.97	65.36	257	214	P	V
		15720	44.75	-9.25	54	54.11	38.03	17.97	65.36	257	214	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5144.9	63.15	-10.85	74	54.81	31.58	10.23	33.47	400	348	P	H
		5149.55	53.34	-0.66	54	45	31.58	10.23	33.47	400	348	A	H
	*	5190	108.55	-	-	100.16	31.62	10.24	33.47	400	348	P	H
	*	5190	101.93	-	-	93.54	31.62	10.24	33.47	400	348	A	H
		5455.93	58.01	-15.99	74	48.71	31.94	10.84	33.48	400	348	P	H
		5456.04	50.15	-3.85	54	40.85	31.94	10.84	33.48	400	348	A	H
		5147.6	57.65	-16.35	74	49.31	31.58	10.23	33.47	400	340	P	V
		5147.45	49.85	-4.15	54	41.51	31.58	10.23	33.47	400	340	A	V
	*	5190	105.49	-	-	97.1	31.62	10.24	33.47	400	340	P	V
	*	5190	98.27	-	-	89.88	31.62	10.24	33.47	400	340	A	V
		5383.99	54.11	-19.89	74	44.86	31.86	10.87	33.48	400	340	P	V
		5455.82	45.29	-8.71	54	35.99	31.94	10.84	33.48	400	340	A	V
802.11n HT40 CH 46 5230MHz		5149.55	68.99	-5.01	74	60.65	31.58	10.23	33.47	400	348	P	H
		5149.1	53.5	-0.5	54	45.16	31.58	10.23	33.47	400	348	A	H
	*	5230	116.73	-	-	108.15	31.68	10.37	33.47	400	348	P	H
	*	5230	109.41	-	-	100.83	31.68	10.37	33.47	400	348	A	H
		5415.45	56.26	-17.74	74	46.97	31.9	10.87	33.48	400	348	P	H
		5456.04	49.06	-4.94	54	39.76	31.94	10.84	33.48	400	348	A	H
		5140.55	54.33	-19.67	74	45.99	31.58	10.23	33.47	394	351	P	V
		5149.85	47.35	-6.65	54	39.01	31.58	10.23	33.47	394	351	A	V
	*	5230	112.44	-	-	103.86	31.68	10.37	33.47	394	351	P	V
	*	5230	105.53	-	-	96.95	31.68	10.37	33.47	394	351	A	V
		5361.11	52.69	-21.31	74	43.58	31.84	10.75	33.48	394	351	P	V
		5456.04	45.09	-8.91	54	35.79	31.94	10.84	33.48	394	351	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	44.3	-29.7	74	57.13	39.81	14.86	67.5	100	0	P	H
		15570	38.4	-35.6	74	47.4	38.49	17.9	65.39	100	0	P	H
													H
													H
		10380	42.37	-31.63	74	55.2	39.81	14.86	67.5	100	0	P	V
		15570	39.39	-34.61	74	48.39	38.49	17.9	65.39	100	0	P	V
													V
													V
802.11n HT40 CH 46 5230MHz		10460	53	-15.3	68.3	65.67	39.92	14.91	67.5	100	0	P	H
		15690	44.28	-29.72	74	53.55	38.13	17.96	65.36	100	0	P	H
													H
													H
		10460	56.27	-12.03	68.3	68.94	39.92	14.91	67.5	100	0	P	V
		15690	46.46	-27.54	74	55.73	38.13	17.96	65.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		125.03	38.56	-4.94	43.5	51.01	17.85	1.48	31.78	276	88	QP	H
		125.03	41.17	-2.33	43.5	53.62	17.85	1.48	31.78	276	88	P	H
		200.1	40.18	-3.32	43.5	54.22	16	1.74	31.78	163	133	QP	H
		200.1	41.75	-1.75	43.5	55.79	16	1.74	31.78	163	133	P	H
	*	250.05	56.4	10.4	46	67.49	18.7	1.98	31.77	119	182	QP	H
	*	250.05	56.69	10.69	46	67.78	18.7	1.98	31.77	119	182	P	H
		300.048	44.51	-1.49	46	54.34	19.7	2.23	31.76	100	59	QP	H
		300.048	45.62	-0.38	46	55.45	19.7	2.23	31.76	100	59	P	H
		500.2	37.58	-8.42	46	42.42	24.1	2.95	31.89			P	H
		875.4	39.35	-6.65	46	38	29.06	3.84	31.55			P	H
													H
													H
		156.63	37.56	-5.94	43.5	50.61	17.05	1.68	31.78			P	V
		200.1	38.8	-4.7	43.5	52.84	16	1.74	31.78	100	0	P	V
	*	250.04	54.74	8.74	46	65.83	18.7	1.98	31.77	174	177	QP	V
	*	250.04	55.04	9.04	46	66.13	18.7	1.98	31.77	174	177	P	V
		300	38.23	-7.77	46	48.16	19.7	2.13	31.76			P	V
		374.9	36.26	-9.74	46	43.95	21.76	2.34	31.79			P	V
		500.2	35.06	-10.94	46	39.9	24.1	2.95	31.89			P	V
													V
													V
													V
													V
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission





Test Engineer :	J.C. Liang, Bill Chang, and Ken Wu	Temperature :	18~22°C
		Relative Humidity :	50~53%

Note symbol



-L	Low channel location
-R	High channel location







Band 1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

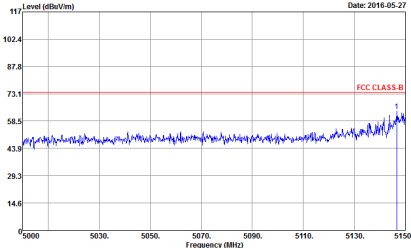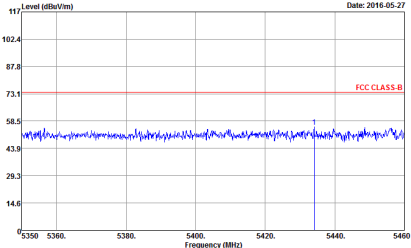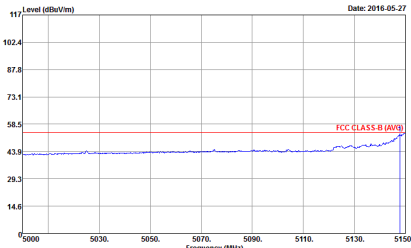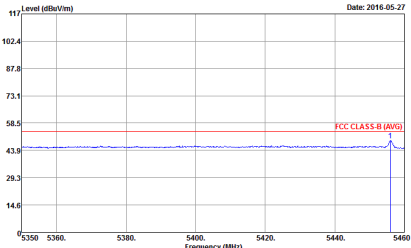WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL Detector : Peak

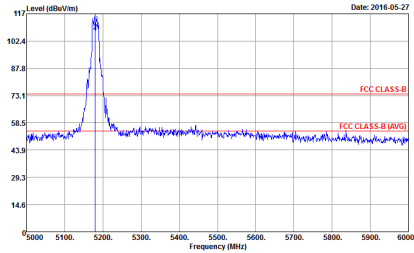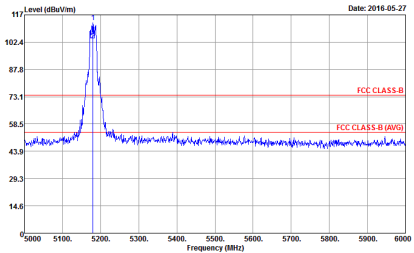

WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

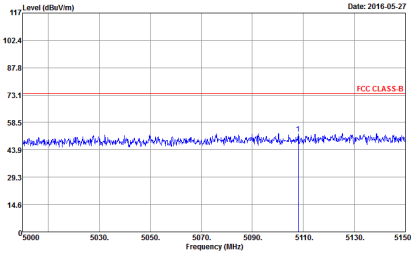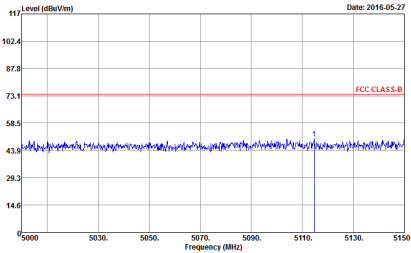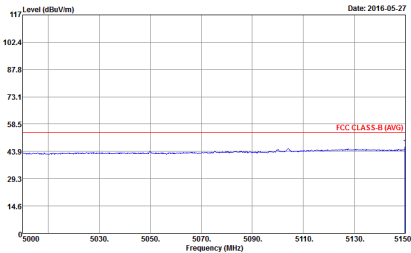
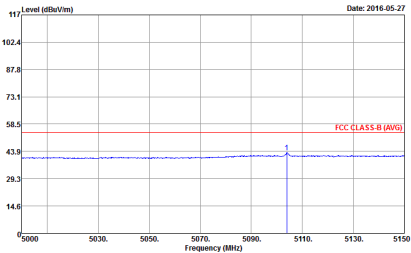


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak







WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak



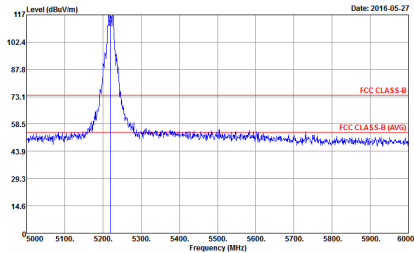
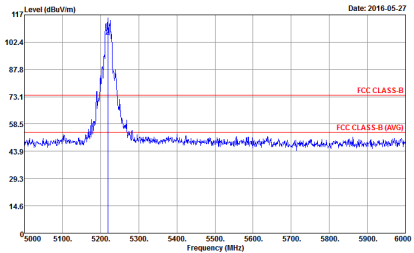


WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11a CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

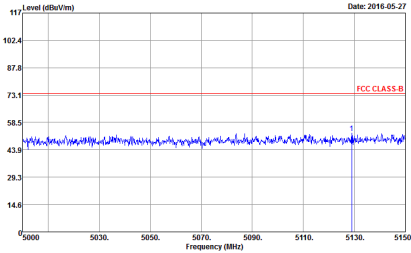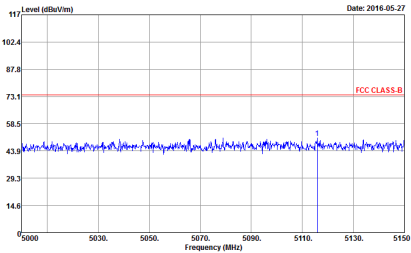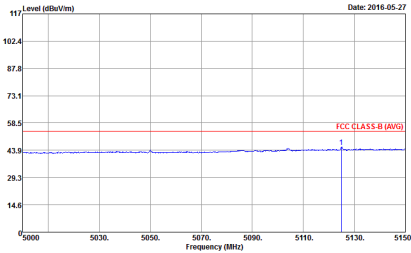
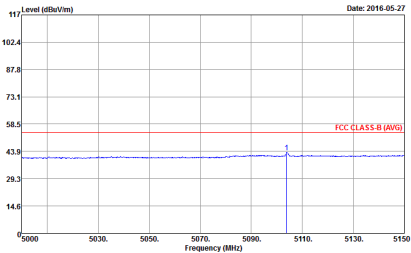


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

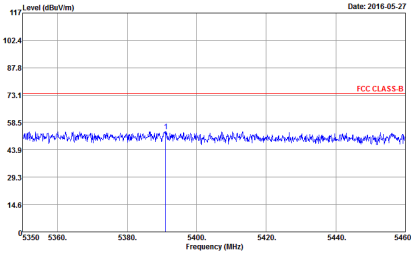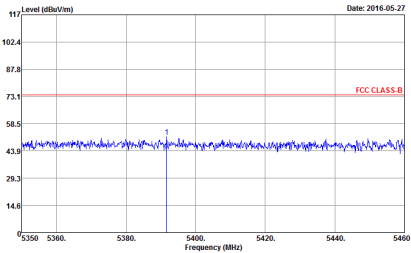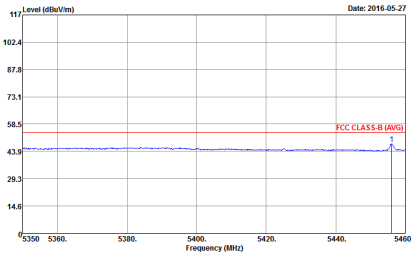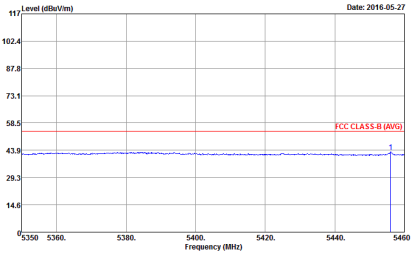





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
1+2	Horizontal	Vertical
Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is a noisy blue line that remains below the limit, with a small peak at 5460 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is a noisy blue line that remains below the limit, with a small peak at 5460 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	The plot shows the average level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The measured signal is a noisy blue line that remains below the limit, with a small peak at 5460 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	The plot shows the average level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The measured signal is a noisy blue line that remains below the limit, with a small peak at 5460 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

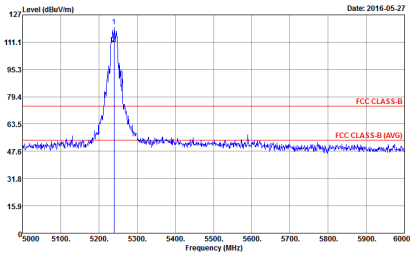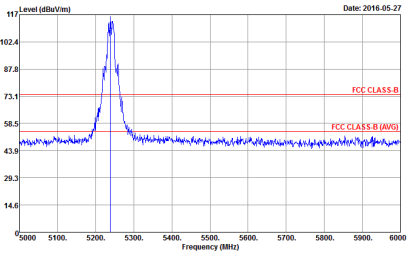



WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11a CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak







Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

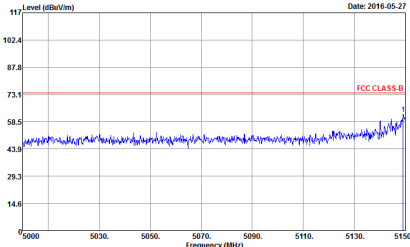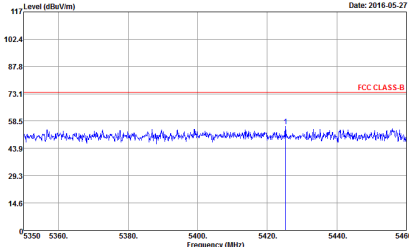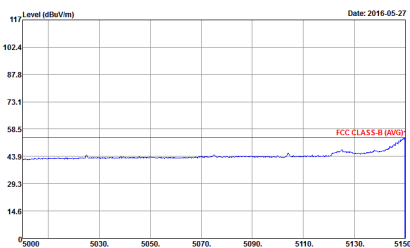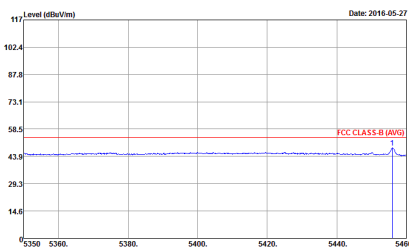WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

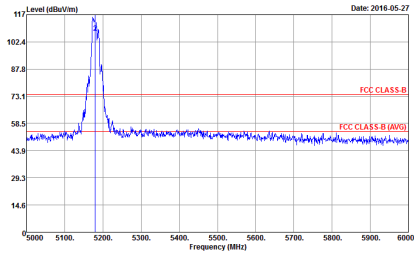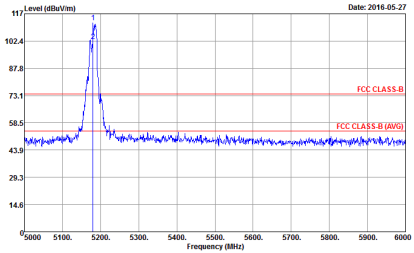

WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

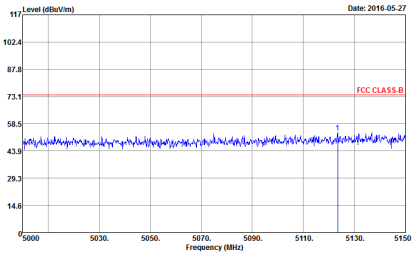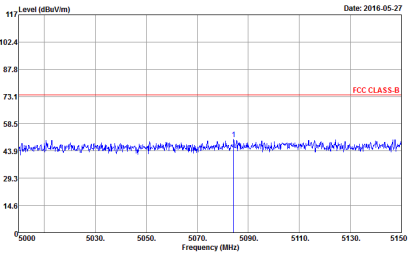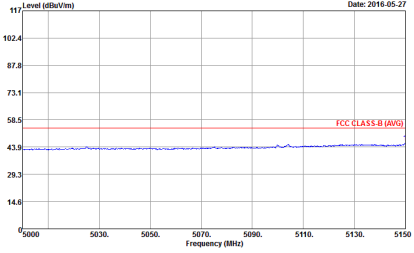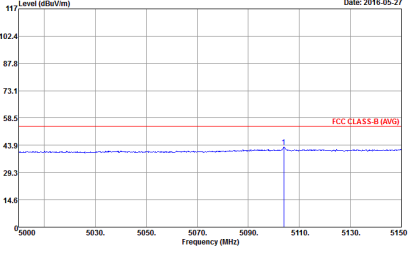

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - R	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak







WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11n HT20 CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	Horizontal Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 5220 MHz. The peak level is approximately 111.1 dBuV/m. The average level is approximately 78.4 dBuV/m. The plot includes a red line for FCC CLASS-B and a blue line for FCC CLASS-B (AVG). The x-axis ranges from 5000 to 6000 MHz, and the y-axis ranges from 15.8 to 127 dBuV/m. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Vertical Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a sharp peak at 5220 MHz. The peak level is approximately 102.4 dBuV/m. The average level is approximately 73.1 dBuV/m. The plot includes a red line for FCC CLASS-B and a blue line for FCC CLASS-B (AVG). The x-axis ranges from 5000 to 6000 MHz, and the y-axis ranges from 14.8 to 117 dBuV/m. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

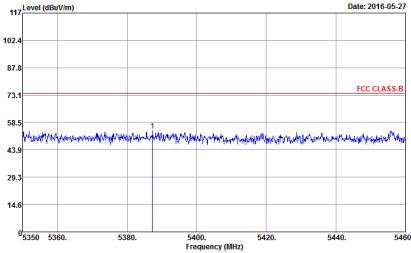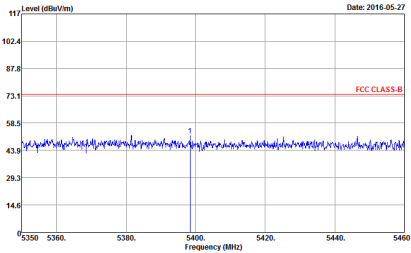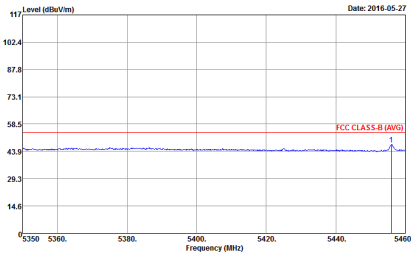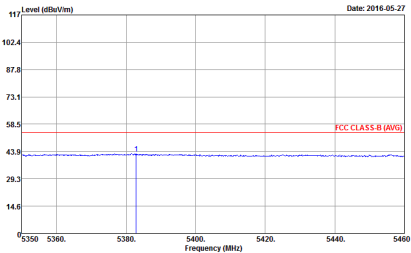

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - R	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak







WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11n HT20 CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak

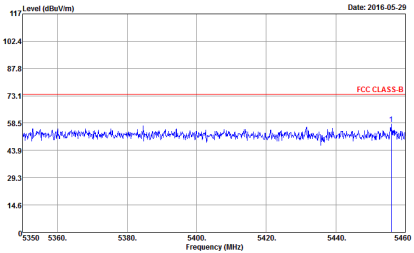
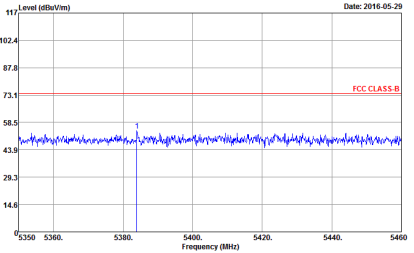
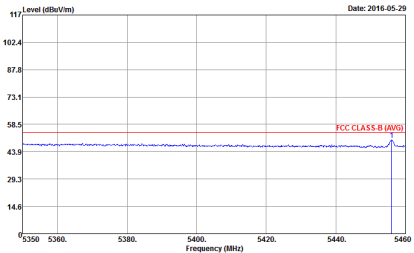
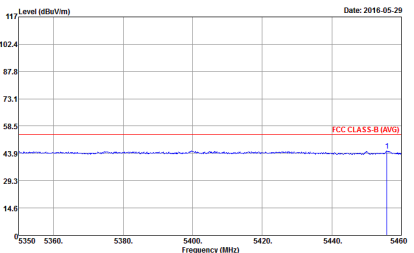


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak







WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

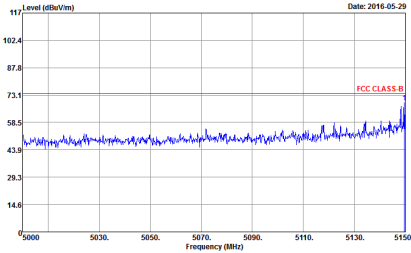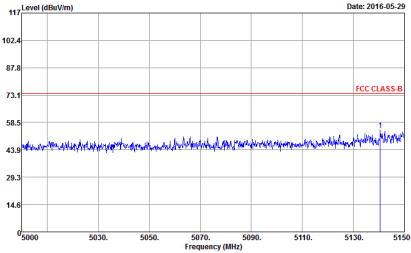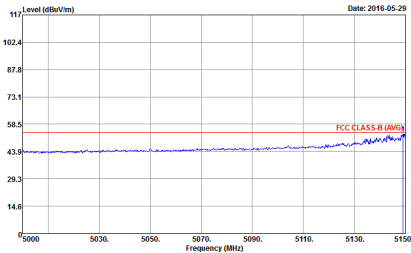
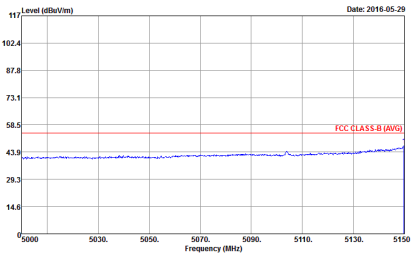


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - L	
1+2	Horizontal	Vertical
Peak	The plot shows the peak signal level in dBuV/m across the frequency range 5000 to 5150 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is consistently below this limit, with a peak around 5130 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	The plot shows the peak signal level in dBuV/m across the frequency range 5000 to 5150 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is consistently below this limit, with a peak around 5130 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	The plot shows the average signal level in dBuV/m across the frequency range 5000 to 5150 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal is consistently below this limit, with a peak around 5130 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	The plot shows the average signal level in dBuV/m across the frequency range 5000 to 5150 MHz. The y-axis ranges from 14.6 to 117 dBuV/m. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal is consistently below this limit, with a peak around 5130 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak

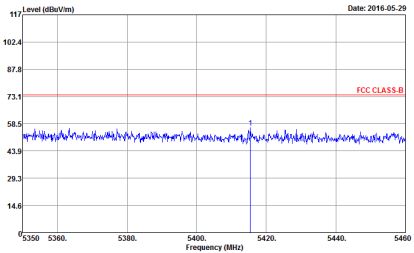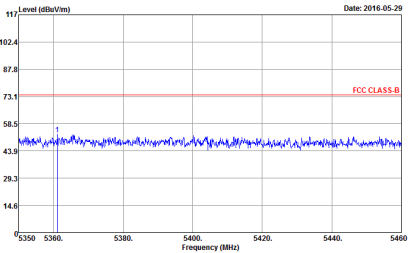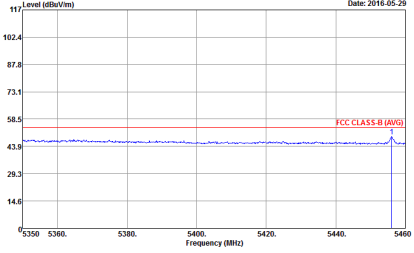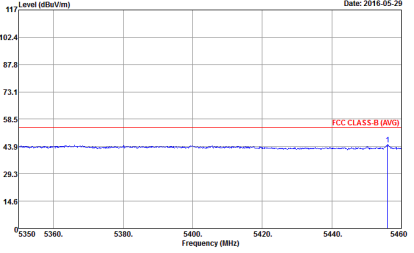

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - R	
1+2	Horizontal	Vertical
Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is below this limit, with a peak at approximately 5420 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The measured signal is below this limit, with a peak at approximately 5420 MHz. Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	The plot shows the average level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal is below this limit, with a peak at approximately 5420 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	The plot shows the average level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5350 to 5460 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The measured signal is below this limit, with a peak at approximately 5420 MHz. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak

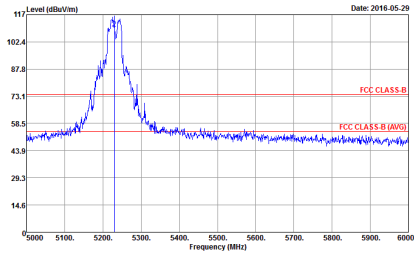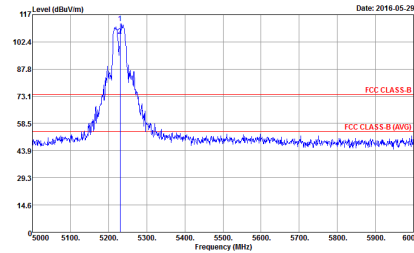



WIFI	Band 1 5150~5250MHz Fundamental @ 3m	
ANT	802.11n HT40 CH46 5230MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak





Band 1 - 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

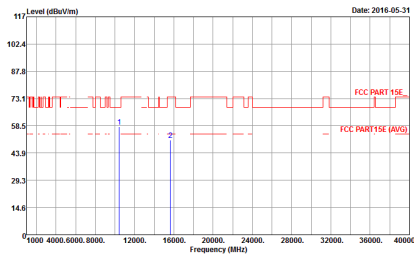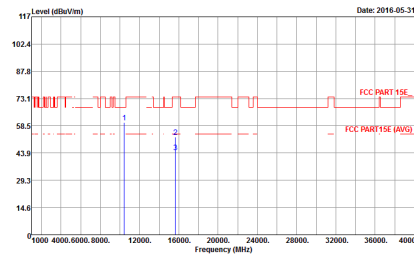



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

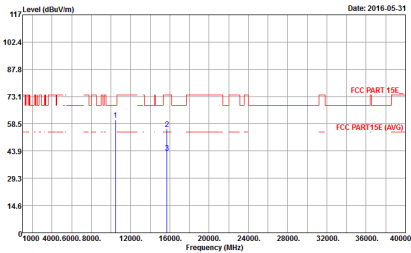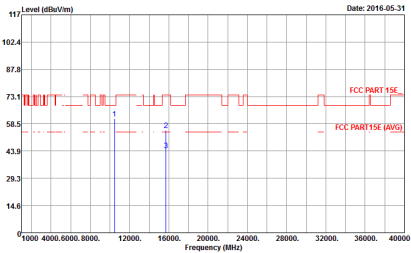



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak





Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

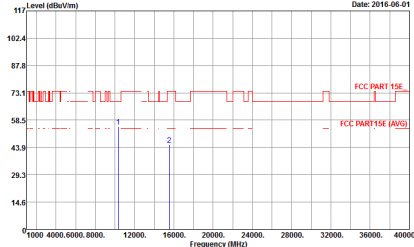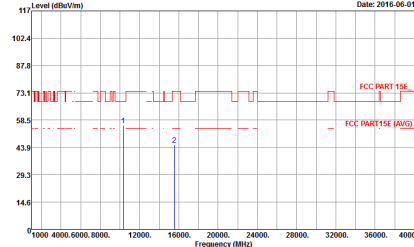WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

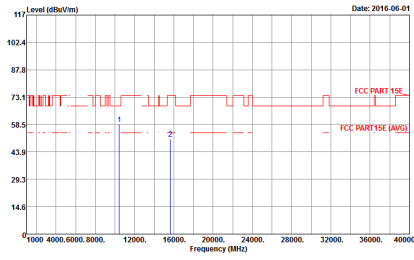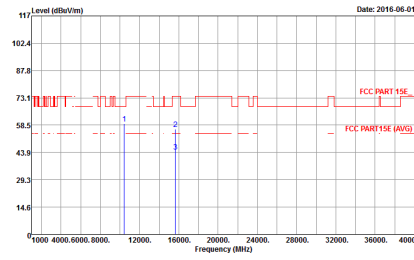

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

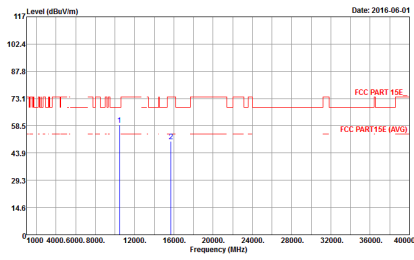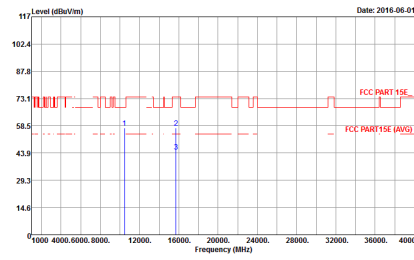



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak





Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

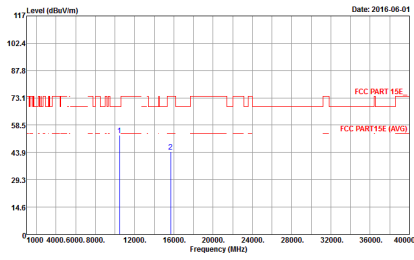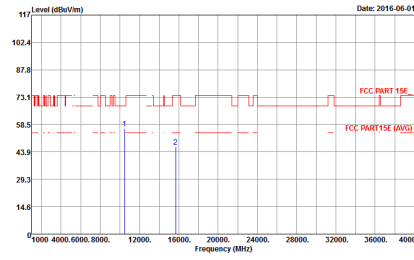


WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH46 5230MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

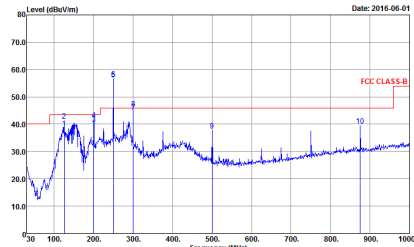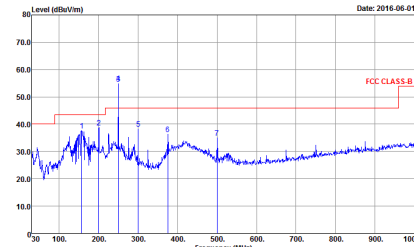
WIFI	5GHz WIFI	
ANT	802.11n HT20 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11a for Ant 1	95.77	1360	0.74	1kHz
1+2	802.11a for Ant 2	96.45	1360	0.74	1kHz
1+2	5GHz 802.11n HT20 for Ant 1	96.21	1270	0.79	1kHz
1+2	5GHz 802.11n HT20 for Ant 2	95.49	1270	0.79	1kHz
1+2	5GHz 802.11n HT40 for Ant 1	94.58	628	1.59	3kHz
1+2	5GHz 802.11n HT40 for Ant 2	94.58	628	1.59	3kHz

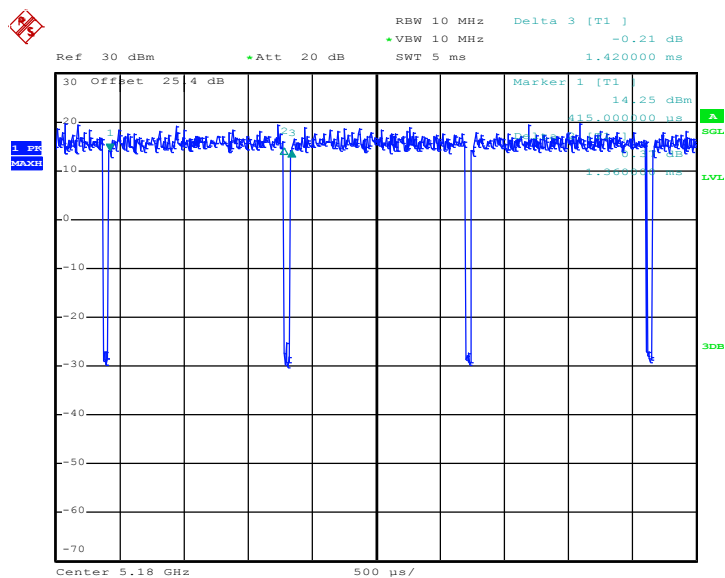MIMO <Ant. 1+2(1)>
802.11a


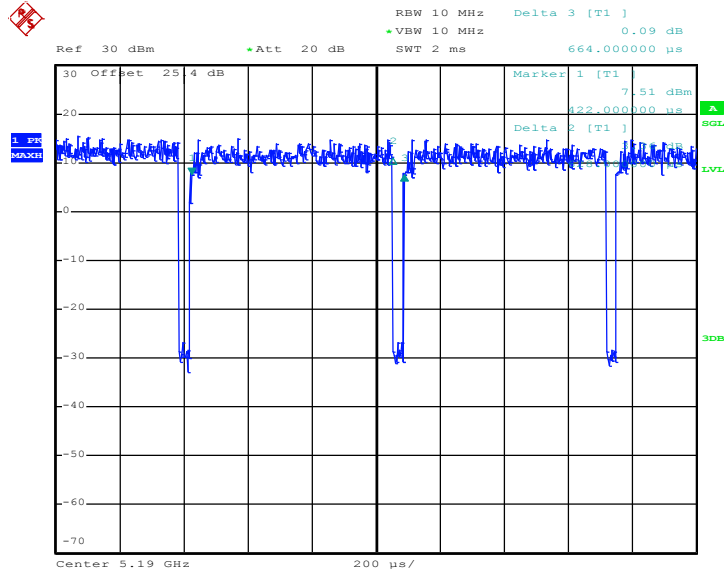
Date: 7.MAR.2016 15:08:05

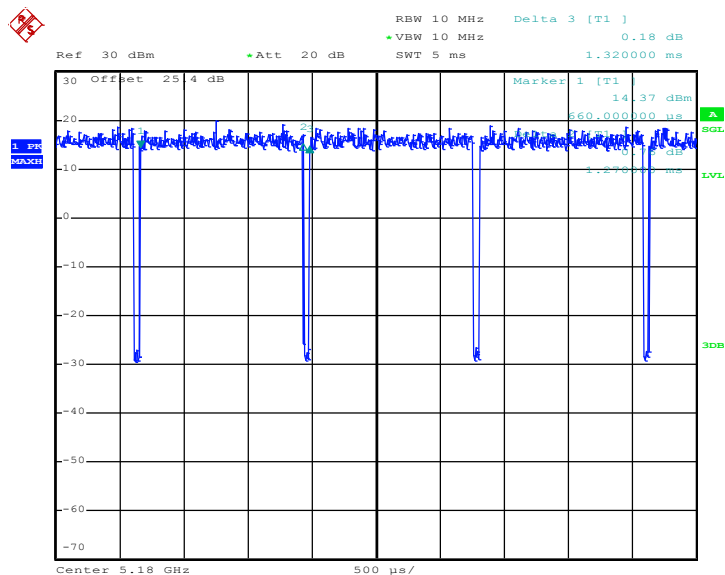802.11n HT20


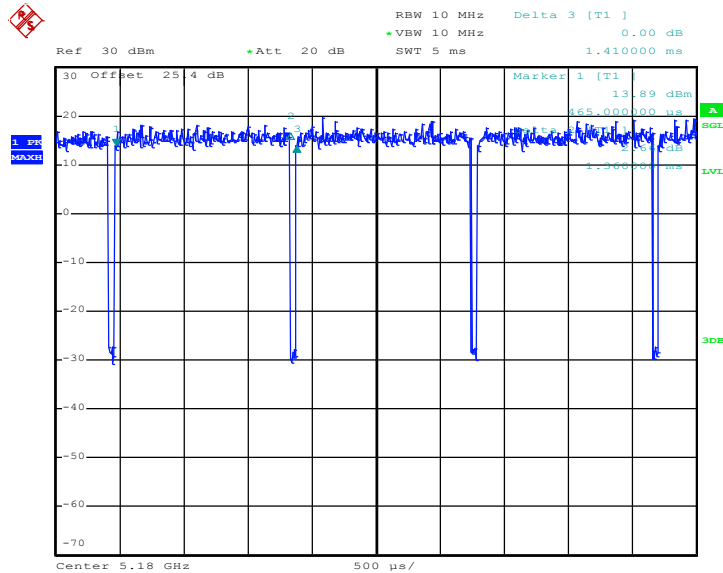
Date: 7.MAR.2016 15:15:09




802.11n HT40



Date: 7.MAR.2016 15:18:55

MIMO <Ant. 1+2(2)>
802.11a


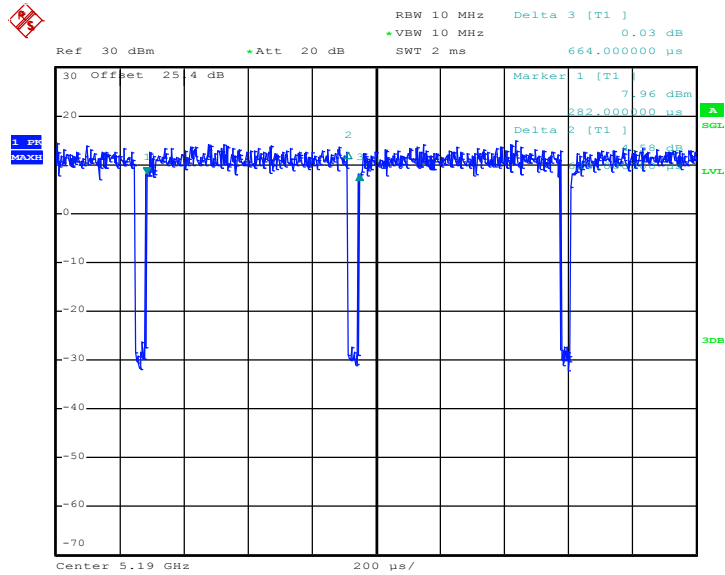
Date: 7.MAR.2016 15:13:05

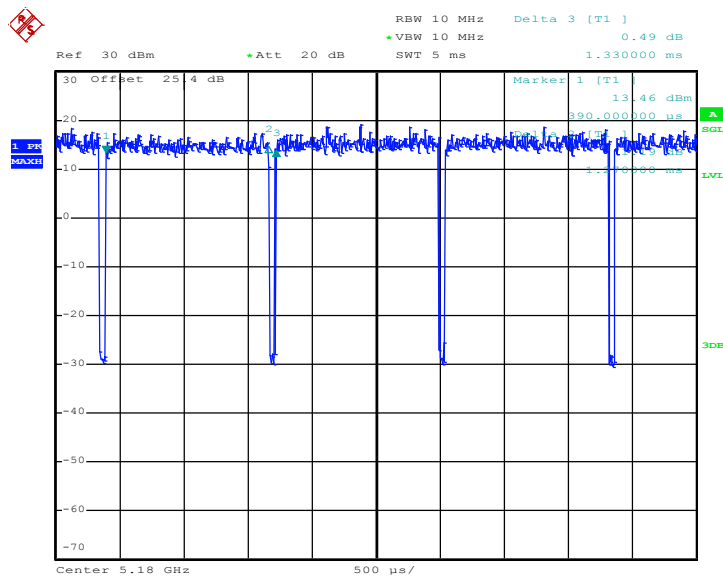802.11n HT20


Date: 7.MAR.2016 15:15:52



802.11n HT40



Date: 7.MAR.2016 15:19:34