



FCC RADIO TEST REPORT

FCC ID : UZ7TC58A1
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC58A1
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC 47 CFR Part 2, 27

The product was received on Mar. 14, 2022 and testing was performed from Mar. 25, 2022 to Jul. 26, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test..... 6

 1.3 Modification of EUT 6

 1.4 Testing Location 7

 1.5 Applicable Standards..... 7

2 Test Configuration of Equipment Under Test 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System..... 9

 2.3 Support Unit used in test configuration and system 9

 2.4 Measurement Results Explanation Example..... 9

 2.5 Frequency List of Low/Middle/High Channels 10

3 Conducted Test Items 12

 3.1 Measuring Instruments 12

 3.2 Conducted Output Power and EIRP..... 13

 3.3 Peak-to-Average Ratio 14

 3.4 Occupied Bandwidth..... 15

 3.5 Conducted Band Edge 16

 3.6 Conducted Spurious Emission 17

 3.7 Frequency Stability 18

4 Radiated Test Items 19

 4.1 Measuring Instruments 19

 4.2 Radiated Spurious Emission Measurement 21

5 List of Measuring Equipment..... 22

6 Uncertainty of Evaluation 24

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FG222202J | 01 | Initial issue of report | Jul. 26, 2022 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|--------------------------|---|--------------------|---|
| 3.2 | §2.1046 | Conducted Output Power | Reporting only | - |
| | §27.50 (k)(3) | Equivalent Isotropic Radiated Power (n77) (n78) | Pass | |
| 3.3 | §27.50 (k)(4) | Peak-to-Average Ratio | Pass | - |
| 3.4 | §2.1049 | Occupied Bandwidth | Reporting only | - |
| 3.5 | §2.1051 §27.53 (n)(2) | Conducted Band Edge Measurement (n77) (n78) | Pass | - |
| 3.6 | §2.1051 §27.53 (n)(2) | Conducted Spurious Emission (n77) (n78) | Pass | - |
| 3.7 | §2.1055 §27.54 | Frequency Stability Temperature & Voltage | Pass | - |
| 4.2 | §2.1053 §27.53 (n)(2) | Radiated Spurious Emission (n77) (n78) | Pass | Under limit 15.82 dB at 13805.000 MHz |

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|--|
| Equipment | Touch Computer |
| Brand Name | Zebra |
| Model Name | TC58A1 |
| FCC ID | UZ7TC58A1 |
| Sample 1 | Lowell + Premium config |
| Sample 2 | SE4720 + Base config |
| Sample 3 | Lowell + Base config |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE |
| HW Version | EV3 |
| SW Version | athena_A11_userdebug_GMS_RelKey_2022-02-22-2145_p roduct_SE |
| MFD | 19FEB22 |
| EUT Stage | Identical Prototype |

Remark: The EUT's information above is declared by manufacturer.

| Specification of Accessories | | | | |
|-------------------------------------|------------|-------|-------------|----------------------|
| Adapter | Brand Name | Zebra | Part Number | PWR-WUA5V12W0US |
| Battery 1X | Brand Name | Zebra | Part Number | BT-000442-0020 |
| Battery 1.5X | Brand Name | Zebra | Part Number | BT-000442-0820 |
| USB TYPE A to TYPE C cable | Brand Name | Zebra | Part Number | CBL-TC5X-USBC2A-01 |
| USB TYPE C to 3.5mm audio connector | Brand Name | Zebra | Part Number | ADP-USBC-35MM1-01 |
| 3.5mm Earphone | Brand Name | Zebra | Part Number | HDST-35MM-PTVP-01 |
| USB TYPE C Earphone | Brand Name | Zebra | Part Number | HPST-USBC-PTT1-01 |
| Headset Jumper | Brand Name | Zebra | Part Number | CBL-TC51-HDST35-01 |
| Trigger Handle | Brand Name | Zebra | Part Number | TRG-NGTC5-ELEC-01 |
| Soft Holster | Brand Name | Zebra | Part Number | SG-NGTC5TC7-HLSTR-01 |
| TC53/TC58 RUGGED BOOT | Brand Name | Zebra | Part Number | SG-NGTC5EXO1-01 |



1.2 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | |
|---|--|
| Tx Frequency | 5G NR n77: 3460.2 MHz ~ 3540 MHz 5G NR n78: 3460.2 MHz ~ 3540 MHz |
| Rx Frequency | 5G NR n77: 3460.2 MHz ~ 3540 MHz 5G NR n78: 3460.2 MHz ~ 3540 MHz |
| Bandwidth | 5G NR n77: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz 5G NR n78: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz |
| Maximum Output Power to Antenna | 5G NR n77 : 24.96 dBm 5G NR n77 : 26.49 dBm for HPUE 5G NR n78 : 23.87 dBm 5G NR n78 : 26.64 dBm for HPUE |
| Antenna Type | <Ant. 11>: PIFA Antenna <Ant. 12>: PIFA Antenna |
| Antenna Gain | <Ant. 11> 5G NR n77: 1.10 dBi 5G NR n78: 1.10 dBi <Ant. 12> 5G NR n77: -0.79 dBi 5G NR n78: -0.79 dBi |
| Type of Modulation | PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM |

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

| | |
|---------------------------|--|
| Test Site | Sporton International Inc. EMC & Wireless Communications Laboratory |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 |
| Test Site No. | Sporton Site No. TH03-HY |
| Test Engineer | Sherry Wu, Ivy Yeh, Luffy Lin, Nina Cheng and Peter Liao |
| Temperature | 20~24 |
| Relative Humidity | 50~56 |

| | |
|---------------------------|--|
| Test Site | Sporton International Inc. Wensan Laboratory. |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 |
| Test Site No. | Sporton Site No. 03CH12-HY (TAF Code: 3786) |
| Test Engineer | Jack Cheng and Wilson Wu |
| Temperature | 20~25 |
| Relative Humidity | 50~60 |
| Remark | The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory. |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find X Plane with Adapter for 5G NR n77, n78; Y Plane with Adapter for EN-DC 13A-n77A, 66A-n78A as worst plane.

| Test Items | NR Band | Bandwidth (MHz) | | | | | | | | | | | | Modulation | | | | | RB # | | | Test Channel | | | | | |
|-----------------------------|---|----------------------|----|----|----|----|----|----|----|----|----|----|-----|------------|------|-------|-------|--------|------|------|------|--------------|---|---|---|---|---|
| | | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | PI/2 BPSK | QPSK | 16QAM | 64QAM | 256QAM | 1 | Half | Full | L | M | H | | | |
| Max. Output Power | n77 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | | |
| | n78 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | v | |
| Peak-to-Average Ratio | n77 | - | - | v | - | | | | | | | | | v | v | v | v | v | | | v | | | v | | | |
| | n78 | Covered by 5G NR n77 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26dB and 99% Bandwidth | n77 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | | | v | | | v | | | |
| | n78 | Covered by 5G NR n77 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Conducted Band Edge | n77 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | v | | v | v | | v | v | | |
| | n78 | Covered by 5G NR n77 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Conducted Spurious Emission | n77 | - | - | v | - | | | | | | | | | | v | | | | | v | | | v | v | v | | |
| | n78 | Covered by 5G NR n77 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency Stability | n77 | - | - | v | - | | | | | | | | | v | | | | | | | v | | | v | | | |
| | n78 | Covered by 5G NR n77 | | | | | | | | | | | | | | | | | | | | | | | | | |
| E.I.R.P | n77 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | | | | | | | | | |
| | n78 | - | - | v | - | v | v | v | v | v | v | v | v | v | v | v | v | v | | | | | | | | | |
| Radiated Spurious Emission | n77 | Worst Case | | | | | | | | | | | | | | | | | | | | | | | v | v | v |
| | n78 | Worst Case | | | | | | | | | | | | | | | | | | | | | | | v | v | v |
| Remark | <ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. Test combination are EN-DC 13A-n77A and EN-DC 66A-n78A. All the radiated test cases were performed with Battery 1X and Sample 2. One representative bandwidth is selected to perform PAR and frequency stability. Wider operating range bandwidth covers narrower one when the power is higher or the same. | | | | | | | | | | | | | | | | | | | | | | | | | | |

2.2 Connection Diagram of Test System

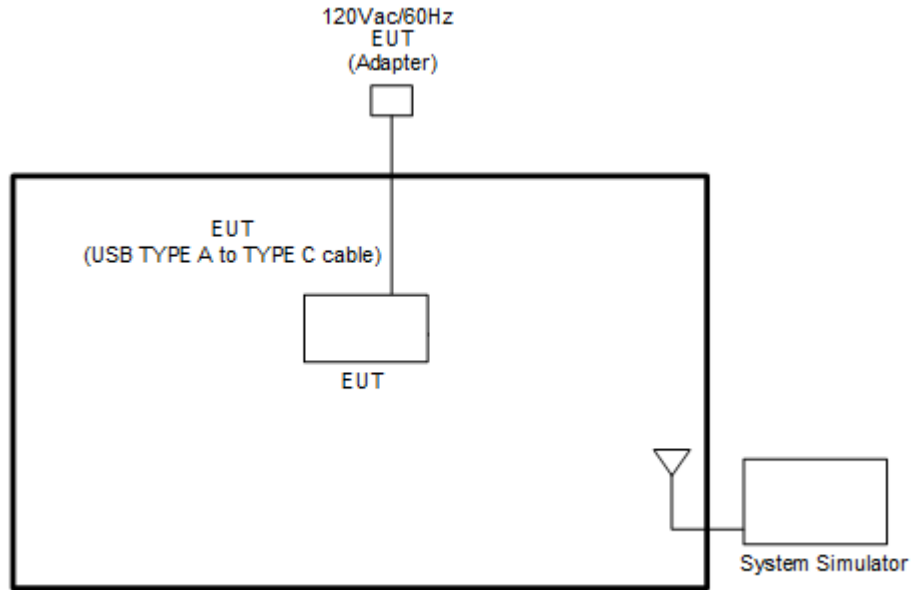

2.3 Support Unit used in test configuration and system

| Item | Equipment | Brand Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|---------------------------|------------|-----------|--------|------------|-------------------|
| 1. | 5G Wireless Test Platform | Anritsu | MT8000A | N/A | N/A | Unshielded, 1.8 m |
| 2. | System Simulator | Anritsu | MT8821C | N/A | N/A | Unshielded, 1.8 m |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

| 5G NR n77 Channel and Frequency List | | | | |
|--------------------------------------|------------------------|---------|---------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 100 | Channel | - | 633334 | - |
| | Frequency | - | 3500.01 | - |
| 90 | Channel | 633000 | 633334 | 633666 |
| | Frequency | 3495 | 3500.01 | 3504.99 |
| 80 | Channel | 632668 | 633334 | 634000 |
| | Frequency | 3490.02 | 3500.01 | 3510 |
| 70 | Channel | 632334 | 633334 | 634332 |
| | Frequency | 3485.01 | 3500.01 | 3514.98 |
| 60 | Channel | 632000 | 633334 | 634666 |
| | Frequency | 3480 | 3500.01 | 3519.99 |
| 50 | Channel | 631668 | 633334 | 635000 |
| | Frequency | 3475.02 | 3500.01 | 3525 |
| 40 | Channel | 631334 | 633334 | 635332 |
| | Frequency | 3470.01 | 3500.01 | 3529.98 |
| 30 | Channel | 631000 | 633334 | 635666 |
| | Frequency | 3465 | 3500.01 | 3534.99 |
| 20 | Channel | 630668 | 633334 | 636000 |
| | Frequency | 3460.02 | 3500.01 | 3540 |



| 5G NR n78 Channel and Frequency List | | | | |
|--------------------------------------|------------------------|---------|---------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 100 | Channel | - | 633334 | - |
| | Frequency | - | 3500.01 | - |
| 90 | Channel | 633000 | 633334 | 633666 |
| | Frequency | 3495 | 3500.01 | 3504.99 |
| 80 | Channel | 632668 | 633334 | 634000 |
| | Frequency | 3490.02 | 3500.01 | 3510 |
| 70 | Channel | 632334 | 633334 | 634332 |
| | Frequency | 3485.01 | 3500.01 | 3514.98 |
| 60 | Channel | 632000 | 633334 | 634666 |
| | Frequency | 3480 | 3500.01 | 3519.99 |
| 50 | Channel | 631668 | 633334 | 635000 |
| | Frequency | 3475.02 | 3500.01 | 3525 |
| 40 | Channel | 631334 | 633334 | 635332 |
| | Frequency | 3470.01 | 3500.01 | 3529.98 |
| 30 | Channel | 631000 | 633334 | 635666 |
| | Frequency | 3465 | 3500.01 | 3534.99 |
| 20 | Channel | 630668 | 633334 | 636000 |
| | Frequency | 3460.02 | 3500.01 | 3540 |

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

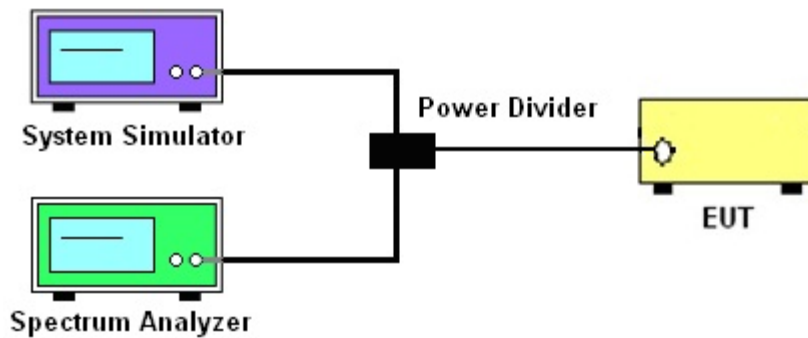

3.1.4 Frequency Stability

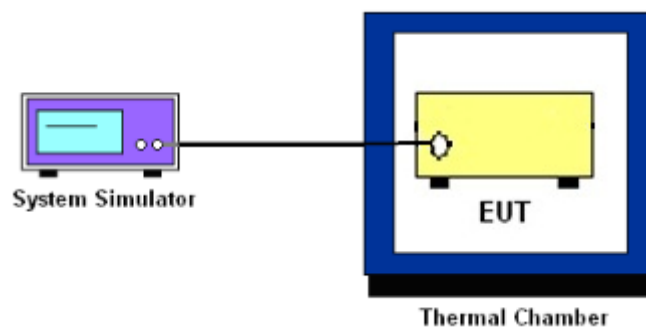

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77 and n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.
5. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.53 (n)(2)

(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For $EBW < 20\text{MHz}$, set $RBW \geq 1\% EBW$ in the 1MHz band immediately outside and adjacent to the band edge.
4. For $EBW \geq 20\text{MHz}$, set $RBW = 200\text{kHz}$ in the 1MHz band immediately outside and adjacent to the band edge.
5. Between 1 ~5 MHz from the band edge, $RBW=500$ kHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz




For radiated test from 30MHz to 1GHz



For radiated test from 1GHz to 18GHz

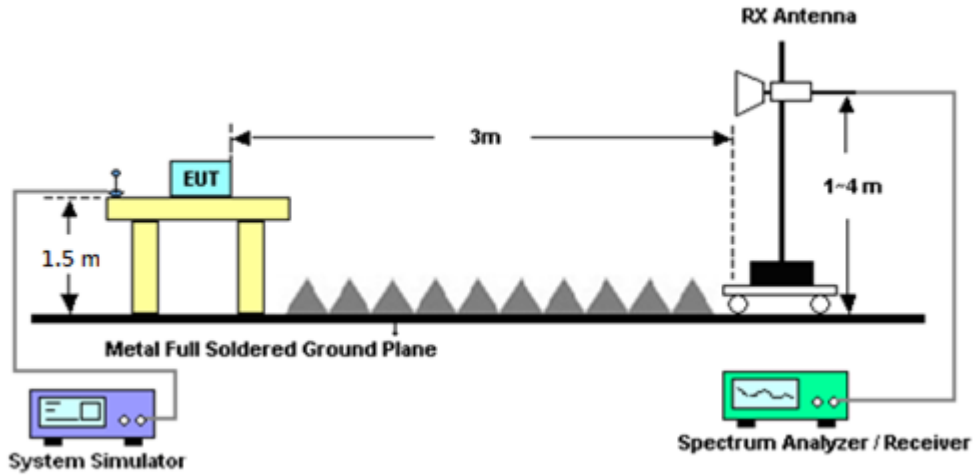

For radiated test above 18GHz

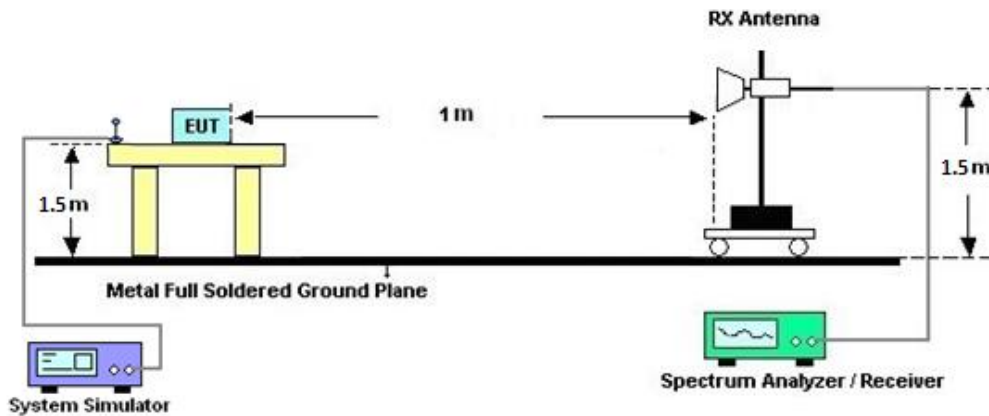

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-------------------------|----------------------------|--------------------------------------|---------------------|----------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100488 | 9 kHz~30 MHz | Sep. 07, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Sep. 06, 2022 | Radiation (03CH12-HY) |
| Bilog Antenna | TESEQ | CBL 6111D & 00800N1D01N -06 | 37059 & 01 | 30MHz~1GHz | Oct. 09, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Oct. 08, 2022 | Radiation (03CH12-HY) |
| Bilog Antenna | TESEQ | CBL 6111D & N-6-06 | 35414 & AT-N0602 | 30MHz~1GHz | Oct. 09, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Oct. 08, 2022 | Radiation (03CH12-HY) |
| Horn Antenna | SCHWARZBE CK | BBHA 9120 D | 9120D-1328 | 1GHz~18GHz | Dec. 03, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Dec. 02, 2022 | Radiation (03CH12-HY) |
| Horn Antenna | SCHWARZBE CK | BBHA 9120 D | 9120D-1212 | 1GHz~18GHz | Mar. 10, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 09, 2023 | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna | SCHWARZBE CK | BBHA 9170 | BBHA91702 51 | 18GHz~40GHz | Nov. 30, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Nov. 29, 2022 | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna | SCHWARZBE CK | BBHA 9170 | BBHA91705 76 | 18GHz~40GHz | May 15, 2021 | Mar. 25, 2022~ May 13, 2022 | May 14, 2022 | Radiation (03CH12-HY) |
| SHF-EHF Horn Antenna | SCHWARZBE CK | BBHA 9170 | BBHA91705 76 | 18GHz~40GHz | May 14, 2022 | May 14, 2022~ Jun. 02, 2022 | May 13, 2023 | Radiation (03CH12-HY) |
| Preamplifier | COM-POWER | PA-103 | 161075 | 10MHz~1GHz | Mar. 23, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 22, 2023 | Radiation (03CH12-HY) |
| Preamplifier | Aglient | 8449B | 3008A02375 | 1GHz~26.5GHz | May 25, 2021 | Mar. 25, 2022~ May 23, 2022 | May 24, 2022 | Radiation (03CH12-HY) |
| Preamplifier | Aglient | 8449B | 3008A02375 | 1GHz~26.5GHz | May 24, 2022 | May 24, 2022~ Jun. 02, 2022 | May 23, 2023 | Radiation (03CH12-HY) |
| Preamplifier | E-INSTRUME NT TECH LTD. | ERA-100M-18 G-56-01-A70 | EC1900270 | 1GHz-18GHz | Dec. 27, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Dec. 26, 2022 | Radiation (03CH12-HY) |
| Preamplifier | EMEC | EM18G40G | 060715 | 18GHz~40GHz | Dec. 24, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Dec. 23, 2022 | Radiation (03CH12-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY53470118 | 10Hz~44GHz | Jan. 12, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Jan. 11, 2023 | Radiation (03CH12-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY9837/4PE | 9kHz~30MHz | Mar. 10, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 09, 2023 | Radiation (03CH12-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 126E | 0058/126E | 30MHz~18GHz | Dec. 10, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Dec. 09, 2022 | Radiation (03CH12-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 505134/2 | 30MHz~40GHz | Feb. 21, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Feb. 20, 2023 | Radiation (03CH12-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 803953/2 | 30MHz~40GHz | Mar. 08, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 07, 2023 | Radiation (03CH12-HY) |
| Filter | Wainwright | WHKX12-1080 -1200-15000-6 0SS | SN1 | 1.2GHz High Pass Filter | Mar. 16, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 15, 2023 | Radiation (03CH12-HY) |
| Filter | Wainwright | WHKX12-2700 -3000-18000-6 0ST | SN2 | 3GHz High Pass Filter | Jul. 12, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Jul. 11, 2022 | Radiation (03CH12-HY) |
| Filter | Wainwright | WLKS1200-12 SS | SN2 | 1.2GHz Low Pass Filter | Mar. 16, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 15, 2023 | Radiation (03CH12-HY) |
| Filter | Wainwright | WHKX8-5872. 5-6750-18000- 40ST | SN2 | 6.75GHz High Pass Filter | Mar. 16, 2022 | Mar. 25, 2022~ Jun. 02, 2022 | Mar. 15, 2023 | Radiation (03CH12-HY) |
| Hygrometer | TECEPEL | DTM-303B | TP140349 | N/A | Sep. 30, 2021 | Mar. 25, 2022~ Jun. 02, 2022 | Sep. 29, 2022 | Radiation (03CH12-HY) |
| Controller | EMEC | EM1000 | N/A | Control Turn table & Ant Mast | N/A | Mar. 25, 2022~ Jun. 02, 2022 | N/A | Radiation (03CH12-HY) |
| Antenna Mast | EMEC | AM-BS-4500-B | N/A | 1m~4m | N/A | Mar. 25, 2022~ Jun. 02, 2022 | N/A | Radiation (03CH12-HY) |
| Turn Table | EMEC | TT2000 | N/A | 0~360 Degree | N/A | Mar. 25, 2022~ Jun. 02, 2022 | N/A | Radiation (03CH12-HY) |
| Software | Audix | E3 6.2009-8-24 | RK-000989 | N/A | N/A | Mar. 25, 2022~ Jun. 02, 2022 | N/A | Radiation (03CH12-HY) |



| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|-----------------|-----------|------------|-----------------|------------------|---------------------------------|---------------|------------------------|
| Programmable Power Supply | GW Instek | PSS-2005 | EL890001 | 50Hz~60Hz | Oct. 06, 2021 | Apr. 08, 2022~ Jul. 26, 2022 | Oct. 05, 2022 | Conducted (TH03-HY) |
| Signal Analyzer | Rohde & Schwarz | FSV3044 | 101049 | 10Hz~44GHz | Aug. 31, 2021 | Apr. 08, 2022~ Jul. 26, 2022 | Aug. 30, 2022 | Conducted (TH03-HY) |
| Temperature Chamber | ESPEC | SH-641 | 92013720 | -40°C ~90°C | Sep. 09, 2021 | Apr. 08, 2022~ Jul. 26, 2022 | Sep. 08, 2022 | Conducted (TH03-HY) |
| Hygrometer | TECPEL | DTM-303B | TP200886 | NA | Mar. 21, 2022 | Apr. 08, 2022~ Jul. 26, 2022 | Mar. 20, 2023 | Conducted (TH03-HY) |
| Base Station (Measure) | Anritsu | MT8821C | 6261849015 | LTE | Ocr. 06, 2021 | Apr. 08, 2022~ Jul. 26, 2022 | Oct. 05, 2022 | Conducted (TH03-HY) |
| Base Station (Measure) | Anritsu | MT8000A | 6261940327 | FR1 | Oct. 29, 2021 | Apr. 08, 2022~ Jul. 26, 2022 | Oct. 28, 2022 | Conducted (TH03-HY) |



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.10 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.39 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.34 dB |
|---|---------|



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 20 | 1 | 1 | PI/2 BPSK | 24.75 | 24.55 | 24.65 | 25.94 | 0.3926 | | |
| 20 | 1 | 49 | | 24.57 | 24.51 | 24.58 | | | | |
| 20 | 25 | 12 | | 24.61 | 24.49 | 24.58 | | | | |
| 20 | 1 | 0 | | 21.28 | 21.01 | 21.11 | | | | |
| 20 | 1 | 50 | | 21.17 | 20.93 | 21.04 | | | | |
| 20 | 50 | 0 | | 24.17 | 23.98 | 24.09 | | | | |
| 20 | 1 | 1 | QPSK | 24.84 | 24.54 | 24.63 | | | 24.75 | 0.2985 |
| 20 | 1 | 49 | | 24.65 | 24.48 | 24.54 | | | | |
| 20 | 25 | 12 | | 24.63 | 24.46 | 24.55 | | | | |
| 20 | 1 | 0 | | 21.26 | 21.02 | 21.01 | | | | |
| 20 | 1 | 50 | | 21.07 | 20.98 | 21.01 | | | | |
| 20 | 50 | 0 | | 23.67 | 23.49 | 23.55 | | | | |
| 20 | 1 | 1 | 16-QAM | 23.60 | 23.48 | 23.65 | 24.75 | 0.2985 | | |
| 20 | 1 | 1 | 64-QAM | 22.24 | 21.92 | 22.23 | | | | |
| 20 | 1 | 1 | 256-QAM | 20.32 | 19.98 | 20.13 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 30 | 1 | 1 | PI/2 BPSK | 24.88 | 24.72 | 24.79 | 25.99 | 0.3972 | | |
| 30 | 1 | 76 | | 24.63 | 24.65 | 24.83 | | | | |
| 30 | 36 | 18 | | 24.68 | 24.59 | 24.77 | | | | |
| 30 | 1 | 0 | | 21.39 | 21.21 | 21.32 | | | | |
| 30 | 1 | 77 | | 21.09 | 21.13 | 21.30 | | | | |
| 30 | 75 | 0 | | 24.22 | 24.15 | 24.30 | | | | |
| 30 | 1 | 1 | QPSK | 24.89 | 24.69 | 24.75 | | | 24.75 | 0.2985 |
| 30 | 1 | 76 | | 24.61 | 24.63 | 24.87 | | | | |
| 30 | 36 | 18 | | 24.87 | 24.62 | 24.71 | | | | |
| 30 | 1 | 0 | | 21.39 | 21.25 | 21.24 | | | | |
| 30 | 1 | 77 | | 21.19 | 21.15 | 21.29 | | | | |
| 30 | 75 | 0 | | 23.74 | 23.63 | 23.76 | | | | |
| 30 | 1 | 1 | 16-QAM | 23.65 | 23.45 | 23.56 | 24.75 | 0.2985 | | |
| 30 | 1 | 1 | 64-QAM | 22.45 | 22.11 | 22.18 | | | | |
| 30 | 1 | 1 | 256-QAM | 20.26 | 20.16 | 20.28 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 40 | 1 | 1 | PI/2 BPSK | 24.94 | 24.70 | 24.76 | 26.04 | 0.4018 | | |
| 40 | 1 | 104 | | 24.73 | 24.74 | 24.86 | | | | |
| 40 | 50 | 25 | | 24.77 | 24.64 | 24.70 | | | | |
| 40 | 1 | 0 | | 21.34 | 21.26 | 21.18 | | | | |
| 40 | 1 | 105 | | 21.28 | 21.25 | 21.33 | | | | |
| 40 | 100 | 0 | | 24.26 | 24.14 | 24.25 | | | | |
| 40 | 1 | 1 | QPSK | 24.92 | 24.75 | 24.74 | | | 24.81 | 0.3027 |
| 40 | 1 | 104 | | 24.68 | 24.77 | 24.75 | | | | |
| 40 | 50 | 25 | | 24.77 | 24.62 | 24.68 | | | | |
| 40 | 1 | 0 | | 21.39 | 21.28 | 21.22 | | | | |
| 40 | 1 | 105 | | 21.22 | 21.30 | 21.29 | | | | |
| 40 | 100 | 0 | | 23.74 | 23.65 | 23.71 | | | | |
| 40 | 1 | 1 | 16-QAM | 23.71 | 23.63 | 23.61 | 24.81 | 0.3027 | | |
| 40 | 1 | 1 | 64-QAM | 23.29 | 22.25 | 22.05 | | | | |
| 40 | 1 | 1 | 256-QAM | 20.38 | 20.14 | 20.19 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 50 | 1 | 1 | PI/2 BPSK | 24.66 | 24.96 | 24.63 | 26.06 | 0.4036 | | |
| 50 | 1 | 131 | | 24.51 | 24.62 | 24.56 | | | | |
| 50 | 64 | 32 | | 24.69 | 24.74 | 24.62 | | | | |
| 50 | 1 | 0 | | 21.13 | 21.39 | 21.14 | | | | |
| 50 | 1 | 132 | | 20.99 | 21.09 | 21.04 | | | | |
| 50 | 128 | 0 | | 24.07 | 24.25 | 24.08 | | | | |
| 50 | 1 | 1 | QPSK | 24.71 | 24.87 | 24.58 | | | 25.17 | 0.3289 |
| 50 | 1 | 131 | | 24.60 | 24.54 | 24.45 | | | | |
| 50 | 64 | 32 | | 24.76 | 24.69 | 24.62 | | | | |
| 50 | 1 | 0 | | 21.26 | 21.36 | 21.03 | | | | |
| 50 | 1 | 132 | | 21.09 | 21.07 | 20.95 | | | | |
| 50 | 128 | 0 | | 23.71 | 23.70 | 23.58 | | | | |
| 50 | 1 | 1 | 16-QAM | 24.07 | 23.90 | 23.69 | 25.17 | 0.3289 | | |
| 50 | 1 | 1 | 64-QAM | 22.30 | 22.55 | 22.23 | | | | |
| 50 | 1 | 1 | 256-QAM | 20.00 | 20.23 | 20.16 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 60 | 1 | 1 | PI/2 BPSK | 24.62 | 24.47 | 24.41 | 25.73 | 0.3741 |
| 60 | 1 | 160 | | 24.36 | 24.42 | 24.41 | | |
| 60 | 81 | 40 | | 24.47 | 24.42 | 24.48 | | |
| 60 | 1 | 0 | | 21.11 | 20.95 | 20.81 | | |
| 60 | 1 | 161 | | 20.86 | 20.89 | 20.93 | | |
| 60 | 162 | 0 | | 23.98 | 23.95 | 23.94 | | |
| 60 | 1 | 1 | QPSK | 24.63 | 24.43 | 24.39 | 25.73 | 0.3741 |
| 60 | 1 | 160 | | 24.31 | 24.36 | 24.44 | | |
| 60 | 81 | 40 | | 24.53 | 24.49 | 24.45 | | |
| 60 | 1 | 0 | | 21.14 | 20.92 | 20.84 | | |
| 60 | 1 | 161 | | 20.84 | 20.92 | 20.86 | | |
| 60 | 162 | 0 | | 23.47 | 23.40 | 23.39 | | |
| 60 | 1 | 1 | 16-QAM | 23.56 | 23.48 | 23.18 | 24.66 | 0.2924 |
| 60 | 1 | 1 | 64-QAM | 22.11 | 21.75 | 22.01 | | |
| 60 | 1 | 1 | 256-QAM | 20.06 | 19.83 | 19.74 | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |

| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 70 | 1 | 1 | PI/2 BPSK | 24.67 | 24.72 | 24.85 | 25.95 | 0.3936 |
| 70 | 1 | 187 | | 24.51 | 24.54 | 24.33 | | |
| 70 | 90 | 45 | | 24.62 | 24.57 | 24.58 | | |
| 70 | 1 | 0 | | 21.19 | 21.20 | 21.35 | | |
| 70 | 1 | 188 | | 21.01 | 21.03 | 20.81 | | |
| 70 | 180 | 0 | | 24.06 | 24.14 | 24.12 | | |
| 70 | 1 | 1 | QPSK | 24.54 | 24.64 | 24.76 | 25.95 | 0.3936 |
| 70 | 1 | 187 | | 24.47 | 24.46 | 24.33 | | |
| 70 | 90 | 45 | | 24.63 | 24.56 | 24.61 | | |
| 70 | 1 | 0 | | 21.09 | 21.21 | 21.27 | | |
| 70 | 1 | 188 | | 20.89 | 21.02 | 20.76 | | |
| 70 | 180 | 0 | | 23.56 | 23.61 | 23.64 | | |
| 70 | 1 | 1 | 16-QAM | 23.72 | 23.89 | 23.92 | 25.02 | 0.3177 |
| 70 | 1 | 1 | 64-QAM | 22.20 | 22.28 | 22.11 | | |
| 70 | 1 | 1 | 256-QAM | 19.69 | 19.97 | 20.03 | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 80 | 1 | 1 | PI/2 BPSK | 24.36 | 24.27 | 24.29 | 25.46 | 0.3516 |
| 80 | 1 | 215 | | 24.25 | 24.28 | 24.24 | | |
| 80 | 108 | 54 | | 24.25 | 24.26 | 24.25 | | |
| 80 | 1 | 0 | | 20.84 | 20.86 | 20.74 | | |
| 80 | 1 | 216 | | 20.69 | 20.74 | 20.72 | | |
| 80 | 216 | 0 | | 23.72 | 23.73 | 23.76 | | |
| 80 | 1 | 1 | QPSK | 24.31 | 24.33 | 24.25 | 24.42 | 0.2767 |
| 80 | 1 | 215 | | 24.19 | 24.26 | 24.23 | | |
| 80 | 108 | 54 | | 24.25 | 24.22 | 24.23 | | |
| 80 | 1 | 0 | | 20.88 | 20.78 | 20.72 | | |
| 80 | 1 | 216 | | 20.71 | 20.74 | 20.77 | | |
| 80 | 216 | 0 | | 23.24 | 23.28 | 23.24 | | |
| 80 | 1 | 1 | 16-QAM | 23.32 | 22.95 | 23.08 | 24.42 | 0.2767 |
| 80 | 1 | 1 | 64-QAM | 21.98 | 21.43 | 21.71 | | |
| 80 | 1 | 1 | 256-QAM | 19.88 | 19.70 | 19.71 | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |

| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 90 | 1 | 1 | PI/2 BPSK | 24.72 | 24.73 | 24.76 | 25.86 | 0.3855 |
| 90 | 1 | 243 | | 24.66 | 24.51 | 24.38 | | |
| 90 | 120 | 60 | | 24.56 | 24.64 | 24.64 | | |
| 90 | 1 | 0 | | 21.17 | 21.14 | 21.23 | | |
| 90 | 1 | 244 | | 21.15 | 21.04 | 20.84 | | |
| 90 | 243 | 0 | | 24.07 | 24.12 | 24.17 | | |
| 90 | 1 | 1 | QPSK | 24.62 | 24.65 | 24.66 | 25.04 | 0.3192 |
| 90 | 1 | 243 | | 24.61 | 24.49 | 24.31 | | |
| 90 | 120 | 60 | | 24.56 | 24.64 | 24.69 | | |
| 90 | 1 | 0 | | 21.14 | 21.18 | 21.19 | | |
| 90 | 1 | 244 | | 21.10 | 20.98 | 20.83 | | |
| 90 | 243 | 0 | | 23.58 | 23.65 | 23.64 | | |
| 90 | 1 | 1 | 16-QAM | 23.67 | 23.94 | 23.82 | 25.04 | 0.3192 |
| 90 | 1 | 1 | 64-QAM | 22.25 | 22.34 | 22.23 | | |
| 90 | 1 | 1 | 256-QAM | 19.80 | 19.94 | - | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n77 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 100 | 1 | 1 | PI/2 BPSK | - | 24.45 | - | 25.55 | 0.3589 |
| 100 | 1 | 271 | | - | 24.36 | - | | |
| 100 | 135 | 67 | | - | 24.25 | - | | |
| 100 | 1 | 0 | | - | 20.89 | - | | |
| 100 | 1 | 272 | | - | 20.84 | - | | |
| 100 | 270 | 0 | | - | 23.74 | - | | |
| 100 | 1 | 1 | QPSK | - | 24.36 | - | 25.55 | 0.3589 |
| 100 | 1 | 271 | | - | 24.34 | - | | |
| 100 | 135 | 67 | | - | 24.23 | - | | |
| 100 | 1 | 0 | | - | 20.89 | - | | |
| 100 | 1 | 272 | | - | 20.83 | - | | |
| 100 | 270 | 0 | | - | 23.21 | - | | |
| 100 | 1 | 1 | 16-QAM | - | 23.44 | - | 24.54 | 0.2844 |
| 100 | 1 | 1 | 64-QAM | - | 21.69 | - | | |
| 100 | 1 | 1 | 256-QAM | - | 19.79 | - | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 20 | 1 | 1 | PI/2 BPSK | 23.76 | 23.54 | 23.62 | 24.86 | 0.3062 |
| 20 | 1 | 49 | | 23.62 | 23.52 | 23.62 | | |
| 20 | 25 | 12 | | 23.65 | 23.48 | 23.56 | | |
| 20 | 1 | 0 | | 20.23 | 20.08 | 20.13 | | |
| 20 | 1 | 50 | | 20.11 | 20.05 | 20.06 | | |
| 20 | 50 | 0 | | 23.19 | 23.02 | 23.11 | | |
| 20 | 1 | 1 | QPSK | 23.75 | 23.45 | 23.62 | 23.68 | 0.2333 |
| 20 | 1 | 49 | | 23.65 | 23.49 | 23.57 | | |
| 20 | 25 | 12 | | 23.64 | 23.52 | 23.52 | | |
| 20 | 1 | 0 | | 20.34 | 20.05 | 20.01 | | |
| 20 | 1 | 50 | | 20.08 | 20.04 | 20.12 | | |
| 20 | 50 | 0 | | 22.71 | 22.45 | 22.58 | | |
| 20 | 1 | 1 | 16-QAM | 22.58 | 22.13 | 22.35 | 23.68 | 0.2333 |
| 20 | 1 | 1 | 64-QAM | 21.32 | 21.38 | 21.14 | | |
| 20 | 1 | 1 | 256-QAM | 19.10 | 19.08 | 18.95 | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |

| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 30 | 1 | 1 | PI/2 BPSK | 23.66 | 23.59 | 23.78 | 24.90 | 0.3090 |
| 30 | 1 | 76 | | 23.63 | 23.58 | 23.75 | | |
| 30 | 36 | 18 | | 23.71 | 23.55 | 23.75 | | |
| 30 | 1 | 0 | | 20.46 | 20.14 | 20.22 | | |
| 30 | 1 | 77 | | 20.15 | 20.06 | 21.23 | | |
| 30 | 75 | 0 | | 23.25 | 23.09 | 23.19 | | |
| 30 | 1 | 1 | QPSK | 23.80 | 23.54 | 23.64 | 23.88 | 0.2443 |
| 30 | 1 | 76 | | 23.65 | 23.55 | 23.64 | | |
| 30 | 36 | 18 | | 23.75 | 23.54 | 23.68 | | |
| 30 | 1 | 0 | | 20.45 | 20.13 | 20.19 | | |
| 30 | 1 | 77 | | 20.14 | 20.09 | 20.26 | | |
| 30 | 75 | 0 | | 22.75 | 22.59 | 22.76 | | |
| 30 | 1 | 1 | 16-QAM | 22.78 | 22.52 | 22.45 | 23.88 | 0.2443 |
| 30 | 1 | 1 | 64-QAM | 21.54 | 21.02 | 21.27 | | |
| 30 | 1 | 1 | 256-QAM | 19.28 | 18.98 | 19.02 | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 40 | 1 | 1 | PI/2 BPSK | 23.61 | 23.65 | 23.69 | 24.97 | 0.3141 | | |
| 40 | 1 | 104 | | 23.74 | 23.69 | 23.73 | | | | |
| 40 | 50 | 25 | | 23.75 | 23.63 | 23.65 | | | | |
| 40 | 1 | 0 | | 20.48 | 20.21 | 20.18 | | | | |
| 40 | 1 | 105 | | 20.27 | 20.26 | 20.23 | | | | |
| 40 | 100 | 0 | | 23.29 | 20.23 | 23.18 | | | | |
| 40 | 1 | 1 | QPSK | 23.87 | 23.64 | 23.65 | | | 23.89 | 0.2449 |
| 40 | 1 | 104 | | 23.63 | 23.75 | 23.72 | | | | |
| 40 | 50 | 25 | | 23.75 | 23.65 | 23.61 | | | | |
| 40 | 1 | 0 | | 20.54 | 20.19 | 20.25 | | | | |
| 40 | 1 | 105 | | 20.35 | 20.21 | 20.22 | | | | |
| 40 | 100 | 0 | | 22.79 | 22.62 | 22.63 | | | | |
| 40 | 1 | 1 | 16-QAM | 22.79 | 22.35 | 22.58 | | | 23.89 | 0.2449 |
| 40 | 1 | 1 | 64-QAM | 21.34 | 21.24 | 21.30 | | | | |
| 40 | 1 | 1 | 256-QAM | 19.34 | 19.21 | 19.07 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 50 | 1 | 1 | PI/2 BPSK | 23.62 | 23.38 | 23.31 | 24.73 | 0.2972 | | |
| 50 | 1 | 131 | | 23.28 | 23.41 | 23.28 | | | | |
| 50 | 64 | 32 | | 23.45 | 23.42 | 23.40 | | | | |
| 50 | 1 | 0 | | 20.15 | 19.92 | 19.87 | | | | |
| 50 | 1 | 132 | | 19.75 | 19.88 | 19.81 | | | | |
| 50 | 128 | 0 | | 23.01 | 22.94 | 22.96 | | | | |
| 50 | 1 | 1 | QPSK | 23.63 | 23.35 | 23.38 | | | 23.64 | 0.2312 |
| 50 | 1 | 131 | | 23.31 | 23.37 | 23.26 | | | | |
| 50 | 64 | 32 | | 23.45 | 23.41 | 23.38 | | | | |
| 50 | 1 | 0 | | 20.05 | 19.85 | 19.86 | | | | |
| 50 | 1 | 132 | | 19.78 | 19.95 | 19.75 | | | | |
| 50 | 128 | 0 | | 22.45 | 22.45 | 22.41 | | | | |
| 50 | 1 | 1 | 16-QAM | 22.54 | 22.21 | 22.24 | | | 23.64 | 0.2312 |
| 50 | 1 | 1 | 64-QAM | 21.15 | 20.98 | 20.76 | | | | |
| 50 | 1 | 1 | 256-QAM | 19.02 | 18.65 | 18.61 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 60 | 1 | 1 | PI/2 BPSK | 23.62 | 23.45 | 23.39 | 24.72 | 0.2965 | | |
| 60 | 1 | 160 | | 23.32 | 23.35 | 23.33 | | | | |
| 60 | 81 | 40 | | 23.49 | 23.40 | 23.46 | | | | |
| 60 | 1 | 0 | | 20.13 | 19.96 | 19.93 | | | | |
| 60 | 1 | 161 | | 19.86 | 19.99 | 19.88 | | | | |
| 60 | 162 | 0 | | 23.01 | 22.93 | 22.96 | | | | |
| 60 | 1 | 1 | QPSK | 23.61 | 23.42 | 23.35 | | | 23.59 | 0.2286 |
| 60 | 1 | 160 | | 23.36 | 22.34 | 23.25 | | | | |
| 60 | 81 | 40 | | 23.45 | 23.44 | 23.46 | | | | |
| 60 | 1 | 0 | | 20.13 | 20.01 | 19.87 | | | | |
| 60 | 1 | 161 | | 19.85 | 19.95 | 19.84 | | | | |
| 60 | 162 | 0 | | 22.54 | 22.41 | 22.48 | | | | |
| 60 | 1 | 1 | 16-QAM | 22.49 | 22.25 | 22.12 | 23.59 | 0.2286 | | |
| 60 | 1 | 1 | 64-QAM | 21.22 | 21.03 | 20.98 | | | | |
| 60 | 1 | 1 | 256-QAM | 18.90 | 18.95 | 18.82 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 70 | 1 | 1 | PI/2 BPSK | 23.52 | 23.35 | 23.48 | 24.62 | 0.2897 | | |
| 70 | 1 | 187 | | 23.17 | 23.24 | 23.36 | | | | |
| 70 | 90 | 45 | | 23.27 | 23.26 | 23.31 | | | | |
| 70 | 1 | 0 | | 20.05 | 19.88 | 18.77 | | | | |
| 70 | 1 | 188 | | 19.75 | 19.76 | 19.95 | | | | |
| 70 | 180 | 0 | | 22.78 | 22.81 | 22.85 | | | | |
| 70 | 1 | 1 | QPSK | 23.49 | 23.32 | 23.26 | | | 23.51 | 0.2244 |
| 70 | 1 | 187 | | 23.13 | 23.24 | 23.28 | | | | |
| 70 | 90 | 45 | | 23.28 | 23.27 | 23.34 | | | | |
| 70 | 1 | 0 | | 20.02 | 19.81 | 19.80 | | | | |
| 70 | 1 | 188 | | 19.64 | 19.77 | 19.85 | | | | |
| 70 | 180 | 0 | | 22.28 | 22.29 | 22.38 | | | | |
| 70 | 1 | 1 | 16-QAM | 22.41 | 22.24 | 22.08 | 23.51 | 0.2244 | | |
| 70 | 1 | 1 | 64-QAM | 21.08 | 20.95 | 20.74 | | | | |
| 70 | 1 | 1 | 256-QAM | 18.96 | 18.68 | 18.65 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 80 | 1 | 1 | PI/2 BPSK | 23.48 | 23.34 | 23.25 | 24.58 | 0.2871 | | |
| 80 | 1 | 215 | | 23.27 | 23.31 | 23.33 | | | | |
| 80 | 108 | 54 | | 23.31 | 23.26 | 23.25 | | | | |
| 80 | 1 | 0 | | 19.92 | 19.83 | 19.85 | | | | |
| 80 | 1 | 216 | | 19.84 | 19.78 | 19.81 | | | | |
| 80 | 216 | 0 | | 22.84 | 22.82 | 22.81 | | | | |
| 80 | 1 | 1 | QPSK | 23.36 | 23.34 | 23.25 | | | 23.29 | 0.2133 |
| 80 | 1 | 215 | | 23.17 | 23.24 | 23.21 | | | | |
| 80 | 108 | 54 | | 23.31 | 23.25 | 23.31 | | | | |
| 80 | 1 | 0 | | 19.94 | 19.85 | 19.76 | | | | |
| 80 | 1 | 216 | | 19.81 | 19.98 | 19.79 | | | | |
| 80 | 216 | 0 | | 22.35 | 22.31 | 22.35 | | | | |
| 80 | 1 | 1 | 16-QAM | 22.16 | 22.19 | 22.04 | 23.29 | 0.2133 | | |
| 80 | 1 | 1 | 64-QAM | 20.85 | 20.87 | 20.84 | | | | |
| 80 | 1 | 1 | 256-QAM | 18.86 | 18.75 | 18.82 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 90 | 1 | 1 | PI/2 BPSK | 23.45 | 23.36 | 23.28 | 24.55 | 0.2851 | | |
| 90 | 1 | 243 | | 23.23 | 23.33 | 23.41 | | | | |
| 90 | 120 | 60 | | 23.21 | 23.31 | 23.36 | | | | |
| 90 | 1 | 0 | | 19.95 | 19.86 | 19.84 | | | | |
| 90 | 1 | 244 | | 19.75 | 19.84 | 19.93 | | | | |
| 90 | 243 | 0 | | 22.77 | 22.79 | 22.88 | | | | |
| 90 | 1 | 1 | QPSK | 23.35 | 23.36 | 23.24 | | | 23.48 | 0.2228 |
| 90 | 1 | 243 | | 23.25 | 23.34 | 23.35 | | | | |
| 90 | 120 | 60 | | 23.22 | 23.27 | 23.34 | | | | |
| 90 | 1 | 0 | | 19.98 | 19.85 | 19.83 | | | | |
| 90 | 1 | 244 | | 19.76 | 19.83 | 19.94 | | | | |
| 90 | 243 | 0 | | 22.32 | 22.35 | 22.39 | | | | |
| 90 | 1 | 1 | 16-QAM | 22.38 | 22.24 | 22.12 | 23.48 | 0.2228 | | |
| 90 | 1 | 1 | 64-QAM | 21.08 | 20.79 | 20.70 | | | | |
| 90 | 1 | 1 | 256-QAM | 18.91 | 18.63 | 18.65 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|---|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 100 | 1 | 1 | PI/2 BPSK | - | 23.41 | - | 24.51 | 0.2825 |
| 100 | 1 | 271 | | - | 23.38 | - | | |
| 100 | 135 | 67 | | - | 23.35 | - | | |
| 100 | 1 | 0 | | - | 19.91 | - | | |
| 100 | 1 | 272 | | - | 19.85 | - | | |
| 100 | 270 | 0 | | - | 22.81 | - | | |
| 100 | 1 | 1 | QPSK | - | 23.33 | - | 23.31 | 0.2143 |
| 100 | 1 | 271 | | - | 23.36 | - | | |
| 100 | 135 | 67 | | - | 23.32 | - | | |
| 100 | 1 | 0 | | - | 19.93 | - | | |
| 100 | 1 | 272 | | - | 19.85 | - | | |
| 100 | 270 | 0 | | - | 22.35 | - | | |
| 100 | 1 | 1 | 16-QAM | - | 22.21 | - | 23.31 | 0.2143 |
| 100 | 1 | 1 | 64-QAM | - | 21.01 | - | | |
| 100 | 1 | 1 | 256-QAM | - | 18.72 | - | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 20 | 1 | 1 | PI/2 BPSK | 26.25 | 26.17 | 26.12 | 27.35 | 0.5433 | | |
| 20 | 1 | 49 | | 26.08 | 25.89 | 25.94 | | | | |
| 20 | 25 | 12 | | 26.01 | 25.98 | 26.02 | | | | |
| 20 | 1 | 0 | | 22.71 | 22.59 | 22.65 | | | | |
| 20 | 1 | 50 | | 22.57 | 22.32 | 22.38 | | | | |
| 20 | 50 | 0 | | 25.52 | 25.38 | 25.50 | | | | |
| 20 | 1 | 1 | QPSK | 26.19 | 26.08 | 26.04 | | | 26.47 | 0.4436 |
| 20 | 1 | 49 | | 26.02 | 25.83 | 25.86 | | | | |
| 20 | 25 | 12 | | 25.99 | 25.87 | 25.98 | | | | |
| 20 | 1 | 0 | | 22.64 | 22.57 | 22.63 | | | | |
| 20 | 1 | 50 | | 22.52 | 22.29 | 22.36 | | | | |
| 20 | 50 | 0 | | 25.04 | 24.98 | 24.99 | | | | |
| 20 | 1 | 1 | 16-QAM | 25.37 | 25.22 | 25.34 | 26.47 | 0.4436 | | |
| 20 | 1 | 1 | 64-QAM | 23.86 | 23.69 | 23.77 | | | | |
| 20 | 1 | 1 | 256-QAM | 21.43 | 21.28 | 21.36 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 30 | 1 | 1 | PI/2 BPSK | 26.29 | 26.38 | 26.35 | 27.48 | 0.5598 | | |
| 30 | 1 | 76 | | 26.21 | 26.01 | 26.22 | | | | |
| 30 | 36 | 18 | | 26.12 | 26.09 | 26.16 | | | | |
| 30 | 1 | 0 | | 22.83 | 22.84 | 22.77 | | | | |
| 30 | 1 | 77 | | 22.67 | 22.51 | 22.62 | | | | |
| 30 | 75 | 0 | | 25.65 | 25.62 | 25.68 | | | | |
| 30 | 1 | 1 | QPSK | 26.25 | 26.32 | 26.31 | | | 26.57 | 0.4539 |
| 30 | 1 | 76 | | 26.19 | 25.98 | 26.16 | | | | |
| 30 | 36 | 18 | | 26.09 | 26.06 | 26.13 | | | | |
| 30 | 1 | 0 | | 22.80 | 22.82 | 22.71 | | | | |
| 30 | 1 | 77 | | 22.65 | 22.48 | 22.59 | | | | |
| 30 | 75 | 0 | | 25.15 | 25.10 | 25.17 | | | | |
| 30 | 1 | 1 | 16-QAM | 25.44 | 25.47 | 25.45 | 26.57 | 0.4539 | | |
| 30 | 1 | 1 | 64-QAM | 23.92 | 23.94 | 23.91 | | | | |
| 30 | 1 | 1 | 256-QAM | 21.51 | 21.58 | 21.55 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 40 | 1 | 1 | PI/2 BPSK | 26.49 | 26.39 | 26.15 | 27.59 | 0.5741 | | |
| 40 | 1 | 104 | | 26.46 | 26.13 | 26.35 | | | | |
| 40 | 50 | 25 | | 26.36 | 26.17 | 26.19 | | | | |
| 40 | 1 | 0 | | 23.04 | 22.96 | 22.81 | | | | |
| 40 | 1 | 105 | | 22.98 | 22.69 | 22.87 | | | | |
| 40 | 100 | 0 | | 25.92 | 25.72 | 25.70 | | | | |
| 40 | 1 | 1 | QPSK | 26.45 | 26.33 | 26.04 | | | 26.79 | 0.4775 |
| 40 | 1 | 104 | | 26.42 | 26.11 | 26.26 | | | | |
| 40 | 50 | 25 | | 26.33 | 26.15 | 26.16 | | | | |
| 40 | 1 | 0 | | 23.02 | 22.87 | 22.73 | | | | |
| 40 | 1 | 105 | | 22.90 | 22.63 | 22.79 | | | | |
| 40 | 100 | 0 | | 25.42 | 25.24 | 25.18 | | | | |
| 40 | 1 | 1 | 16-QAM | 25.69 | 25.43 | 25.21 | 26.79 | 0.4775 | | |
| 40 | 1 | 1 | 64-QAM | 24.13 | 24.06 | 23.84 | | | | |
| 40 | 1 | 1 | 256-QAM | 21.67 | 21.64 | 21.59 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 50 | 1 | 1 | PI/2 BPSK | 26.11 | 25.91 | 25.94 | 27.21 | 0.5260 | | |
| 50 | 1 | 131 | | 25.85 | 25.59 | 25.66 | | | | |
| 50 | 64 | 32 | | 25.91 | 25.89 | 25.72 | | | | |
| 50 | 1 | 0 | | 22.56 | 22.51 | 22.51 | | | | |
| 50 | 1 | 132 | | 22.30 | 22.39 | 22.35 | | | | |
| 50 | 128 | 0 | | 25.42 | 25.40 | 25.23 | | | | |
| 50 | 1 | 1 | QPSK | 26.08 | 25.84 | 25.81 | | | 26.42 | 0.4385 |
| 50 | 1 | 131 | | 25.81 | 25.62 | 25.64 | | | | |
| 50 | 64 | 32 | | 25.89 | 25.92 | 25.71 | | | | |
| 50 | 1 | 0 | | 22.55 | 22.45 | 22.41 | | | | |
| 50 | 1 | 132 | | 22.26 | 22.35 | 22.21 | | | | |
| 50 | 128 | 0 | | 24.89 | 24.87 | 24.73 | | | | |
| 50 | 1 | 1 | 16-QAM | 25.32 | 25.16 | 24.95 | 26.42 | 0.4385 | | |
| 50 | 1 | 1 | 64-QAM | 23.74 | 23.49 | 23.52 | | | | |
| 50 | 1 | 1 | 256-QAM | 21.27 | 21.07 | 21.01 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 60 | 1 | 1 | PI/2 BPSK | 26.12 | 25.87 | 26.06 | 27.24 | 0.5297 | | |
| 60 | 1 | 160 | | 25.84 | 25.75 | 25.87 | | | | |
| 60 | 81 | 40 | | 26.04 | 25.96 | 25.82 | | | | |
| 60 | 1 | 0 | | 22.73 | 22.47 | 22.64 | | | | |
| 60 | 1 | 161 | | 22.36 | 22.33 | 22.36 | | | | |
| 60 | 162 | 0 | | 25.54 | 25.43 | 25.33 | | | | |
| 60 | 1 | 1 | QPSK | 26.14 | 25.82 | 26.01 | | | 26.34 | 0.4305 |
| 60 | 1 | 160 | | 25.81 | 25.74 | 25.77 | | | | |
| 60 | 81 | 40 | | 26.03 | 25.91 | 25.85 | | | | |
| 60 | 1 | 0 | | 22.61 | 22.32 | 22.45 | | | | |
| 60 | 1 | 161 | | 22.34 | 22.28 | 22.28 | | | | |
| 60 | 162 | 0 | | 25.02 | 24.91 | 24.90 | | | | |
| 60 | 1 | 1 | 16-QAM | 25.24 | 24.94 | 25.12 | 26.34 | 0.4305 | | |
| 60 | 1 | 1 | 64-QAM | 23.61 | 23.47 | 23.79 | | | | |
| 60 | 1 | 1 | 256-QAM | 21.32 | 20.98 | 21.21 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 70 | 1 | 1 | PI/2 BPSK | 25.98 | 26.03 | 26.11 | 27.21 | 0.5260 | | |
| 70 | 1 | 187 | | 25.39 | 25.57 | 25.51 | | | | |
| 70 | 90 | 45 | | 25.73 | 25.79 | 25.74 | | | | |
| 70 | 1 | 0 | | 22.57 | 22.50 | 22.58 | | | | |
| 70 | 1 | 188 | | 21.85 | 21.99 | 21.98 | | | | |
| 70 | 180 | 0 | | 25.21 | 25.32 | 25.33 | | | | |
| 70 | 1 | 1 | QPSK | 25.92 | 26.02 | 26.06 | | | 26.35 | 0.4315 |
| 70 | 1 | 187 | | 25.33 | 25.49 | 25.46 | | | | |
| 70 | 90 | 45 | | 25.68 | 25.77 | 25.71 | | | | |
| 70 | 1 | 0 | | 22.49 | 22.48 | 22.56 | | | | |
| 70 | 1 | 188 | | 21.81 | 21.96 | 21.92 | | | | |
| 70 | 180 | 0 | | 24.70 | 24.84 | 24.79 | | | | |
| 70 | 1 | 1 | 16-QAM | 25.11 | 25.20 | 25.25 | 26.35 | 0.4315 | | |
| 70 | 1 | 1 | 64-QAM | 23.57 | 23.67 | 23.69 | | | | |
| 70 | 1 | 1 | 256-QAM | 21.23 | 21.24 | 21.27 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 80 | 1 | 1 | PI/2 BPSK | 26.03 | 25.84 | 25.90 | 27.13 | 0.5164 | | |
| 80 | 1 | 215 | | 25.80 | 25.75 | 25.79 | | | | |
| 80 | 108 | 54 | | 25.87 | 25.83 | 25.81 | | | | |
| 80 | 1 | 0 | | 22.49 | 22.37 | 22.42 | | | | |
| 80 | 1 | 216 | | 22.37 | 22.22 | 22.29 | | | | |
| 80 | 216 | 0 | | 25.34 | 25.36 | 25.37 | | | | |
| 80 | 1 | 1 | QPSK | 25.87 | 25.77 | 25.76 | | | 26.06 | 0.4036 |
| 80 | 1 | 215 | | 22.33 | 25.69 | 25.71 | | | | |
| 80 | 108 | 54 | | 25.89 | 25.87 | 25.82 | | | | |
| 80 | 1 | 0 | | 22.37 | 22.34 | 22.39 | | | | |
| 80 | 1 | 216 | | 22.28 | 22.24 | 22.27 | | | | |
| 80 | 216 | 0 | | 24.86 | 24.84 | 24.82 | | | | |
| 80 | 1 | 1 | 16-QAM | 24.96 | 24.86 | 24.95 | 26.06 | 0.4036 | | |
| 80 | 1 | 1 | 64-QAM | 23.55 | 23.49 | 23.51 | | | | |
| 80 | 1 | 1 | 256-QAM | 21.01 | 20.92 | 21.15 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 90 | 1 | 1 | PI/2 BPSK | 25.95 | 25.87 | 25.86 | 27.05 | 0.5070 | | |
| 90 | 1 | 243 | | 25.85 | 25.80 | 25.83 | | | | |
| 90 | 120 | 60 | | 25.91 | 25.84 | 25.95 | | | | |
| 90 | 1 | 0 | | 22.49 | 22.38 | 22.47 | | | | |
| 90 | 1 | 244 | | 22.44 | 22.34 | 22.39 | | | | |
| 90 | 243 | 0 | | 25.36 | 25.32 | 25.43 | | | | |
| 90 | 1 | 1 | QPSK | 25.87 | 25.82 | 25.81 | | | 26.03 | 0.4009 |
| 90 | 1 | 243 | | 25.80 | 25.74 | 25.79 | | | | |
| 90 | 120 | 60 | | 25.89 | 25.87 | 25.93 | | | | |
| 90 | 1 | 0 | | 22.43 | 22.32 | 22.36 | | | | |
| 90 | 1 | 244 | | 22.36 | 22.27 | 22.35 | | | | |
| 90 | 243 | 0 | | 24.87 | 24.85 | 24.91 | | | | |
| 90 | 1 | 1 | 16-QAM | 24.88 | 24.93 | 24.86 | 26.03 | 0.4009 | | |
| 90 | 1 | 1 | 64-QAM | 23.64 | 23.60 | 23.48 | | | | |
| 90 | 1 | 1 | 256-QAM | 21.02 | 20.97 | 21.03 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n77 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 100 | 1 | 1 | PI/2 BPSK | - | 26.12 | - | 27.22 | 0.5272 |
| 100 | 1 | 271 | | - | 25.51 | - | | |
| 100 | 135 | 67 | | - | 25.85 | - | | |
| 100 | 1 | 0 | | - | 22.52 | - | | |
| 100 | 1 | 272 | | - | 21.97 | - | | |
| 100 | 270 | 0 | | - | 25.30 | - | | |
| 100 | 1 | 1 | QPSK | - | 26.06 | - | | |
| 100 | 1 | 271 | | - | 25.48 | - | | |
| 100 | 135 | 67 | | - | 25.83 | - | | |
| 100 | 1 | 0 | | - | 22.50 | - | | |
| 100 | 1 | 272 | | - | 21.95 | - | | |
| 100 | 270 | 0 | | - | 24.80 | - | | |
| 100 | 1 | 1 | 16-QAM | - | 25.22 | - | 26.32 | 0.4285 |
| 100 | 1 | 1 | 64-QAM | - | 23.71 | - | | |
| 100 | 1 | 1 | 256-QAM | - | 21.28 | - | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 20 | 1 | 1 | PI/2 BPSK | 26.37 | 26.17 | 26.15 | 27.47 | 0.5585 | | |
| 20 | 1 | 49 | | 26.16 | 26.00 | 25.95 | | | | |
| 20 | 25 | 12 | | 26.19 | 25.94 | 25.99 | | | | |
| 20 | 1 | 0 | | 22.86 | 22.61 | 22.62 | | | | |
| 20 | 1 | 50 | | 22.65 | 22.41 | 22.38 | | | | |
| 20 | 50 | 0 | | 25.68 | 25.50 | 25.47 | | | | |
| 20 | 1 | 1 | QPSK | 26.32 | 26.09 | 26.07 | | | 26.61 | 0.4581 |
| 20 | 1 | 49 | | 26.10 | 25.94 | 25.90 | | | | |
| 20 | 25 | 12 | | 26.13 | 25.91 | 25.97 | | | | |
| 20 | 1 | 0 | | 22.81 | 22.60 | 22.55 | | | | |
| 20 | 1 | 50 | | 22.59 | 22.38 | 22.34 | | | | |
| 20 | 50 | 0 | | 25.17 | 24.99 | 24.97 | | | | |
| 20 | 1 | 1 | 16-QAM | 25.51 | 25.29 | 25.20 | 26.61 | 0.4581 | | |
| 20 | 1 | 1 | 64-QAM | 23.95 | 23.71 | 23.67 | | | | |
| 20 | 1 | 1 | 256-QAM | 21.49 | 21.35 | 21.28 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 30 | 1 | 1 | PI/2 BPSK | 26.47 | 26.53 | 26.45 | 27.63 | 0.5794 | | |
| 30 | 1 | 76 | | 26.34 | 26.22 | 26.21 | | | | |
| 30 | 36 | 18 | | 26.37 | 26.24 | 26.29 | | | | |
| 30 | 1 | 0 | | 22.96 | 23.00 | 22.90 | | | | |
| 30 | 1 | 77 | | 22.81 | 22.66 | 22.67 | | | | |
| 30 | 75 | 0 | | 25.83 | 25.77 | 25.80 | | | | |
| 30 | 1 | 1 | QPSK | 26.42 | 26.48 | 26.38 | | | 26.73 | 0.4710 |
| 30 | 1 | 76 | | 26.27 | 26.17 | 26.15 | | | | |
| 30 | 36 | 18 | | 26.32 | 26.22 | 26.27 | | | | |
| 30 | 1 | 0 | | 22.93 | 22.96 | 22.86 | | | | |
| 30 | 1 | 77 | | 22.77 | 22.63 | 22.61 | | | | |
| 30 | 75 | 0 | | 25.36 | 25.23 | 25.26 | | | | |
| 30 | 1 | 1 | 16-QAM | 25.60 | 25.63 | 25.47 | 26.73 | 0.4710 | | |
| 30 | 1 | 1 | 64-QAM | 24.03 | 24.05 | 24.01 | | | | |
| 30 | 1 | 1 | 256-QAM | 21.67 | 21.68 | 21.57 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 40 | 1 | 1 | PI/2 BPSK | 26.64 | 26.54 | 26.36 | 27.74 | 0.5943 | | |
| 40 | 1 | 104 | | 26.57 | 26.32 | 26.38 | | | | |
| 40 | 50 | 25 | | 26.49 | 26.36 | 26.30 | | | | |
| 40 | 1 | 0 | | 23.23 | 23.10 | 22.95 | | | | |
| 40 | 1 | 105 | | 23.14 | 22.79 | 22.84 | | | | |
| 40 | 100 | 0 | | 26.09 | 25.83 | 25.86 | | | | |
| 40 | 1 | 1 | QPSK | 26.61 | 26.52 | 26.23 | | | 26.77 | 0.4753 |
| 40 | 1 | 104 | | 26.52 | 26.26 | 26.31 | | | | |
| 40 | 50 | 25 | | 26.47 | 26.32 | 26.29 | | | | |
| 40 | 1 | 0 | | 23.20 | 23.06 | 22.91 | | | | |
| 40 | 1 | 105 | | 23.07 | 22.75 | 22.80 | | | | |
| 40 | 100 | 0 | | 25.56 | 25.38 | 25.36 | | | | |
| 40 | 1 | 1 | 16-QAM | 25.67 | 25.60 | 25.44 | 26.77 | 0.4753 | | |
| 40 | 1 | 1 | 64-QAM | 24.32 | 24.26 | 24.11 | | | | |
| 40 | 1 | 1 | 256-QAM | 21.86 | 21.67 | 21.53 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 50 | 1 | 1 | PI/2 BPSK | 26.00 | 25.91 | 25.79 | 27.15 | 0.5188 | | |
| 50 | 1 | 131 | | 25.89 | 25.67 | 25.65 | | | | |
| 50 | 64 | 32 | | 26.05 | 25.96 | 25.71 | | | | |
| 50 | 1 | 0 | | 22.60 | 22.45 | 22.24 | | | | |
| 50 | 1 | 132 | | 22.31 | 22.25 | 22.08 | | | | |
| 50 | 128 | 0 | | 25.54 | 25.42 | 25.23 | | | | |
| 50 | 1 | 1 | QPSK | 25.92 | 25.88 | 25.76 | | | 26.31 | 0.4276 |
| 50 | 1 | 131 | | 25.83 | 25.62 | 25.61 | | | | |
| 50 | 64 | 32 | | 26.03 | 25.93 | 25.68 | | | | |
| 50 | 1 | 0 | | 22.51 | 22.42 | 22.16 | | | | |
| 50 | 1 | 132 | | 22.29 | 22.13 | 22.01 | | | | |
| 50 | 128 | 0 | | 25.00 | 24.92 | 24.71 | | | | |
| 50 | 1 | 1 | 16-QAM | 25.21 | 24.97 | 24.99 | 26.31 | 0.4276 | | |
| 50 | 1 | 1 | 64-QAM | 23.75 | 23.63 | 23.45 | | | | |
| 50 | 1 | 1 | 256-QAM | 21.26 | 21.08 | 20.91 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 60 | 1 | 1 | PI/2 BPSK | 26.28 | 25.94 | 26.15 | 27.38 | 0.5470 | | |
| 60 | 1 | 160 | | 25.86 | 25.69 | 25.81 | | | | |
| 60 | 81 | 40 | | 26.14 | 25.98 | 25.88 | | | | |
| 60 | 1 | 0 | | 22.85 | 22.64 | 22.64 | | | | |
| 60 | 1 | 161 | | 22.42 | 22.29 | 22.31 | | | | |
| 60 | 162 | 0 | | 22.70 | 25.45 | 25.43 | | | | |
| 60 | 1 | 1 | QPSK | 26.23 | 25.94 | 26.07 | | | 26.42 | 0.4385 |
| 60 | 1 | 160 | | 25.83 | 25.72 | 25.74 | | | | |
| 60 | 81 | 40 | | 26.14 | 25.97 | 25.85 | | | | |
| 60 | 1 | 0 | | 22.72 | 22.48 | 22.61 | | | | |
| 60 | 1 | 161 | | 22.39 | 22.28 | 22.25 | | | | |
| 60 | 162 | 0 | | 25.18 | 24.92 | 24.94 | | | | |
| 60 | 1 | 1 | 16-QAM | 25.32 | 25.05 | 25.17 | 26.42 | 0.4385 | | |
| 60 | 1 | 1 | 64-QAM | 23.96 | 23.73 | 23.81 | | | | |
| 60 | 1 | 1 | 256-QAM | 21.46 | 21.17 | 21.24 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 70 | 1 | 1 | PI/2 BPSK | 26.23 | 26.17 | 26.21 | 27.33 | 0.5408 | | |
| 70 | 1 | 187 | | 25.47 | 25.48 | 25.46 | | | | |
| 70 | 90 | 45 | | 25.83 | 25.89 | 25.84 | | | | |
| 70 | 1 | 0 | | 22.70 | 22.63 | 22.67 | | | | |
| 70 | 1 | 188 | | 21.93 | 22.00 | 21.95 | | | | |
| 70 | 180 | 0 | | 25.35 | 25.39 | 25.37 | | | | |
| 70 | 1 | 1 | QPSK | 26.15 | 26.10 | 26.14 | | | 26.39 | 0.4355 |
| 70 | 1 | 187 | | 25.42 | 25.44 | 25.41 | | | | |
| 70 | 90 | 45 | | 25.81 | 25.86 | 25.82 | | | | |
| 70 | 1 | 0 | | 22.65 | 22.59 | 22.64 | | | | |
| 70 | 1 | 188 | | 21.90 | 21.97 | 21.89 | | | | |
| 70 | 180 | 0 | | 24.82 | 24.94 | 24.86 | | | | |
| 70 | 1 | 1 | 16-QAM | 25.29 | 25.25 | 25.11 | 26.39 | 0.4355 | | |
| 70 | 1 | 1 | 64-QAM | 23.70 | 23.78 | 23.62 | | | | |
| 70 | 1 | 1 | 256-QAM | 21.42 | 21.37 | 21.46 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 80 | 1 | 1 | PI/2 BPSK | 26.08 | 25.93 | 25.96 | 27.18 | 0.5224 | | |
| 80 | 1 | 215 | | 25.71 | 25.74 | 25.76 | | | | |
| 80 | 108 | 54 | | 25.97 | 25.95 | 25.95 | | | | |
| 80 | 1 | 0 | | 22.68 | 22.46 | 22.54 | | | | |
| 80 | 1 | 216 | | 22.43 | 22.38 | 22.33 | | | | |
| 80 | 216 | 0 | | 25.41 | 25.45 | 25.48 | | | | |
| 80 | 1 | 1 | QPSK | 26.04 | 25.88 | 25.92 | | | 26.19 | 0.4159 |
| 80 | 1 | 215 | | 25.74 | 25.71 | 25.71 | | | | |
| 80 | 108 | 54 | | 25.94 | 25.92 | 25.87 | | | | |
| 80 | 1 | 0 | | 22.55 | 22.42 | 22.39 | | | | |
| 80 | 1 | 216 | | 22.27 | 22.24 | 22.21 | | | | |
| 80 | 216 | 0 | | 24.96 | 24.93 | 24.95 | | | | |
| 80 | 1 | 1 | 16-QAM | 25.09 | 24.92 | 24.95 | 26.19 | 0.4159 | | |
| 80 | 1 | 1 | 64-QAM | 23.85 | 23.54 | 23.55 | | | | |
| 80 | 1 | 1 | 256-QAM | 21.21 | 21.03 | 21.07 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |

| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|-------|--------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) | | |
| 90 | 1 | 1 | PI/2 BPSK | 26.07 | 25.95 | 25.96 | 27.17 | 0.5212 | | |
| 90 | 1 | 243 | | 25.87 | 25.84 | 25.82 | | | | |
| 90 | 120 | 60 | | 25.96 | 25.94 | 26.01 | | | | |
| 90 | 1 | 0 | | 22.69 | 22.47 | 22.52 | | | | |
| 90 | 1 | 244 | | 22.39 | 22.37 | 22.30 | | | | |
| 90 | 243 | 0 | | 25.47 | 25.39 | 25.53 | | | | |
| 90 | 1 | 1 | QPSK | 26.04 | 25.85 | 25.89 | | | 26.15 | 0.4121 |
| 90 | 1 | 243 | | 25.78 | 25.78 | 25.72 | | | | |
| 90 | 120 | 60 | | 25.99 | 25.97 | 26.03 | | | | |
| 90 | 1 | 0 | | 22.51 | 22.41 | 22.37 | | | | |
| 90 | 1 | 244 | | 22.30 | 22.28 | 22.27 | | | | |
| 90 | 243 | 0 | | 24.97 | 24.93 | 25.00 | | | | |
| 90 | 1 | 1 | 16-QAM | 25.04 | 25.05 | 24.99 | 26.15 | 0.4121 | | |
| 90 | 1 | 1 | 64-QAM | 23.78 | 23.74 | 23.71 | | | | |
| 90 | 1 | 1 | 256-QAM | 21.18 | 21.03 | 21.02 | | | | |
| Limit | EIRP < 1W | | | Result | | | Pass | | | |



| NR n78 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.1 dB) | | | | | | | | |
|--|-----------|-----------|-----------|--------|--------|---------|------------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest | EIRP (dBm) | EIRP(W) |
| 100 | 1 | 1 | PI/2 BPSK | - | 26.31 | - | 27.41 | 0.5508 |
| 100 | 1 | 271 | | - | 25.45 | - | | |
| 100 | 135 | 67 | | - | 25.95 | - | | |
| 100 | 1 | 0 | | - | 22.78 | - | | |
| 100 | 1 | 272 | | - | 21.93 | - | | |
| 100 | 270 | 0 | | - | 25.40 | - | | |
| 100 | 1 | 1 | QPSK | - | 26.27 | - | 27.41 | 0.5508 |
| 100 | 1 | 271 | | - | 25.42 | - | | |
| 100 | 135 | 67 | | - | 25.94 | - | | |
| 100 | 1 | 0 | | - | 22.71 | - | | |
| 100 | 1 | 272 | | - | 21.90 | - | | |
| 100 | 270 | 0 | | - | 24.91 | - | | |
| 100 | 1 | 1 | 16-QAM | - | 25.42 | - | 26.52 | 0.4487 |
| 100 | 1 | 1 | 64-QAM | - | 23.86 | - | | |
| 100 | 1 | 1 | 256-QAM | - | 21.47 | - | | |
| Limit | EIRP < 1W | | | Result | | | Pass | |



FR1 n77

Peak-to-Average Ratio



| Mode | FR1 n77 / 20MHz / DFT-S OFDM | | | | |
|-----------|------------------------------|---------|---------|---------|-------------|
| Mod. | PI/2 BPSK | QPSK | 16QAM | 64QAM | Limit: 13dB |
| RB Size | Full RB | Full RB | Full RB | Full RB | Result |
| Middle CH | 3.98 | 4.60 | 5.58 | 6.08 | PASS |
| Mode | FR1 n77 / 20MHz / DFT-S OFDM | | | | |
| Mod. | 256QAM | | | | Limit: 13dB |
| RB Size | Full RB | | | | Result |
| Middle CH | 6.48 | | | | PASS |



FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB



PI/2 BPSK

QPSK

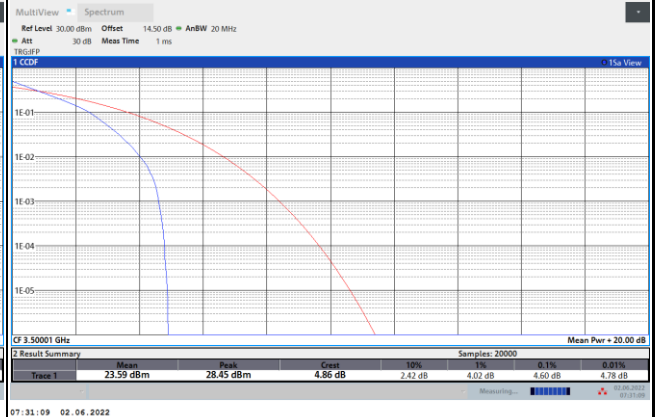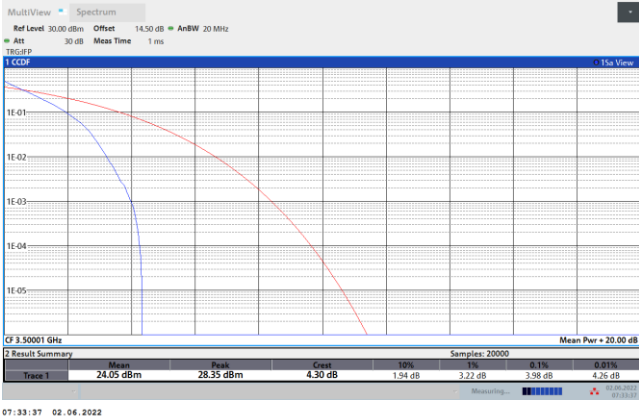


16QAM

64QAM

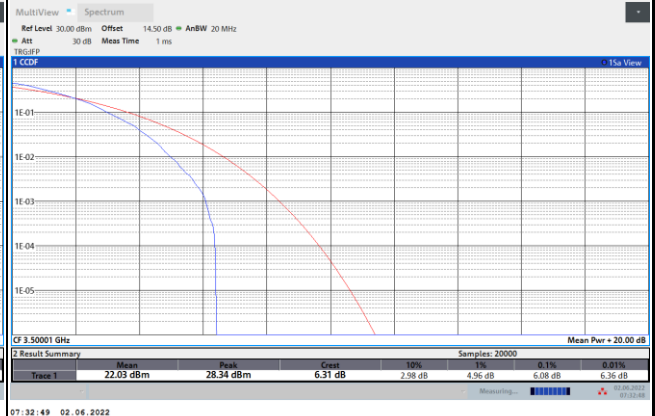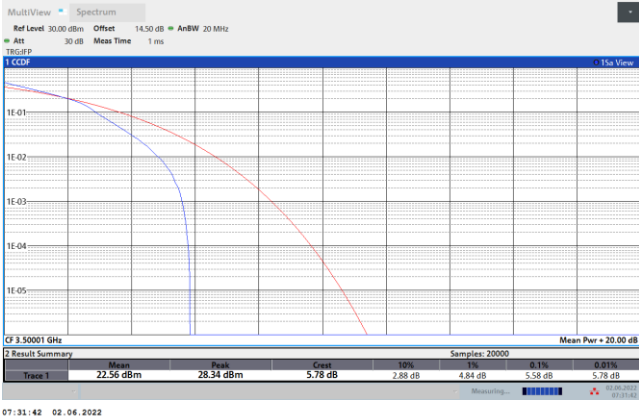

256QAM

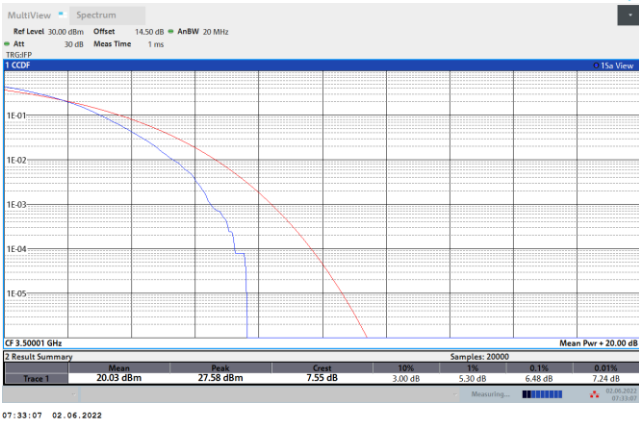



26dB Bandwidth


| Mode | FR1 n77 : 26dB BW(MHz) / DFT-S OFDM | | | | | | | |
|-----------|-------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| BW | 20MHz | 25MHz | 30MHz | 40MHz | 50MHz | 60MHz | 70MHz | 80MHz |
| Mod. | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK |
| Middle CH | 18.86 | - | 27.99 | 38.36 | 48.35 | 60.54 | 66.85 | 80.08 |
| BW | 90MHz | 100MHz | | | | | | |
| Mod. | PI/2 BPSK | PI/2 BPSK | | | | | | |
| Middle CH | 89.73 | 99.70 | | | | | | |

| Mode | FR1 n77 : 26dB BW(MHz) / CP OFDM | | | | | | | |
|-----------|----------------------------------|--------|--------|--------|-------|--------|-------|--------|
| BW | 20MHz | | 25MHz | | 30MHz | | 40MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 19.34 | 19.18 | - | - | 28.89 | 29.13 | 40.28 | 40.44 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 19.18 | 28.93 | - | - | 28.83 | 28.95 | 40.36 | 40.52 |
| BW | 50MHz | | 60MHz | | 70MHz | | 80MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 50.15 | 50.05 | 60.54 | 60.42 | 70.35 | 70.21 | 80.40 | 80.56 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 50.05 | 50.05 | 60.54 | 60.54 | 70.35 | 70.21 | 80.40 | 80.40 |
| BW | 90MHz | | 100MHz | | | | | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | | | | |
| Middle CH | 90.27 | 90.45 | 100.30 | 100.70 | | | | |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | | | | |
| Middle CH | 90.63 | 90.27 | 100.70 | 100.70 | | | | |




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

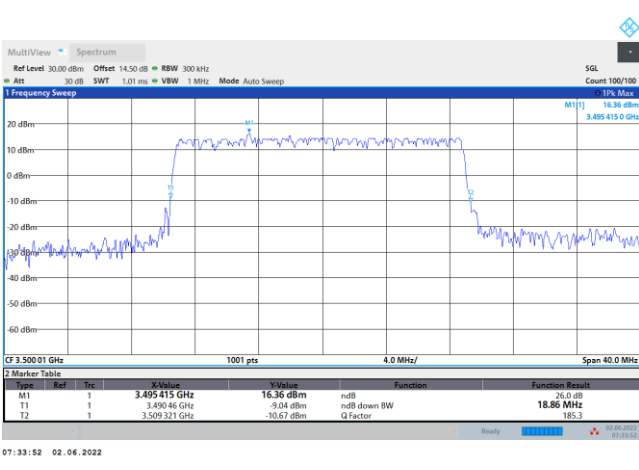


FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

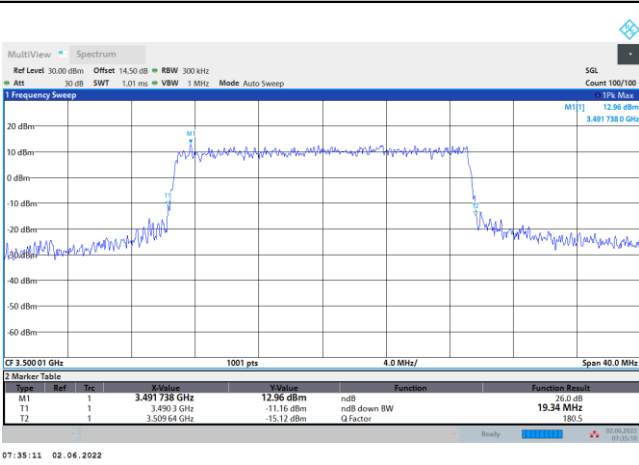


16QAM

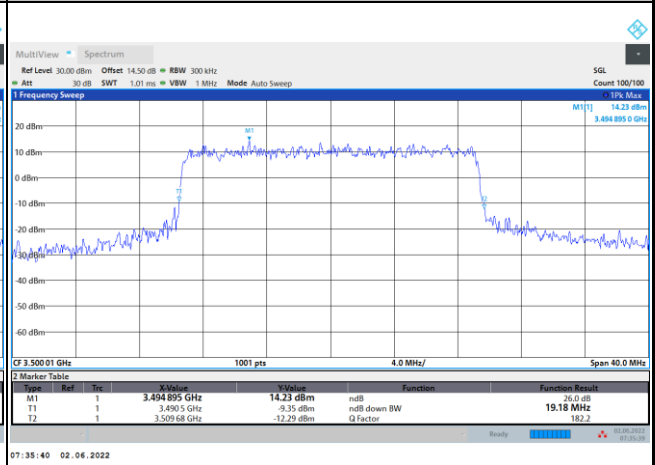

64QAM

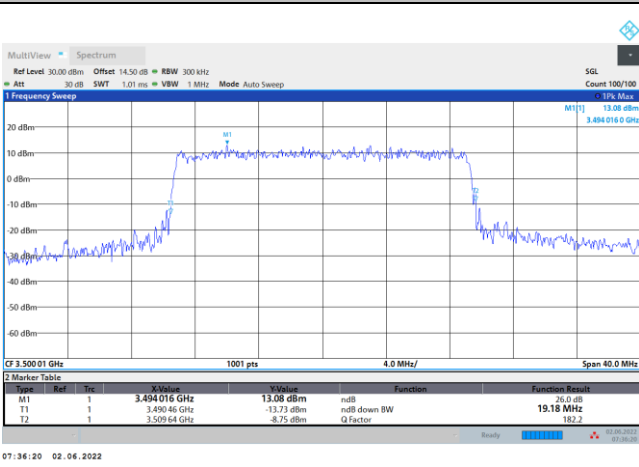


256QAM

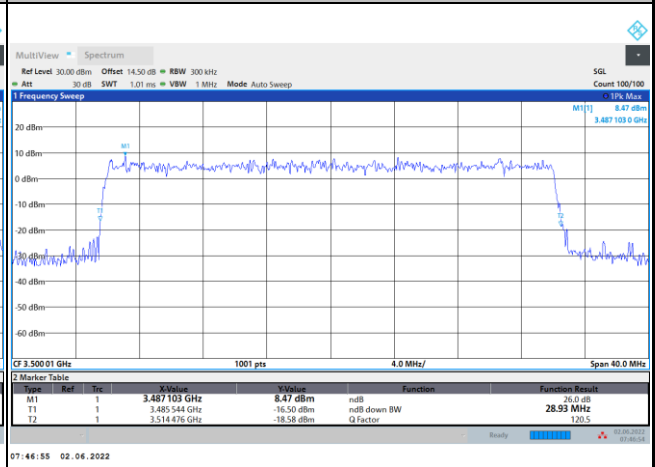




FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

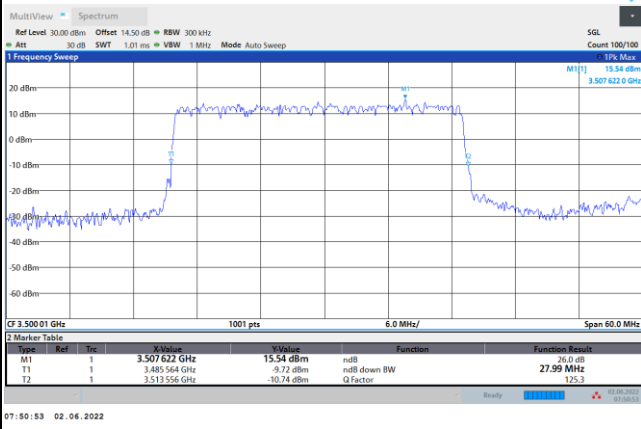


FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

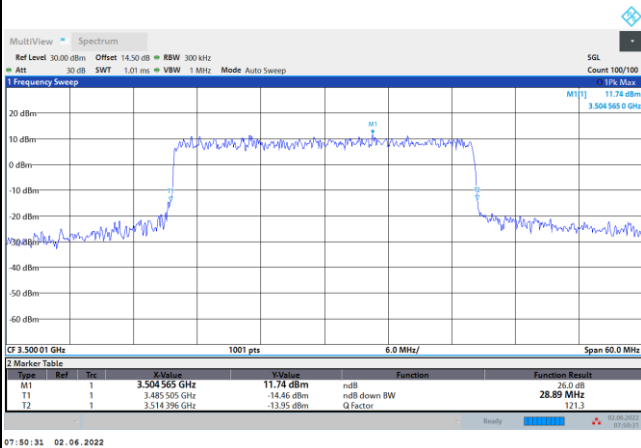


16QAM

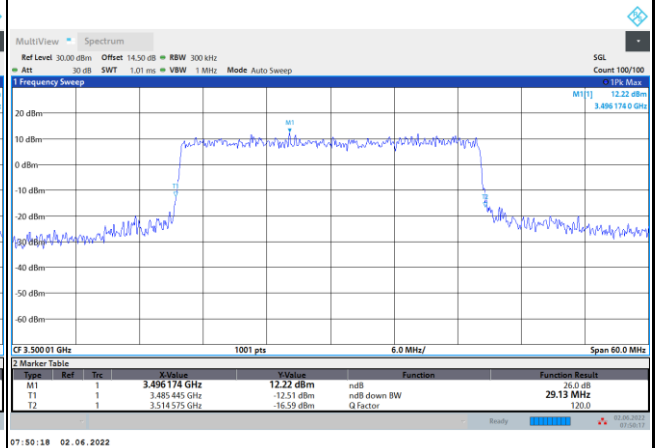

64QAM

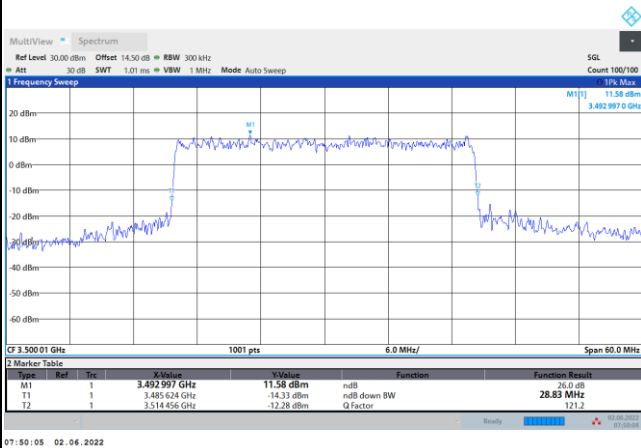


256QAM

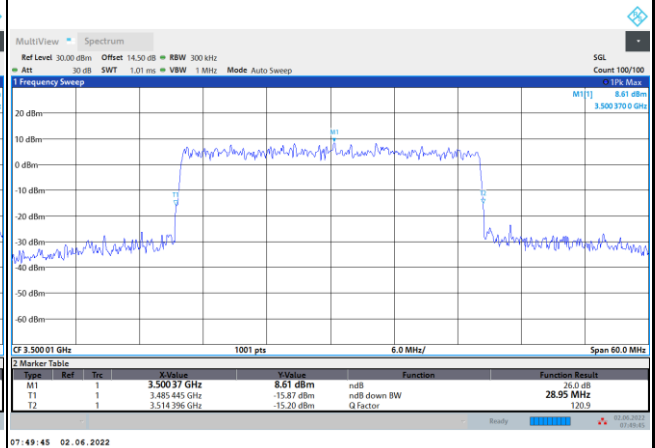




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

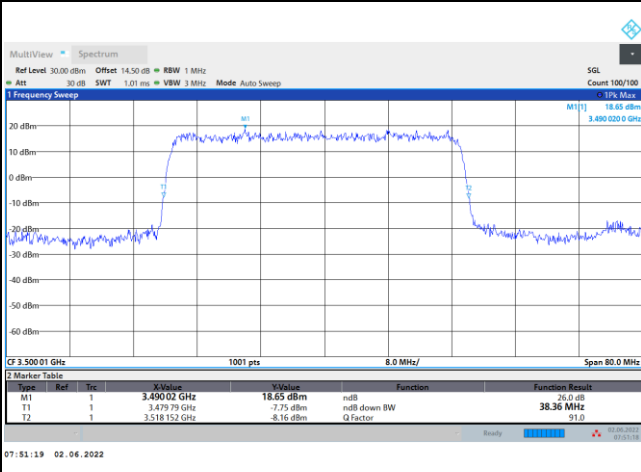


FR1 n77 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

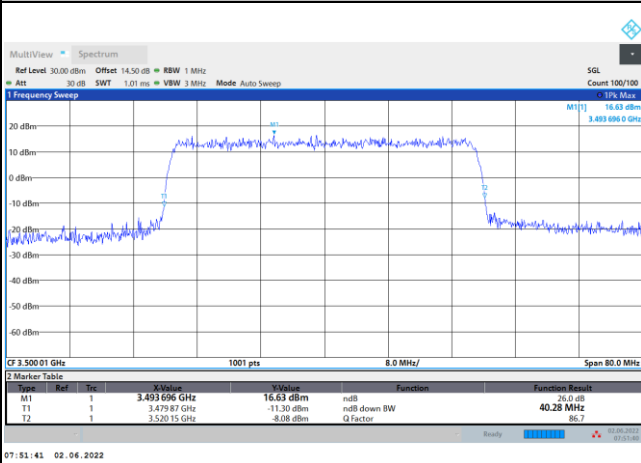


16QAM

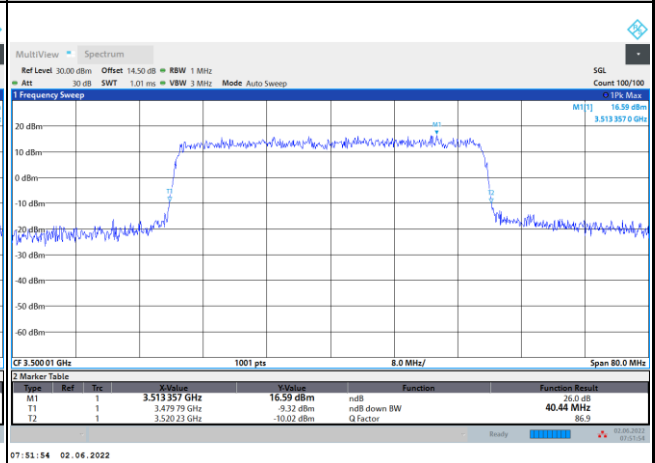

64QAM

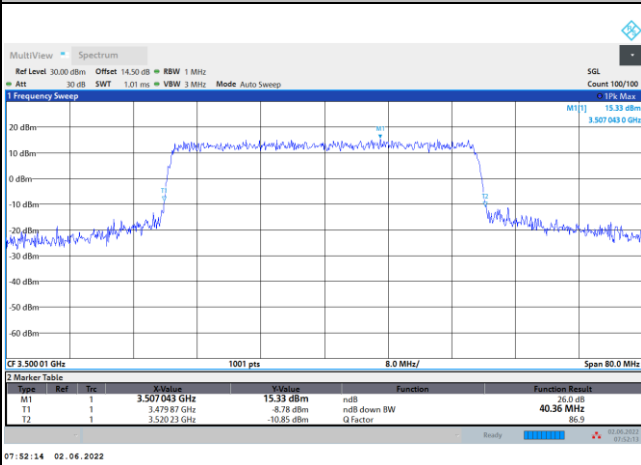


256QAM

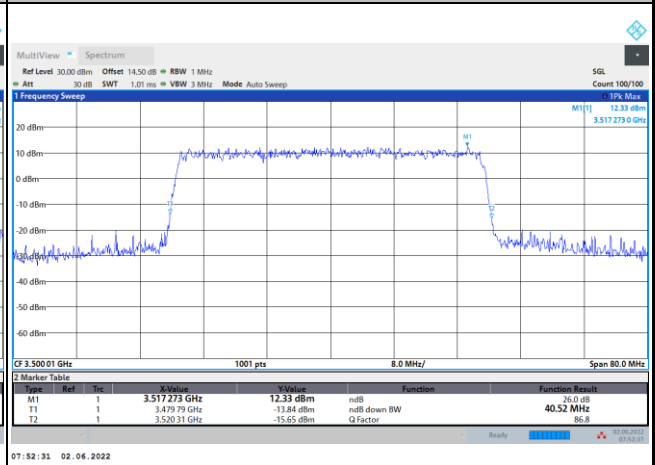




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

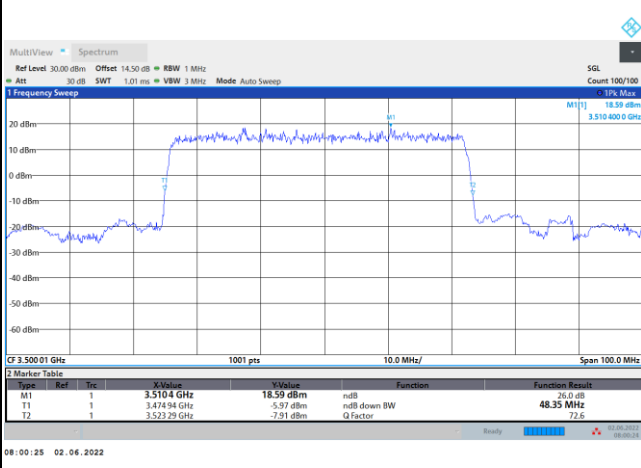


FR1 n77 / 50MHz / CP OFDM / Middle Channel / Full RB


QPSK

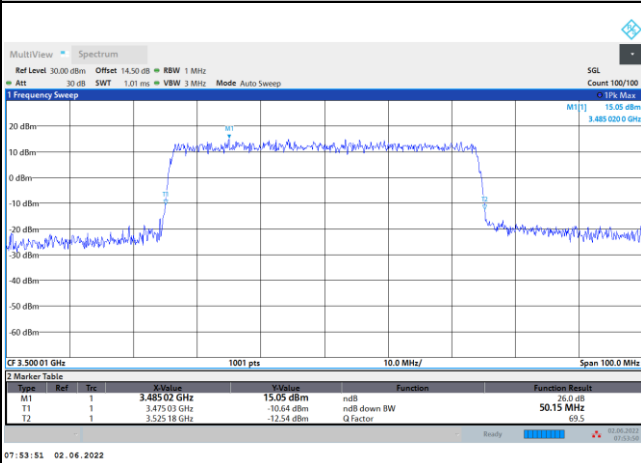


16QAM

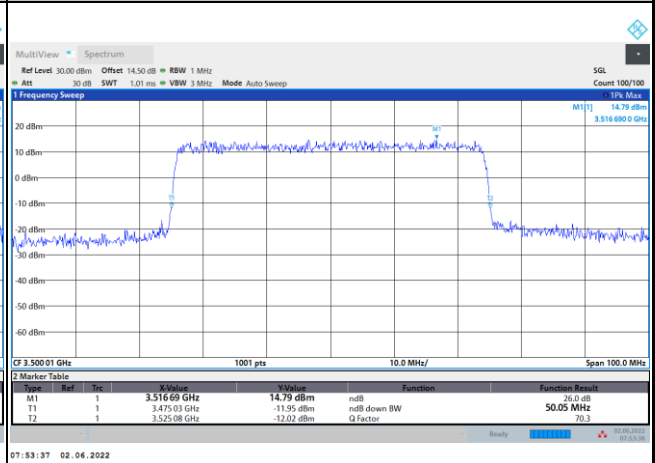

64QAM

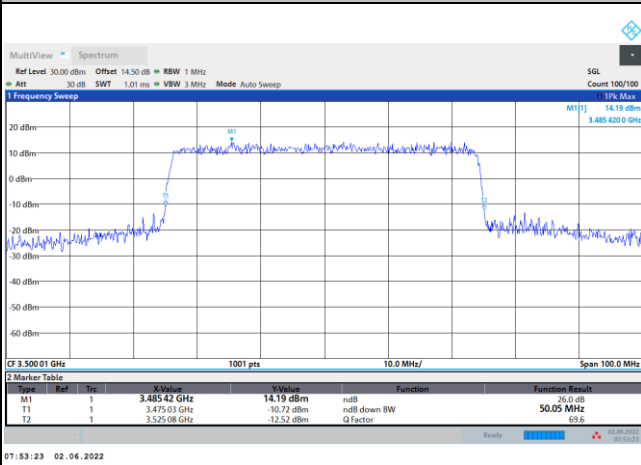


256QAM

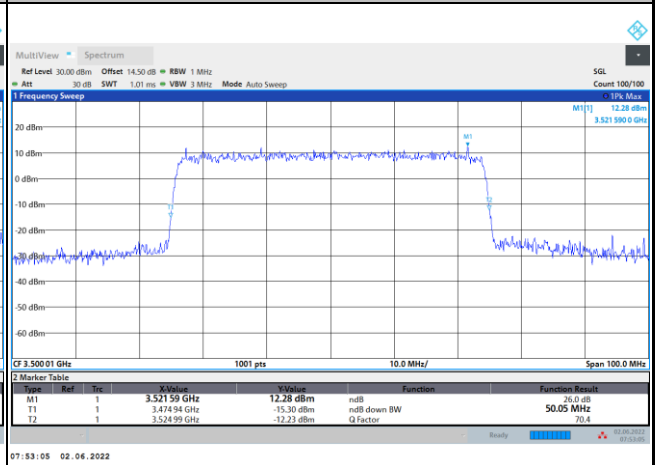




FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

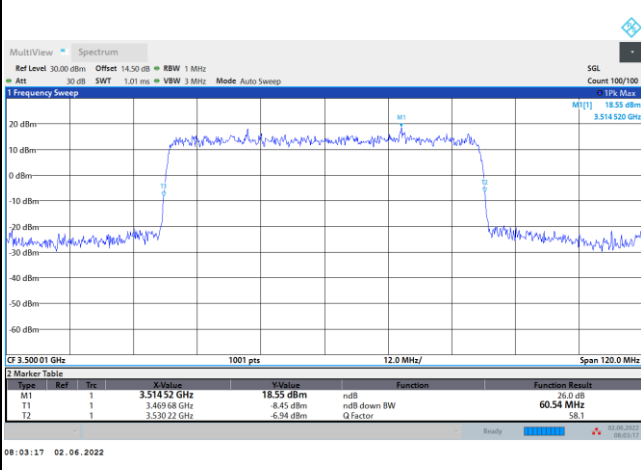


FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


QPSK

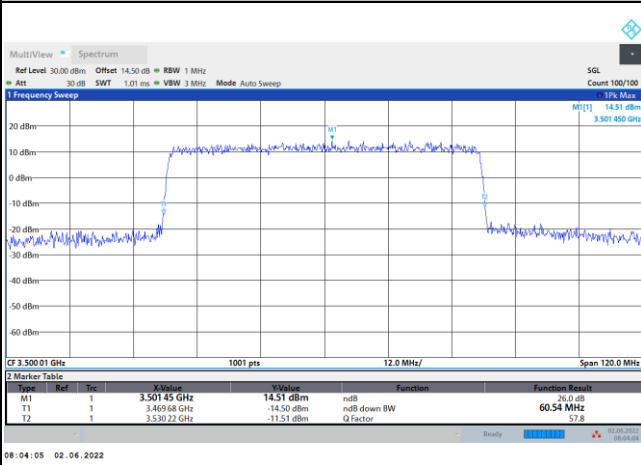


16QAM

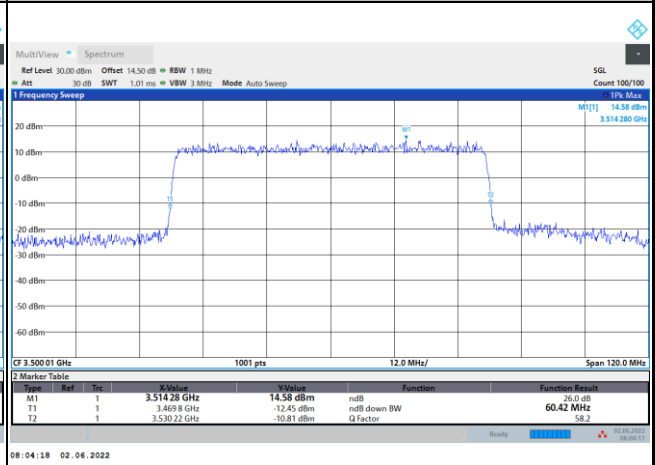

64QAM

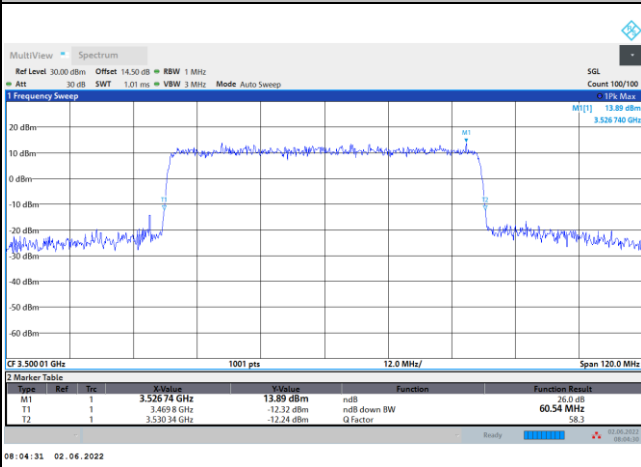


256QAM

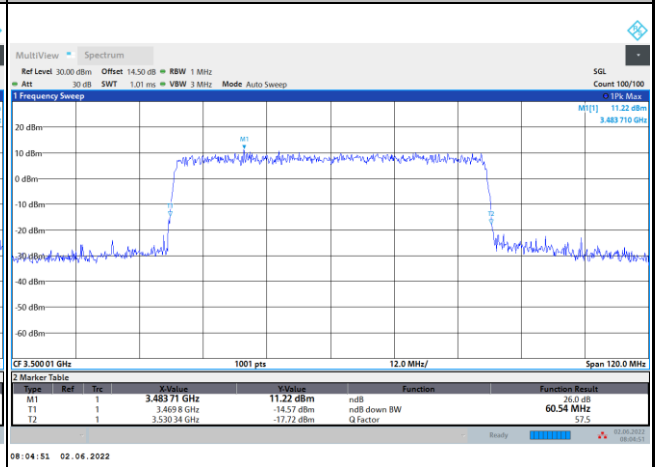




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

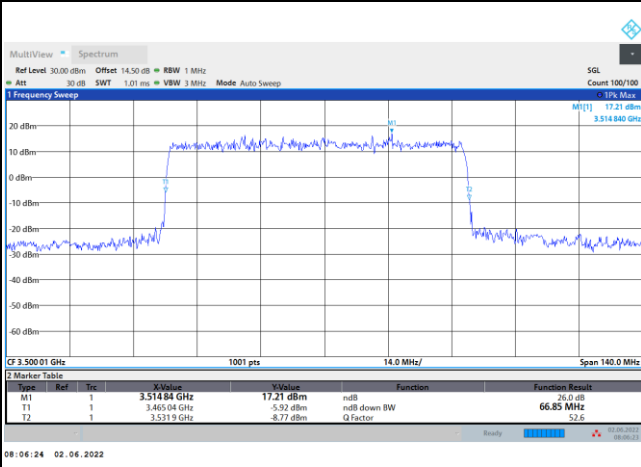


FR1 n77 / 70MHz / CP OFDM / Middle Channel / Full RB


QPSK

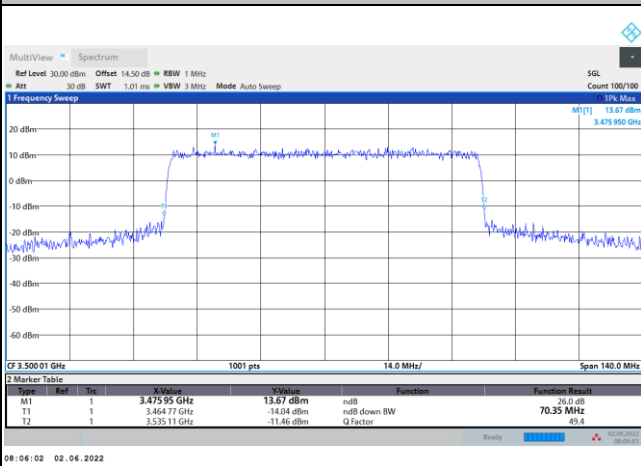


16QAM

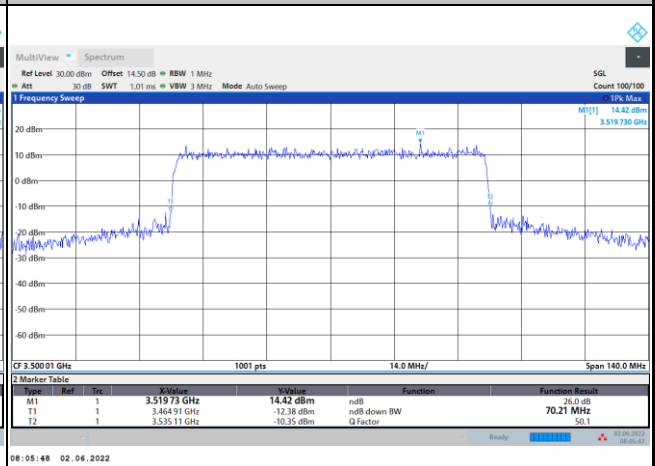

64QAM

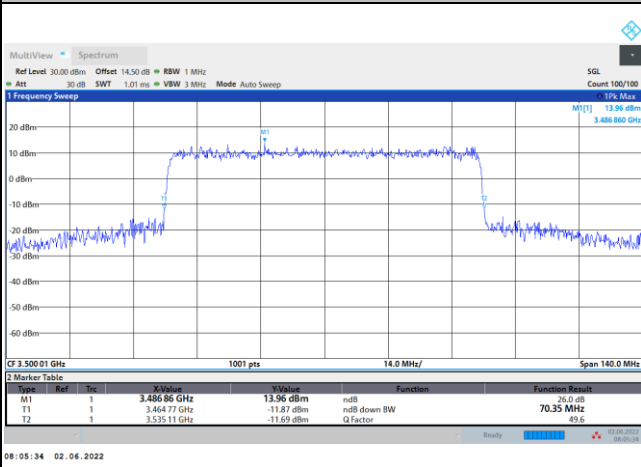


256QAM

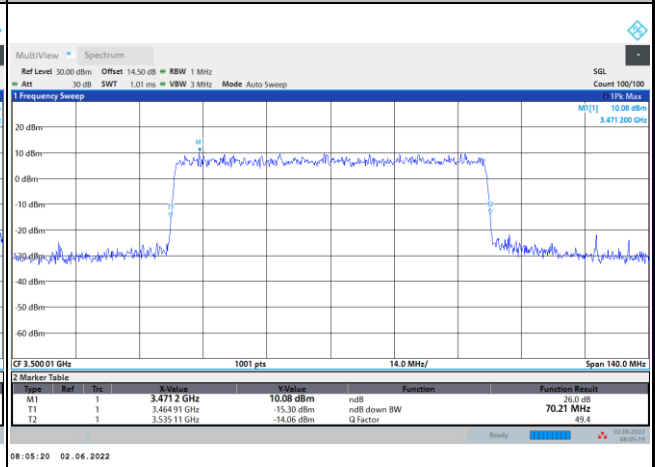




FR1 n77 / 80MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

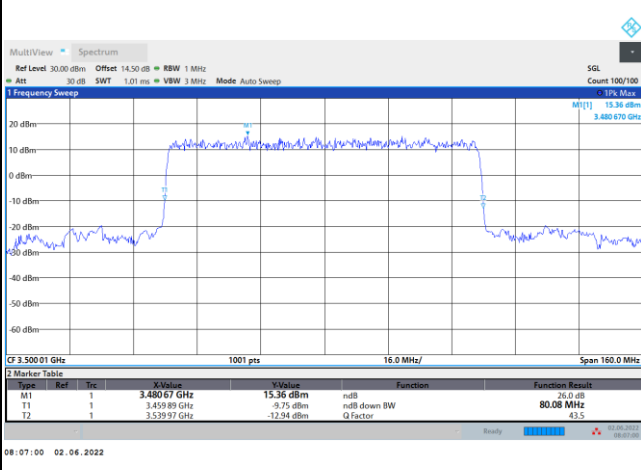


FR1 n77 / 80MHz / CP OFDM / Middle Channel / Full RB


QPSK

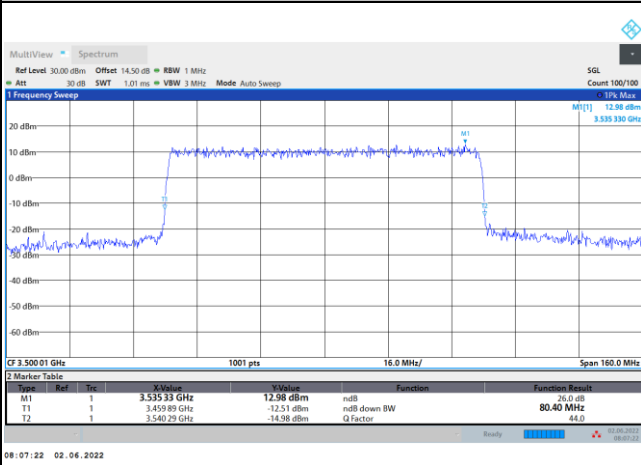


16QAM

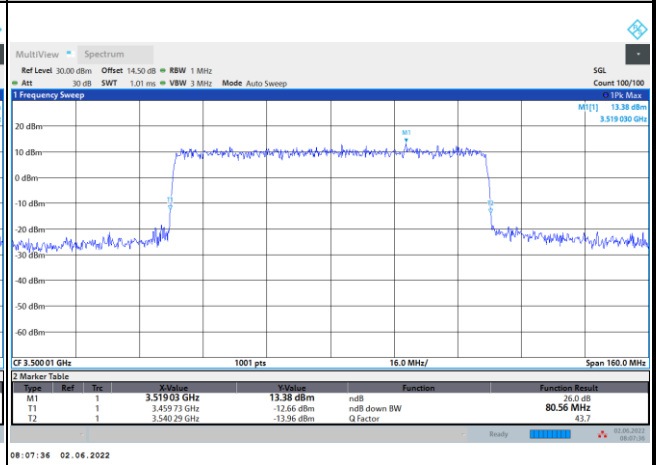

64QAM

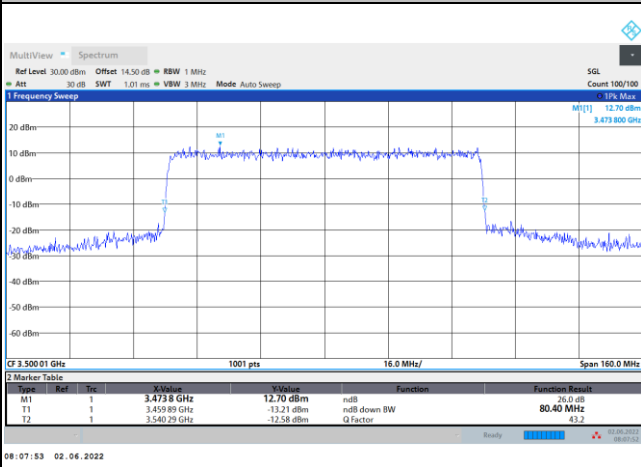


256QAM

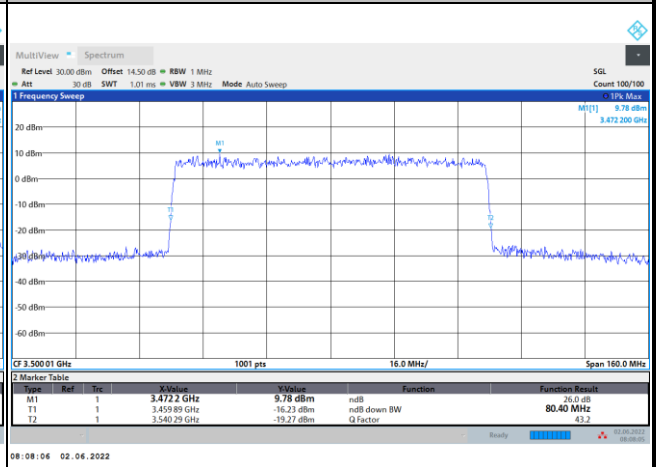




FR1 n77 / 90MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

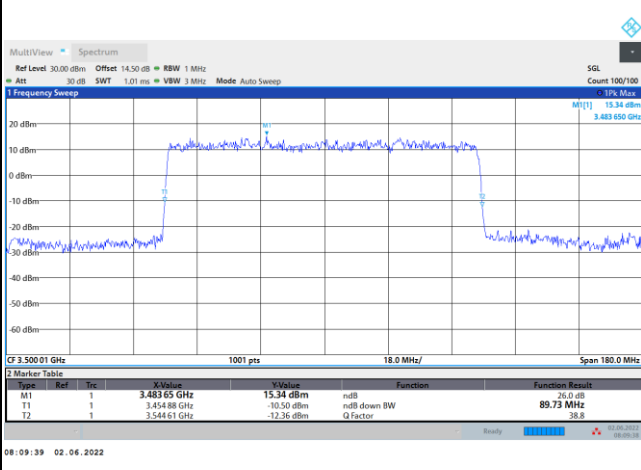


FR1 n77 / 90MHz / CP OFDM / Middle Channel / Full RB


QPSK

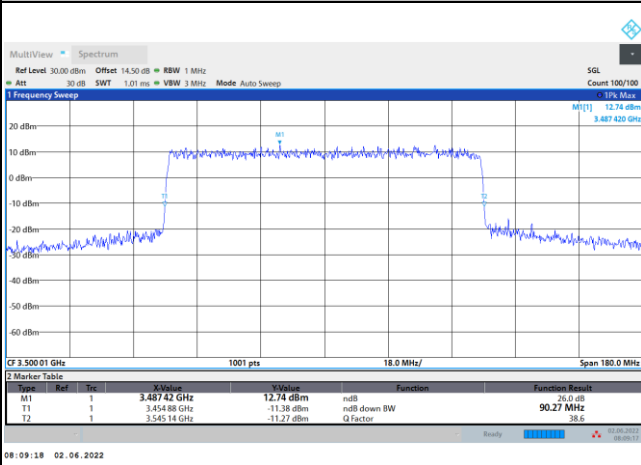


16QAM

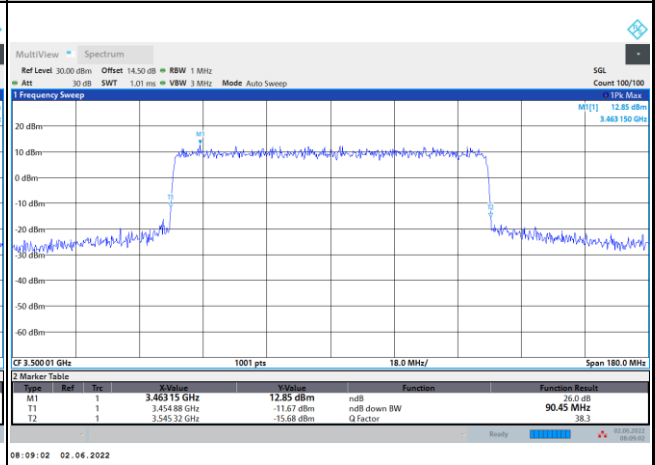

64QAM

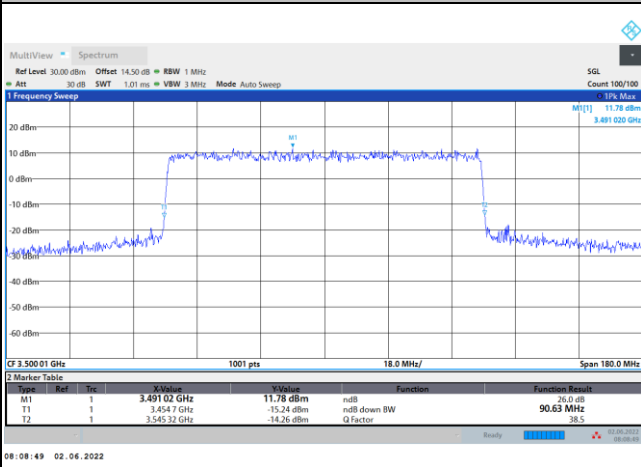


256QAM

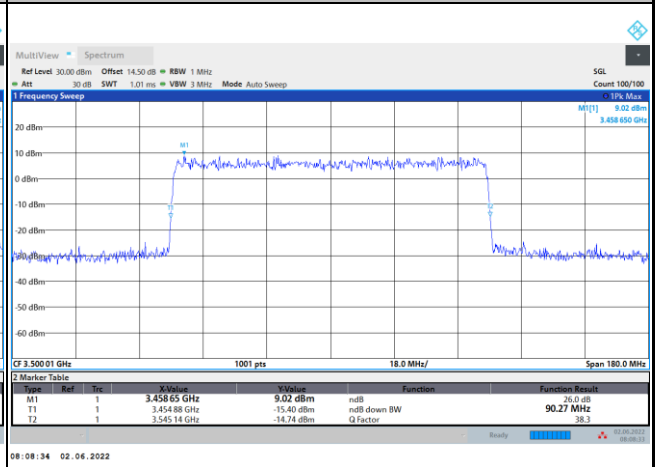




FR1 n77 / 100MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

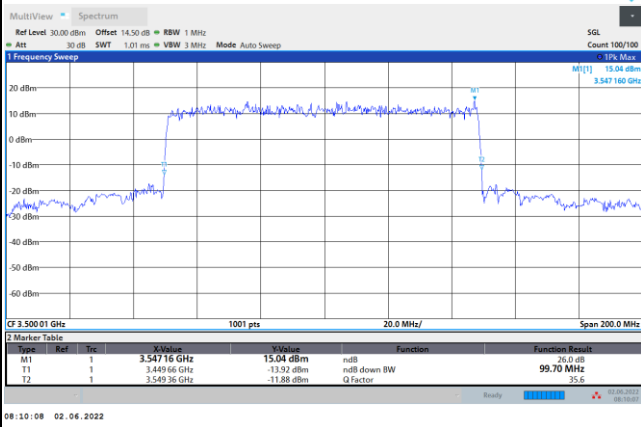


FR1 n77 / 100MHz / CP OFDM / Middle Channel / Full RB


QPSK

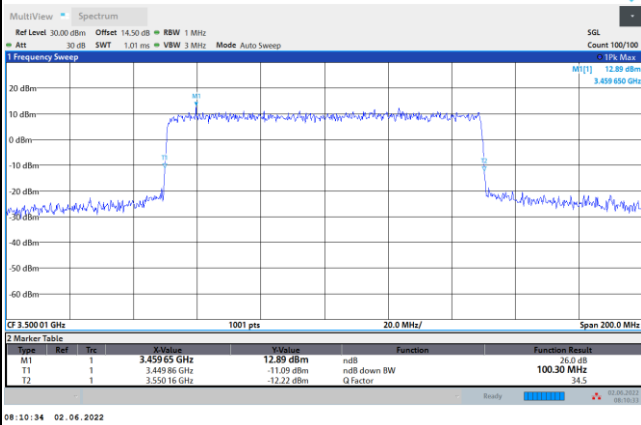


16QAM

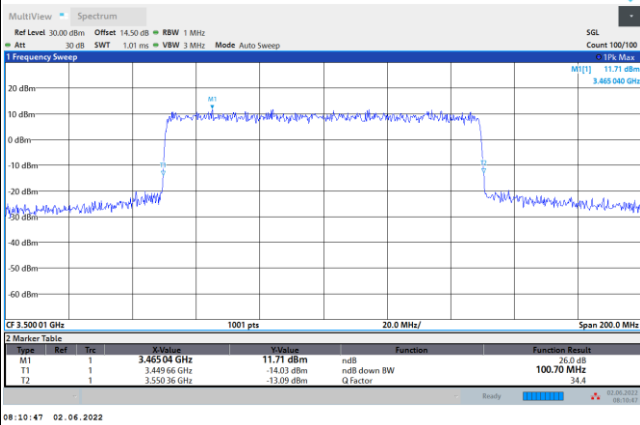

64QAM

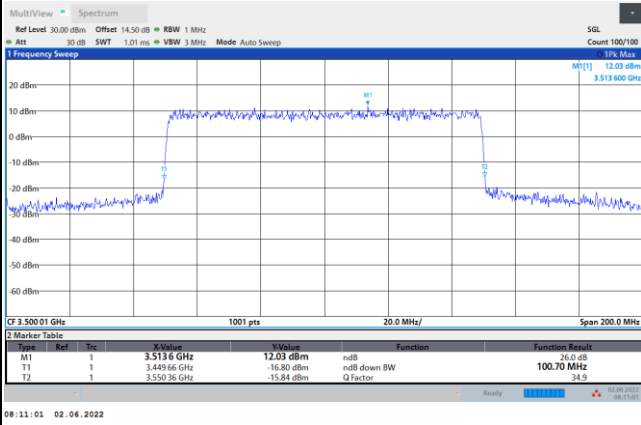

256QAM

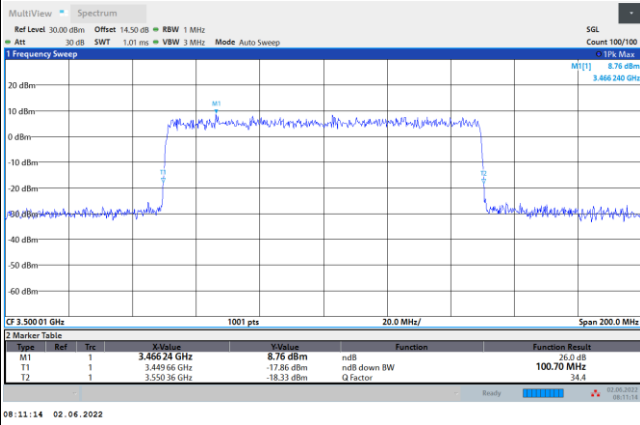



Occupied Bandwidth


| Mode | FR1 n77 : OB BW(MHz) / DFT-S OFDM | | | | | | | |
|-----------|-----------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| BW | 20MHz | 25MHz | 30MHz | 40MHz | 50MHz | 60MHz | 70MHz | 80MHz |
| Mod. | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK | PI/2 BPSK |
| Middle CH | 17.81 | - | 26.85 | 35.88 | 45.86 | 57.90 | 64.42 | 77.02 |
| BW | 90MHz | 100MHz | | | | | | |
| Mod. | PI/2 BPSK | PI/2 BPSK | | | | | | |
| Middle CH | 86.70 | 96.54 | | | | | | |

| Mode | FR1 n77 : OB BW(MHz) / CP OFDM | | | | | | | |
|-----------|--------------------------------|--------|--------|--------|-------|--------|-------|--------|
| BW | 20MHz | | 25MHz | | 30MHz | | 40MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 18.22 | 18.21 | - | - | 27.82 | 27.81 | 38.02 | 38.09 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 18.22 | 27.77 | - | - | 27.86 | 27.84 | 38.01 | 38.00 |
| BW | 50MHz | | 60MHz | | 70MHz | | 80MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Middle CH | 47.57 | 47.57 | 57.83 | 57.72 | 67.32 | 67.47 | 77.53 | 77.37 |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Middle CH | 47.57 | 47.56 | 57.80 | 57.81 | 67.49 | 67.27 | 77.69 | 77.41 |
| BW | 90MHz | | 100MHz | | | | | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | | | | |
| Middle CH | 87.39 | 87.51 | 97.31 | 97.45 | | | | |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | | | | |
| Middle CH | 87.51 | 87.43 | 97.24 | 97.17 | | | | |




FR1 n77 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

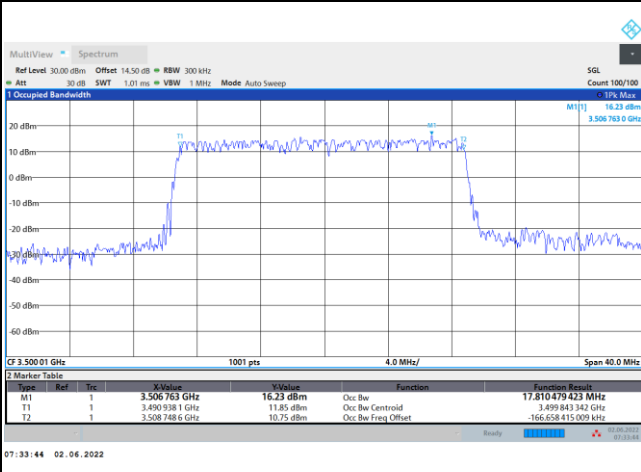


FR1 n77 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

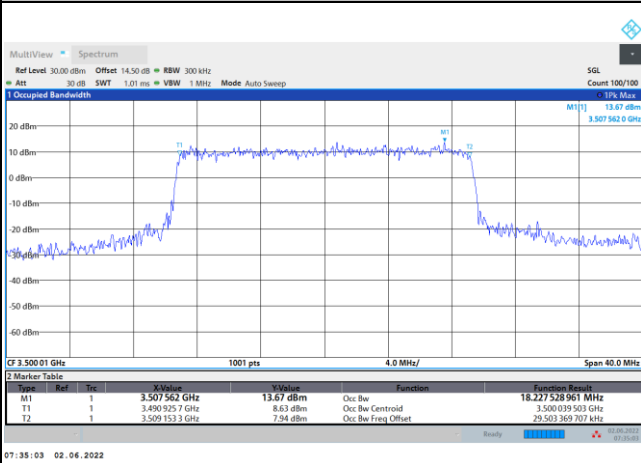


16QAM

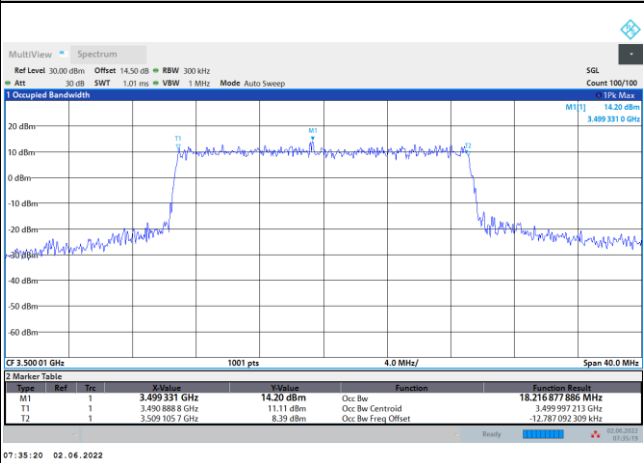

64QAM

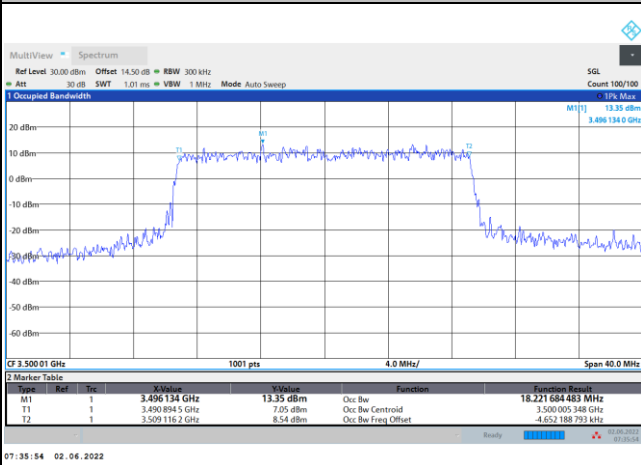


256QAM

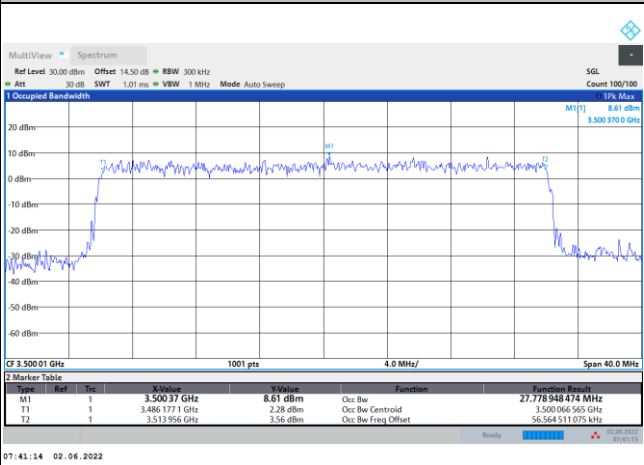




FR1 n77 / 30MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

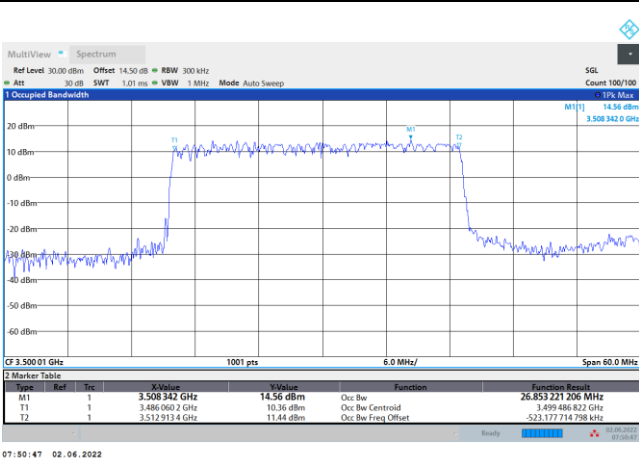


FR1 n77 / 30MHz / CP OFDM / Middle Channel / Full RB


QPSK

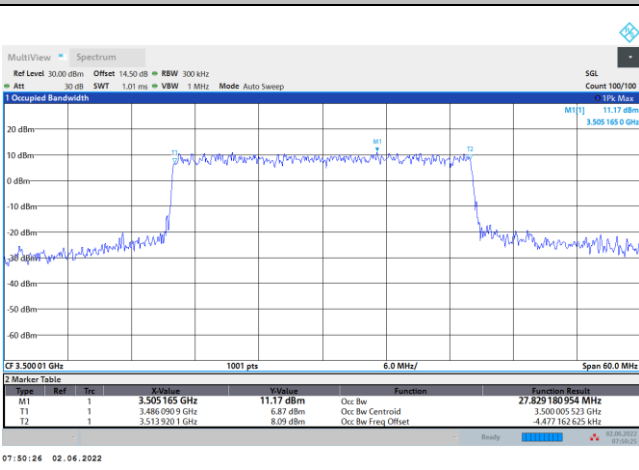


16QAM

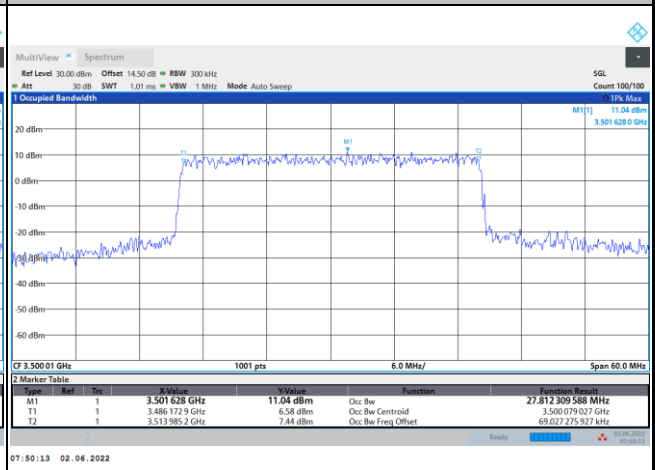

64QAM

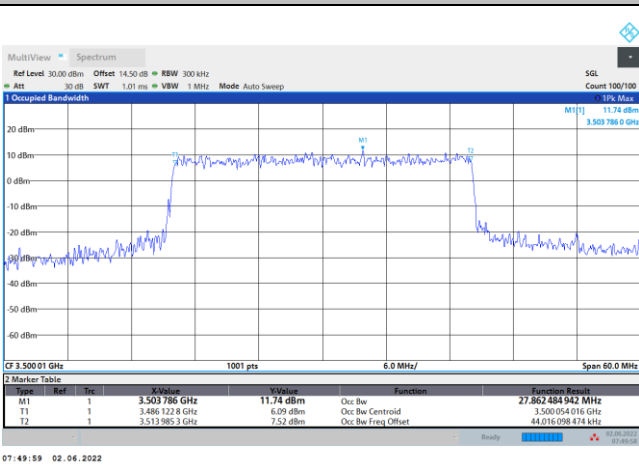


256QAM

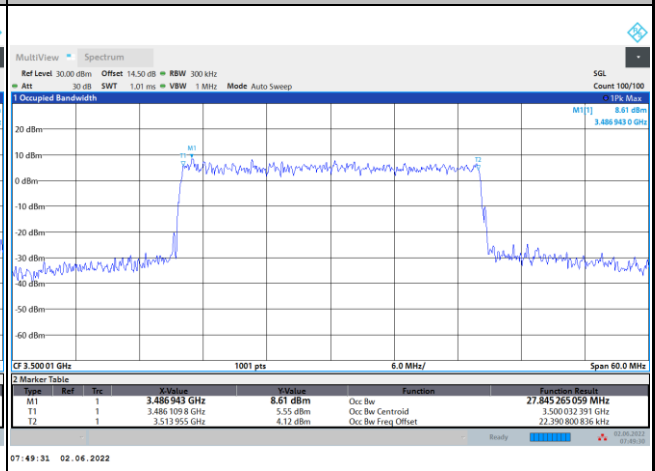




FR1 n77 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

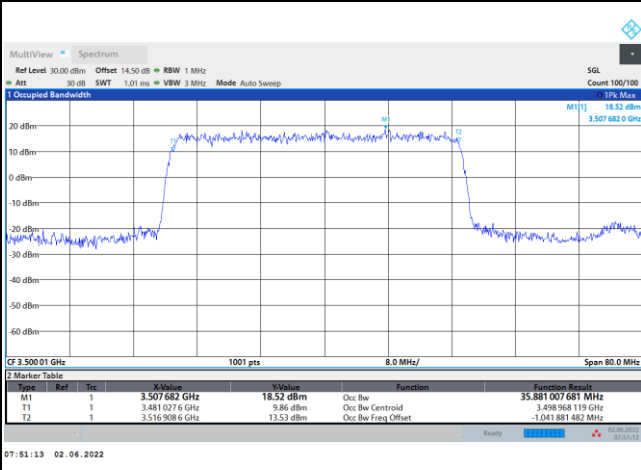


FR1 n77 / 40MHz / CP OFDM / Middle Channel / Full RB


QPSK

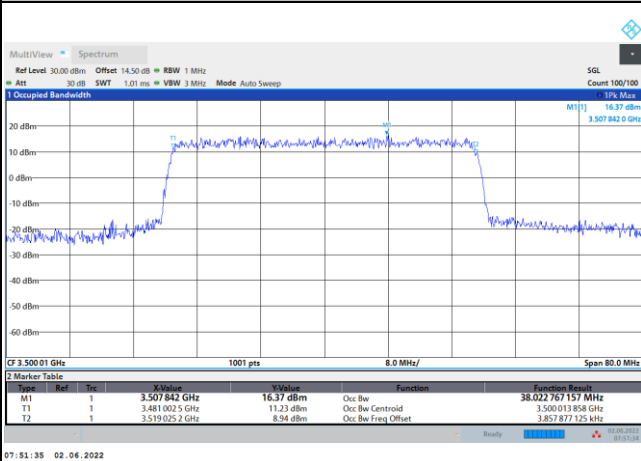


16QAM

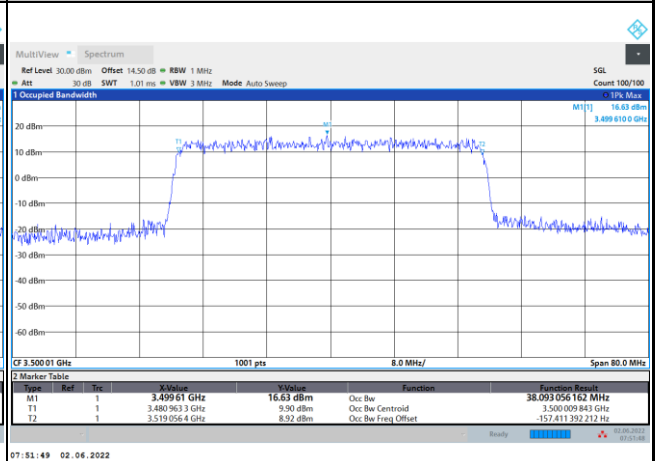

64QAM

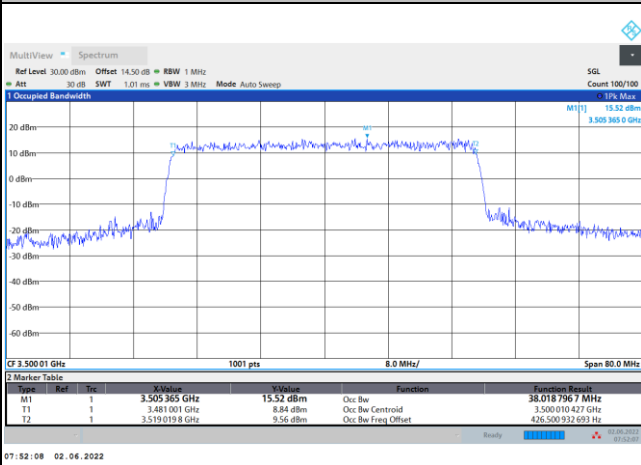


256QAM

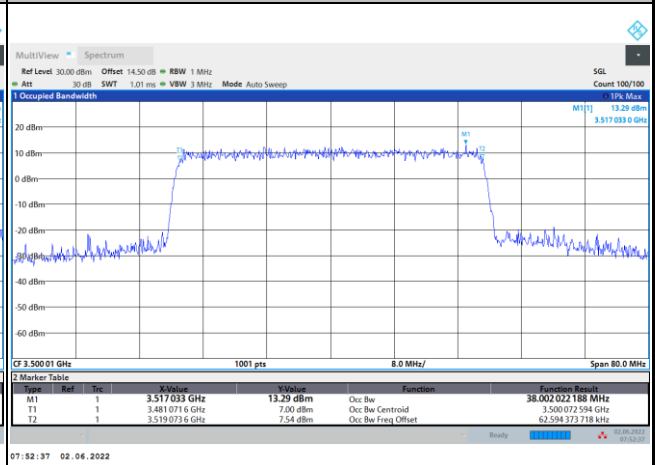




FR1 n77 / 50MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

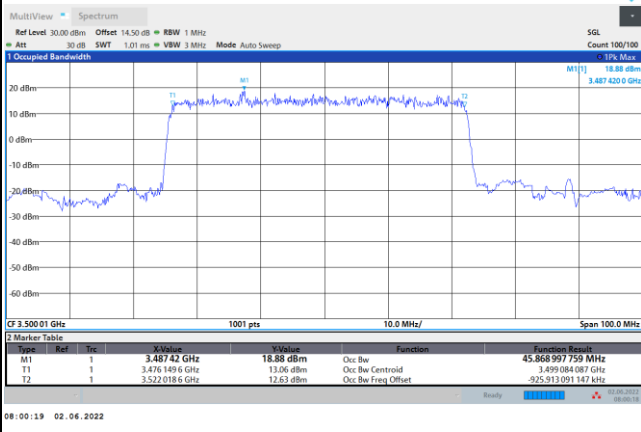


FR1 n77 / 50MHz / CP OFDM / Middle Channel / Full RB


QPSK

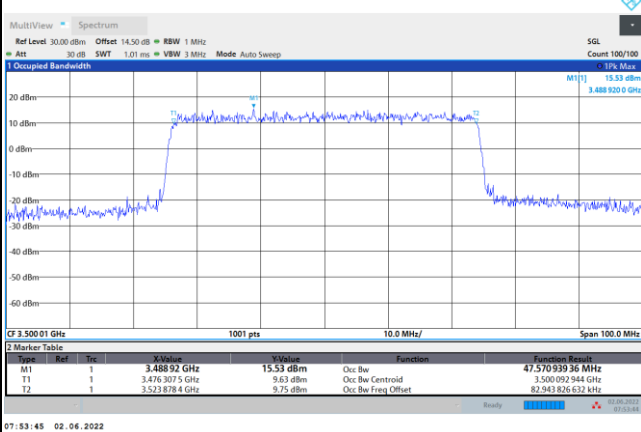


16QAM

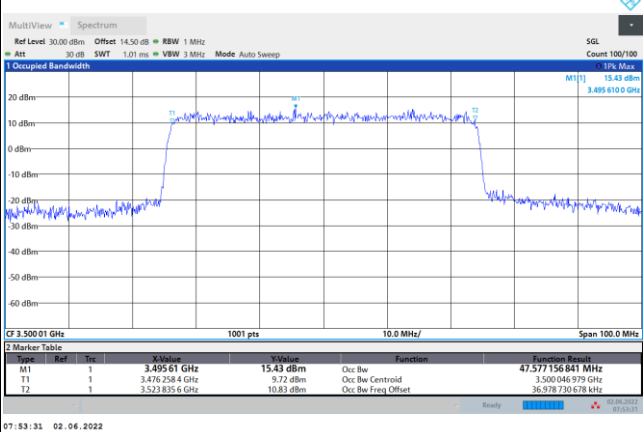

64QAM

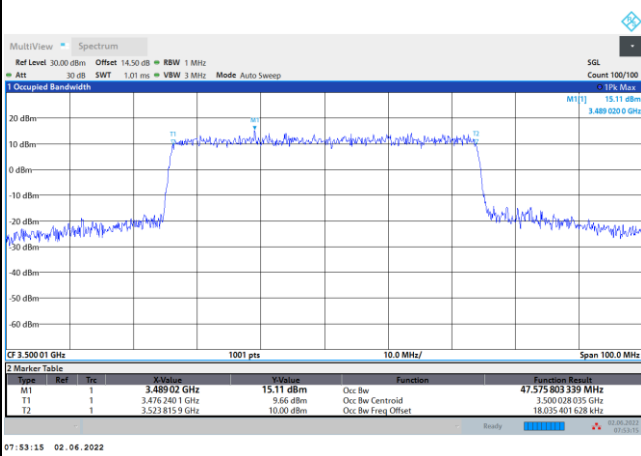


256QAM

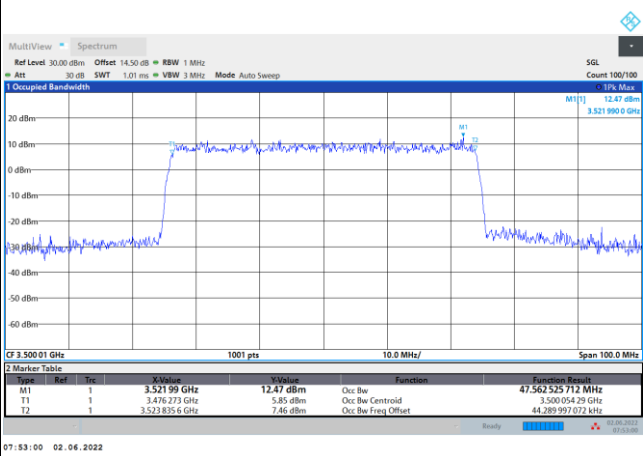




FR1 n77 / 60MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

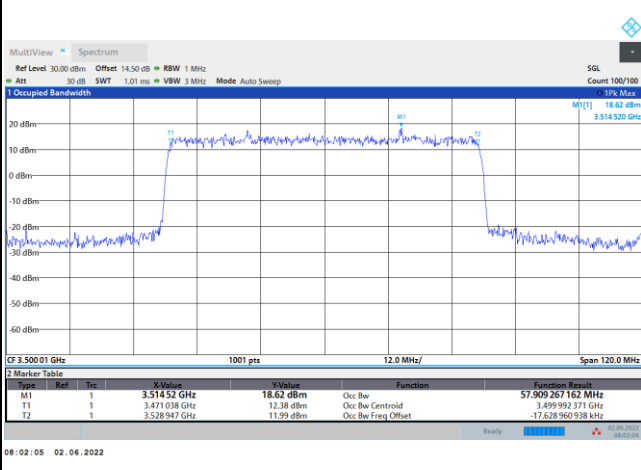


FR1 n77 / 60MHz / CP OFDM / Middle Channel / Full RB


QPSK

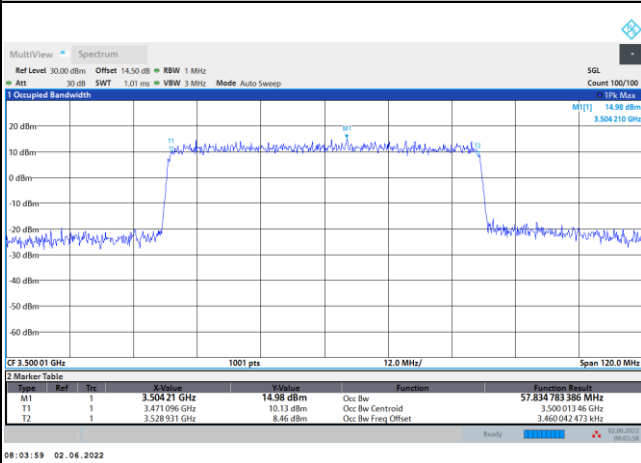


16QAM

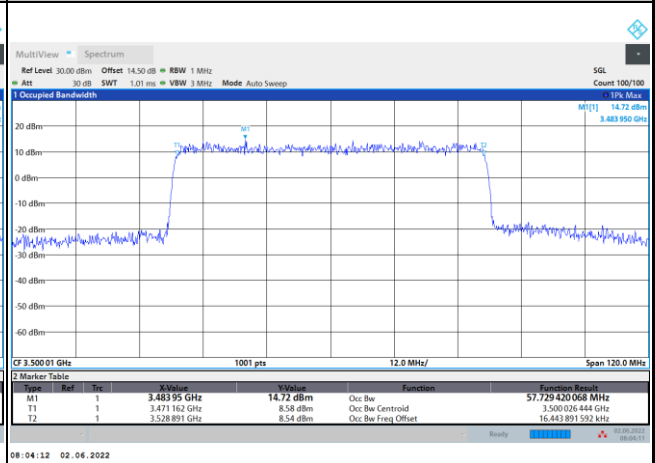

64QAM

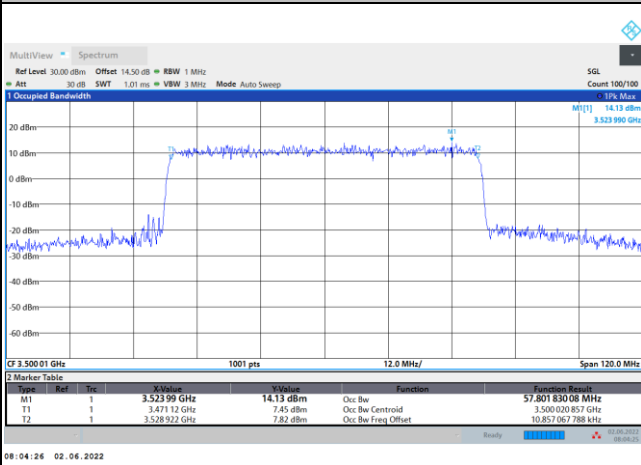


256QAM

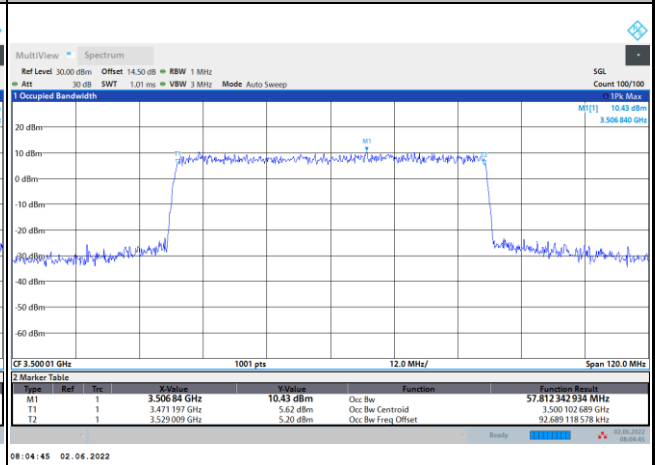




FR1 n77 / 70MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

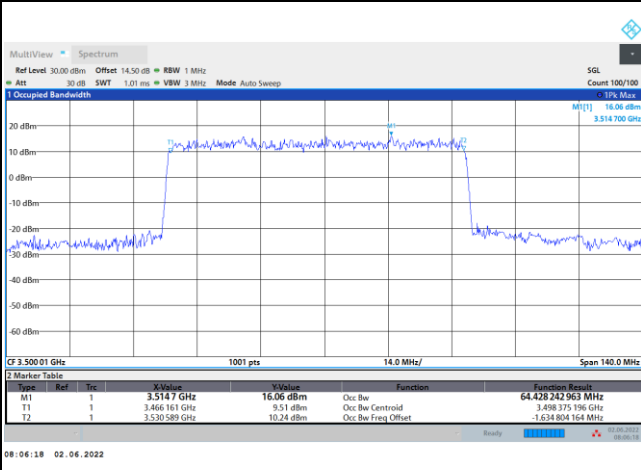


FR1 n77 / 70MHz / CP OFDM / Middle Channel / Full RB


QPSK

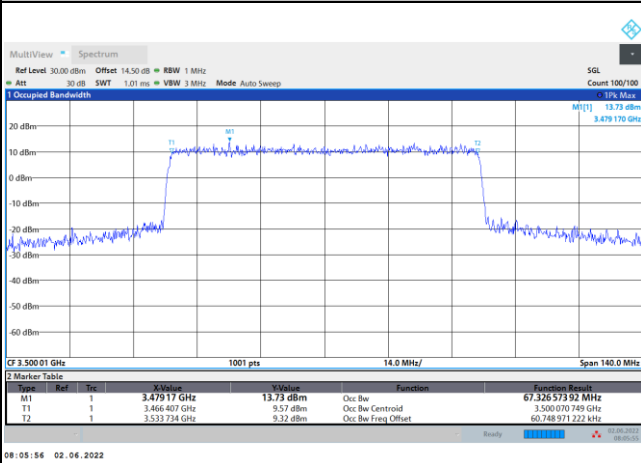

16QAM

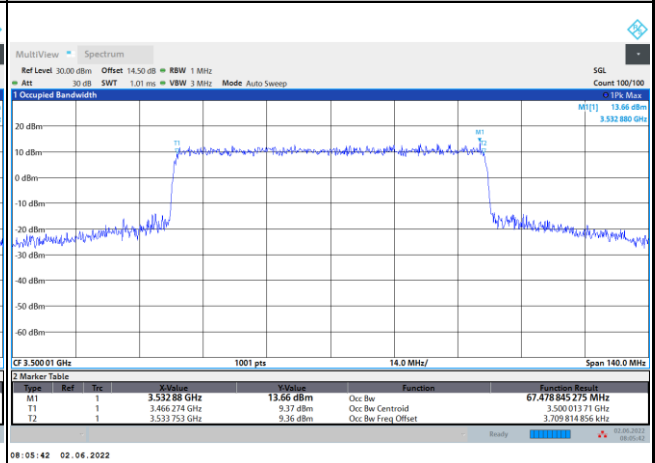

64QAM

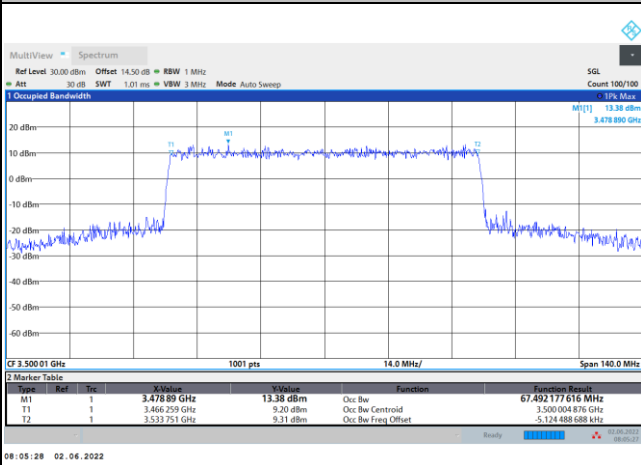

256QAM

