

TEST REPORT

Applicant Name : Franklin Technology Inc.
Address : 906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu Seoul,
South Korea 08502
Report Number : RA230104-00558E-RF-00A
FCC ID: XHG-CG890

Test Standard (s)

FCC PART 15.247


Sample Description

Product Type: Home Router CG890
Model No.: CG890
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2023/01/04
Report Date: 2023/03/02

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Andy Yu
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1307 (B) (3) & §2.1091- MPE-BASED EXEMPTION.....	13
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TRANSD FACTOR & MARGIN CALCULATION.....	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
FACTOR & MARGIN CALCULATION	21
TEST DATA	21
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE32
 APPLICABLE STANDARD32
 TEST PROCEDURE32
 TEST DATA32

FCC §15.247(E) - POWER SPECTRAL DENSITY.....33
 APPLICABLE STANDARD33
 TEST PROCEDURE33
 TEST DATA33

APPENDIX34
 APPENDIX A: DTS BANDWIDTH34
 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH39
 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER44
 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY45
 APPENDIX E: BAND EDGE MEASUREMENTS.....58
 APPENDIX F: DUTY CYCLE64

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230104-00558E-RF-00A	Original Report	2023-03-02

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Wi-Fi: 2412-2462MHz
Maximum Conducted Average Output Power	Wi-Fi: 802.11b: 21.08dBm, 802.11g: 18.96dBm, 802.11n-HT20: 17.61dBm, 802.11ax-HE20: 14.77dBm
Modulation Technique	Wi-Fi: DSSS, OFDM, OFDMA
Antenna Specification*	ANT 1:3.1dBi; ANT 2 :1.3dBi (provided by the applicant)
Voltage Range	DC 12V from adapter or DC 3.8V from battery
Sample serial number	1XJ8-3 for Conducted Emissions & Radiated Emissions Test 1XJH-12 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: APS-M024120200W-G Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 12V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g, 802.11n-HT20 and 802.11ax-HE20 mode was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“QRCT”*Software was used to test and power level as below:

Mode	Data rate	Power Level		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	18	18	18
802.11g	6Mbps	15	15	15
802.11n-HT20	MCS0	15	15	15
802.11ax-HE20	MCS0	12	12	12

The software and power level was provided by applicant.

For 802.11 ax mode, the device only support full RU mode, not support partial RU mode.

The device have two antennas and support SISO/MIMO transmitting, scan SISO/MIMO, the worst case MIMO was selected to test.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Grandstream	Telephone	GXV3450	Unknown
DELL	Note Book*2	XXJL-2	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded Un-detachable DC cable	1.0	Adapter	EUT
Un-shielded detachable RJ45 cable*2	8.0	NoteBook	EUT
Un-shielded detachable RJ11 cable	1.5	Telephone	EUT

Block Diagram of Test Setup

For conducted emission:

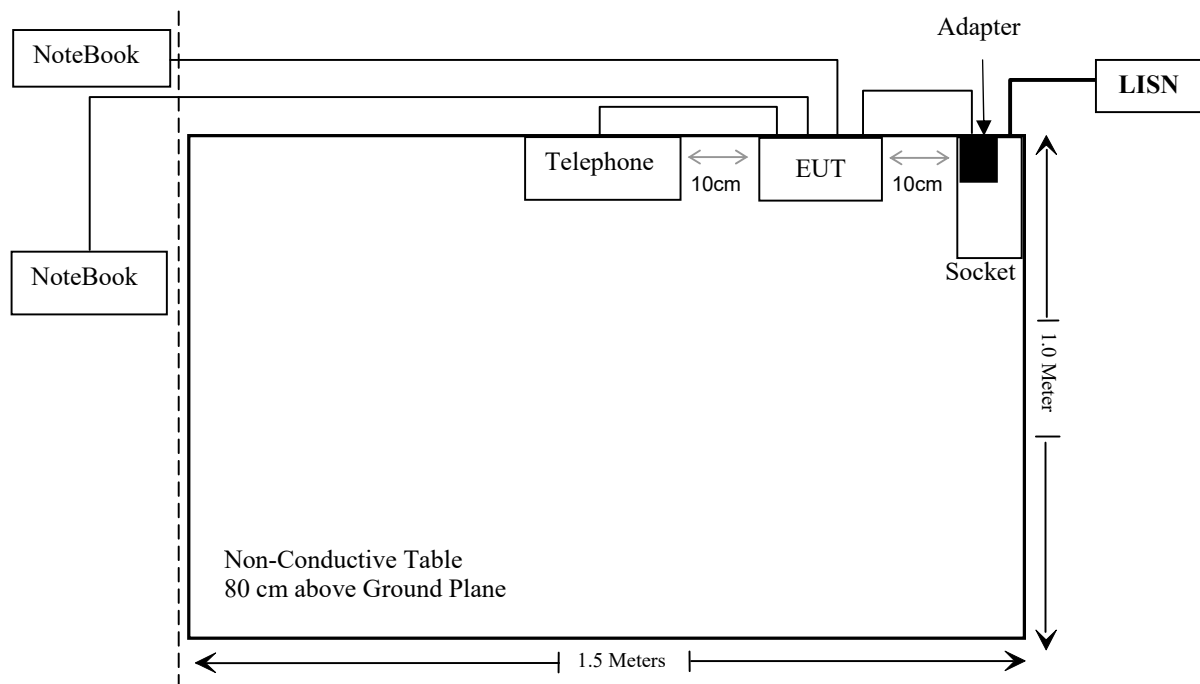

For Radiated Emissions:

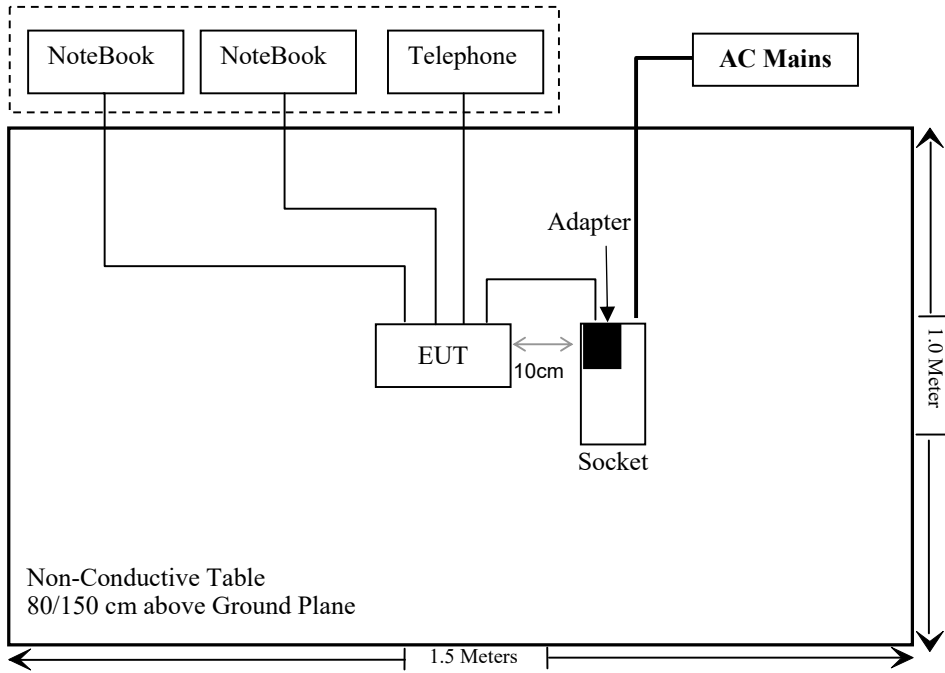

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1307 (b) (3) & §2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ESH3-Z5	100305	2022/12/01	2023/11/30
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
HP	20dB Attenuator	8491A	53857	2022/11/25	2023/11/24
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/06/27	2023/06/26
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	Each time

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) (3) & §2.1091- MPE-Based Exemption

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

For worst case:

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
2.4G Wi-Fi	2412-2462	21.5	3.1	0.95	22.45	0.176	0.3	1.728
5G Wi-Fi	5150-5250	20.5	2.2	0.05	20.55	0.114	0.3	1.728
	5725-5850	20.5	2.2	0.05	20.55	0.114	0.3	1.728
WCDMA B2	1850-1910	24.0	3.5	1.35	25.35	0.343	0.3	1.728
WCDMA B4	1710-1755	24.0	3.5	1.35	25.35	0.343	0.3	1.728
WCDMA B5	824-849	25.0	2.0	-0.15	24.85	0.305	0.3	0.949
LTE B2	1850-1910	23.0	3.5	1.35	24.35	0.272	0.3	1.728
LTE B4	1710-1755	23.5	3.5	1.35	24.85	0.305	0.3	1.728
LTE B5	824-849	23.5	2.0	-0.15	23.35	0.216	0.3	0.949
LTE B7	2500-2570	24.0	0.3	-1.85	22.15	0.164	0.3	1.728
LTE B12	699-716	24.0	2.1	-0.05	23.95	0.248	0.3	0.805
LTE B41	2496-2690	27.0	0.3	-1.85	25.15	0.327	0.3	1.728
LTE B48	3550-3700	23.0	-0.6	-2.75	20.25	0.106	0.3	1.728
LTE B66	1710-1780	23.5	3.5	1.35	24.85	0.305	0.3	1.728
LTE B71	663-698	24.0	1.8	-0.35	23.65	0.232	0.3	0.764
5G n48	3550-3700	23.5	-0.6	-2.75	20.75	0.119	0.3	1.728
5G n66	1710-1780	24.0	3.6	1.45	25.45	0.351	0.3	1.728
5G n71	663-698	24.5	1.8	-0.35	24.15	0.260	0.3	0.764

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The 2.4G Wi-Fi can transmit at the same time with the 5G Wi-Fi.

3. 0dBd=2.15dBi

Simultaneous transmitting consideration (worst case):

$$\text{The ratio} = \frac{\text{ERP}_{2.4\text{G Wi-Fi}}}{\text{ERP}_{\text{Limit}}} + \frac{\text{ERP}_{5\text{G Wi-Fi}}}{\text{ERP}_{\text{Limit}}} + \frac{\text{ERP}_{\text{WCDMA}}}{\text{ERP}_{\text{Limit}}} + \frac{\text{ERP}_{5\text{G NR}}}{\text{ERP}_{\text{Limit}}} \\ = 0.176/1.728 + 0.114/1.728 + 0.305/0.949 + 0.260/0.764 = 0.830 < 1.0$$

So simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 30cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antennas arrangement, which was permanently attached and the antenna gain is ANT 1 :3.1dBi; ANT 2 :1.3dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

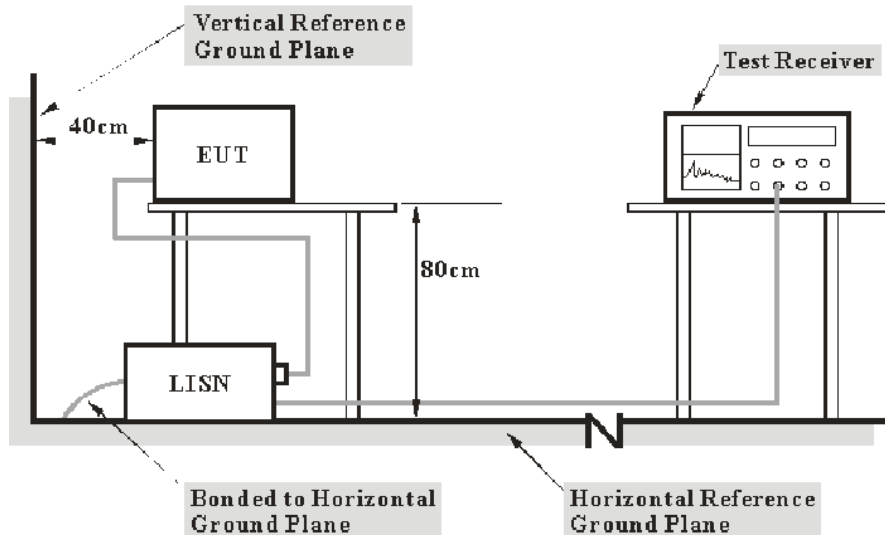

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23°C
Relative Humidity:	52%
ATM Pressure:	101.0 kPa

The testing was performed by Lipa on 2023-02-10.

EUT operation mode: Transmitting (worst case is 802.11b, low channel)


AC 120V/60 Hz, Line

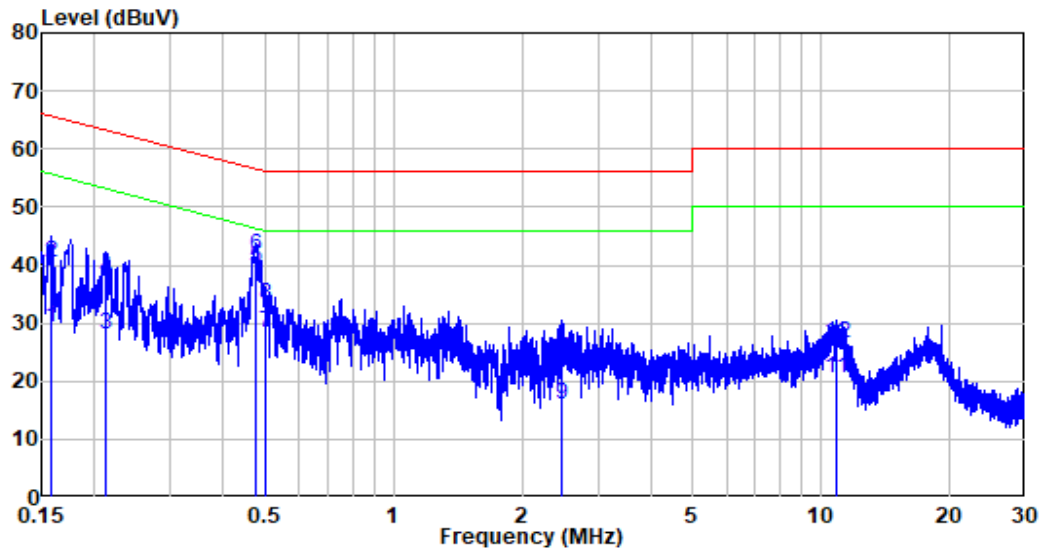

Site : Shielding Room
 Condition: Line
 Job No. : RA230104-00558E-RF
 Mode : 2.4G Wifi
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB
1	0.158	9.90	19.50	29.40	55.56	-26.16 Average
2	0.158	9.90	30.49	40.39	65.56	-25.17 QP
3	0.211	9.89	18.19	28.08	53.16	-25.08 Average
4	0.211	9.89	27.97	37.86	63.16	-25.30 QP
5	0.475	9.81	29.83	39.64	46.42	-6.78 Average
6	0.475	9.81	31.82	41.63	56.42	-14.79 QP
7	0.500	9.80	18.48	28.28	46.00	-17.72 Average
8	0.500	9.80	23.32	33.12	56.00	-22.88 QP
9	2.479	9.92	6.17	16.09	46.00	-29.91 Average
10	2.479	9.92	13.80	23.72	56.00	-32.28 QP
11	10.847	10.01	10.56	20.57	50.00	-29.43 Average
12	10.847	10.01	16.61	26.62	60.00	-33.38 QP

AC 120V/60 Hz, Neutral

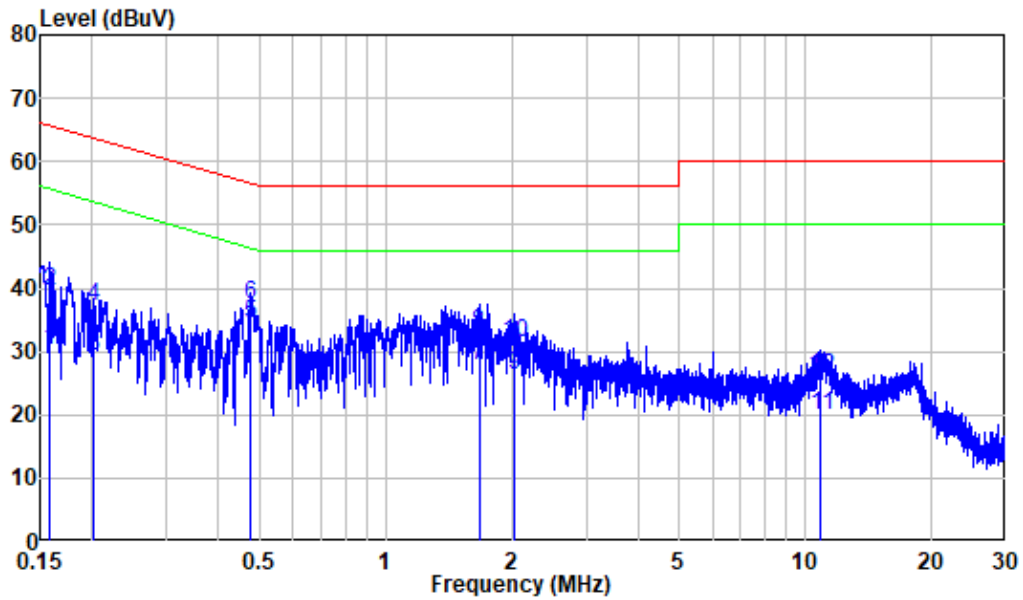

Site : Shielding Room
 Condition: Neutral
 Job No. : RA230104-00558E-RF
 Mode : 2.4G Wifi
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.80	20.38	30.18	55.56	-25.38	Average
2	0.158	9.80	29.67	39.47	65.56	-26.09	QP
3	0.201	9.80	19.47	29.27	53.57	-24.30	Average
4	0.201	9.80	27.37	37.17	63.57	-26.40	QP
5	0.475	9.89	24.47	34.36	46.42	-12.06	Average
6	0.475	9.89	27.61	37.50	56.42	-18.92	QP
7	1.667	9.82	18.03	27.85	46.00	-18.15	Average
8	1.667	9.82	22.98	32.80	56.00	-23.20	QP
9	2.029	9.82	16.49	26.31	46.00	-19.69	Average
10	2.029	9.82	21.52	31.34	56.00	-24.66	QP
11	10.862	10.01	10.04	20.05	50.00	-29.95	Average
12	10.862	10.01	15.96	25.97	60.00	-34.03	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

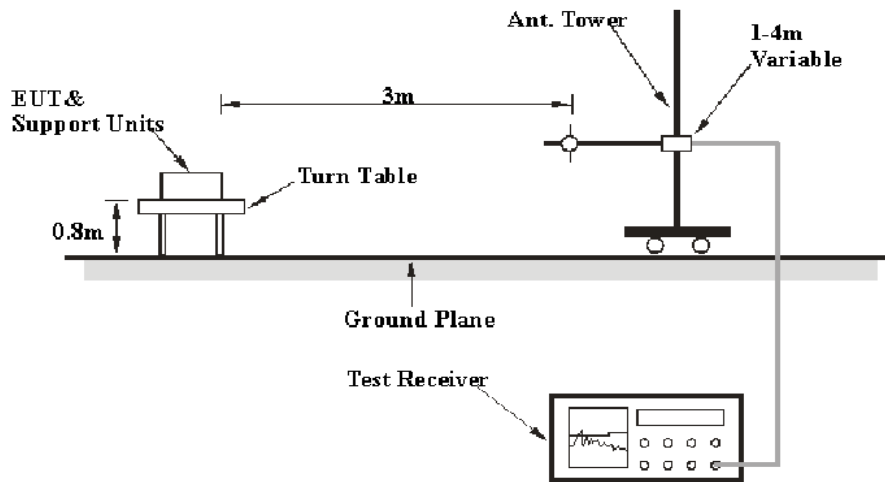

Above 1GHz:

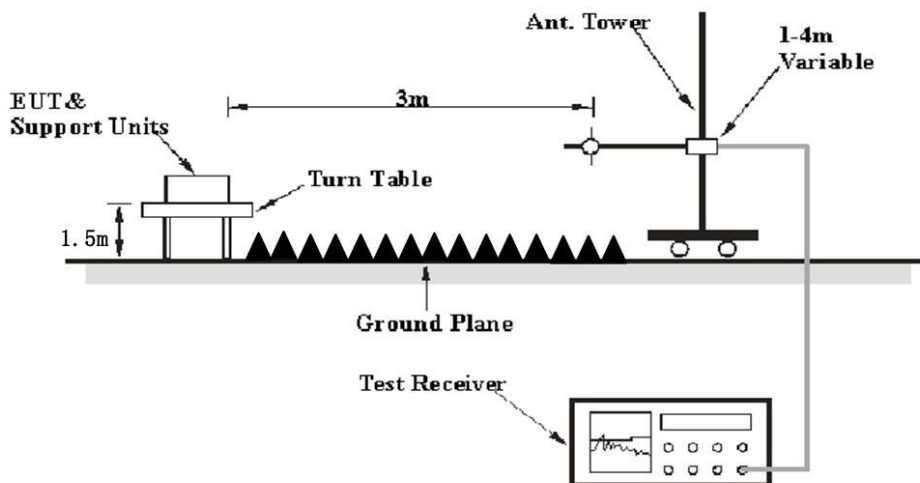

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a overlimit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	24~25.5°C
Relative Humidity:	52~59%
ATM Pressure:	101.0 kPa

The testing was performed by Jimi Zheng on 2023-02-13 for below 1GHz and on 2023-01-12 for above 1GHz. EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded)

30MHz-1GHz: (Worst case is 802.11b mode, low Channel)

Note: When the result of Peak less than the limit of QP by more than 6dB, just the peak value was recorded.


Horizontal

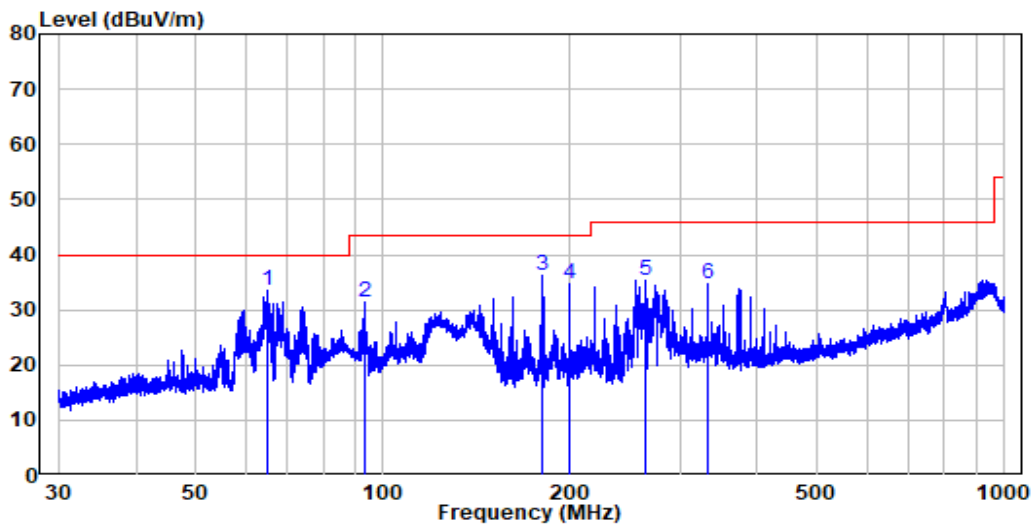

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230104-00558E-RF
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	65.029	-12.52	45.89	33.37	40.00	-6.63	Peak
2	93.563	-12.82	44.13	31.31	43.50	-12.19	Peak
3	180.807	-12.68	48.78	36.10	43.50	-7.40	Peak
4	199.810	-11.41	45.98	34.57	43.50	-8.93	Peak
5	264.862	-10.46	45.70	35.24	46.00	-10.76	Peak
6	333.394	-7.74	42.51	34.77	46.00	-11.23	Peak

Vertical

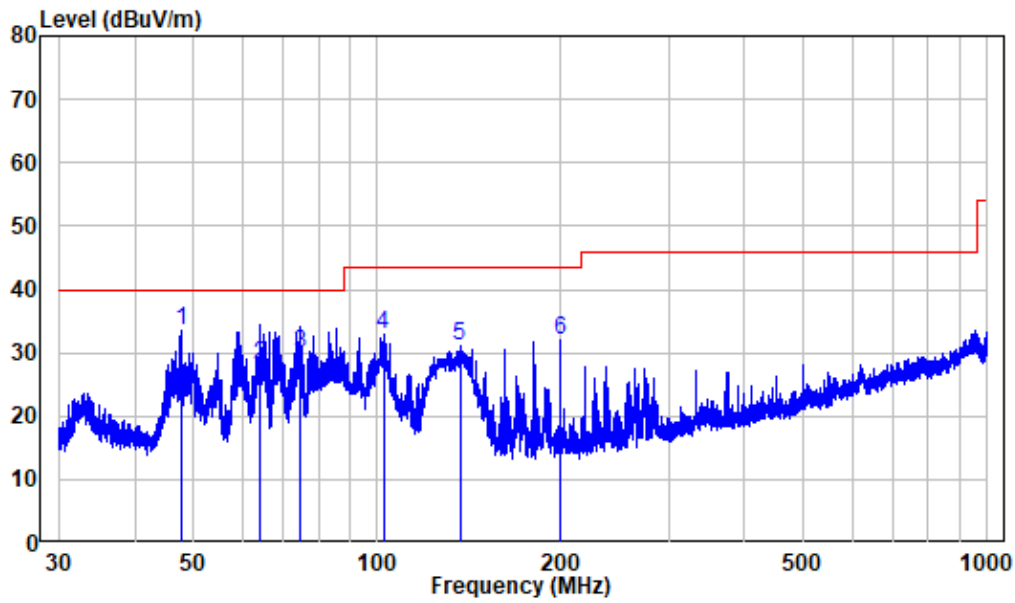

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230104-00558E-RF
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.596	-10.00	43.43	33.43	40.00	-6.57	Peak
2	64.264	-12.24	40.39	28.15	40.00	-11.85	QP
3	74.559	-16.15	46.10	29.95	40.00	-10.05	QP
4	102.270	-11.60	44.58	32.98	43.50	-10.52	Peak
5	136.520	-15.15	46.23	31.08	43.50	-12.42	Peak
6	199.810	-11.41	43.42	32.01	43.50	-11.49	Peak

1-25 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11b									
Low Channel 2412MHz									
2310	61.46	PK	42	2.5	H	-7.24	54.22	74	-19.78
2310	48.02	AV	42	2.5	H	-7.24	40.78	54	-13.22
2310	61.31	PK	18	1.1	V	-7.24	54.07	74	-19.93
2310	47.85	AV	18	1.1	V	-7.24	40.61	54	-13.39
2390	68.90	PK	109	1.4	H	-7.22	61.68	74	-12.32
2390	54.11	AV	109	1.4	H	-7.22	46.89	54	-7.11
2390	67.65	PK	316	1.8	V	-7.22	60.43	74	-13.57
2390	52.54	AV	316	1.8	V	-7.22	45.32	54	-8.68
4824	58.43	PK	243	1.3	H	-3.52	54.91	74	-19.09
4824	43.81	AV	243	1.3	H	-3.52	40.29	54	-13.71
4824	59.12	PK	156	2	V	-3.52	55.60	74	-18.40
4824	45.24	AV	156	2	V	-3.52	41.72	54	-12.28
Middle Channel 2437MHz									
4874	57.83	PK	25	1.1	H	-3.42	54.41	74	-19.59
4874	43.32	AV	25	1.1	H	-3.42	39.9	54	-14.10
4874	58.11	PK	329	2.5	V	-3.42	54.69	74	-19.31
4874	43.54	AV	329	2.5	V	-3.42	40.12	54	-13.88
High Channel 2462MHz									
2483.5	66.76	PK	80	1.4	H	-7.20	59.56	74	-14.44
2483.5	52.24	AV	80	1.4	H	-7.20	45.04	54	-8.96
2483.5	66.19	PK	94	1.3	V	-7.20	58.99	74	-15.01
2483.5	51.41	AV	94	1.3	V	-7.20	44.21	54	-9.79
2500	63.25	PK	192	1.4	H	-7.18	56.07	74	-17.93
2500	49.81	AV	192	1.4	H	-7.18	42.63	54	-11.37
2500	63.10	PK	252	1.3	V	-7.18	55.92	74	-18.08
2500	49.68	AV	252	1.3	V	-7.18	42.5	54	-11.50
4924	58.19	PK	220	1.7	H	-3.16	55.03	74	-18.97
4924	43.54	AV	220	1.7	H	-3.16	40.38	54	-13.62
4924	58.65	PK	308	2.2	V	-3.16	55.49	74	-18.51
4924	44.16	AV	308	2.2	V	-3.16	41.00	54	-13.00

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11g									
Low Channel 2412MHz									
2310	61.92	PK	352	1.7	H	-7.24	54.68	74	-19.32
2310	48.88	AV	352	1.7	H	-7.24	41.64	54	-12.36
2310	61.71	PK	272	2.4	V	-7.24	54.47	74	-19.53
2310	48.65	AV	272	2.4	V	-7.24	41.41	54	-12.59
2390	77.33	PK	55	2.2	H	-7.22	70.11	74	-3.89
2390	54.74	AV	55	2.2	H	-7.22	47.52	54	-6.48
2390	76.90	PK	52	2	V	-7.22	69.68	74	-4.32
2390	54.51	AV	52	2	V	-7.22	47.29	54	-6.71
4824	58.04	PK	206	1.2	H	-3.52	54.52	74	-19.48
4824	44.22	AV	206	1.2	H	-3.52	40.70	54	-13.30
4824	58.31	PK	219	1.1	V	-3.52	54.79	74	-19.21
4824	44.39	AV	219	1.1	V	-3.52	40.87	54	-13.13
Middle Channel 2437MHz									
4874	57.89	PK	336	1.1	H	-3.42	54.47	74	-19.53
4874	44.16	AV	336	1.1	H	-3.42	40.74	54	-13.26
4874	58.12	PK	203	1.5	V	-3.42	54.7	74	-19.30
4874	44.31	AV	203	1.5	V	-3.42	40.89	54	-13.11
High Channel 2462MHz									
2483.5	77.21	PK	236	1.5	H	-7.20	70.01	74	-3.99
2483.5	55.03	AV	236	1.5	H	-7.20	47.83	54	-6.17
2483.5	76.87	PK	152	1.2	V	-7.20	69.67	74	-4.33
2483.5	53.80	AV	152	1.2	V	-7.20	46.6	54	-7.40
2500	63.56	PK	169	1.1	H	-7.18	56.38	74	-17.62
2500	50.47	AV	169	1.1	H	-7.18	43.29	54	-10.71
2500	63.40	PK	145	1	V	-7.18	56.22	74	-17.78
2500	50.34	AV	145	1	V	-7.18	43.16	54	-10.84
4924	57.44	PK	279	2.1	H	-3.16	54.28	74	-19.72
4924	43.87	AV	279	2.1	H	-3.16	40.71	54	-13.29
4924	57.69	PK	332	1.5	V	-3.16	54.53	74	-19.47
4924	44.01	AV	332	1.5	V	-3.16	40.85	54	-13.15

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
Low Channel 2412MHz									
2310	62.54	PK	311	1.9	H	-7.24	55.30	74	-18.70
2310	48.97	AV	311	1.9	H	-7.24	41.73	54	-12.27
2310	62.40	PK	176	1.1	V	-7.24	55.16	74	-18.84
2310	48.86	AV	176	1.1	V	-7.24	41.62	54	-12.38
2390	77.13	PK	94	1.8	H	-7.22	69.91	74	-4.09
2390	58.80	AV	94	1.8	H	-7.22	51.58	54	-2.42
2390	76.02	PK	126	1.4	V	-7.22	68.80	74	-5.20
2390	57.89	AV	126	1.4	V	-7.22	50.67	54	-3.33
4824	57.90	PK	9	1.8	H	-3.52	54.38	74	-19.62
4824	44.17	AV	9	1.8	H	-3.52	40.65	54	-13.35
4824	58.13	PK	16	2.2	V	-3.52	54.61	74	-19.39
4824	44.39	AV	16	2.2	V	-3.52	40.87	54	-13.13
Middle Channel 2437MHz									
4874	57.94	PK	44	2.2	H	-3.42	54.52	74	-19.48
4874	44.26	AV	44	2.2	H	-3.42	40.84	54	-13.16
4874	58.17	PK	176	1.1	V	-3.42	54.75	74	-19.25
4874	44.43	AV	176	1.1	V	-3.42	41.01	54	-12.99
High Channel 2462MHz									
2483.5	77.79	PK	31	1.3	H	-7.20	70.59	74	-3.41
2483.5	58.68	AV	31	1.3	H	-7.20	51.48	54	-2.52
2483.5	76.60	PK	242	1.3	V	-7.20	69.4	74	-4.60
2483.5	58.12	AV	242	1.3	V	-7.20	50.92	54	-3.08
2500	63.39	PK	334	1.8	H	-7.18	56.21	74	-17.79
2500	49.82	AV	334	1.8	H	-7.18	42.64	54	-11.36
2500	63.21	PK	130	1.8	V	-7.18	56.03	74	-17.97
2500	49.68	AV	130	1.8	V	-7.18	42.5	54	-11.50
4924	57.50	PK	63	2	H	-3.16	54.34	74	-19.66
4924	43.86	AV	63	2	H	-3.16	40.70	54	-13.30
4924	57.78	PK	123	1.5	V	-3.16	54.62	74	-19.38
4924	44.09	AV	123	1.5	V	-3.16	40.93	54	-13.07

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ax20									
Low Channel 2412MHz									
2310	62.73	PK	207	2.4	H	-7.24	55.49	74	-18.51
2310	49.12	AV	207	2.4	H	-7.24	41.88	54	-12.12
2310	62.51	PK	5	2.3	V	-7.24	55.27	74	-18.73
2310	49.00	AV	5	2.3	V	-7.24	41.76	54	-12.24
2390	75.04	PK	319	1.7	H	-7.22	67.82	74	-6.18
2390	56.15	AV	319	1.7	H	-7.22	48.93	54	-5.07
2390	73.81	PK	355	1.6	V	-7.22	66.59	74	-7.41
2390	55.17	AV	355	1.6	V	-7.22	47.95	54	-6.05
4824	58.24	PK	108	1.4	H	-3.52	54.72	74	-19.28
4824	44.20	AV	108	1.4	H	-3.52	40.68	54	-13.32
4824	58.47	PK	206	1.8	V	-3.52	54.95	74	-19.05
4824	44.38	AV	206	1.8	V	-3.52	40.86	54	-13.14
Middle Channel 2437MHz									
4874	58.14	PK	258	1.7	H	-3.42	54.72	74	-19.28
4874	44.20	AV	258	1.7	H	-3.42	40.78	54	-13.22
4874	58.39	PK	293	1.1	V	-3.42	54.97	74	-19.03
4874	44.35	AV	293	1.1	V	-3.42	40.93	54	-13.07
High Channel 2462MHz									
2483.5	75.00	PK	196	1.4	H	-7.20	67.8	74	-6.20
2483.5	55.82	AV	196	1.4	H	-7.20	48.62	54	-5.38
2483.5	73.87	PK	302	1.1	V	-7.20	66.67	74	-7.33
2483.5	55.44	AV	302	1.1	V	-7.20	48.24	54	-5.76
2500	63.49	PK	282	1.2	H	-7.18	56.31	74	-17.69
2500	50.91	AV	282	1.2	H	-7.18	43.73	54	-10.27
2500	63.28	PK	221	1.6	V	-7.18	56.1	74	-17.90
2500	50.74	AV	221	1.6	V	-7.18	43.56	54	-10.44
4924	57.64	PK	220	2.2	H	-3.16	54.48	74	-19.52
4924	43.83	AV	220	2.2	H	-3.16	40.67	54	-13.33
4924	57.87	PK	112	1.6	V	-3.16	54.71	74	-19.29
4924	44.00	AV	112	1.6	V	-3.16	40.84	54	-13.16

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading


Margin = Absolute Level - Limit

The other spurious emission which is 20dB below to the limit was not recorded.


1-18 GHz:

Pre-scan Plots:

802.11 b Low Channel
Horizontal

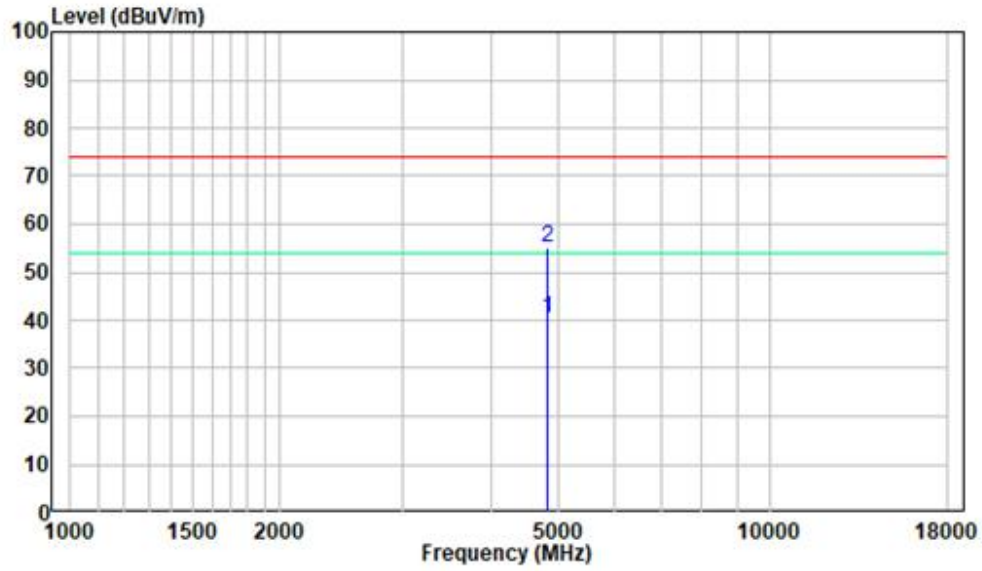


Vertical

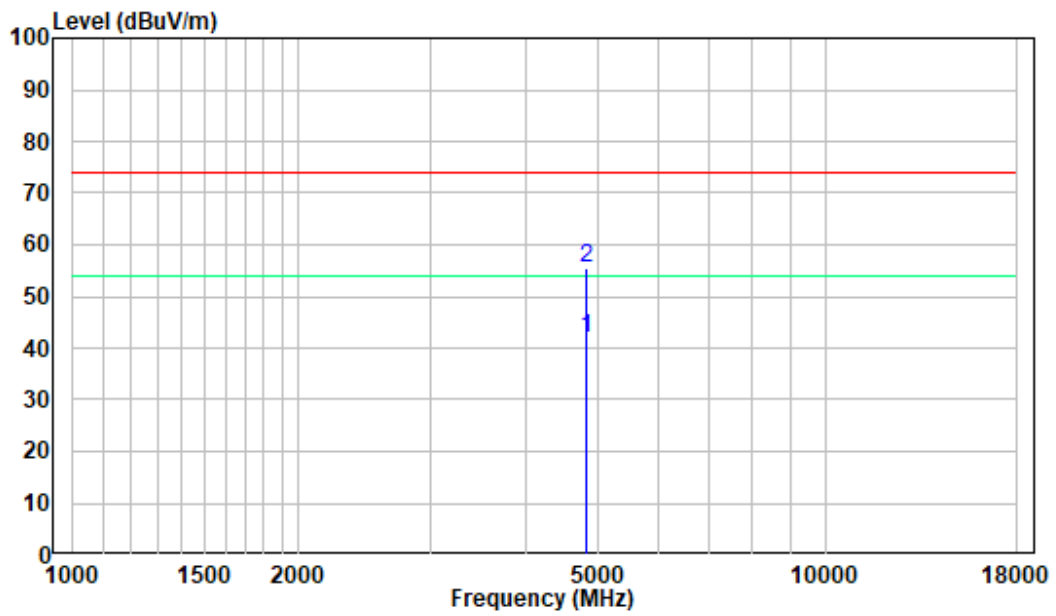


18 -25GHz:

Pre-scan Plots:

802.11 b Low Channel
Horizontal

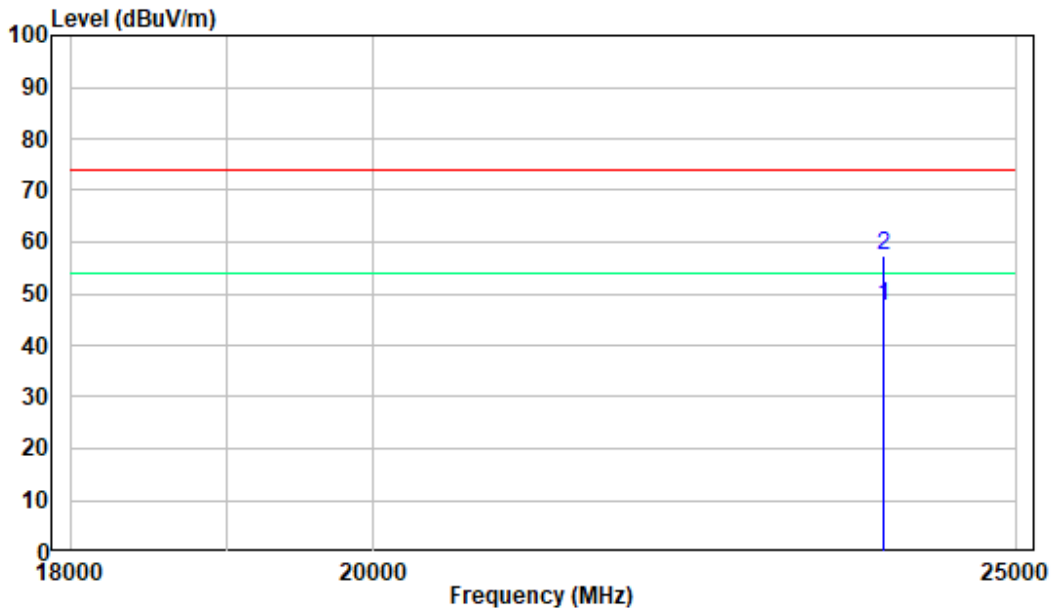

Vertical

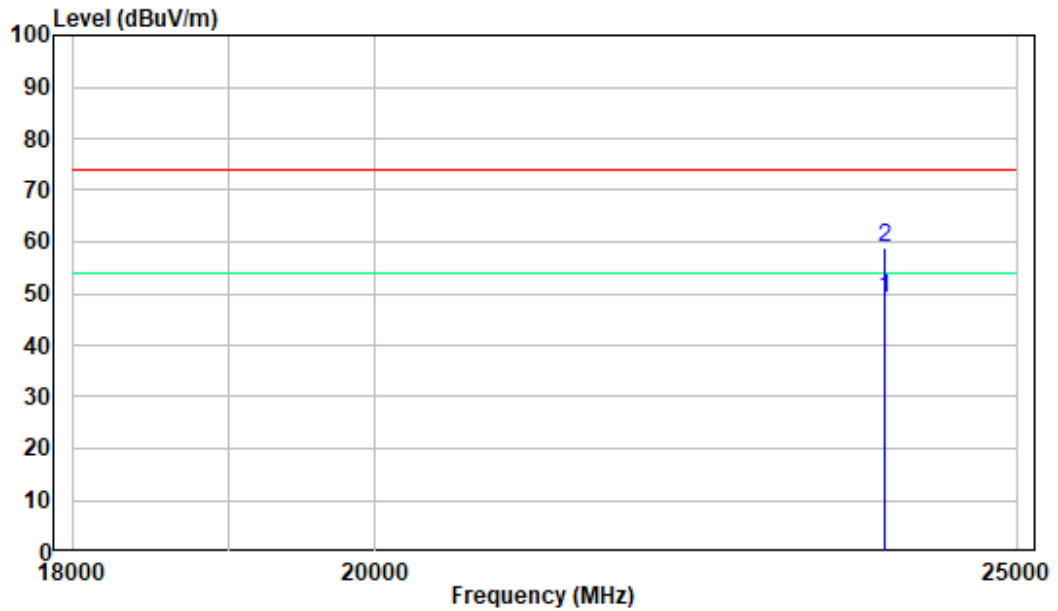

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

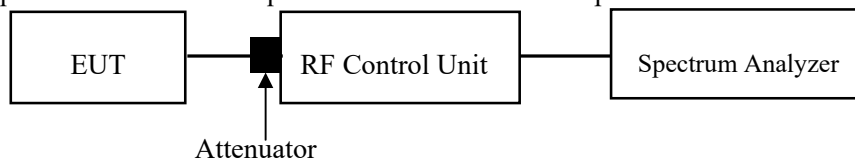

Test Data

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	56%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2023-02-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.2.3

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

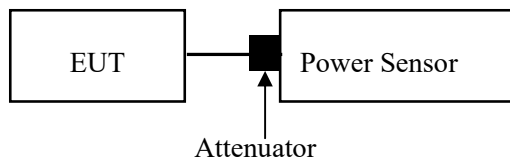

Test Data

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	56%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2023-02-15.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

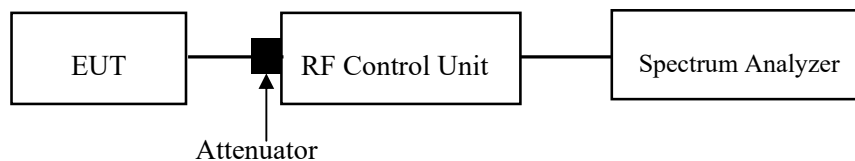

Test Data

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	56%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2023-02-15.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.3 & 11.10.5

Use this procedure when the maximum average conducted output power in the fundamental emission is used to demonstrate compliance.

1. Measure the duty cycle (D) of the transmitter output signal as described in ANSI C63.10-2013 11.6.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = Power Averaging (rms).
6. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
7. Sweep time = auto couple.
8. Trace mode = trace averaging (rms) mode over a minimum of 100 traces.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. When the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$), add $[10 \log (1 / D)]$, where D is the duty cycle measured in step 1), to the measured PSD to compute the average PSD during the actual transmission time.
12. When the EUT transmits continuously (or with a $D \geq 98\%$), step 11 is not required.
13. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

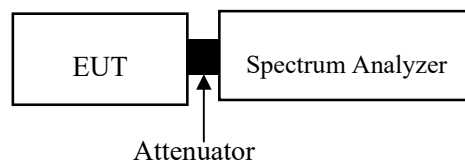

Test Data

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	56%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2023-03-01.




EUT operation mode: Transmitting




Test Result: Compliant. Please refer to the Appendix.




APPENDIX**Appendix A: DTS Bandwidth
Test Result**




Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	8.08	2407.48	2415.56	0.5	PASS
	Ant1	2437	7.28	2433.44	2440.72	0.5	PASS
	Ant1	2462	8.32	2457.48	2465.80	0.5	PASS
11G-CDD	Ant1	2412	16.00	2404.12	2420.12	0.5	PASS
	Ant1	2437	16.00	2428.88	2444.88	0.5	PASS
	Ant1	2462	16.32	2453.84	2470.16	0.5	PASS
11N20MIMO	Ant1	2412	16.60	2403.76	2420.36	0.5	PASS
	Ant1	2437	15.88	2429.44	2445.32	0.5	PASS
	Ant1	2462	17.56	2453.20	2470.76	0.5	PASS
11AX20MIMO	Ant1	2412	15.80	2404.04	2419.84	0.5	PASS
	Ant1	2437	15.72	2429.20	2444.92	0.5	PASS
	Ant1	2462	18.64	2452.72	2471.36	0.5	PASS

Test Graphs

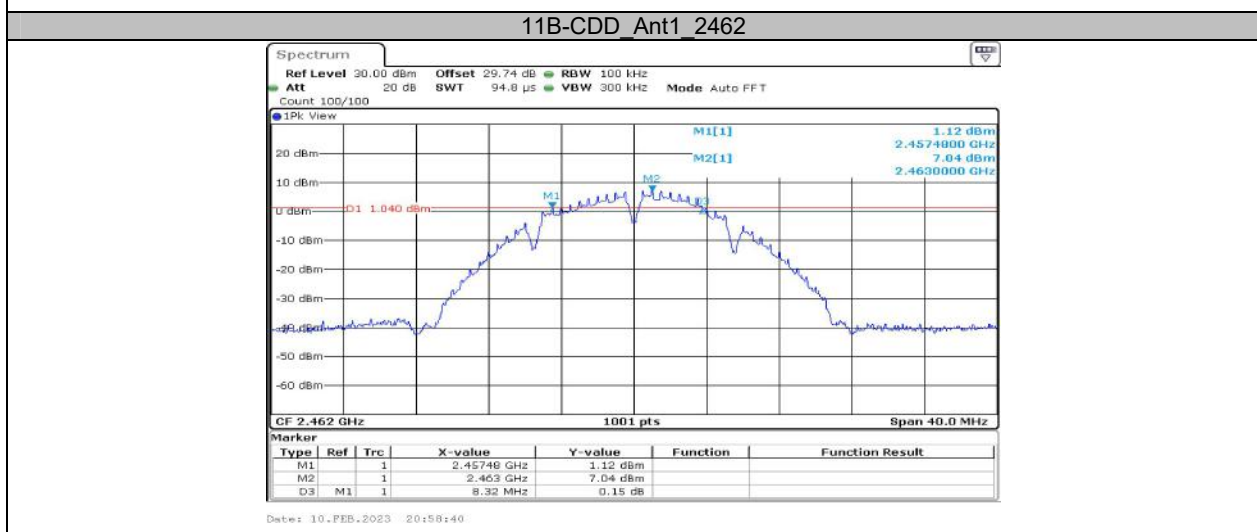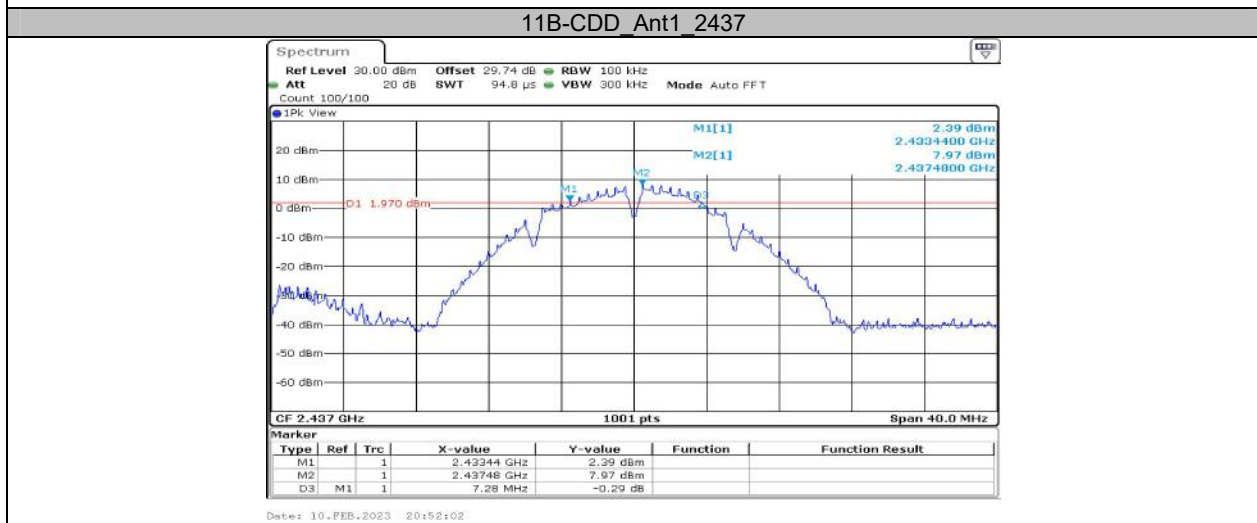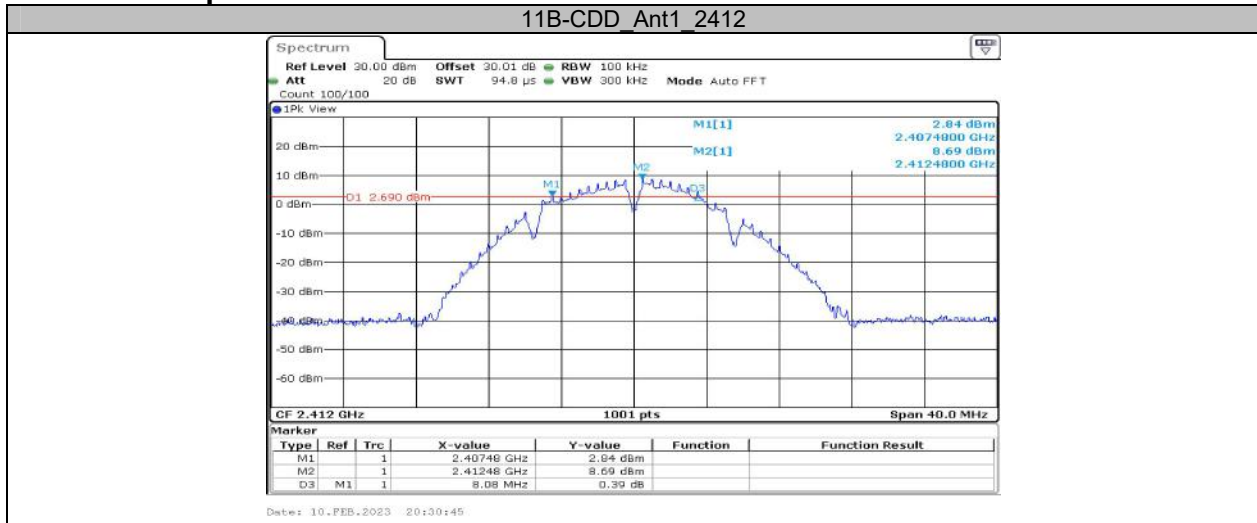

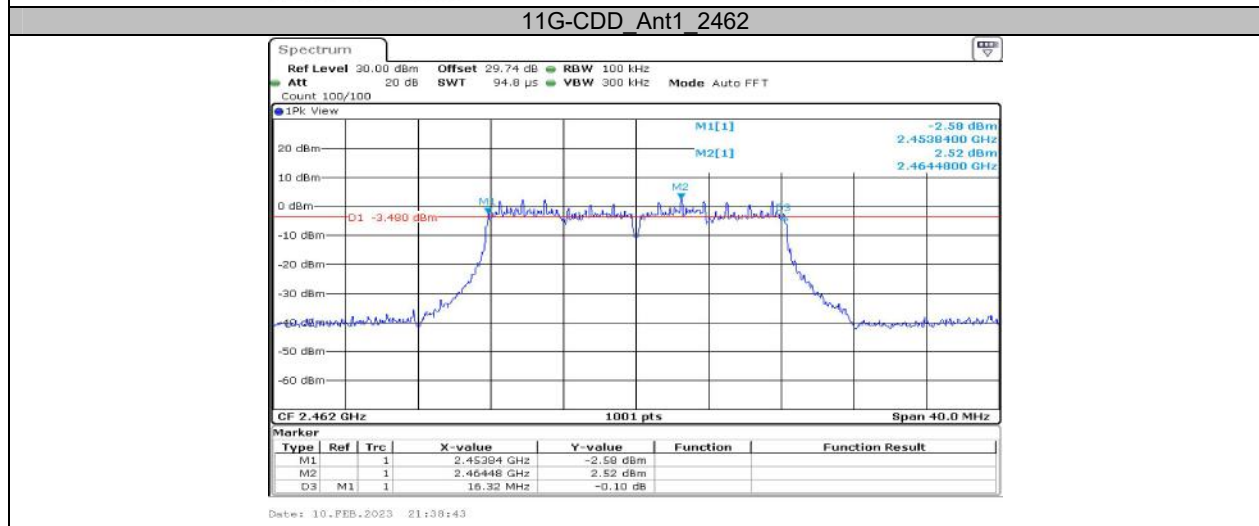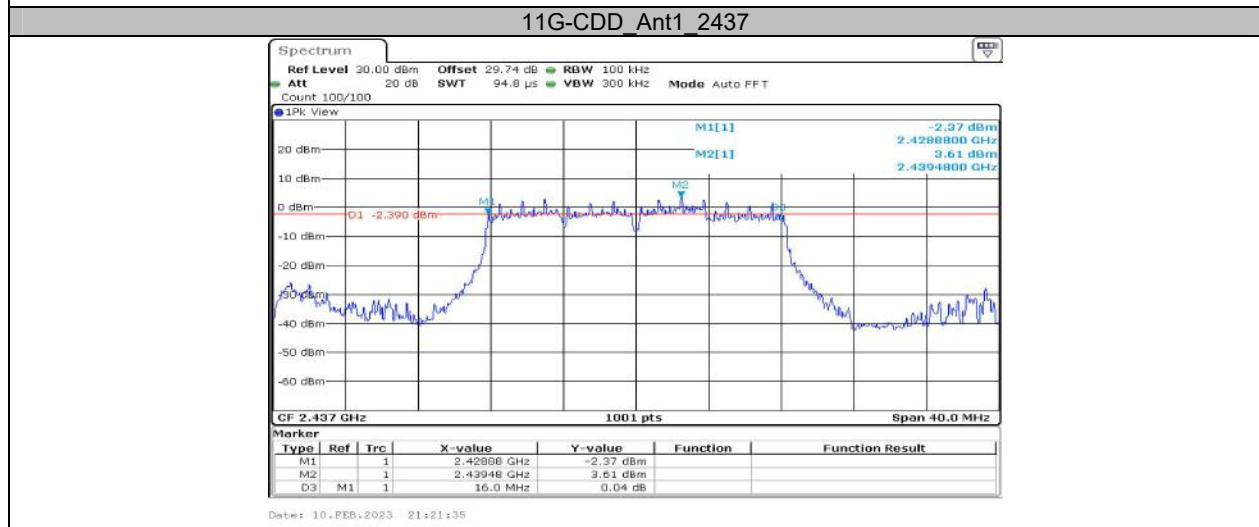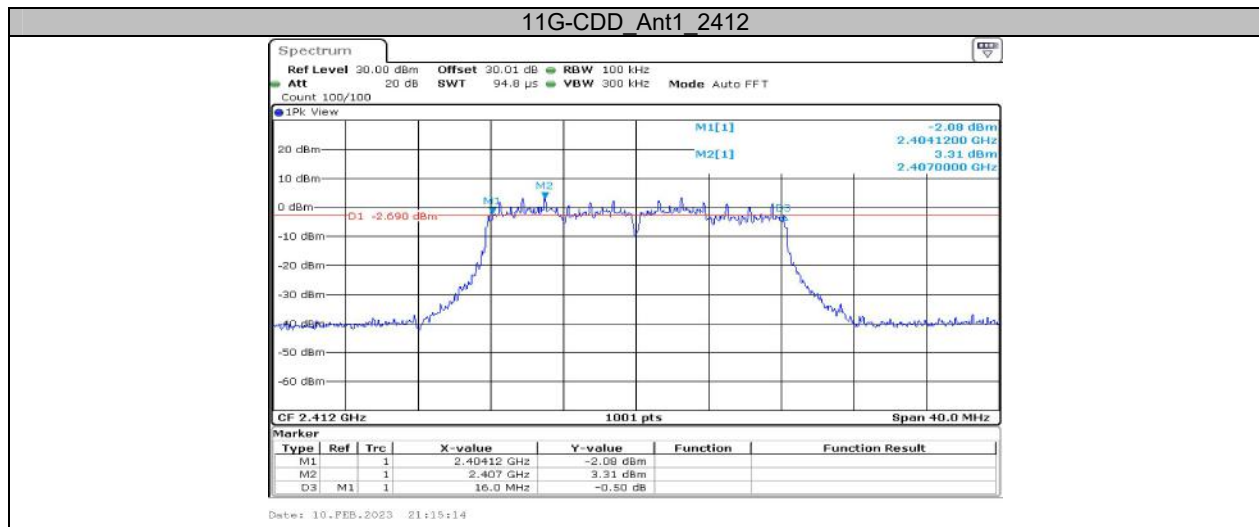

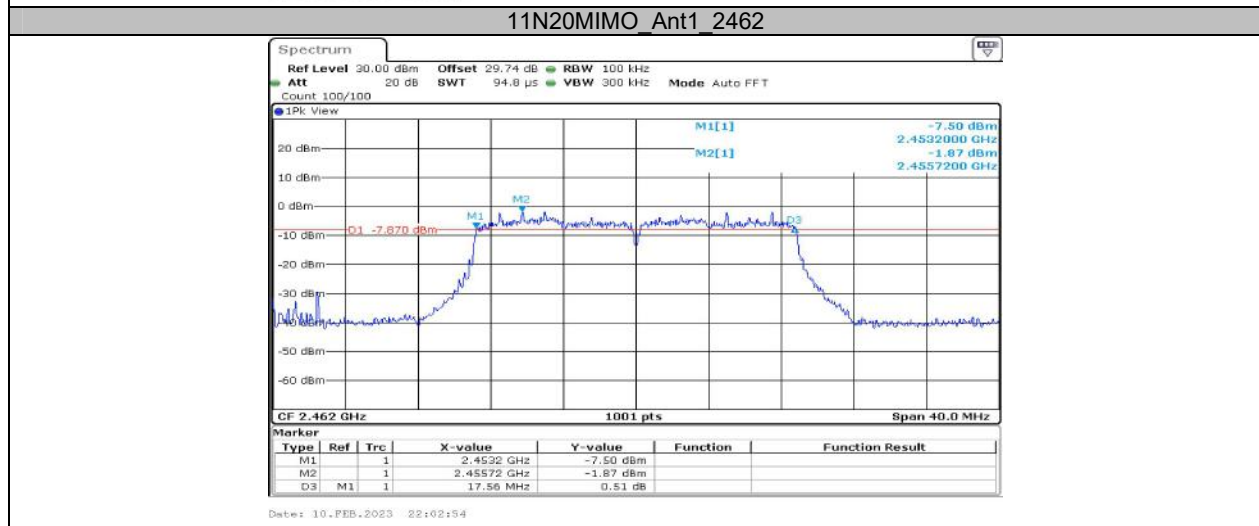
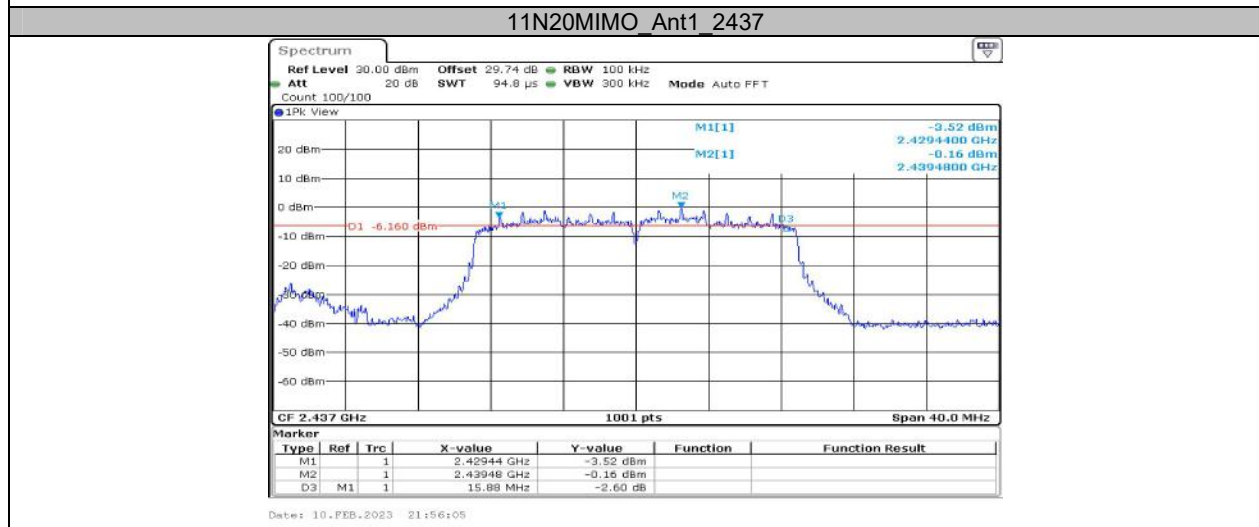
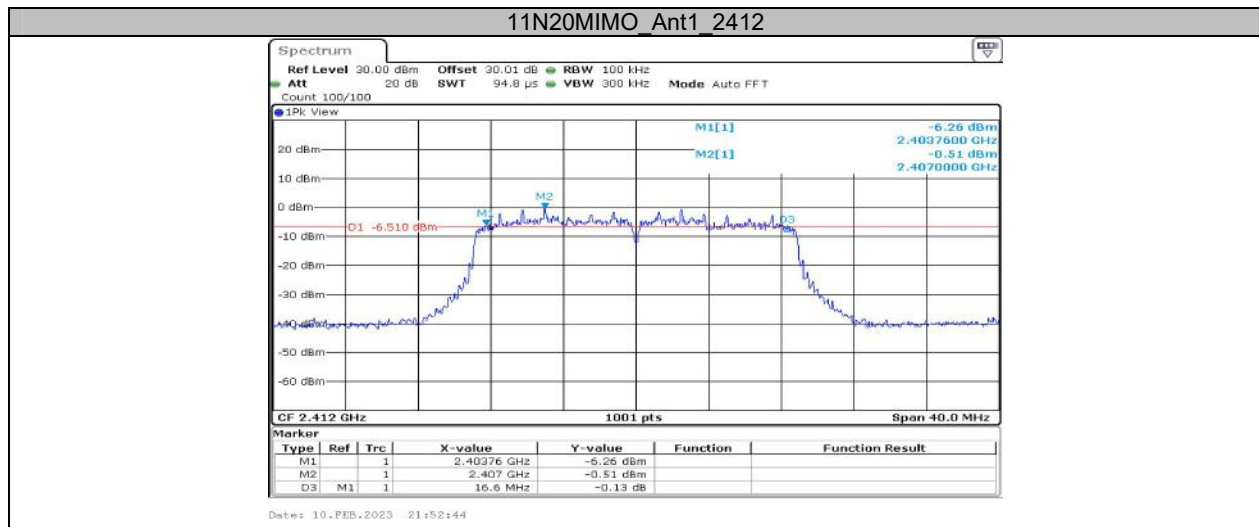


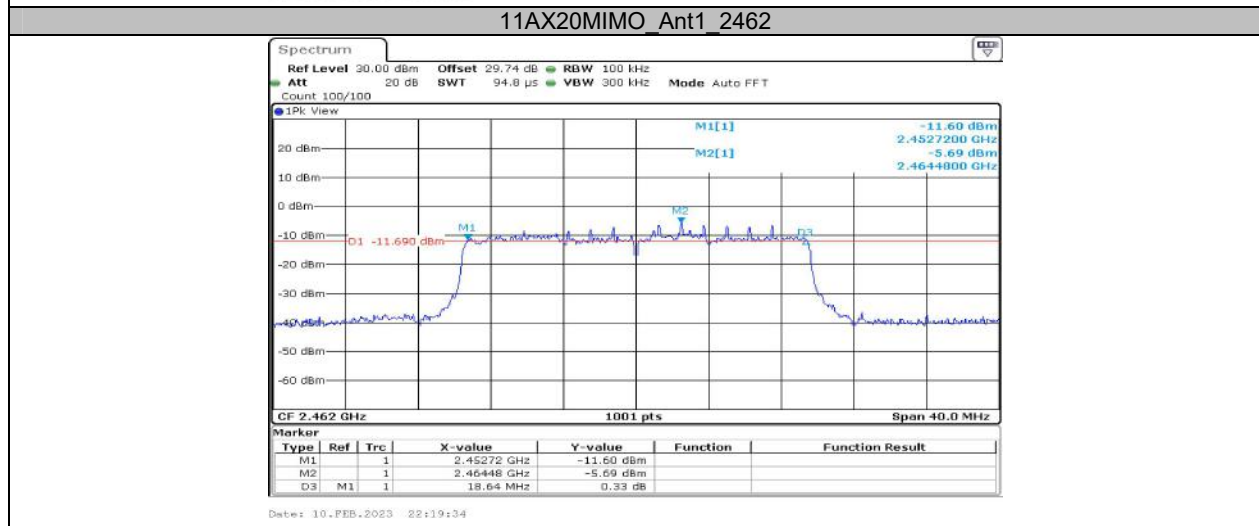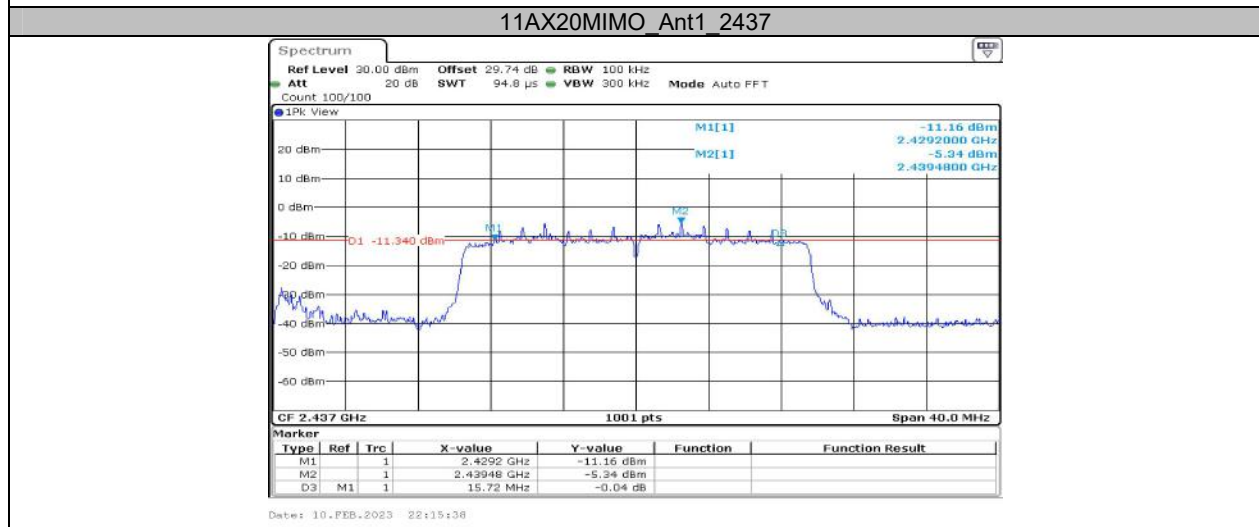
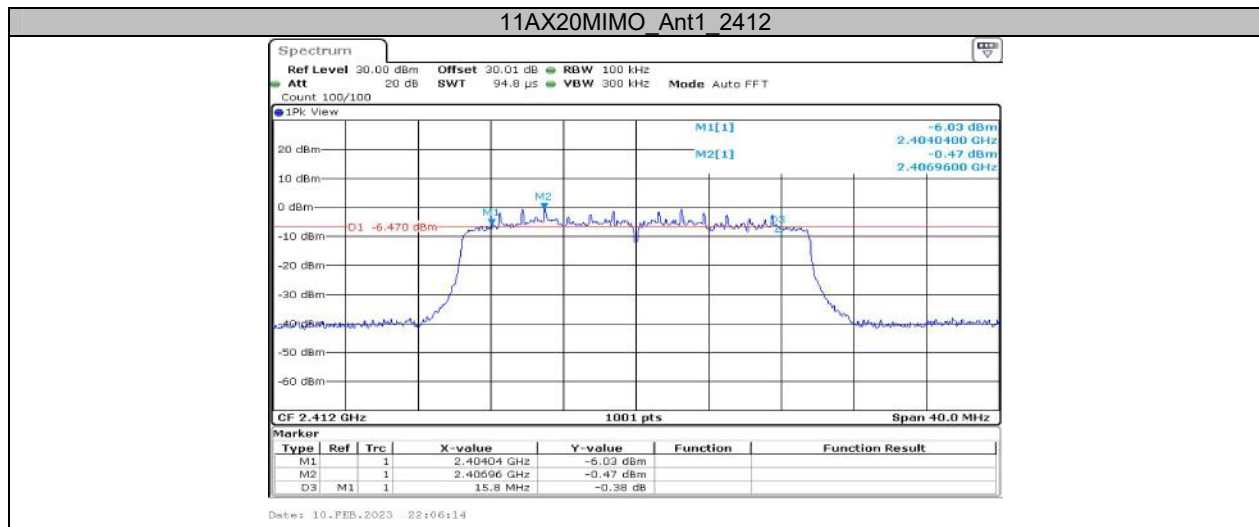





Appendix B: Occupied Channel Bandwidth Test Result




Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	13.227	2405.367	2418.593	---	---
	Ant1	2437	13.147	2430.447	2443.593	---	---
	Ant1	2462	13.467	2455.287	2468.753	---	---
11G-CDD	Ant1	2412	16.583	2403.728	2420.312	---	---
	Ant1	2437	16.583	2428.728	2445.312	---	---
	Ant1	2462	16.663	2453.688	2470.352	---	---
11N20MIMO	Ant1	2412	17.662	2403.209	2420.871	---	---
	Ant1	2437	17.662	2428.209	2445.871	---	---
	Ant1	2462	17.782	2453.129	2470.911	---	---
11AX20MIMO	Ant1	2412	18.981	2402.529	2421.510	---	---
	Ant1	2437	19.061	2427.490	2446.550	---	---
	Ant1	2462	19.181	2452.450	2471.630	---	---

Test Graphs

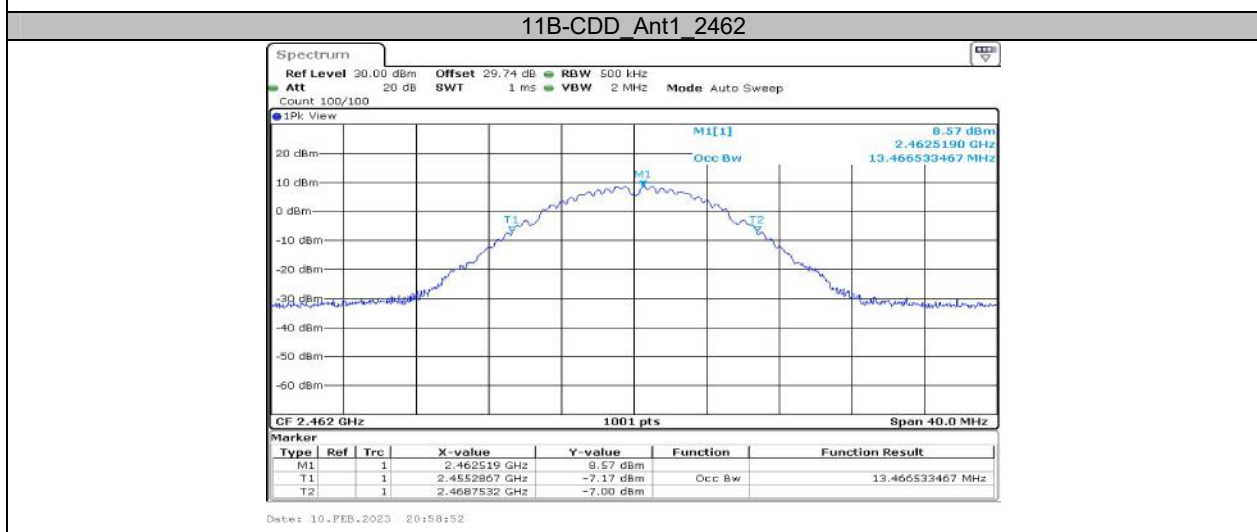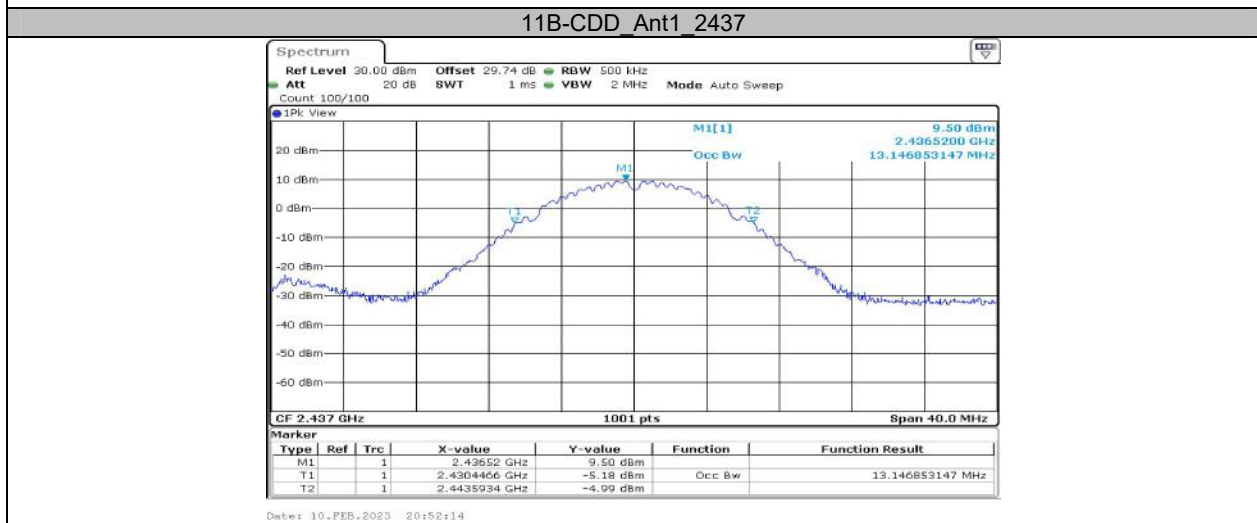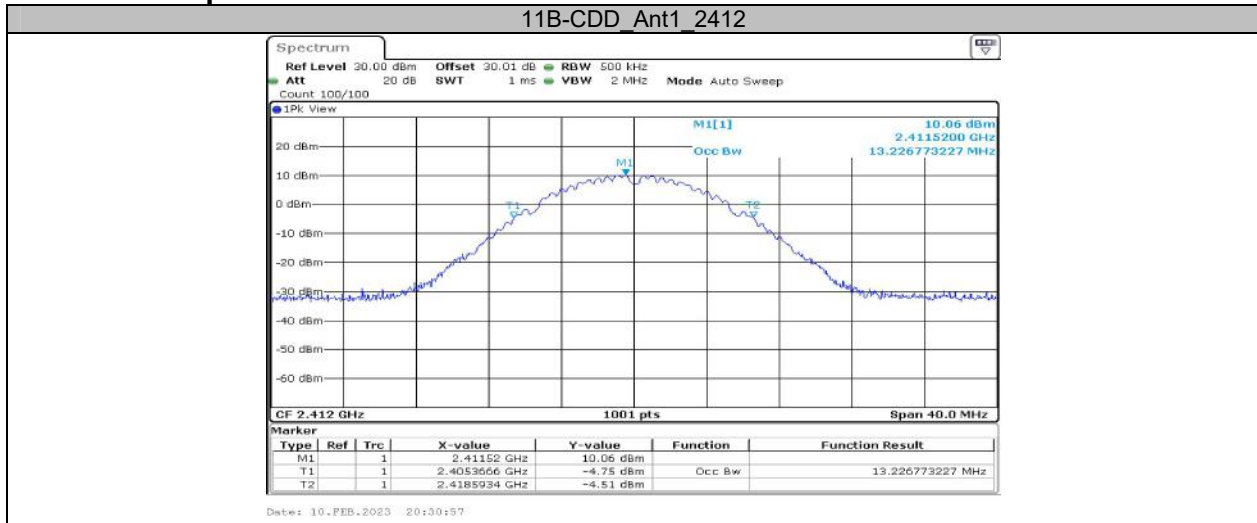

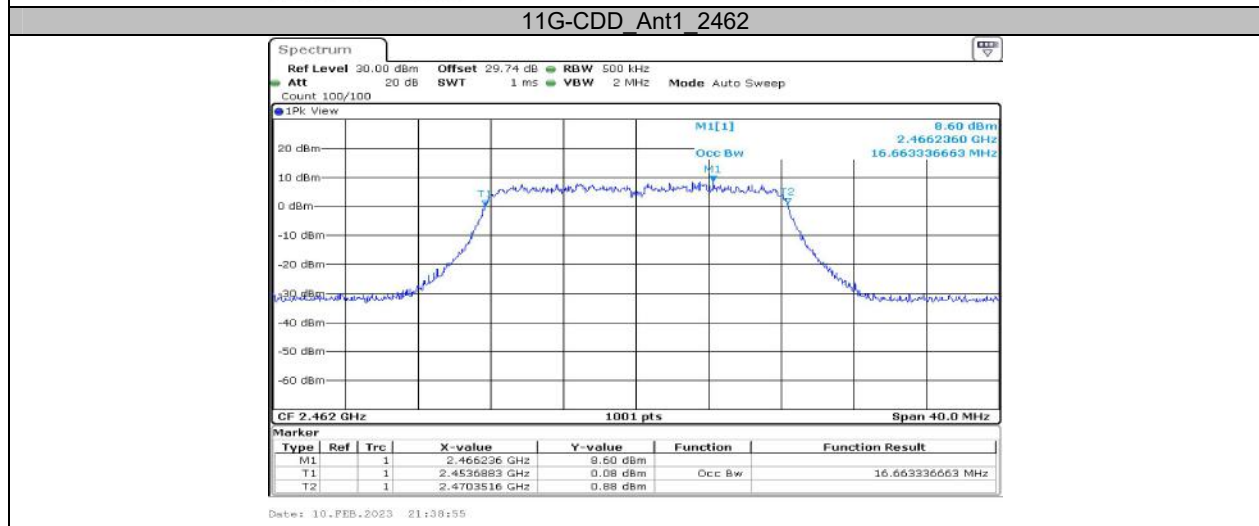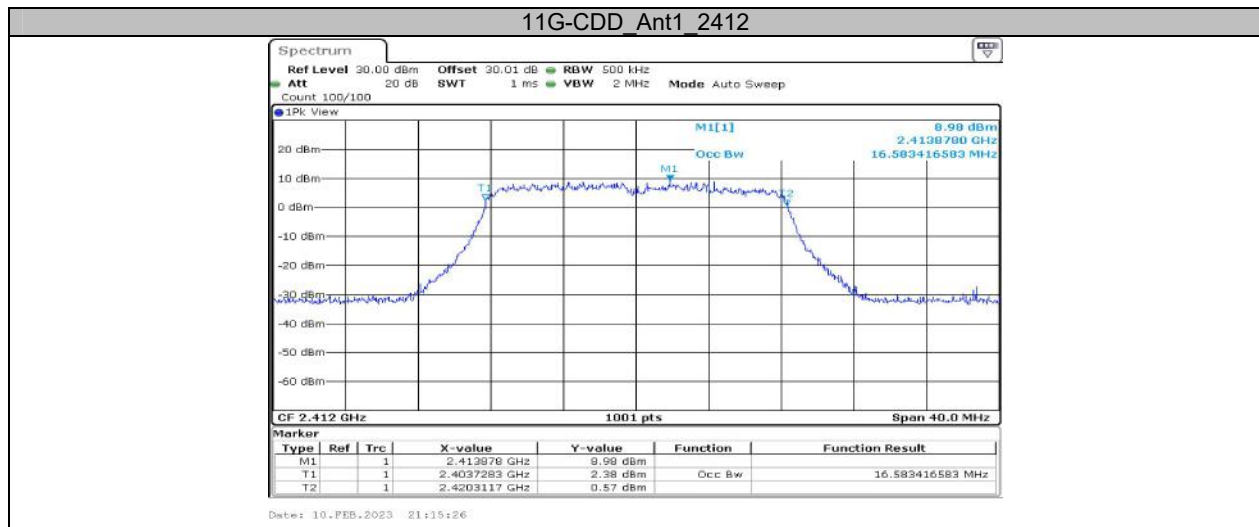

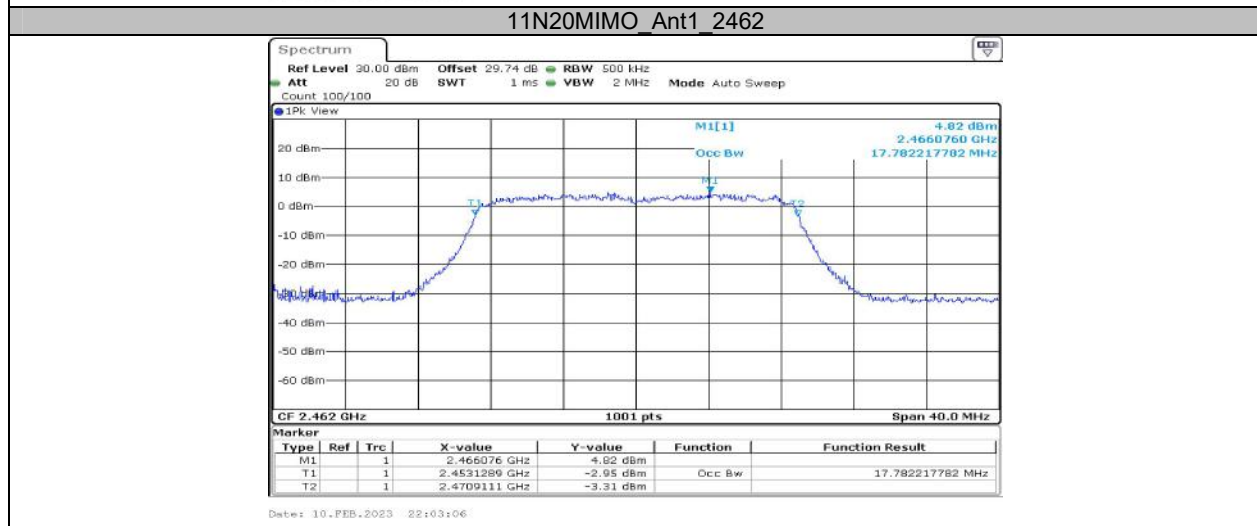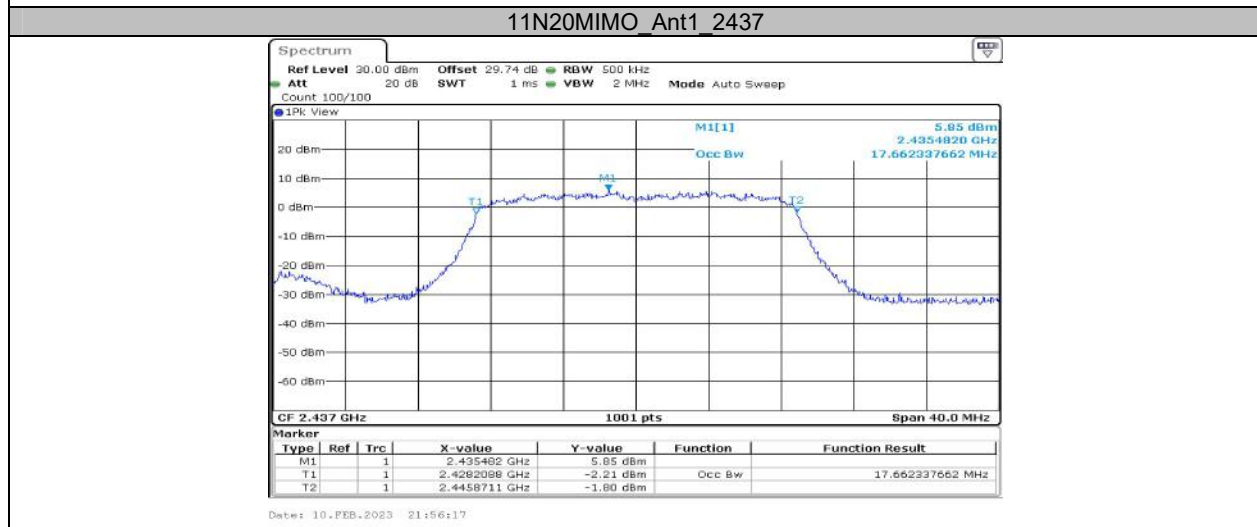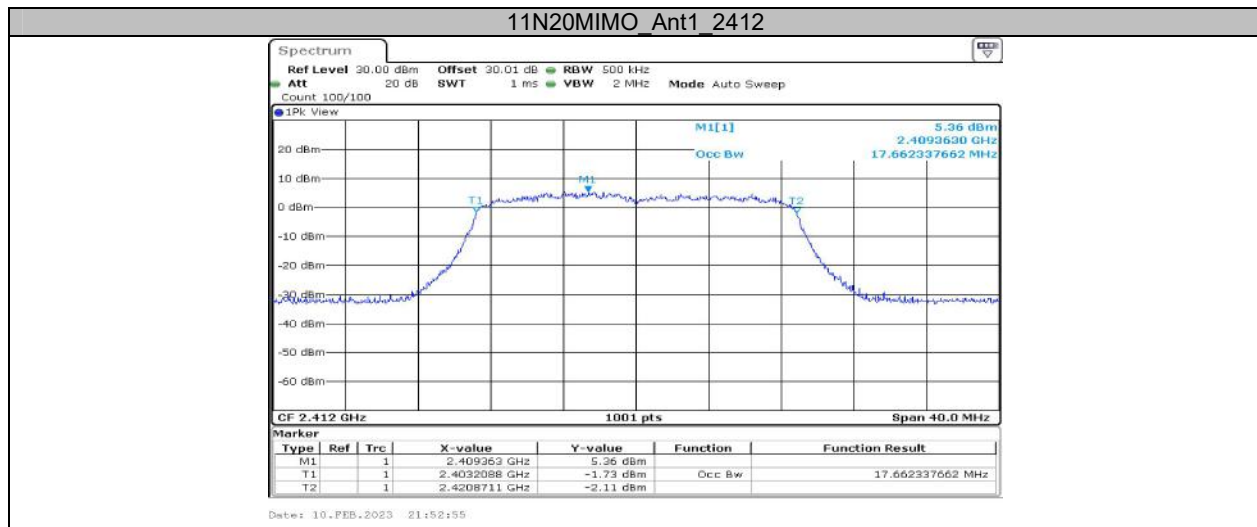

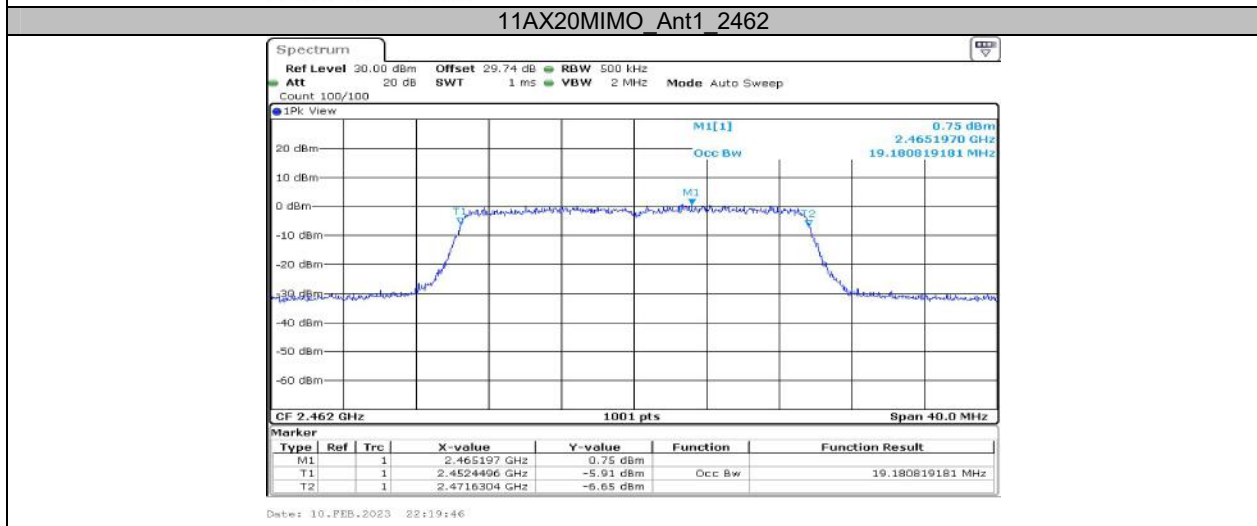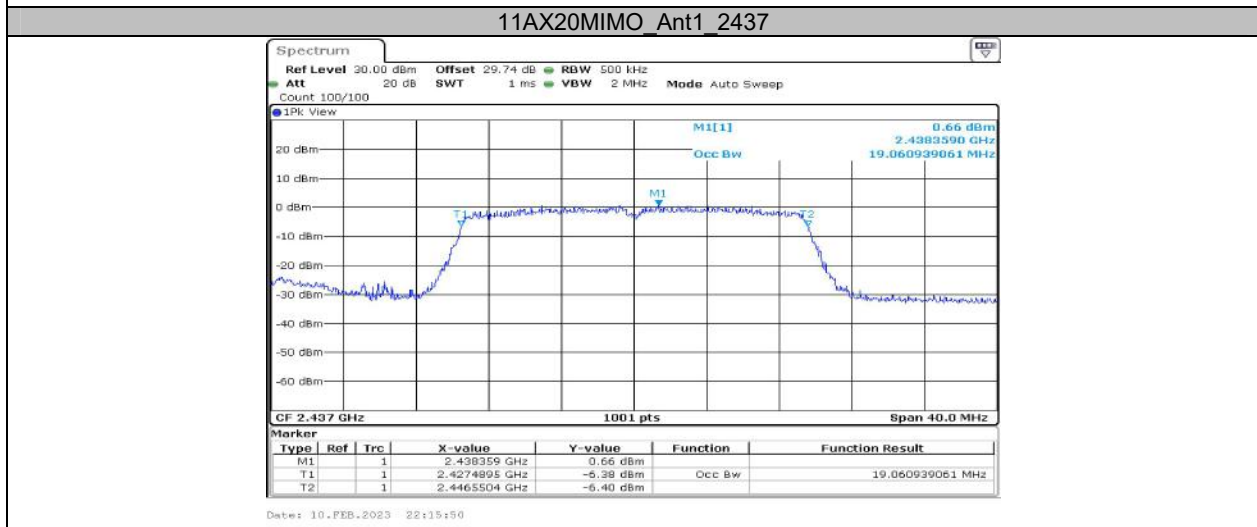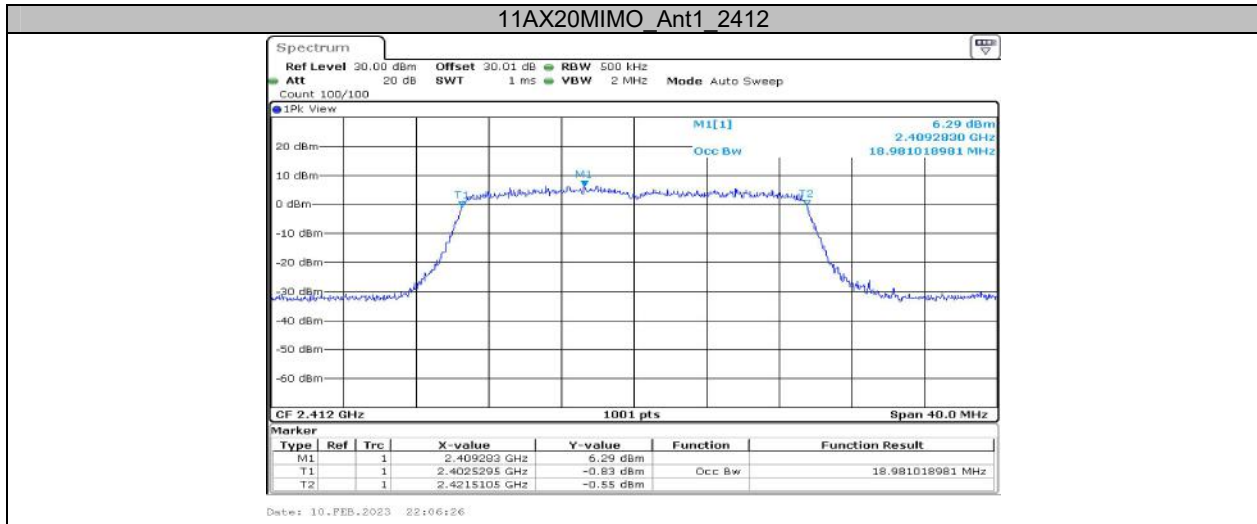

Appendix C: Maximum conducted output power Test Result

Test Mode	Antenna	Frequency[MHz]	Average Power [dBm]	Conducted Limit [dBm]	Verdict
11B-CDD	Ant1	2412	17.78	≤30.00	PASS
	Ant2	2412	18.12	≤30.00	PASS
	total	2412	20.96	≤30.00	PASS
	Ant1	2437	17.54	≤30.00	PASS
	Ant2	2437	18.55	≤30.00	PASS
	total	2437	21.08	≤30.00	PASS
	Ant1	2462	17.14	≤30.00	PASS
	Ant2	2462	18.42	≤30.00	PASS
	total	2462	20.84	≤30.00	PASS
11G-CDD	Ant1	2412	15.55	≤30.00	PASS
	Ant2	2412	16.32	≤30.00	PASS
	total	2412	18.96	≤30.00	PASS
	Ant1	2437	15.38	≤30.00	PASS
	Ant2	2437	16.12	≤30.00	PASS
	total	2437	18.78	≤30.00	PASS
	Ant1	2462	15.41	≤30.00	PASS
	Ant2	2462	16.12	≤30.00	PASS
	total	2462	18.79	≤30.00	PASS
11N20MIMO	Ant1	2412	14.18	≤30.00	PASS
	Ant2	2412	14.71	≤30.00	PASS
	total	2412	17.46	≤30.00	PASS
	Ant1	2437	14.04	≤30.00	PASS
	Ant2	2437	15.10	≤30.00	PASS
	total	2437	17.61	≤30.00	PASS
	Ant1	2462	13.90	≤30.00	PASS
	Ant2	2462	14.98	≤30.00	PASS
	total	2462	17.48	≤30.00	PASS
11AX20MIMO	Ant1	2412	11.10	≤30.00	PASS
	Ant2	2412	11.98	≤30.00	PASS
	total	2412	14.57	≤30.00	PASS
	Ant1	2437	11.22	≤30.00	PASS
	Ant2	2437	12.24	≤30.00	PASS
	total	2437	14.77	≤30.00	PASS
	Ant1	2462	11.01	≤30.00	PASS
	Ant2	2462	12.02	≤30.00	PASS
	total	2462	14.55	≤30.00	PASS

Note:

The EUT employ CDD for MIMO

$Directional\ Gain = G_{ANT} + Array\ Gain$

For Output Power Measurement, $Array\ Gain = 0dB$ for $N_{ANT} \leq 4$

$G_{ANT1} = 3.1dBi$, $G_{ANT2} = 1.3dBi$, use the higher antenna gain to calculate the worst case:

$Directional\ Gain = 3.1dBi + 0dB = 3.1dBi < 6dBi$

Appendix D: Maximum power spectral density Test Result

Test Mode	Antenna	Frequency MHz]	Result [dBm/10kHz]	Duty Cycle Factor [dBm]	Result [dBm/10kHz]	Limit [dBm/3kHz]	Verdict
11B-CDD	Ant1	2412	-7.92	0.61	-7.31	≤7.90	PASS
	Ant2	2412	-7.60	0.61	-6.99	≤7.90	PASS
	total	2412	-4.75	0.61	-4.14	≤7.90	PASS
	Ant1	2437	-8.30	0.61	-7.69	≤7.90	PASS
	Ant2	2437	-7.45	0.61	-6.84	≤7.90	PASS
	total	2437	-4.84	0.61	-4.23	≤7.90	PASS
	Ant1	2462	-8.38	0.61	-7.77	≤7.90	PASS
	Ant2	2462	-8.46	0.61	-7.85	≤7.90	PASS
11G-CDD	total	2462	-5.41	0.61	-4.80	≤7.90	PASS
	Ant1	2412	-18.18	7.85	-10.33	≤7.90	PASS
	Ant2	2412	-17.45	7.85	-9.60	≤7.90	PASS
	total	2412	-14.79	7.85	-6.94	≤7.90	PASS
	Ant1	2437	-16.30	7.85	-8.45	≤7.90	PASS
	Ant2	2437	-17.34	7.85	-9.49	≤7.90	PASS
	total	2437	-13.78	7.85	-5.93	≤7.90	PASS
	Ant1	2462	-18.30	7.85	-10.45	≤7.90	PASS
11N20MIMO	Ant2	2462	-18.14	7.85	-10.29	≤7.90	PASS
	total	2462	-15.21	7.85	-7.36	≤7.90	PASS
	Ant1	2412	-15.43	0.24	-15.19	≤7.90	PASS
	Ant2	2412	-14.77	0.24	-14.53	≤7.90	PASS
	total	2412	-12.08	0.24	-11.84	≤7.90	PASS
	Ant1	2437	-15.51	0.24	-15.27	≤7.90	PASS
	Ant2	2437	-14.74	0.24	-14.50	≤7.90	PASS
	total	2437	-12.10	0.24	-11.86	≤7.90	PASS
11AX20MIMO	Ant1	2462	-15.69	0.24	-15.45	≤7.90	PASS
	Ant2	2462	-16.13	0.24	-15.89	≤7.90	PASS
	total	2462	-12.89	0.24	-12.65	≤7.90	PASS
	Ant1	2412	-15.93	0.24	-15.69	≤7.90	PASS
	Ant2	2412	-15.46	0.24	-15.22	≤7.90	PASS
	total	2412	-12.68	0.24	-12.44	≤7.90	PASS
	Ant1	2437	-15.75	0.24	-15.51	≤7.90	PASS
	Ant2	2437	-15.62	0.24	-15.38	≤7.90	PASS
11AX20MIMO	total	2437	-12.67	0.24	-12.43	≤7.90	PASS
	Ant1	2462	-14.82	0.24	-14.58	≤7.90	PASS
	Ant2	2462	-15.73	0.24	-15.49	≤7.90	PASS
	total	2462	-12.24	0.24	-12.00	≤7.90	PASS

Note 1: The Duty Cycle Factor is compensated in the graph.



Note 2: The EUT employ CDD for MIMO, $Directional\ Gain = G_{ANT} + Array\ Gain$



For PSD Measurement, $Array\ Gain = 10 * \log N_{ANT} = 10 * \log 2 = 3dB$



$G_{ANT1} = 3.1dBi$, $G_{ANT2} = 1.3dBi$, use the higher antenna gain to calculate the worst case:



$Directional\ Gain = 3.1dBi + 3dB = 6.1dBi > 6dBi$; So the limit should be reduce $(6.1-6)dBi = 0.1dB$



Test Graphs

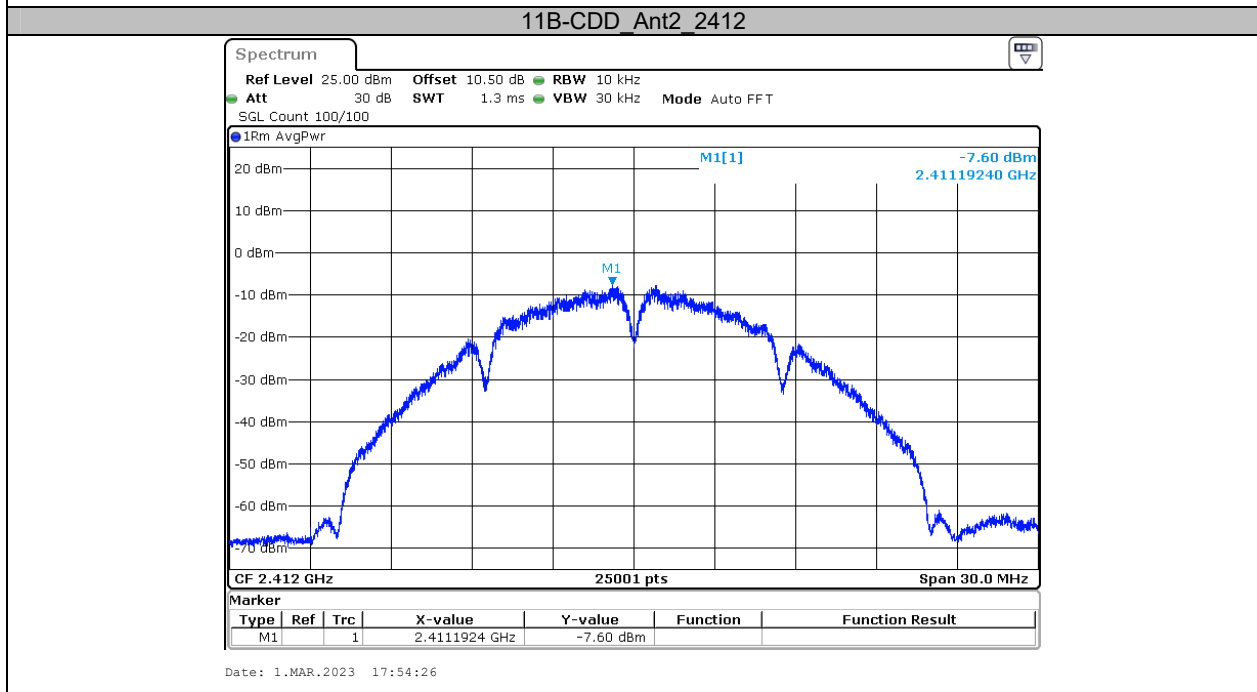
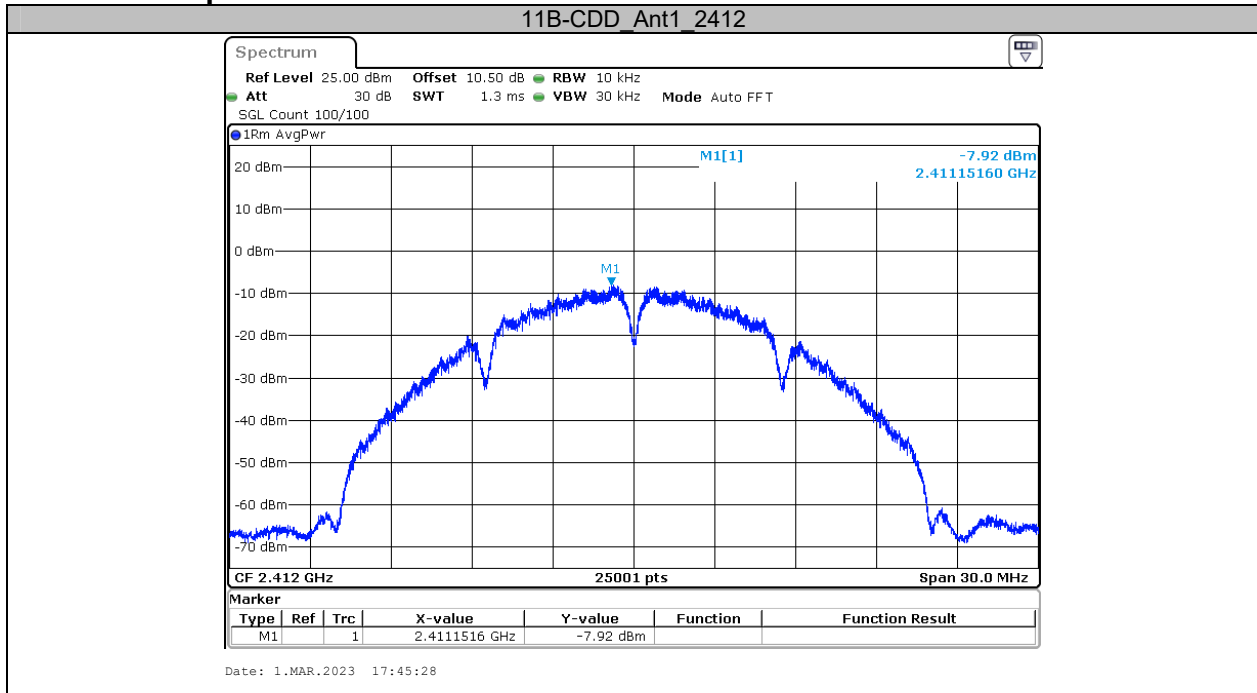


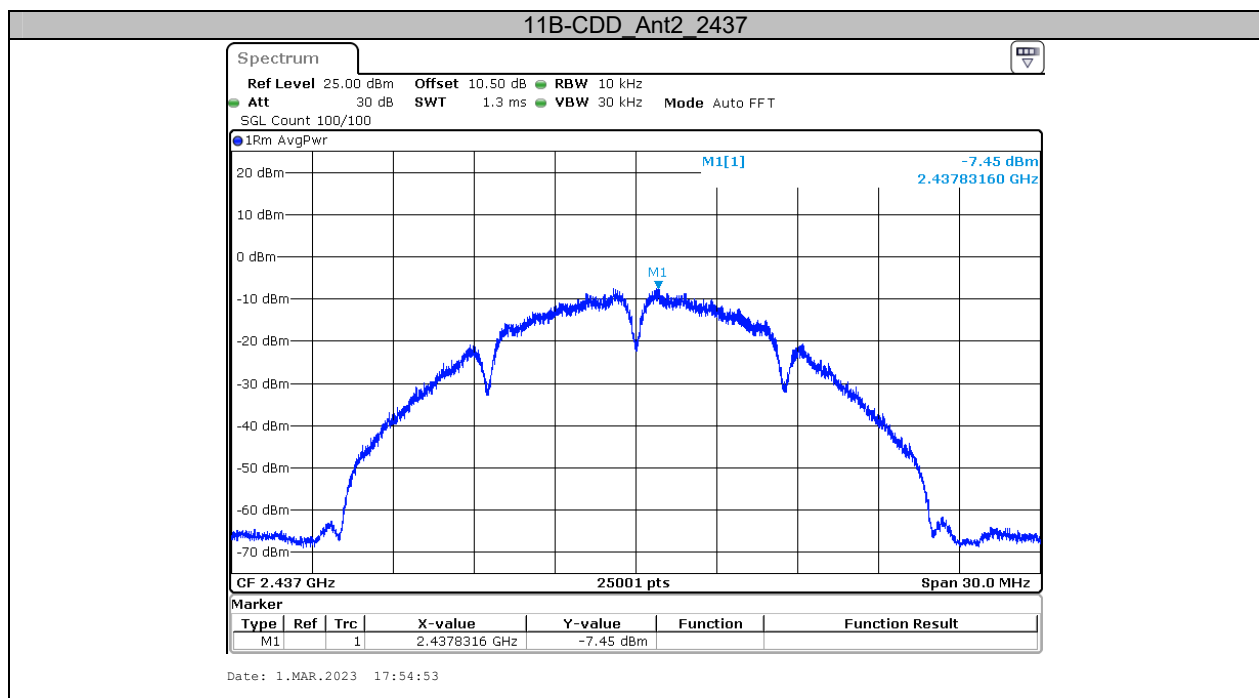
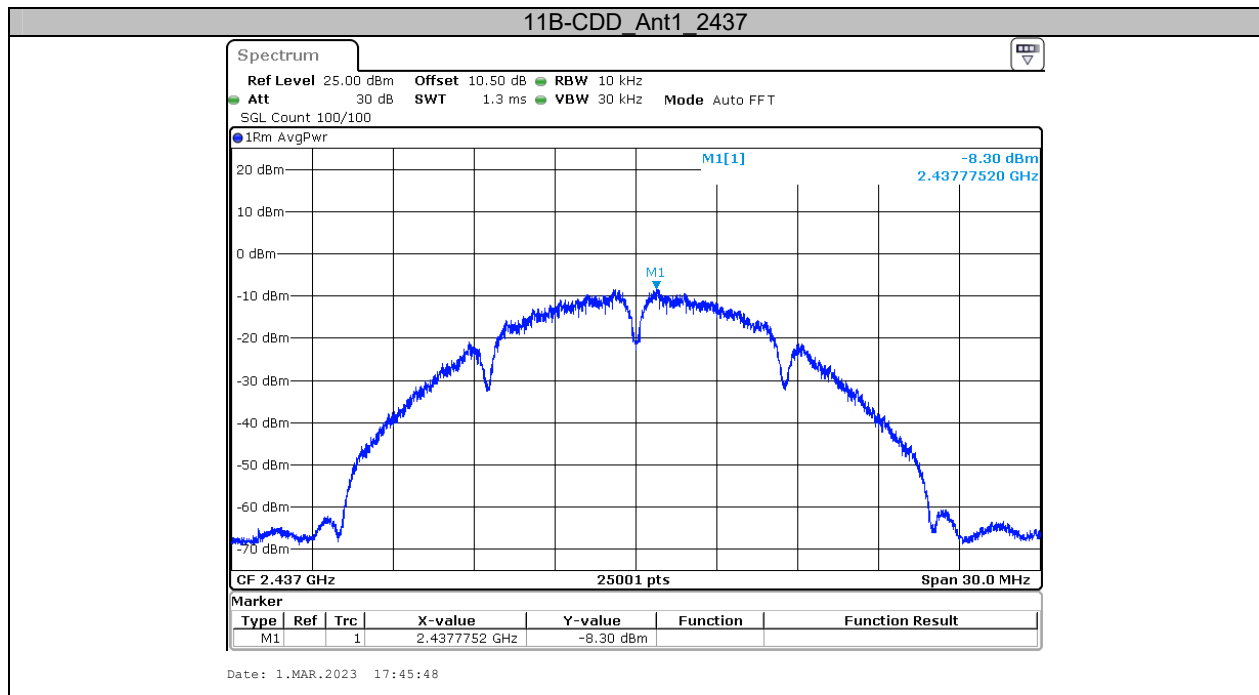


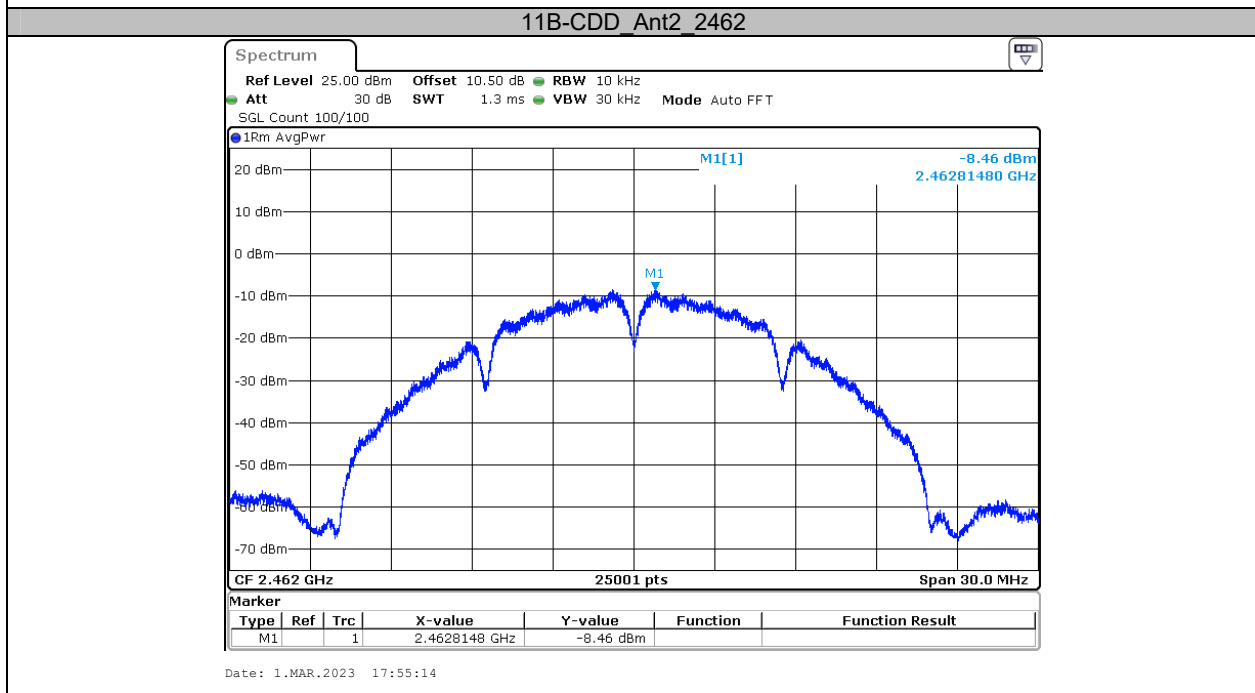
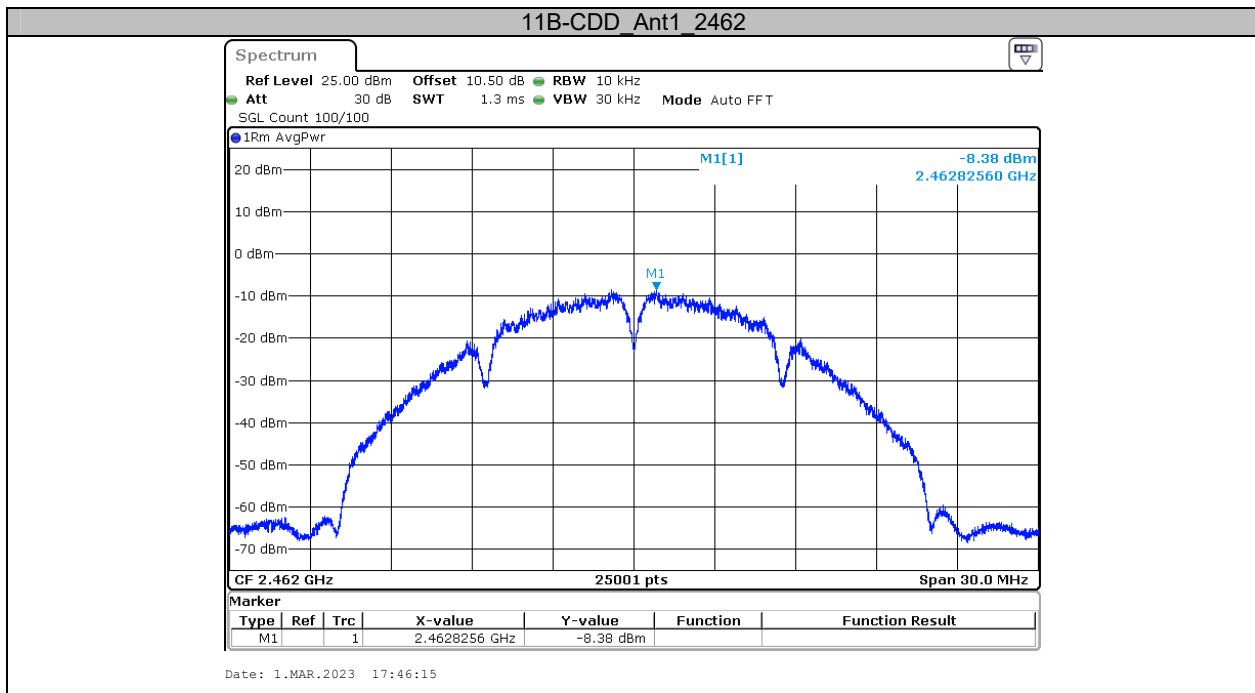


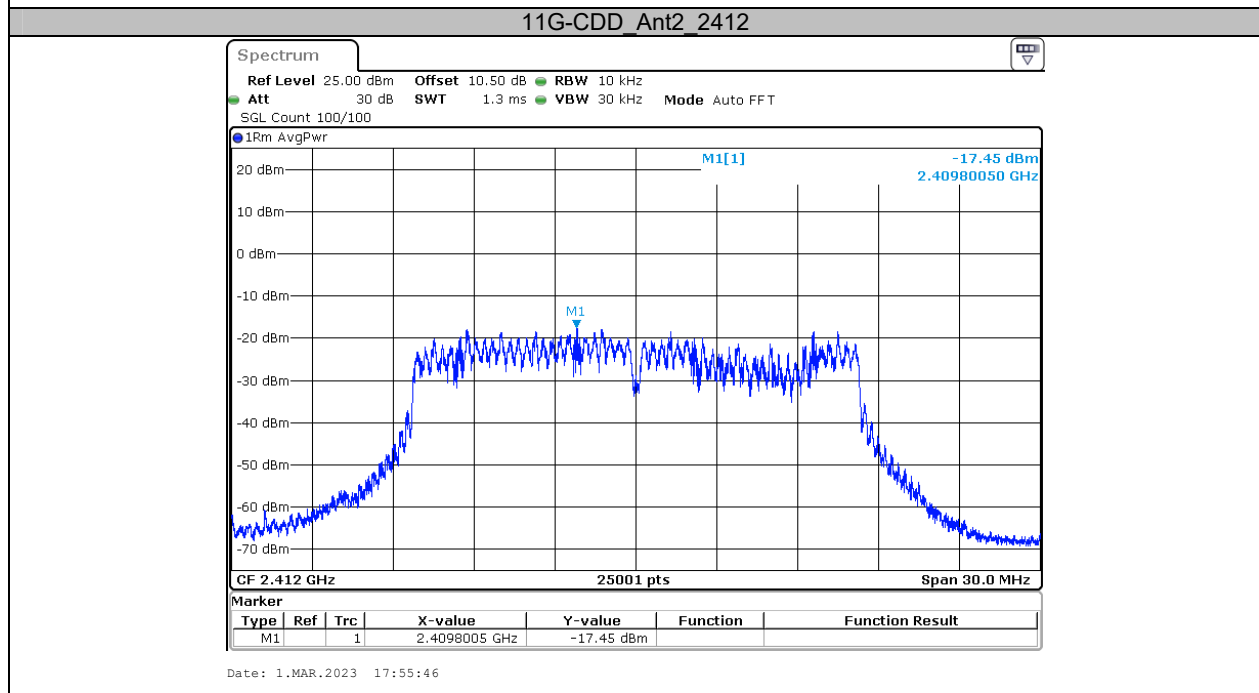
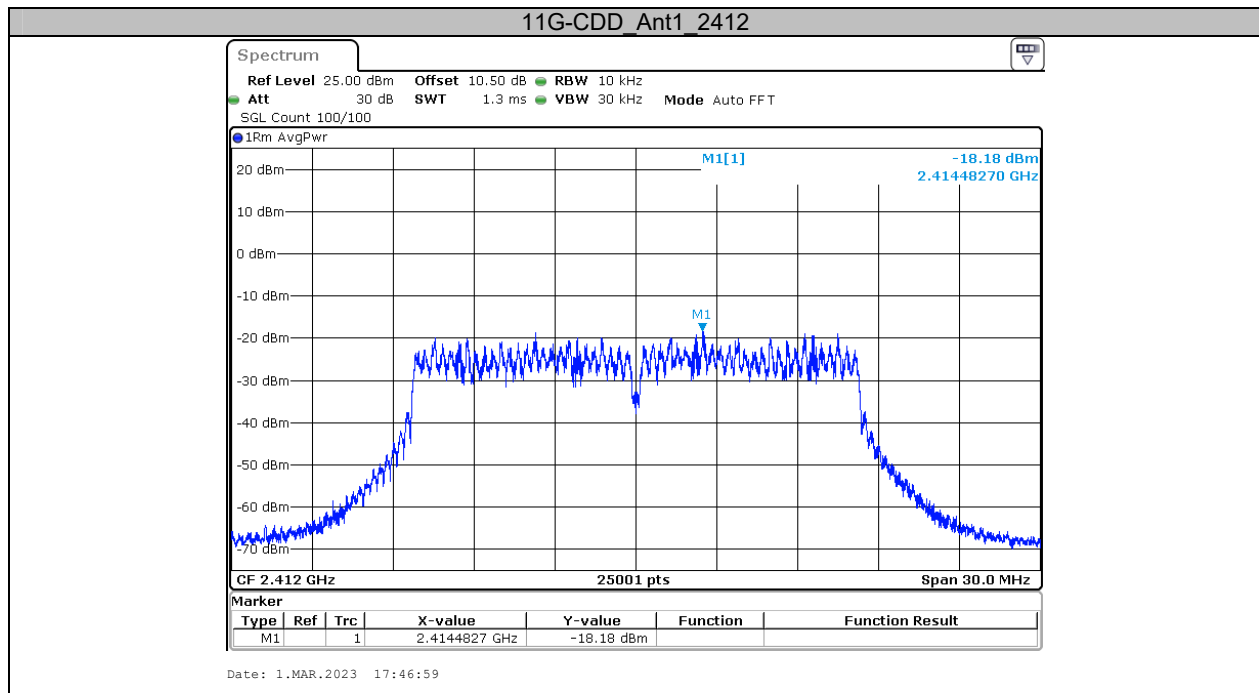


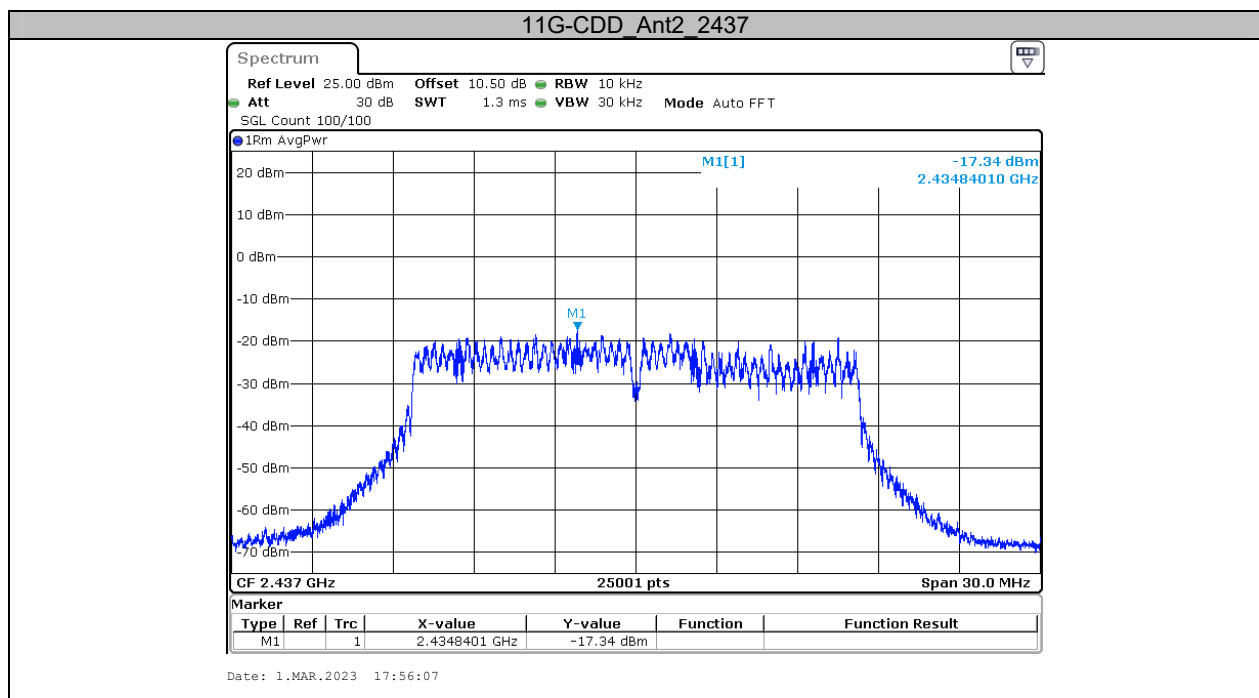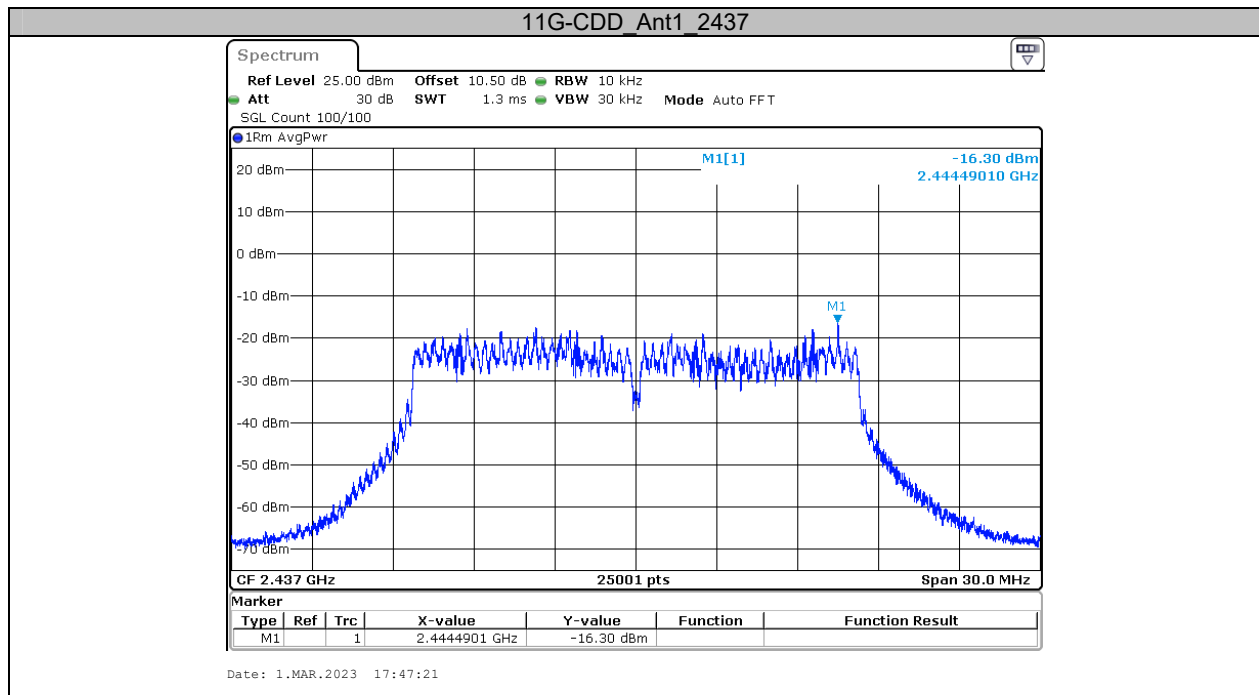


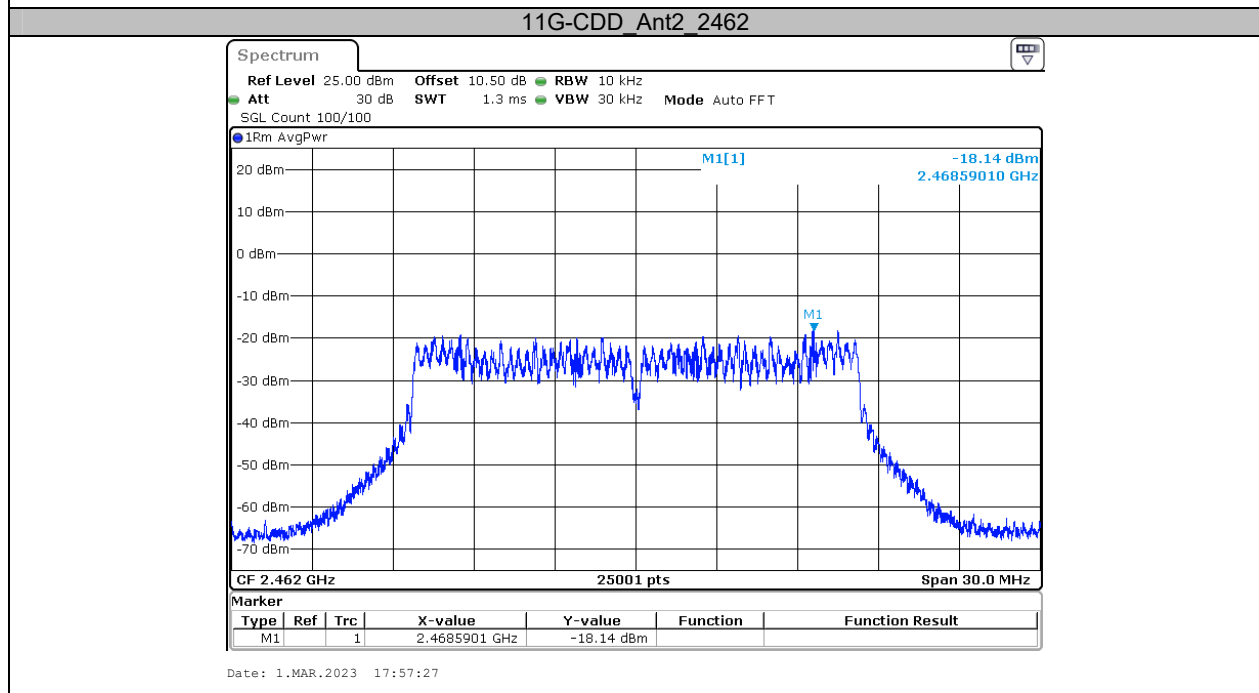
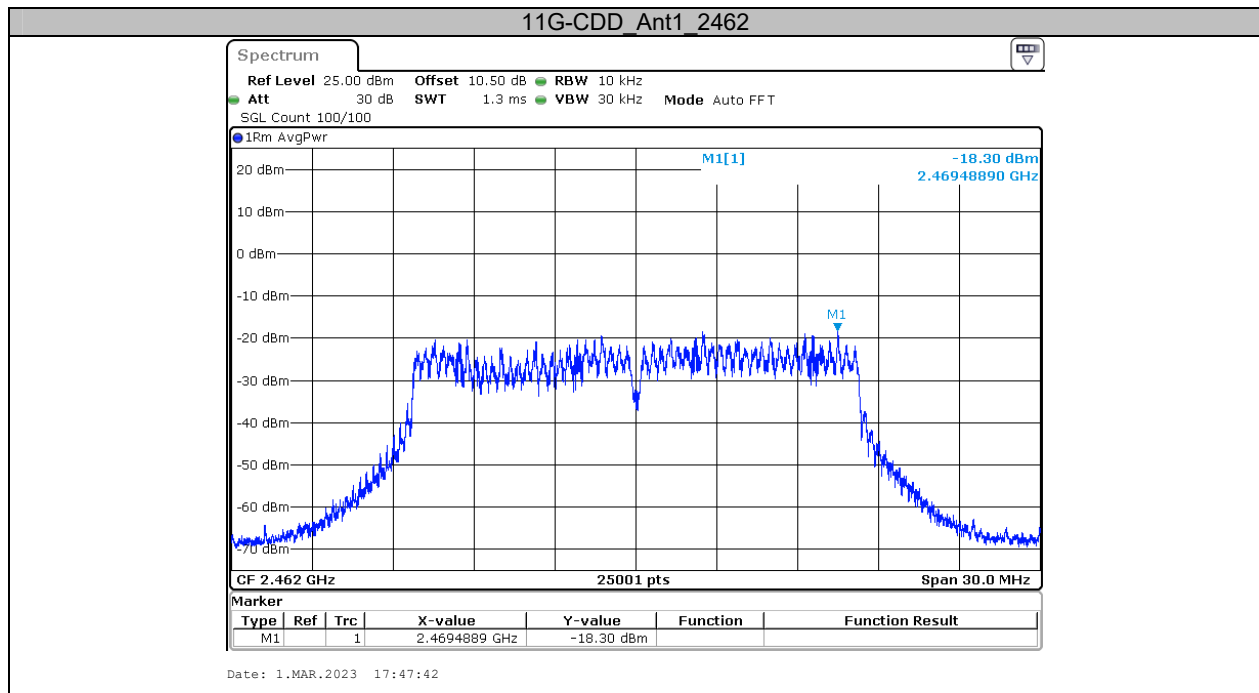


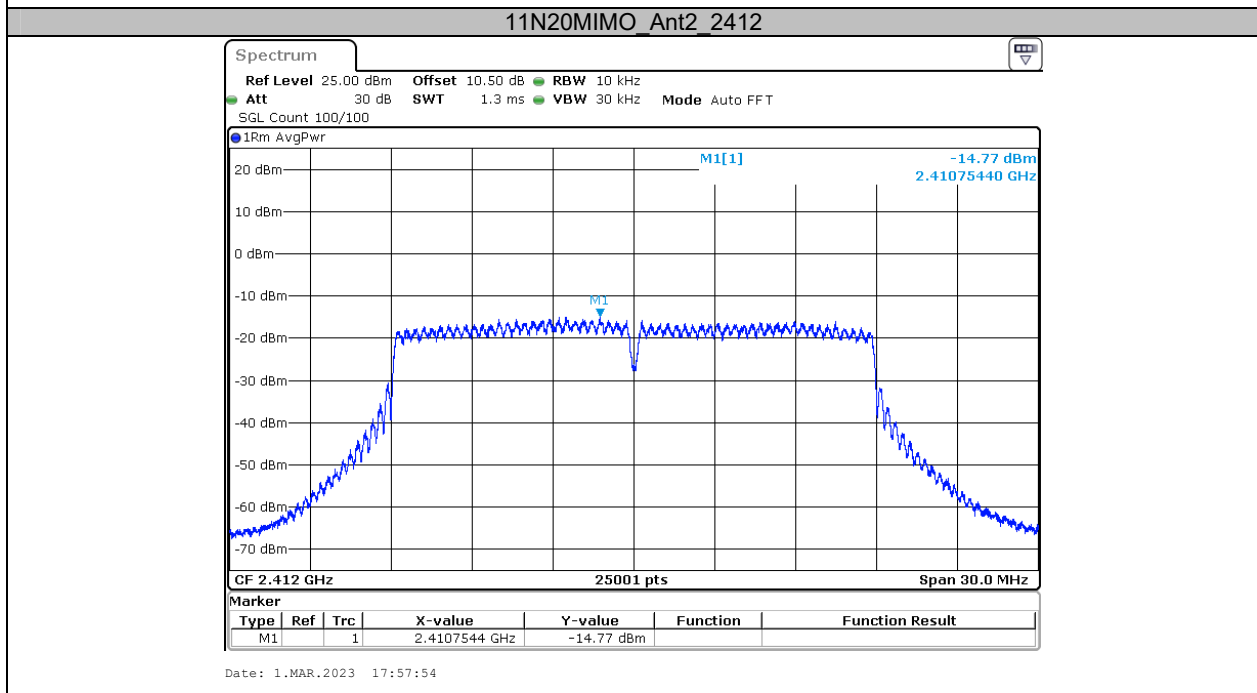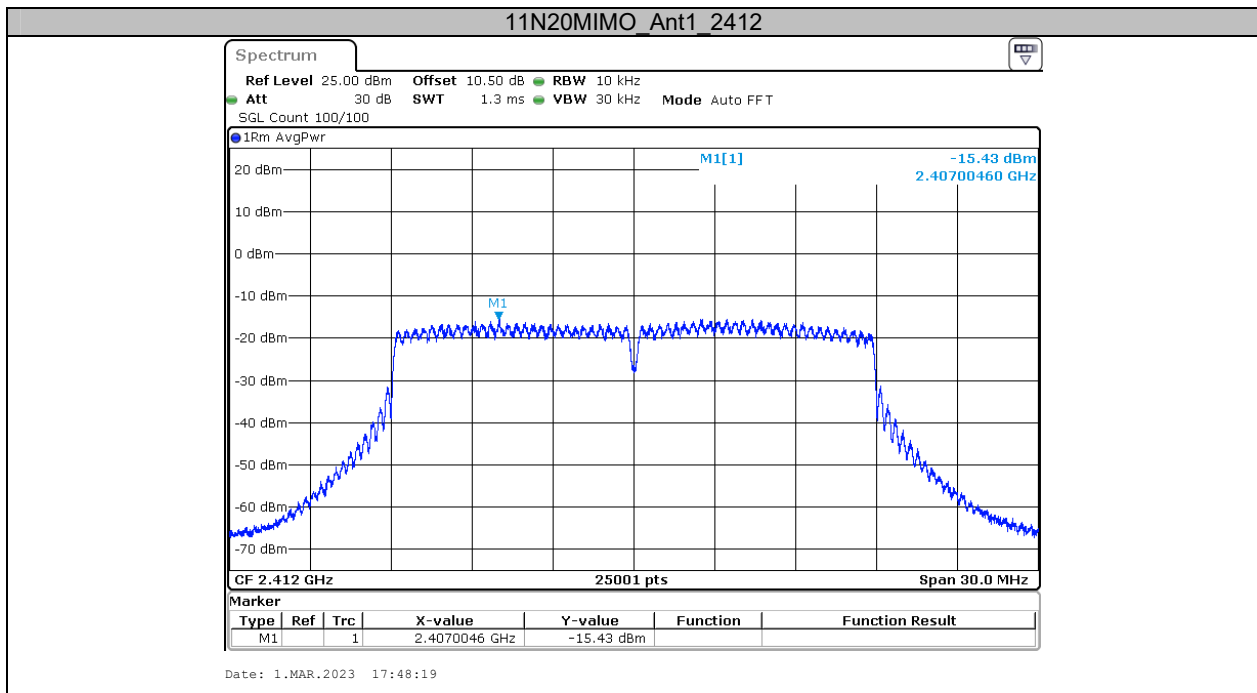


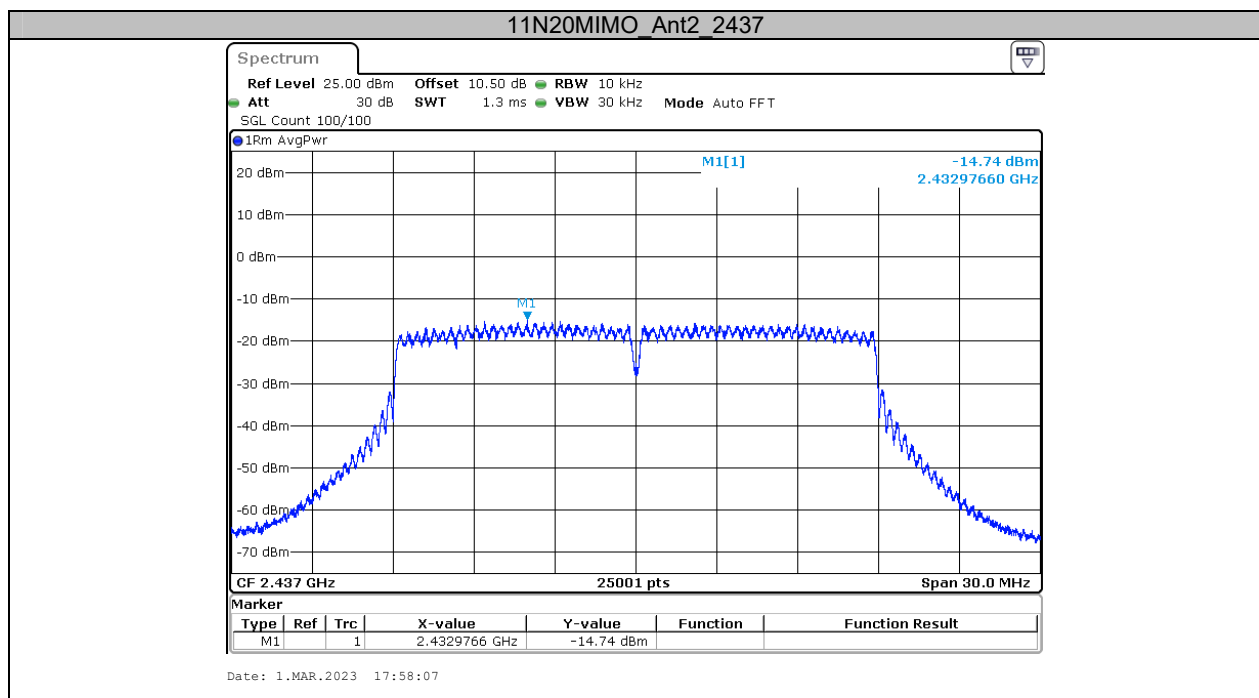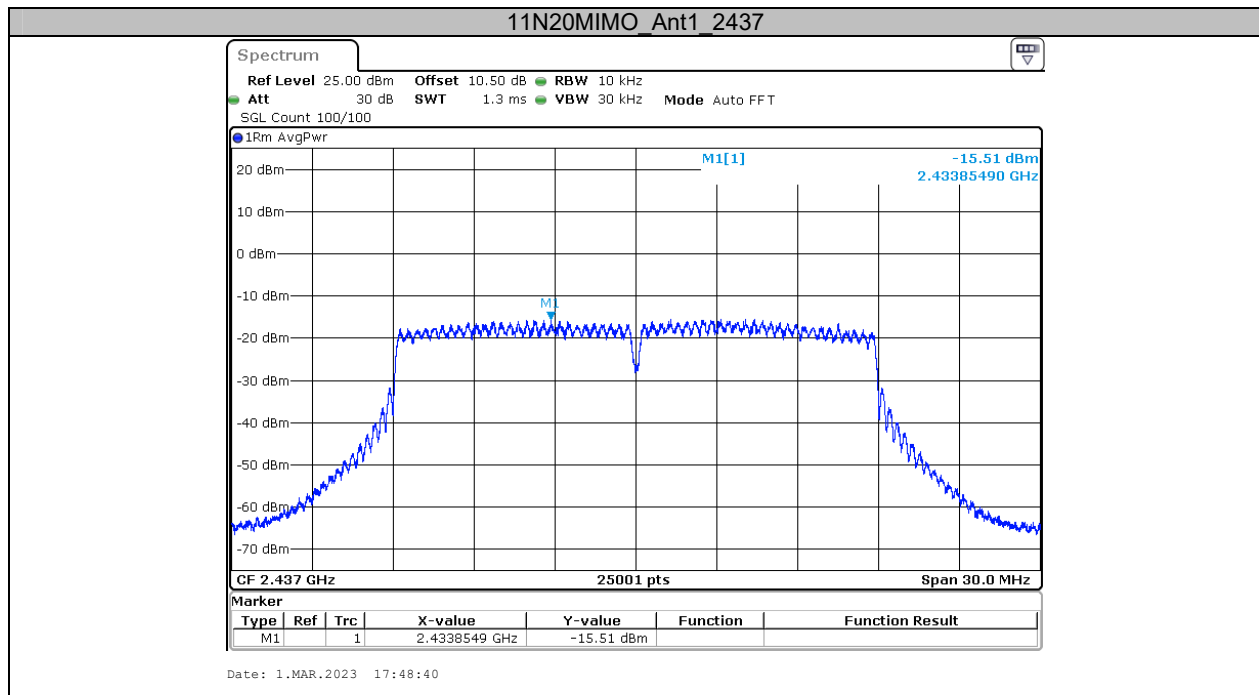

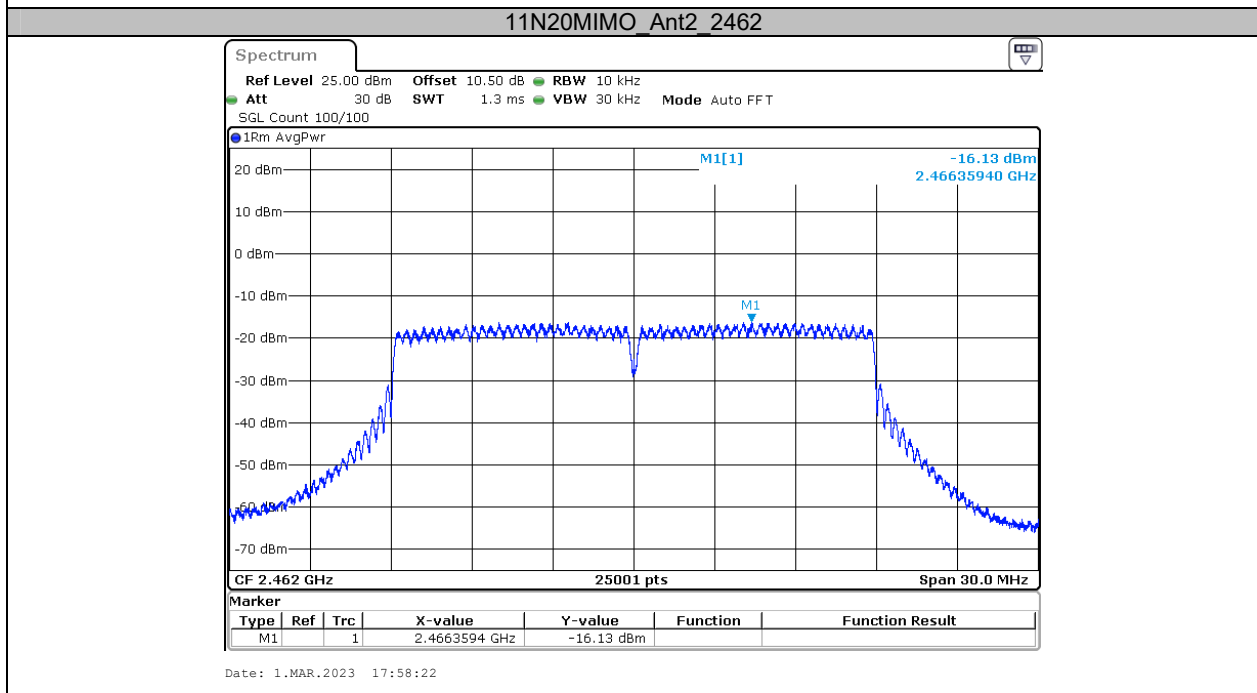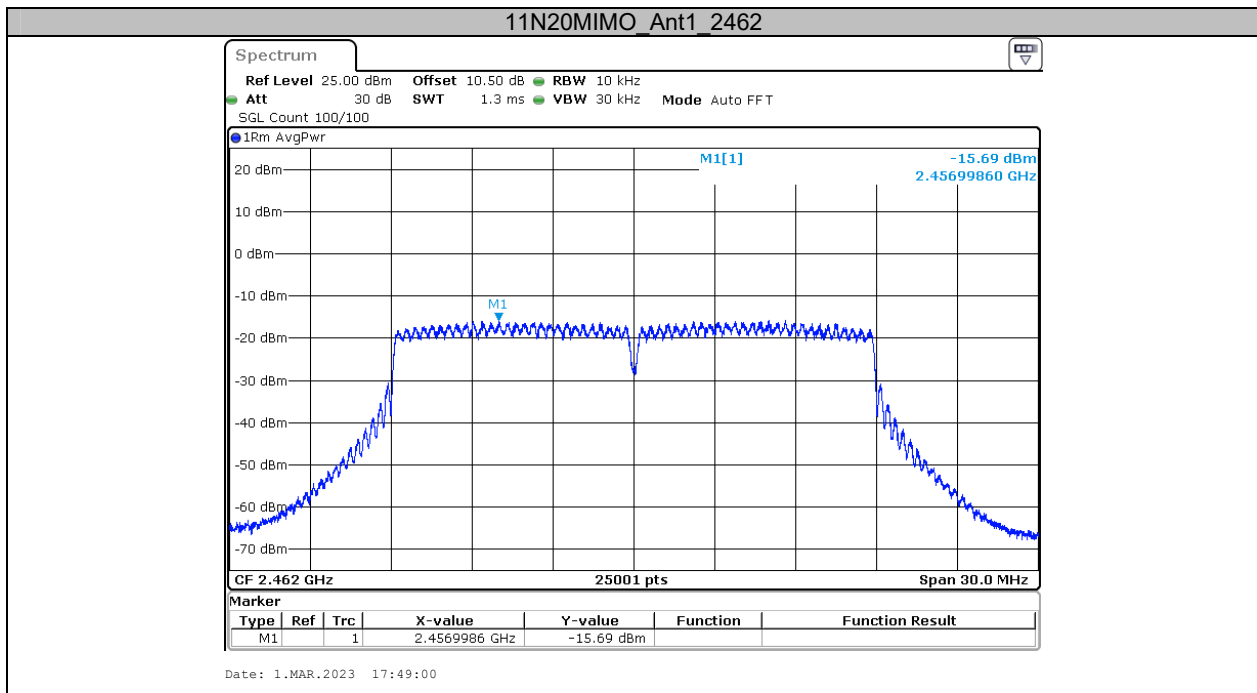




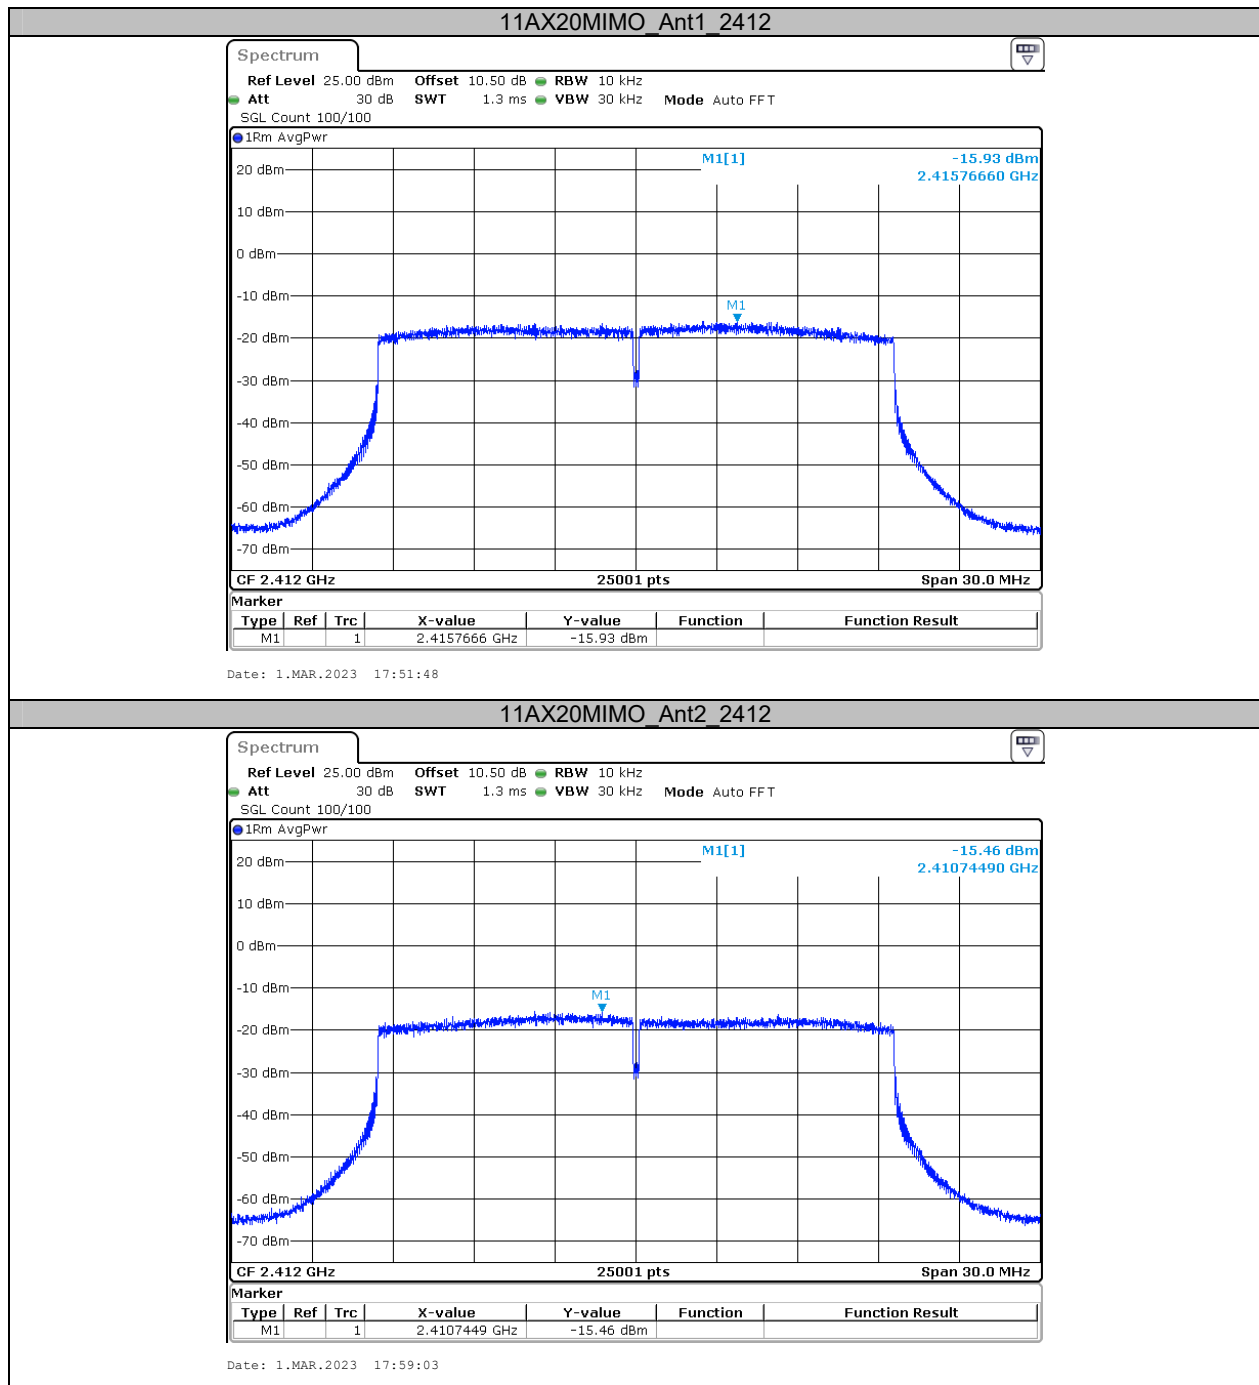



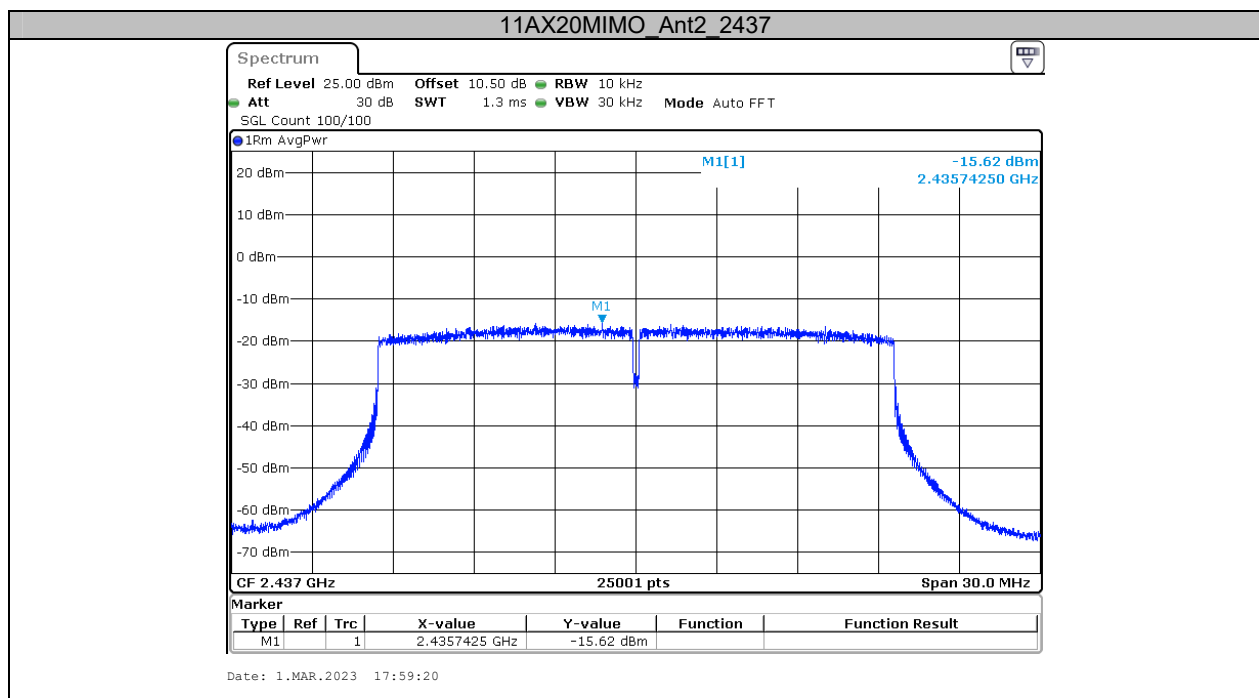
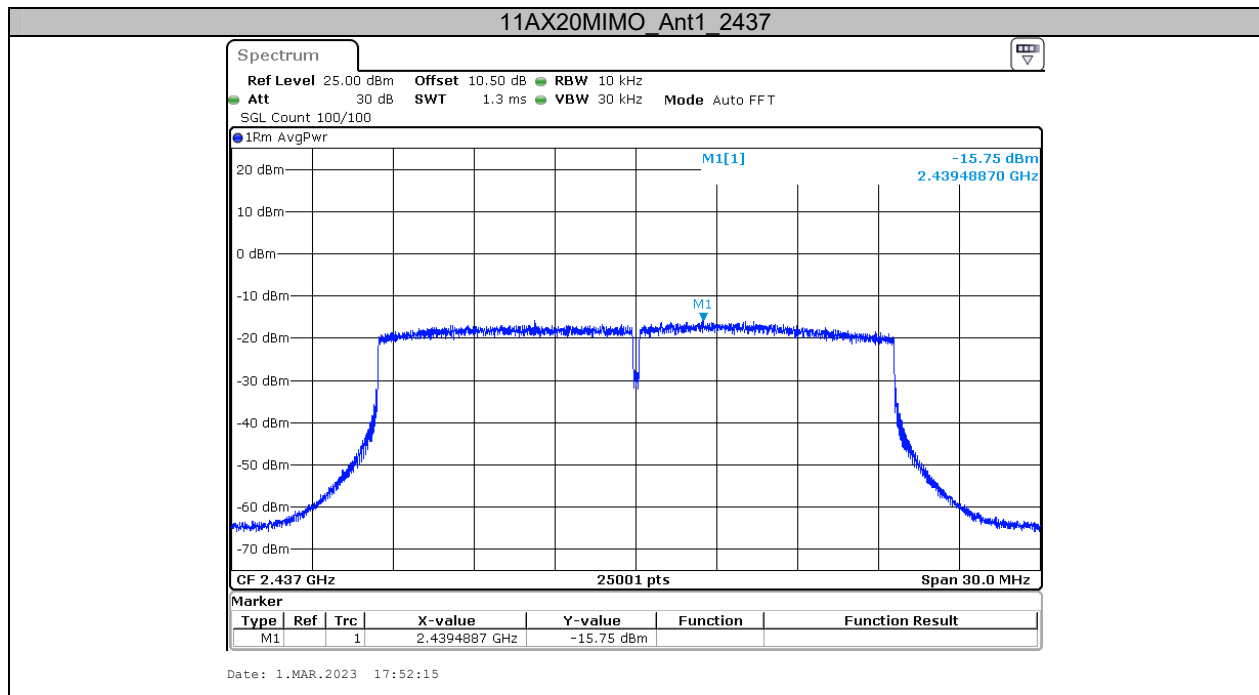




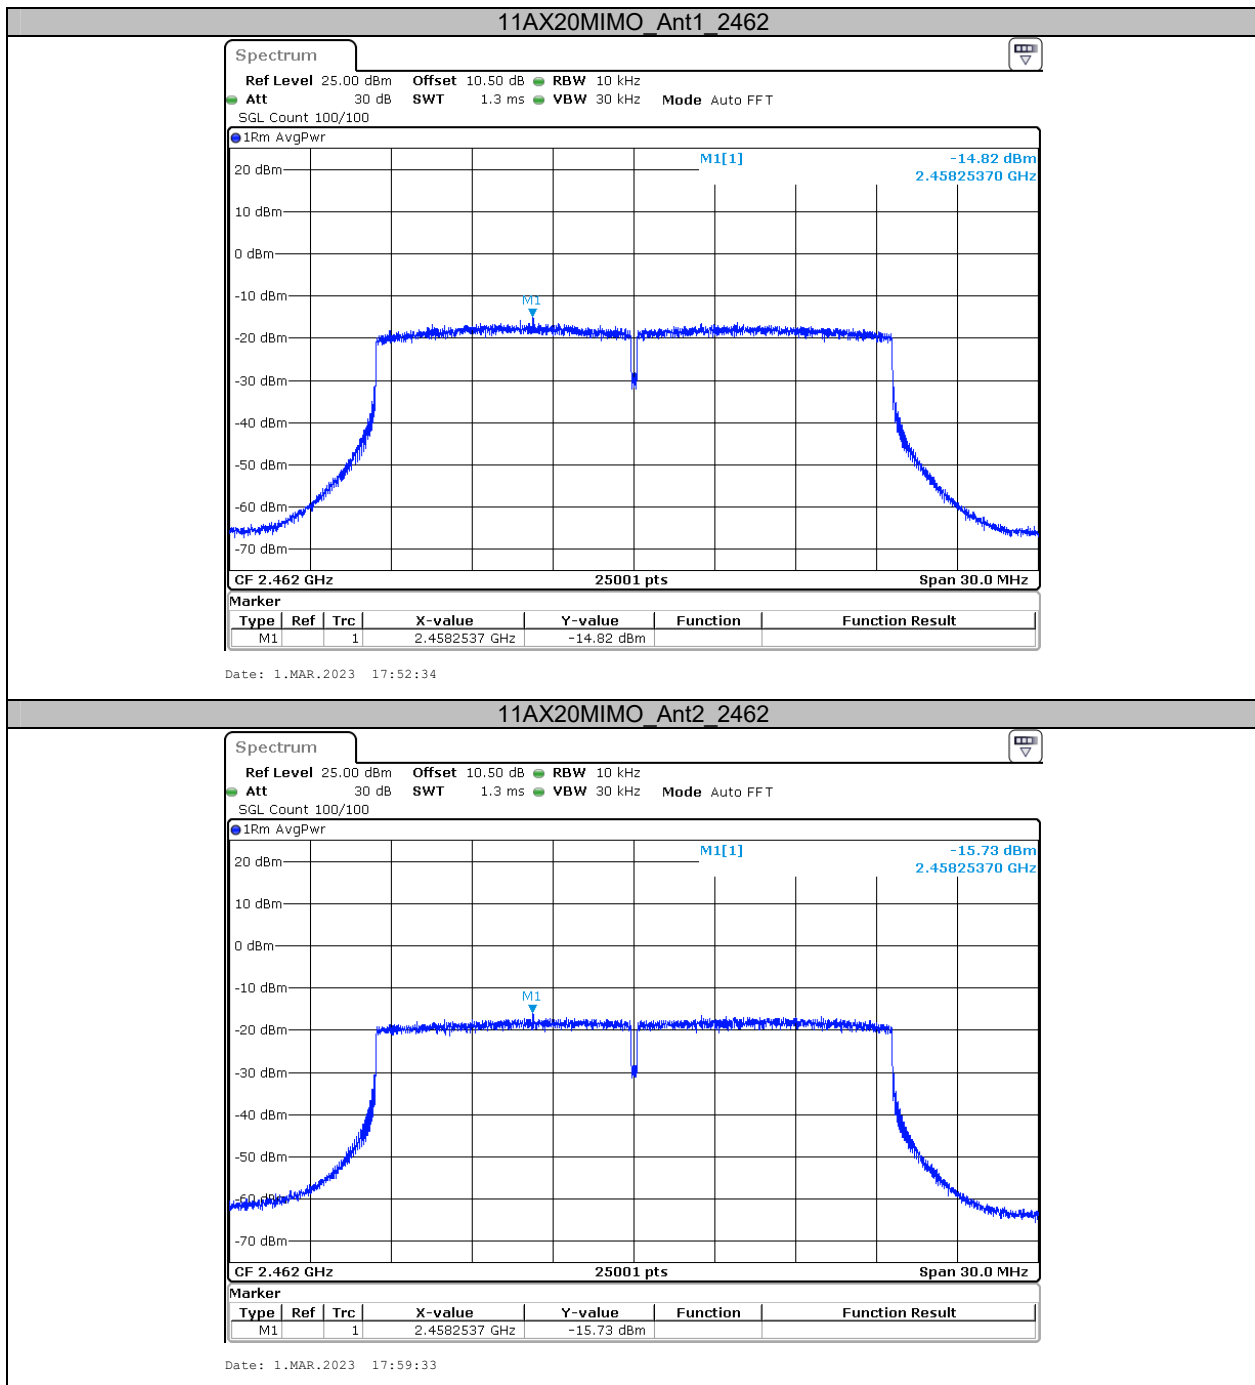




Appendix E: Band edge measurements Test Graphs

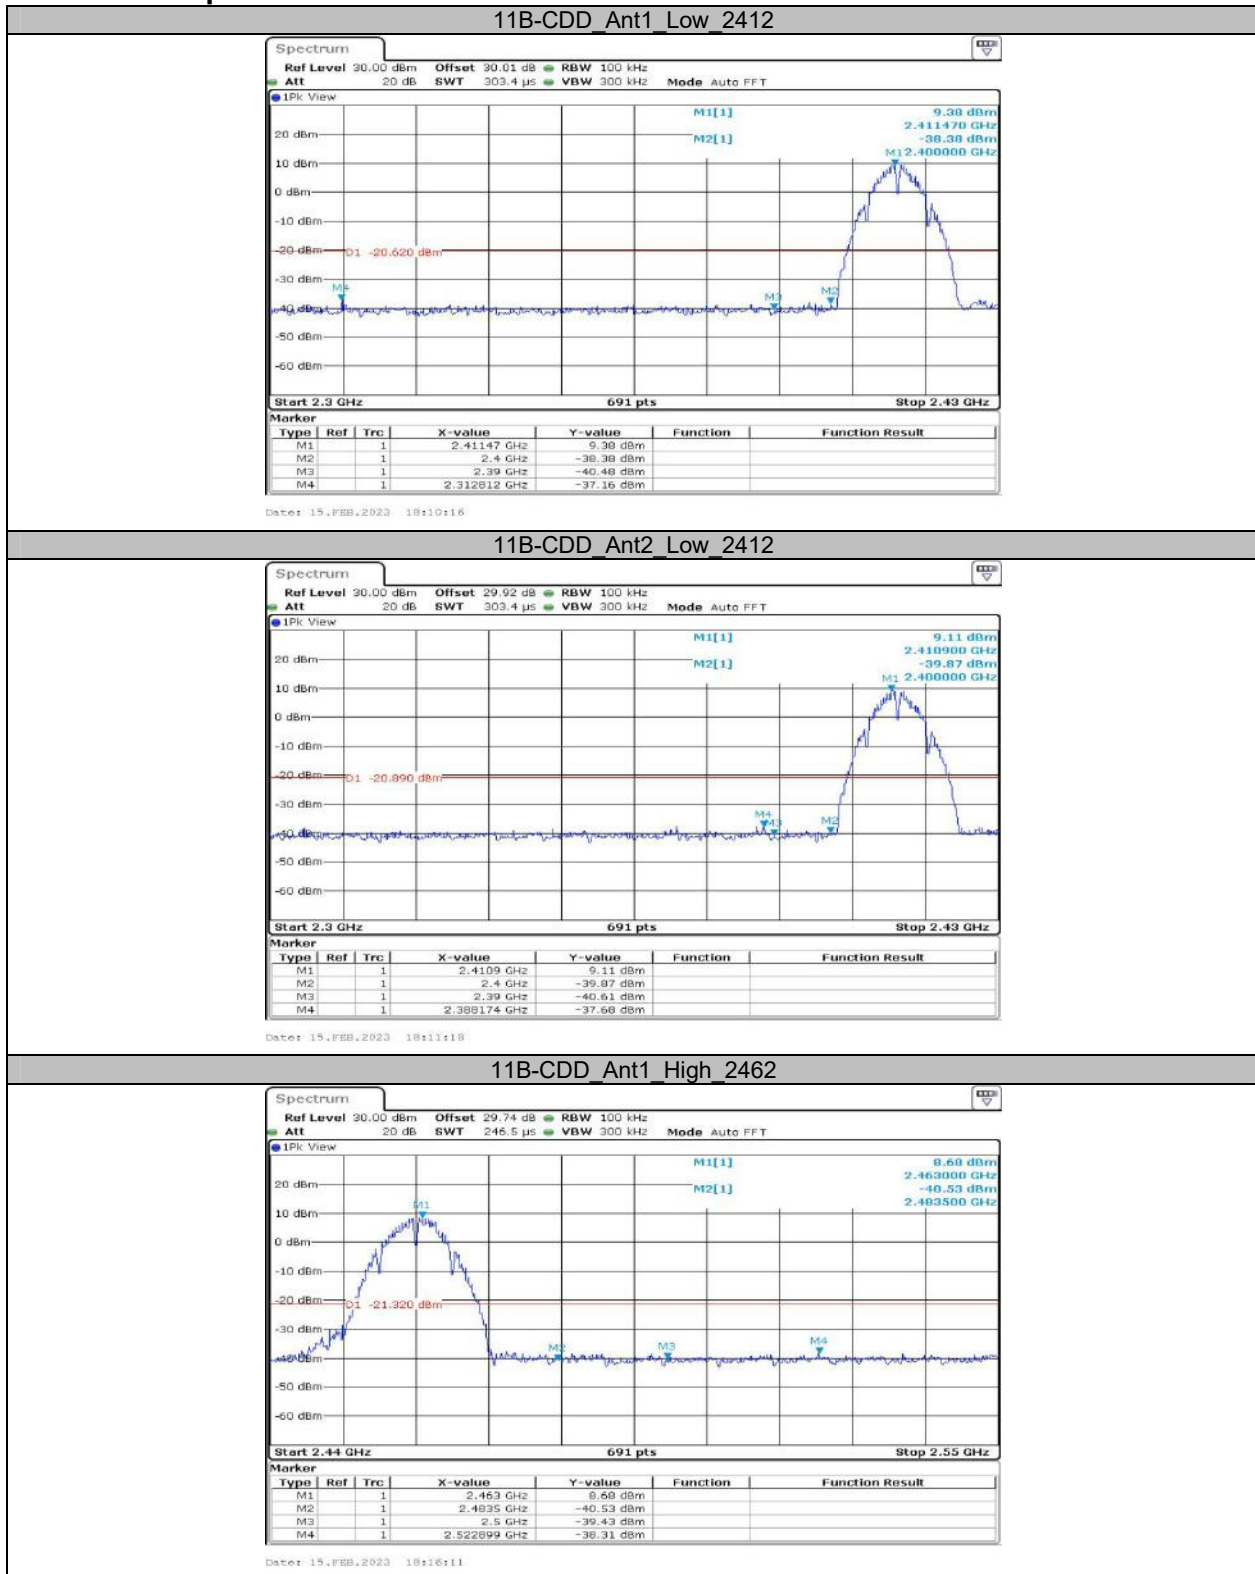


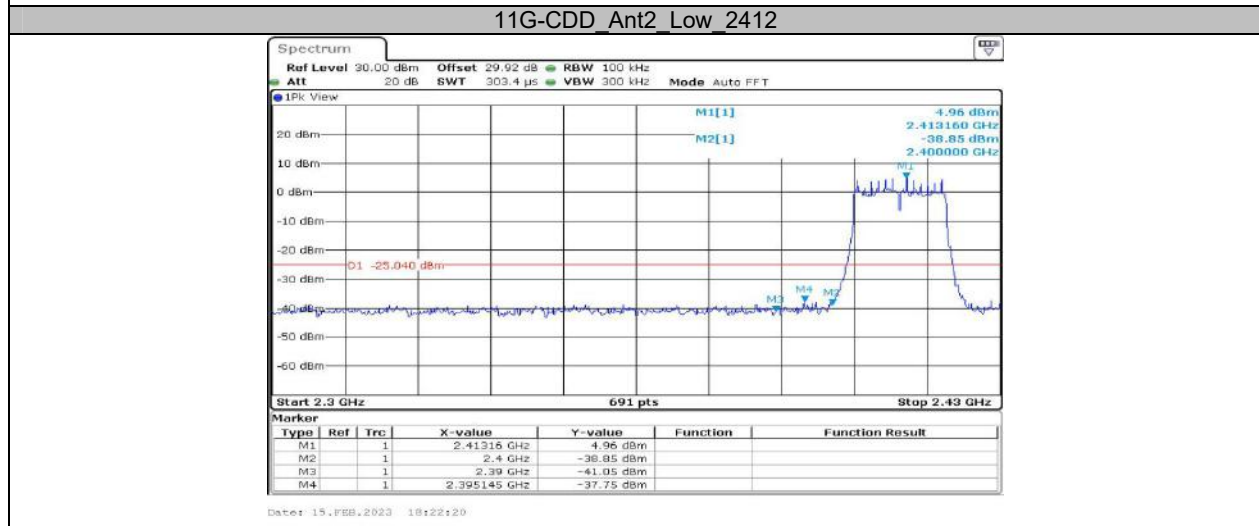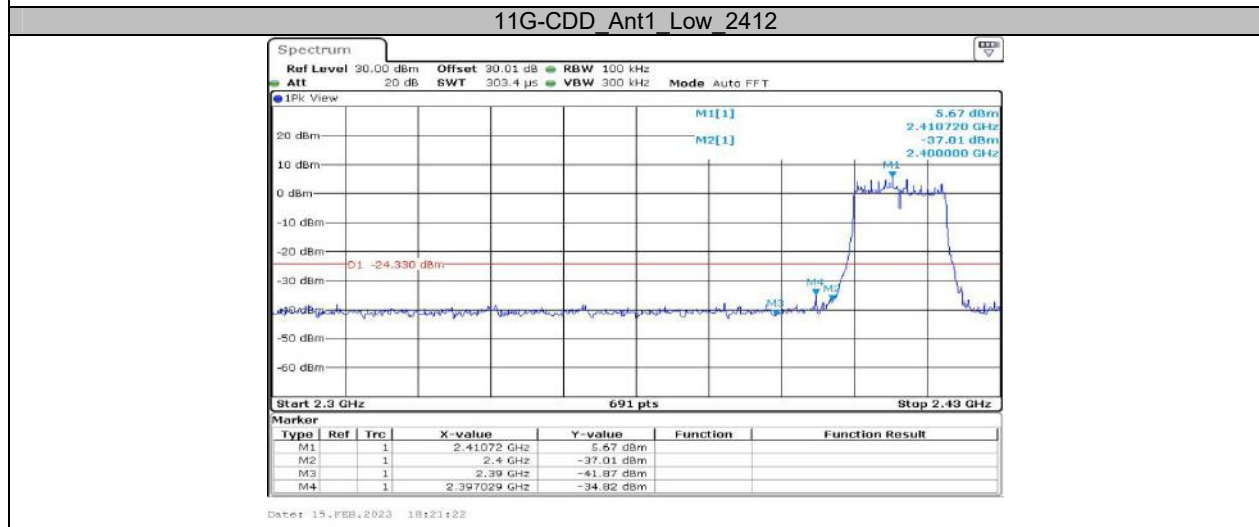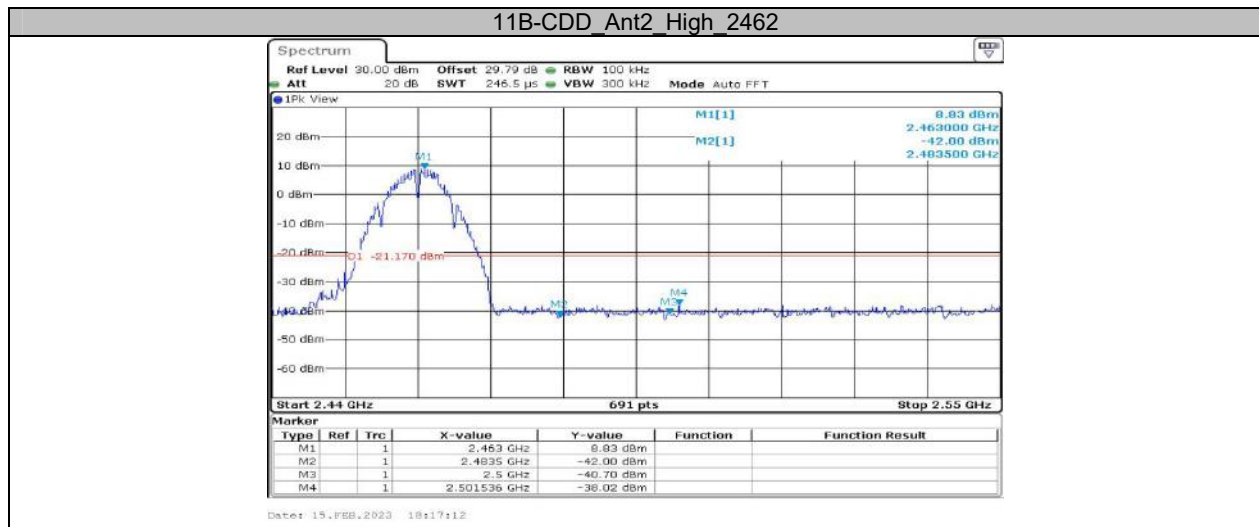

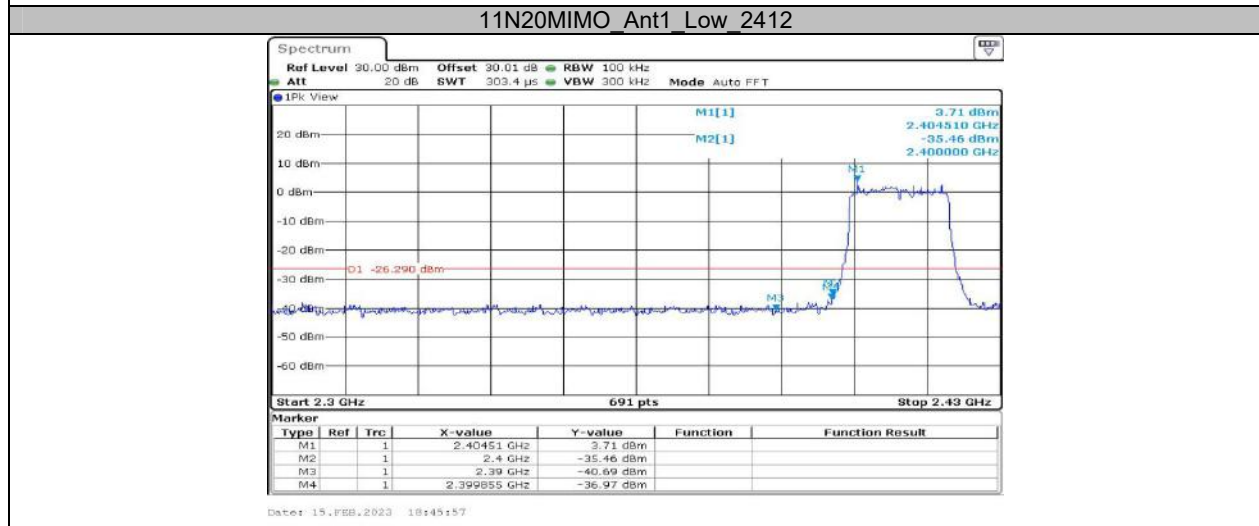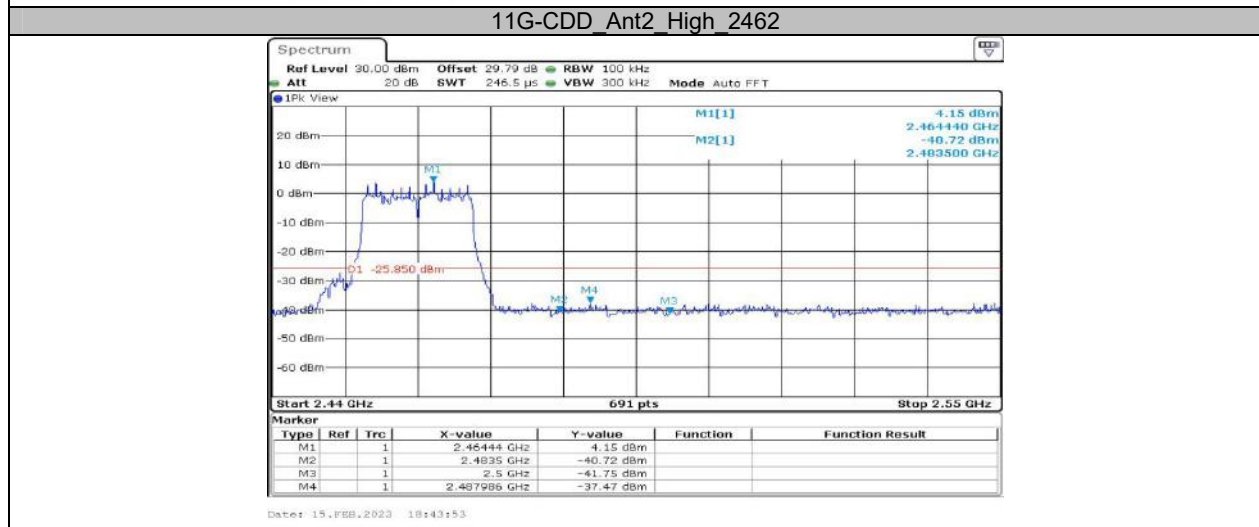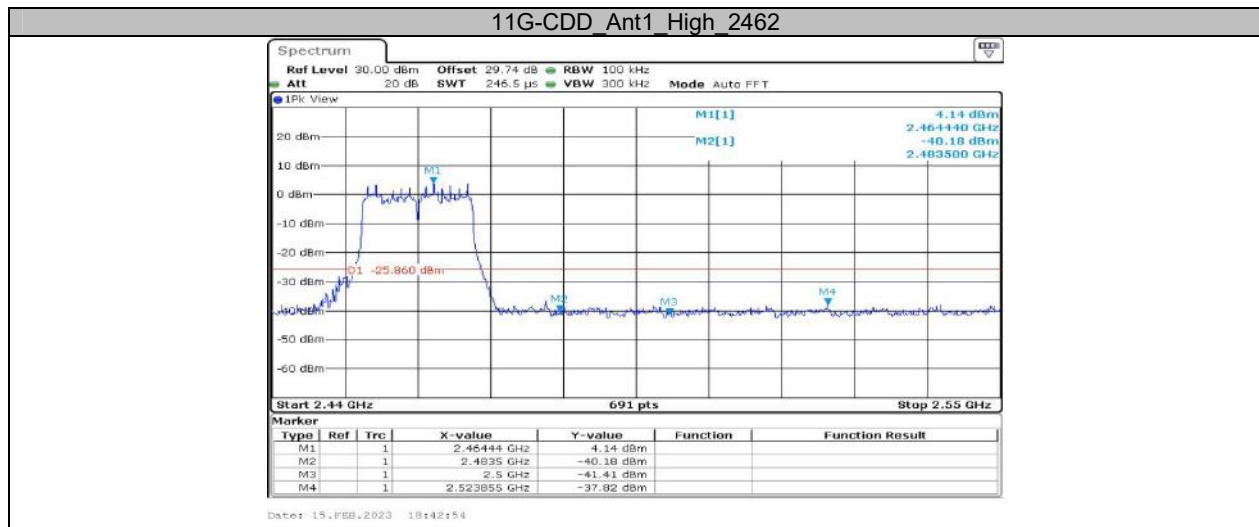

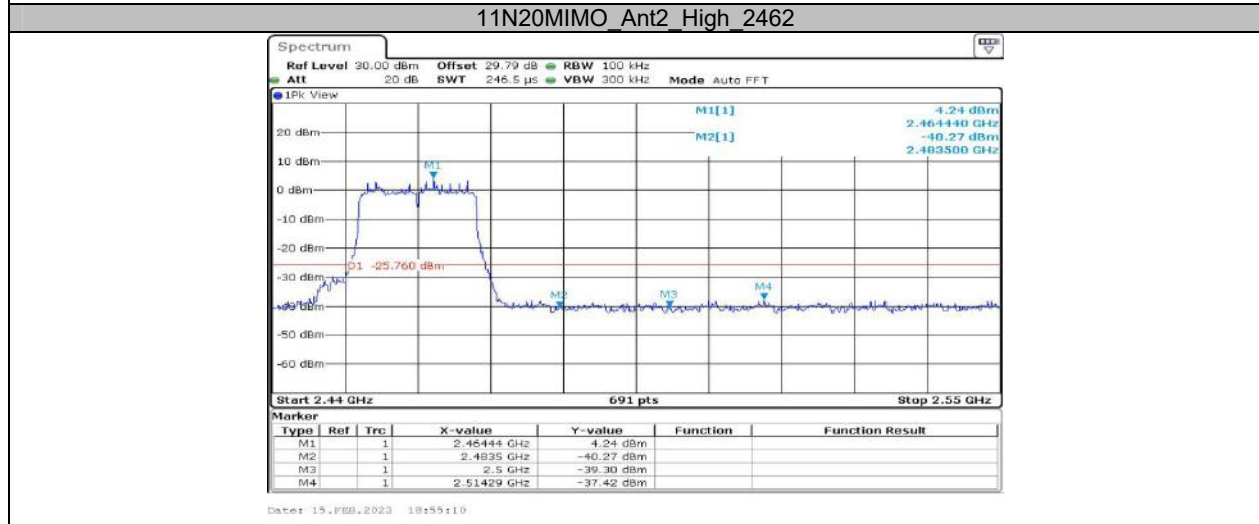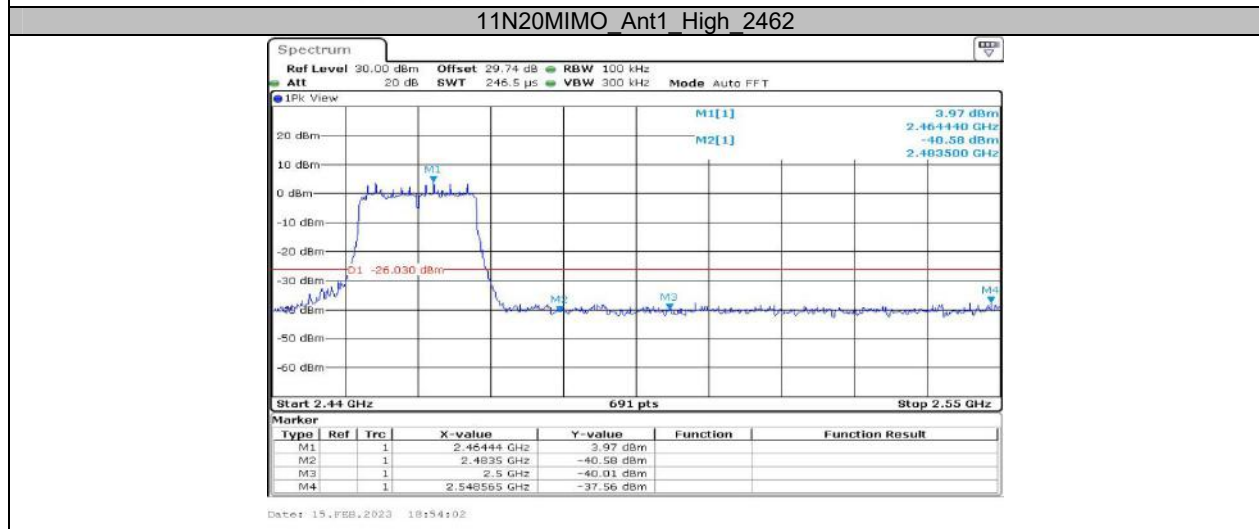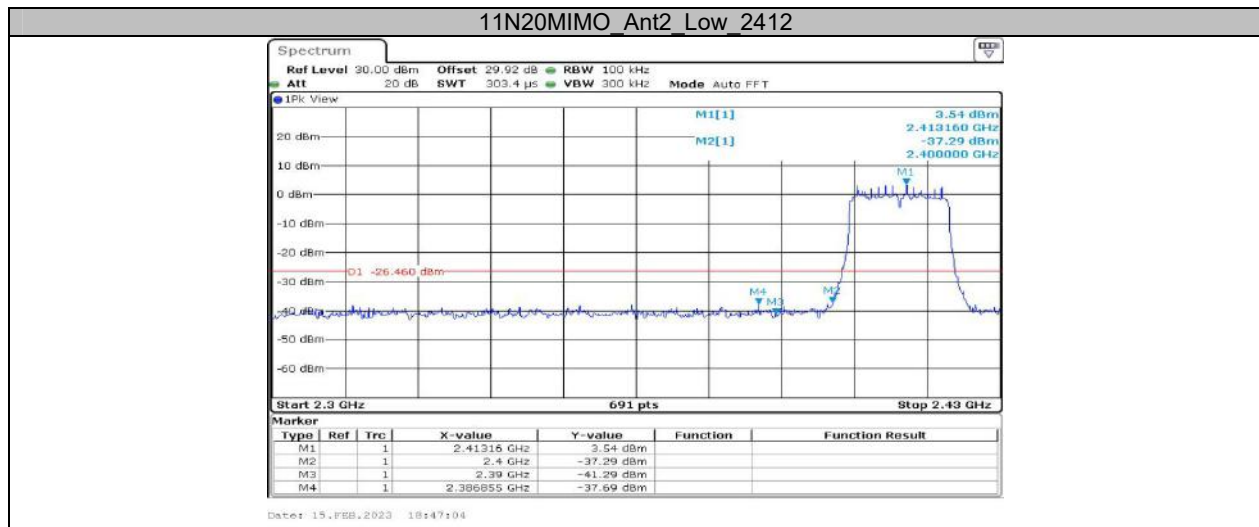


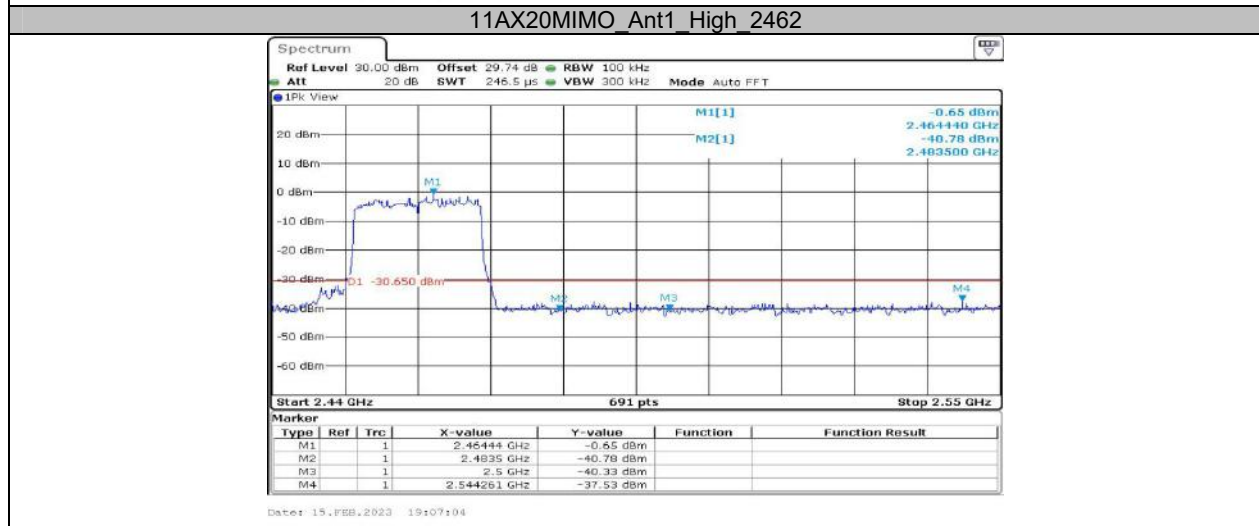
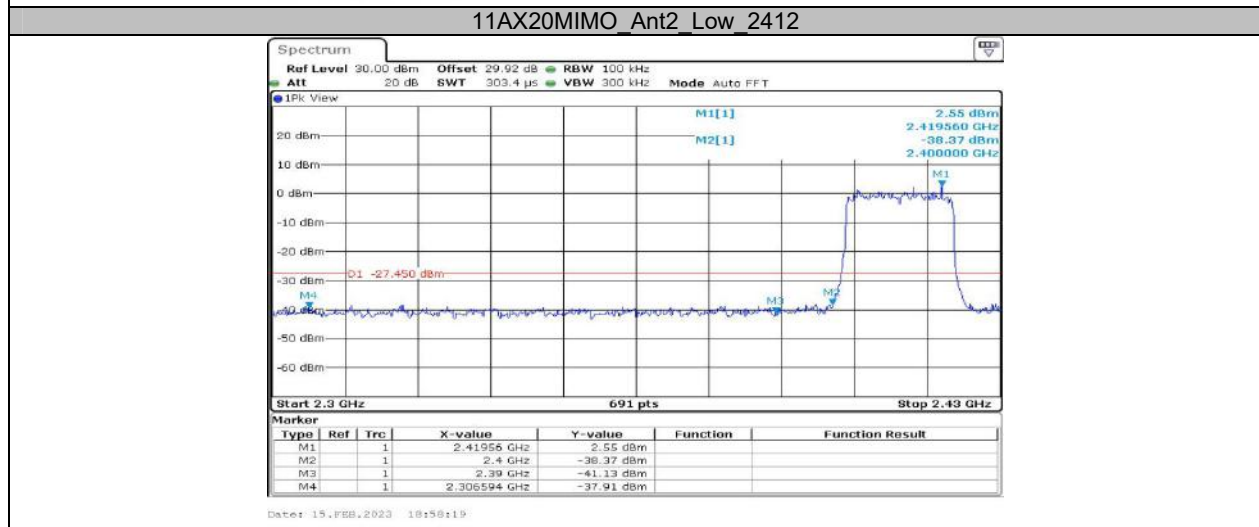


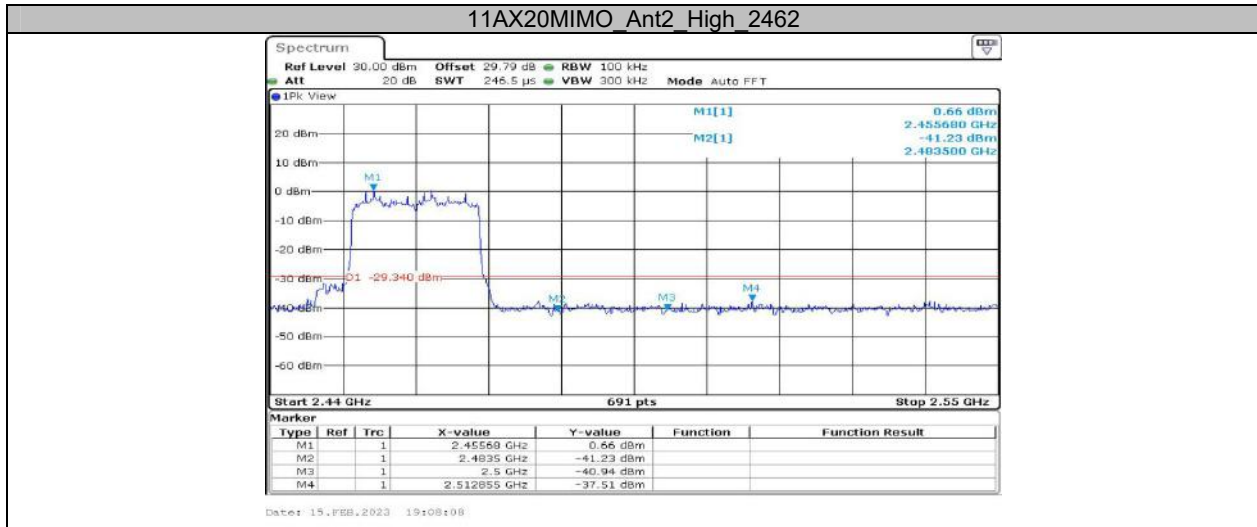


**Appendix F: Duty Cycle
Test Result**

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
11B-CDD	Ant1	2437	0.66	0.76	86.84	0.61	1.52
11G-CDD	Ant1	2437	0.11	0.67	16.42	7.85	9.09
11N20MIMO	Ant1	2437	1.96	2.07	94.69	0.24	0.51
11AX20MIMO	Ant1	2437	1.96	2.07	94.69	0.24	0.51

Test Graphs

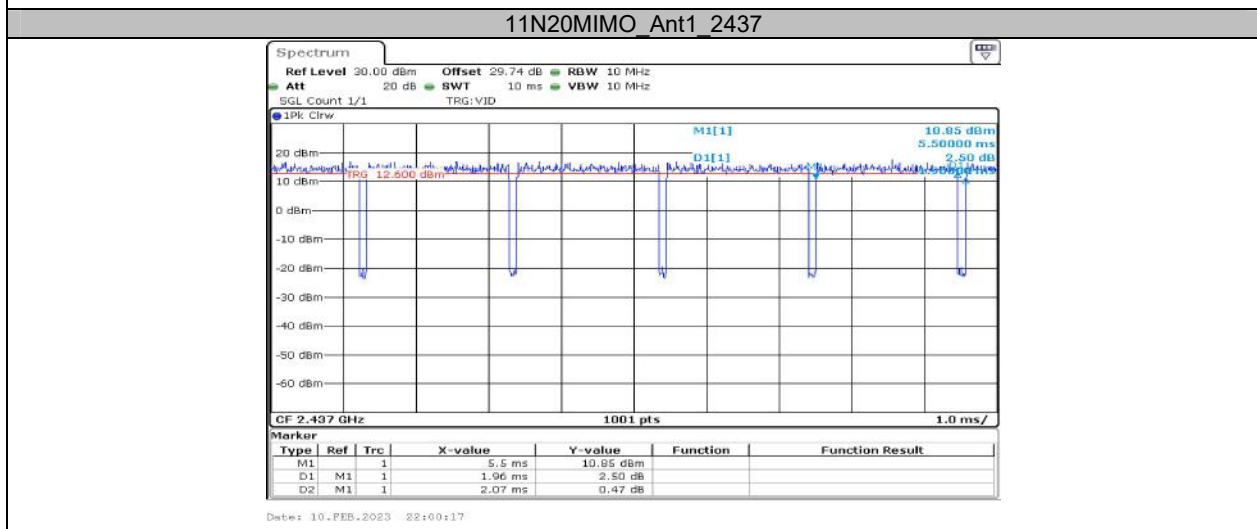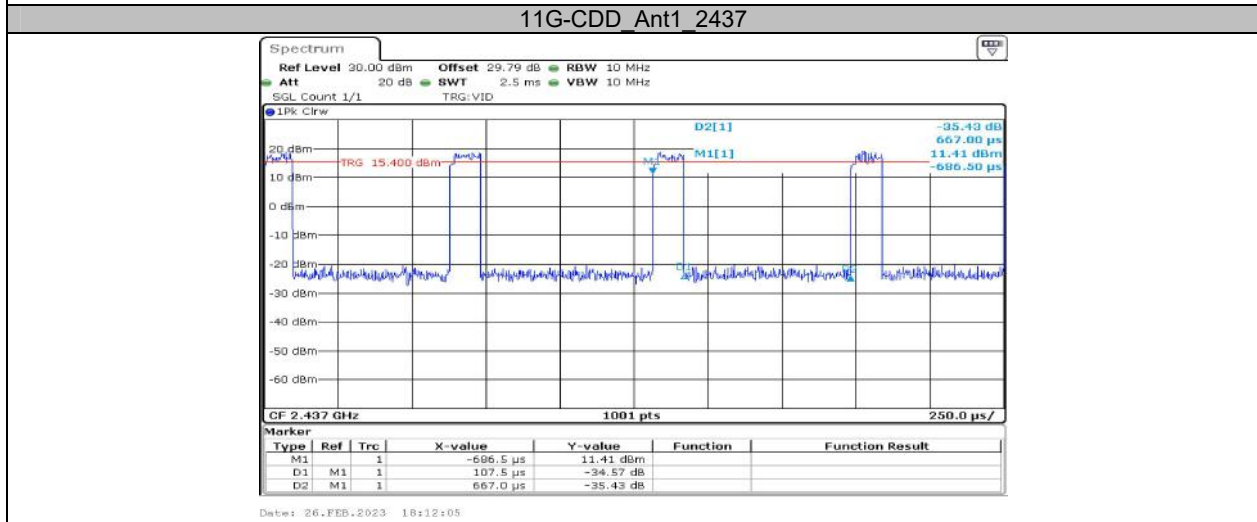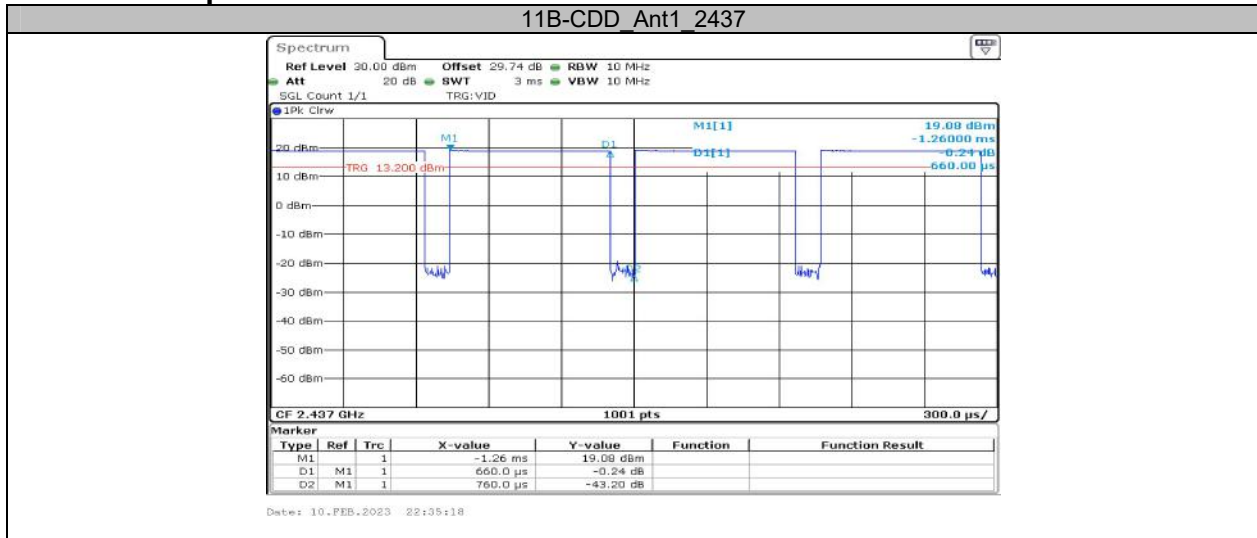

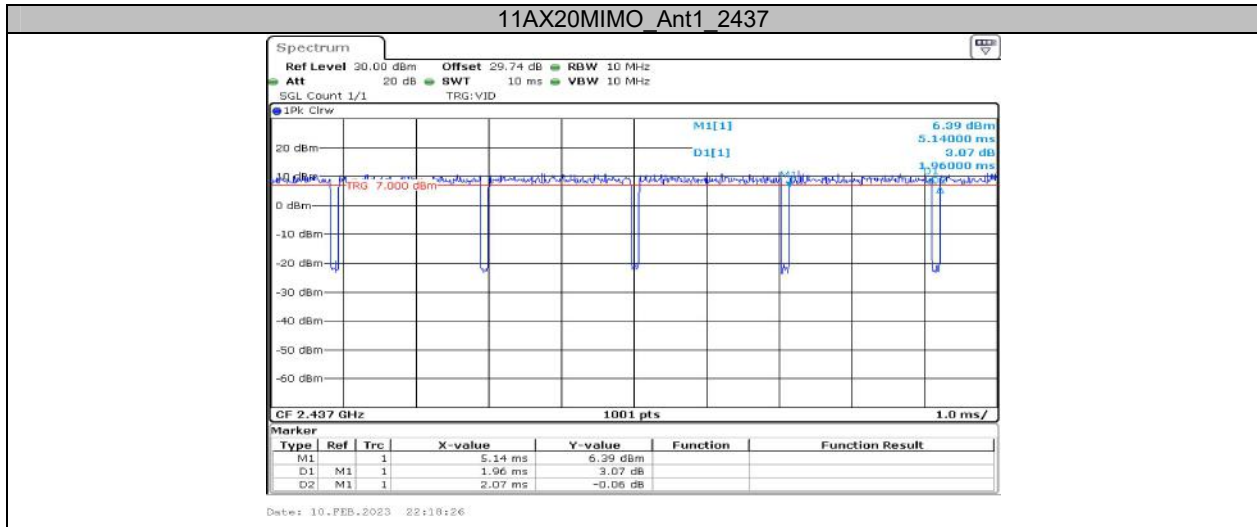

******* END OF REPORT *******