

Exhibit E

1.5m EIRPsd Data Table

Co Pol Elevation, 0 to +30 Degrees @ 0.1 / 0.5 deg (B)

14.25 GHz @ -14 dBW / 4 kHz

Angle Degrees	EIRPsd dBW/4kHz	Mask dBW/4kHz
0.0	30.7	
0.1	30.8	
0.2	30.7	
0.3	30.3	
0.4	29.6	
0.5	28.7	
0.6	27.5	
0.7	25.8	
0.8	23.7	
0.9	21.1	
1.0	17.7	
1.1	13.3	
1.2	8.8	
1.3	8.6	
1.4	10.8	
1.5	12.2	
1.6	12.7	
1.7	12.4	
1.8	11.5	
1.9	10.1	
2.0	8.3	
2.1	6.0	
2.2	3.6	
2.3	1.6	
2.4	0.1	
2.5	-0.7	
2.6	-1.0	
2.7	-1.0	
2.8	-0.8	
2.9	-0.7	
3.0	-0.7	6.1
3.1	-1.1	5.7
3.2	-2.1	5.4
3.3	-3.3	5.0
3.4	-4.8	4.7
3.5	-5.6	4.4
3.6	-5.1	4.1
3.7	-4.0	3.8
3.8	-3.0	3.5
3.9	-2.6	3.2
4.0	-2.6	2.9
4.1	-2.9	2.7
4.2	-3.7	2.4
4.3	-4.9	2.2
4.4	-6.7	1.9
4.5	-8.9	1.7
4.6	-10.4	1.4
4.7	-9.7	1.2
4.8	-8.1	1.0
4.9	-7.2	0.7
5.0	-6.9	0.5
5.1	-7.1	0.3
5.2	-7.2	0.1
5.3	-6.9	-0.1
5.4	-6.2	-0.3
5.5	-5.7	-0.5
5.6	-5.3	-0.7
5.7	-5.1	-0.9

14.25 GHz @ -14 dBW / 4 kHz

[illegible]

1.5m EIRPsd Data Table


Co Pol Elevation, 0 to +30 Degrees @ 0.1 / 0.5 deg (B)

5.8	-5.1	-1.1
5.9	-4.9	-1.3
6.0	-4.6	-1.5
6.1	-4.2	-1.6
6.2	-4.0	-1.8
6.3	-4.1	-2.0
6.4	-4.5	-2.2
6.5	-5.2	-2.3
6.6	-6.2	-2.5
6.7	-7.2	-2.7
6.8	-8.5	-2.8
6.9	-9.9	-3.0
7.0	-11.7	-3.1
7.1	-13.5	-3.3
7.2	-14.6	-3.4
7.3	-14.4	-3.6
7.4	-14.0	-3.7
7.5	-13.7	-3.9
7.6	-13.9	-4.0
7.7	-14.4	-4.2
7.8	-15.1	-4.3
7.9	-16.3	-4.4
8.0	-18.3	-4.6
8.1	-21.5	-4.7
8.2	-25.6	-4.8
8.3	-24.6	-5.0
8.4	-20.2	-5.1
8.5	-17.4	-5.2
8.6	-16.3	-5.4
8.7	-16.0	-5.5
8.8	-17.1	-5.6
8.9	-20.0	-5.7
9.0	-24.5	-5.9
9.1	-21.9	-6.0
9.2	-16.6	-6.1
9.3	-13.2	-6.2
9.4	-11.2	-6.3
9.5	-10.1	-6.4
9.6	-9.8	-6.6
9.7	-10.0	-6.7
9.8	-10.7	-6.8
9.9	-11.7	-6.9
10.0	-12.5	-7.0

[illegible]

Cobham SATCOM, Sea Tel Products
 1.5 meter EIRPsd, VV Co-Pol, Elevation, E-Plane (B)

14.25 GHz @ -14 dBW / 4 kHz, 0.2 dB Radome Loss

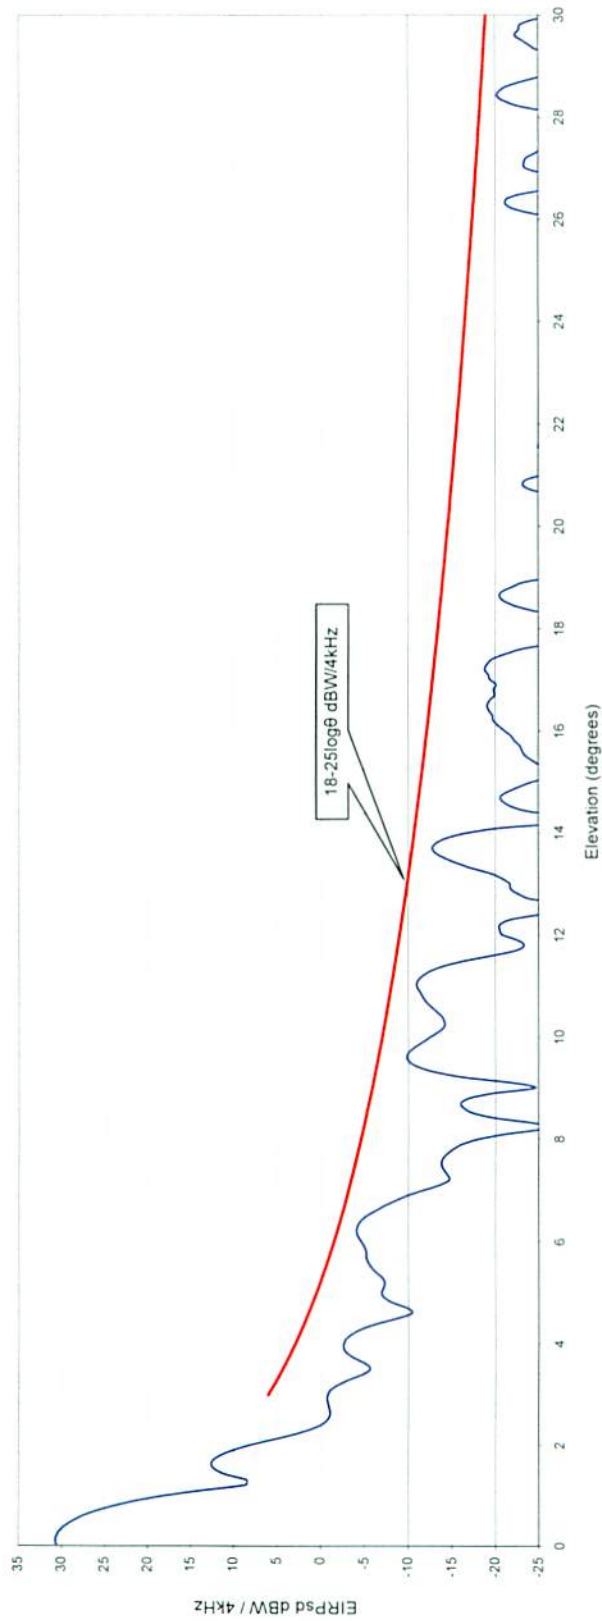

Plot Parameters		
Input sd	Gain	Cal Factor
-14.0	44.99	46.23
Peak Excursions dB		
3° to 30°		
-	-	-2.14
% Over		
0%		

File: NewFeed_6006_WD_Tx\Sea2.txt